



HCT CO., LTD.

PRODUCT COMPLIANCE DIVISION
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA
TEL : +82 31 639 8539 FAX : +82 31 639 8525 www.hct.co.kr

EMI CERTIFICATION REPORT

LG Electronics Inc.

60-39, Gasan-dong, Gumchon-gu,
Seoul, 153-023, Korea

Date of Issue: November 25, 2009

Test Report No.: HCTE0911FE22

Test Site: HCT CO., LTD.

HCT FRN: 0005-8664-21

FCC ID:

BEJGD880

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B / CISPR 22 Class B

Equipment (EUT) Type : Cellular / PCS GSM / EDGE Phone with Bluetooth & WLAN

Trade Name / Model(s) : LG Electronics Inc. / GD880

Port / Connector(s) : USB Data Port / Headset Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862.

Report prepared by
: Gyeong Seon Kim
Test Engineer of EMC Tech. Part

Approved by
: Nam WooK Kang
Manager of EMC Tech. Part

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	3
1.1 Product description.....	3
1.2 Related submittal(s)/Grant(s).....	3
1.3 Tested system details.....	4
1.4 Cable description.....	4
1.5 Noise suppression parts on cable. (I/O cable)	4
1.6 Test methodology.....	5
1.7 Test facility.....	5
2. SYSTEM TEST CONFIGURATION.....	6
2.1 Configuration of tested system.....	6
3. PRELIMINARY TEST.....	7
3.1 Conducted Emission test.....	7
3.2 Radiated Emission test.....	7
4. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY.....	8
4.1 Conducted Emission test.....	8
4.2 Radiated Emission test.....	13
5. FIELD STRENGTH CALCULATION.....	14
6. TEST EQUIPMENT.....	15
7. CONCLUSION.....	16

ATTACHMENT : TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product Description

The LG Electronics Inc. Model: GD880, Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN.

It's basic purpose is used for communications. It transmits from GSM 850 (824.20 MHz to 848.80 MHz), GSM 1 900 (1 850.20 MHz to 1 909.80 MHz) and receives from GSM 850 (869.20 MHz to 893.80 MHz), GSM 1 900 (1 930.20 MHz to 1 989.80 MHz).

Model	GD880
FCC ID	BEJGD880
E.U.T Type	Cellular/PCS GSM/ EDGE Phone with Bluetooth & WLAN
TX Frequency	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900)
RX Frequency	869.20 MHz to 893.80 MHz (GSM850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Number/ Part Number	FCC ID / DoC	Connected To
Cellular/PCS GSM/ EDGE Phone with Bluetooth & WLAN	LG	GD880	BEJGD880	Notebook PC
Notebook PC	HP	Compaq6730b	DoC	E.U.T
Notebook PC adaptor	Hipro Electronics	PPP014Y-S	-	Notebook PC
Mouse	Microsoft	Intellimouse optical USB and PS/2 compatible	DoC	Notebook PC
USB cable	-	-	-	E.U.T Notebook PC
Headset	-	-	-	-

1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (M)
Cellular/PCS GSM/ EDGE Phone with Bluetooth & WLAN	Headset jack	-	N	(D)1.2
	USB data	Y	Y	(P,D)1.2
Notebook PC	USB (Mouse)	-	Y	(D)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Cellular/PCS GSM/ EDGE Phone with Bluetooth & WLAN	Headset jack	N	-	Y	E.U.T End
	USB data	N	-	Y	Both End
Notebook PC	USB (Mouse)	Y	Notebook PC End	Y	Notebook PC End

1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

1.7 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-ri, Hobup-myun, Ichon-si, Kyoungki-do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 10, 2009. (Registration Number: 90661)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower


2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System

Power Line Conducted test : E.U.T was connected to LISN, all other peripheral equipment were connected to another LISN. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m open area test site.

[Configuration of Tested System]

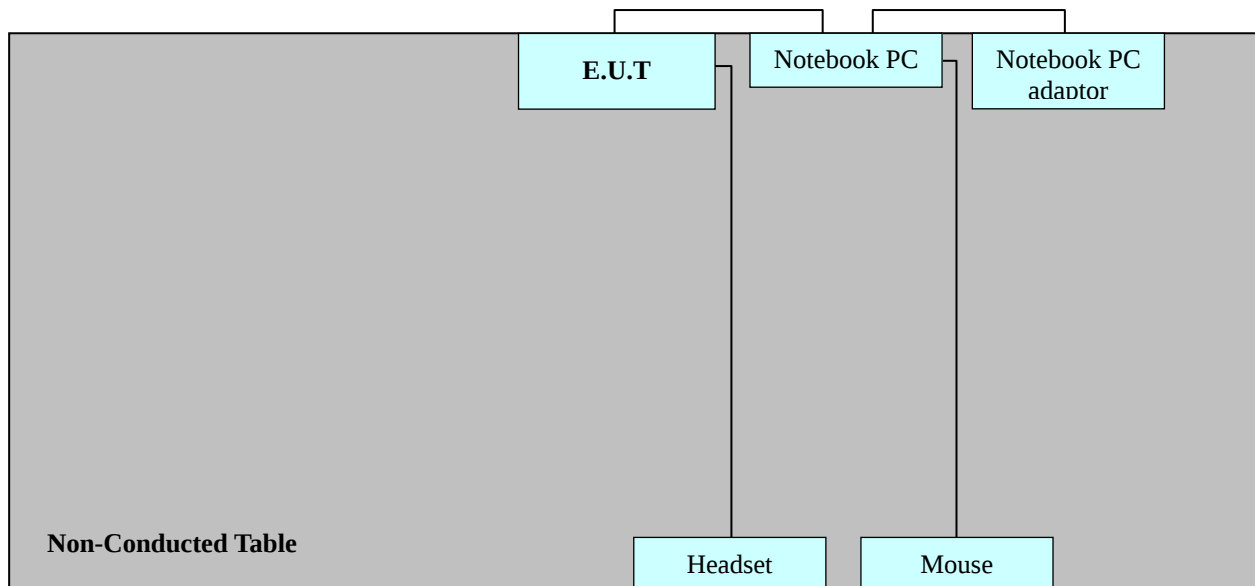

Power Line: 110 VAC

3. PRELIMINARY TEST

3.1 Conducted Emission Test

During preliminary tests, the following operating mode was investigated:

Operation Mode	The Worst Operating Condition
Data Communication	○

3.2 Radiated Emission Test

During preliminary tests, the following operating mode was investigated:

Operation Mode	The Worst Operating Condition
Data Communication	○

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit apply to	: CISPR 22 Class B
Result	: Passed by 5.5 dB
Operating condition	: Data Communication mode
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Temperature	: 23.0 °C
Humidity level	: 31.9 %
Test date	: November 23, 2009

Power Line Conducted Emissions			CISPR 22 Class B		
Frequency (MHz)	Amplitude (dB μ V)	Conductor	Result	Limit (dB μ V)	Margin (dB)
0.1541	52.2	NEUTRAL	Quasi-Peak	66.0	13.6
0.1541	53.6	HOT	Quasi-Peak	66.0	12.2
0.1661	50.8	HOT	Quasi-Peak	65.0	14.4
0.3541	44.3	NEUTRAL	Quasi-Peak	59.0	14.6
0.7240	44.7	HOT	Quasi-Peak	56.0	11.3
1.4320	41.6	NEUTRAL	Quasi-Peak	56.0	14.4
0.3581	41.0	NEUTRAL	Average	49.0	7.8
0.3581	41.1	HOT	Average	49.0	7.7
0.6640	36.2	NEUTRAL	Average	46.0	9.8
0.7280	40.5	HOT	Average	46.0	5.5
0.7320	40.0	NEUTRAL	Average	46.0	6.0
1.4320	36.2	NEUTRAL	Average	46.0	9.8


HCT

EMC

EUT : GD880
Manufacturer : LG
Operating Condition : DATA COMMUNICATION MODE
Test Site : SHIELD ROOM
Operator : GS-KIM
Test Specification : CISPR 22 CLASS B
Comment : H

SCAN TABLE: "CISPR 22 Voltage"

Short Description:		CISPR 22 Voltage					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
150.1 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
Average							
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	
Average							
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16	

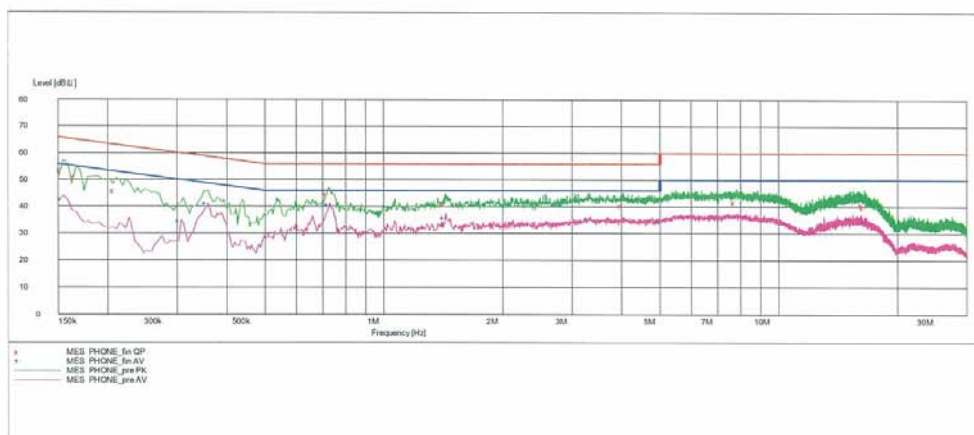

MEASUREMENT RESULT: "PHONE_fin QP"

11/23/2009 11:44 AM						
Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Line	PE
0.154100	53.60	10.0	66	12.2	1	---
0.166100	50.80	10.0	65	14.4	1	---
0.210100	45.80	10.1	63	17.4	1	---
0.724000	44.70	10.1	56	11.3	1	---
1.432000	41.40	10.1	56	14.6	1	---
4.040000	40.30	10.3	56	15.7	1	---
7.832000	41.50	10.6	60	18.5	1	---
16.480000	40.70	11.3	60	19.3	1	---
16.576000	40.00	11.3	60	20.0	1	---

11/23/2009 11:44 AM HCT EMC LAB

MEASUREMENT RESULT: "PHONE_fin AV"

11/23/2009 11:44 AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.154100	42.60	10.0	56	13.2	1	---
0.306100	34.30	10.1	50	15.7	1	---
0.358100	41.10	10.0	49	7.7	1	---
0.728000	40.50	10.1	46	5.5	1	---
1.436000	35.70	10.1	46	10.3	1	---
3.320000	35.50	10.2	46	10.5	1	---
5.000000	34.60	10.3	46	11.4	1	---
15.420000	35.60	11.2	50	14.4	1	---
16.668000	34.40	11.3	50	15.6	1	---

11/23/2009 11:44 AM HCT EMC LAB


HCT

EMC

EUT : GD880
Manufacturer : LG
Operating Condition : DATA COMMUNICATION MODE
Test Site : SHIELD ROOM
Operator : GS-KIM
Test Specification : CISPR 22 CLASS B
Comment : N

SCAN TABLE: "CISPR 22 Voltage"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.1 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16
Average						
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16
Average						
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3-Z5-2009.9.16

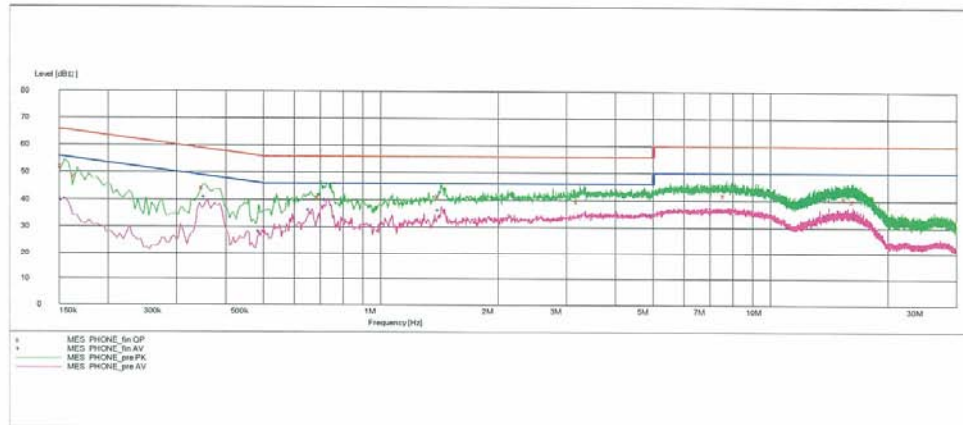

MEASUREMENT RESULT: "PHONE_fin OP"

11/23/2009 11:40 AM						
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.154100	52.20	10.0	66	13.6	1	---
0.166100	48.50	10.0	65	16.6	1	---
0.354100	44.30	10.0	59	14.6	1	---
0.704000	41.00	10.1	56	15.0	1	---
1.432000	41.60	10.1	56	14.4	1	---
3.244000	39.70	10.2	56	16.3	1	---
7.720000	41.90	10.6	60	18.1	1	---
15.772000	40.70	11.3	60	19.3	1	---
16.556000	39.90	11.3	60	20.1	1	---

11/23/2009 11:40 AM HCT EMC LAB

MEASUREMENT RESULT: "PHONE_fin AV"

11/23/2009 11:40 AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.154100	39.90	10.0	56	15.9	1	---
0.358100	41.00	10.0	49	7.8	1	---
0.494100	28.30	10.0	46	17.8	1	---
0.664000	36.20	10.1	46	9.8	1	---
0.732000	40.00	10.1	46	6.0	1	---
1.432000	36.20	10.1	46	9.8	1	---
5.000000	34.70	10.3	46	11.3	1	---
14.100000	34.30	11.1	50	15.7	1	---
16.684000	34.40	11.3	50	15.6	1	---

11/23/2009 11:40 AM HCT EMC LAB

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Limit apply to	: FCC PART 15 Subpart B
Result	: Passed by 3.9 dB
Operating condition	: Camera mode
Detector	: Quasi-Peak (6 dB Bandwidth: 120 kHz)
Temperature	: 12.0 °C
Humidity level	: 45.0 %
Test date	: November 23, 2009

Frequency	Reading	Ant. Factor	Cable Loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB/m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
141.6	18.3	12.4	1.3	H	32.0	43.5	11.5
240.7	29.3	11.1	1.7	H	42.1	46.0	3.9
340.0	17.4	13.9	1.9	V	33.2	46.0	12.8
480.0	20.6	17.0	2.4	V	40.0	46.0	6.0
513.0	15.1	17.5	2.4	V	35.0	46.0	11.0
960.0	13.7	23.9	3.7	H	41.3	46.0	4.7

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Number</u>	<u>Next CAL Date</u>
<u>Conducted Emission</u>			
☒ EMI Test Receiver	Rohde & Schwarz	ESCI	2010.06.02
☒ LISN	Rohde & Schwarz	ESH3-Z5	2010.02.06
☐ LISN	Rohde & Schwarz	ENV216	2010.04.01
☐ Attenuator	Rohde & Schwarz	ESH3-Z2	2010.10.30
<u>Radiated Emission</u>			
☒ EMI Test Receiver	Rohde & Schwarz	ESI40	2010.10.30
☒ Trilog Antenna	Schwarzbeck	VULB9160	2010.12.18
☒ Antenna Master	HD	MA240	
☐ Communication Antenna	TDK	LPDA-0802	-
☐ Antenna Position Tower	HD	240/520/00	-
☐ Base Station	Rohde & Schwarz	CMU 200	2010.02.17
☒ Horn Antenna	Schwarzbeck	BBHA 9120D	2010.03.26
☒ RF-Amplifier	MITEQ	AMF-6D-00101800-35. 20P.PS	2010.04.25
☐ Bluetooth Base Station	TESCOM	TC-3000A	2010.01.09

7. CONCLUSION

The data collected shows that the **LG Electronics Inc. Model: GD880. Cellular/PCS GSM/EDGE Phone with Bluetooth & WLAN. FCC ID: BEJGD880** complies with §15.107 and §15.109 of the FCC rules.