



HCT CO., LTD.

Product Compliance Division

TEL : +82 31 639 8518 FAX : +82 31 639 8535

CERTIFICATE OF COMPLIANCE

FCC Certification

Applicant Name:
LG Electronics, Inc.

Address:
60-39, Gasan-dong, Gumchon-gu, Seoul 153-023,
Korea

Date of Issue:
February 25, 2010

Location:
HCT CO., LTD., San 136-1 Ami-ri, Bubal-eup, Icheon-si,
Kyungki-do, Korea

Test Report No.: HCTR1002FR33

HCT FRN: 0005866421

IC Recognition No.: 5944A-1

FCC ID : BEJGT400

APPLICANT : LG Electronics, Inc.

FCC Model(s): GT400
EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth
Tx Frequency: 824.20 - 848.80 MHz (GSM850)
1 850.20 - 1 909.80 MHz (GSM1900)

Rx Frequency: 869.20 - 893.80 MHz (GSM850)
1 930.20 - 1 989.80 MHz (GSM1900)

Max. RF Output Power: 0.986 W ERP GSM850 (29.94 dBm) / 0.895 W EIRP GSM1900 (29.52 dBm)
0.610 W ERP EDGE850 (27.85 dBm) / 0.793 W EIRP EDGE1900 (28.99 dBm)

Emission Designator(s): 249KGXW (GSM850) / 244KGXW (GSM1900)
242KG7W (GSM850 EDGE) / 249KG7W (GSM1900 EDGE)

FCC Classification: PCS Licensed Transmitter held to ear (PCE)

FCC Rule Part(s): §22, §24, §2

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT.CO., LTD. Certifies that no party to this application has been denied FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



Report prepared by
: Jong Seok Lee
Test Engineer of RF Team



Approved by
: Sang Jun Lee
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1002FR33	Date of Issue: February 25, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth	FCC ID: BEJGT400	Page 1 of 42

Table of Contents

1. GENERAL INFORMATION	3
2. INTRODUCTION	4
2.1 EUT DESCRIPTION	4
2.2 MEASURING INSTRUMENT CALIBRATION	4
2.3 TEST FACILITY	4
3. DESCRIPTION OF TESTS	5
3.1 Effective Radiated Power/Equivalent Isotropic Radiated Power	5
3.2 Peak- to- Average Ratio	6
3.3 Occupied bandwidth	7
3.4 Spurious and Harmonic Emissions at Antenna Terminal	8
3.5 Radiated Spurious and Harmonic Emissions.....	9
3.6 Frequency stability / variation of ambient temperature	10
4. LIST OF TEST EQUIPMENT	11
5. SUMMARY OF TEST RESULTS	12
6. SAMPLE CALCULATION	13
7. TEST DATA	14
7.1 Conducted Output Power	14
7.2 Peak-to-Average Ratio	15
7.3 Occupied Bandwidth	15
7.4 Conducted Spurious Emissions	16
7.4.1 Band Edge	16
7.5 Effective Radiated Power Output (GSM)	17
7.6 Equivalent Isotropic Radiated Power (GSM)	18
7.7 Radiated Spurious Emissions.....	19
7.7.1 Radiated Spurious Emissions (GSM 850 Mode)	19
7.7.2 Radiated Spurious Emissions (GSM 1900 Mode)	20
7.8 Frequency stability / variation of ambient temperature	21
7.8.1 FREQUENCY STABILITY (GSM 850 Mode)	21
7.8.2 FREQUENCY STABILITY (GSM 1900 Mode)	22
8. TEST PLOTS.....	23



MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: LG Electronics, Inc.

Address: 60-39, Gasan-dong, Gumchon-gu, Seoul 153-023, Korea

Contact Person: Name: Bong Hyo, Han
Phone #: +82-2-2033-1160
+82-2-2033-1222

FCC ID: BEJGT400

Application Type: Certification

FCC Classification: PCS Licensed Transmitter held to ear (PCE)

FCC Rule Part(s): §22, §24, §2

EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth

Model name(s): GT400

Battery Model Name: LGIP-580N(Standard)
Power Rating: 3.7 V, 1000 mAh, 3.7 Wh
Type: Li-Ion Battery

Tx Frequency: 824.20 - 848.80 MHz (GSM850)
1 850.20 - 1 909.80 MHz (GSM1900)

Rx Frequency: 869.20 - 893.80 MHz (GSM850)
1 930.20 - 1 989.80 MHz (GSM1900)

Max. RF Output Power: 0.986 W ERP GSM850 (29.94 dBm) / 0.895 W EIRP GSM1900 (29.52 dBm)
0.610 W ERP EDGE850 (27.85 dBm) / 0.793 W EIRP EDGE1900 (28.99 dBm)

Emission Designator(s): 249KGXW (GSM850) / 244KGXW (GSM1900)
242KG7W (GSM850 EDGE) / 249KG7W (GSM1900 EDGE)

Antenna Specification Manufacturer: ACE ANTENNA Co., Ltd.
Antenna type: BUILT-IN Antenna
Peak Gain: 0.44 dBi

Date(s) of Tests: January 26, 2010 ~ January 29, 2010

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1002FR33	Date of Issue: February 25, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth	FCC ID: BEJGT400	Page 3 of 42



2. INTRODUCTION

2.1 EUT DESCRIPTION

The Cellular/ PCS GSM/ EDGE Phone with Bluetooth consists of GSM850, GSM1900, GPRS Class11 and EDGE.

2.2 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3 TEST FACILITY


The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-Ri, Hobup-Myun, Ichon-Si, Kyoungki-Do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 10, 2009(Registration Number: 90661)

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1002FR33	Date of Issue: February 25, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth	FCC ID: BEJGT400	Page 4 of 42

3. DESCRIPTION OF TESTS

3.1 Effective Radiated Power/Equivalent Isotropic Radiated Power

Test Set-up

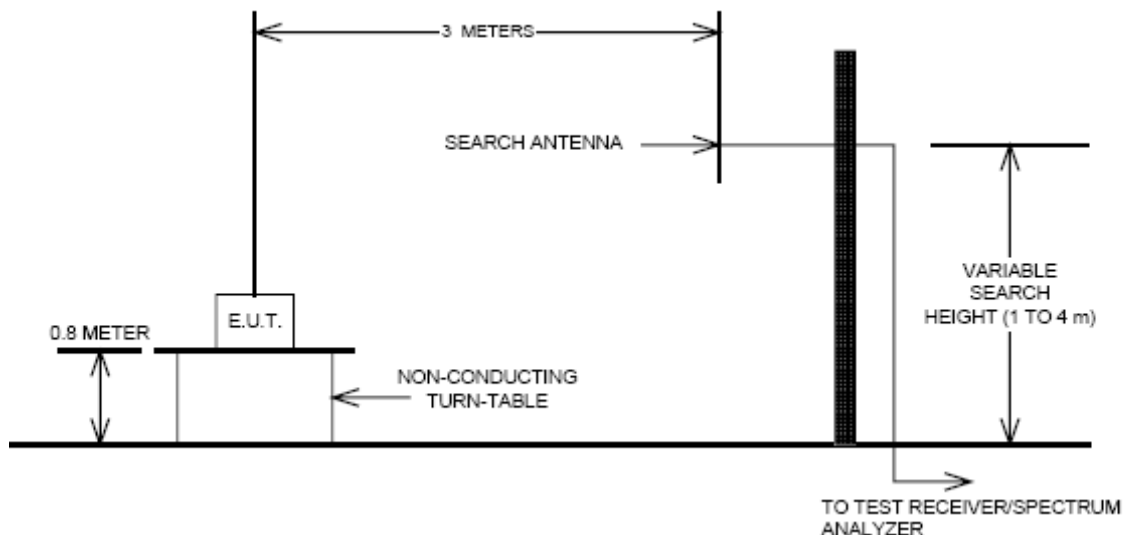

Test Procedure

Radiated emission measurements were performed at an open Site.

The equipment under test is placed on a wooden turntable 3-meters from the receive antenna.

A wooden turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.




3.2 Peak- to- Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA and WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. Plots of the EUT's Peak- to- Average Ratio are shown herein.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1002FR33	Date of Issue: February 25, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth	FCC ID: BEJGT400	Page 6 of 42

3.3 Occupied bandwidth

Test Set-up

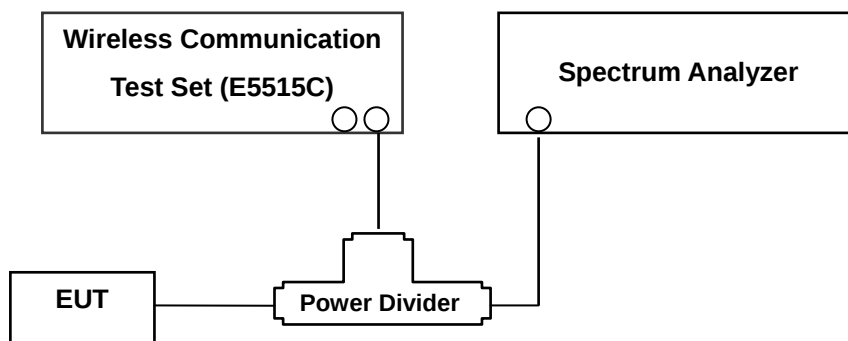

(Configuration of conducted Emission measurement)

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Plots of the EUT's occupied bandwidth are shown herein.



3.4 Spurious and Harmonic Emissions at Antenna Terminal

Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.


The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1 % of the emission bandwidth to show compliance with the – 13 dBm limit, in the 1 MHz bands immediately outside and adjacent to the edge of the frequency block. The 1 MHz RBW was used to scan from 10 MHz to 10 GHz. (GSM1900 Mode: 10 MHz to 20 GHz). A display line was placed at – 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

- Band Edge Requirement : In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1002FR33	Date of Issue: February 25, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth	FCC ID: BEJGT400	Page 8 of 42

3.5 Radiated Spurious and Harmonic Emissions

Test Set-up

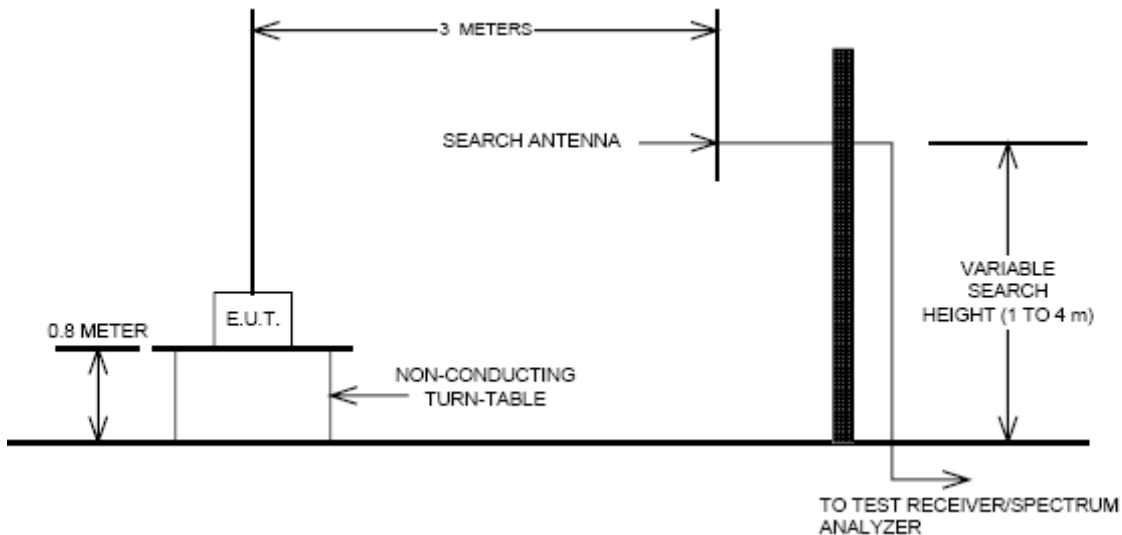

The measurement facilities used for this test have been documented in previous filings with the commission pursuant to section § 2.948. The open field test site is situated in open field with ground screen whose site attenuation characteristics meet ANSI C63.4 –2003. A mast capable of lifting the receiving antenna from a height of one to four meters is used together with a rotatable wooden platform mounted at three from the antenna mast.

- 1) The unit mounted on a wooden table 1.5 m × 1.0 m × 0.80 m is 0.8 meter above test site ground level.
- 2) During the emission test, the turntable is rotated and the EUT is manipulated to find the configuration resulting in maximum emission under normal condition of installation and operation.
- 3) The antenna height and polarization are also varied from 1 to 4 meters until the maximum signal is found.
- 4) The spectrum shall be scanned up to the 10th harmonic of the fundamental frequency.

Test Procedure


The equipment under test is placed on a wooden turntable 3-meters from the receive antenna.

A wooden turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

3.6 Frequency stability / variation of ambient temperature

Test Set-up

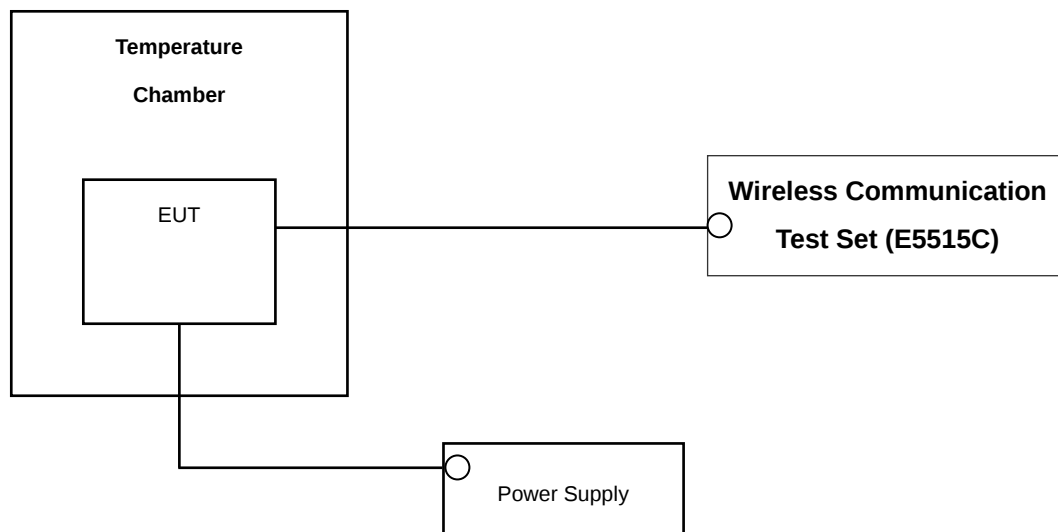

* Nominal Operating Voltage

Test Procedure

The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

NOTE: The EUT is tested down to the battery endpoint.

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
R&S	ESI40/ Spectrum Analyzer	831564/003	Annual	10/30/2010
Agilent	E4416A/ Power Meter	GB41291412	Annual	01/14/2011
Agilent	E9327A/ Power Sensor	MY4442009	Annual	07/28/2010
Agilent	8960 (E5515C)/ Base Station	GB44400269	Annual	02/10/2011
MITEQ	AMF-60-0010 1800-35-20P / AMP	1200937	Annual	05/20/2010
Wainwright	WHK1.2/15G-10EF/H.P.F	2	Annual	06/29/2010
Wainwright	WHK3.3/18G-10EF/H.P.F	1	Annual	06/29/2010
Agilent	775D/ Dual Directional Coupler	12922	Annual	12/24/2010
Agilent	11636B/ Power Divider	11377	Annual	12/24/2010
Digital	EP-3010/ Power Supply	3110117	Annual	01/08/2011
Schwarzbeck	UHAP/ Dipole Antenna	585	Biennial	02/13/2011
Schwarzbeck	UHAP/ Dipole Antenna	558	Biennial	02/13/2011
Korea Engineering	KR-1005L / Chamber	KRAB07063-2CH	Annual	12/28/2010
Schwarzbeck	BBHA 9120D/ Horn Antenna	147	Biennial	03/26/2010
Agilent	E4440A/Spectrum Analyzer	US45303008	Annual	12/23/2010

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049, 22.917(a), 24.238(a)	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 22.917(a), 24.238(a)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	$< 43 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS
2.1046	Conducted Output Power	N/A		PASS
24.232(d)	Peak- to- Average Ratio	$< 13 \text{ dB}$		PASS
2.1055, 22.355, 24.235	Frequency stability / variation of ambient temperature	$< 2.5 \text{ ppm}$		PASS
22.913(a)(2) 24.232(c)	Effective Radiated Power	$< 7 \text{ Watts max. ERP}$	RADIATED	PASS
	Equivalent Isotropic Radiated Power	$< 2 \text{ Watts max. EIRP}$		PASS
2.1053, 22.917(a), 24.238(a)	Radiated Spurious and Harmonic Emissions	$< 43 + 10\log_{10}(P[\text{Watts}])$ for all out-of band emissions		PASS



6. SAMPLE CALCULATION

A. ERP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
GSM850	128	824.20	-11.56	34.28	-8.32	1.17	H	0.30	24.79

ERP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a wooden tripod is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is also varied from 1 to 4 meters until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (ERP).

B. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation


X = Cases not otherwise covered

W = Combination (Audio/Data)

7. TEST DATA

7.1 Conducted Output Power

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

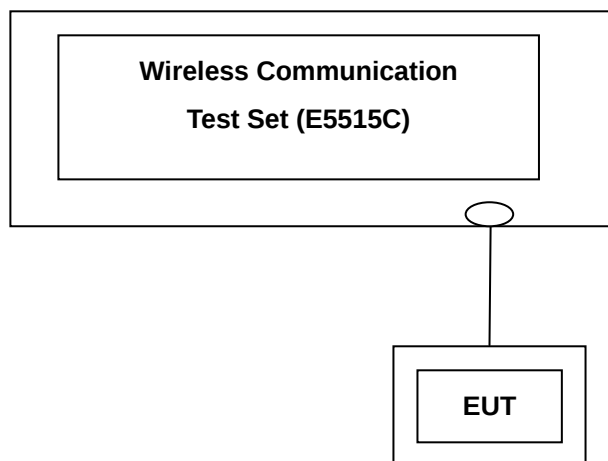

Test Result

Band	Channel	Voice	GPRS Data		
		GSM (dBm)	GPRS 1 TX Slot (dBm)	GPRS 2 TX Slot (dBm)	GPRS 3 TX Slot (dBm)
GSM 850	128	32.35	32.35	32.34	30.22
	190	32.38	32.39	32.39	29.99
	251	32.45	32.46	32.46	30.03
GSM 1900	512	29.37	29.32	29.27	27.71
	661	29.27	29.14	29.14	27.28
	810	29.32	29.18	29.17	27.01

(GSM Conducted Output Powers)

Band	Channel	EDGE Data		
		EDGE 1 TX Slot (dBm)	EDGE 2 TX Slot (dBm)	EDGE 3 TX Slot (dBm)
GSM 850	128	27.02	27.02	27.00
	190	27.06	27.07	27.06
	251	27.15	27.16	27.15
GSM 1900	512	26.00	25.98	25.95
	661	25.89	25.89	25.87
	810	25.93	25.94	25.91

(GSM EDGE Conducted Output Powers)



7.2 Peak-to-Average Ratio

- Plots of the EUT's Peak- to- Average Ratio are shown Page 28.

7.3 Occupied Bandwidth

Band	Channel	Frequency(MHz)	Data (kHz)
GSM850	128	824.20	249.13
	190	836.60	243.22
	251	848.80	245.47
EDGE	128	824.20	242.17
GSM1900	512	1850.20	243.94
	661	1880.00	244.18
	810	1909.80	240.00
EDGE	661	1880.00	248.81

- Plots of the EUT's Occupied Bandwidth are shown Page 24~27.



7.4 Conducted Spurious Emissions

Band	Channel	Frequency of Maximum Harmonic (GHz)	Maximum Data (dBm)
GSM850	128	7.8250	-30.42
	190	7.0375	-31.22
	251	7.8000	-30.84
GSM1900	512	14.7730	-28.19
	661	13.2270	-28.05
	810	14.3200	-27.77

- Plots of the EUT's Conducted Spurious Emissions are shown Page 37~42.

7.4.1 Band Edge

- Plots of the EUT's Band Edge are shown Page 29~36.



7.5 Effective Radiated Power Output (GSM)

(GSM850 Mode)

Mode	Ch./ Freq.		Measured	Substitute	Ant. Gain	C.L	Pol.	ERP	
	channel	Freq.(MHz)	Level(dBm)	LEVEL (dBm)	(dBd)			W	dBm
GSM850	128	824.20	-7.44	38.40	-8.32	1.17	H	0.78	28.91
	190	836.60	-7.61	38.88	-8.22	1.19	H	0.89	29.47
	251	848.80	-7.86	39.26	-8.12	1.20	H	0.99	29.94
EDGE	251	848.80	-9.95	37.17	-8.12	1.20	H	0.61	27.85

Note: Standard batteries are the only options for this phone

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is in z plane in GSM850 mode. Also worst case of detecting Antenna is in horizontal polarization in GSM850 mode.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.



7.6 Equivalent Isotropic Radiated Power (GSM)

(GSM1900 Mode)

Mode	Ch./ Freq.		Measured	Substitute	Ant. Gain	C.L	Pol.	ERP	
	channel	Freq.(MHz)	Level(dBm)	LEVEL (dBm)	(dBd)			W	dBm
GSM1900	512	1,850.20	-13.15	18.46	10.05	1.91	H	0.46	26.59
	661	1,880.00	-11.76	20.06	10.05	1.95	H	0.65	28.16
	810	1,909.80	-10.47	21.43	10.06	1.97	H	0.90	29.52
EDGE	810	1,909.80	-11.00	20.90	10.06	1.97	H	0.79	28.99

Note: Standard batteries are the only options for this phone

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. **Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is in x plane in GSM1900 mode. Also worst case of detecting Antenna is in horizontal polarization in GSM1900 mode.**

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.



7.7 Radiated Spurious Emissions

7.7.1 Radiated Spurious Emissions (GSM 850 Mode)

■ MEASURED OUTPUT POWER: 29.94 dBm = 0.986 W
■ MODULATION SIGNAL: GSM850
■ DISTANCE: 3 meters
■ LIMIT: - (43 + 10 log₁₀ (W)) = - 42.94 dBc

Ch.	Freq.(MHz)	<u>Measured Level</u> [dBm]	Ant. Gain (dBd)	<u>Substitute</u> <u>Level</u> [dBm]	C.L	Pol.	ERP (dBm)	dBc
128	1,648.40	-36.14	7.09	-46.67	1.73	H	-41.31	-71.25
	2,472.60	-45.35	8.12	-52.46	2.28	H	-46.62	-76.56
	3,296.80	-	-	-	-	-	-	-
190	1,673.20	-39.08	7.23	-49.84	1.79	H	-44.40	-74.34
	2,509.80	-46.07	8.14	-53.20	2.33	H	-47.39	-77.33
	3,346.40	-	-	-	-	-	-	-
251	1,697.60	-40.68	7.41	-51.29	1.83	H	-45.71	-75.65
	2,546.40	-40.52	8.21	-47.80	2.34	H	-41.93	-71.87
	3,395.20	-55.18	9.91	-62.81	2.85	V	-55.75	-85.69

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.

3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



7.7.2 Radiated Spurious Emissions (GSM 1900 Mode)

- MEASURED OUTPUT POWER: 29.52 dBm = 0.895 W
- MODULATION SIGNAL: GSM1900
- DISTANCE: 3 meters
- LIMIT: - (43 + 10 log₁₀ (W)) = -42.52 dBc

Ch.	Freq.(MHz)	<u>Measured Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> [dBm]	C.L	Pol.	EIRP (dBm)	dBc
512	3,700.40	-51.46	12.46	-57.73	2.73	V	-48.00	-77.52
	5,550.60	-	-	-	-	-	-	-
	7,400.80	-	-	-	-	-	-	-
661	3,760.00	-56.19	12.47	-62.16	2.73	V	-52.42	-81.94
	5,640.00	-	-	-	-	-	-	-
	7,520.00	-	-	-	-	-	-	-
810	3,819.60	-55.01	12.49	-60.89	2.73	V	-51.13	-80.65
	5,729.40	-	-	-	-	-	-	-
	7,639.20	-	-	-	-	-	-	-


- NOTES:** 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.8 Frequency stability / variation of ambient temperature

7.8.1 FREQUENCY STABILITY (GSM 850 Mode)

☒ OPERATING FREQUENCY: 836,600,000 Hz
☒ CHANNEL: 190
☒ REFERENCE VOLTAGE: 3.7 VDC
☒ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	836 599 980	-19.96	-0.000 002	-0.024
100%		-30	836 599 990	-9.72	-0.000 001	-0.012
100%		-20	836 599 996	-4.26	-0.000 001	-0.005
100%		-10	836 600 001	1.25	0.000 000	0.001
100%		0	836 600 003	3.27	0.000 000	0.004
100%		+10	836 600 006	5.76	0.000 001	0.007
100%		+20	836 600 018	18.44	0.000 002	0.022
100%		+30	836 600 007	6.77	0.000 001	0.008
100%		+40	836 600 005	4.88	0.000 001	0.006
100%		+50	836 600 018	17.55	0.000 002	0.021
115%	4.255	+20	836 600 002	1.93	0.000 000	0.002
Batt. Endpoint	3.400	+20	836 600 003	2.60	0.000 000	0.003

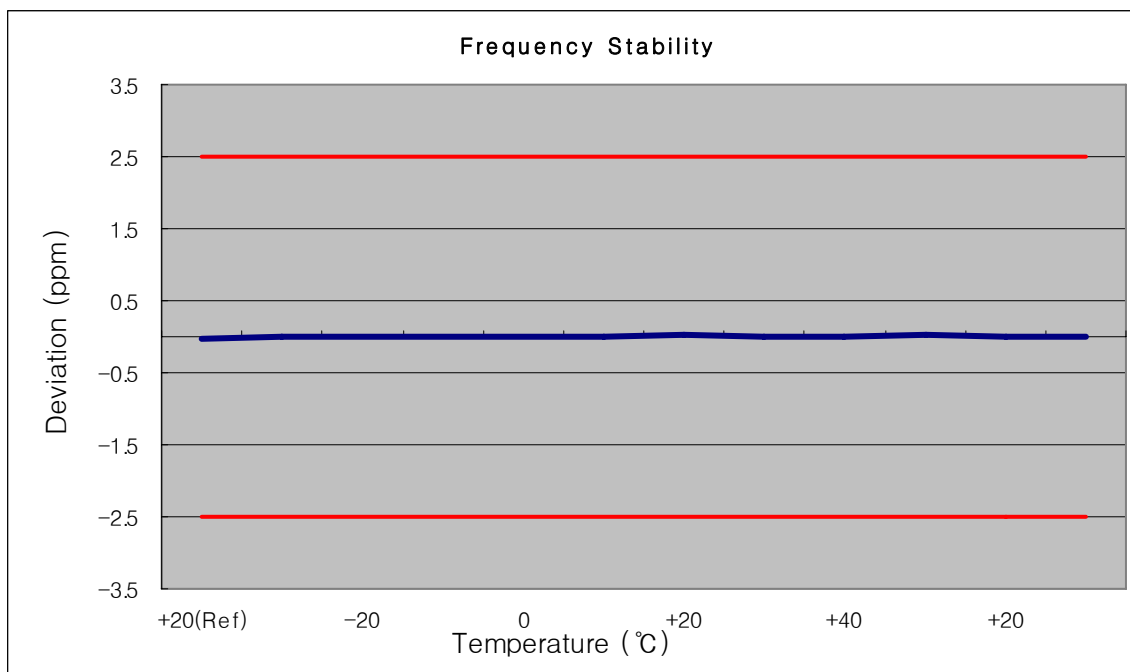

7.8.2 FREQUENCY STABILITY (GSM 1900 Mode)

■ OPERATING FREQUENCY: 1880,000,000 Hz
 ■ CHANNEL: 661
 ■ REFERENCE VOLTAGE: 3.7 VDC
 ■ DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (℃)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	1880 000 026	25.96	0.000 001	0.014
100%		-30	1880 000 022	21.54	0.000 001	0.011
100%		-20	1880 000 015	14.94	0.000 001	0.008
100%		-10	1879 999 997	-3.03	0.000 000	-0.002
100%		0	1879 999 995	-5.29	0.000 000	-0.003
100%		+10	1879 999 991	-8.77	0.000 000	-0.005
100%		+20	1879 999 980	-20.34	-0.000 001	-0.011
100%		+30	1879 999 979	-21.24	-0.000 001	-0.011
100%		+40	1879 999 976	-23.61	-0.000 001	-0.013
100%		+50	1880 000 016	16.48	0.000 001	0.009
115%	4.255	+20	1880 000 022	22.44	0.000 001	0.012
Batt. Endpoint	3.400	+20	1879 999 981	-19.46	-0.000 001	-0.010

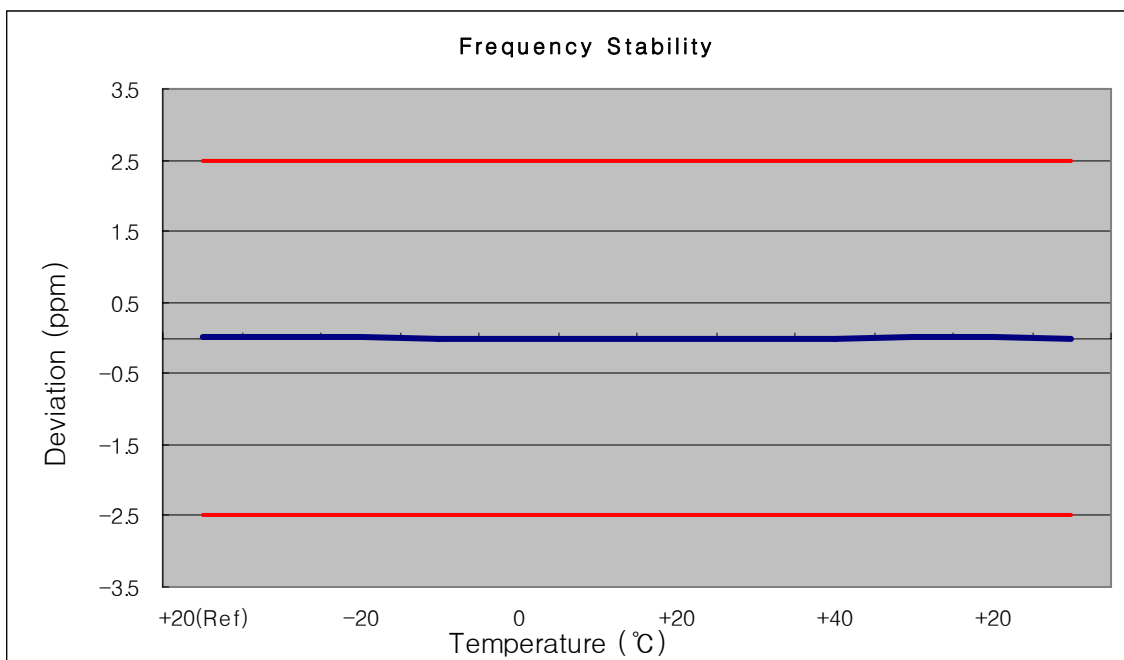




8. TEST PLOTS


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1002FR33	Date of Issue: February 25, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth	FCC ID: BEJGT400	Page 23 of 42



GSM850 MODE (128 CH.) Occupied Bandwidth

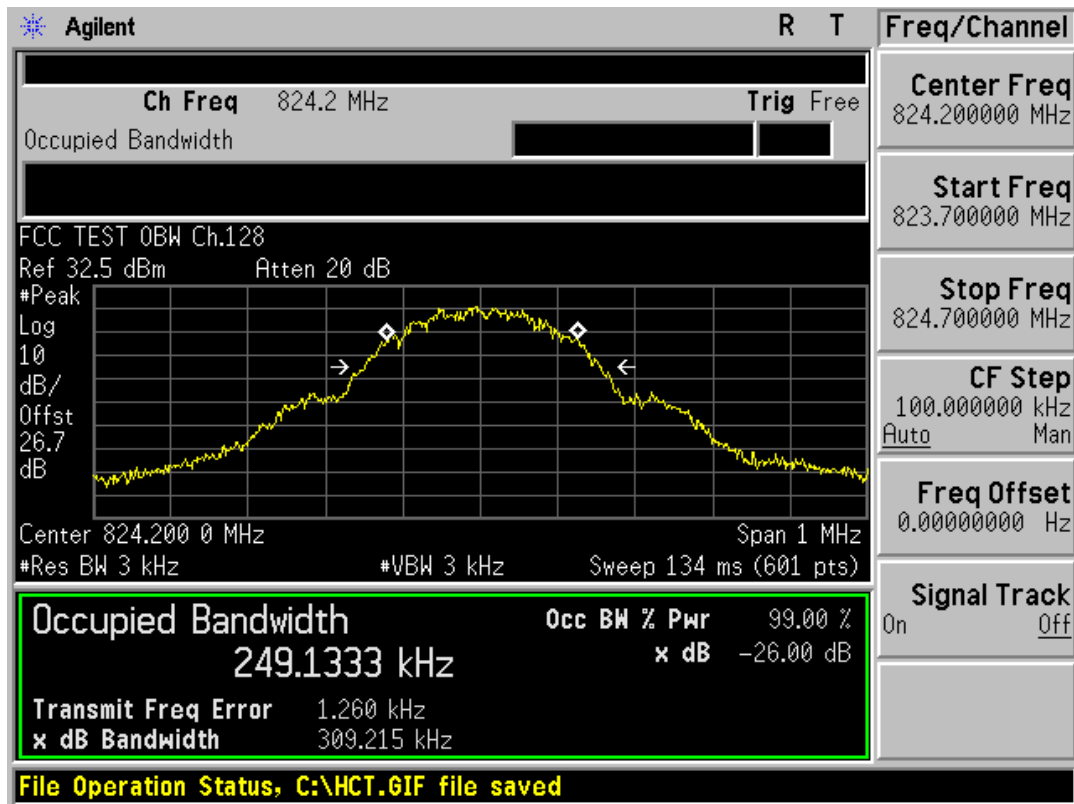


GSM850 MODE (190 CH.) Occupied Bandwidth

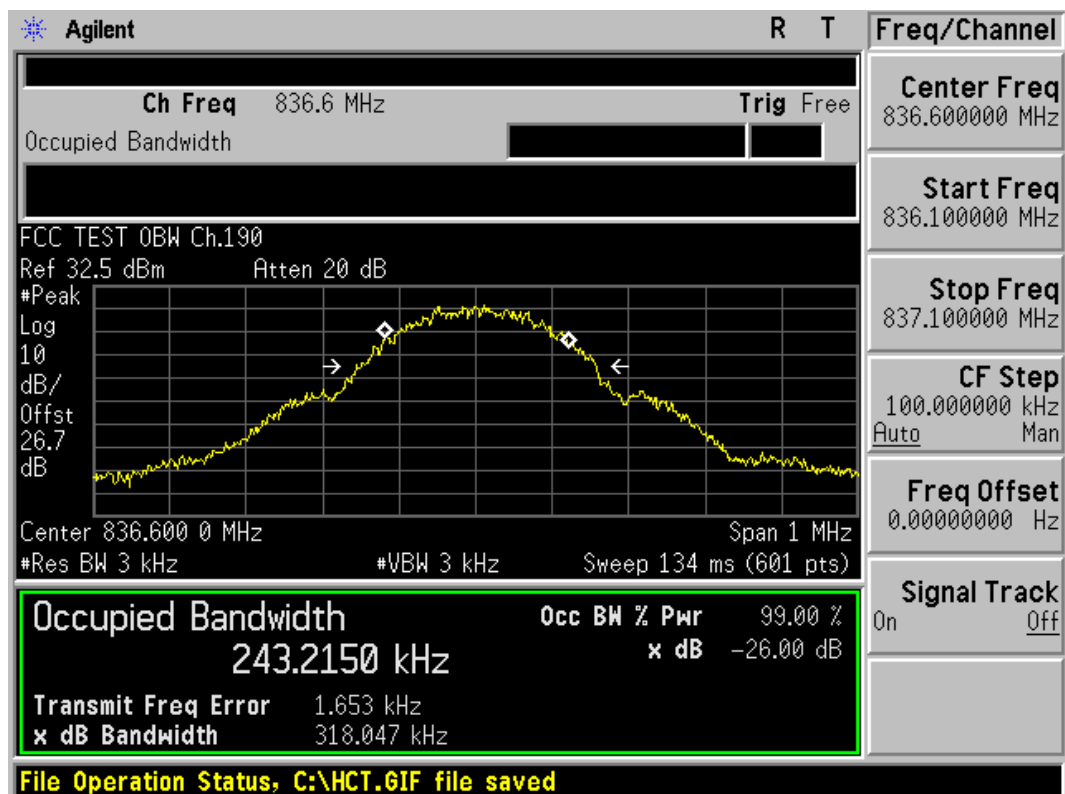


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1002FR33	Date of Issue: February 25, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth	FCC ID: BEJGT400	Page 24 of 42


GSM850 MODE (251 CH.) Occupied Bandwidth

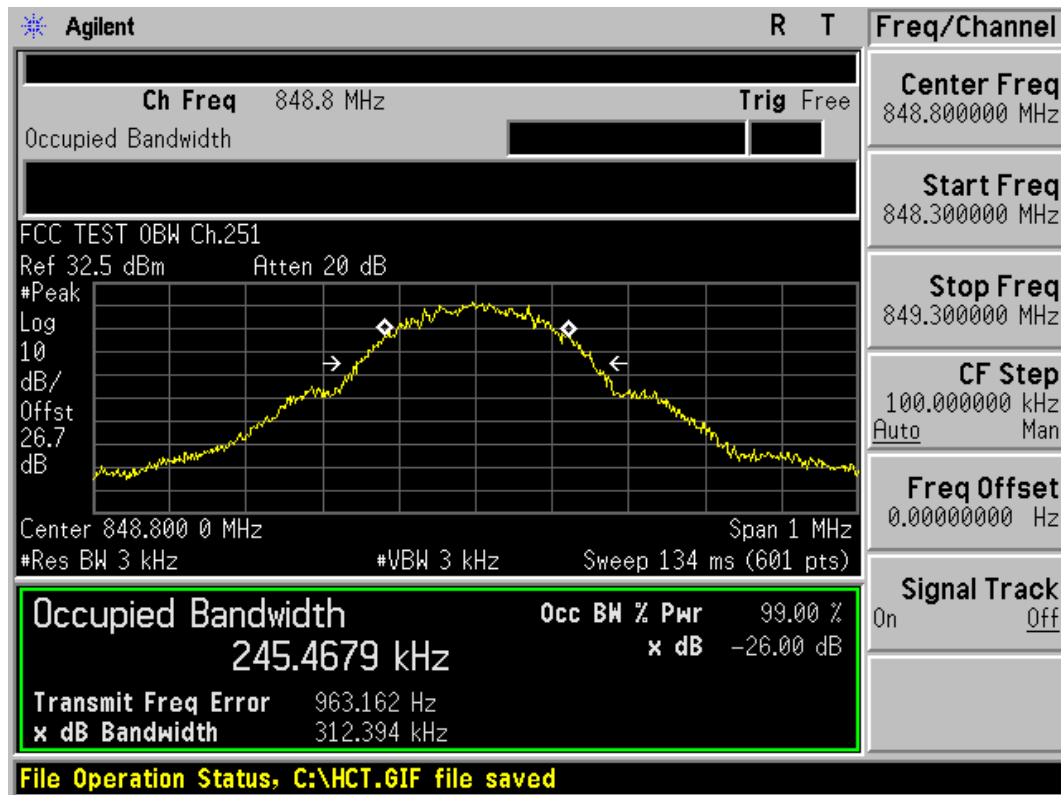


GSM850 EDGE MODE (128 CH.) Occupied Bandwidth

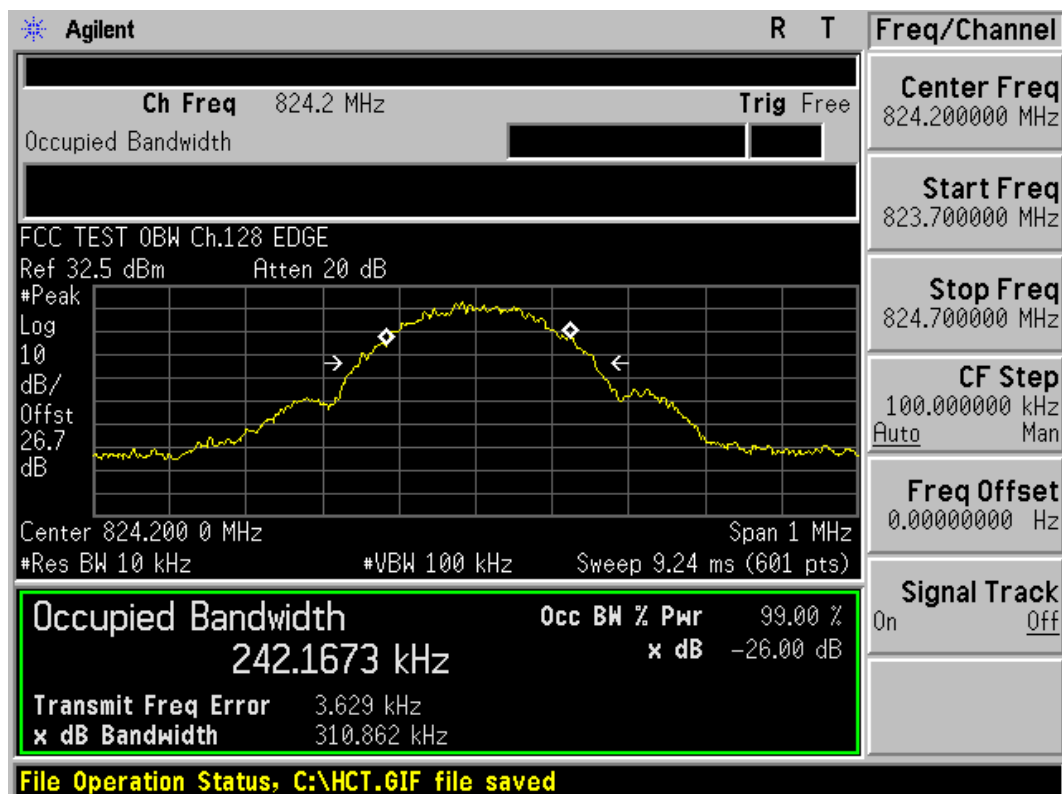


GSM1900 MODE (512 CH.) Occupied Bandwidth

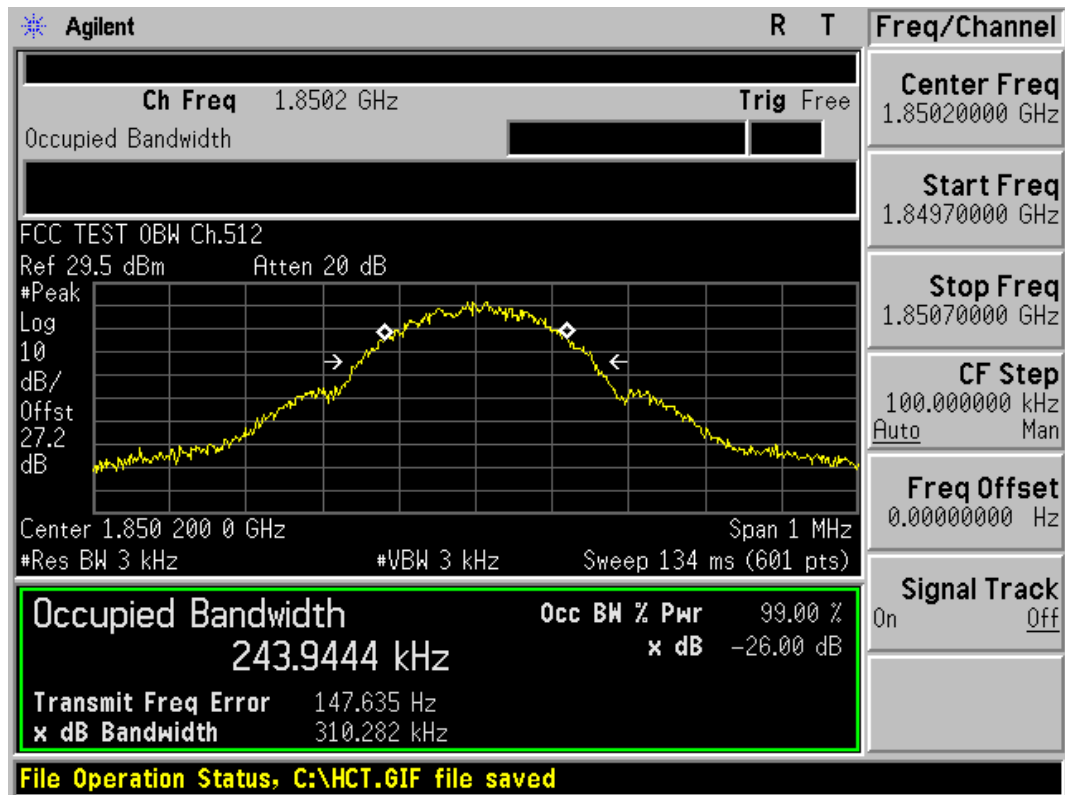


GSM1900 MODE (661 CH.) Occupied Bandwidth

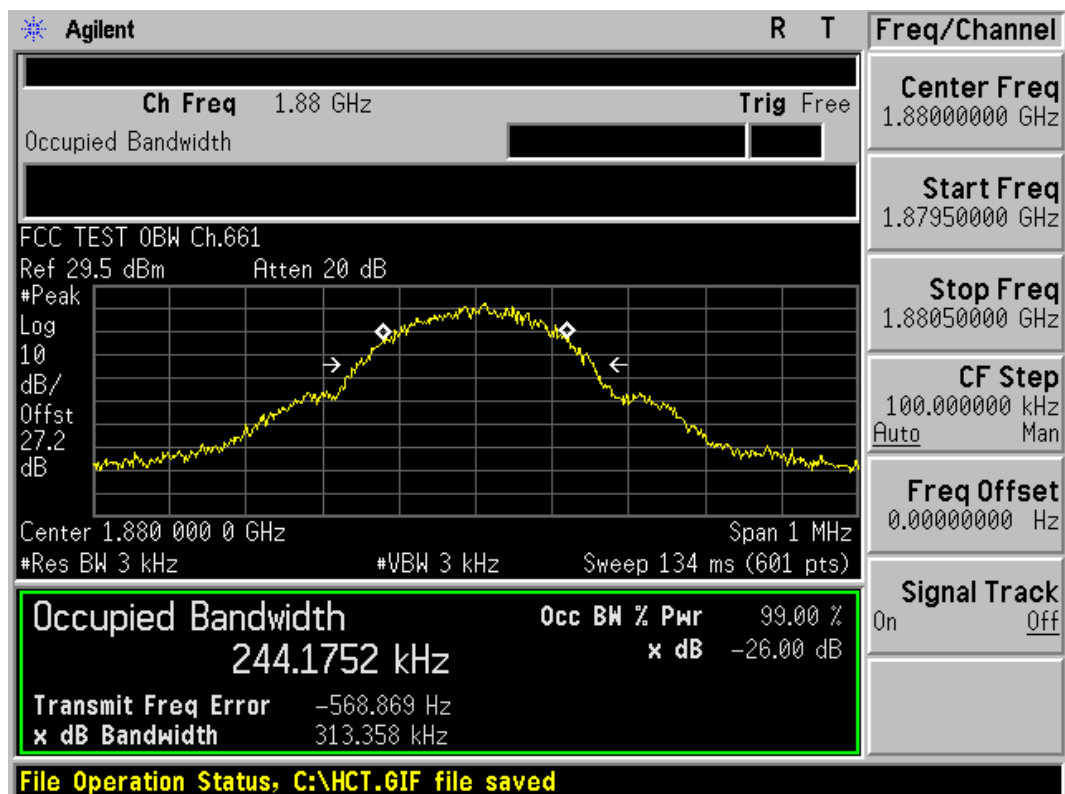

GSM1900 MODE (810 CH.) Occupied Bandwidth

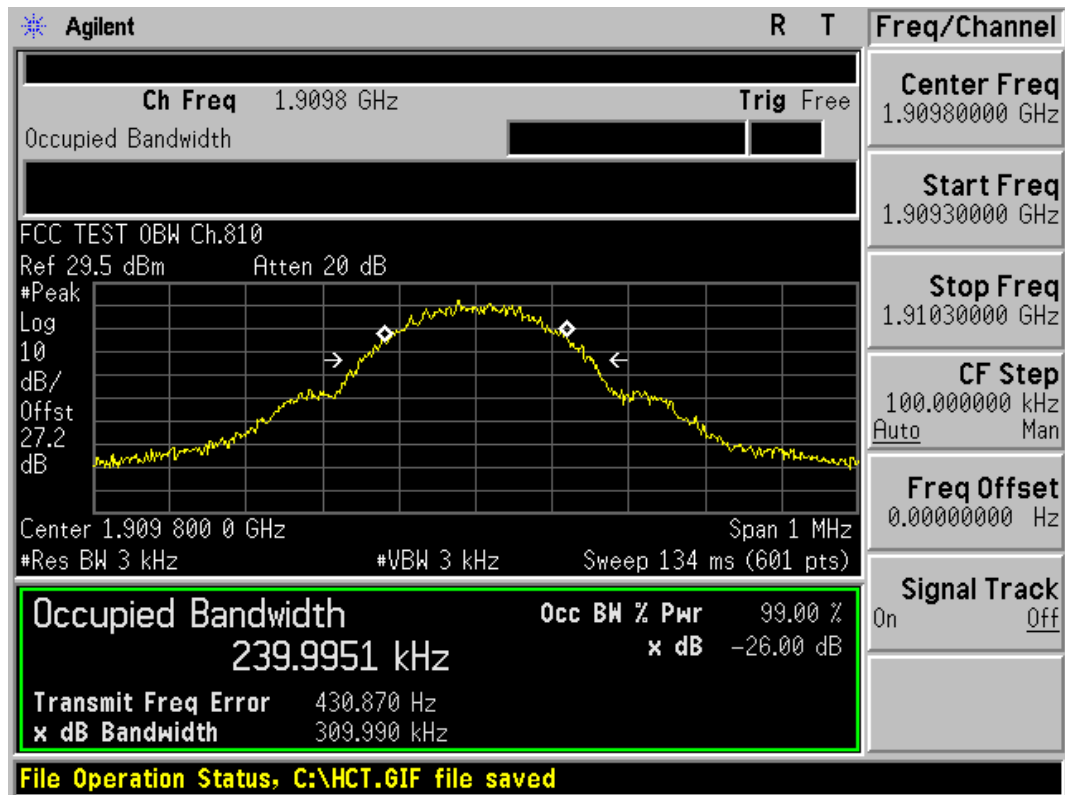

GSM1900 EDGE MODE (661 CH.) Occupied Bandwidth

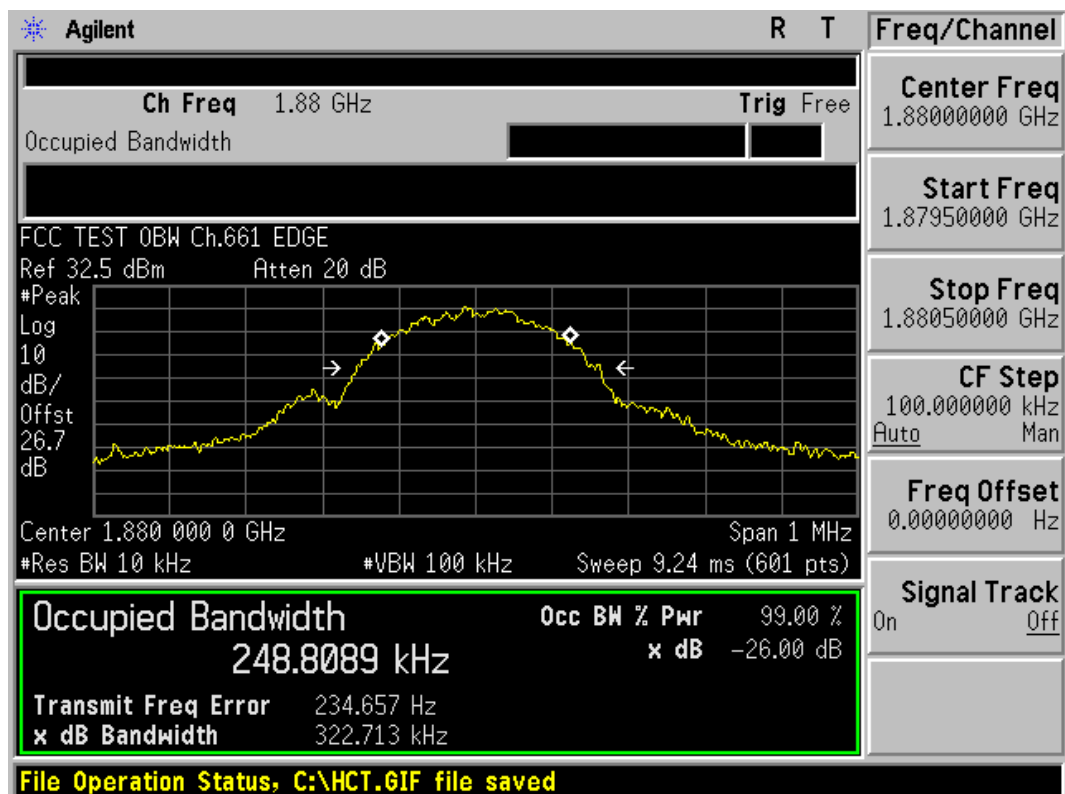


FCC CERTIFICATION REPORT


Test Report No. HCTR1002FR33	Date of Issue: February 25, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth	FCC ID: BEJGT400	www.hct.co.kr Page 27 of 42
---------------------------------	-------------------------------------	---	---------------------	---



GSM1900 MODE (661 CH.) Peak-to-Average Ratio

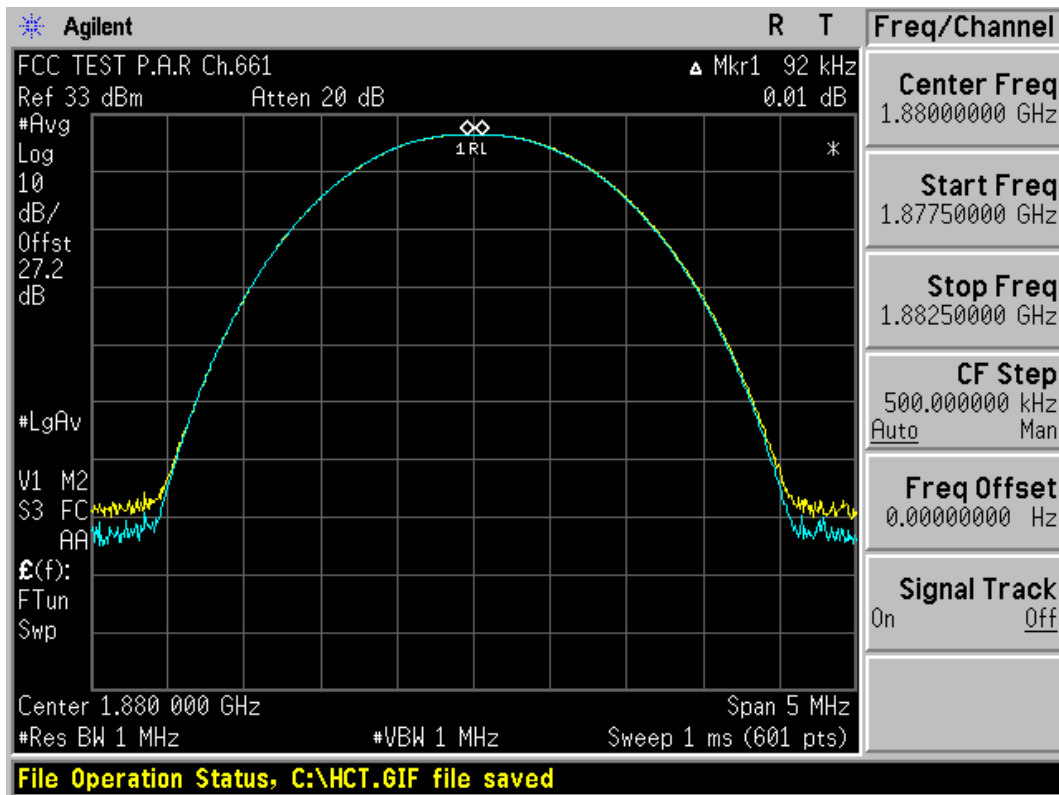


GSM1900 EDGE MODE (661 CH.) Peak-to-Average Ratio

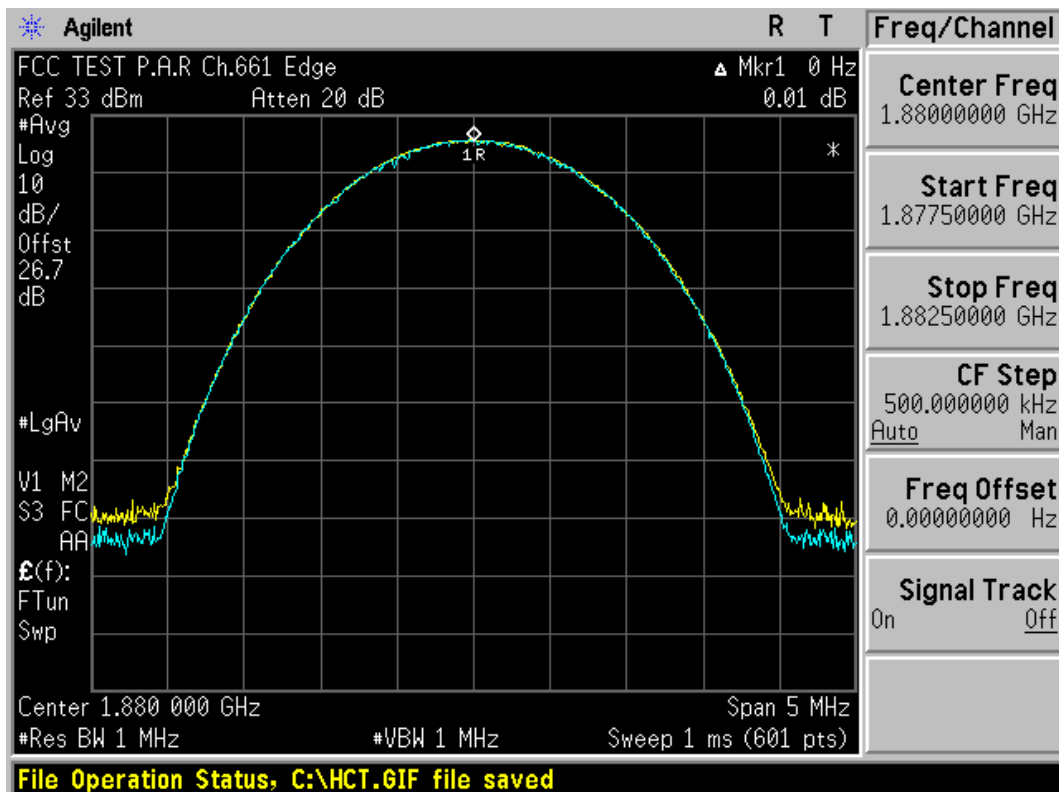


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1002FR33	Date of Issue: February 25, 2010	EUT Type: Cellular/ PCS GSM/ EDGE Phone with Bluetooth	FCC ID: BEJGT400	Page 28 of 42


GSM850 MODE (128 CH.) Band Edge-1

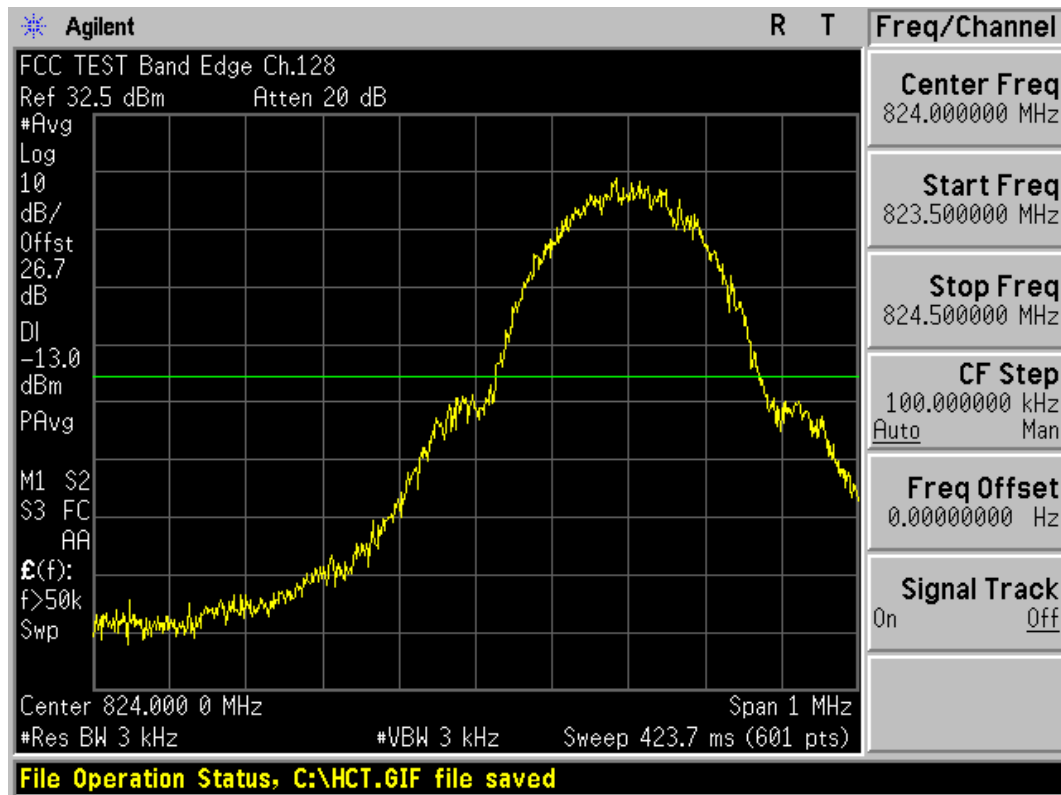


GSM850 MODE (128 CH.) Band Edge-2

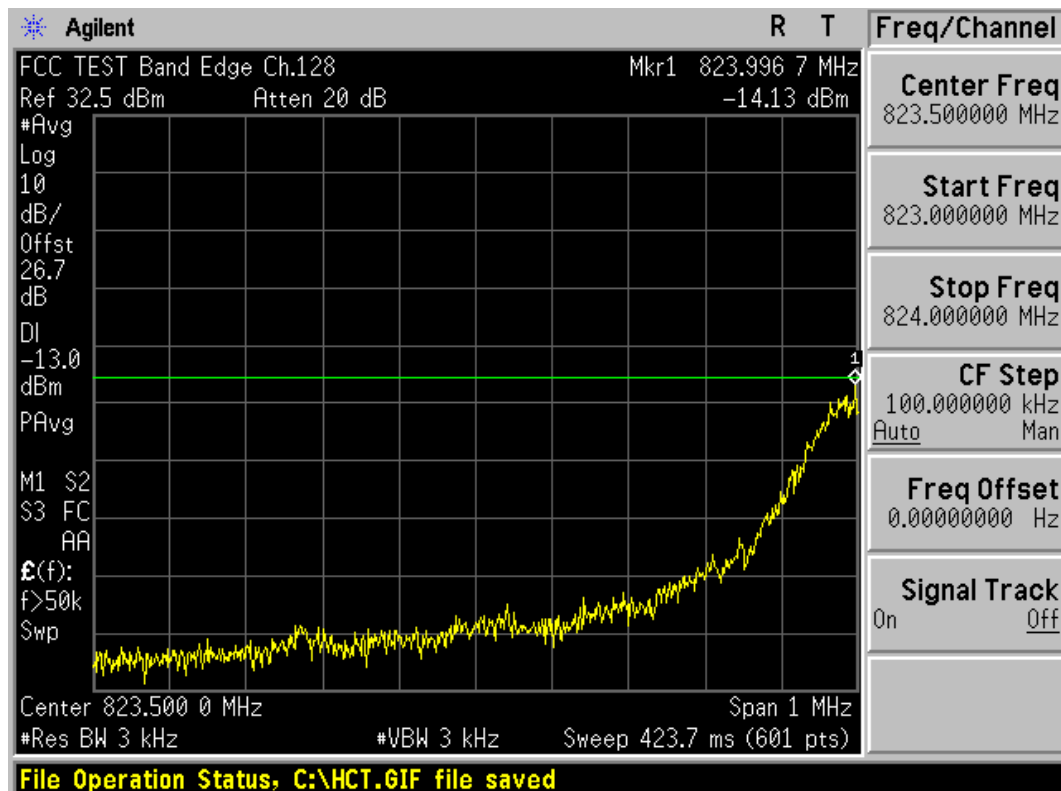


GSM850 MODE (251 CH.) Band Edge-1

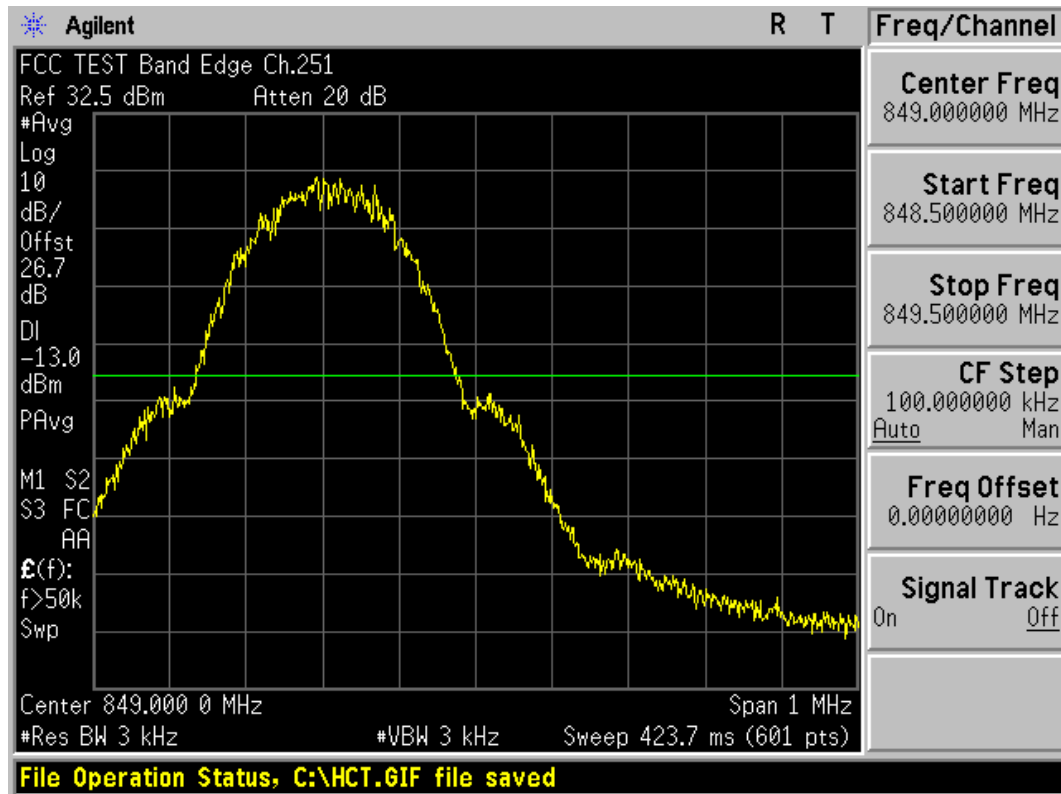


GSM850 MODE (251 CH.) Band Edge-2

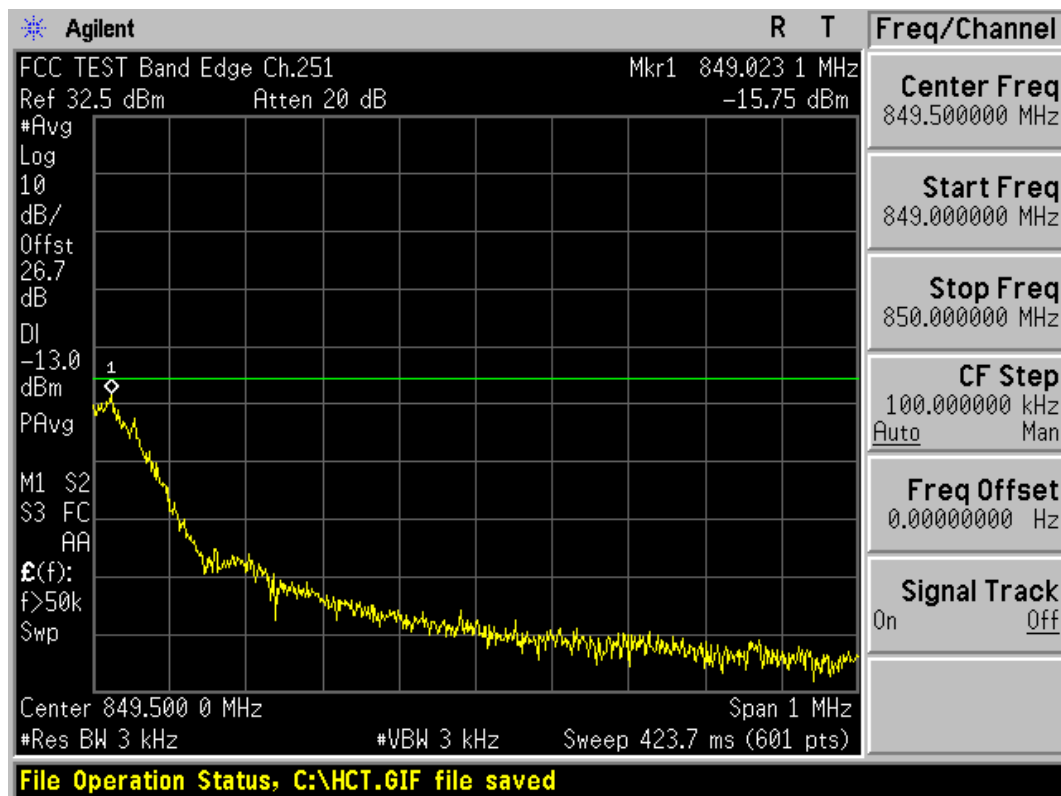


GSM850 EDGE MODE (128 CH.) Band Edge-1

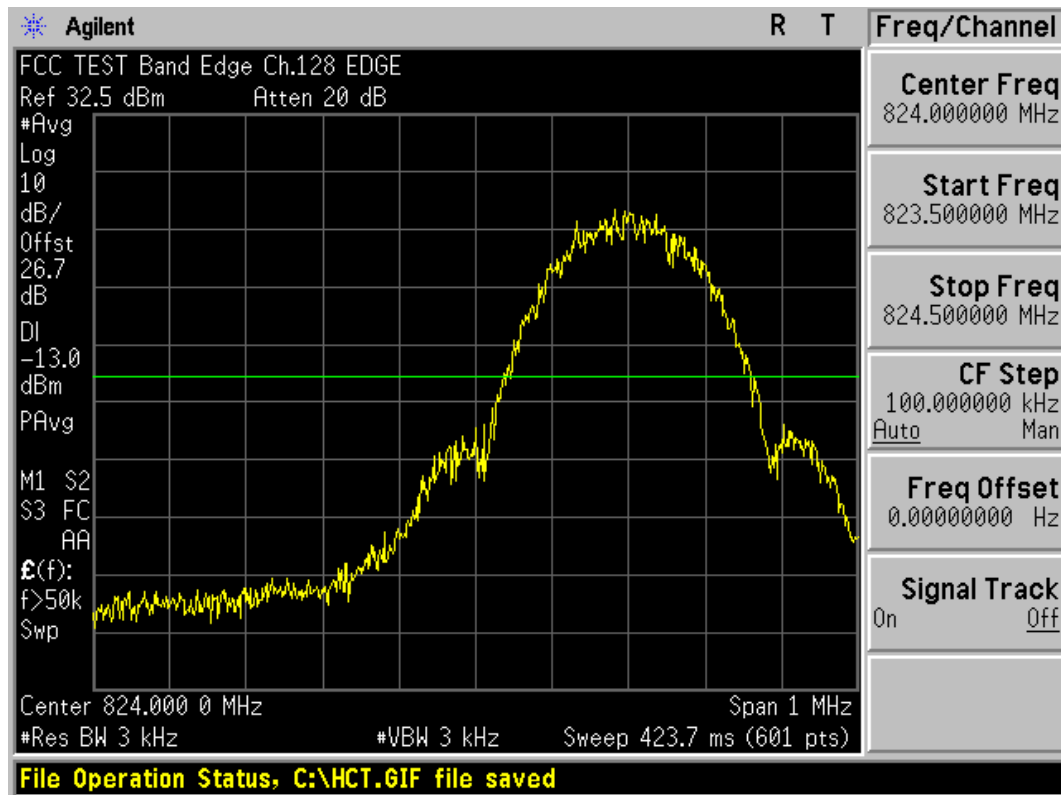


GSM850 EDGE MODE (128 CH.) Band Edge-2

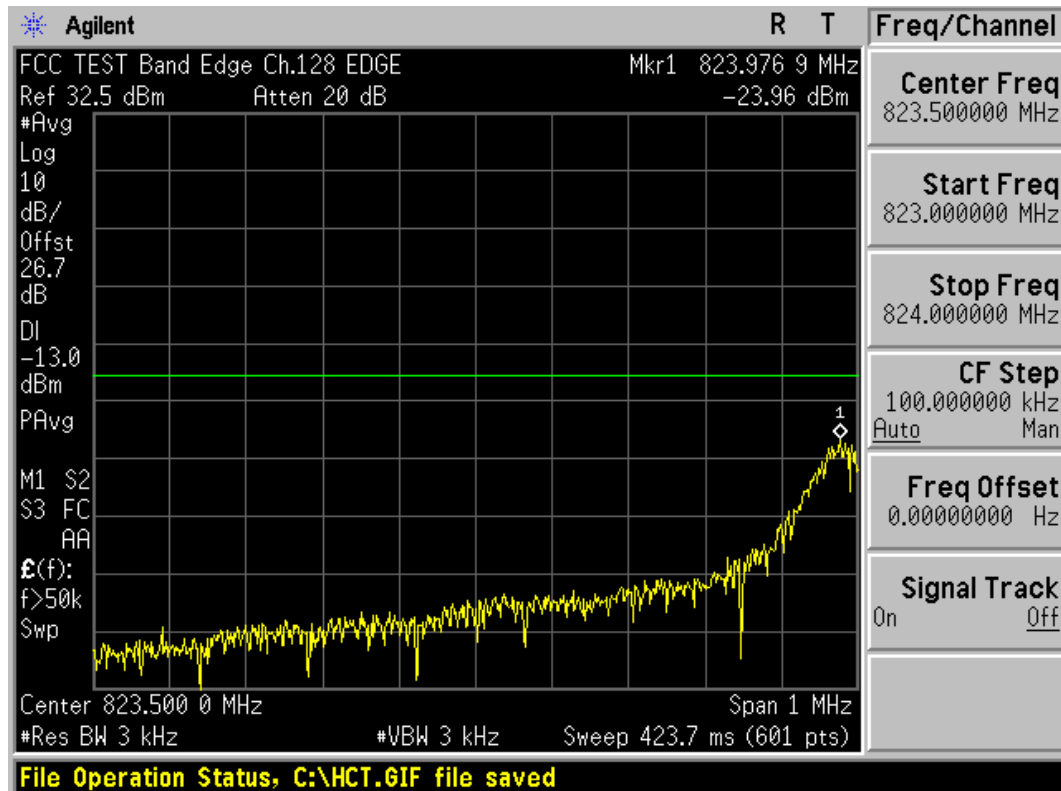


GSM850 EDGE MODE (251 CH.) Band Edge-1

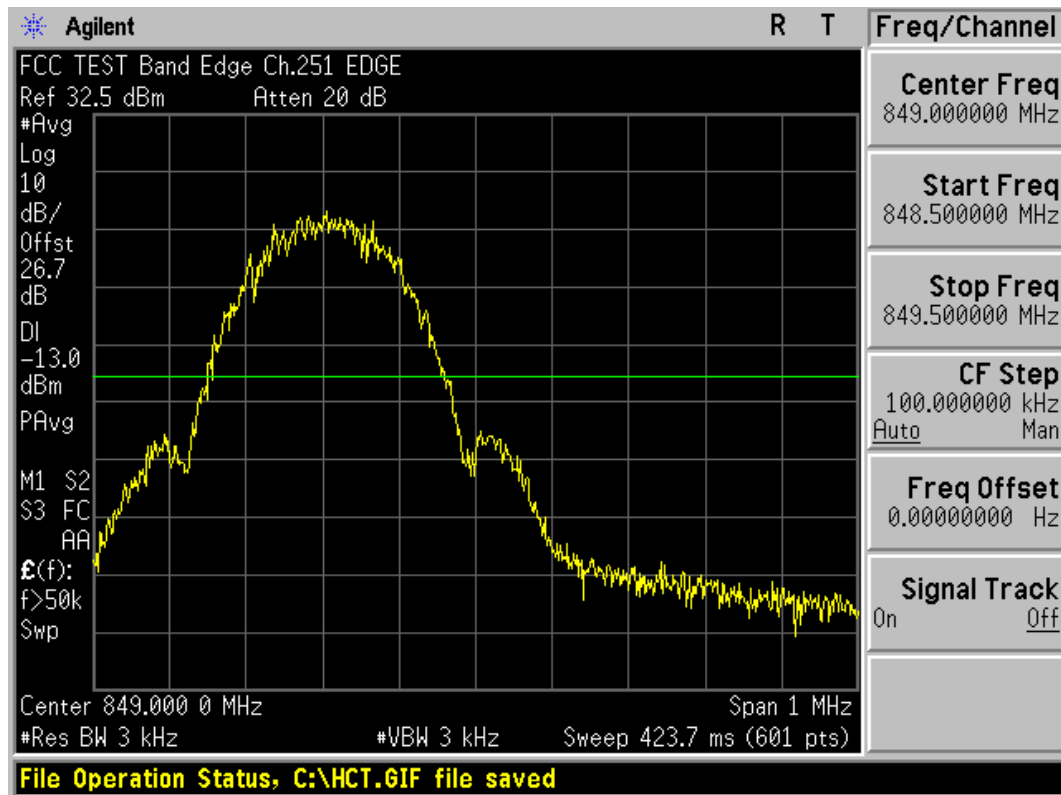


GSM850 EDGE MODE (251 CH.) Band Edge-2

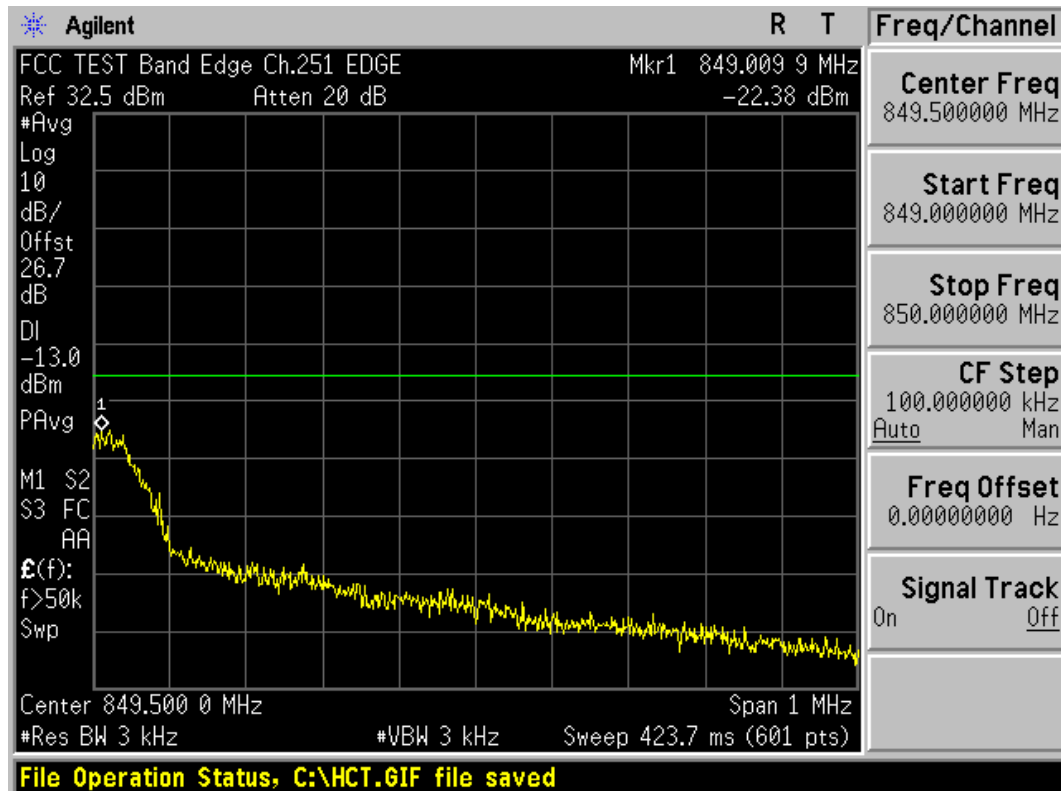


GSM1900 MODE (512 CH.) Band Edge-1

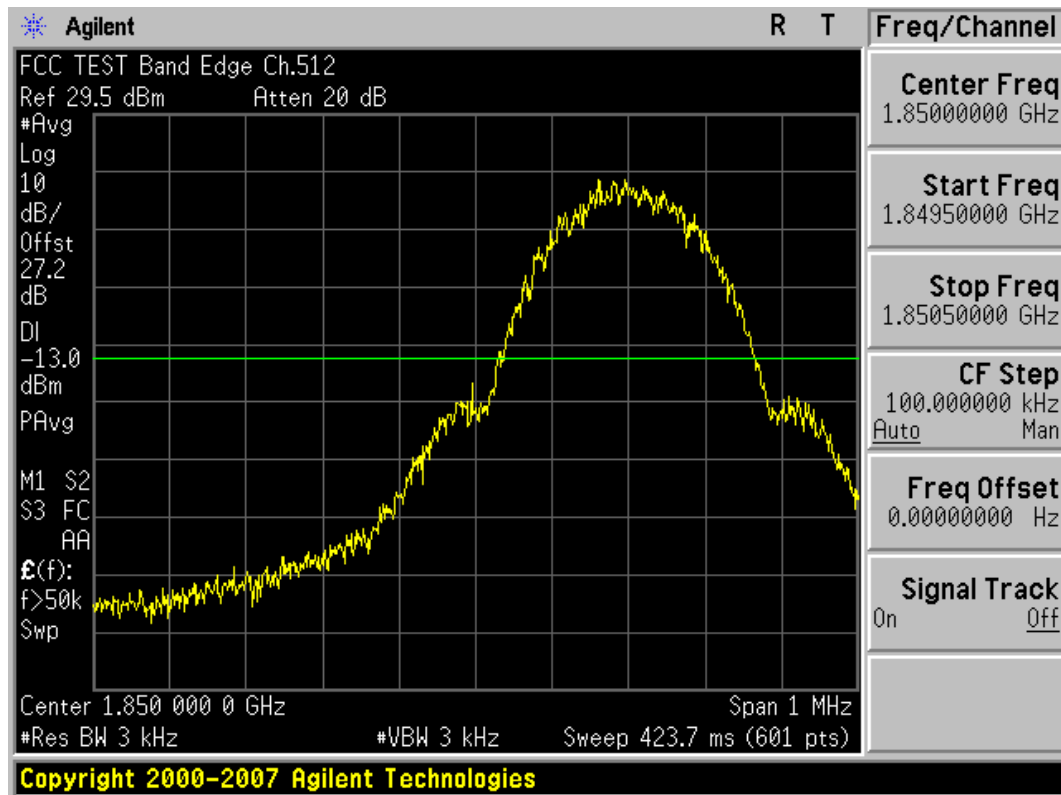


GSM1900 MODE (512 CH.) Band Edge-2

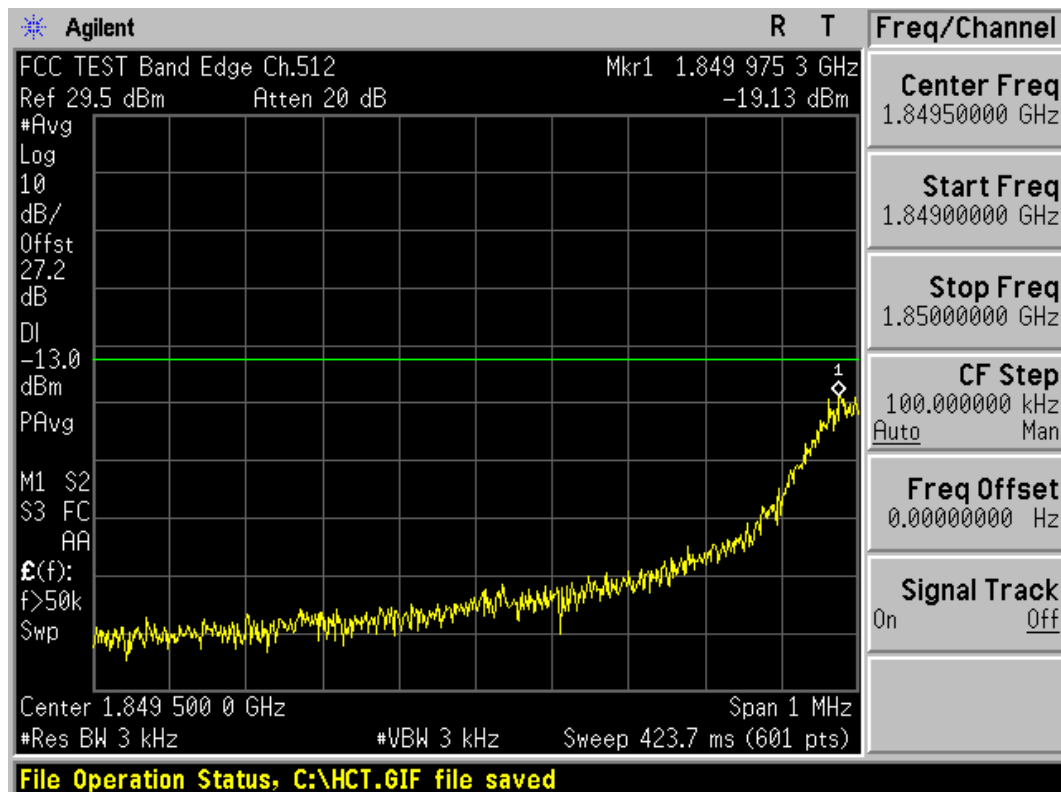


GSM1900 MODE (810 CH.) Band Edge-1

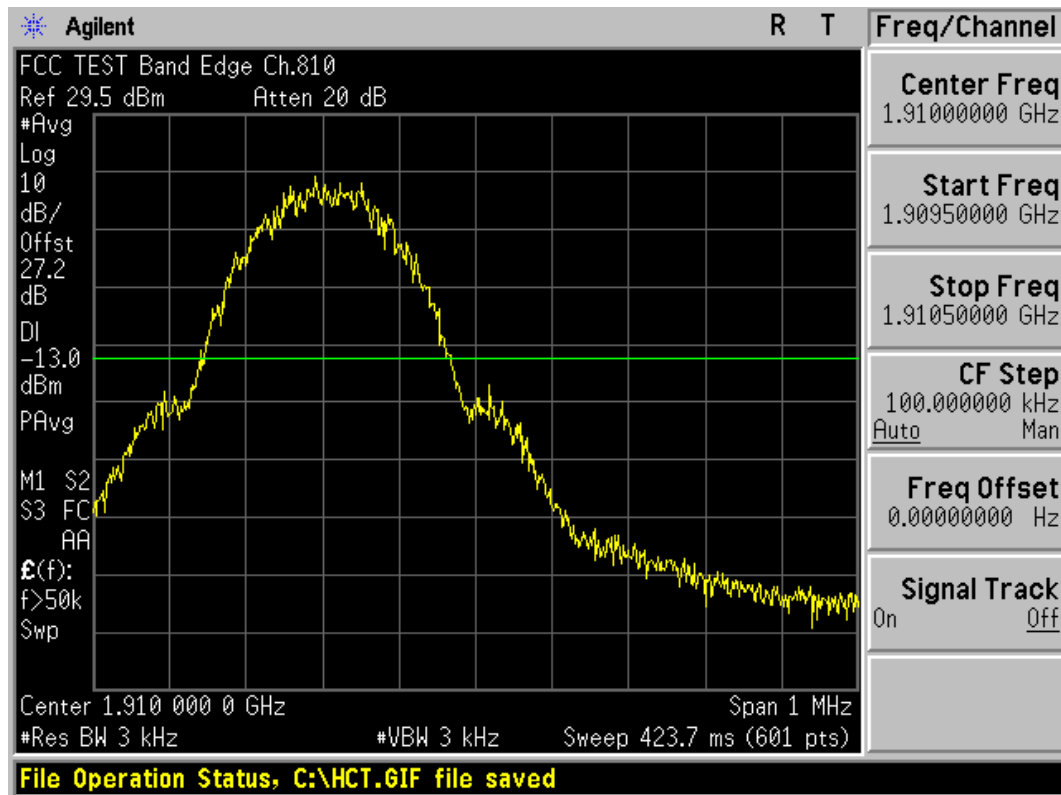


GSM1900 MODE (810 CH.) Band Edge-2

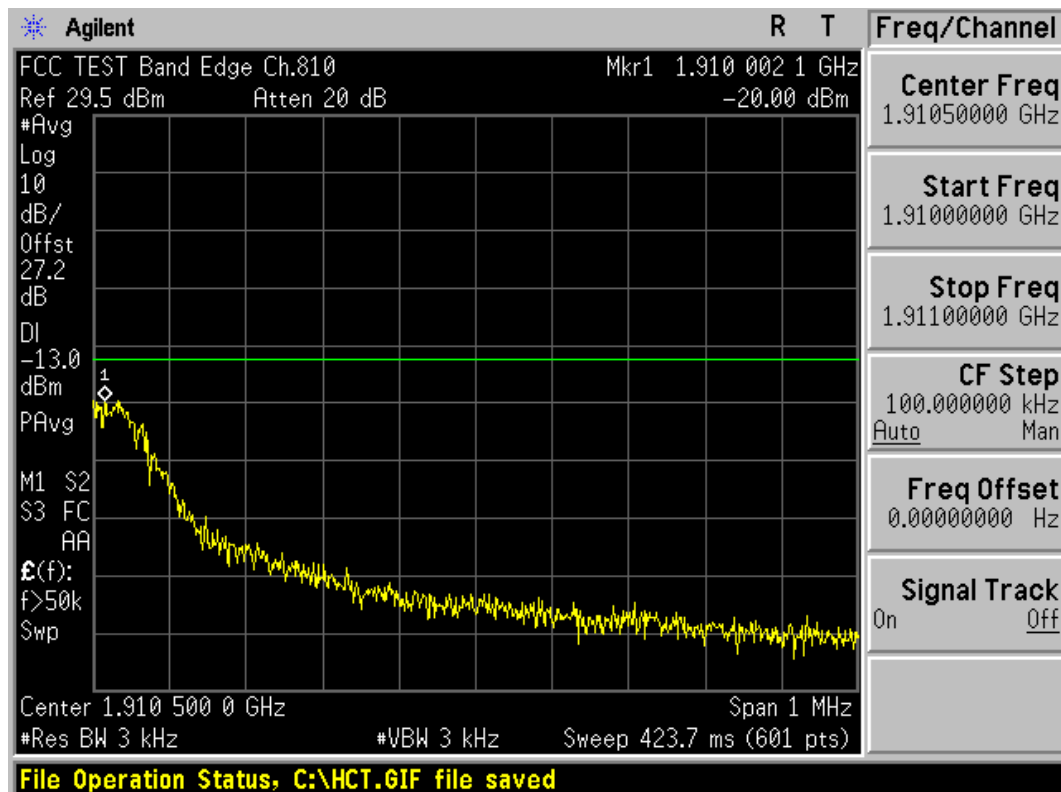

GSM1900 EDGE MODE (512 CH.) Band Edge-1

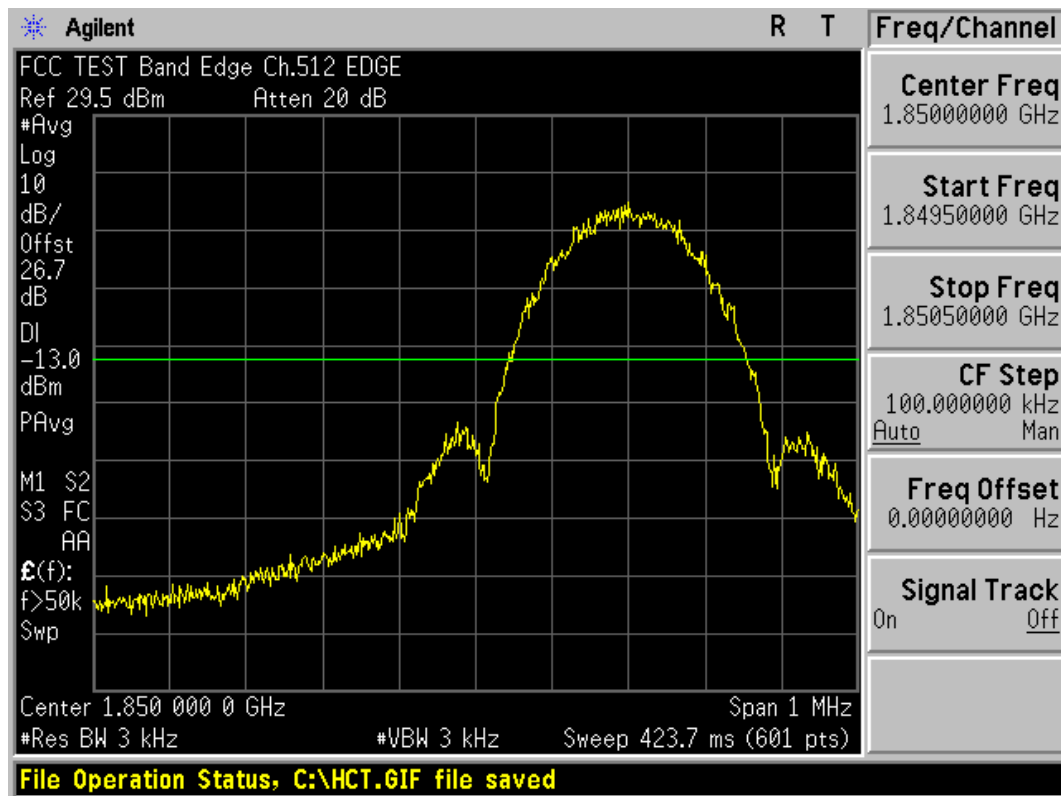


GSM1900 EDGE MODE (512 CH.) Band Edge-2

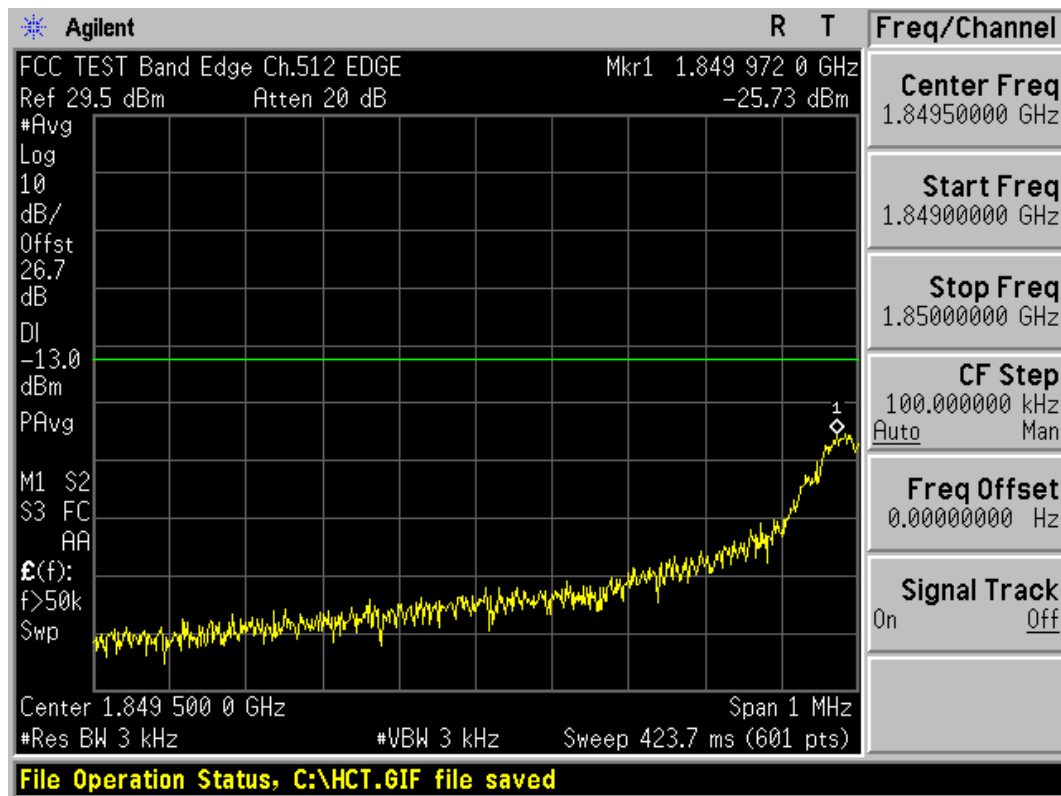


GSM1900 EDGE MODE (810 CH.) Band Edge-1




GSM1900 EDGE MODE (810 CH.) Band Edge-2

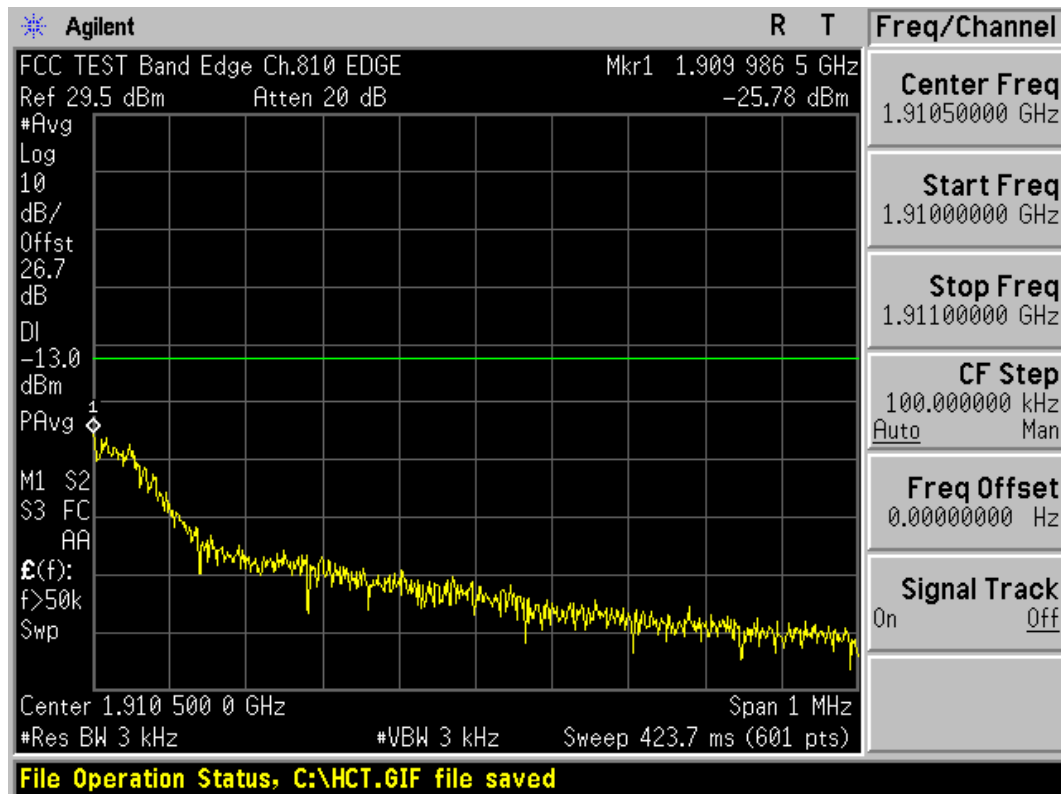


GSM850 MODE (128 CH.) Conducted Spurious Emissions1

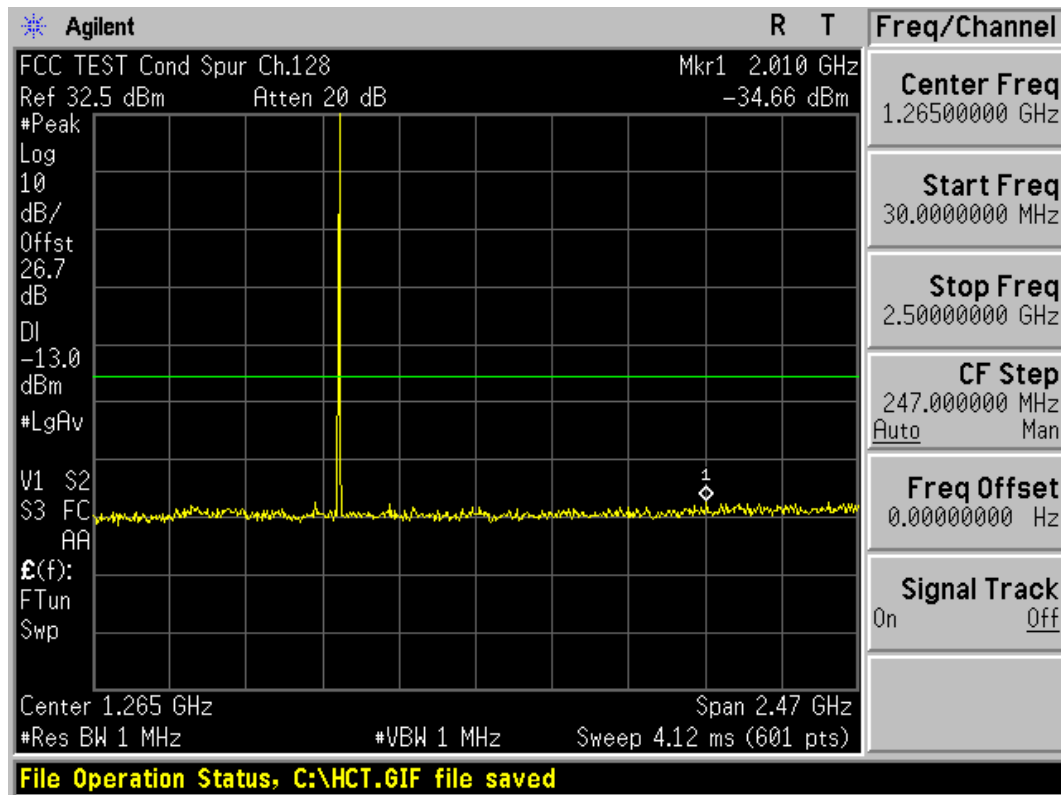


GSM850 MODE (128 CH.) Conducted Spurious Emissions2

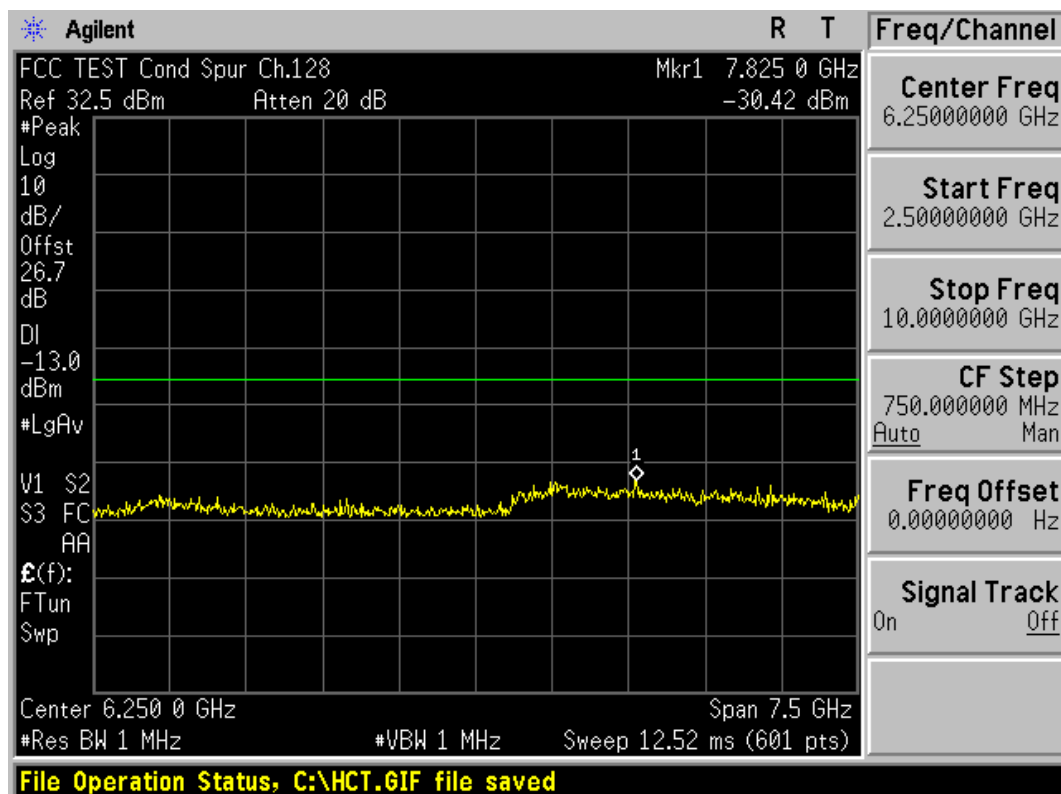


GSM850 MODE (190 CH.) Conducted Spurious Emissions1

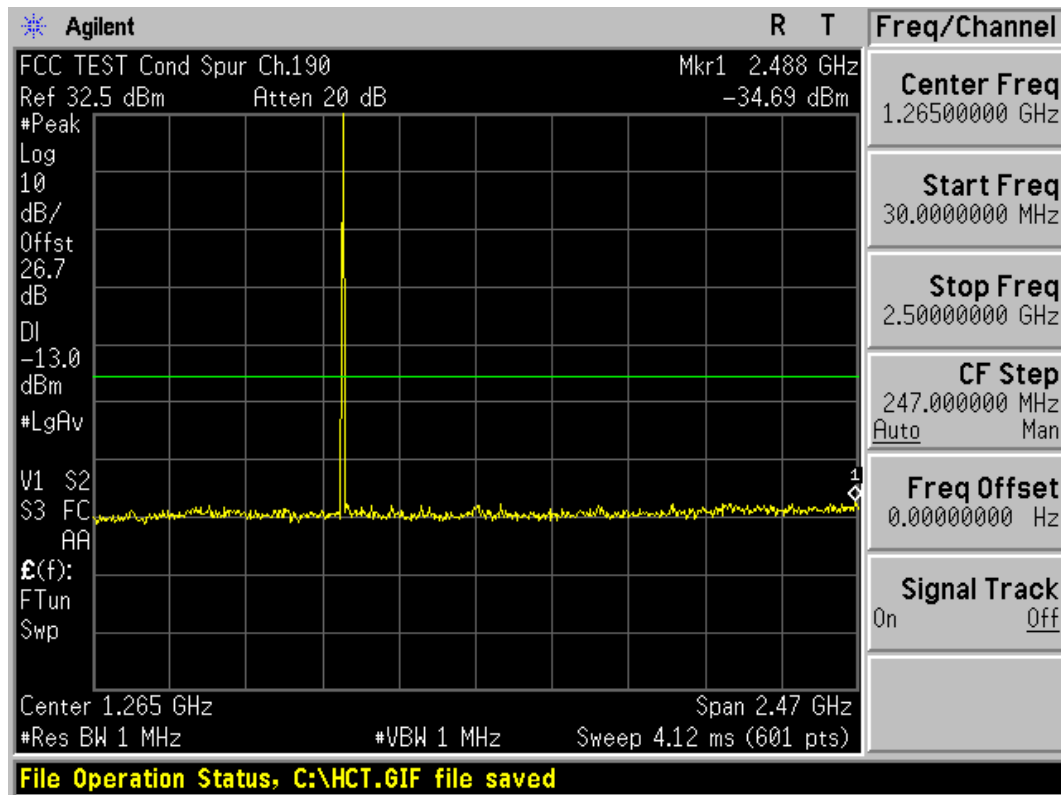


GSM850 MODE (190 CH.) Conducted Spurious Emissions2

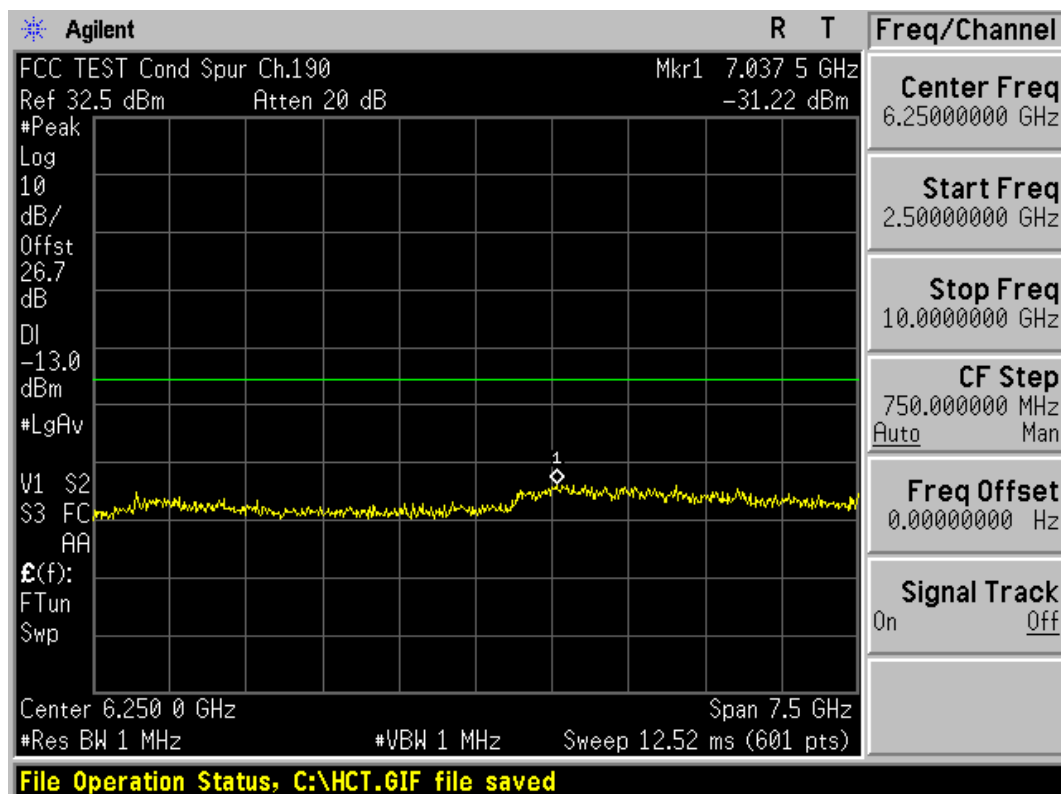


GSM850 MODE (251 CH.) Conducted Spurious Emissions1

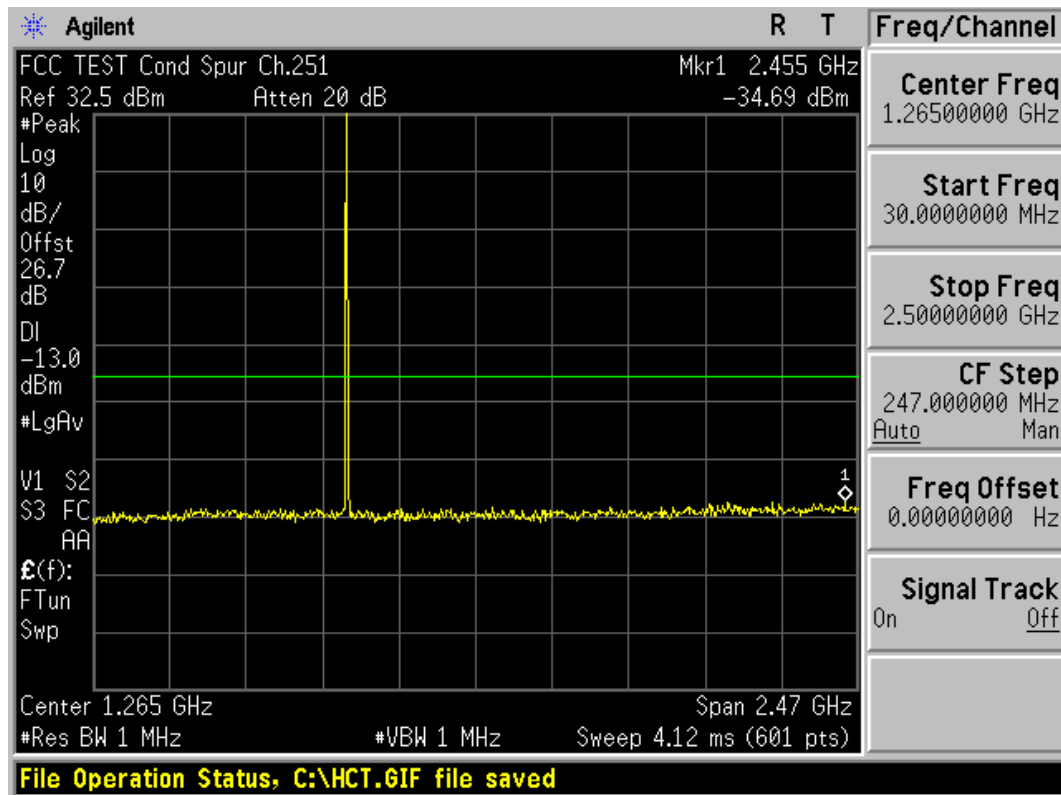


GSM850 MODE (251 CH.) Conducted Spurious Emissions2

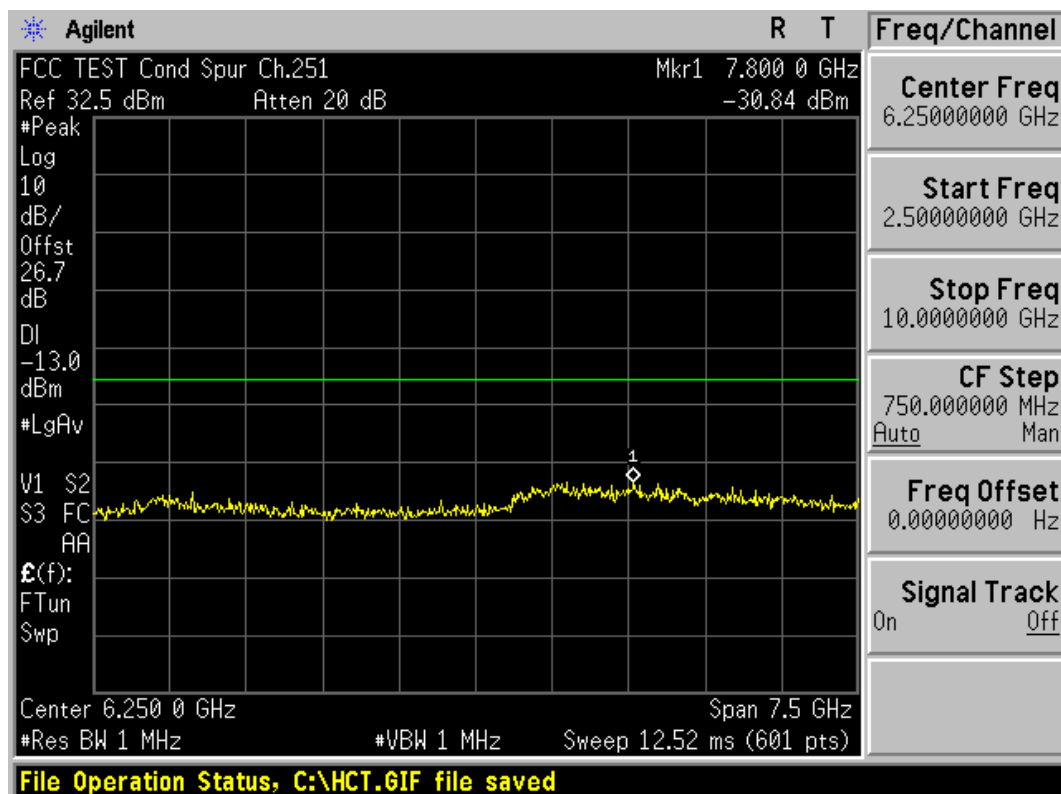


GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

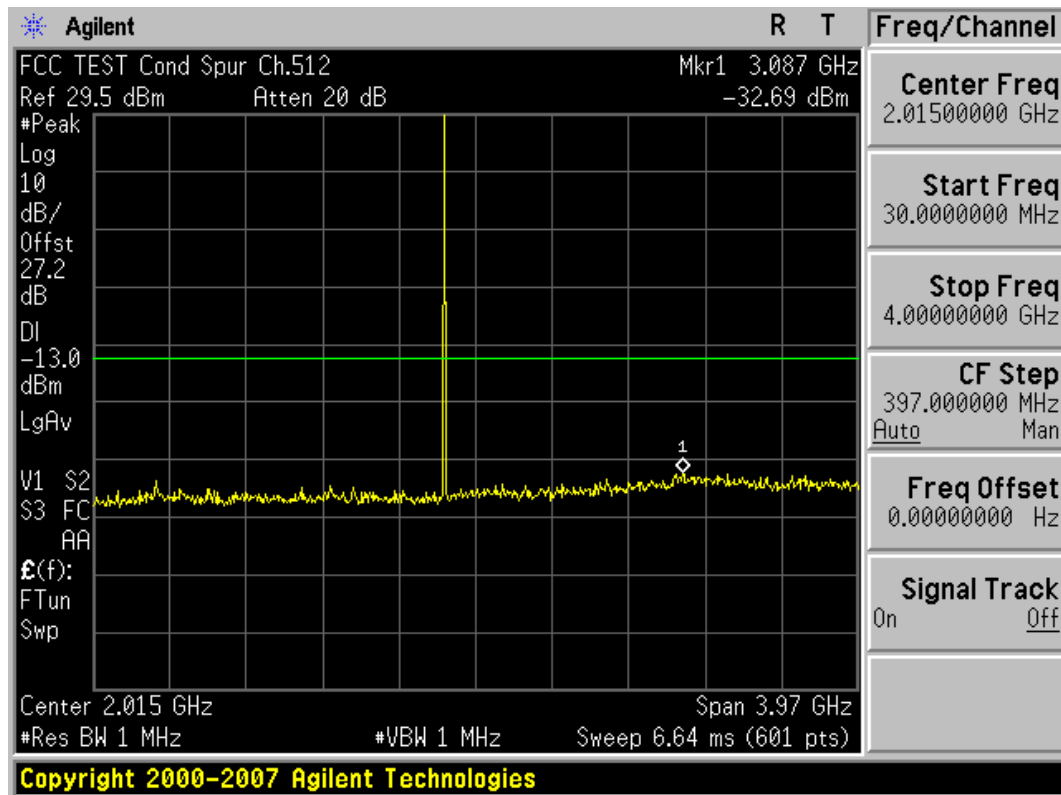


GSM1900 MODE (512 CH.) Conducted Spurious Emissions2

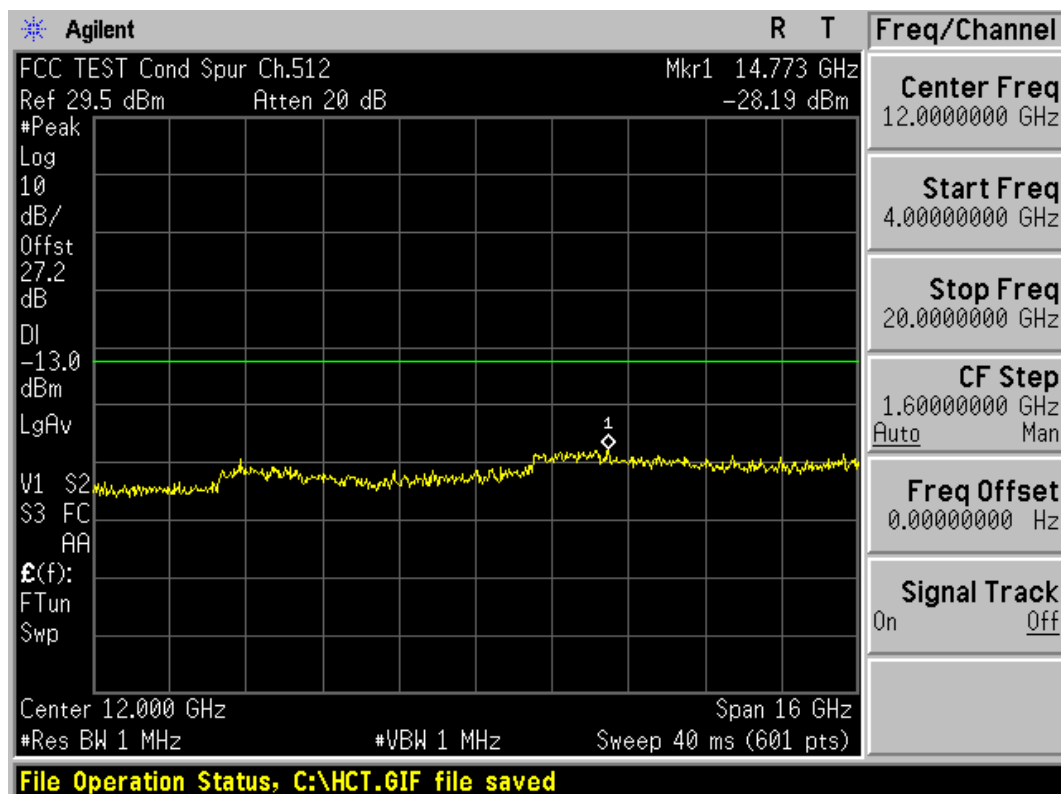


GSM1900 MODE (661 CH.) Conducted Spurious Emissions1

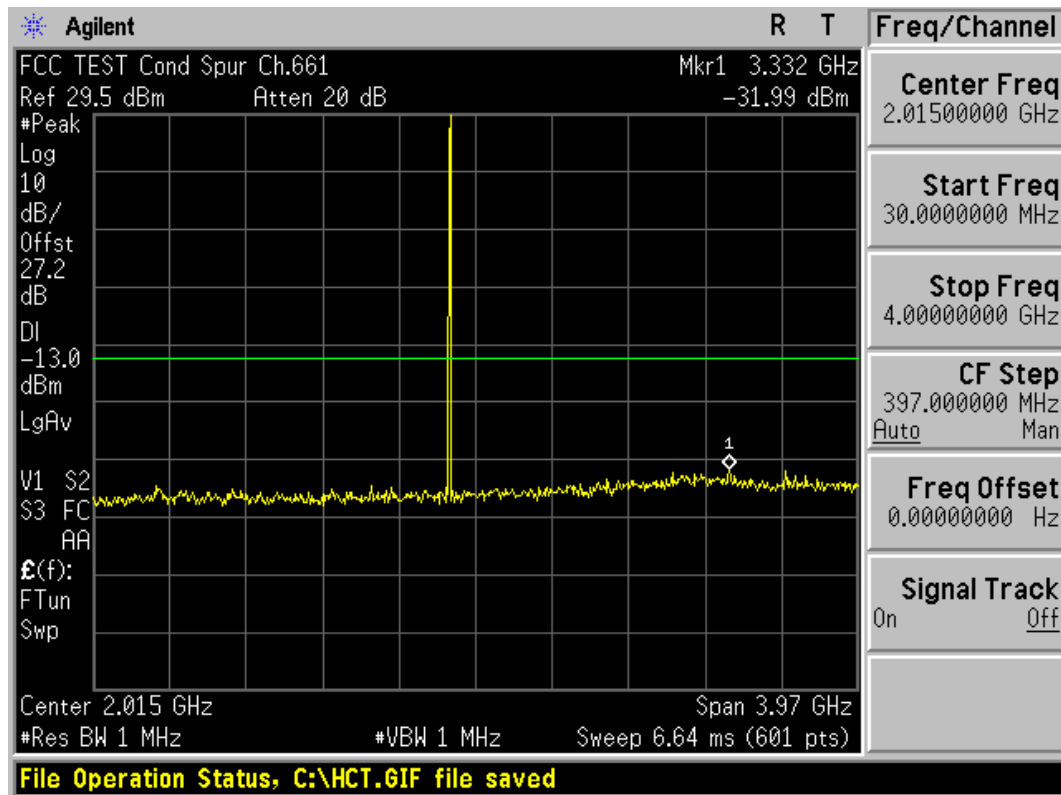

GSM1900 MODE (661 CH.) Conducted Spurious Emissions2

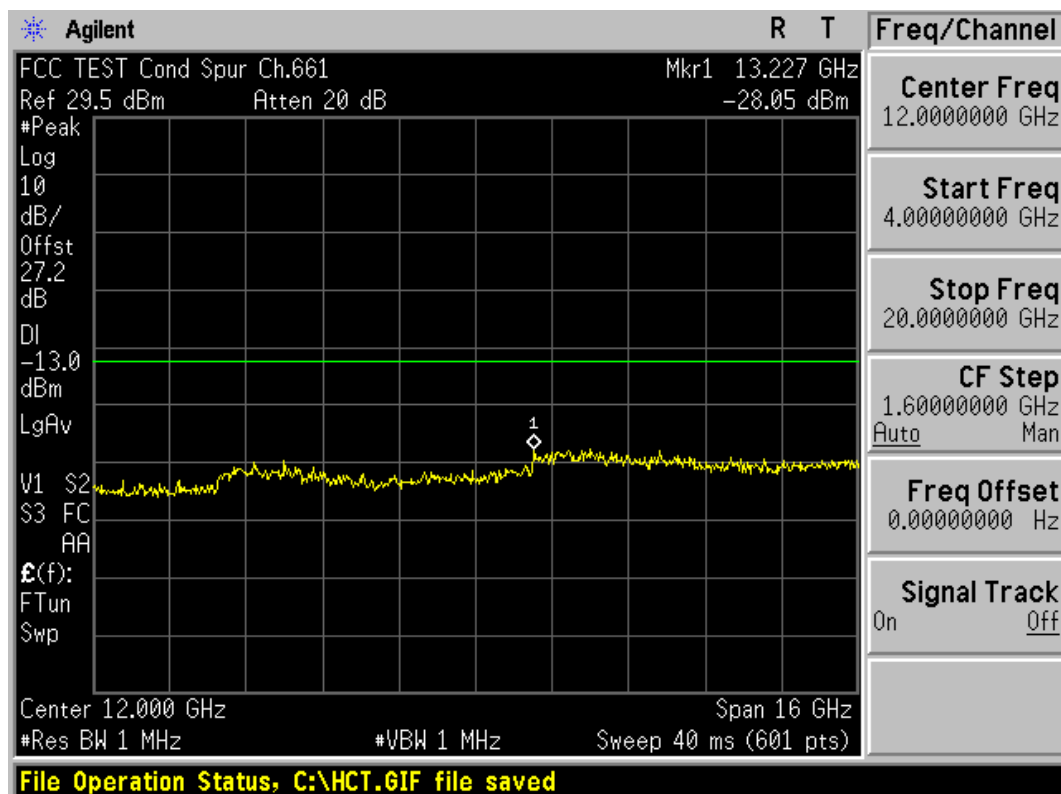

GSM1900 MODE (810 CH.) Conducted Spurious Emissions1

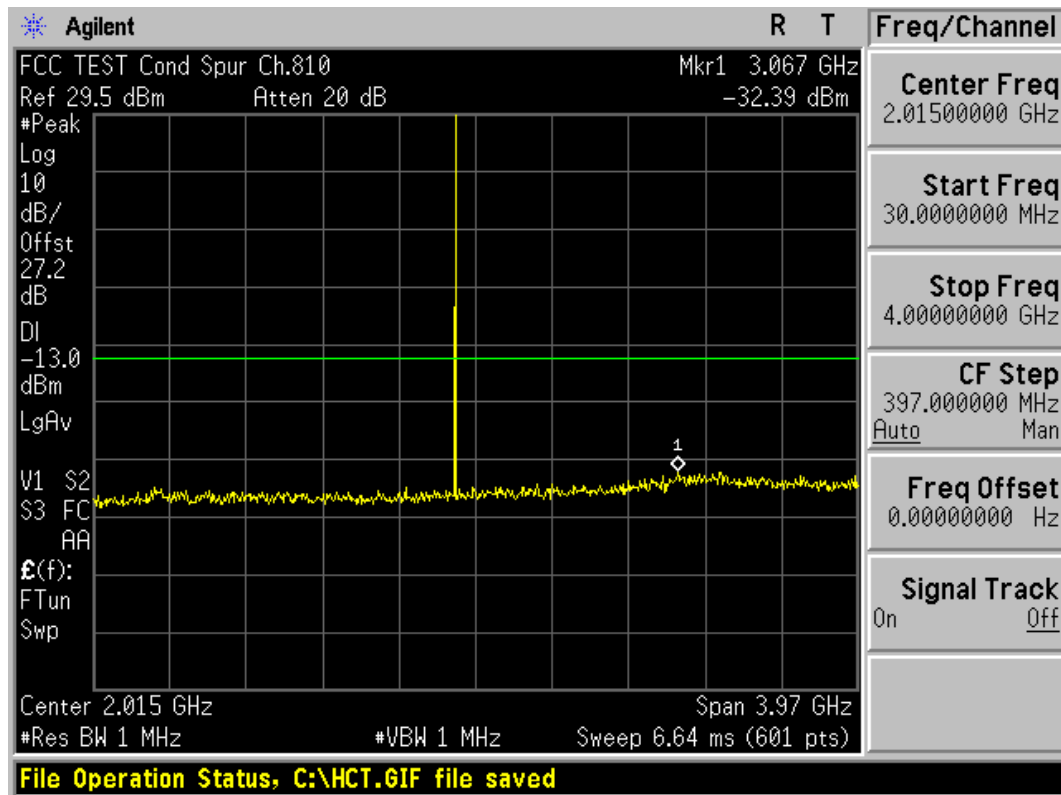

GSM1900 MODE (810 CH.) Conducted Spurious Emissions2

