Site: AC102	Time: 2015/07/12 - 14:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode1:TX at channel 5825 by 802.11a Ant1	

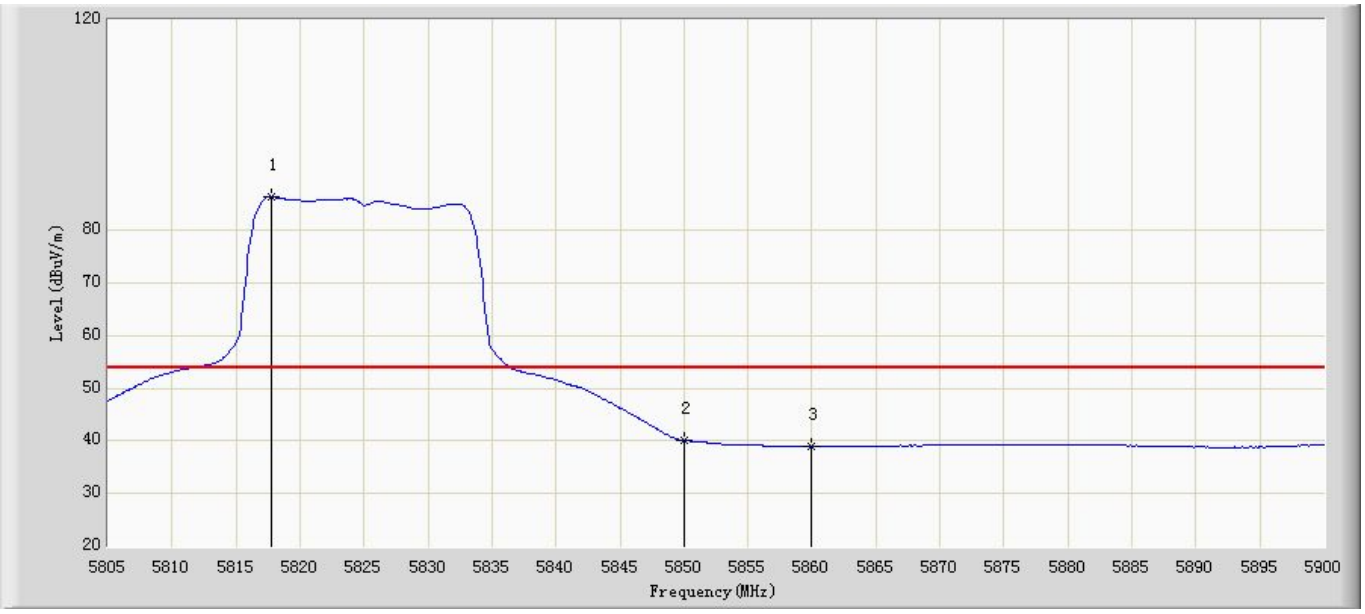

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5817.730	86.349	46.295	N/A	N/A	40.054	AV
2		5850.000	40.084	-0.022	-38.116	78.2	40.106	AV
3		5860.000	38.996	-1.124	-29.204	68.2	40.120	AV

Site: AC102	Time: 2015/07/12 - 14:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5180 by 802.11n(20MHz) Ant1	

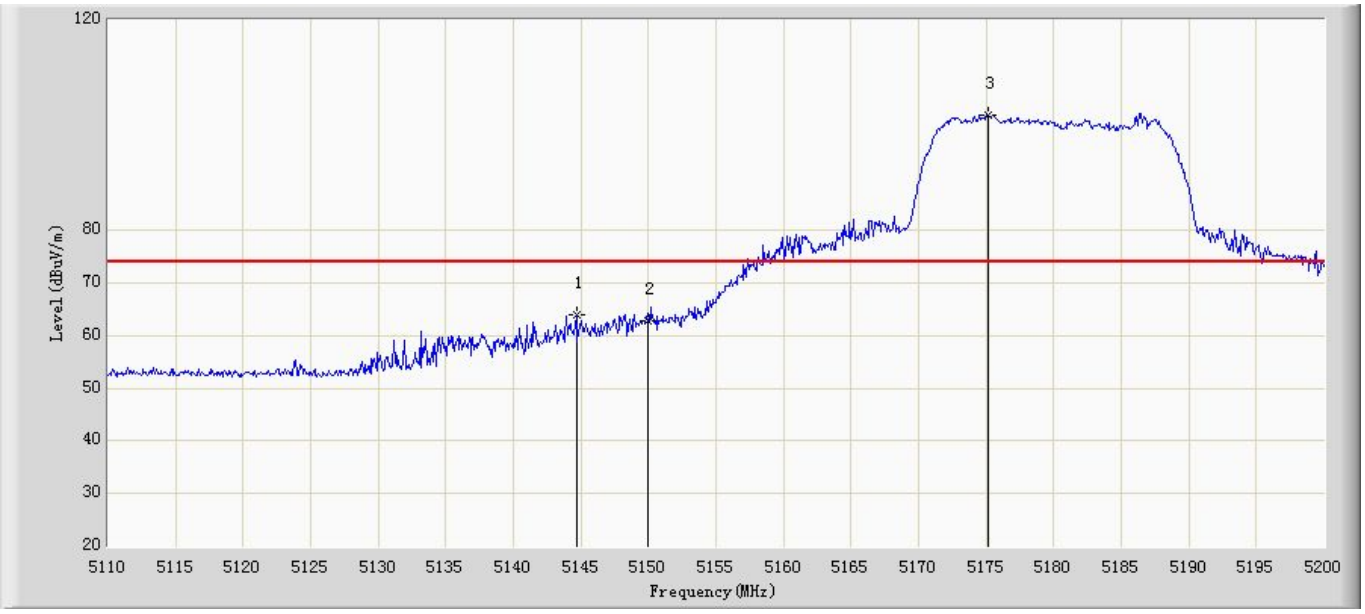

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5144.650	63.917	24.269	-10.083	74.000	39.649	PK
2		5150.000	62.900	23.253	-11.100	74.000	39.647	PK
3	*	5175.160	101.910	62.270	N/A	N/A	39.640	PK

Site: AC102	Time: 2015/07/12 - 14:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5180 by 802.11n(20MHz) Ant1	

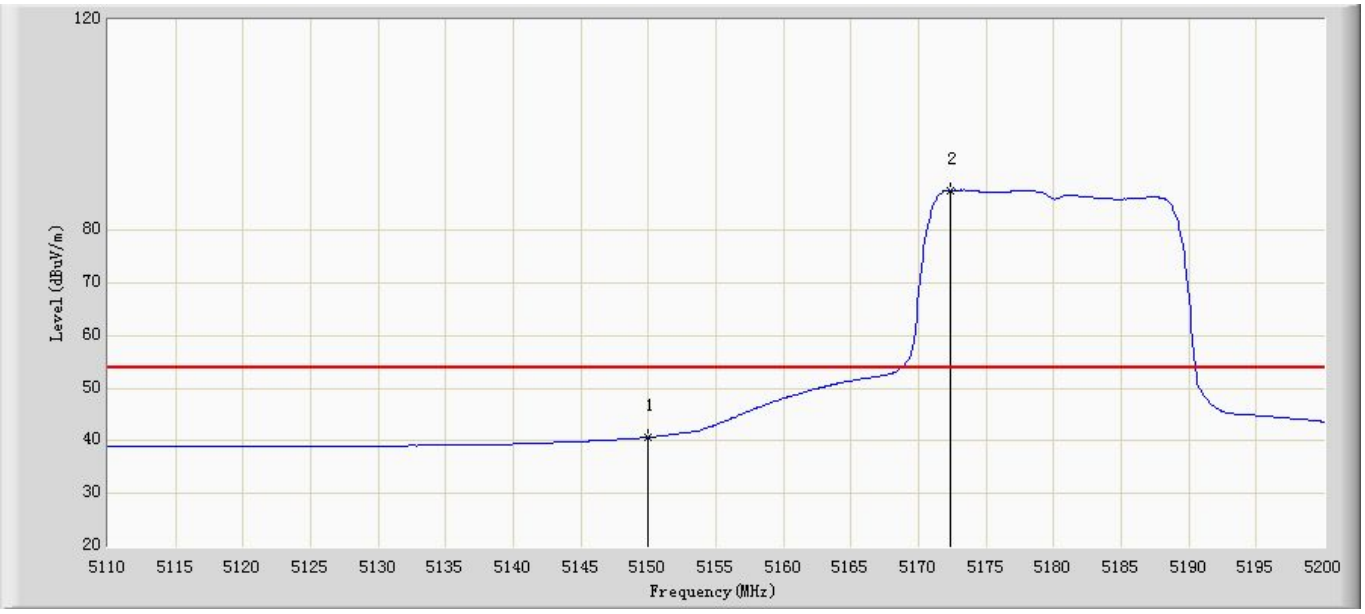

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	40.674	1.027	-13.326	54.000	39.647	AV
2	*	5172.370	87.592	47.952	N/A	N/A	39.640	AV

Site: AC102	Time: 2015/07/12 - 14:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5240 by 802.11n(20MHz) Ant1	

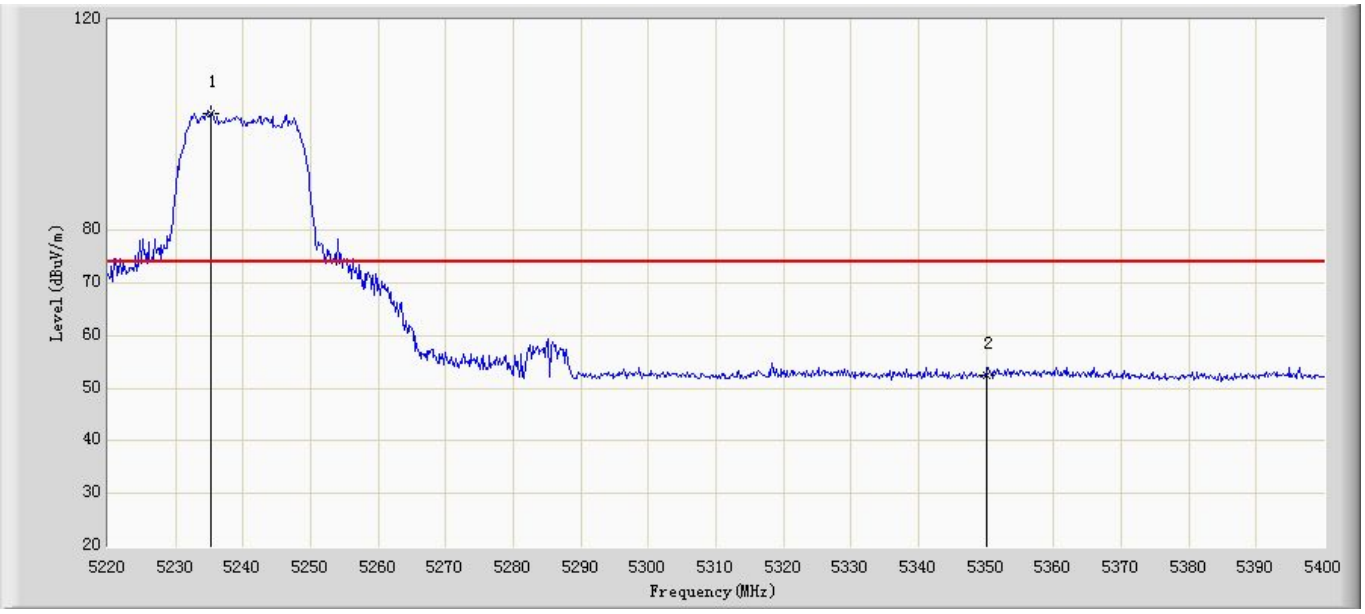

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5235.300	102.204	62.564	N/A	N/A	39.640	PK
2		5350.000	52.379	12.759	-21.621	74.000	39.620	PK

Site: AC102	Time: 2015/07/12 - 14:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5240 by 802.11n(20MHz) Ant1	

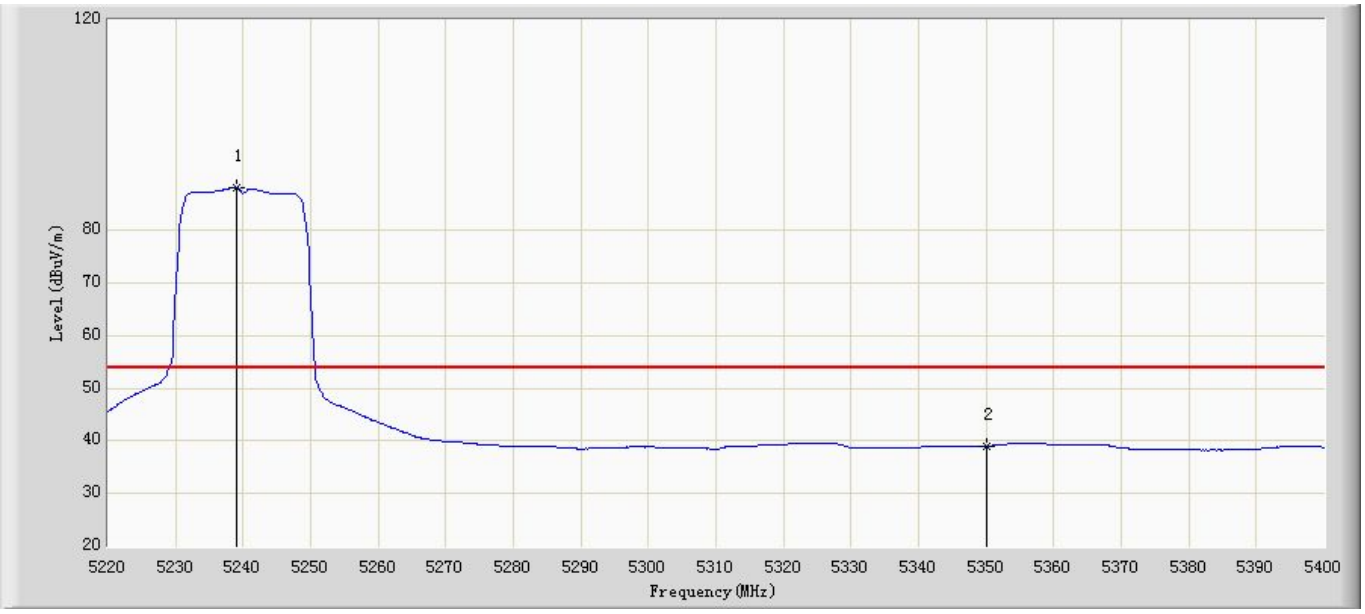

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5239.080	88.068	48.430	N/A	N/A	39.638	AV
2		5350.000	38.938	-0.682	-15.062	54.000	39.620	AV

Site: AC102	Time: 2015/07/12 - 14:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5745 by 802.11n(20MHz) Ant1	

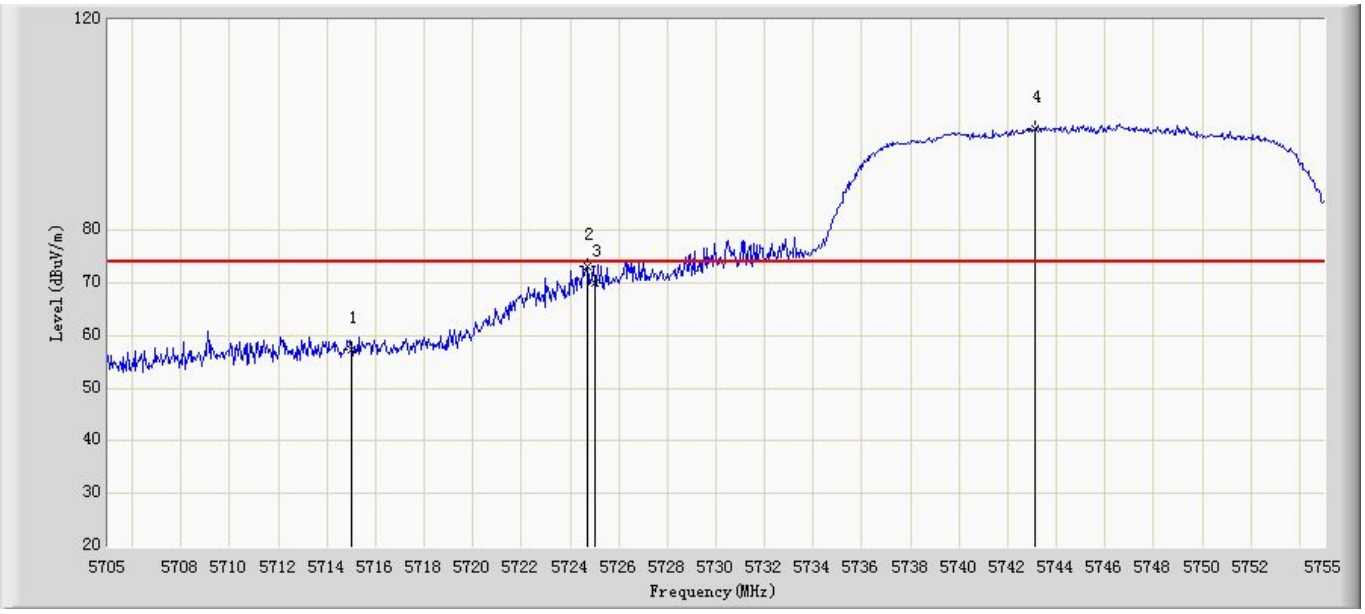

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	57.337	17.407	-10.863	68.2	39.930	PK
2		5724.700	73.264	33.322	-4.936	78.2	39.943	PK
3		5725.000	70.014	30.071	-8.186	78.2	39.943	PK
4	*	5743.100	99.443	59.481	N/A	N/A	39.962	PK

Site: AC102	Time: 2015/07/12 - 14:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5745 by 802.11n(20MHz) Ant1	

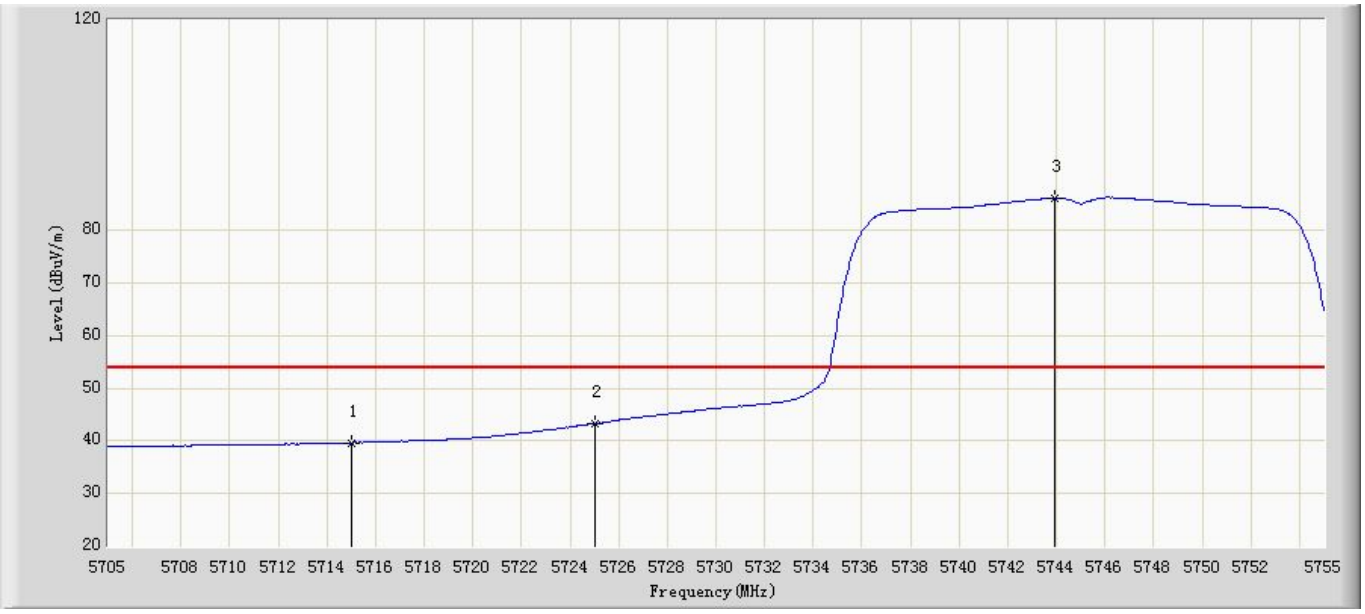

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	39.654	-0.276	-28.546	68.2	39.930	AV
2		5725.000	43.279	3.336	-34.921	78.2	39.943	AV
3	*	5743.950	86.181	46.218	N/A	N/A	39.963	AV

Site: AC102	Time: 2015/07/12 - 14:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5825 by 802.11n(20MHz) Ant1	

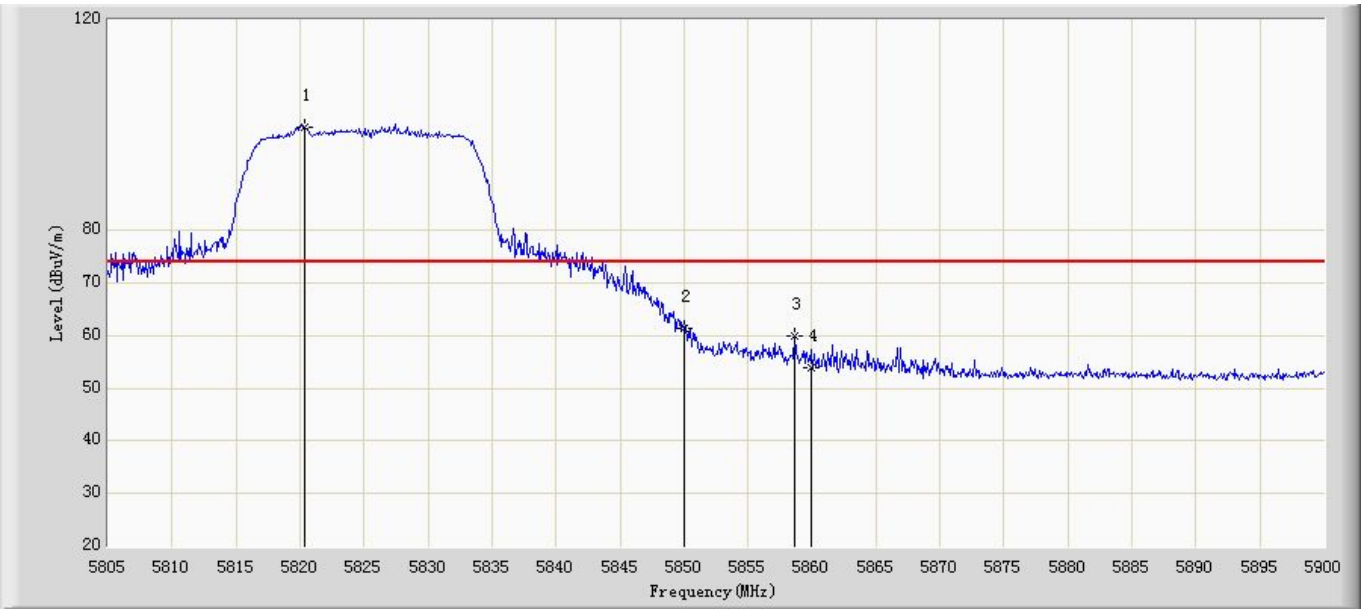

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5820.390	99.702	59.645	N/A	N/A	40.057	PK
2		5850.000	61.453	21.347	-16.747	78.2	40.106	PK
3		5858.675	60.061	19.942	-18.139	78.2	40.118	PK
4		5860.000	53.95	13.83	-14.25	68.2	40.120	PK

Site: AC102	Time: 2015/07/12 - 14:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5825 by 802.11n(20MHz) Ant1	

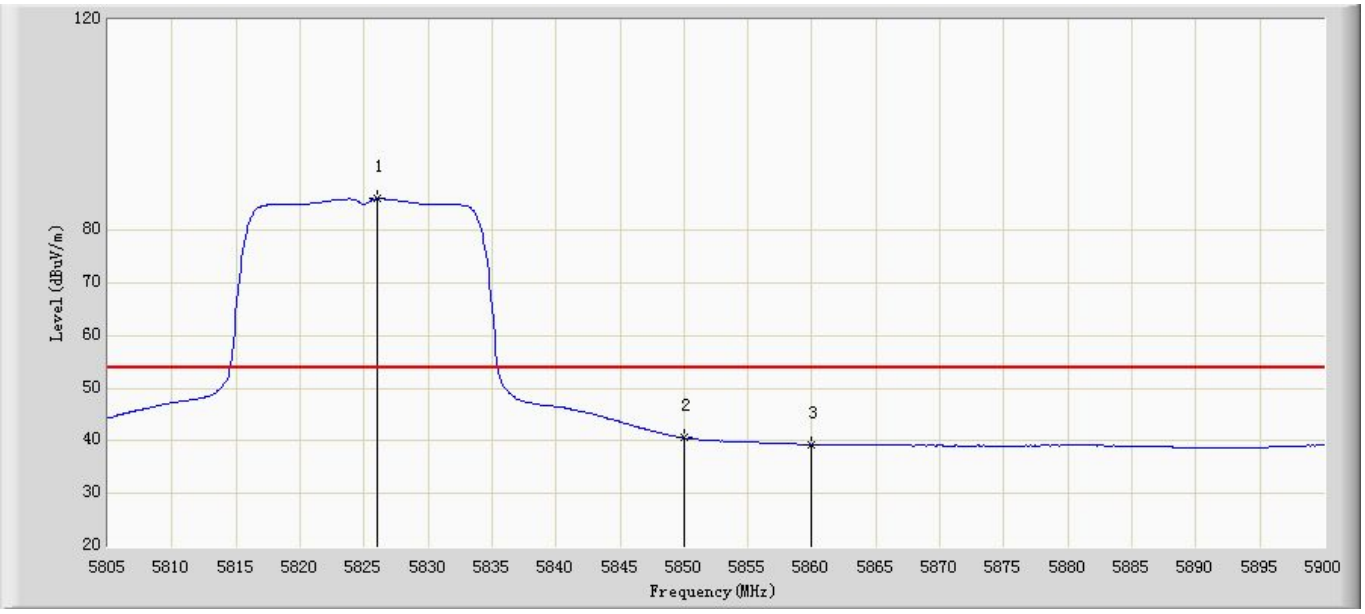

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5826.090	86.024	45.959	N/A	N/A	40.065	AV
2		5850.000	40.584	0.478	-37.616	78.2	40.106	AV
3		5860.000	39.336	-0.784	-28.864	68.2	40.120	AV

Site: AC102	Time: 2015/07/12 - 14:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5180 by 802.11ac(20MHz) Ant1	

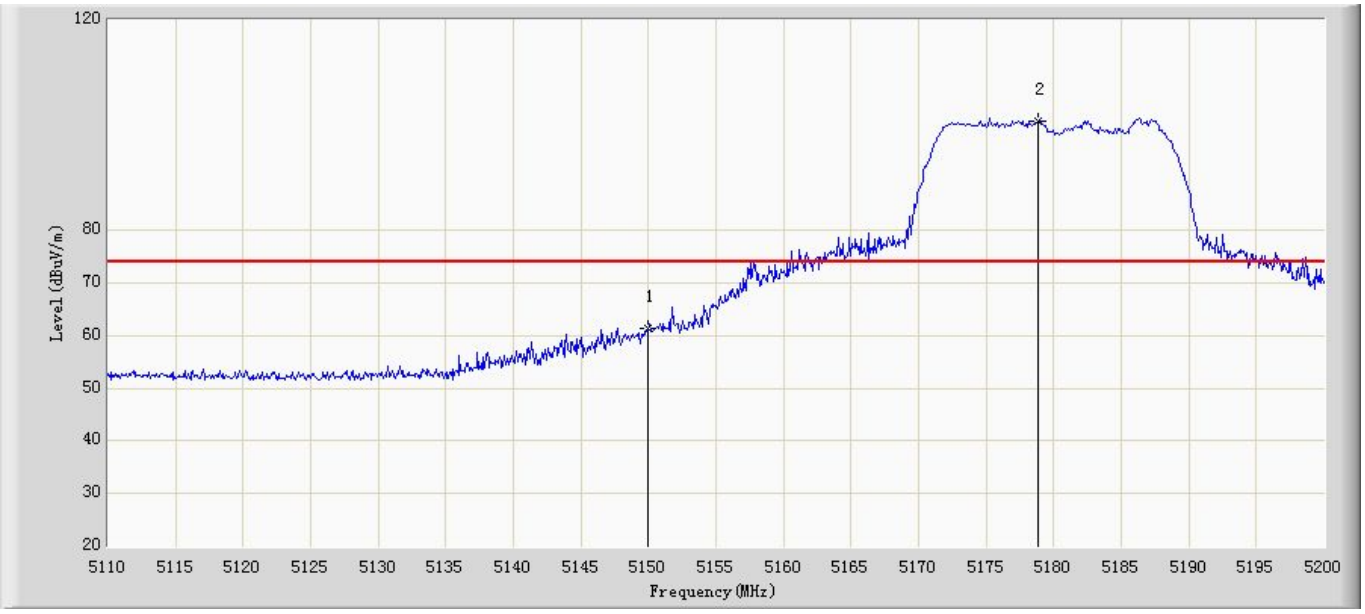

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	61.398	21.751	-12.602	74.000	39.647	PK
2	*	5178.850	100.811	61.172	N/A	N/A	39.640	PK

Site: AC102	Time: 2015/07/12 - 14:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5180 by 802.11ac(20MHz) Ant1	

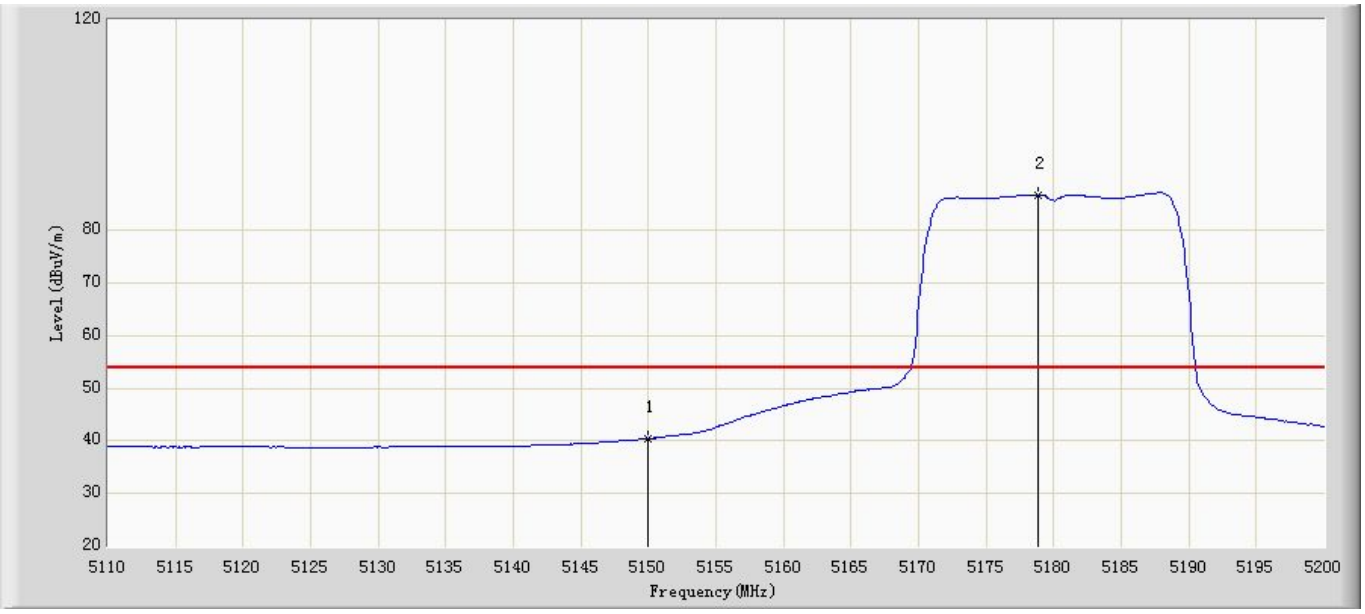

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	40.445	0.798	-13.555	54.000	39.647	AV
2	*	5178.850	86.742	47.103	N/A	N/A	39.640	AV

Site: AC102	Time: 2015/07/12 - 14:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5240 by 802.11ac(20MHz) Ant1	

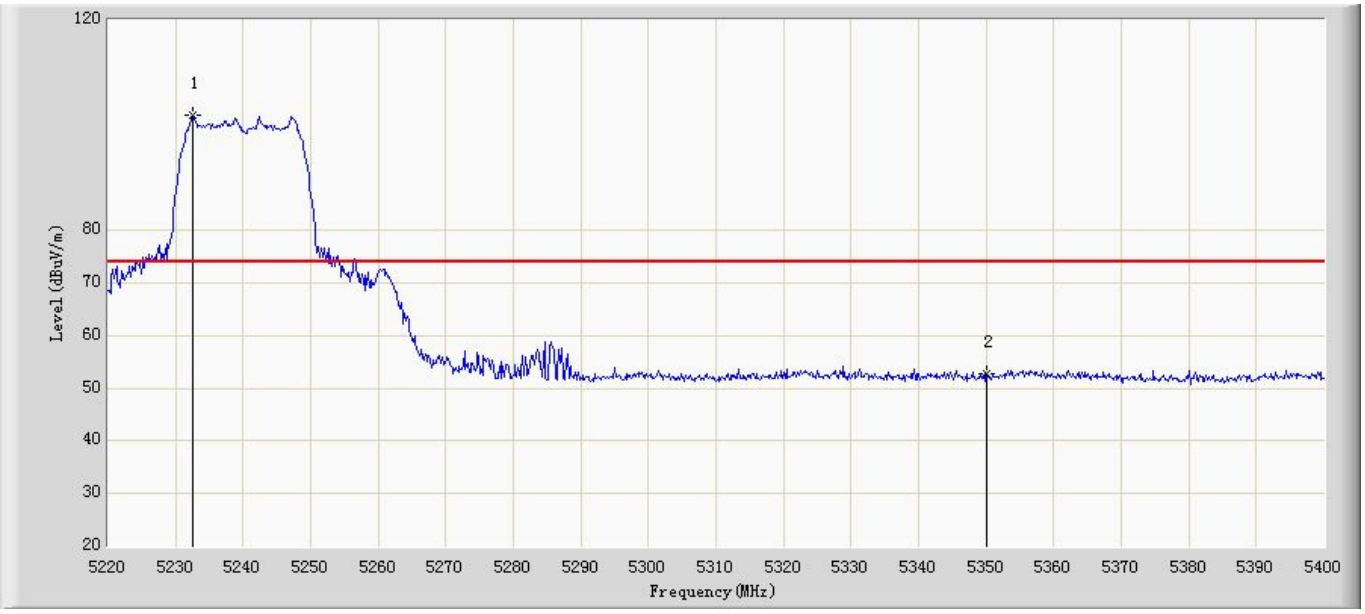

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5232.600	101.907	62.266	N/A	N/A	39.641	PK
2		5350.000	52.662	13.042	-21.338	74.000	39.620	PK

Site: AC102	Time: 2015/07/12 - 14:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5240 by 802.11ac(20MHz) Ant1	

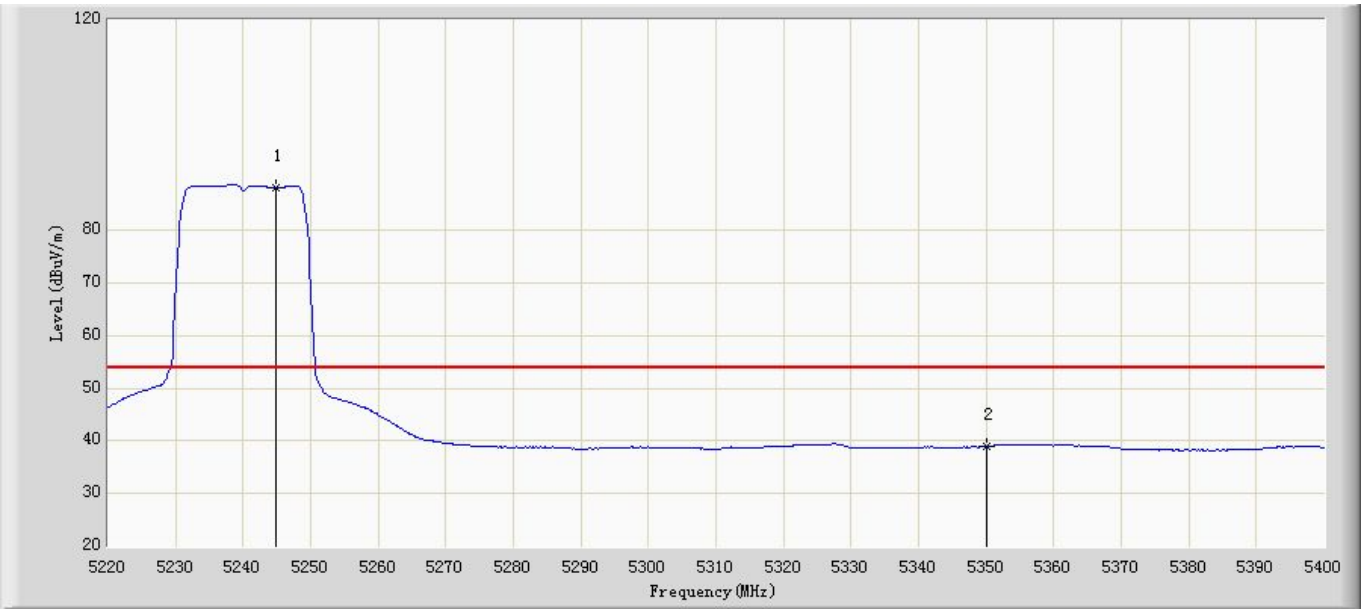

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5244.840	88.170	48.535	N/A	N/A	39.635	AV
2		5350.000	38.899	-0.721	-15.101	54.000	39.620	AV

Site: AC102	Time: 2015/07/12 - 14:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5745 by 802.11ac(20MHz) Ant1	

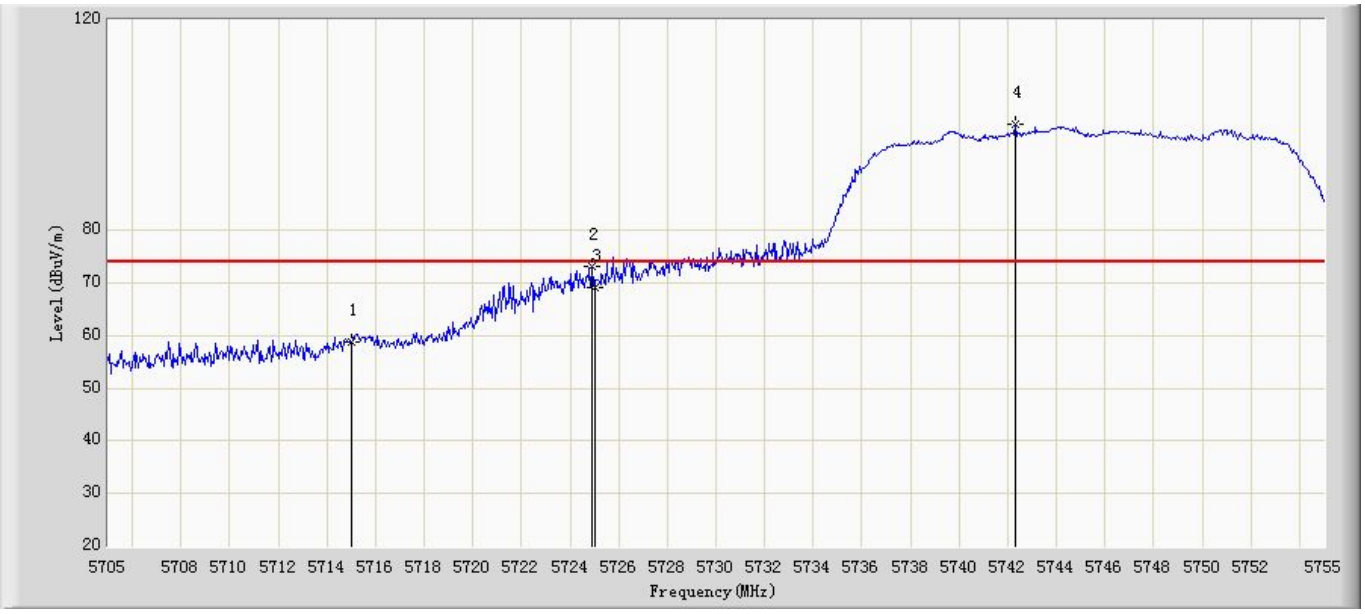

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	58.688	18.758	-9.512	68.2	39.930	PK
2		5724.900	73.064	33.121	-5.136	78.2	39.943	PK
3		5725.000	69.225	29.282	-8.975	78.2	39.943	PK
4	*	5742.300	100.059	60.098	N/A	N/A	39.960	PK

Site: AC102	Time: 2015/07/12 - 14:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5745 by 802.11ac(20MHz) Ant1	

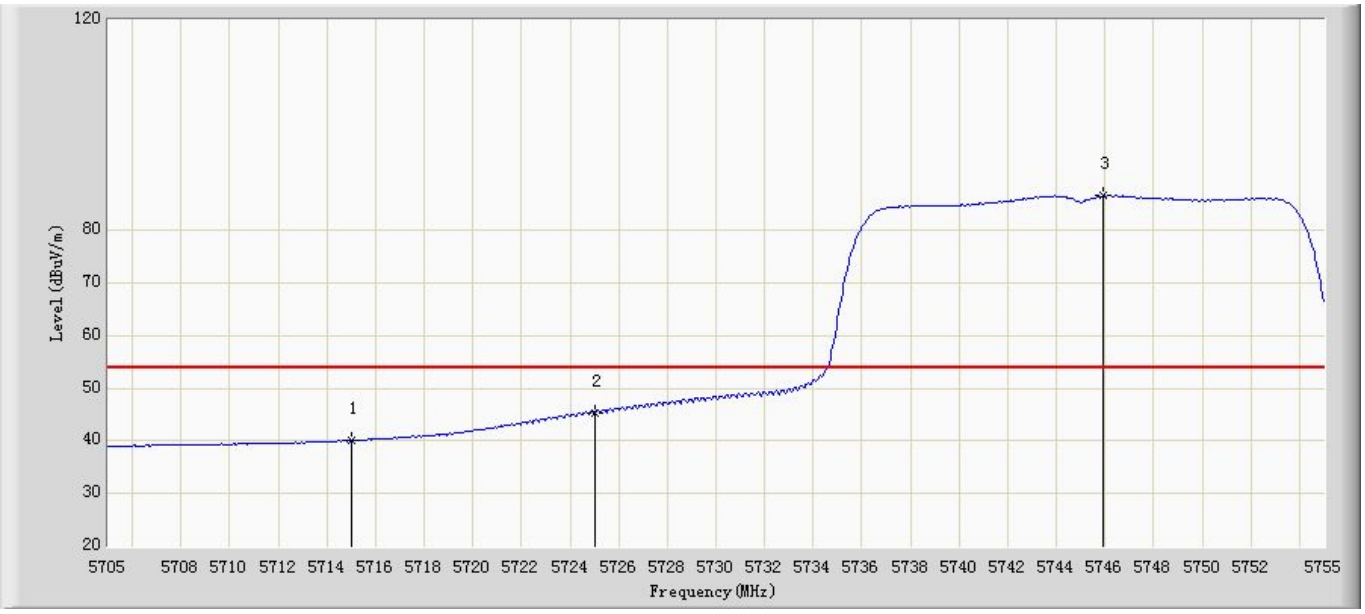

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	40.112	0.182	-28.088	68.2	39.930	AV
2		5725.000	45.163	5.22	-33.037	78.2	39.943	AV
3	*	5745.950	86.618	46.653	N/A	N/A	39.964	AV

Site: AC102	Time: 2015/07/12 - 14:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5825 by 802.11ac(20MHz) Ant1	

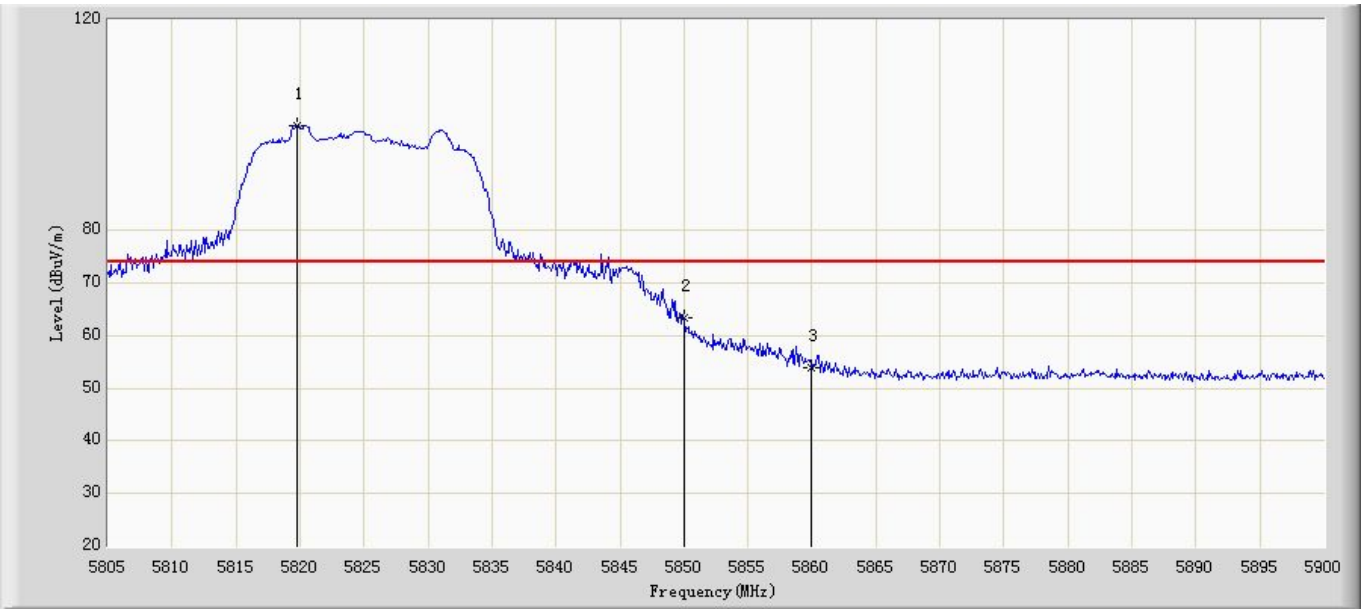

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5819.725	99.813	59.757	N/A	N/A	40.057	PK
2		5850.000	63.454	23.348	-14.746	78.2	40.106	PK
3		5860.000	54.008	13.888	-14.192	68.2	40.120	PK

Site: AC102	Time: 2015/07/12 - 14:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5825 by 802.11ac(20MHz) Ant1	

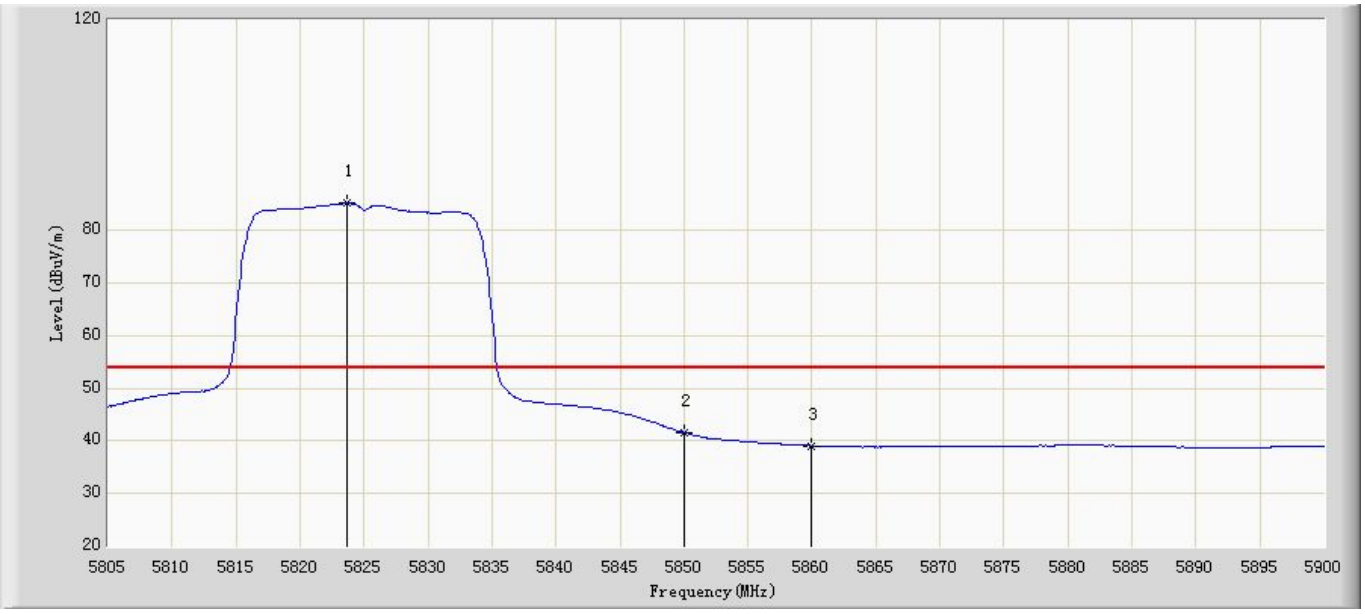

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5823.715	85.104	45.042	N/A	N/A	40.062	AV
2		5850.000	41.539	1.433	-36.661	78.2	40.106	AV
3		5860.000	39.102	-1.018	-29.098	68.2	40.120	AV

Site: AC102	Time: 2015/07/12 - 14:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5190 by 802.11n(40MHz) Ant1	

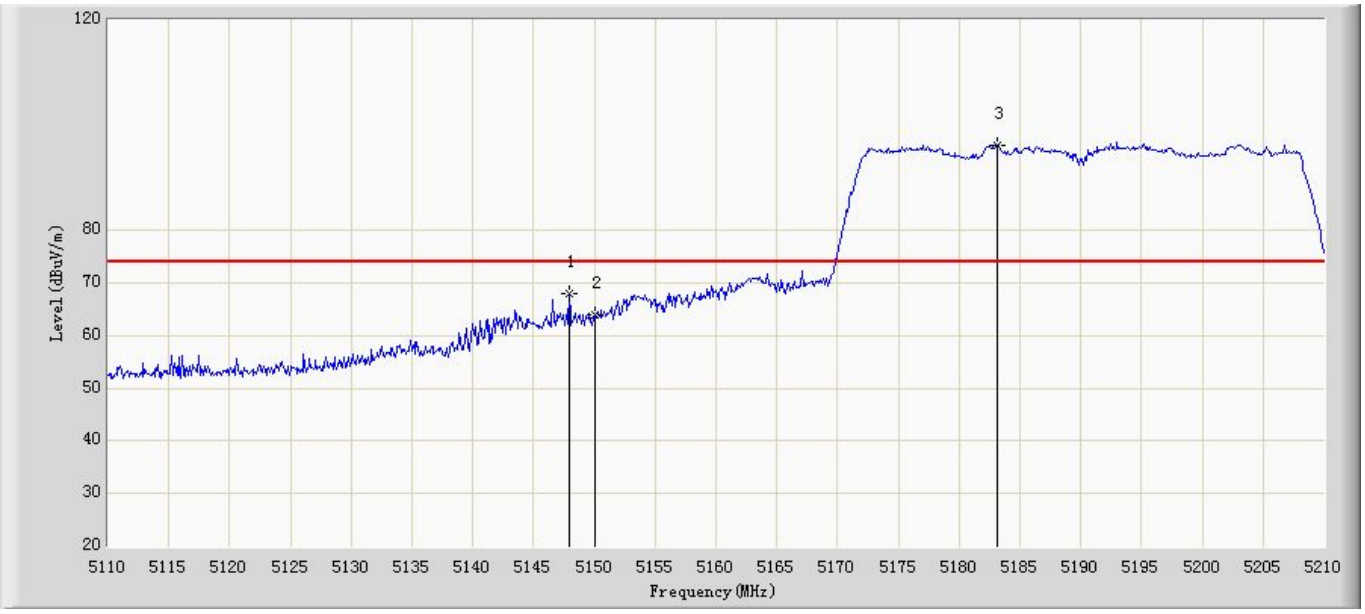

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5147.900	67.967	28.319	-6.033	74.000	39.648	PK
2		5150.000	64.058	24.411	-9.942	74.000	39.647	PK
3	*	5183.100	96.271	56.632	N/A	N/A	39.638	PK

Site: AC102	Time: 2015/07/12 - 15:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5190 by 802.11n(40MHz) Ant1	

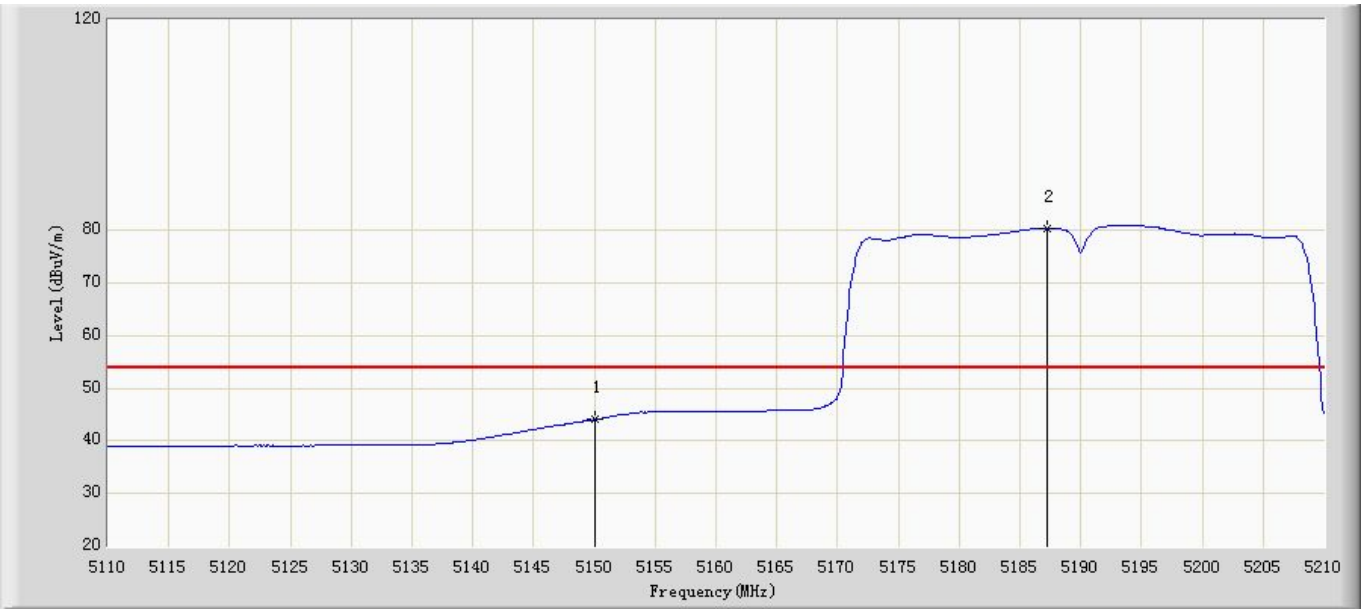

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	44.039	4.392	-9.961	54.000	39.647	AV
2	*	5187.300	80.409	40.770	N/A	N/A	39.639	AV

Site: AC102	Time: 2015/07/12 - 15:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5230 by 802.11n(40MHz) Ant1	

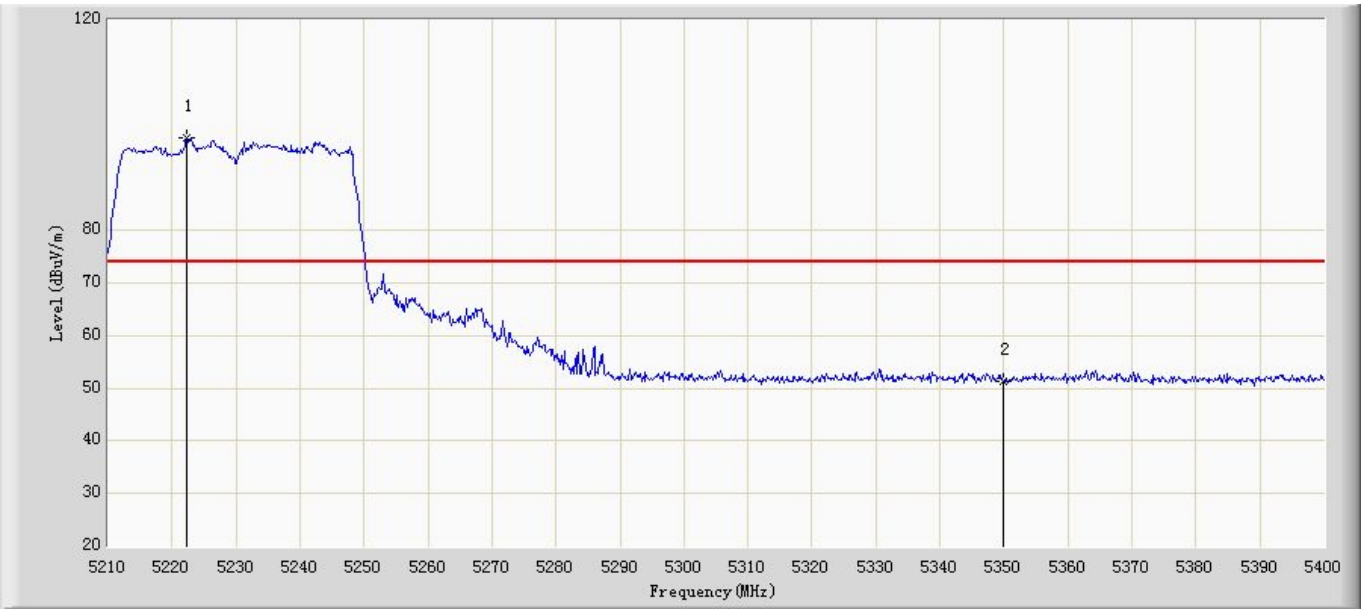

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5222.350	97.647	58.005	N/A	N/A	39.642	PK
2		5350.000	51.277	11.657	-22.723	74.000	39.620	PK

Site: AC102	Time: 2015/07/12 - 15:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5230 by 802.11n(40MHz) Ant1	

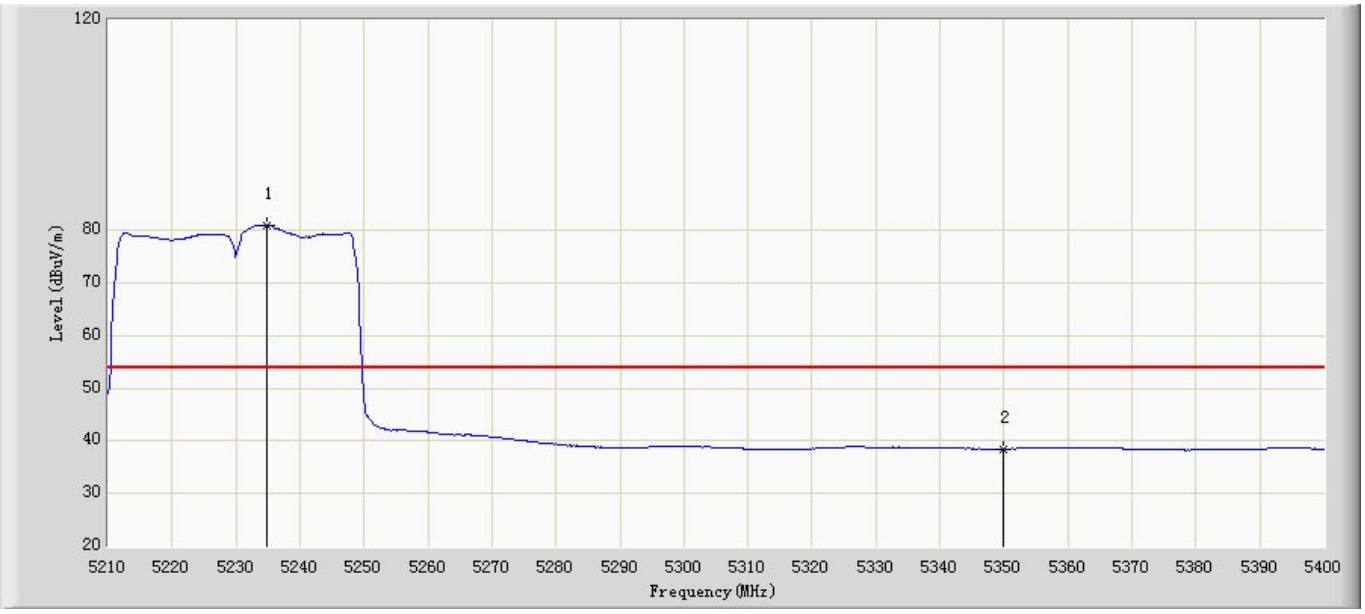

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5234.890	80.937	41.297	N/A	N/A	39.640	AV
2		5350.000	38.419	-1.201	-15.581	54.000	39.620	AV

Site: AC102	Time: 2015/07/12 - 15:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5755 by 802.11n(40MHz) Ant1	

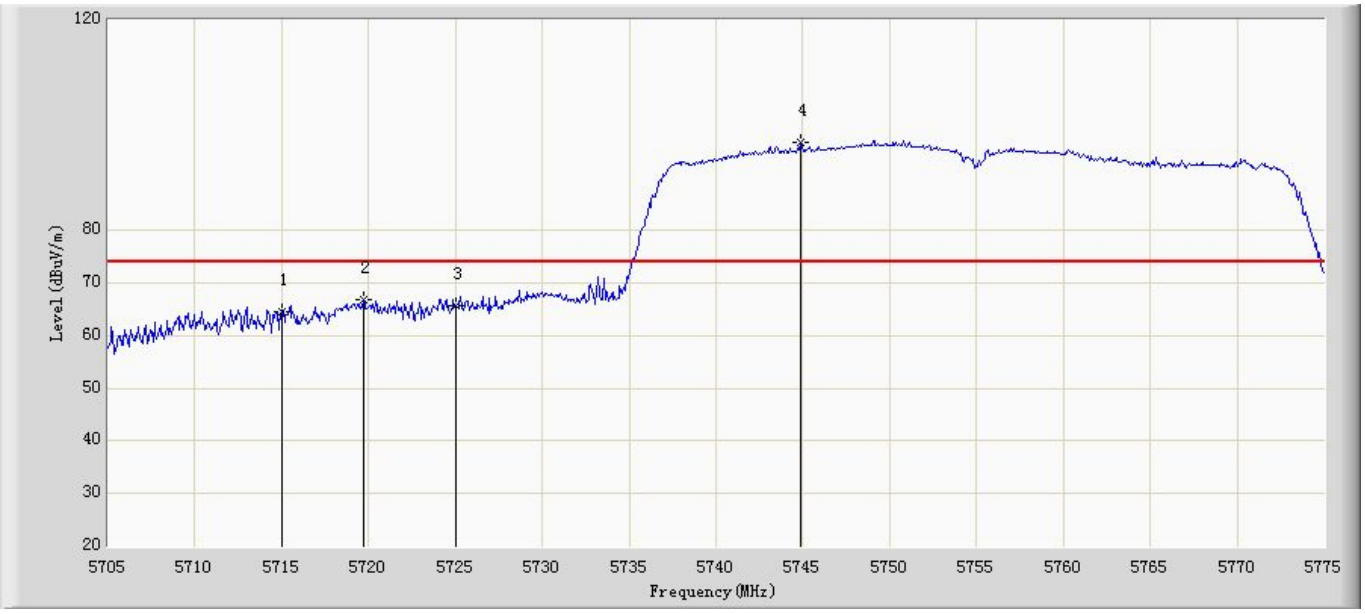

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	64.5	24.57	-3.7	68.2	39.930	PK
2		5719.700	66.966	27.03	-11.234	78.2	39.936	PK
3		5725.000	65.664	25.721	-12.536	78.2	39.943	PK
4	*	5744.900	96.686	56.722	N/A	N/A	39.964	PK

Site: AC102	Time: 2015/07/12 - 15:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5755 by 802.11n(40MHz) Ant1	

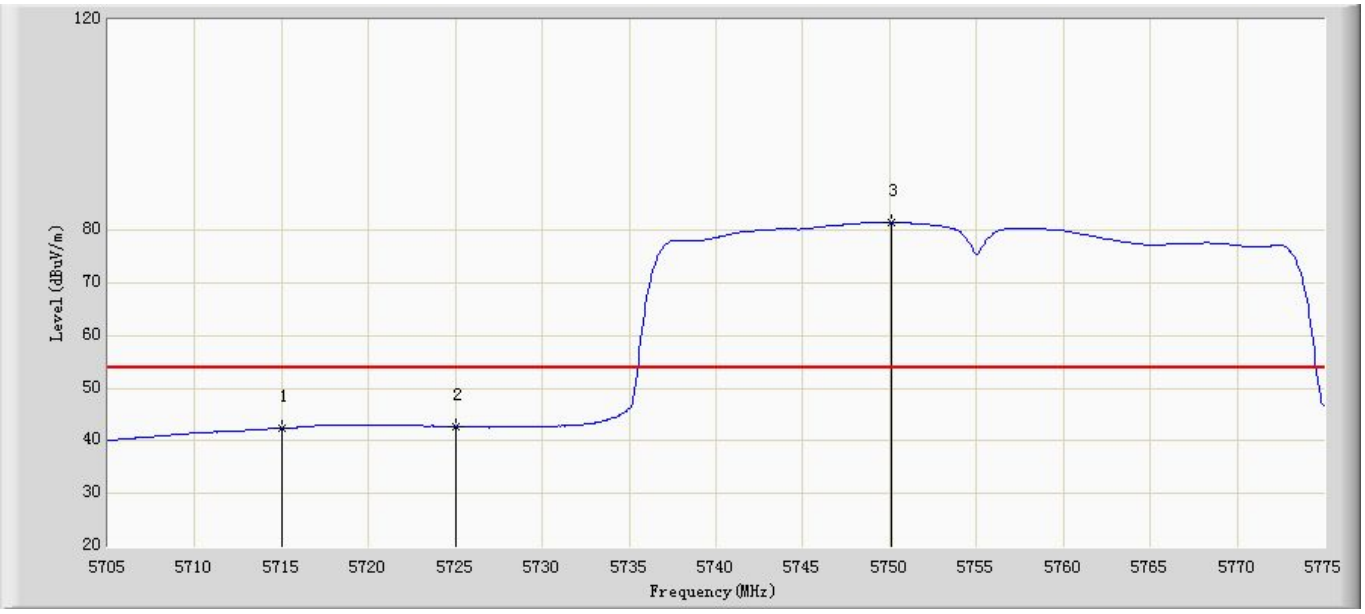

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	42.366	2.436	-25.834	68.2	39.930	AV
2		5725.000	42.699	2.756	-35.501	78.2	39.943	AV
3	*	5750.080	81.534	41.565	N/A	N/A	39.970	AV

Site: AC102	Time: 2015/07/12 - 15:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5795 by 802.11n(40MHz) Ant1	

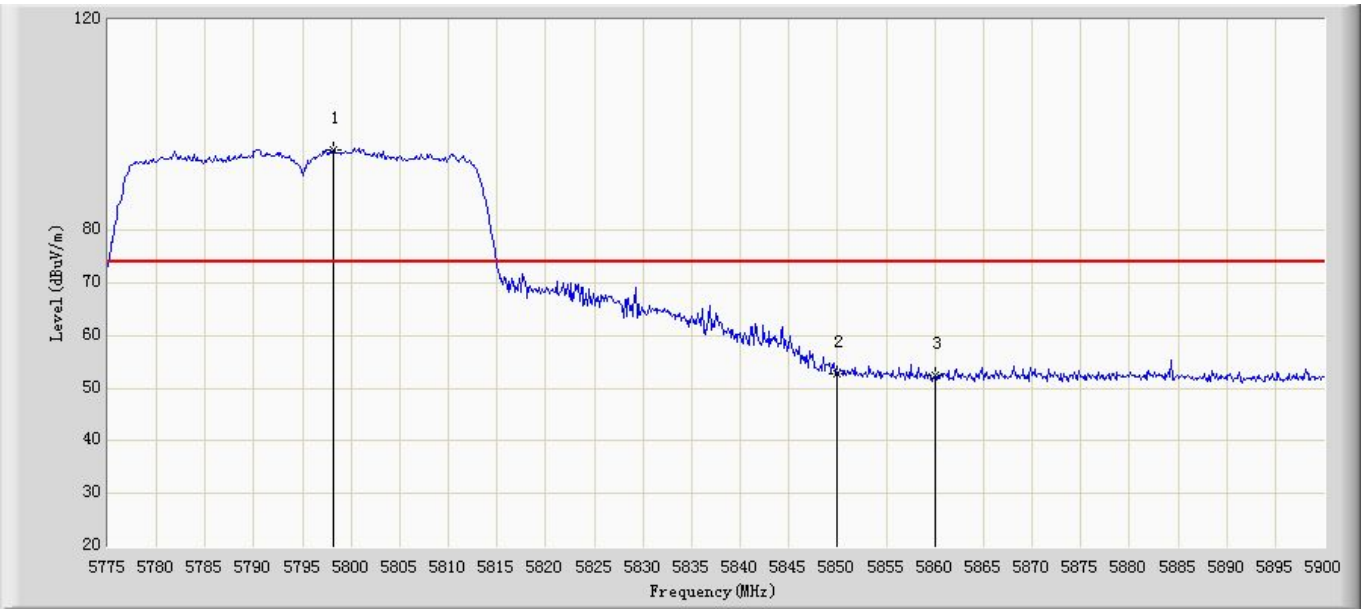

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5798.125	95.403	55.371	N/A	N/A	40.031	PK
2		5850.000	52.697	12.591	-25.503	78.2	40.106	PK
3		5860.000	52.547	12.427	-15.653	68.2	40.120	PK

Site: AC102	Time: 2015/07/12 - 15:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5795 by 802.11n(40MHz) Ant1	

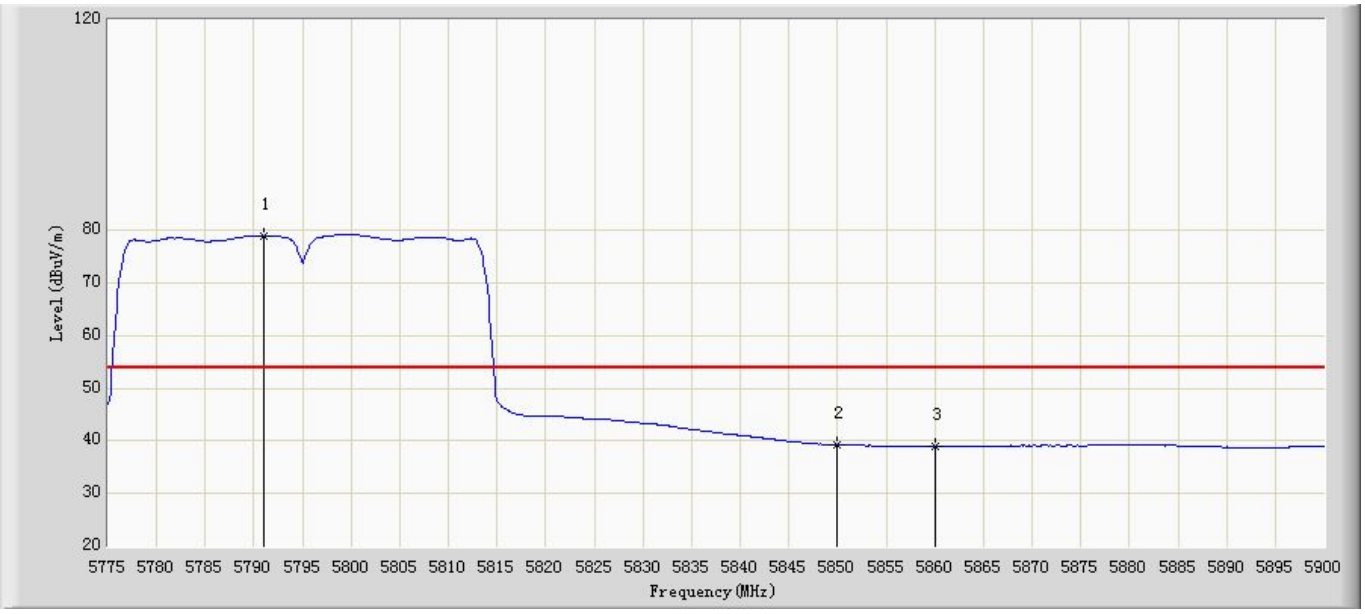

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5791.000	78.999	38.976	N/A	N/A	40.023	AV
2		5850.000	39.211	-0.895	-38.989	78.2	40.106	AV
3		5860.000	38.976	-1.144	-29.224	68.2	40.120	AV

Site: AC102	Time: 2015/07/12 - 15:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5190 by 802.11ac(40MHz) Ant1	

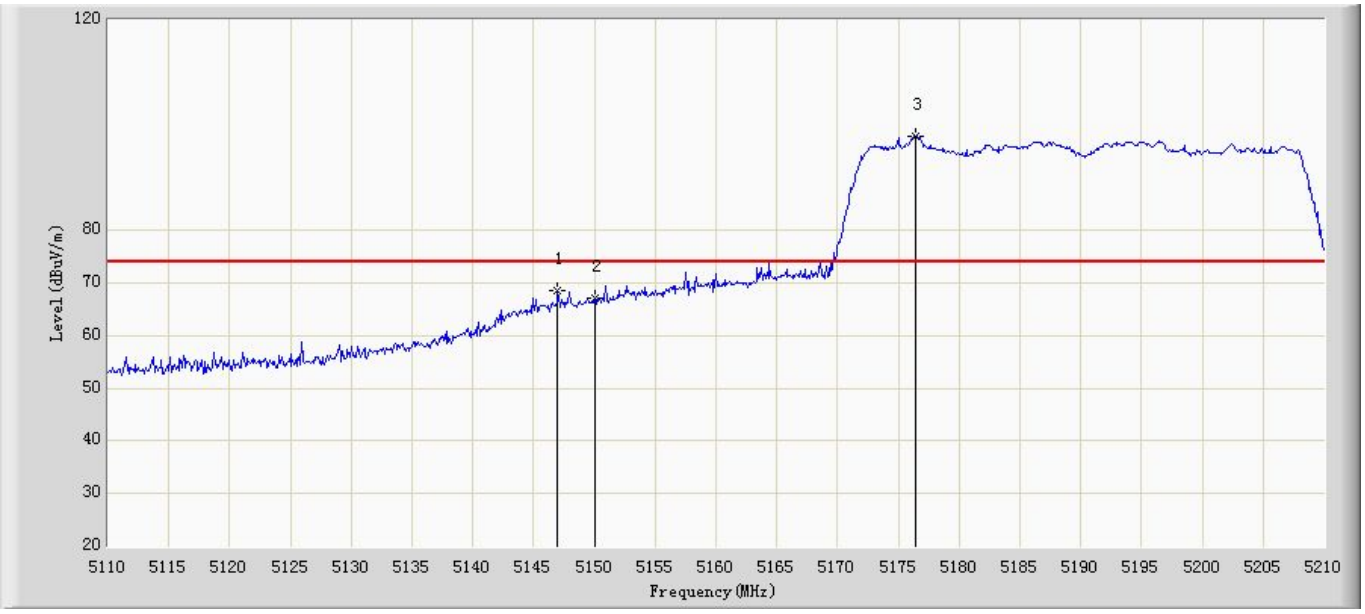

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5147.000	68.678	29.030	-5.322	74.000	39.648	PK
2		5150.000	67.209	27.562	-6.791	74.000	39.647	PK
3	*	5176.400	97.940	58.300	N/A	N/A	39.640	PK

Site: AC102	Time: 2015/07/12 - 15:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5230 by 802.11ac(40MHz) Ant1	

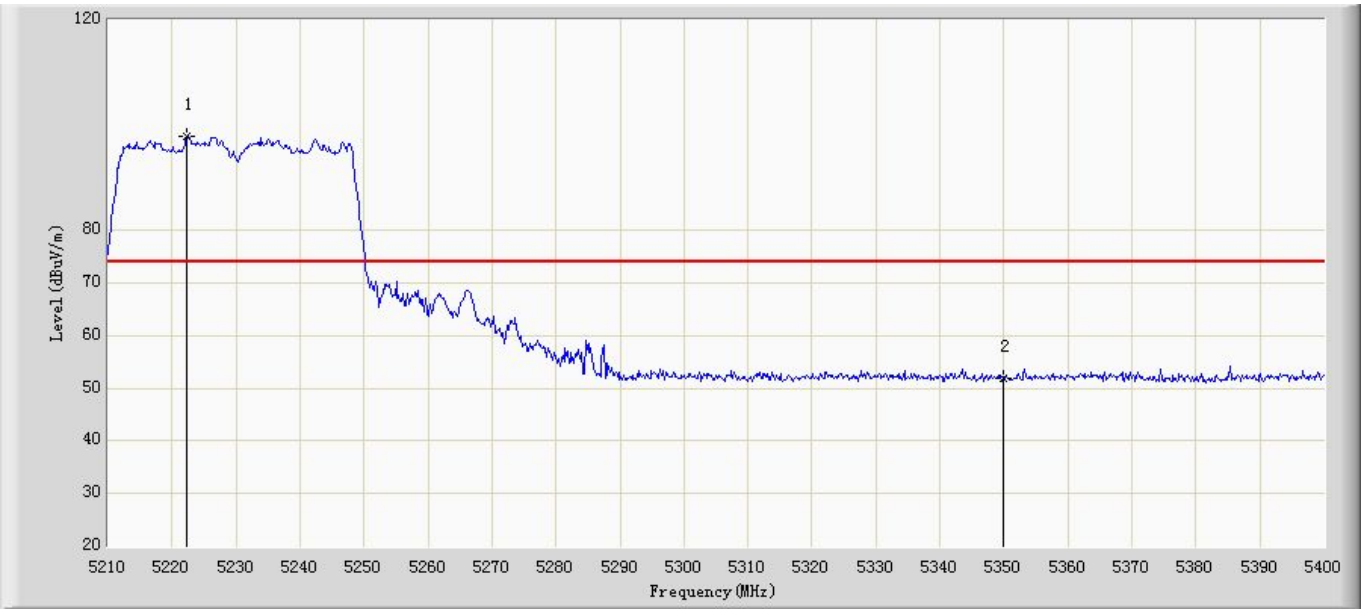

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5222.350	97.883	58.241	N/A	N/A	39.642	PK
2		5350.000	51.984	12.364	-22.016	74.000	39.620	PK

Site: AC102	Time: 2015/07/12 - 15:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5230 by 802.11ac(40MHz) Ant1	

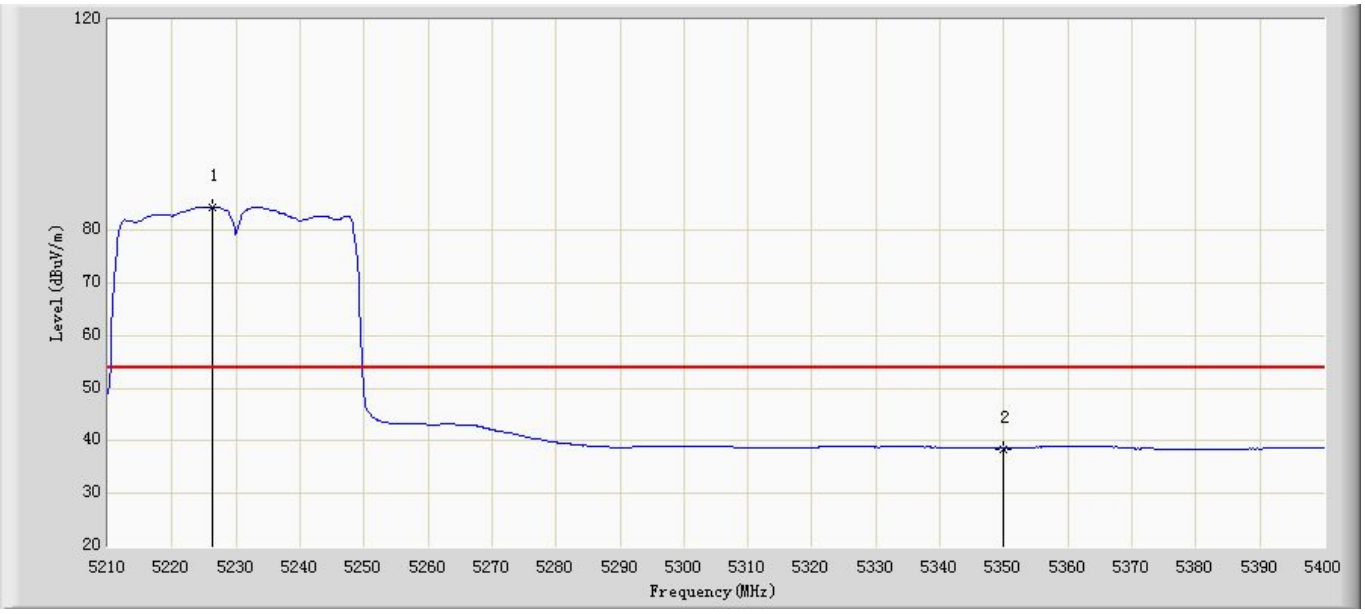

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5226.340	84.305	44.664	N/A	N/A	39.641	AV
2		5350.000	38.526	-1.094	-15.474	54.000	39.620	AV

Site: AC102	Time: 2015/07/12 - 15:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5755 by 802.11ac(40MHz) Ant1	

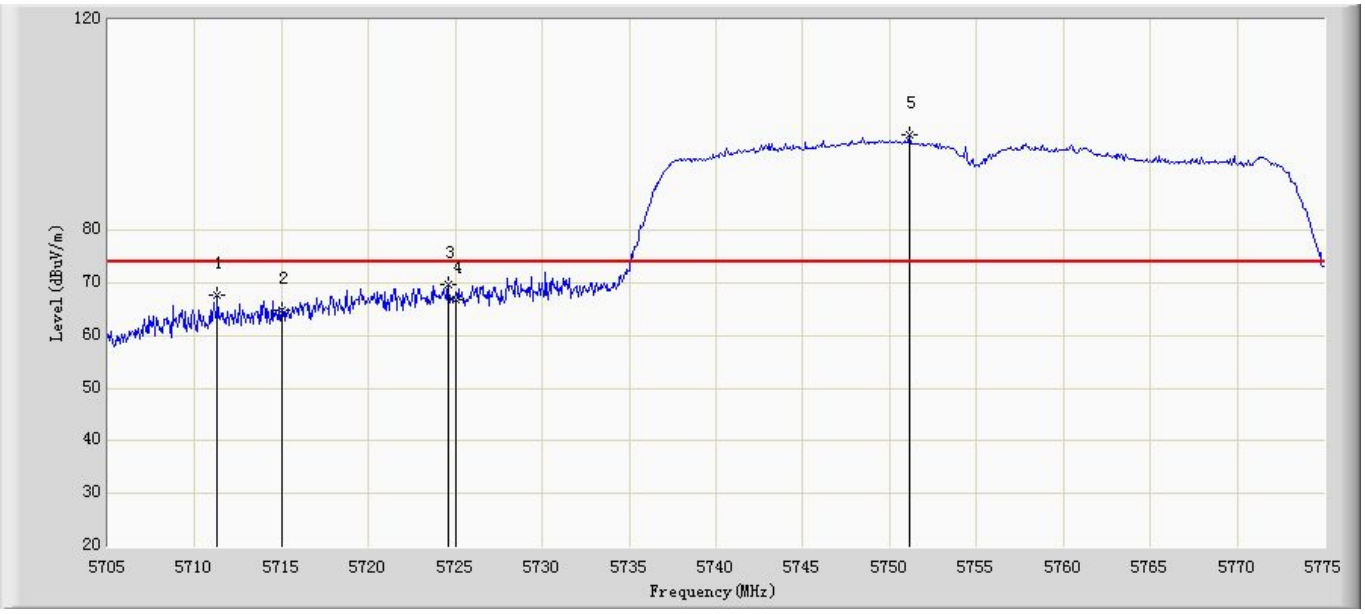

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5711.300	67.719	27.794	-0.481	68.2	39.925	PK
2		5715.000	64.746	24.816	-3.454	68.2	39.930	PK
3		5724.600	69.594	29.652	-8.606	78.2	39.942	PK
4		5725.000	66.843	26.9	-11.357	78.2	39.943	PK
5	*	5751.130	98.074	58.103	N/A	N/A	39.971	PK

Site: AC102	Time: 2015/07/12 - 15:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5755 by 802.11ac(40MHz) Ant1	

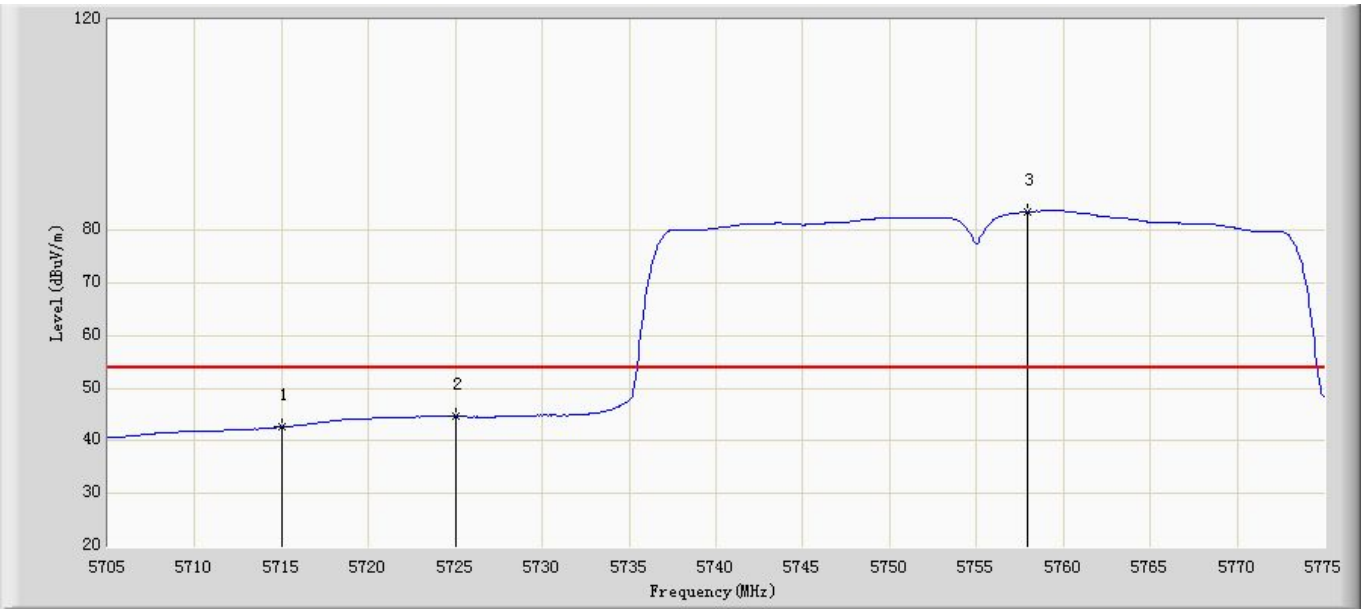

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	42.616	2.686	-25.584	68.2	39.930	AV
2		5725.000	44.628	4.685	-33.572	78.2	39.943	AV
3	*	5757.920	83.483	43.505	N/A	N/A	39.978	AV

Site: AC102	Time: 2015/07/12 - 15:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5795 by 802.11ac(40MHz) Ant1	

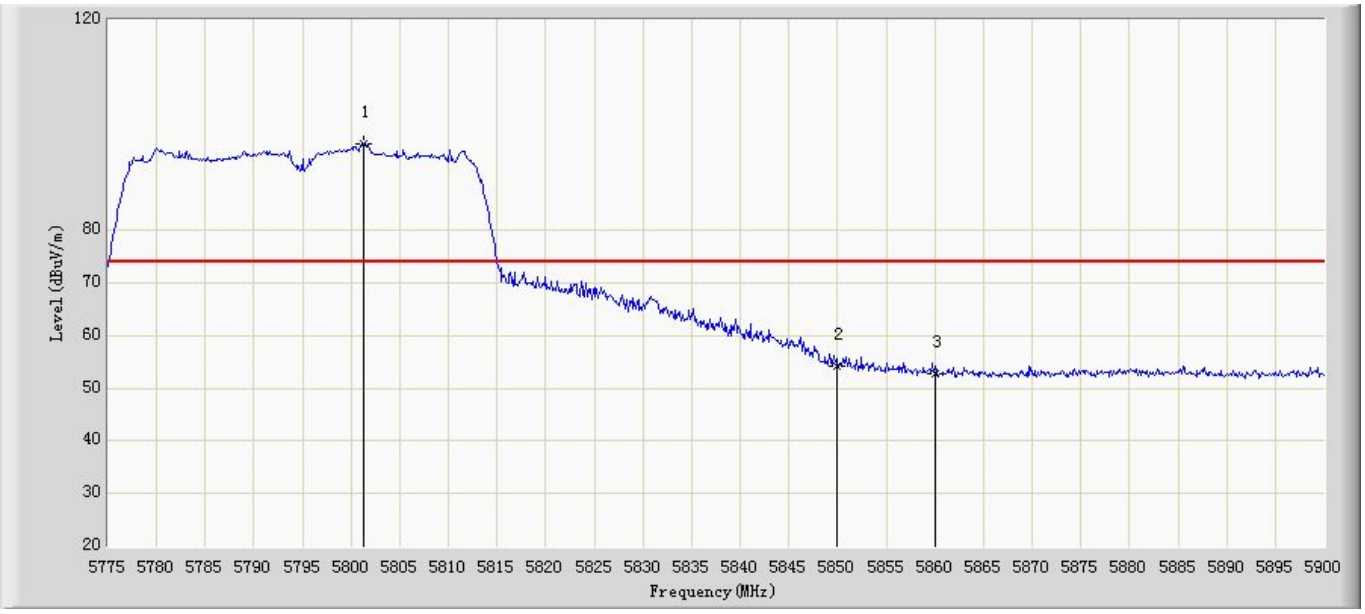

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5801.250	96.576	56.541	N/A	N/A	40.035	PK
2		5850.000	54.218	14.112	-23.982	78.2	40.106	PK
3		5860.000	52.672	12.552	-15.528	68.2	40.120	PK

Site: AC102	Time: 2015/07/12 - 15:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5795 by 802.11ac(40MHz) Ant1	

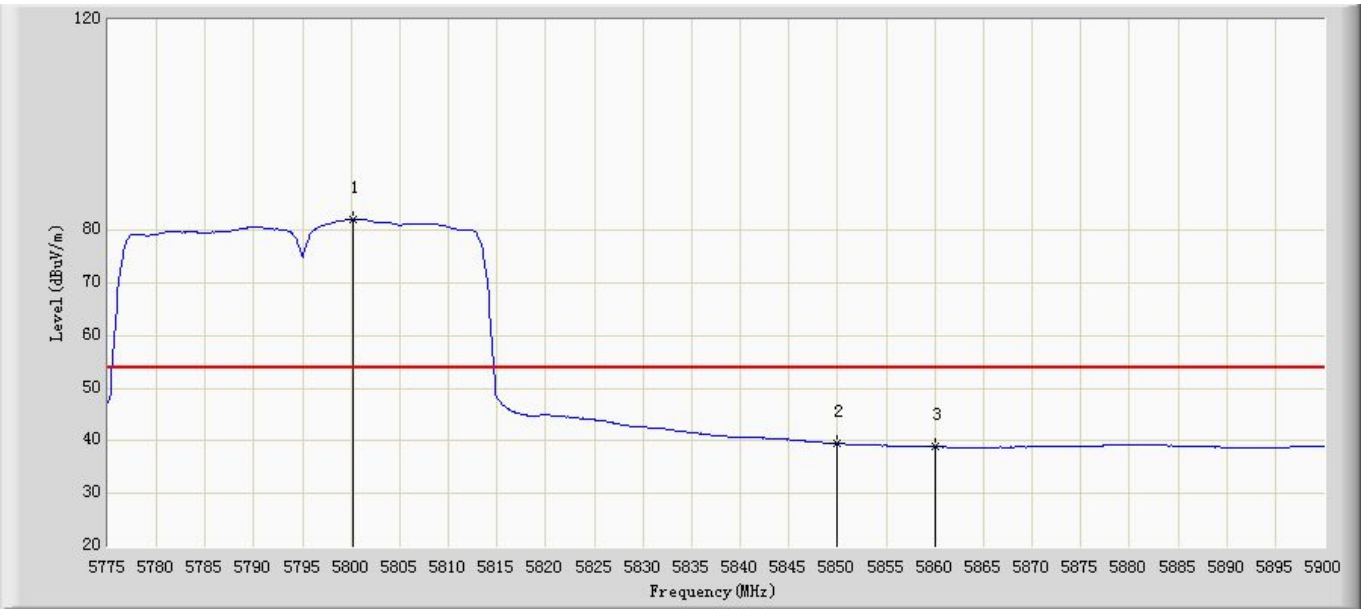

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5800.250	82.083	42.049	N/A	N/A	40.034	AV
2		5850.000	39.466	-0.640	-38.734	78.2	40.106	AV
3		5860.000	38.853	-1.267	-29.347	68.2	40.120	AV

Site: AC102	Time: 2015/07/12 - 15:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5210 by 802.11ac(80MHz) Ant1	

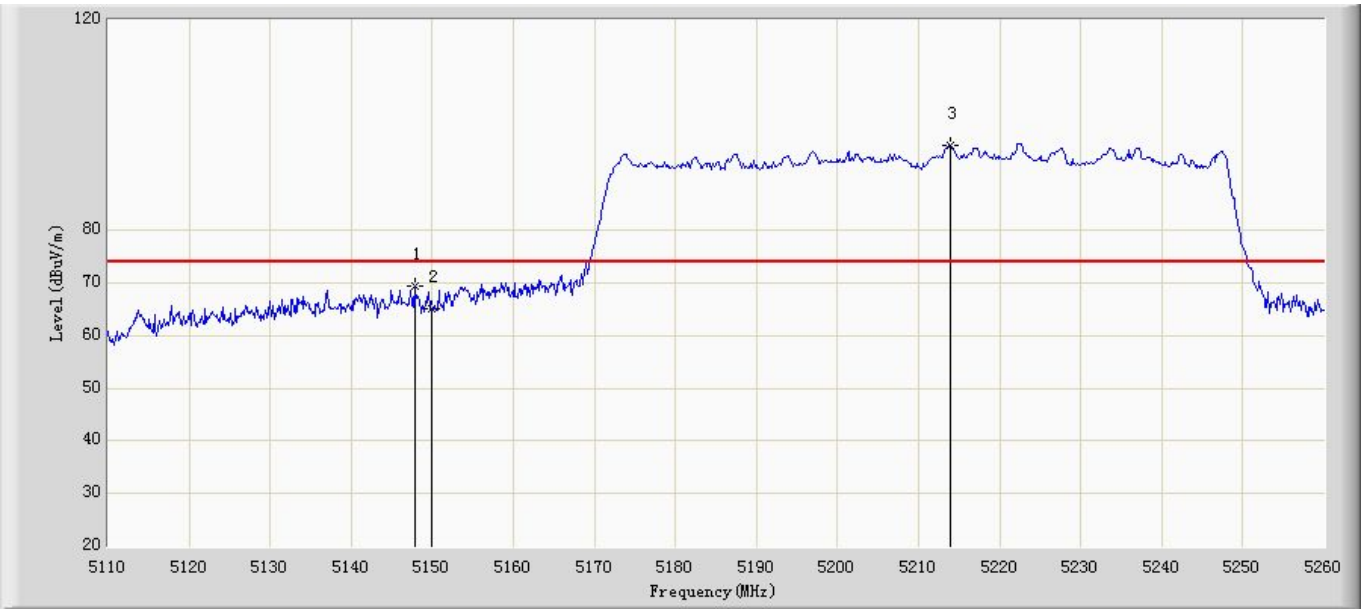

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5147.800	69.538	29.890	-4.462	74.000	39.648	PK
2		5150.000	65.196	25.549	-8.804	74.000	39.647	PK
3	*	5213.950	96.254	56.612	N/A	N/A	39.642	PK

Site: AC102	Time: 2015/07/12 - 15:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5210 by 802.11ac(80MHz) Ant1	

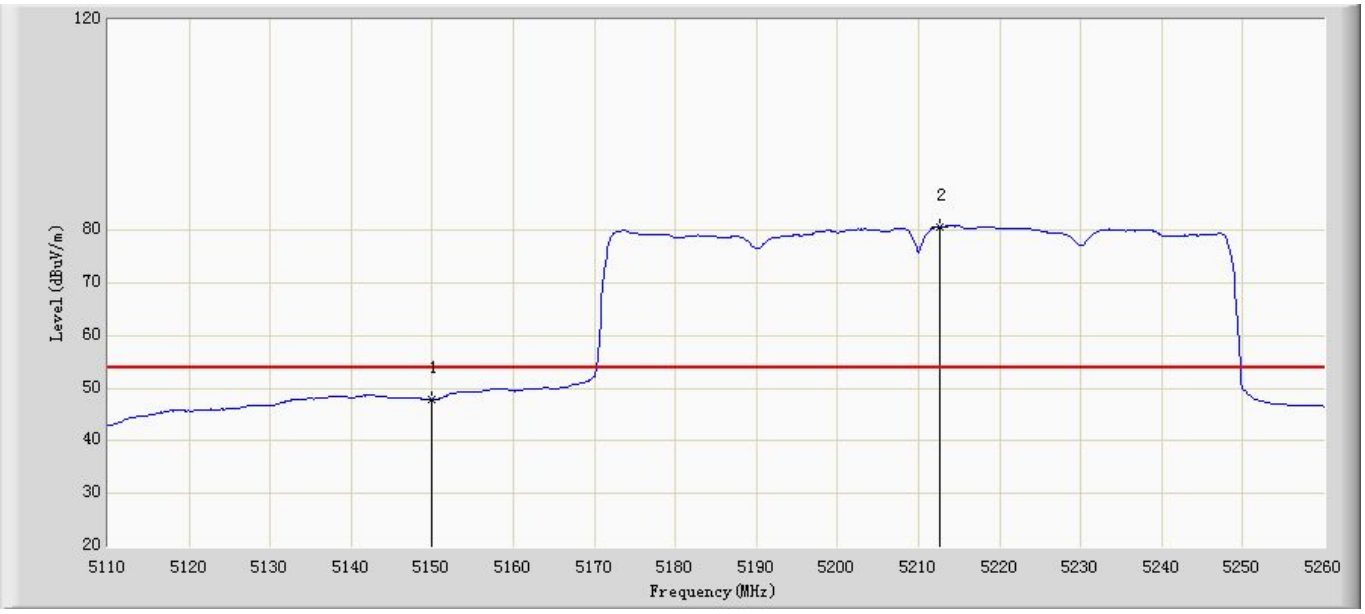

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.943	8.296	-6.057	54.000	39.647	AV
2	*	5212.600	80.772	41.130	N/A	N/A	39.642	AV

Site: AC102	Time: 2015/07/12 - 15:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5775 by 802.11ac(80MHz) Ant1	

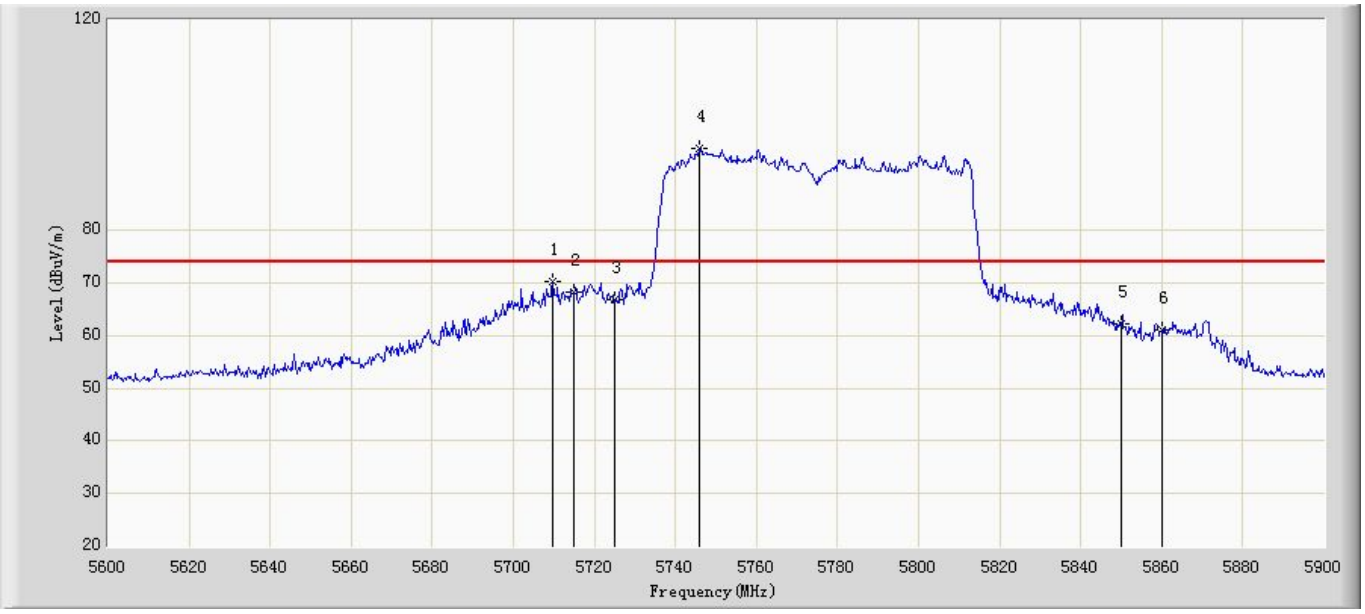

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5709.800	67.26	27.337	-0.94	68.2	39.924	PK
2		5715.000	68.194	28.264	-0.006	68.2	39.930	PK
3		5725.000	66.724	26.781	-11.476	78.2	39.943	PK
4	*	5745.800	95.501	55.536	N/A	N/A	39.964	PK
5		5850.000	62.218	22.112	-15.982	78.2	40.106	PK
6		5860.000	61.085	20.965	-7.115	68.2	40.120	PK

Site: AC102	Time: 2015/07/12 - 15:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5775 by 802.11ac(80MHz) Ant1	

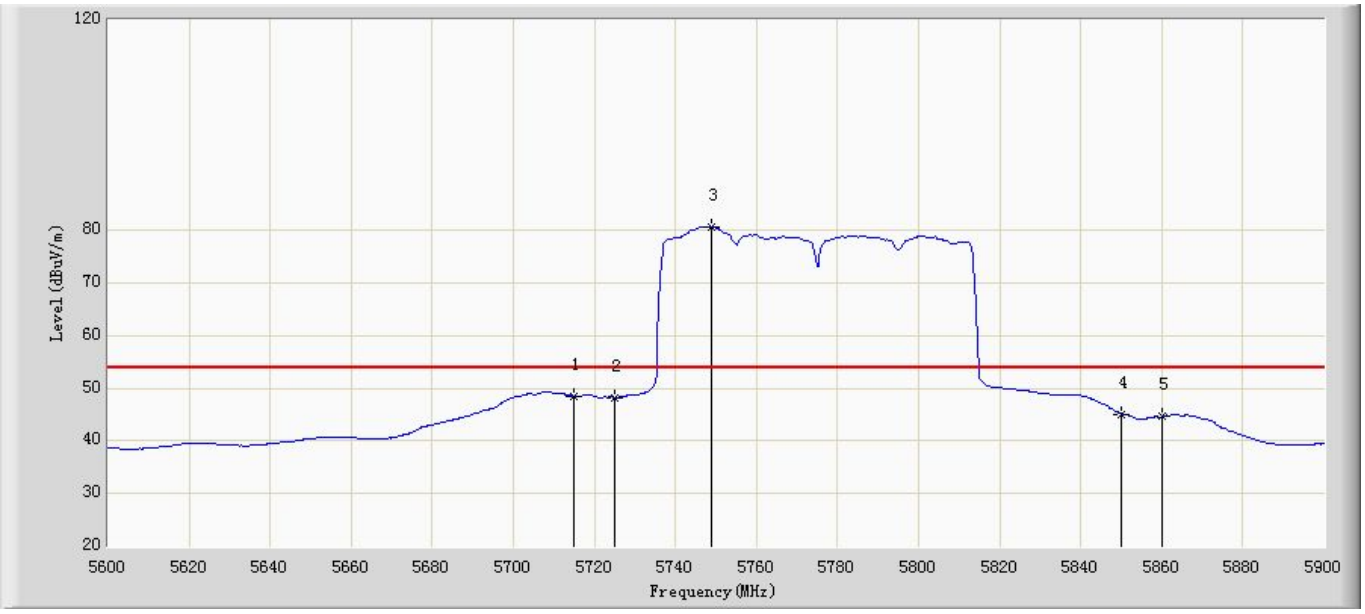

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	48.438	8.508	-19.762	68.2	39.930	AV
2		5725.000	48.218	8.275	-29.982	78.2	39.943	AV
3	*	5748.800	80.715	40.747	N/A	N/A	39.968	AV
4		5850.000	45.123	5.017	-33.077	78.2	40.106	AV
5		5860.000	44.606	4.486	-23.594	68.2	40.120	AV

Site: AC102	Time: 2015/07/12 - 15:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5180 by 802.11n(20MHz) Ant0+1	

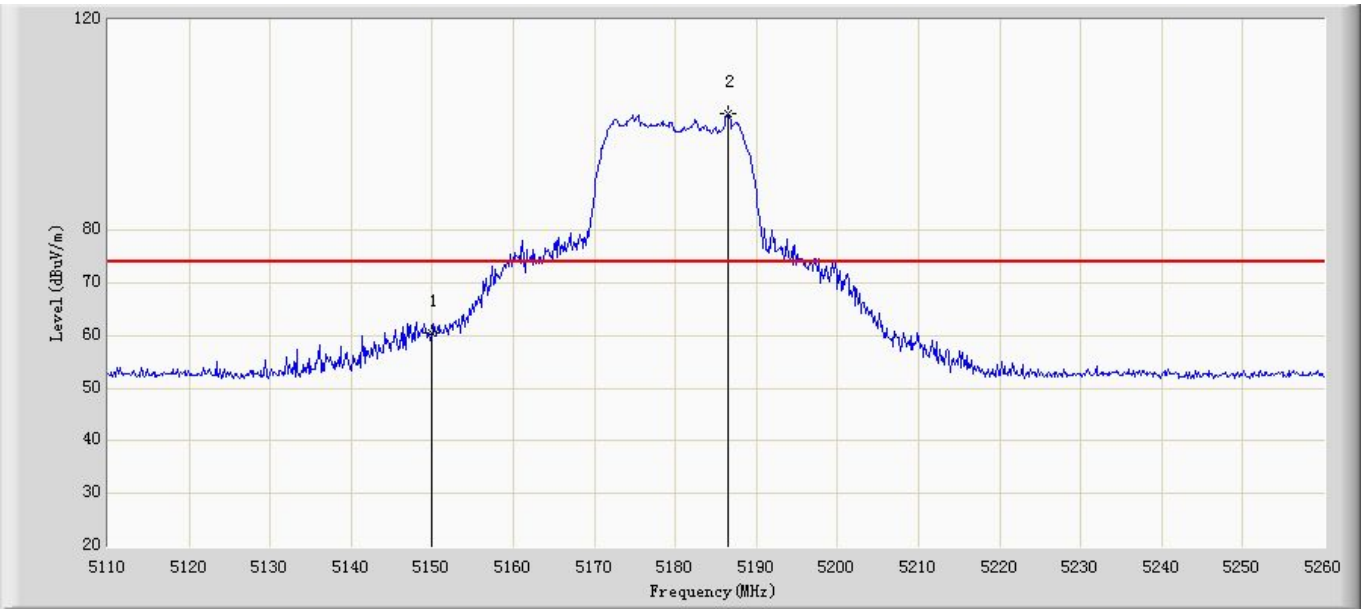

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	60.637	20.990	-13.363	74.000	39.647	PK
2	*	5186.500	102.240	62.601	N/A	N/A	39.639	PK

Site: AC102	Time: 2015/07/12 - 15:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5180 by 802.11n(20MHz) Ant0+1	

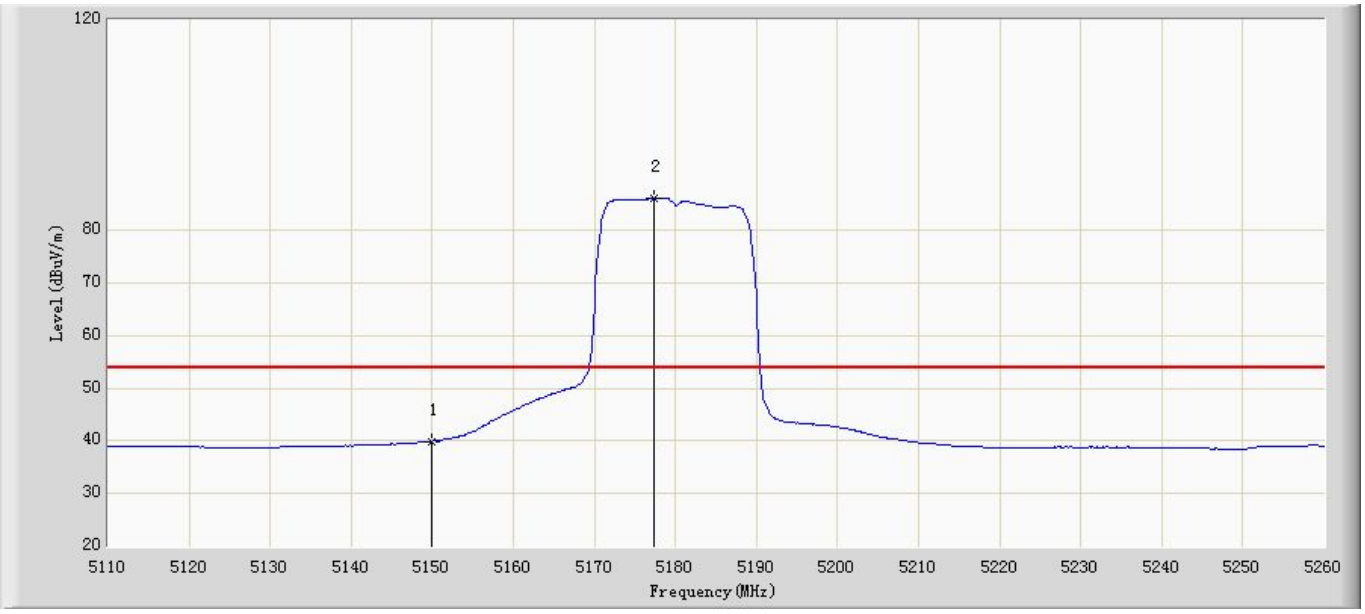

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	39.963	0.316	-14.037	54.000	39.647	AV
2	*	5177.350	86.136	46.497	N/A	N/A	39.640	AV

Site: AC102	Time: 2015/07/12 - 15:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5240 by 802.11n(20MHz) Ant0+1	

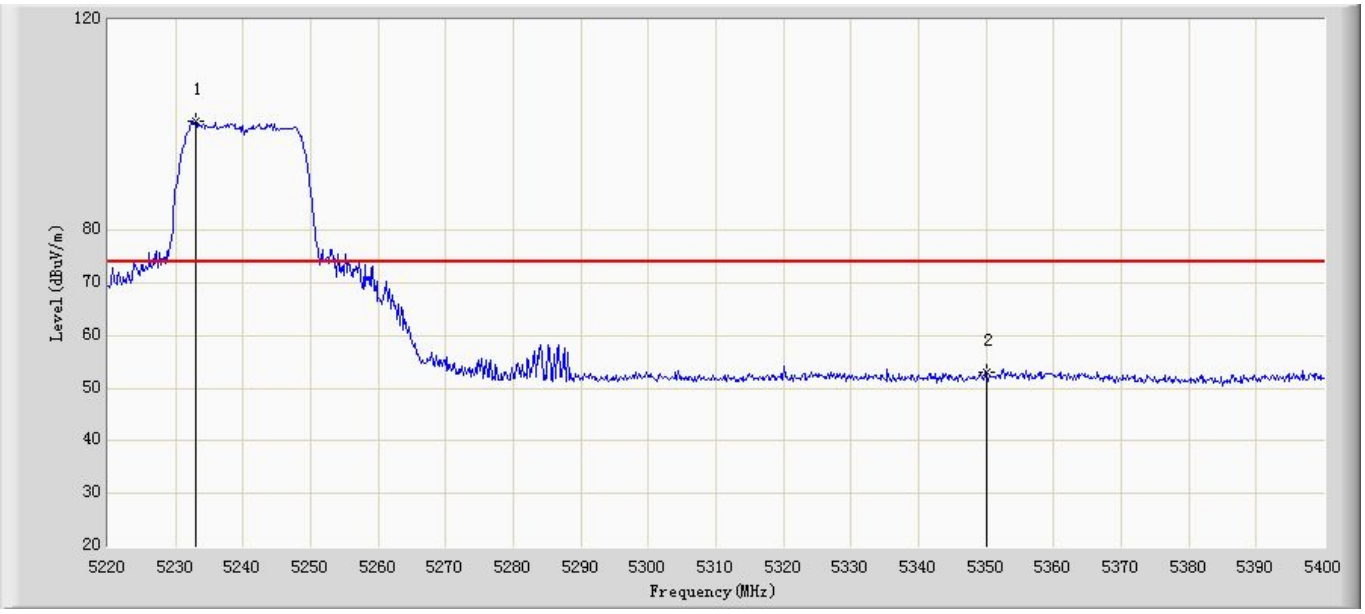

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5232.960	100.756	61.115	N/A	N/A	39.641	PK
2		5350.000	53.115	13.495	-20.885	74.000	39.620	PK

Site: AC102	Time: 2015/07/12 - 15:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5240 by 802.11n(20MHz) Ant0+1	

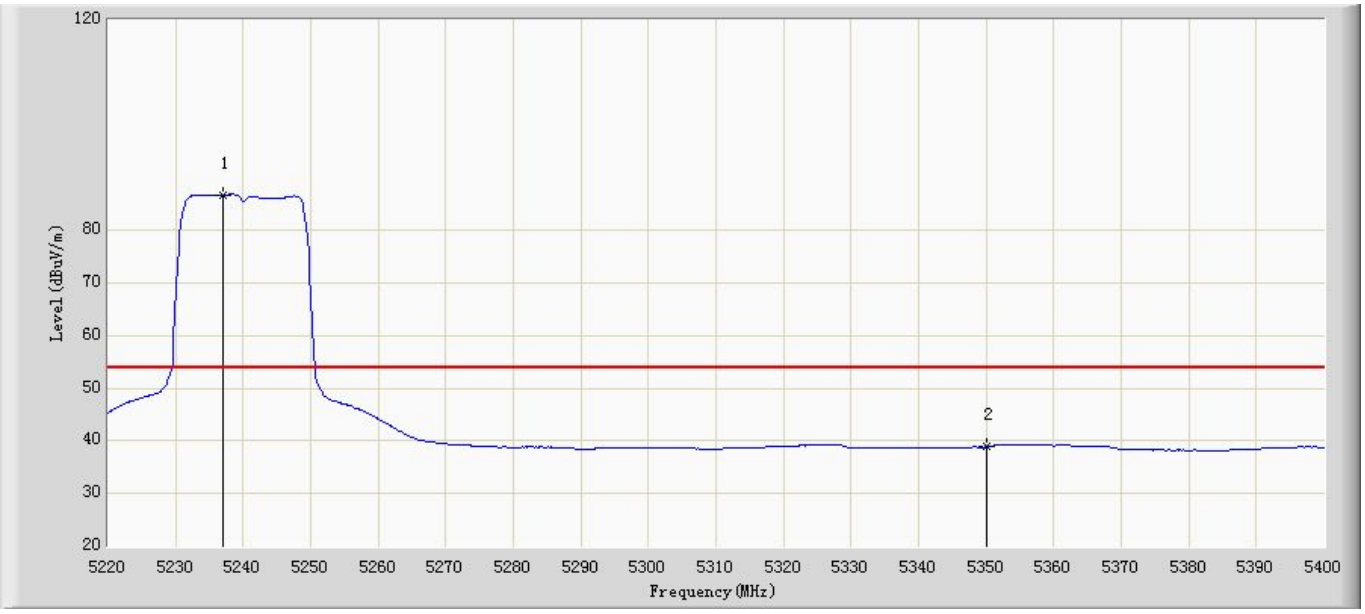

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5236.920	86.753	47.114	N/A	N/A	39.639	AV
2		5350.000	38.858	-0.762	-15.142	54.000	39.620	AV

Site: AC102	Time: 2015/07/12 - 15:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5745 by 802.11n(20MHz) Ant0+1	

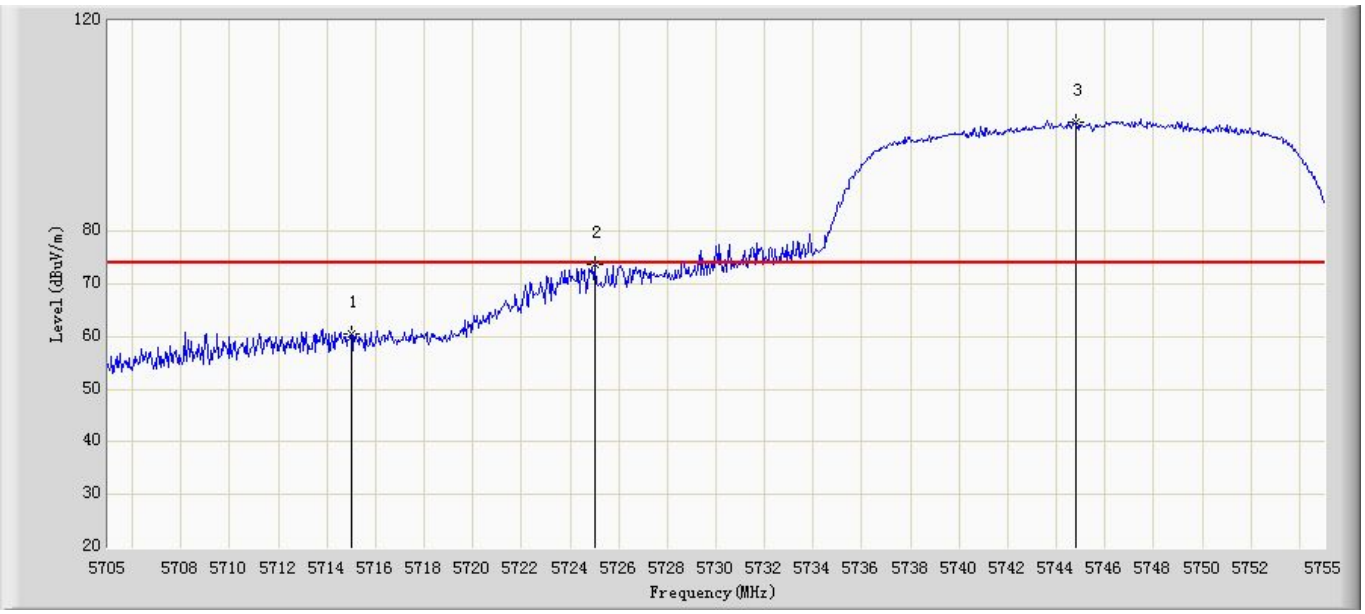

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	60.645	20.715	-7.555	68.2	39.930	PK
2		5725.000	73.695	33.752	-4.505	78.2	39.943	PK
3	*	5744.800	100.788	60.824	N/A	N/A	39.963	PK

Site: AC102	Time: 2015/07/12 - 16:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5745 by 802.11n(20MHz) Ant0+1	

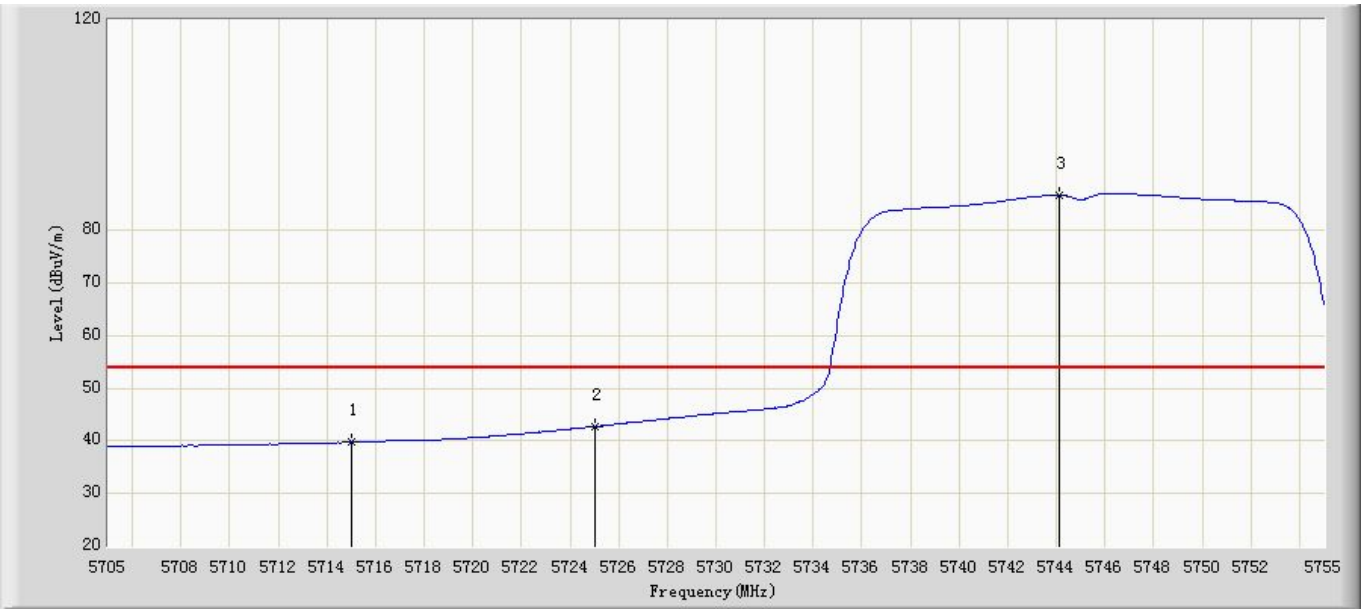

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	39.738	-0.192	-28.462	68.2	39.930	AV
2		5725.000	42.721	2.778	-35.479	78.2	39.943	AV
3	*	5744.100	86.702	46.739	N/A	N/A	39.963	AV

Site: AC102	Time: 2015/07/12 - 16:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5825 by 802.11n(20MHz) Ant0+1	

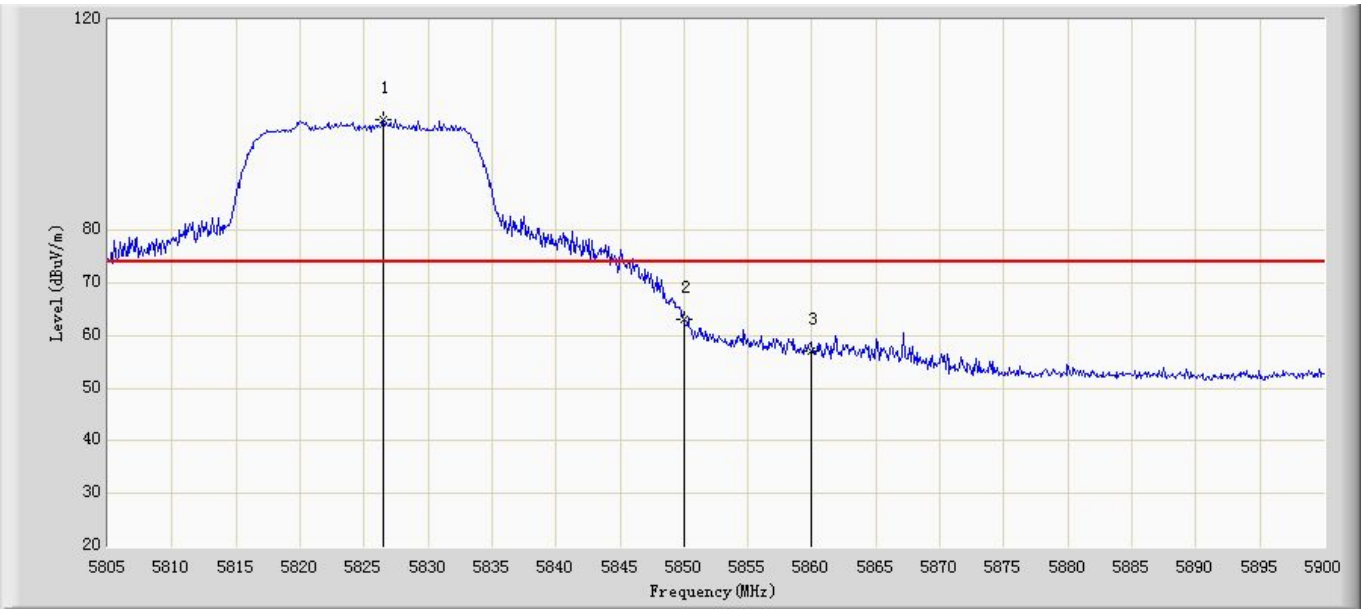

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5826.470	100.986	60.921	N/A	N/A	40.066	PK
2		5850.000	63.016	22.91	-15.184	78.2	40.106	PK
3		5860.000	56.971	16.851	-11.229	68.2	40.120	PK

Site: AC102	Time: 2015/07/12 - 16:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5825 by 802.11n(20MHz) Ant0+1	

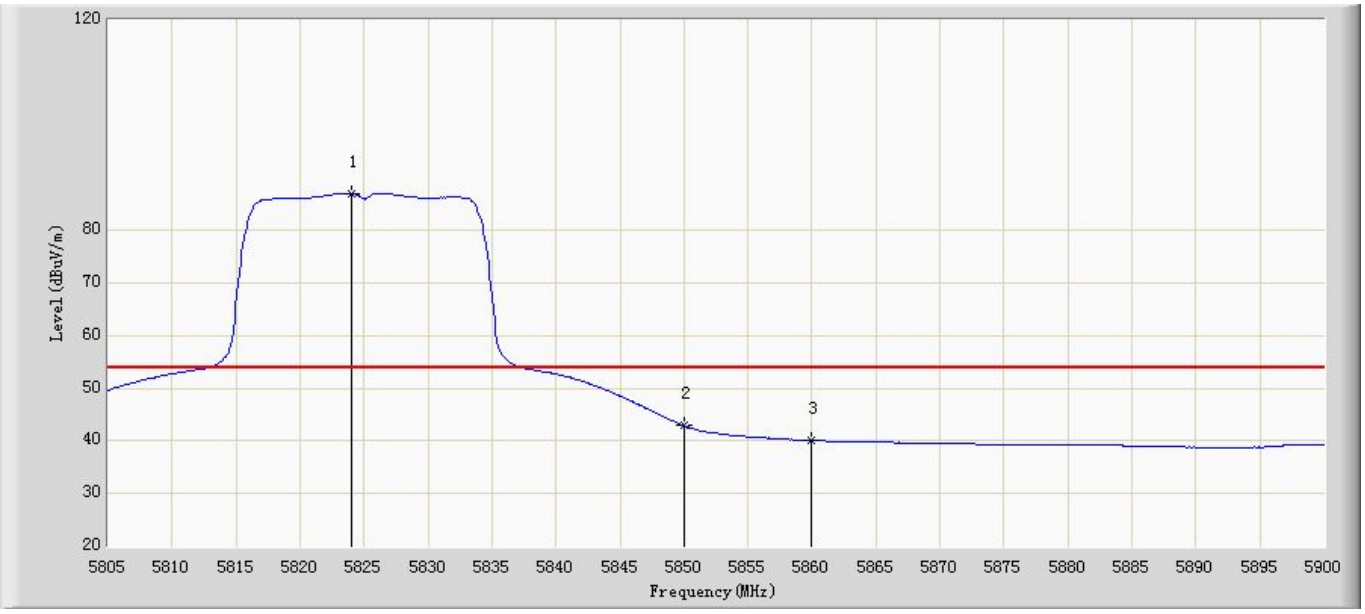

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5824.000	87.073	47.011	N/A	N/A	40.062	AV
2		5850.000	42.869	2.763	-35.331	78.2	40.106	AV
3		5860.000	40.082	-0.038	-28.118	68.2	40.120	AV

Site: AC102	Time: 2015/07/12 - 16:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5180 by 802.11ac(20MHz) Ant0+1	

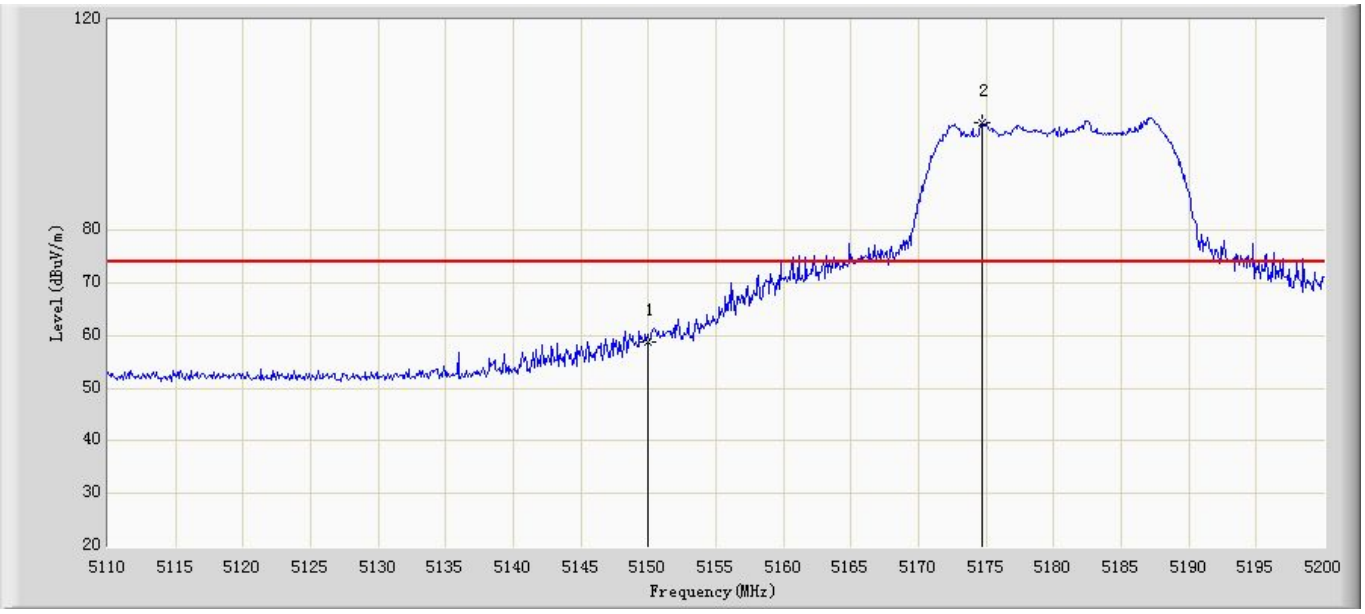

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	58.858	19.211	-15.142	74.000	39.647	PK
2	*	5174.710	100.473	60.833	N/A	N/A	39.640	PK

Site: AC102	Time: 2015/07/12 - 16:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5180 by 802.11ac(20MHz) Ant0+1	

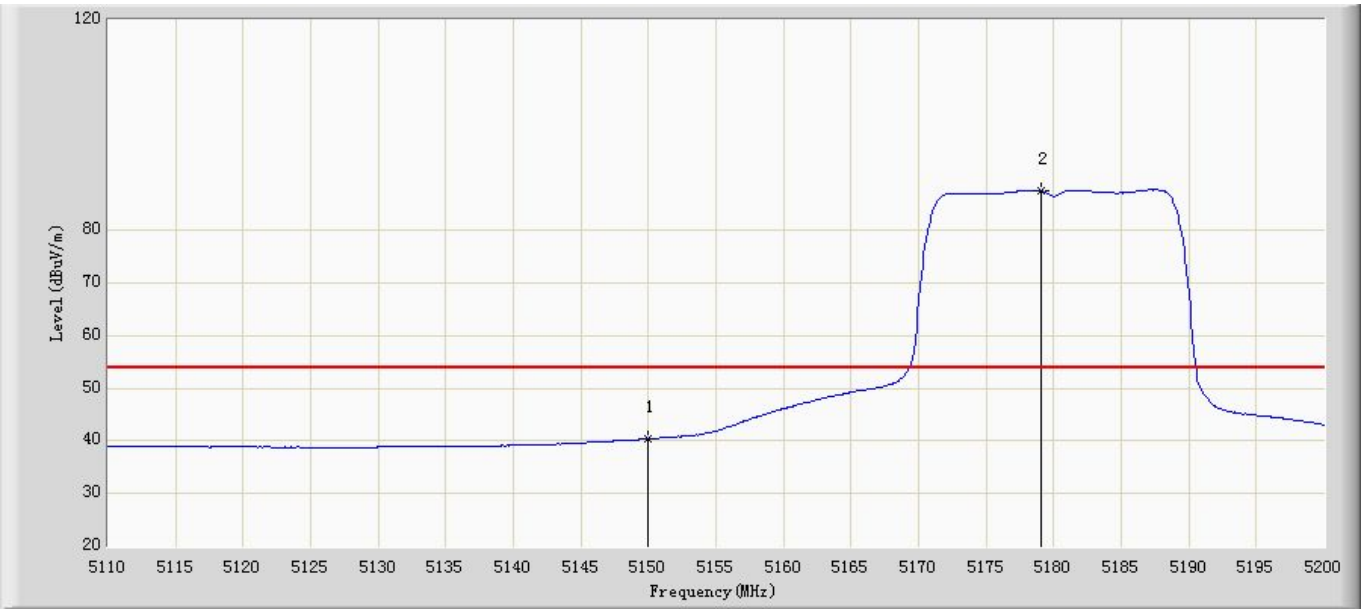

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	40.355	0.708	-13.645	54.000	39.647	AV
2	*	5179.030	87.522	47.883	N/A	N/A	39.639	AV

Site: AC102	Time: 2015/07/12 - 16:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5240 by 802.11ac(20MHz) Ant0+1	

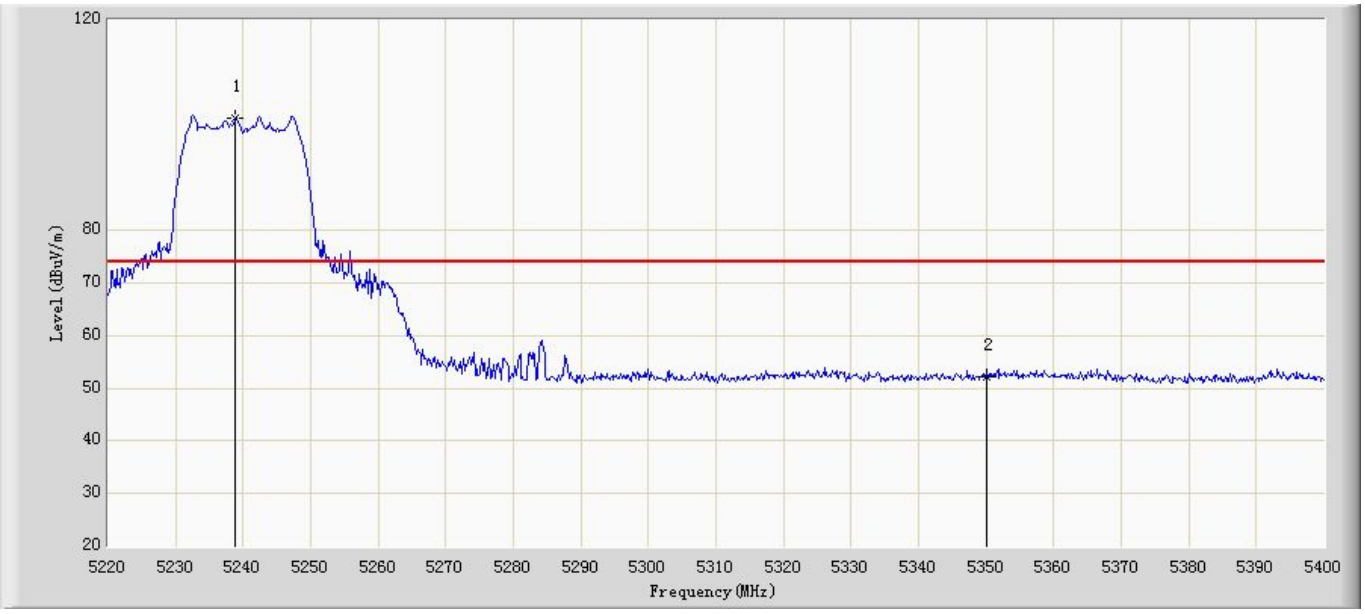

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5238.900	101.422	61.784	N/A	N/A	39.638	PK
2		5350.000	52.145	12.525	-21.855	74.000	39.620	PK

Site: AC102	Time: 2015/07/12 - 16:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5240 by 802.11ac(20MHz) Ant0+1	

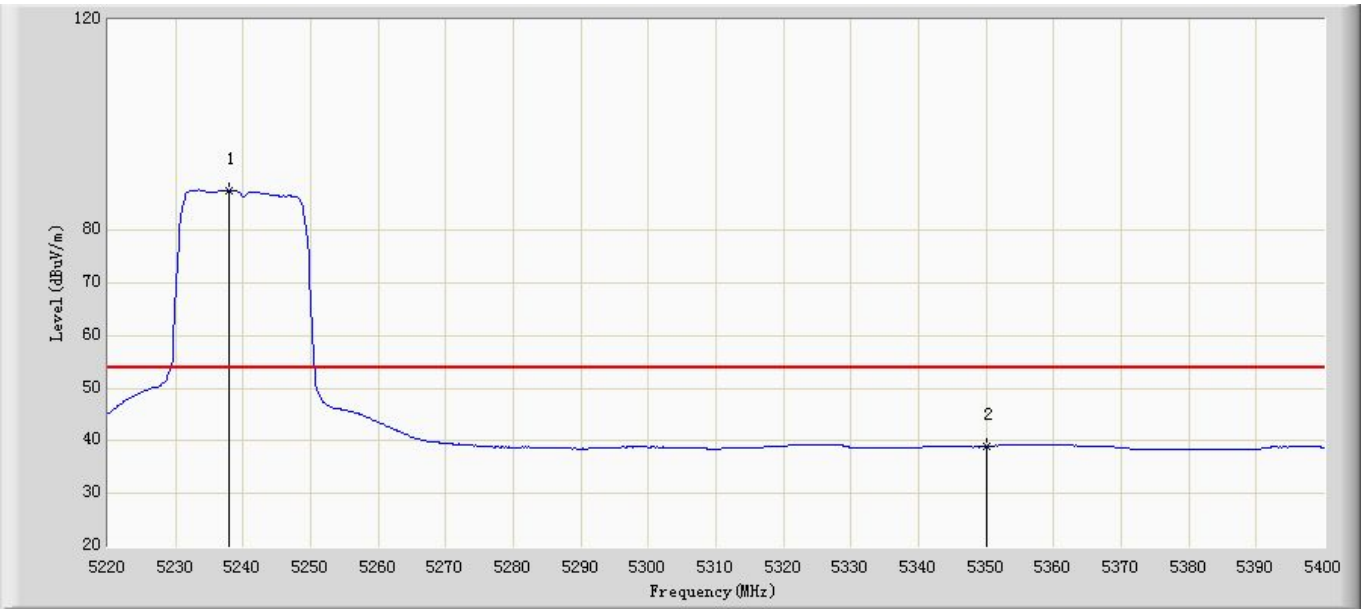

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5238.000	87.587	47.948	N/A	N/A	39.639	AV
2		5350.000	38.864	-0.756	-15.136	54.000	39.620	AV

Site: AC102	Time: 2015/07/12 - 16:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5745 by 802.11ac(20MHz) Ant0+1	

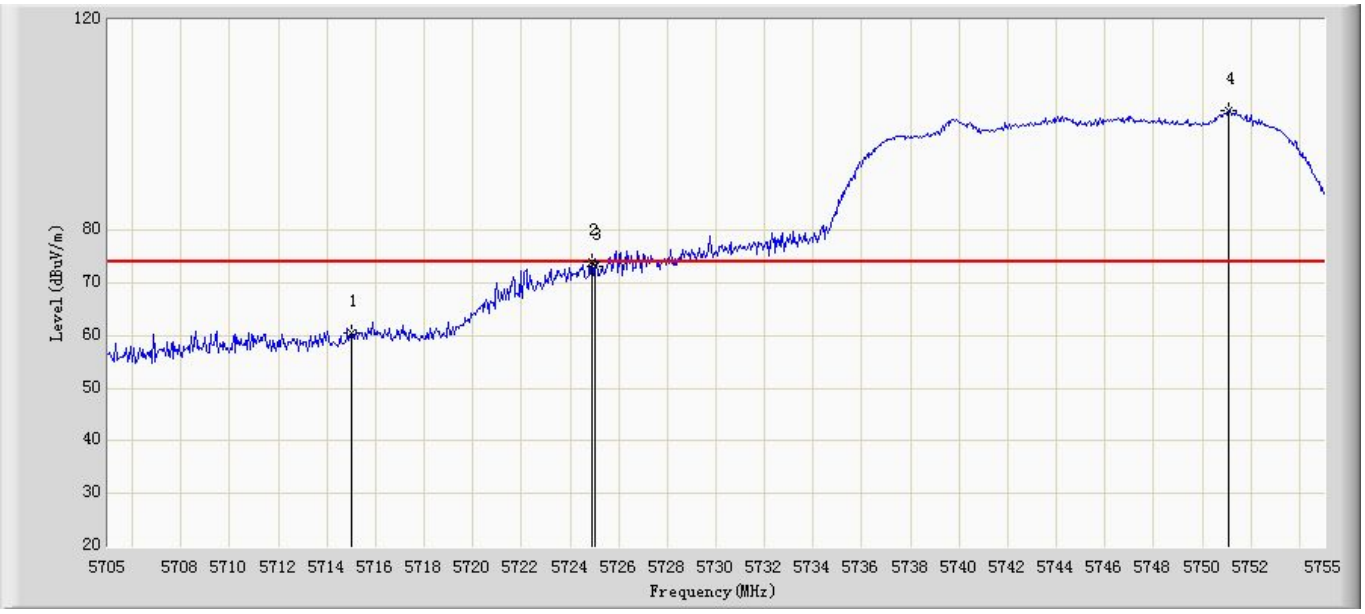

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	60.482	20.552	-7.718	68.2	39.930	PK
2	*	5724.900	73.915	33.972	-4.285	78.2	39.943	PK
3		5725.000	73.301	33.358	-4.899	78.2	39.943	PK
4	*	5751.100	102.742	62.771	N/A	N/A	33.201	PK

Site: AC102	Time: 2015/07/12 - 16:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5745 by 802.11ac(20MHz) Ant0+1	

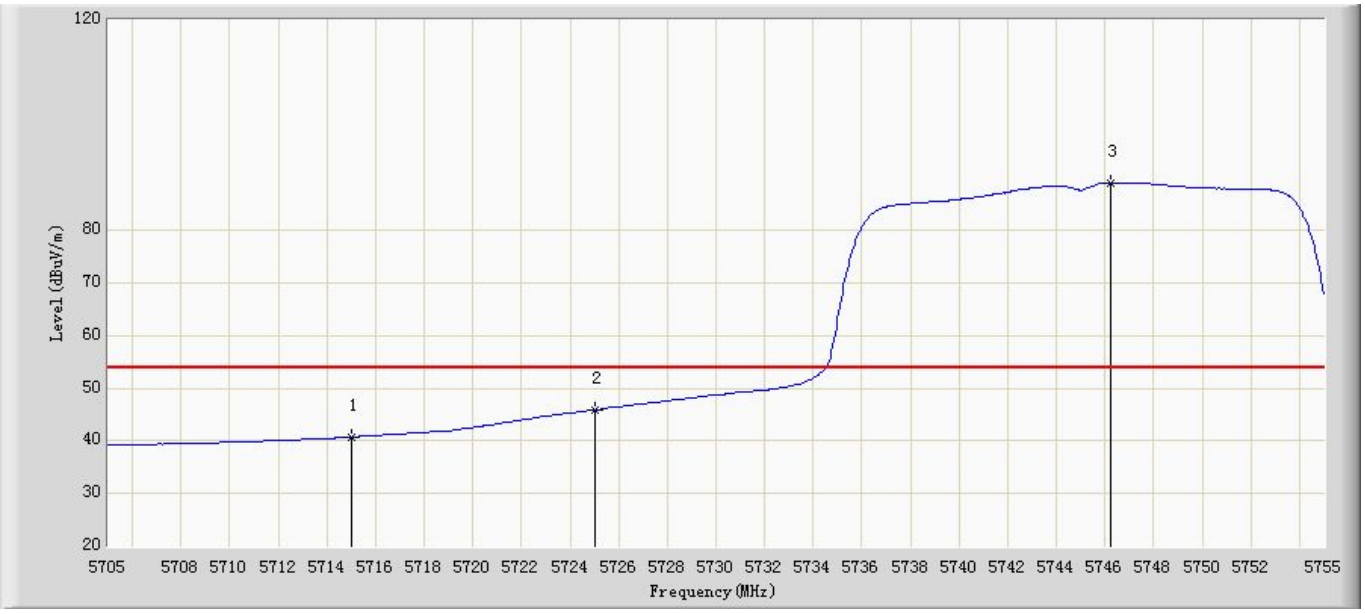

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	40.749	0.819	-27.451	68.2	39.930	AV
2		5725.000	45.972	6.029	-32.228	78.2	39.943	AV
3	*	5746.250	89.104	49.139	N/A	N/A	39.966	AV

Site: AC102	Time: 2015/07/12 - 16:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5825 by 802.11ac(20MHz) Ant0+1	

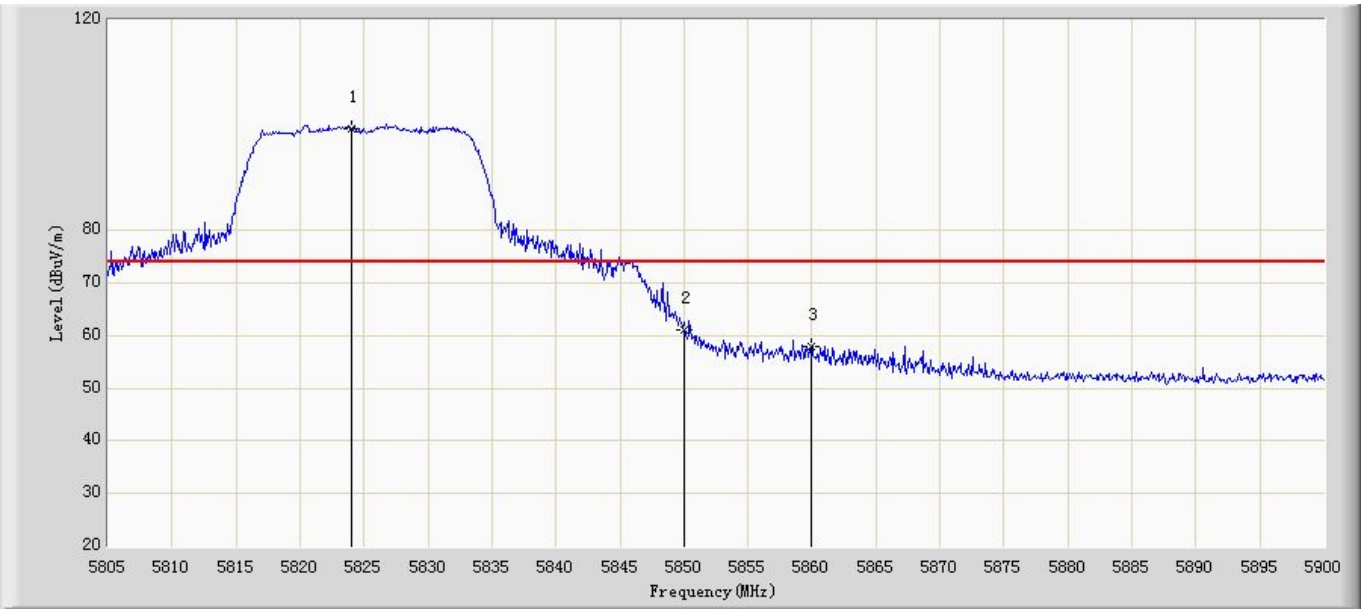

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5824.000	99.267	59.205	N/A	N/A	40.062	PK
2		5850.000	61.132	21.026	-17.068	78.2	40.106	PK
3		5860.000	58.063	17.943	-10.137	68.2	40.120	PK

Site: AC102	Time: 2015/07/12 - 16:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5825 by 802.11ac(20MHz) Ant0+1	

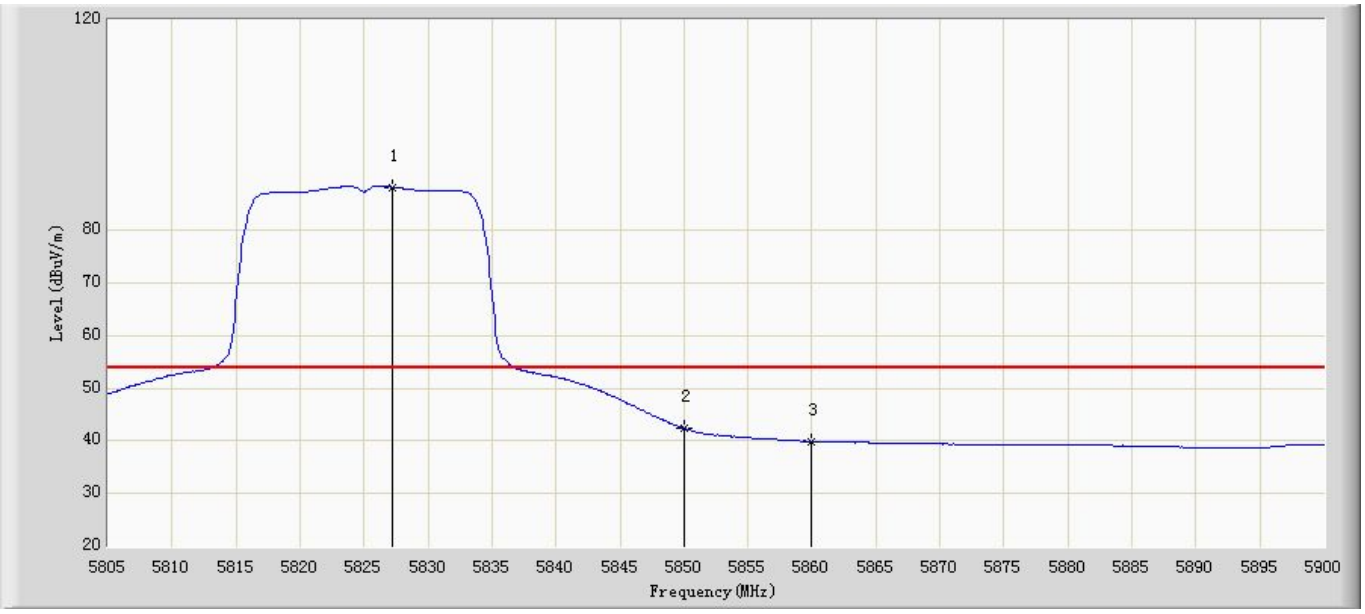

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5827.230	88.199	48.133	N/A	N/A	40.066	AV
2		5850.000	42.339	2.233	-35.861	78.2	40.106	AV
3		5860.000	39.890	-0.230	-28.31	68.2	40.120	AV

Site: AC102	Time: 2015/07/12 - 16:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5190 by 802.11n(40MHz) Ant0+1	

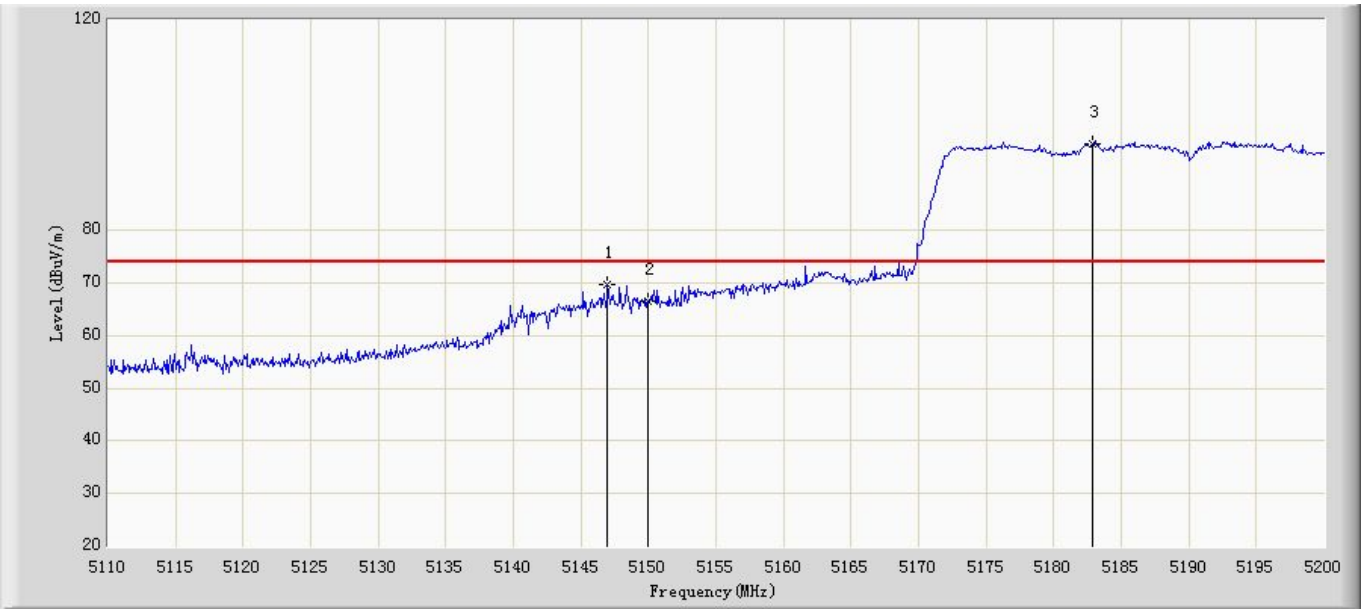

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5146.990	69.642	29.994	-4.358	74.000	39.648	PK
2		5150.000	66.469	26.822	-7.531	74.000	39.647	PK
3	*	5182.900	96.394	56.755	N/A	N/A	39.638	PK

Site: AC102	Time: 2015/07/12 - 16:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5190 by 802.11n(40MHz) Ant0+1	

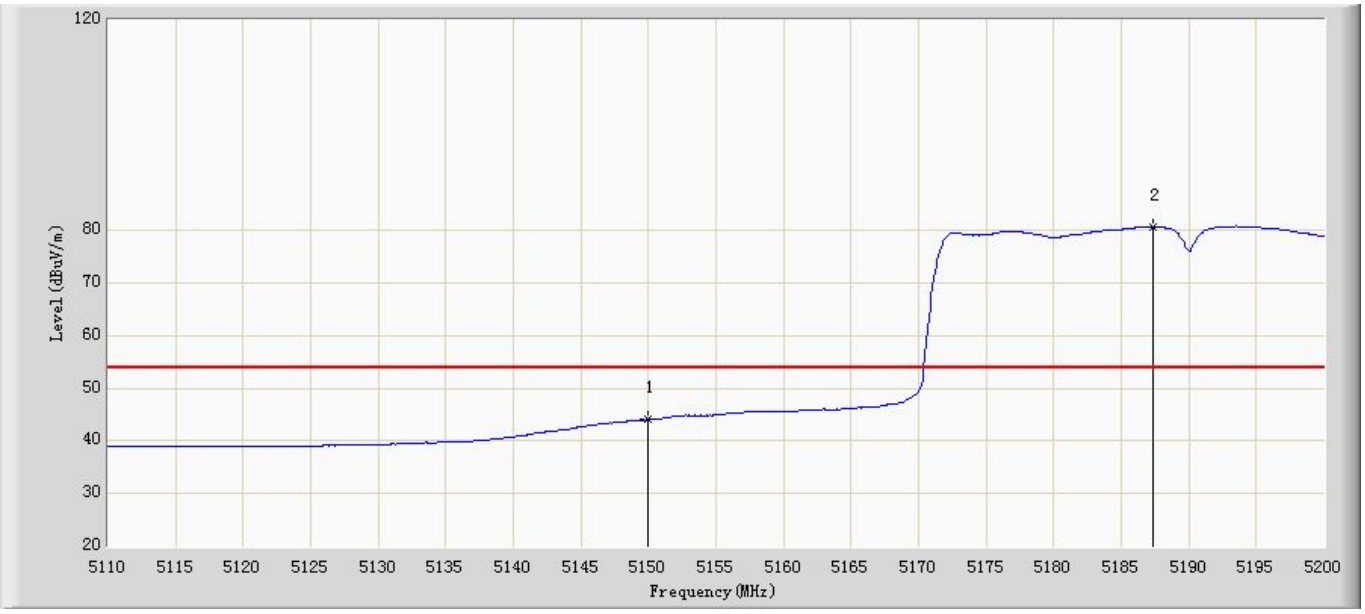

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	44.034	4.387	-9.966	54.000	39.647	AV
2	*	5187.400	80.624	40.985	N/A	N/A	39.639	AV

Site: AC102	Time: 2015/07/12 - 16:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5230 by 802.11n(40MHz) Ant0+1	

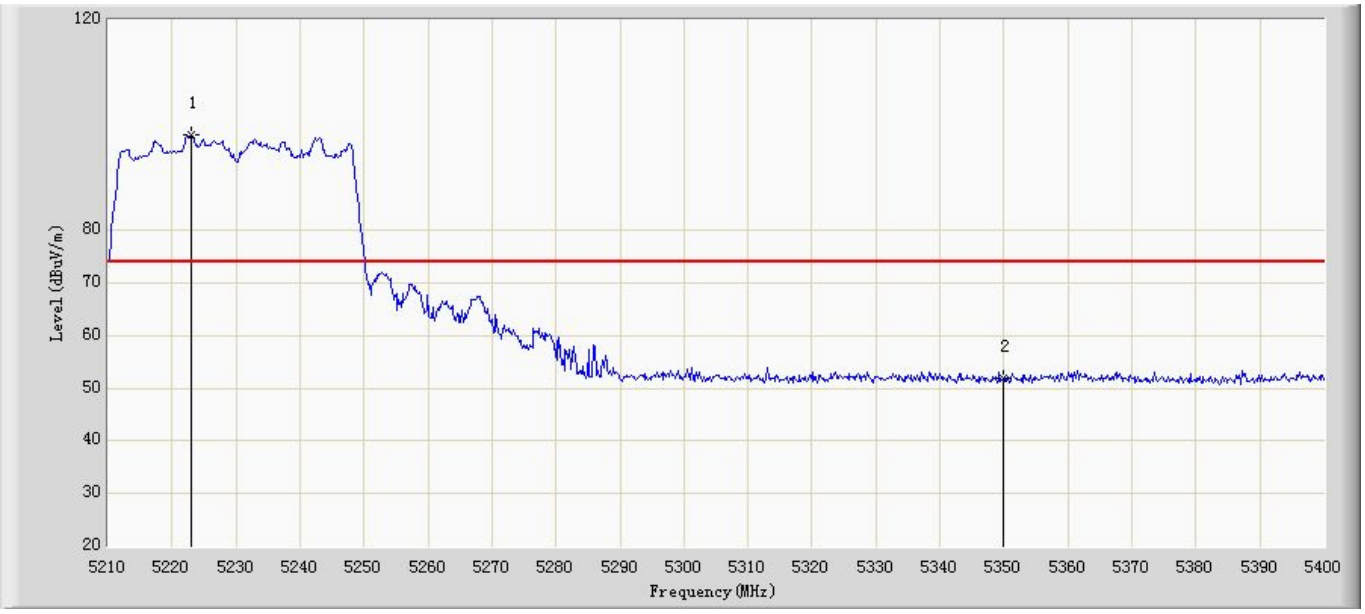

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5222.920	98.190	58.548	N/A	N/A	39.642	PK
2		5350.000	51.811	12.191	-22.189	74.000	39.620	PK

Site: AC102	Time: 2015/07/12 - 16:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5230 by 802.11n(40MHz) Ant0+1	

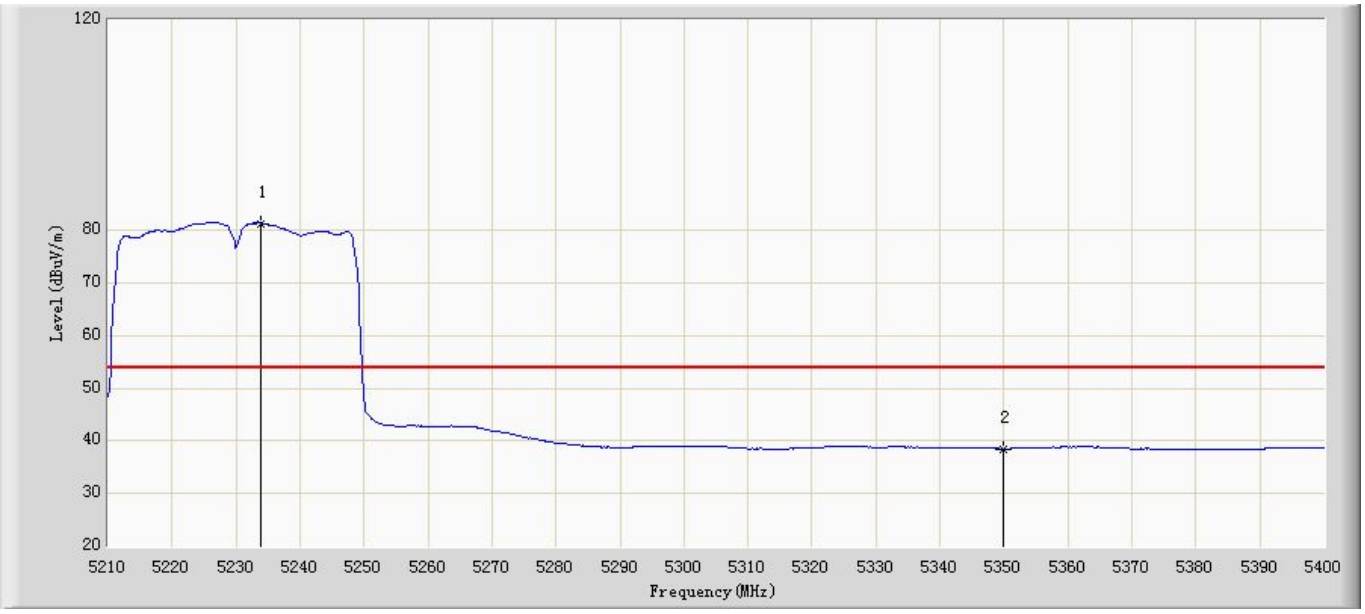

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5233.940	81.343	41.702	N/A	N/A	39.640	AV
2		5350.000	38.487	-1.133	-15.513	54.000	39.620	AV

Site: AC102	Time: 2015/07/12 - 16:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5755 by 802.11n(40MHz) Ant0+1	

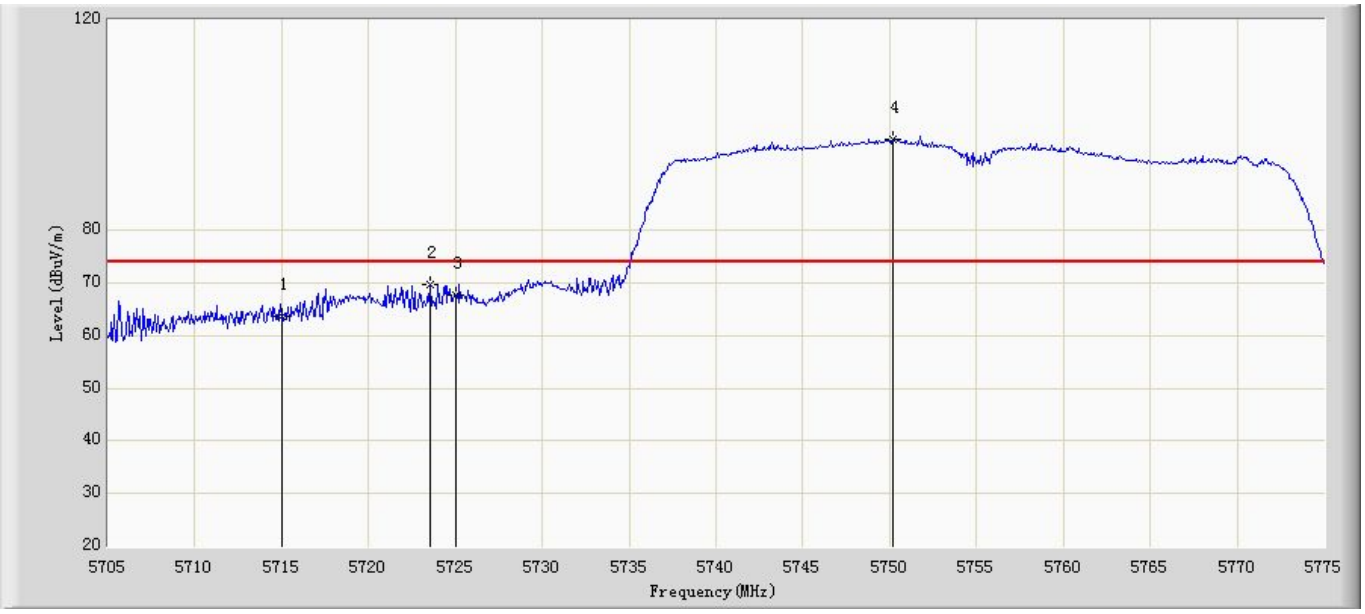

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	63.619	23.689	-4.581	68.2	39.930	PK
2		5723.550	69.784	29.843	-8.416	78.2	39.941	PK
3		5725.000	67.59	27.647	-10.61	78.2	39.943	PK
4	*	5750.150	97.314	57.344	N/A	N/A	39.970	PK

Site: AC102	Time: 2015/07/12 - 16:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5755 by 802.11n(40MHz) Ant0+1	

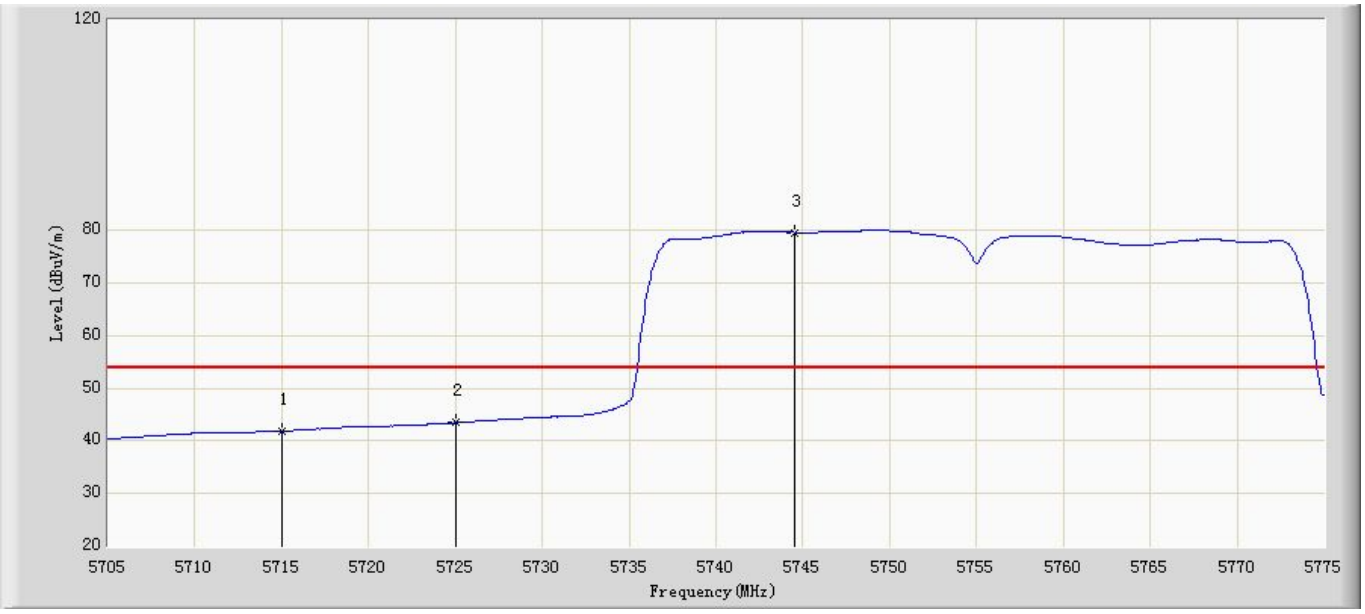

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	41.865	1.935	-26.335	68.2	39.930	AV
2		5725.000	43.463	3.52	-34.737	78.2	39.943	AV
3	*	5744.550	79.625	39.662	N/A	N/A	39.963	AV

Site: AC102	Time: 2015/07/12 - 16:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5795 by 802.11n(40MHz) Ant0+1	

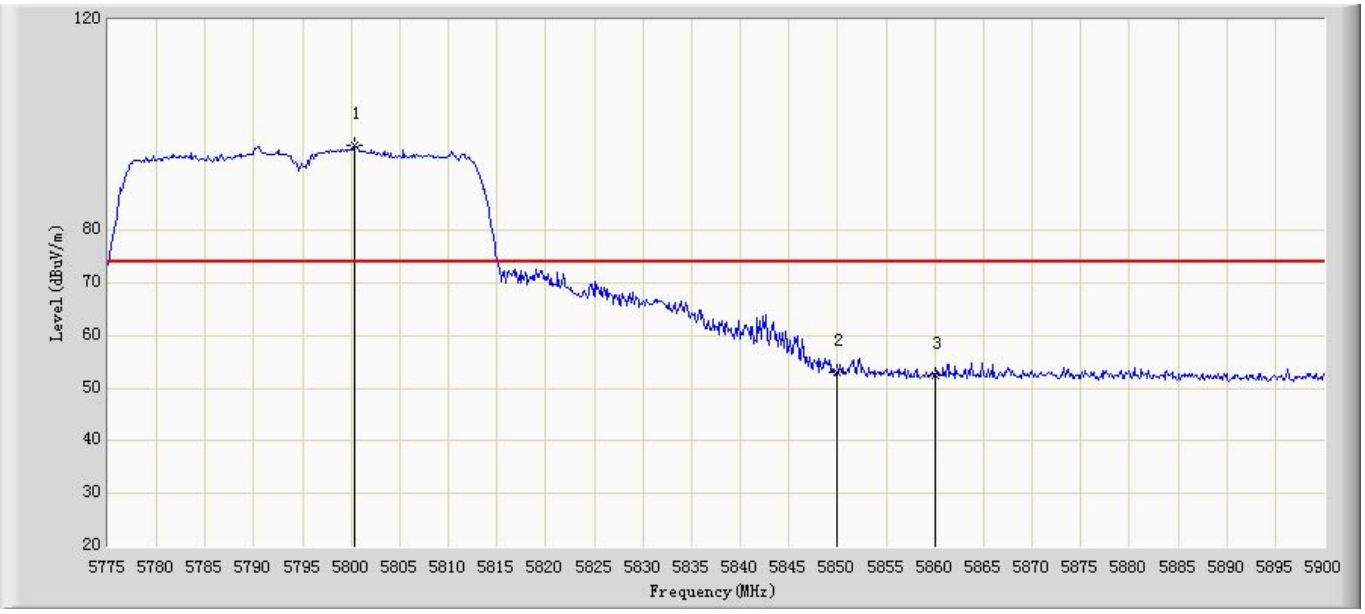

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5800.375	96.006	55.972	N/A	N/A	40.034	PK
2		5850.000	53	12.894	-25.2	78.2	40.106	PK
3		5860.000	52.548	12.428	-15.652	68.2	40.120	PK

Site: AC102	Time: 2015/07/12 - 16:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5795 by 802.11n(40MHz) Ant0+1	

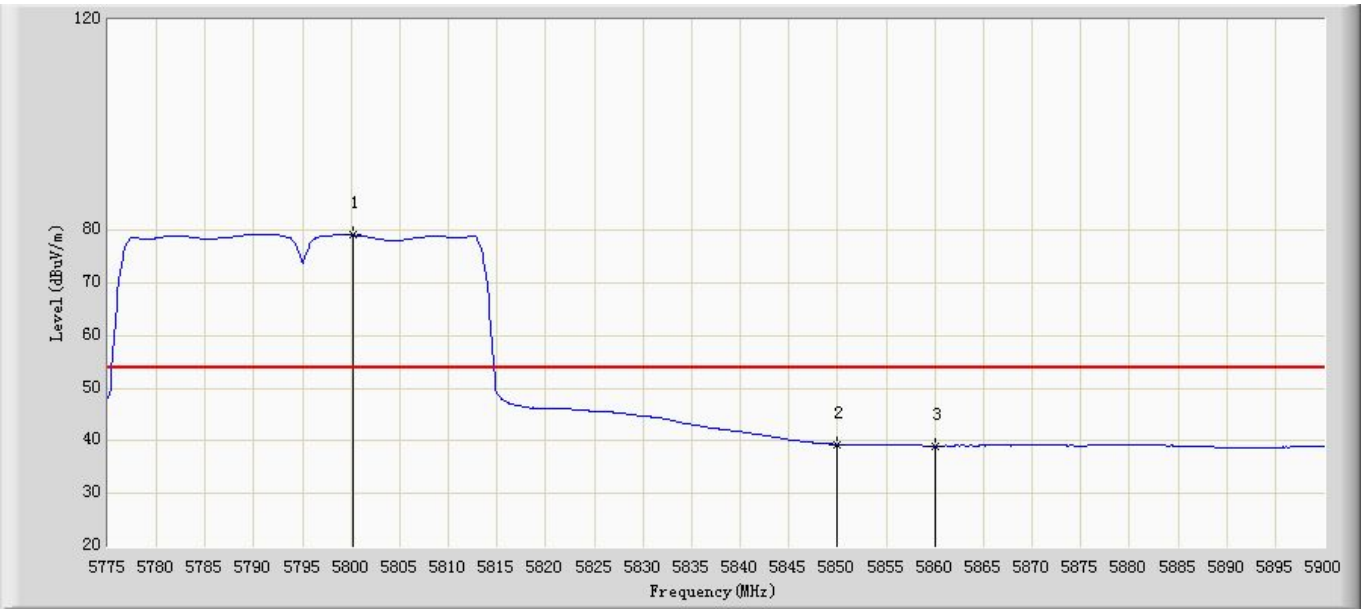

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5800.250	79.147	39.113	N/A	N/A	40.034	AV
2		5850.000	39.393	-0.713	-38.807	78.2	40.106	AV
3		5860.000	39.065	-1.055	-29.135	68.2	40.120	AV

Site: AC102	Time: 2015/07/12 - 16:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5190 by 802.11ac(40MHz) Ant0+1	

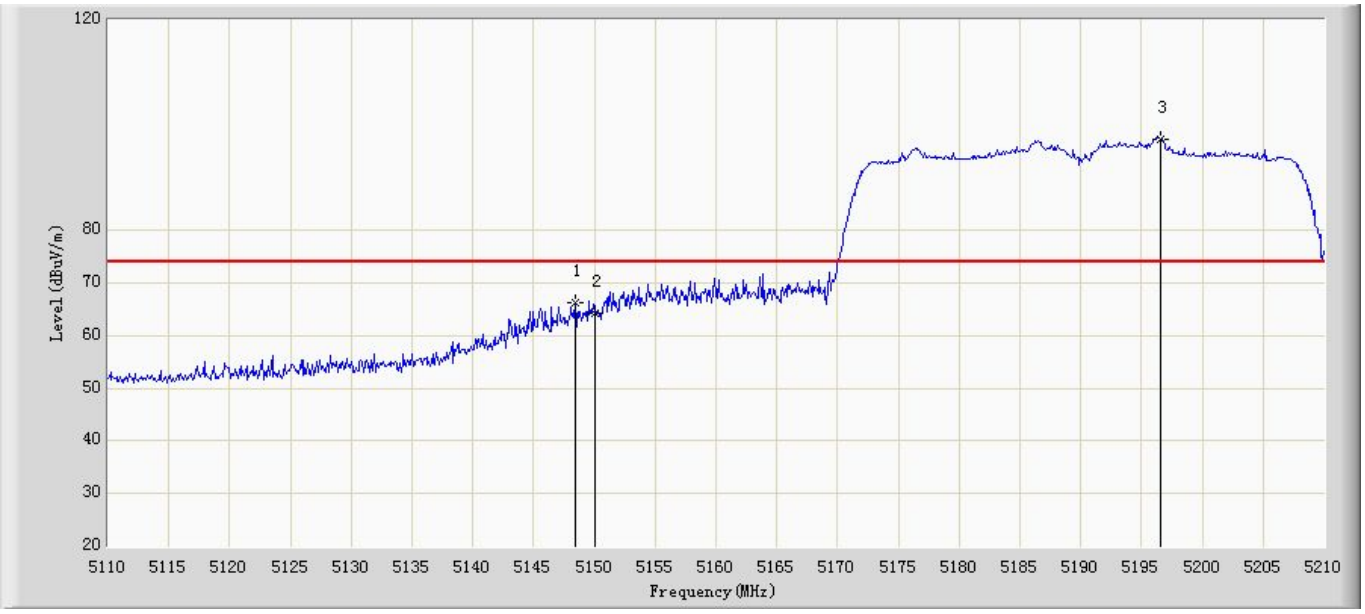

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5148.400	66.178	26.530	-7.822	74.000	39.648	PK
2		5150.000	64.171	24.524	-9.829	74.000	39.647	PK
3	*	5196.600	97.393	57.753	N/A	N/A	39.640	PK

Site: AC102	Time: 2015/07/12 - 16:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5190 by 802.11ac(40MHz) Ant0+1	

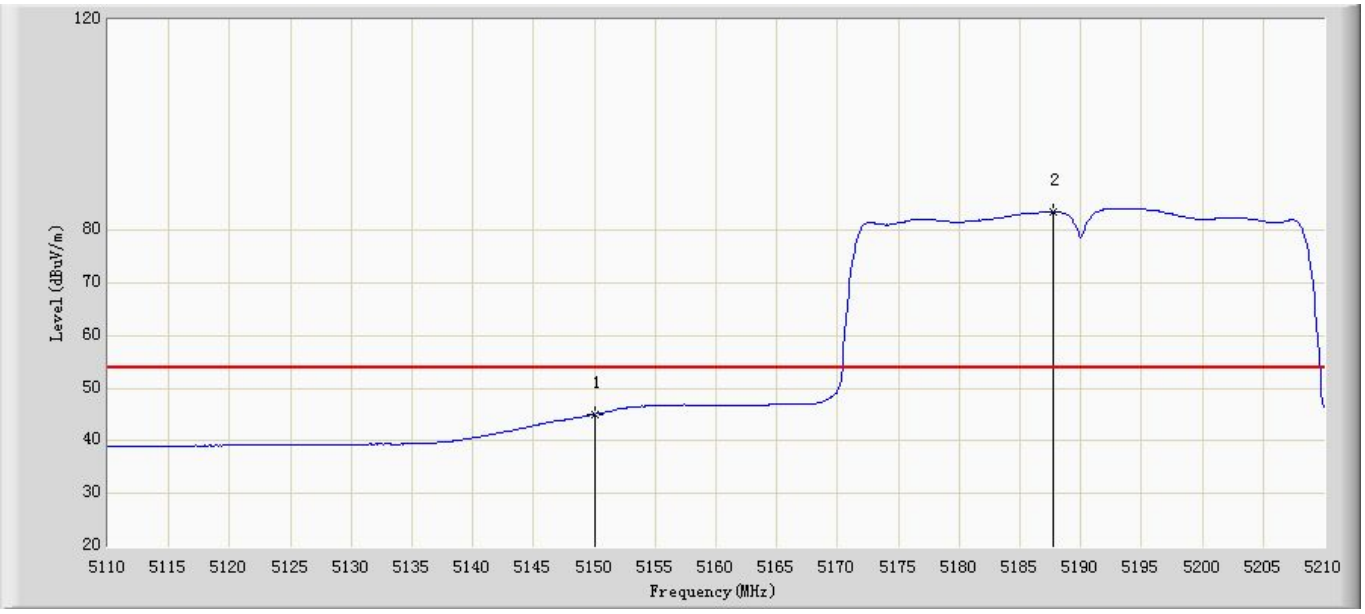

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	45.019	5.372	-8.981	54.000	39.647	AV
2	*	5187.700	83.569	43.930	N/A	N/A	39.639	AV

Site: AC102	Time: 2015/07/12 - 16:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5230 by 802.11ac(40MHz) Ant0+1	

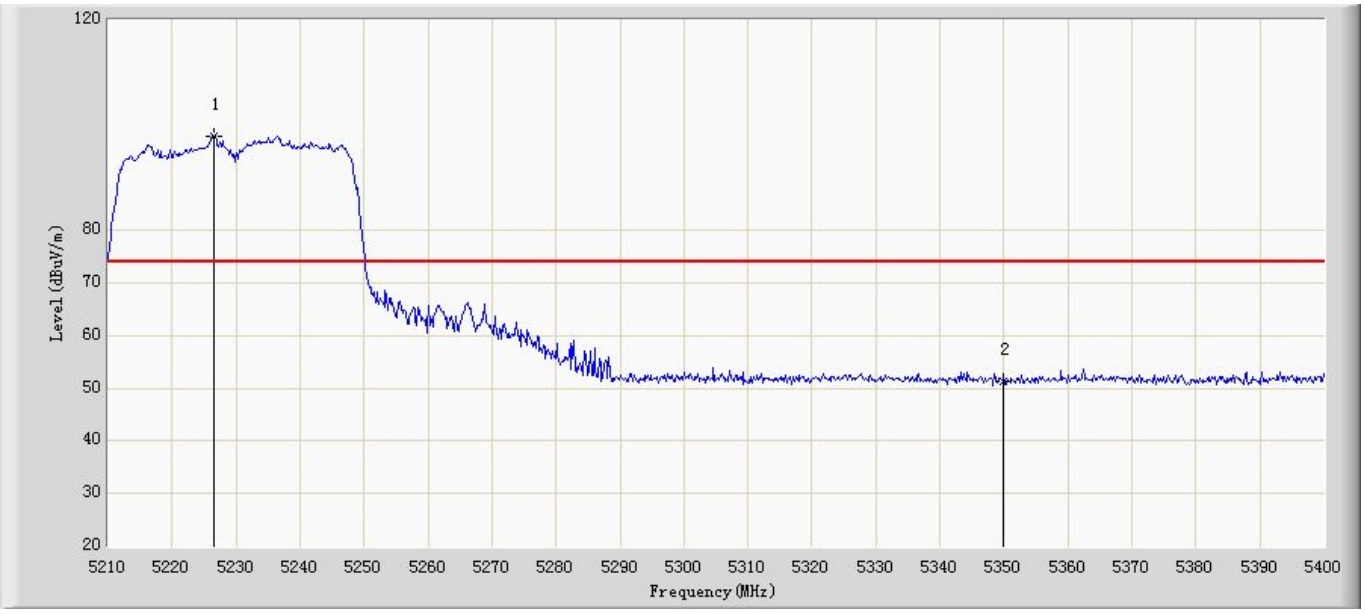

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5226.530	97.984	58.343	N/A	N/A	39.641	PK
2		5350.000	51.443	11.823	-22.557	74.000	39.620	PK

Site: AC102	Time: 2015/07/12 - 16:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5230 by 802.11ac(40MHz) Ant0+1	

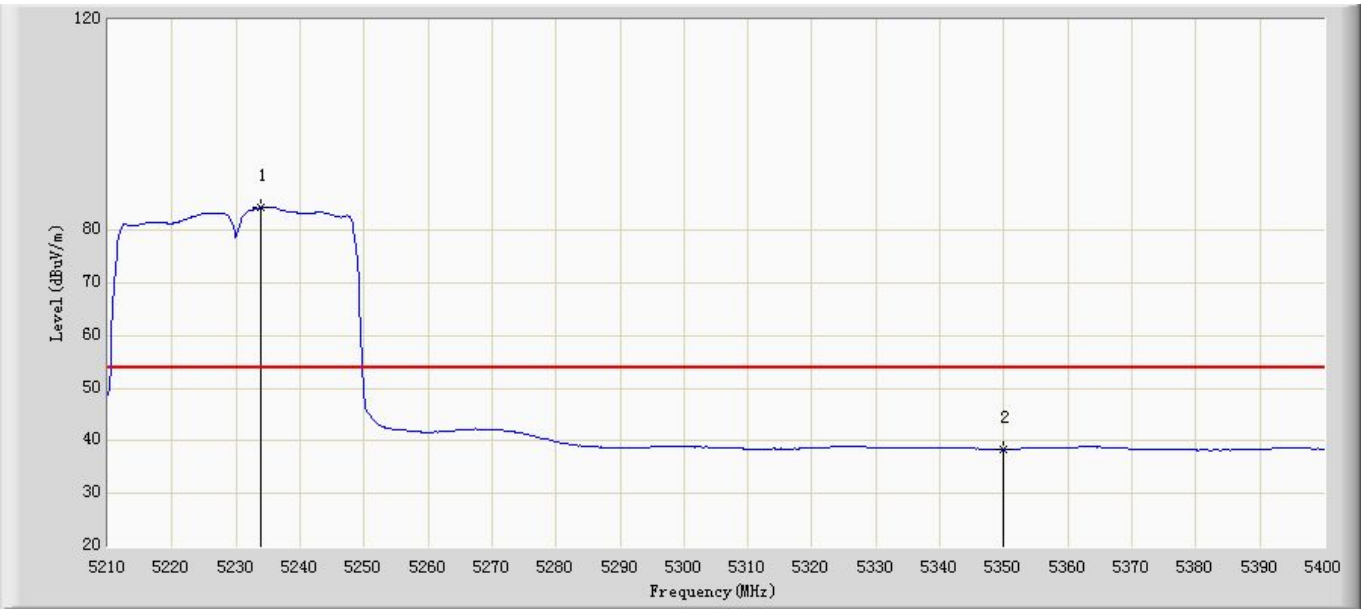

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5233.940	84.307	44.666	N/A	N/A	39.640	AV
2		5350.000	38.369	-1.251	-15.631	54.000	39.620	AV

Site: AC102	Time: 2015/07/12 - 16:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5755 by 802.11ac(40MHz) Ant0+1	

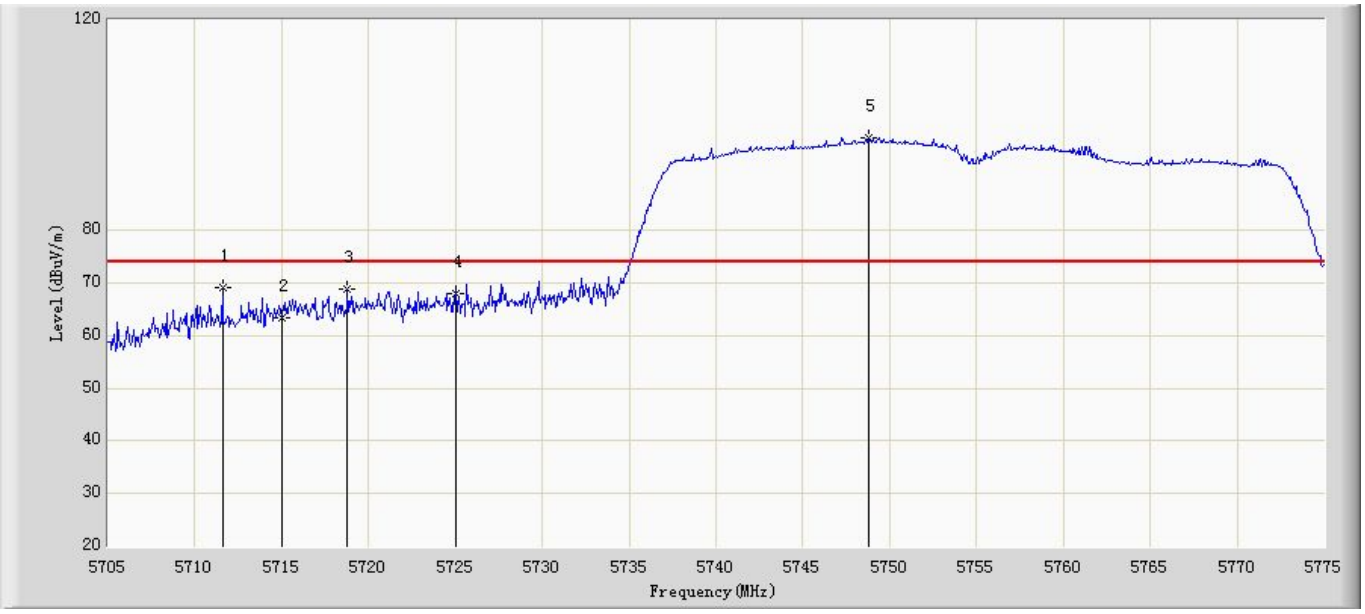

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5711.580	67.281	27.355	-0.919	68.2	39.926	PK
2		5715.000	63.502	23.572	-4.698	68.2	39.930	PK
3		5718.790	68.848	28.913	-9.352	78.2	39.935	PK
4		5725.000	67.998	28.055	-10.202	78.2	39.943	PK
5	*	5748.750	97.702	57.734	N/A	N/A	39.968	PK

Site: AC102	Time: 2015/07/12 - 16:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5755 by 802.11ac(40MHz) Ant0+1	

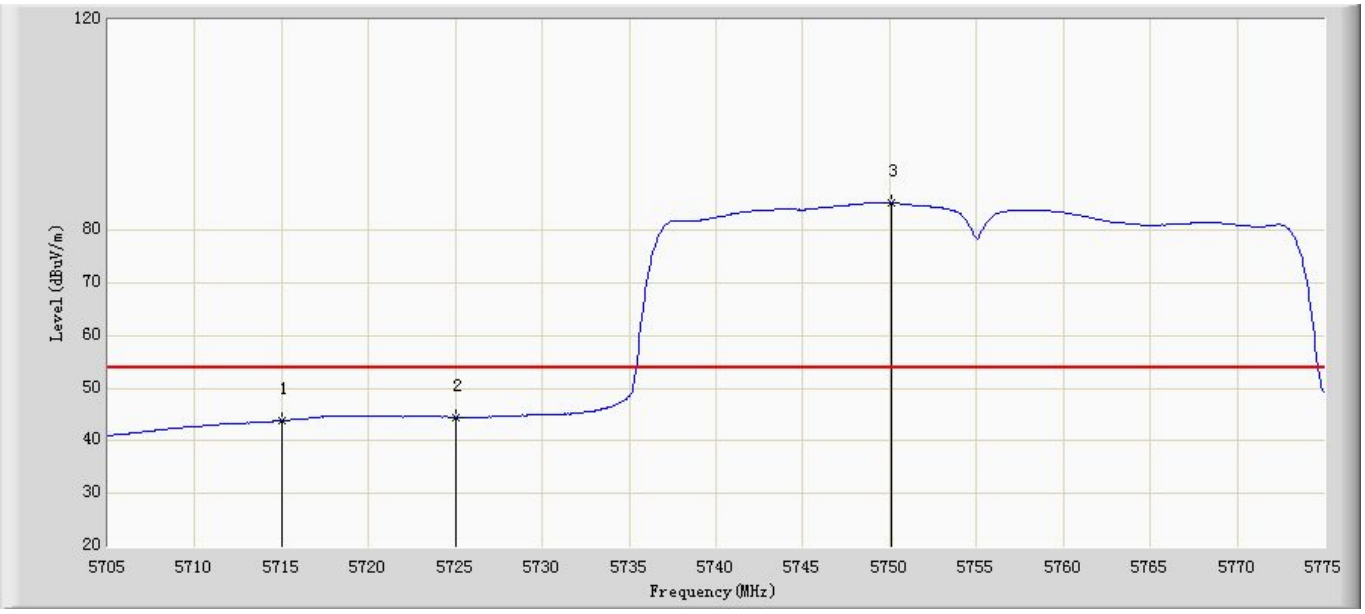

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	43.875	3.945	-24.325	68.2	39.930	AV
2		5725.000	44.535	4.592	-33.665	78.2	39.943	AV
3	*	5750.080	85.209	45.240	N/A	N/A	39.970	AV

Site: AC102	Time: 2015/07/12 - 16:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5795 by 802.11ac(40MHz) Ant0+1	

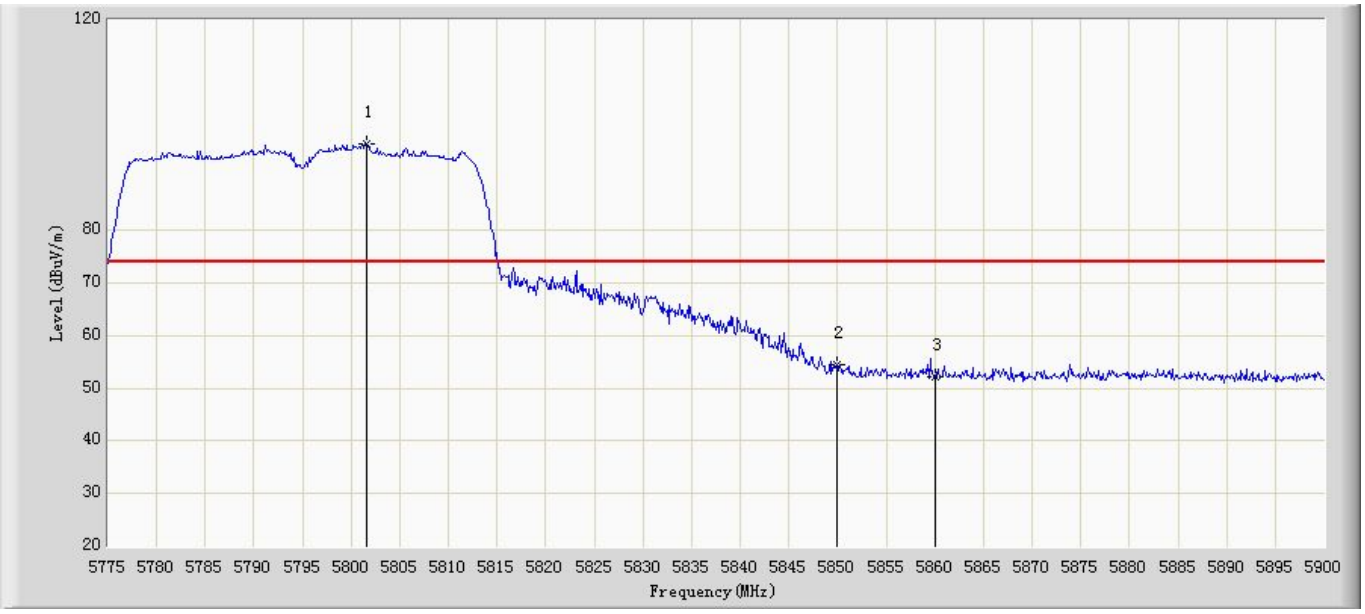

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5801.625	96.353	56.318	N/A	N/A	40.035	PK
2		5850.000	54.536	14.43	-23.664	78.2	40.106	PK
3		5860.000	52.08	11.96	-16.12	68.2	40.120	PK

Site: AC102	Time: 2015/07/12 - 16:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5795 by 802.11ac(40MHz) Ant0+1	

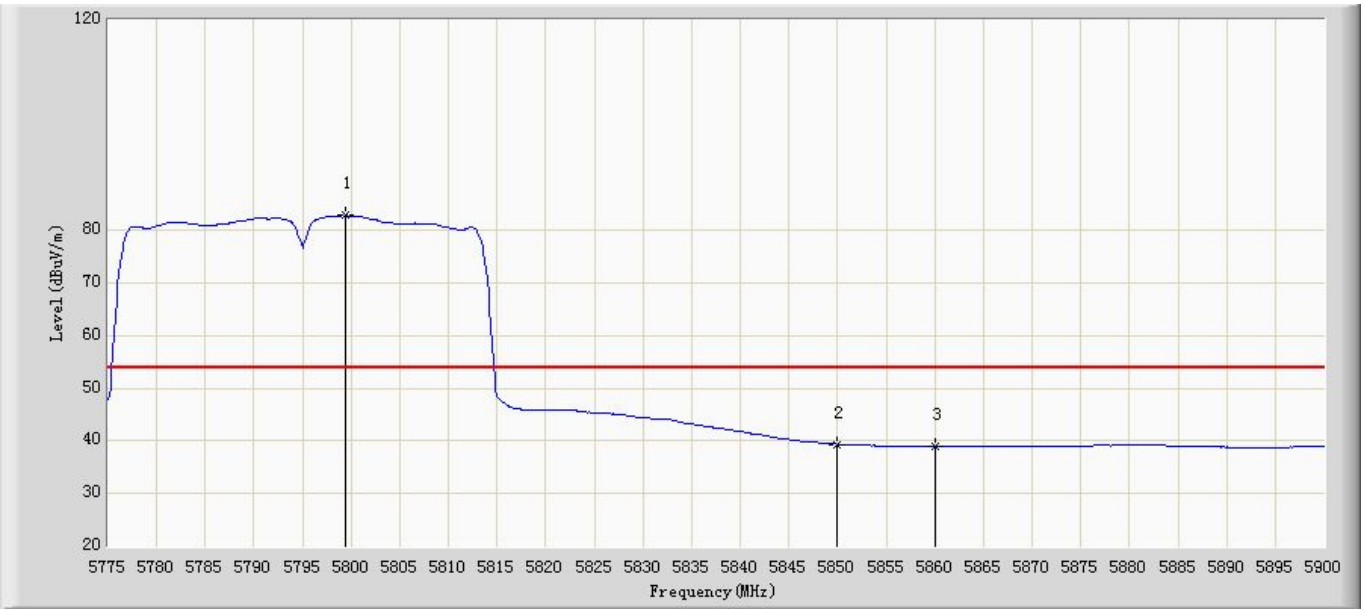

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5799.375	82.792	42.759	N/A	N/A	40.033	AV
2		5850.000	39.386	-0.720	-38.814	78.2	40.106	AV
3		5860.000	39.005	-1.115	-29.195	68.2	40.120	AV

Site: AC102	Time: 2015/07/12 - 16:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5210 by 802.11ac(80MHz) Ant0+1	

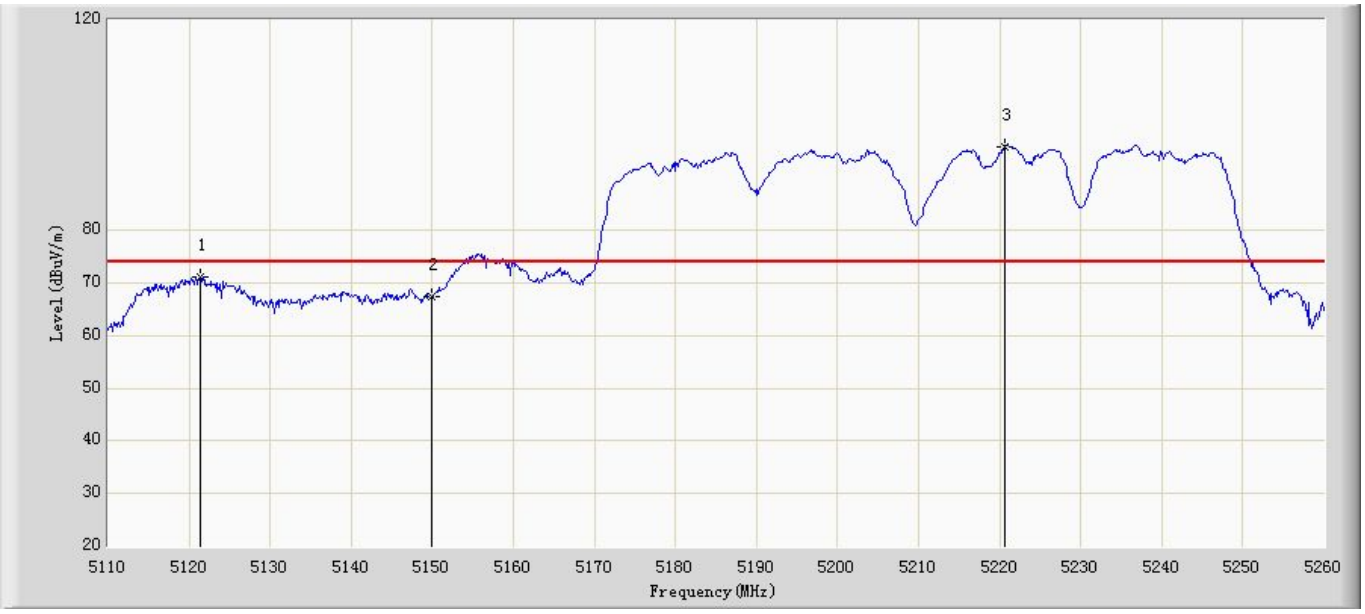

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5121.400	71.164	31.510	-2.836	74.000	39.654	PK
2		5150.000	67.373	27.726	-6.627	74.000	39.647	PK
3	*	5220.550	95.860	56.218	N/A	N/A	39.642	PK

Site: AC102	Time: 2015/07/12 - 16:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5210 by 802.11ac(80MHz) Ant0+1	

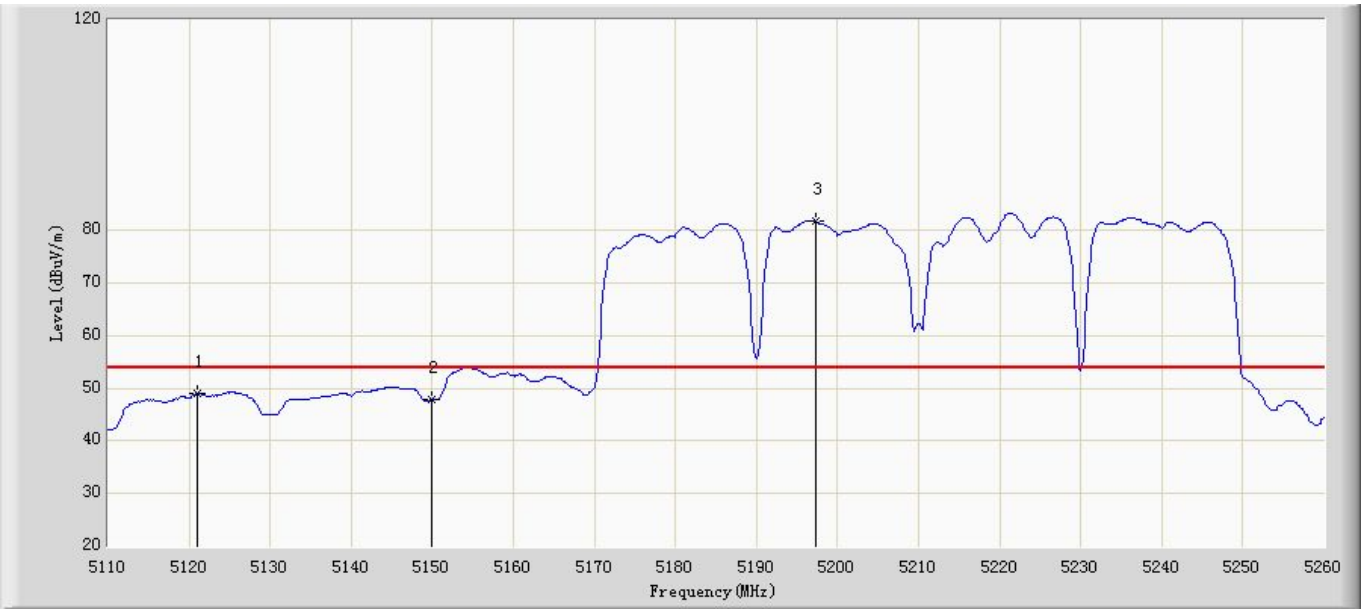

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5120.950	49.047	9.393	-4.953	54.000	39.654	AV
2		5150.000	47.847	8.200	-6.153	54.000	39.647	AV
3	*	5197.300	81.656	42.016	N/A	N/A	39.639	AV

Site: AC102	Time: 2015/07/12 - 17:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5775 by 802.11ac(80MHz) Ant0+1	

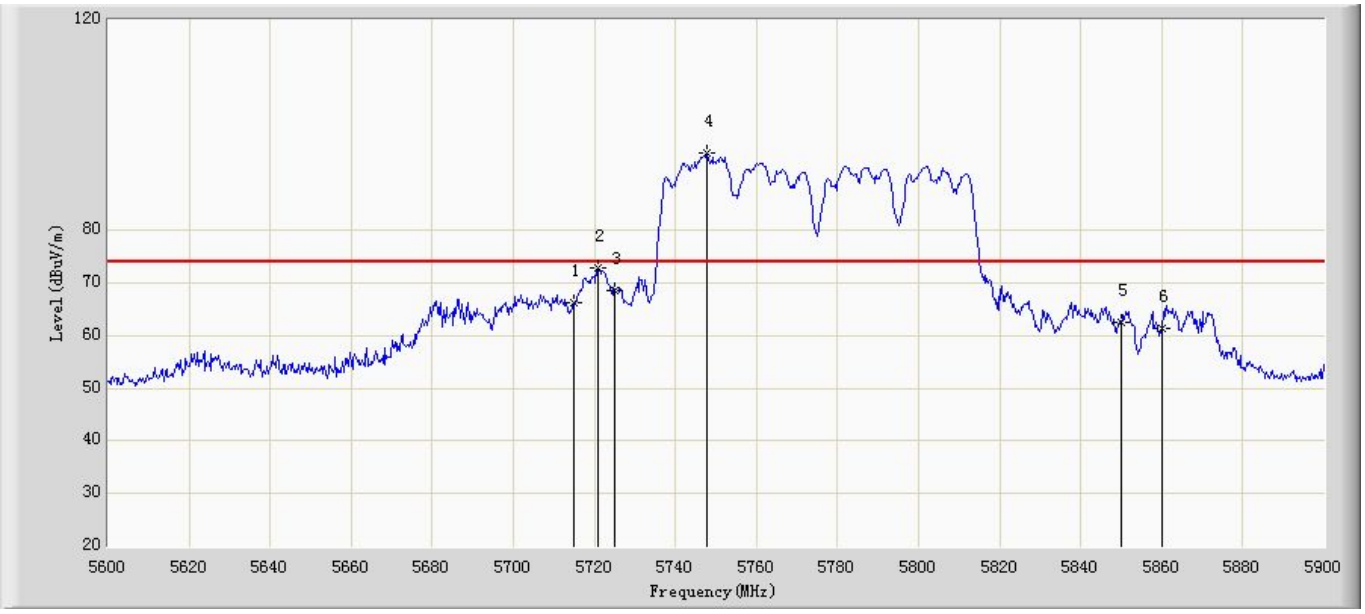

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	66.291	26.361	-1.909	68.2	39.930	PK
2		5720.900	72.794	32.856	-5.406	78.2	39.938	PK
3		5725.000	68.489	28.546	-9.711	78.2	39.943	PK
4	*	5747.600	94.774	54.807	N/A	N/A	39.967	PK
5		5850.000	62.652	22.546	-15.548	78.2	40.106	PK
6		5860.000	61.25	21.13	-6.95	68.2	40.120	PK

Site: AC102	Time: 2015/07/12 - 17:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Vertical
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5775 by 802.11ac(80MHz) Ant0+1	

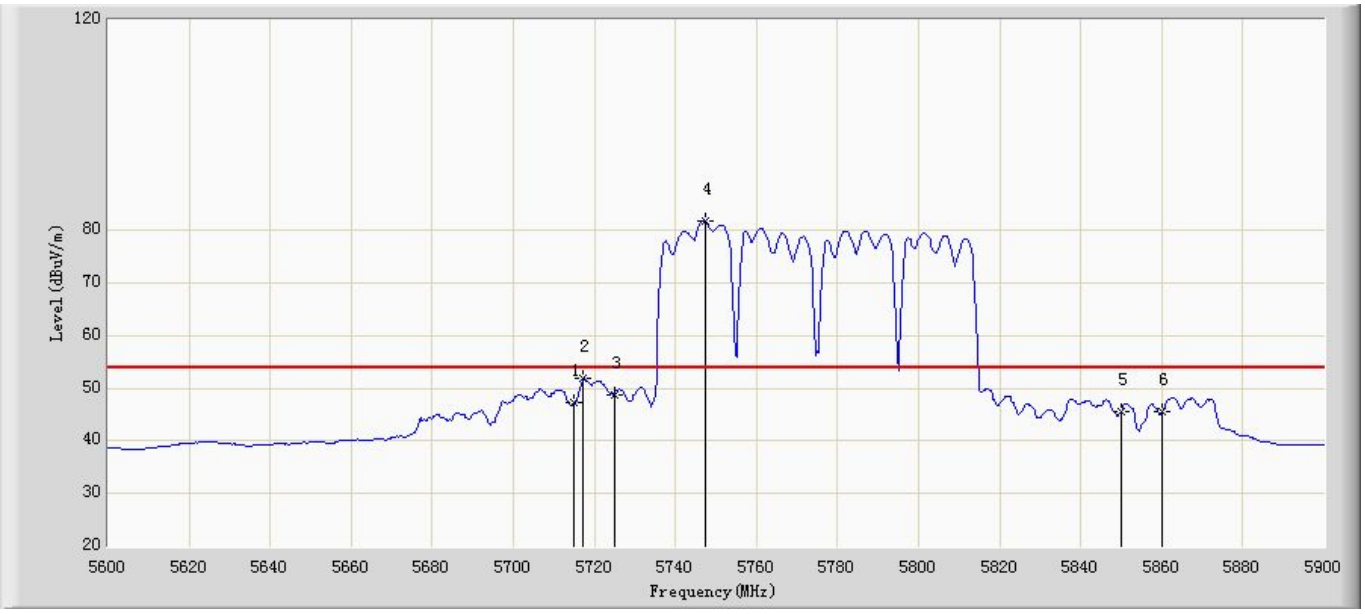

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	47.219	7.289	-20.981	68.2	39.930	AV
2		5717.300	52.03	12.097	-26.17	78.2	39.933	AV
3		5725.000	48.869	8.926	-29.331	78.2	39.943	AV
4	*	5747.300	81.723	41.757	N/A	N/A	39.967	AV
5		5850.000	45.566	5.460	-32.634	78.2	40.106	AV
6		5860.000	45.454	5.334	-22.746	68.2	40.120	AV

Site: AC102	Time: 2015/07/12 - 17:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode1:TX at channel 5180 by 802.11a Ant0	

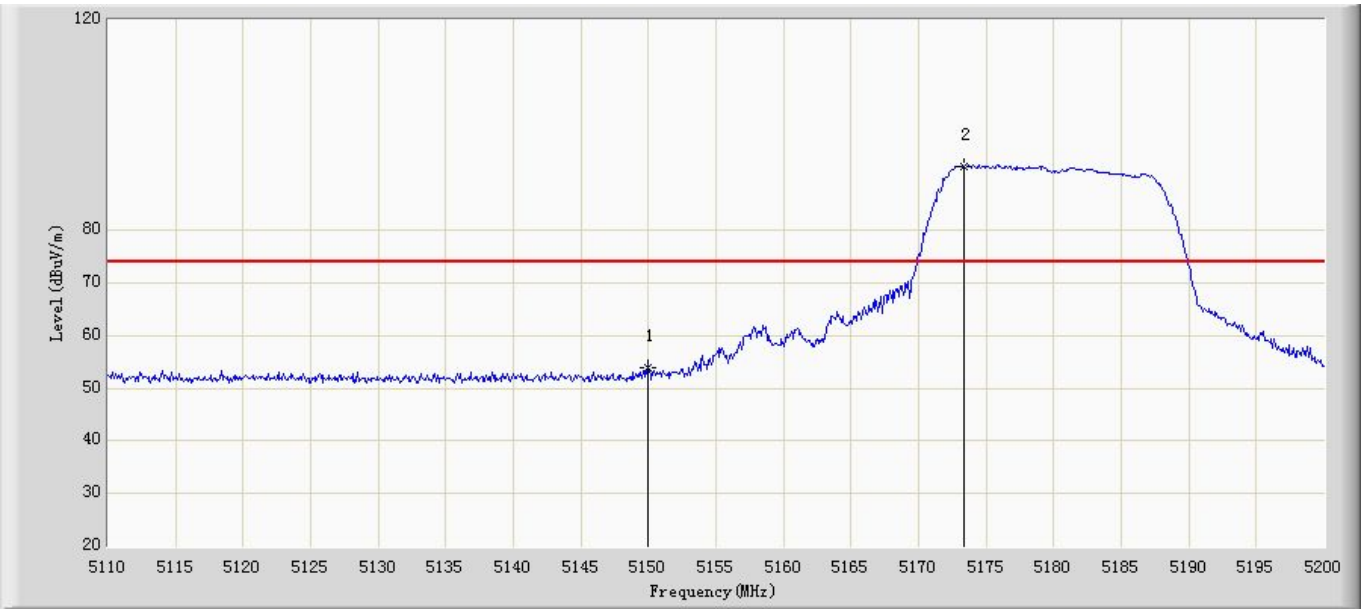

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	53.977	14.330	-20.023	74.000	39.647	PK
2	*	5173.360	92.261	52.621	N/A	N/A	39.640	PK

Site: AC102	Time: 2015/07/12 - 17:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode1:TX at channel 5180 by 802.11a Ant0	

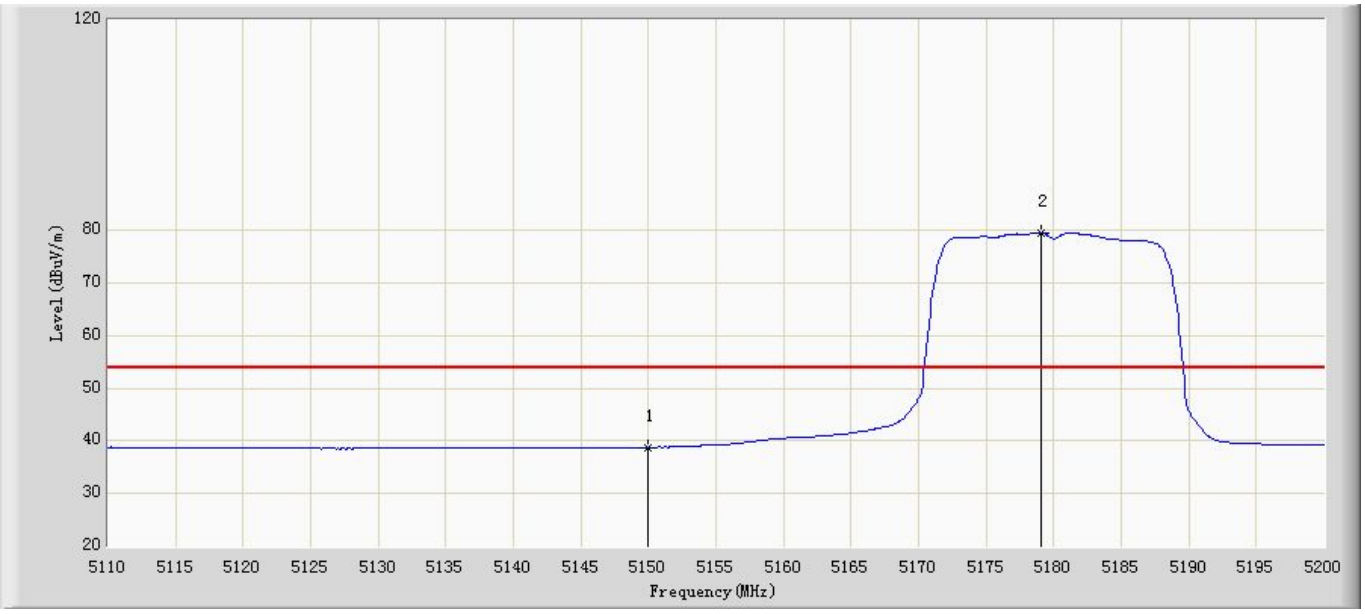

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	38.786	-0.861	-15.214	54.000	39.647	AV
2	*	5179.030	79.515	39.876	N/A	N/A	39.639	AV

Site: AC102	Time: 2015/07/12 - 17:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode1:TX at channel 5240 by 802.11a Ant0	

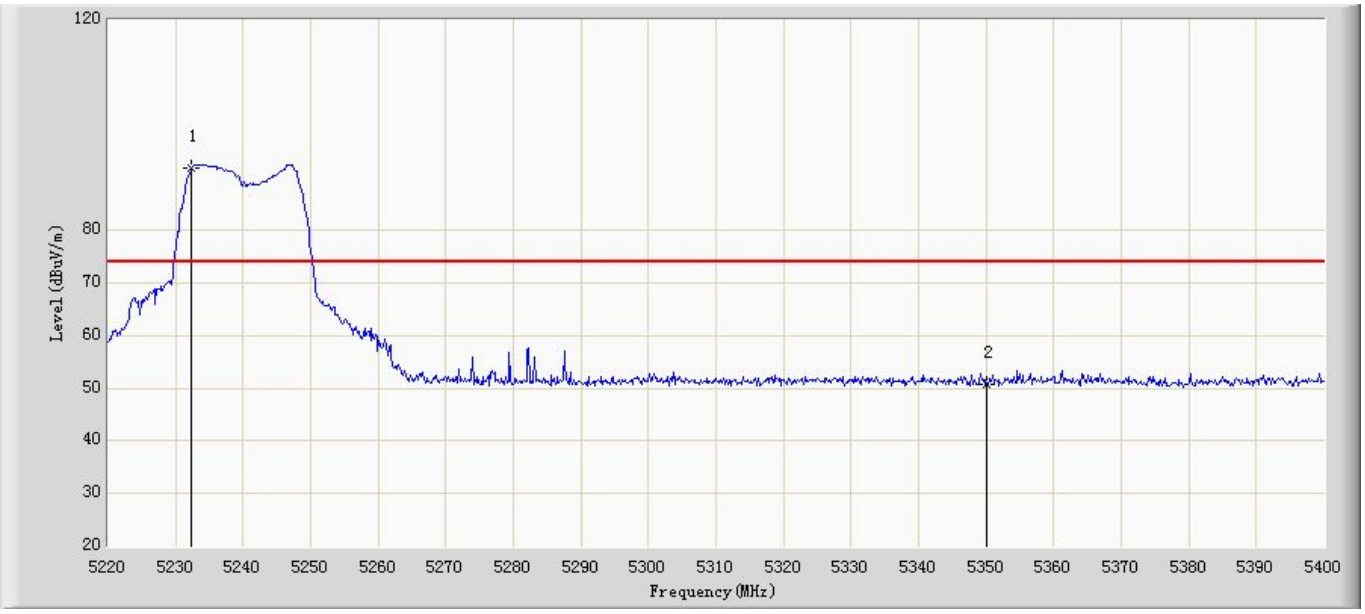

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5232.420	91.937	52.296	N/A	N/A	39.641	PK
2		5350.000	50.654	11.034	-23.346	74.000	39.620	PK

Site: AC102	Time: 2015/07/12 - 17:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode1:TX at channel 5240 by 802.11a Ant0	

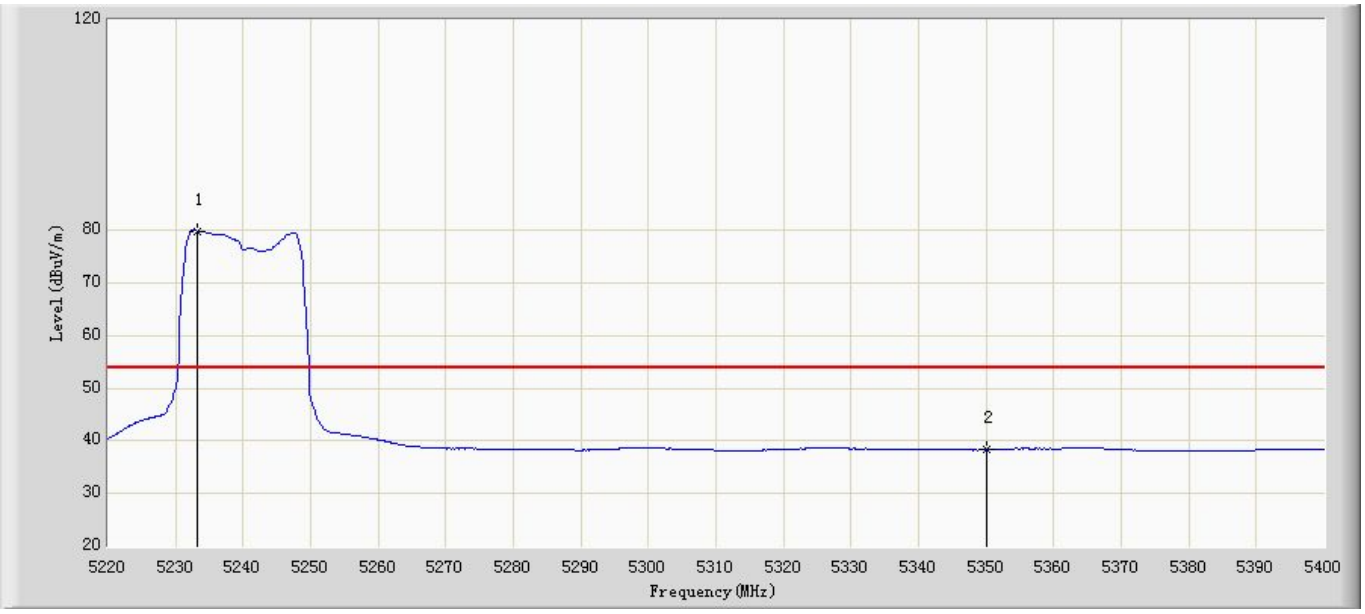

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5233.140	79.903	40.262	N/A	N/A	39.641	AV
2		5350.000	38.285	-1.335	-15.715	54.000	39.620	AV

Site: AC102	Time: 2015/07/12 - 17:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode1:TX at channel 5745 by 802.11a Ant0	

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	53.446	13.516	-14.754	68.2	39.930	PK
2		5725.000	62.169	22.226	-16.031	78.2	39.943	PK
3	*	5744.200	93.847	53.884	N/A	N/A	39.963	PK

Site: AC102	Time: 2015/07/12 - 17:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode1:TX at channel 5745 by 802.11a Ant0	

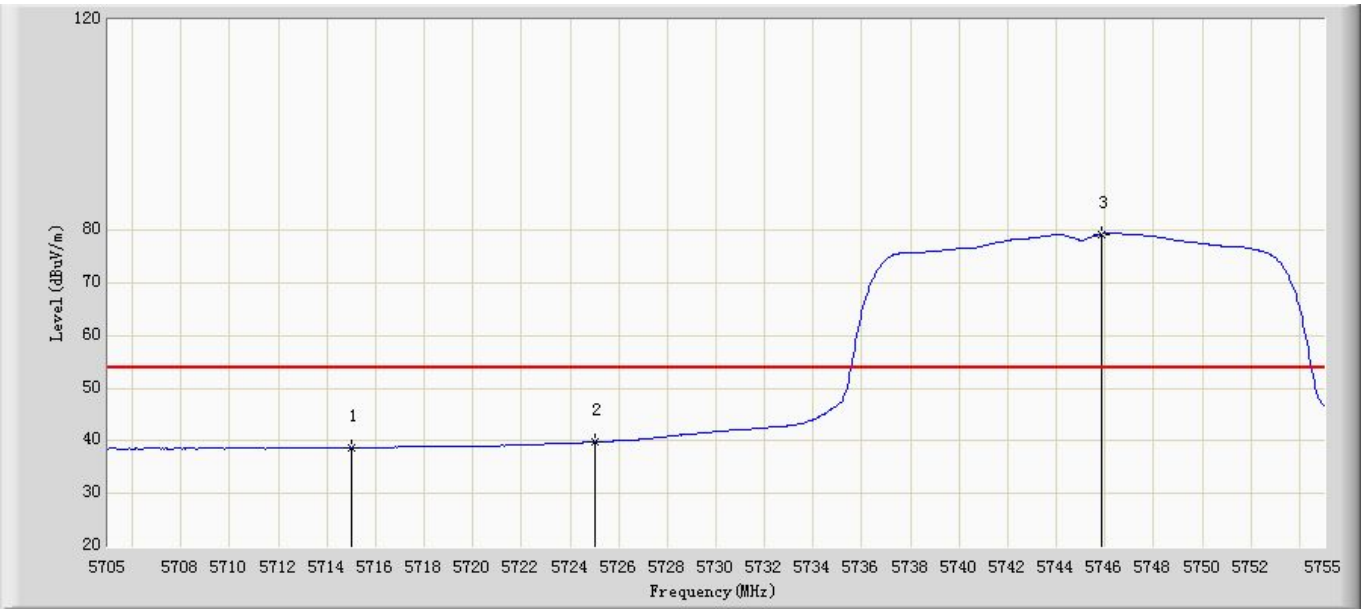

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	38.708	-1.222	-29.492	68.2	39.930	AV
2		5725.000	39.793	-0.15	-38.407	78.2	39.943	AV
3	*	5745.850	79.295	39.330	N/A	N/A	39.964	AV

Site: AC102	Time: 2015/07/12 - 17:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode1:TX at channel 5825 by 802.11a Ant0	

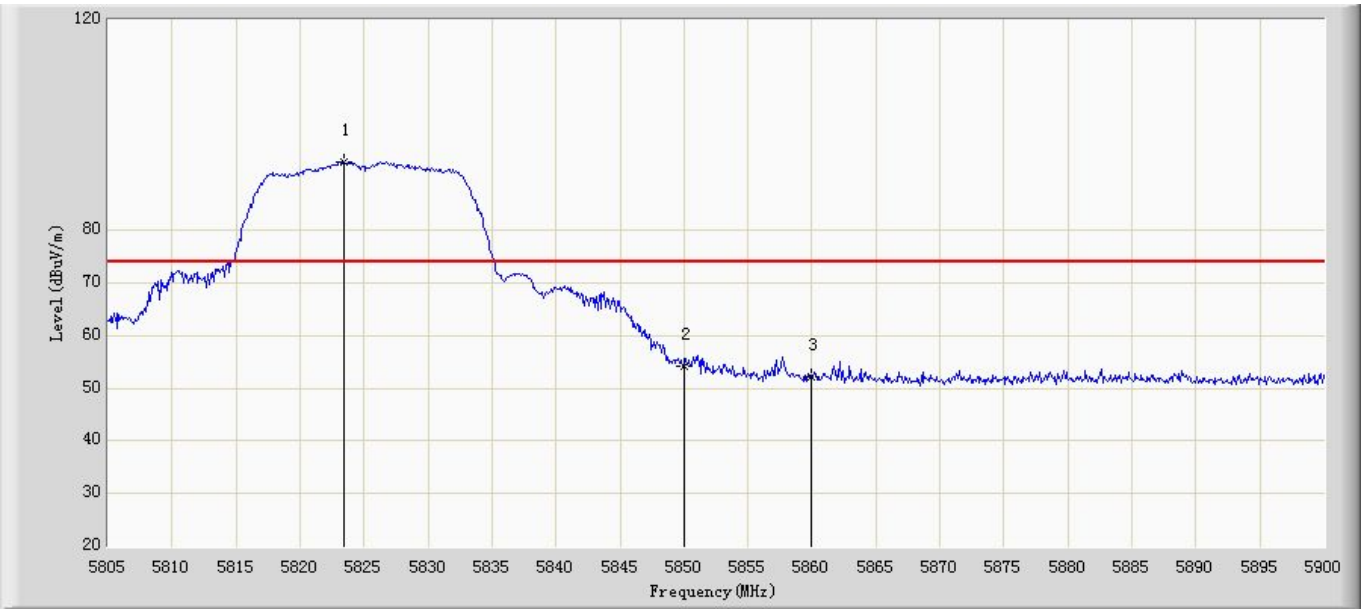

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5823.430	93.084	53.023	N/A	N/A	40.062	PK
2		5850.000	54.135	14.029	-24.065	78.2	40.106	PK
3		5860.000	52.086	11.966	-16.114	68.2	40.120	PK

Site: AC102	Time: 2015/07/12 - 17:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode1:TX at channel 5825 by 802.11a Ant0	

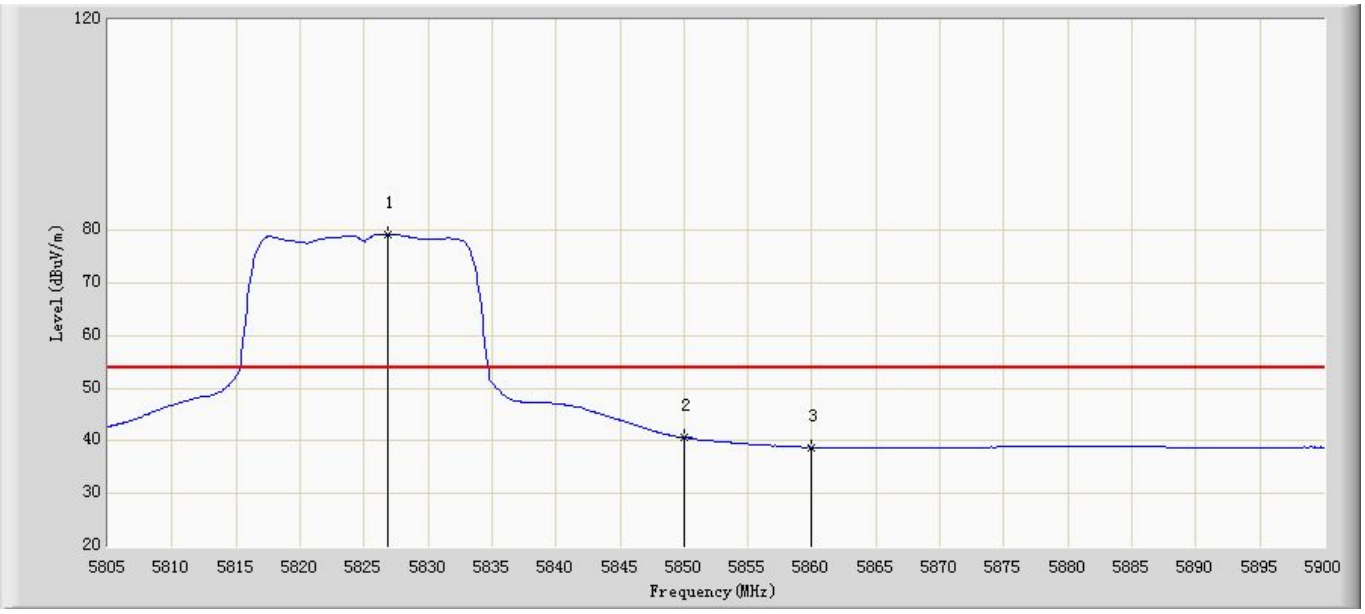

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5826.850	79.218	39.152	N/A	N/A	40.066	AV
2		5850.000	40.585	0.479	-37.615	78.2	40.106	AV
3		5860.000	38.764	-1.356	-29.436	68.2	40.120	AV

Site: AC102	Time: 2015/07/12 - 17:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5180 by 802.11n(20MHz) Ant0	

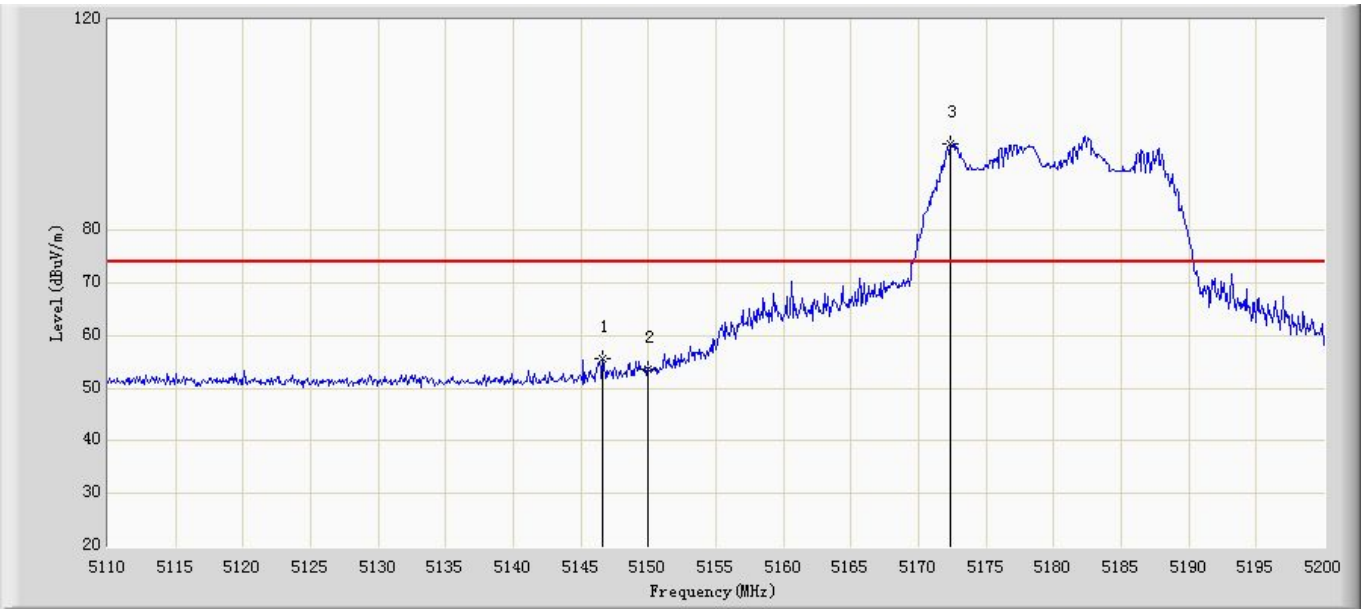

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5146.630	55.692	16.044	-18.308	74.000	39.648	PK
2		5150.000	53.706	14.059	-20.294	74.000	39.647	PK
3	*	5172.370	96.440	56.800	N/A	N/A	39.640	PK

Site: AC102	Time: 2015/07/12 - 17:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5180 by 802.11n(20MHz) Ant0	

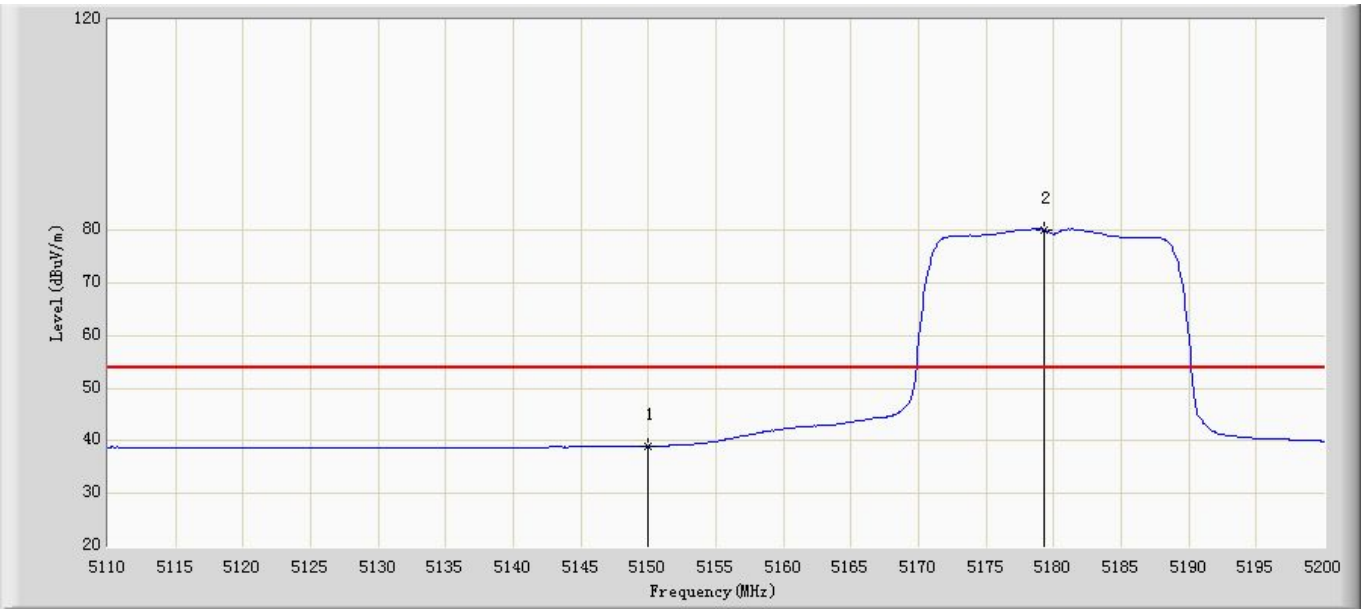

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	38.945	-0.702	-15.055	54.000	39.647	AV
2	*	5179.300	80.097	40.458	N/A	N/A	39.639	AV

Site: AC102	Time: 2015/07/12 - 17:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5240 by 802.11n(20MHz) Ant0	

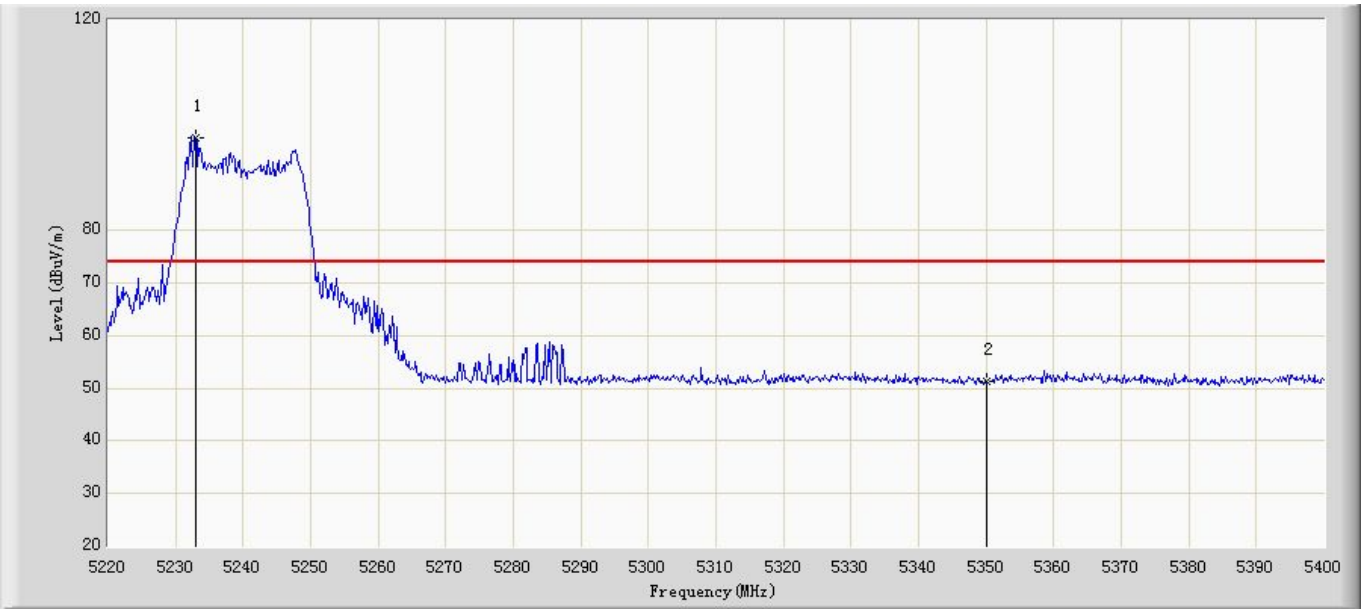

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5232.960	97.550	57.909	N/A	N/A	39.641	PK
2		5350.000	51.183	11.563	-22.817	74.000	39.620	PK

Site: AC102	Time: 2015/07/12 - 17:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5240 by 802.11n(20MHz) Ant0	

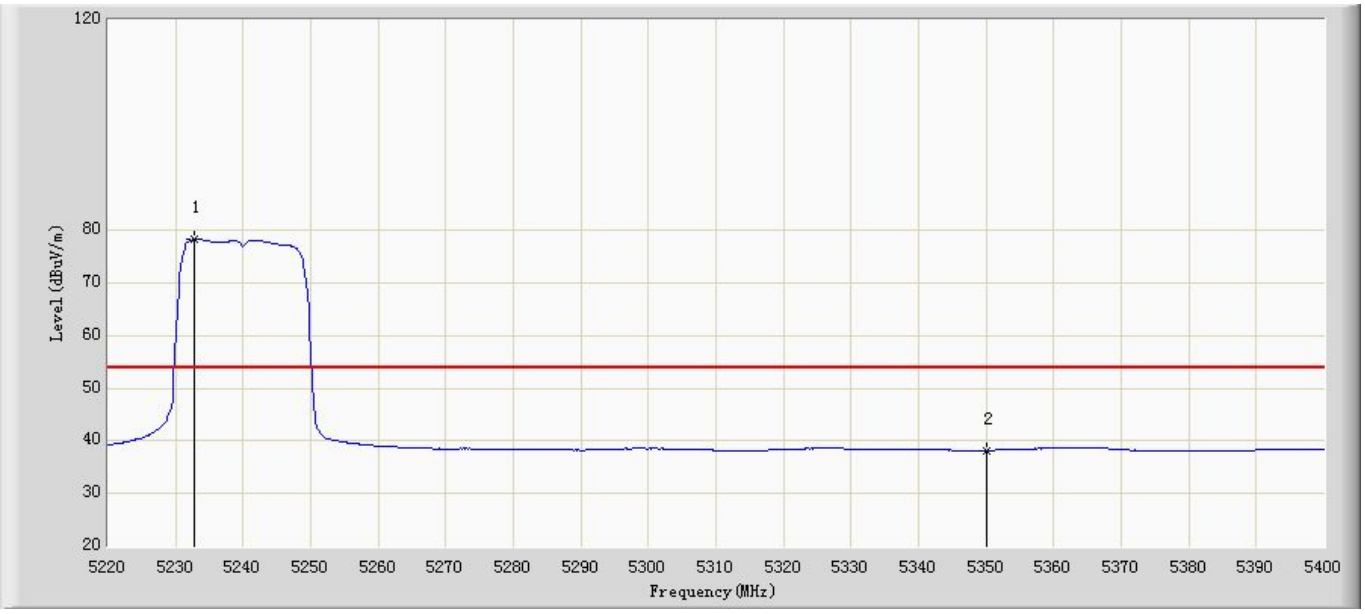

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5232.780	78.280	38.639	N/A	N/A	39.641	AV
2		5350.000	38.193	-1.427	-15.807	54.000	39.620	AV

Site: AC102	Time: 2015/07/12 - 17:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5745 by 802.11n(20MHz) Ant0	

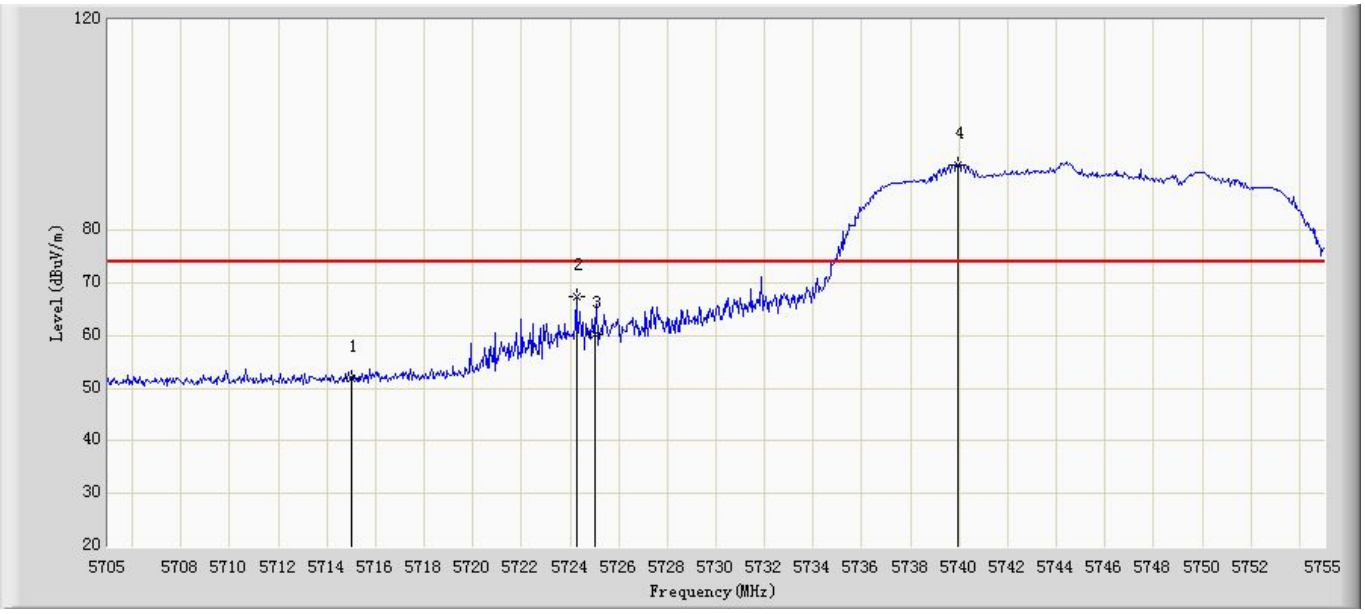

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	51.999	12.069	-16.201	68.2	39.930	PK
2		5724.250	67.533	27.591	-10.667	78.2	39.942	PK
3		5725.000	60.243	20.3	-17.957	78.2	39.943	PK
4	*	5739.950	92.530	52.572	N/A	N/A	39.959	PK

Site: AC102	Time: 2015/07/12 - 17:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5745 by 802.11n(20MHz) Ant0	

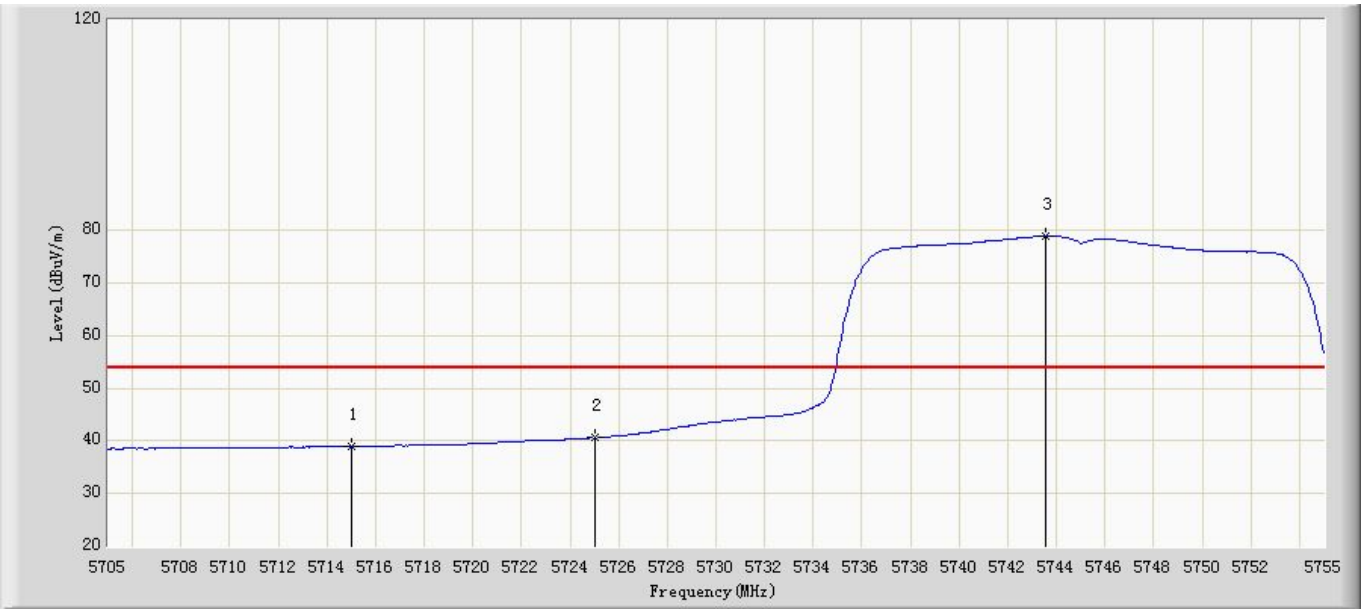

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	38.966	-0.964	-29.234	68.2	39.930	AV
2		5725.000	40.566	0.623	-37.634	78.2	39.943	AV
3	*	5743.550	78.938	38.976	N/A	N/A	39.962	AV

Site: AC102	Time: 2015/07/12 - 17:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5825 by 802.11n(20MHz) Ant0	

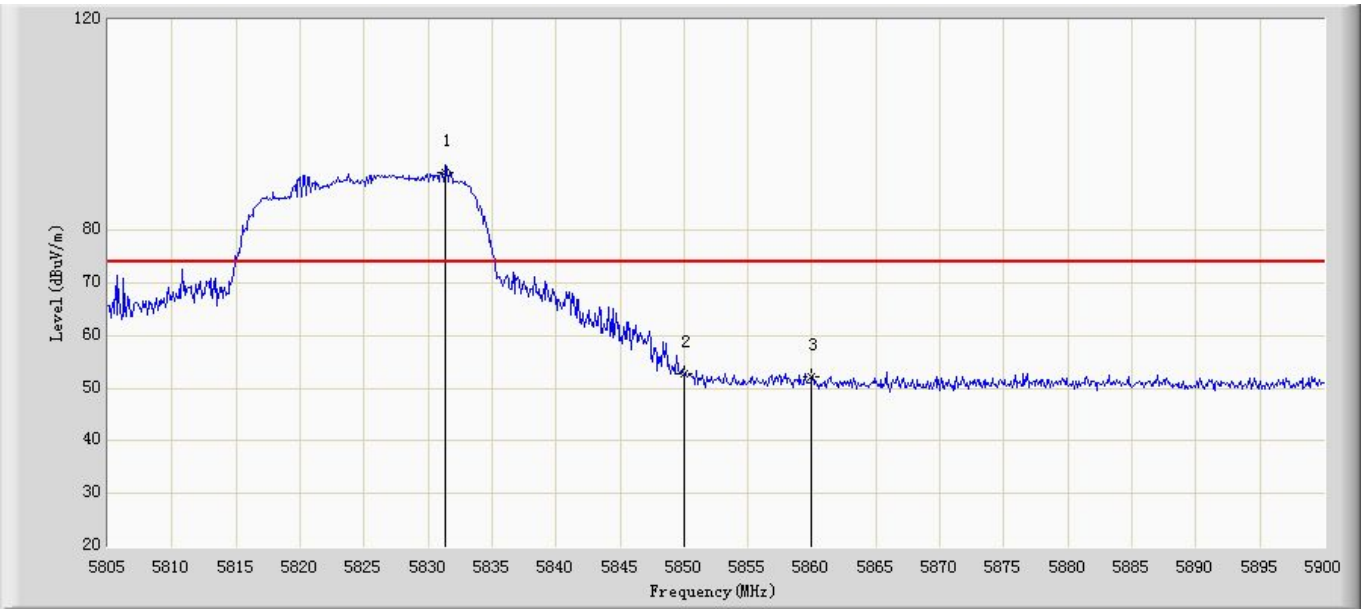

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5831.315	91.105	51.032	N/A	N/A	40.074	PK
2		5850.000	52.787	12.681	-25.413	78.2	40.106	PK
3		5860.000	52.217	12.097	-15.983	68.2	40.120	PK

Site: AC102	Time: 2015/07/12 - 17:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5825 by 802.11n(20MHz) Ant0	

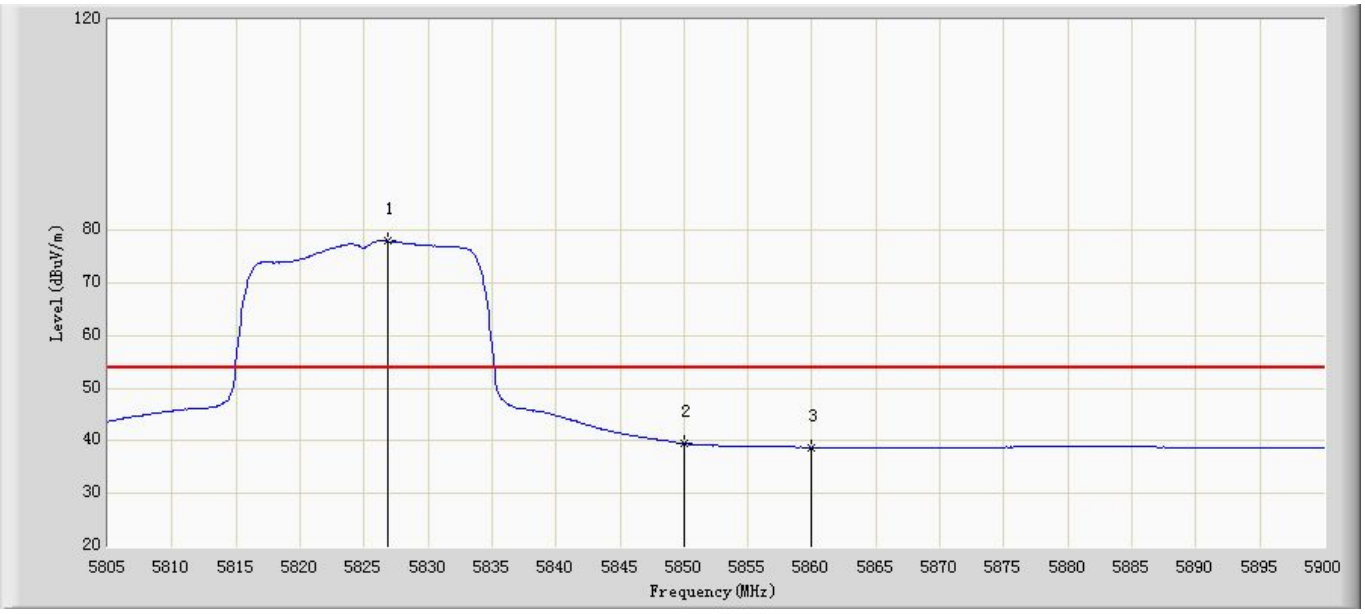

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5826.850	77.935	37.869	N/A	N/A	40.066	AV
2		5850.000	39.508	-0.598	-38.692	78.2	40.106	AV
3		5860.000	38.770	-1.350	-29.43	68.2	40.120	AV

Site: AC102	Time: 2015/07/12 - 17:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5180 by 802.11ac(20MHz) Ant0	

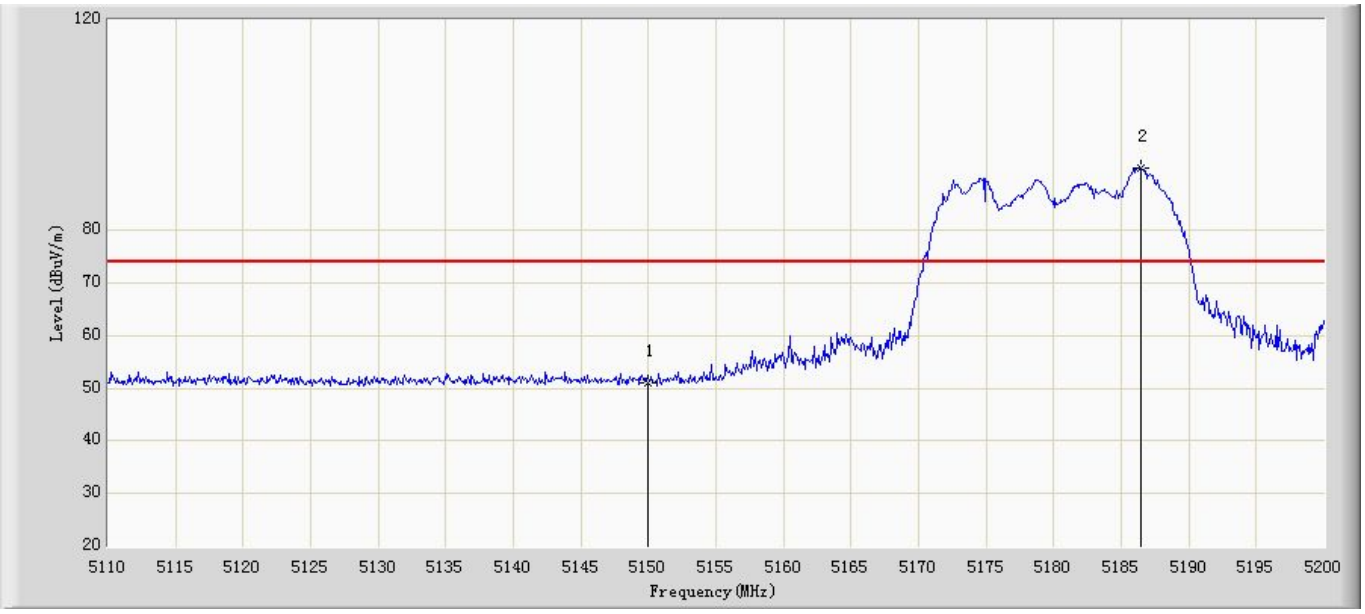

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	51.042	11.395	-22.958	74.000	39.647	PK
2	*	5186.410	91.900	52.261	N/A	N/A	39.639	PK

Site: AC102	Time: 2015/07/12 - 17:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5180 by 802.11ac(20MHz) Ant0	

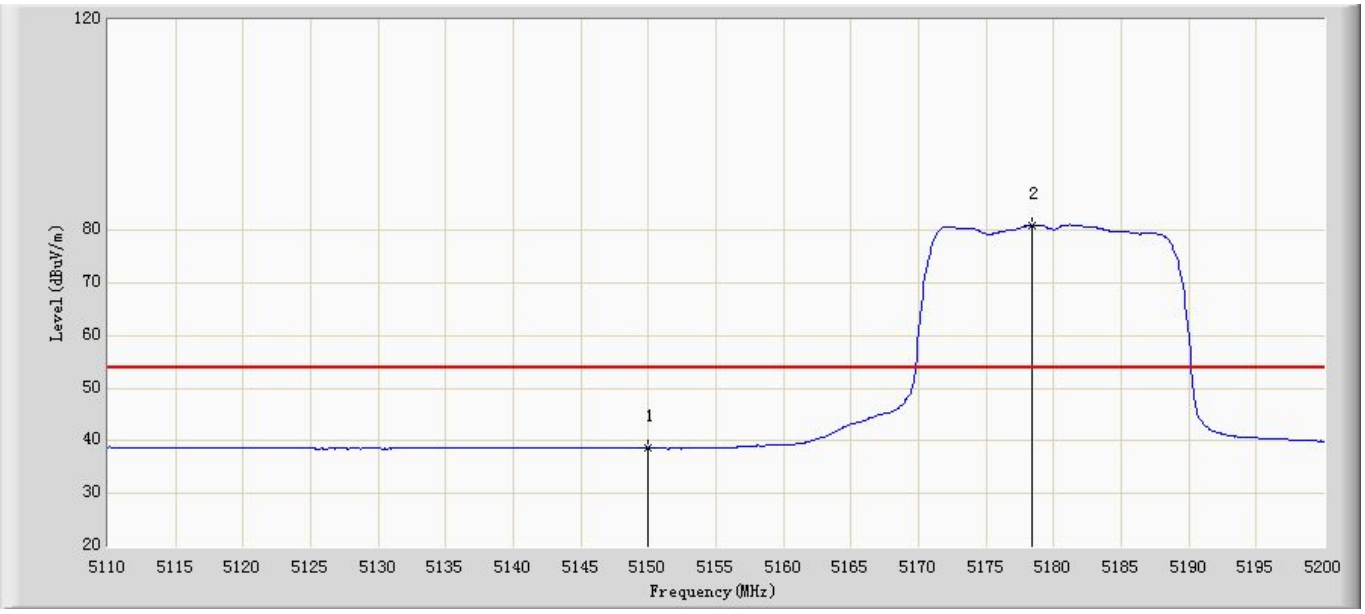

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	38.628	-1.019	-15.372	54.000	39.647	AV
2	*	5178.400	81.012	41.373	N/A	N/A	39.639	AV

Site: AC102	Time: 2015/07/12 - 17:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5240 by 802.11ac(20MHz) Ant0	

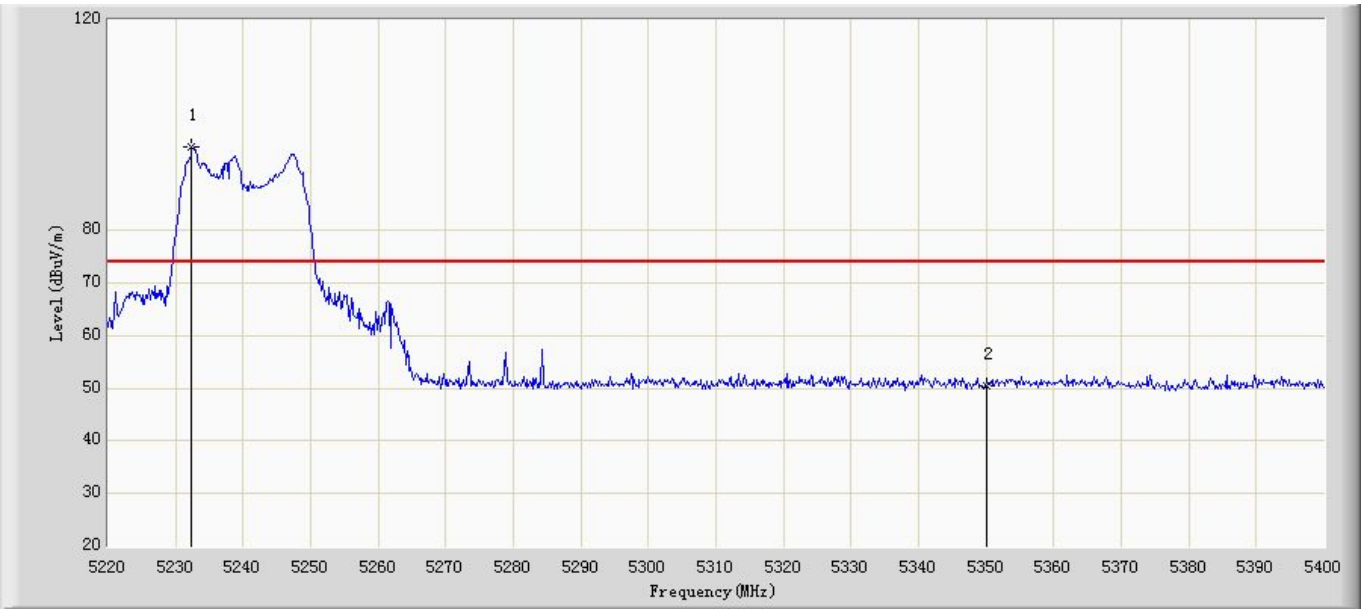

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5232.420	95.795	56.154	N/A	N/A	39.641	PK
2		5350.000	50.420	10.800	-23.580	74.000	39.620	PK

Site: AC102	Time: 2015/07/12 - 17:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5240 by 802.11ac(20MHz) Ant0	

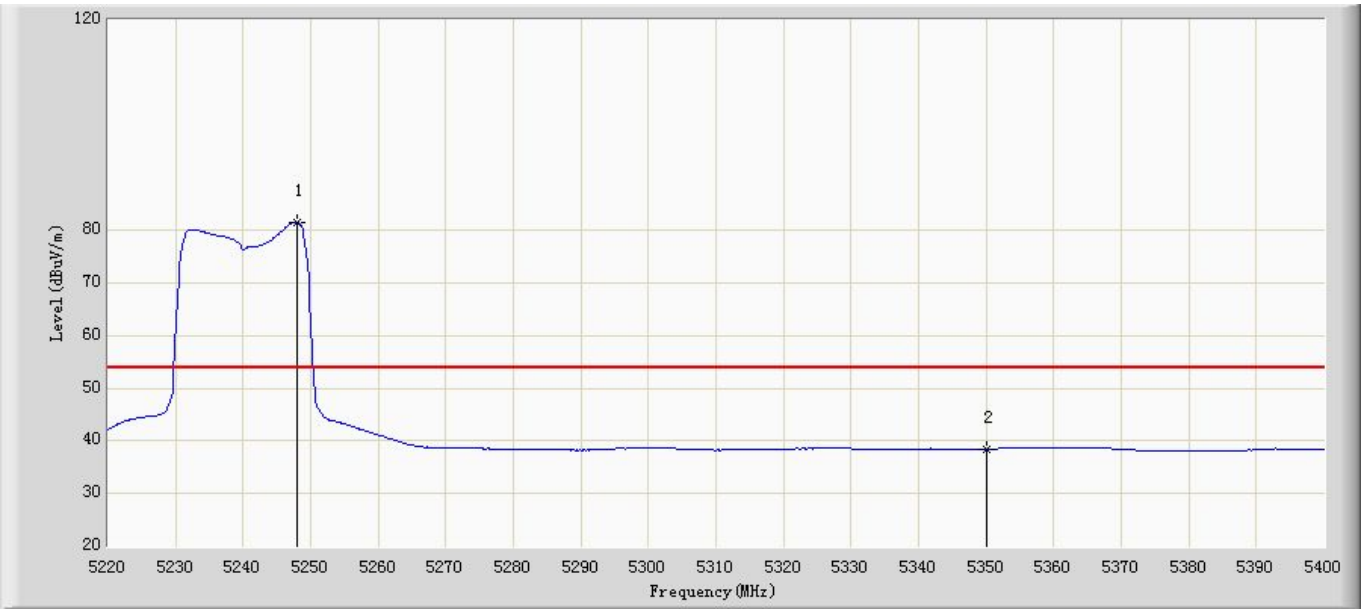

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5248.080	81.584	41.951	N/A	N/A	39.634	AV
2		5350.000	38.371	-1.249	-15.629	54.000	39.620	AV

Site: AC102	Time: 2015/07/12 - 17:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5745 by 802.11ac(20MHz) Ant0	

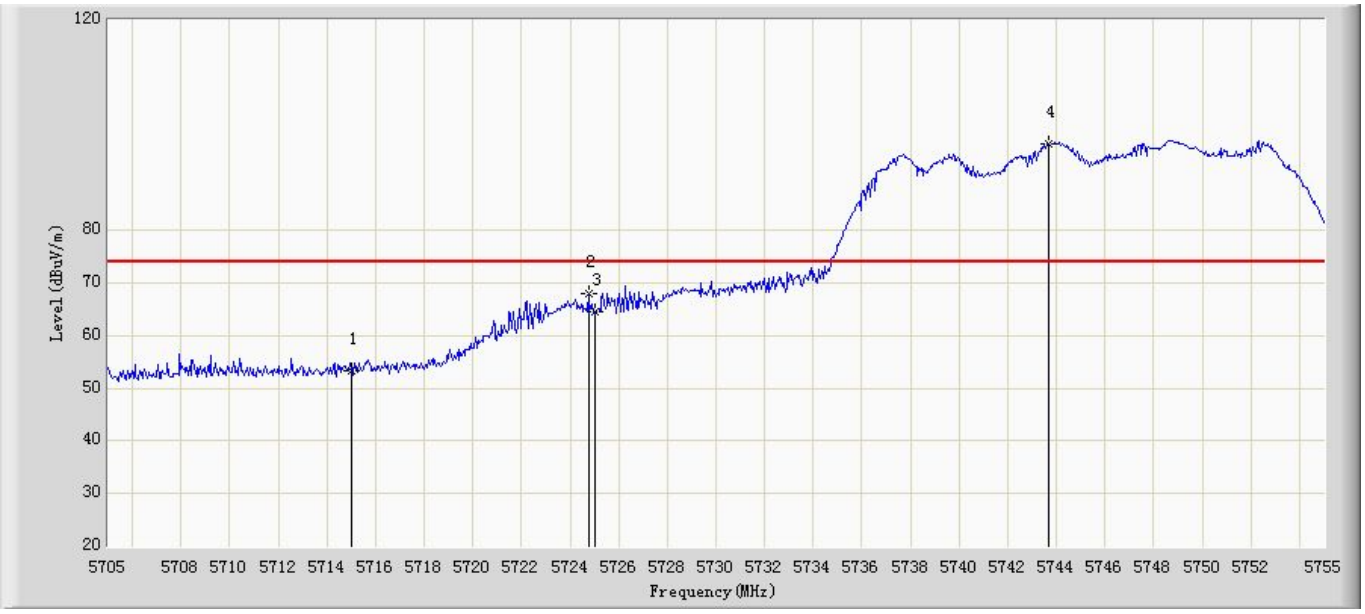

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	53.466	13.536	-14.734	68.2	39.930	PK
2		5724.750	67.872	27.929	-10.328	78.2	39.943	PK
3		5725.000	64.409	24.466	-13.791	78.2	39.943	PK
4	*	5743.700	96.495	56.533	N/A	N/A	39.963	PK

Site: AC102	Time: 2015/07/12 - 18:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5745 by 802.11ac(20MHz) Ant0	

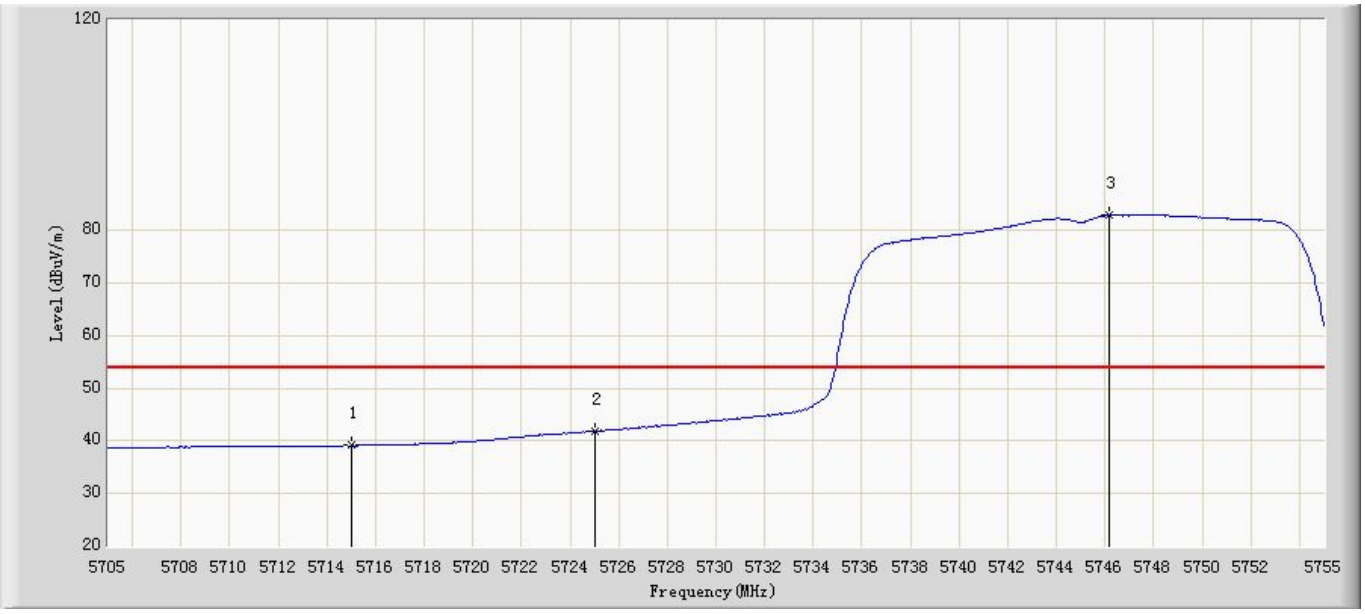

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	39.119	-0.811	-29.081	68.2	39.930	AV
2		5725.000	41.924	1.981	-36.276	78.2	39.943	AV
3	*	5746.150	82.802	42.837	N/A	N/A	39.966	AV

Site: AC102	Time: 2015/07/12 - 18:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5825 by 802.11ac(20MHz) Ant0	

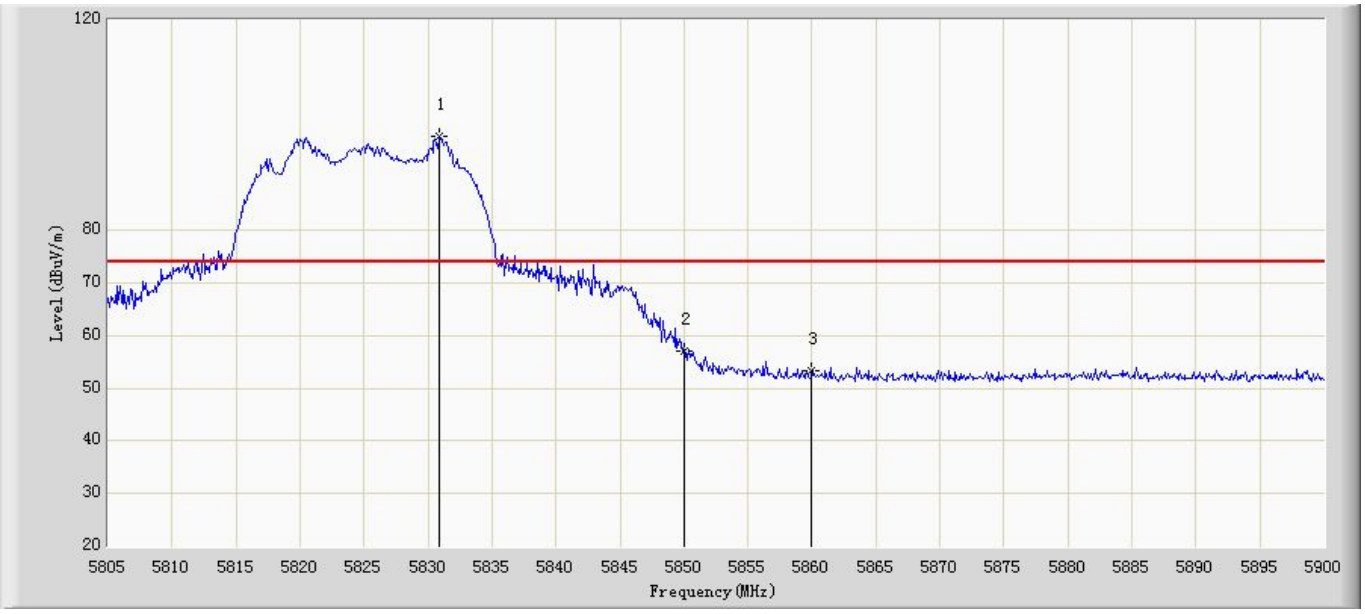

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5830.935	97.763	57.690	N/A	N/A	40.072	PK
2		5850.000	57.206	17.1	-20.994	78.2	40.106	PK
3		5860.000	53.377	13.257	-14.823	68.2	40.120	PK

Site: AC102	Time: 2015/07/12 - 18:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5825 by 802.11ac(20MHz) Ant0	

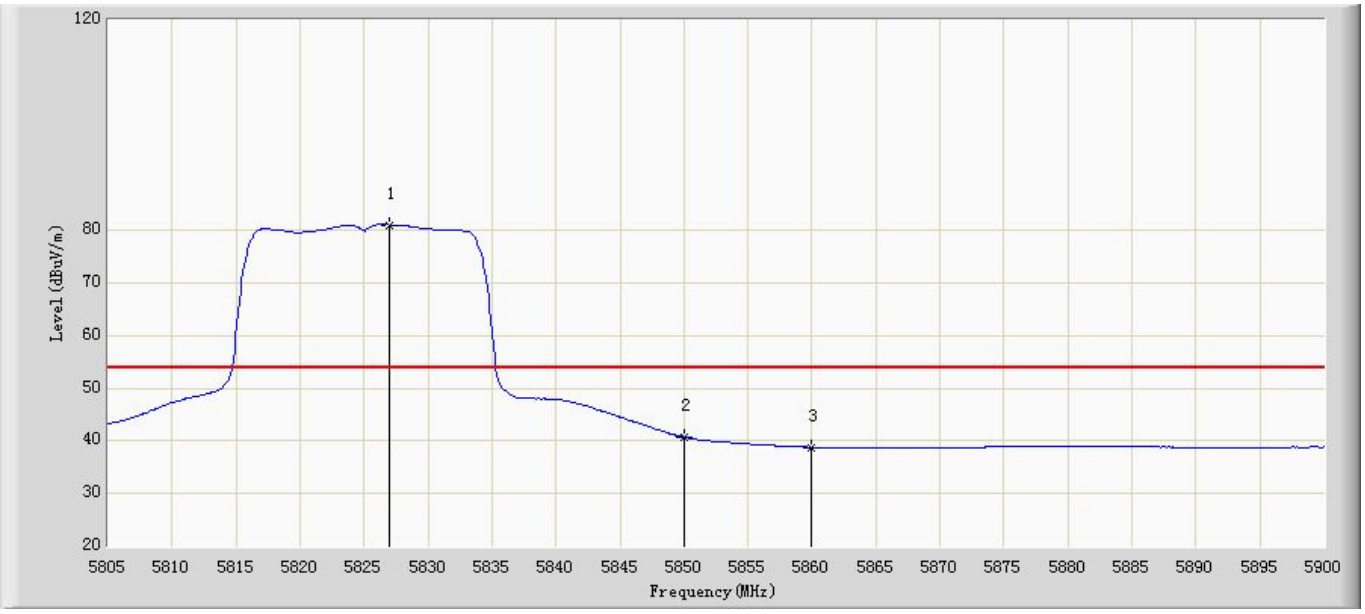

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5826.945	81.055	40.989	N/A	N/A	40.066	AV
2		5850.000	40.719	0.613	-37.481	78.2	40.106	AV
3		5860.000	38.765	-1.355	-29.435	68.2	40.120	AV

Site: AC102	Time: 2015/07/12 - 18:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5190 by 802.11n(40MHz) Ant0	

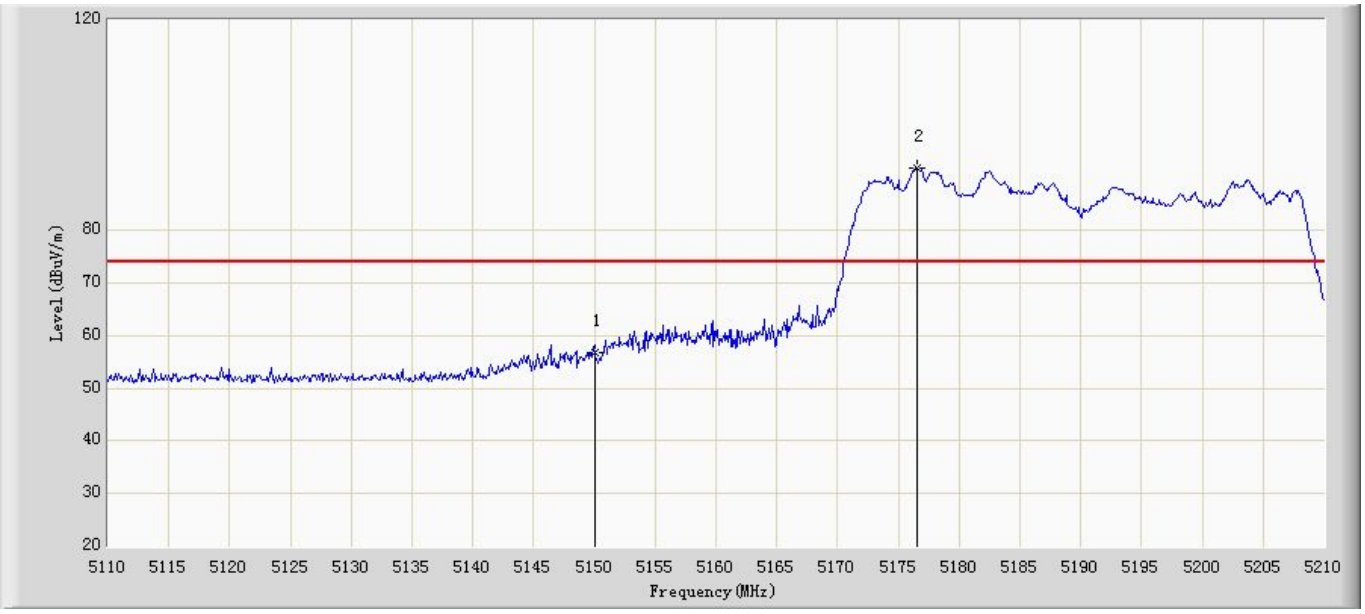

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	56.678	17.031	-17.322	74.000	39.647	PK
2	*	5176.500	91.939	52.299	N/A	N/A	39.640	PK

Site: AC102	Time: 2015/07/12 - 18:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5190 by 802.11n(40MHz) Ant0	

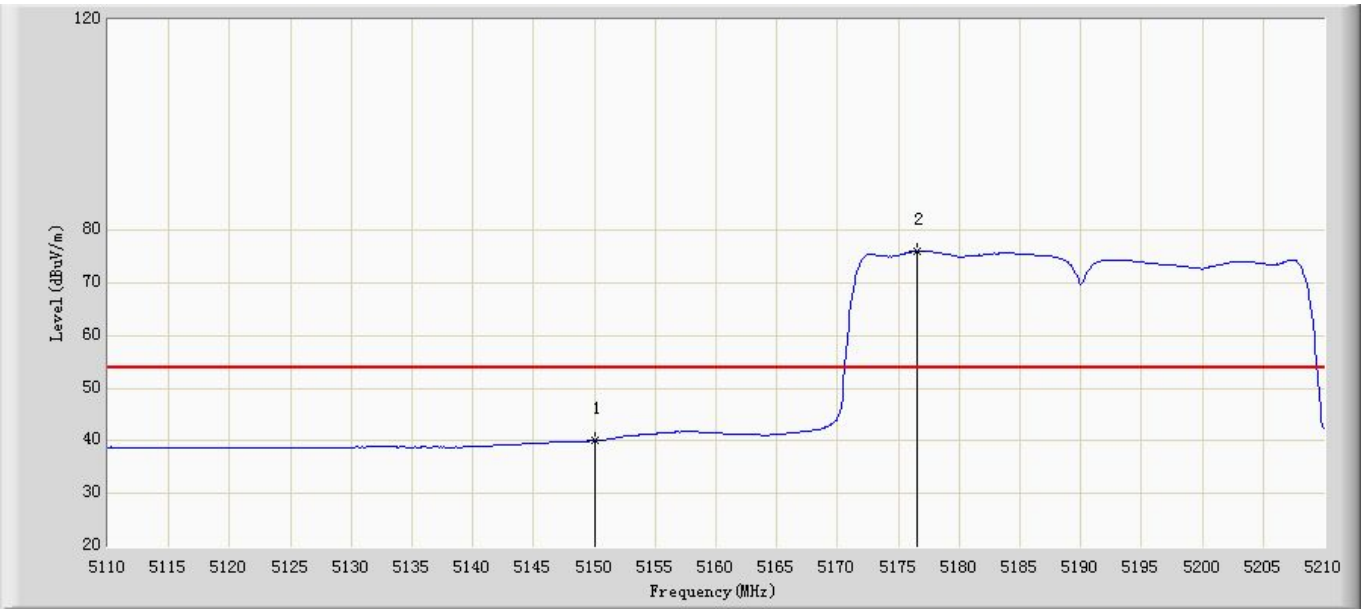

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	40.003	0.356	-13.997	54.000	39.647	AV
2	*	5176.600	75.936	36.296	N/A	N/A	39.639	AV

Site: AC102	Time: 2015/07/12 - 18:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5230 by 802.11n(40MHz) Ant0	

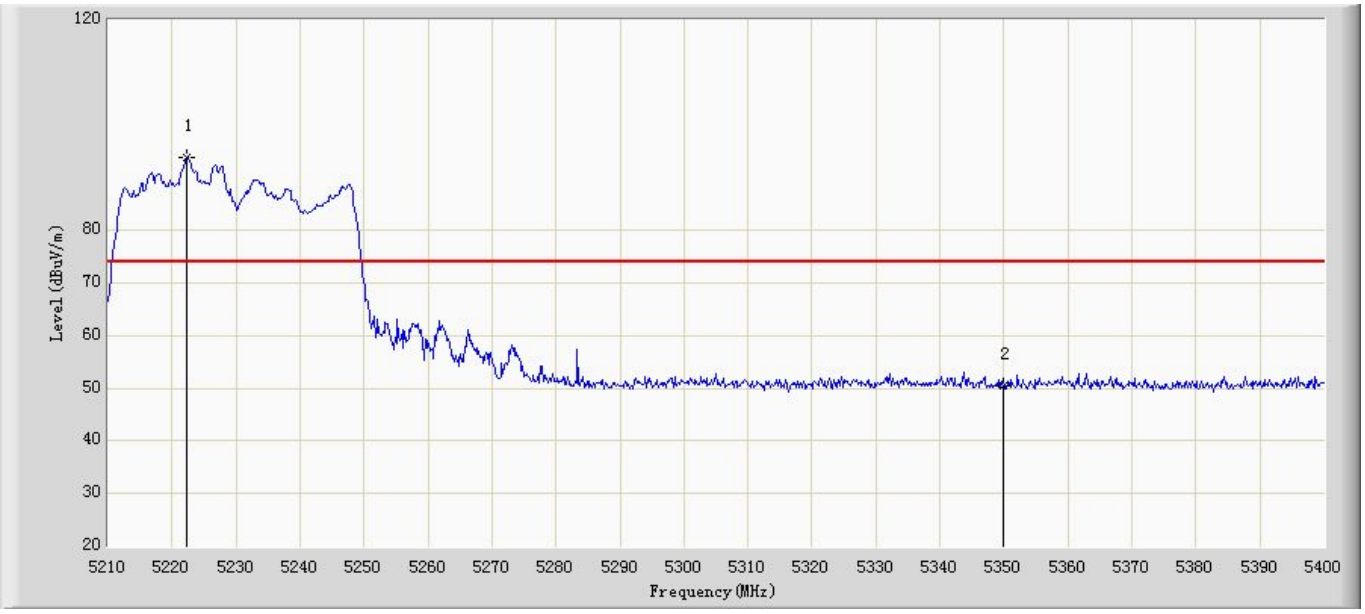

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5222.350	93.836	54.194	N/A	N/A	39.642	PK
2		5350.000	50.420	10.800	-23.580	74.000	39.620	PK

Site: AC102	Time: 2015/07/12 - 18:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5230 by 802.11n(40MHz) Ant0	

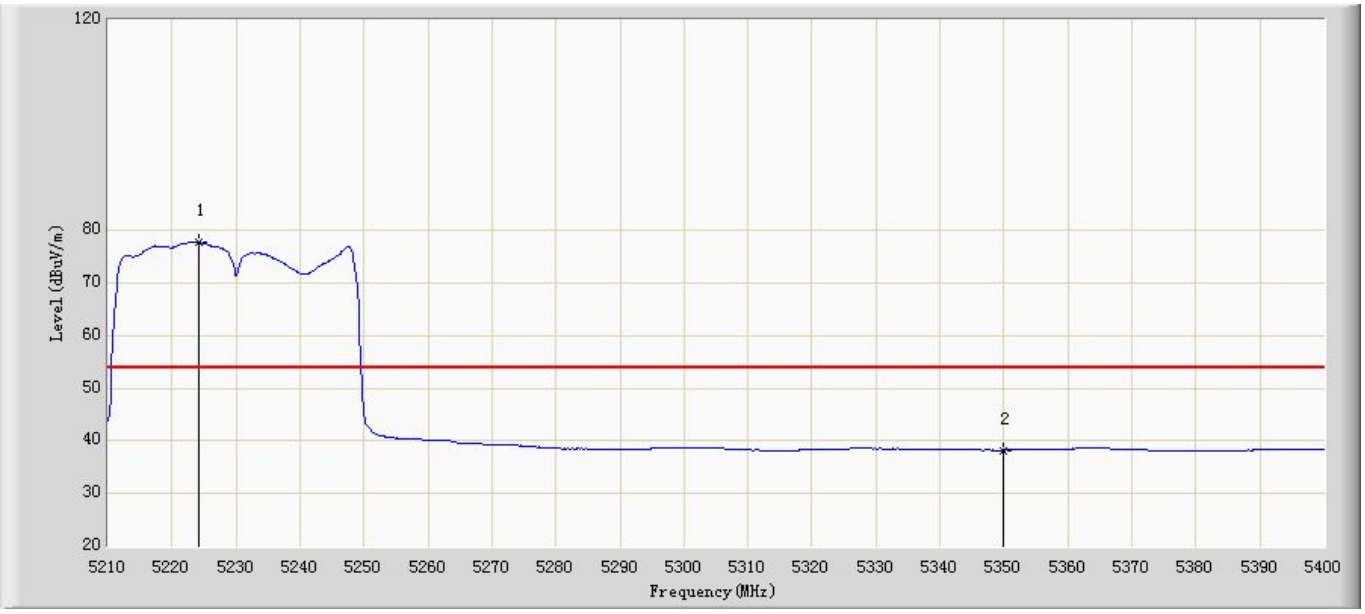

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5224.250	77.706	38.064	N/A	N/A	39.642	AV
2		5350.000	38.242	-1.378	-15.758	54.000	39.620	AV

Site: AC102	Time: 2015/07/12 - 18:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5755 by 802.11n(40MHz) Ant0	

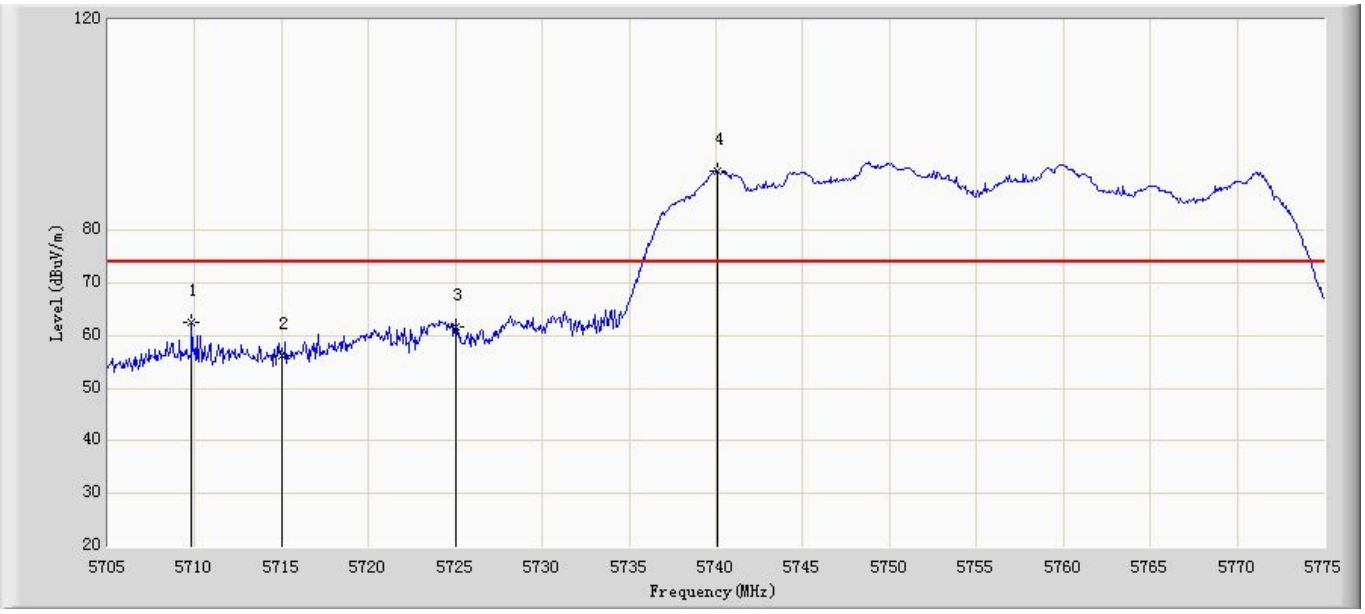

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5709.830	62.43	22.507	-5.77	68.2	39.924	PK
2		5715.000	56.343	16.413	-21.857	78.2	39.930	PK
3		5725.000	61.682	21.739	-16.518	78.2	39.943	PK
4	*	5740.070	91.360	51.401	N/A	N/A	39.959	PK

Site: AC102	Time: 2015/07/12 - 18:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5755 by 802.11n(40MHz) Ant0	

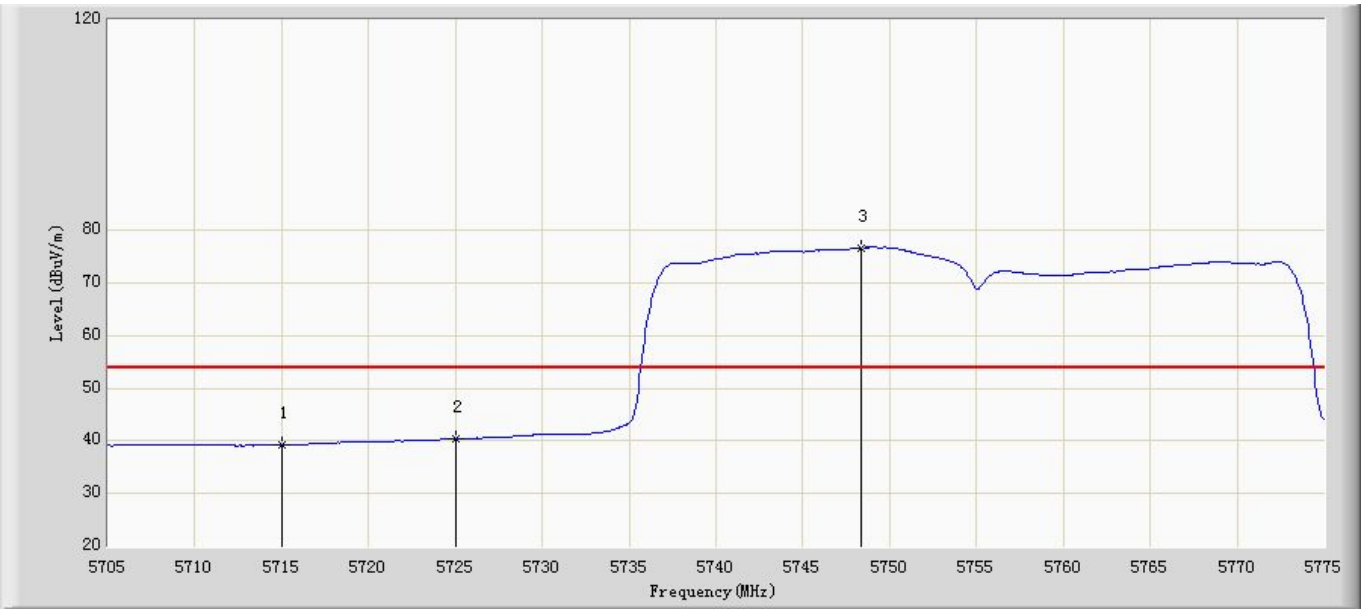

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	39.248	-0.682	-28.952	68.2	39.930	AV
2		5725.000	40.372	0.429	-37.828	78.2	39.943	AV
3	*	5748.330	76.741	36.773	N/A	N/A	39.967	AV

Site: AC102	Time: 2015/07/12 - 18:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5795 by 802.11n(40MHz) Ant0	

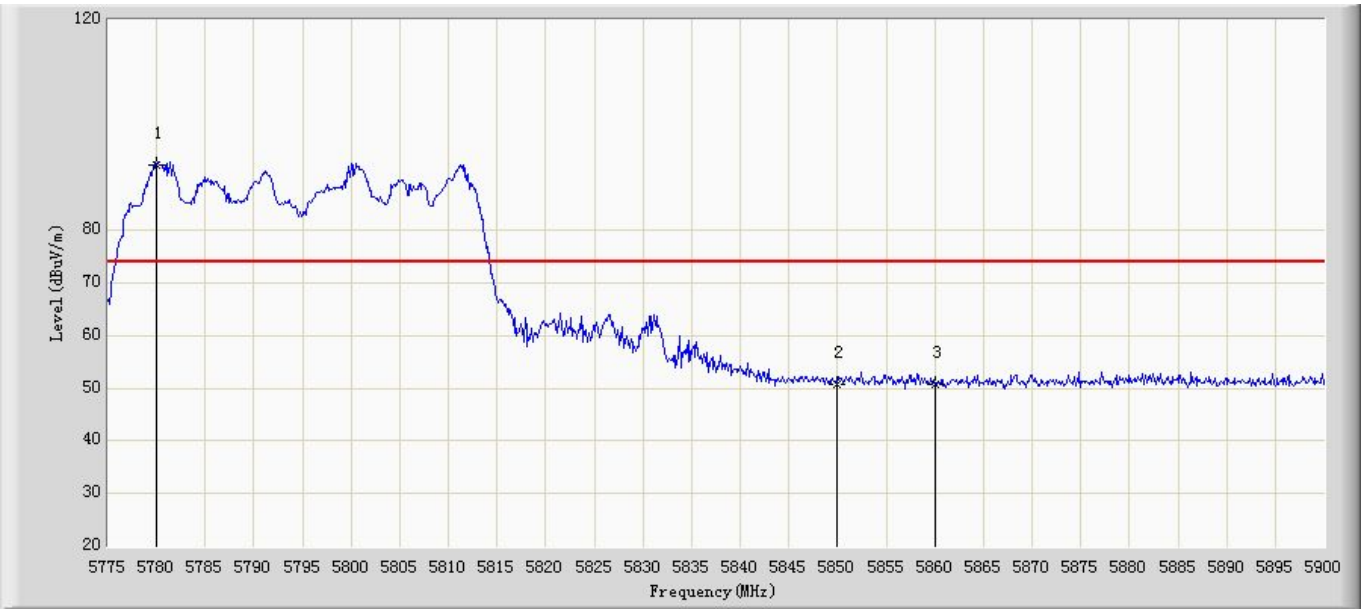

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5780.000	92.492	52.486	N/A	N/A	40.005	PK
2		5850.000	50.798	10.692	-27.402	78.2	40.106	PK
3		5860.000	50.685	10.565	-17.515	68.2	40.120	PK

Site: AC102	Time: 2015/07/12 - 18:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5795 by 802.11n(40MHz) Ant0	

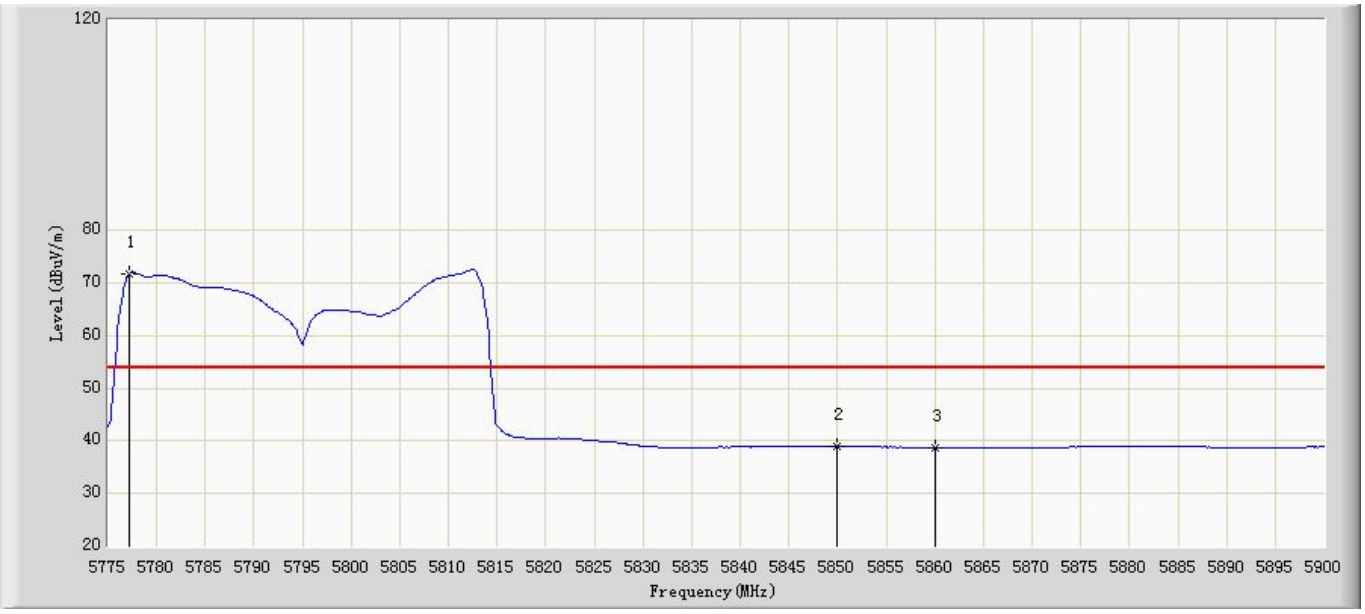

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5777.250	71.754	31.753	N/A	N/A	40.001	AV
2		5850.000	38.975	-1.131	-39.225	78.2	40.106	AV
3		5860.000	38.690	-1.430	-29.51	68.2	40.120	AV

Site: AC102	Time: 2015/07/12 - 18:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5190by 802.11ac(40MHz) Ant0	

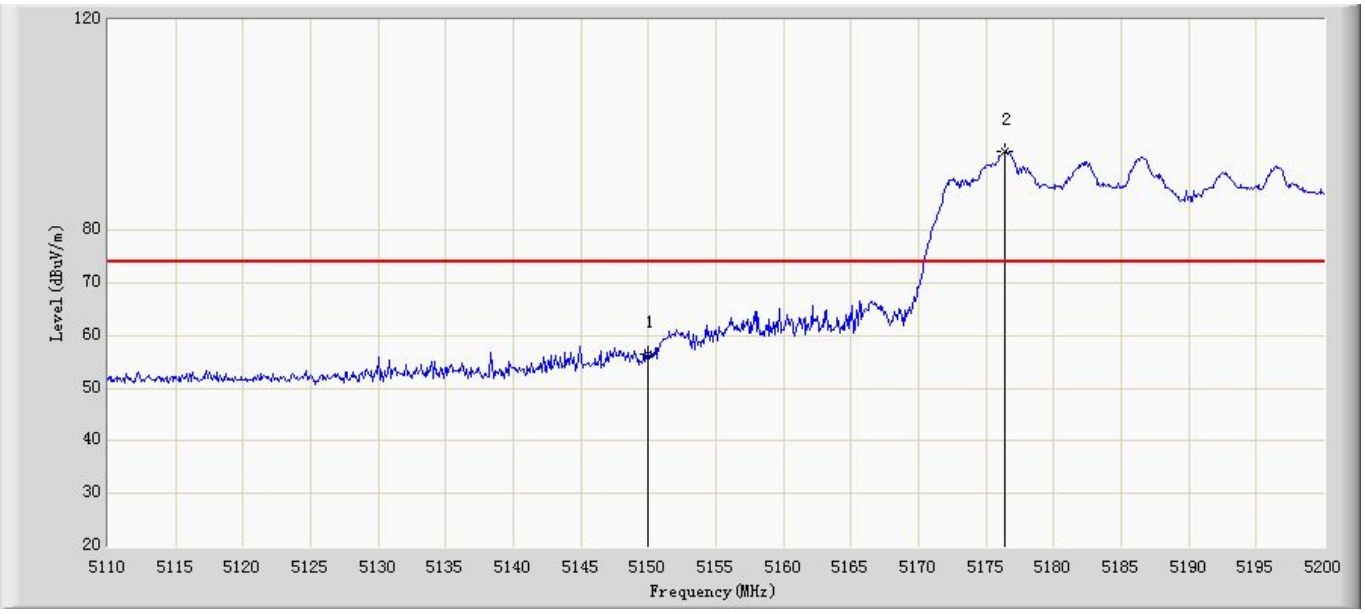

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	56.491	16.844	-17.509	74.000	39.647	PK
2	*	5176.420	95.095	55.455	N/A	N/A	39.640	PK

Site: AC102	Time: 2015/07/12 - 18:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5190by 802.11ac(40MHz) Ant0	

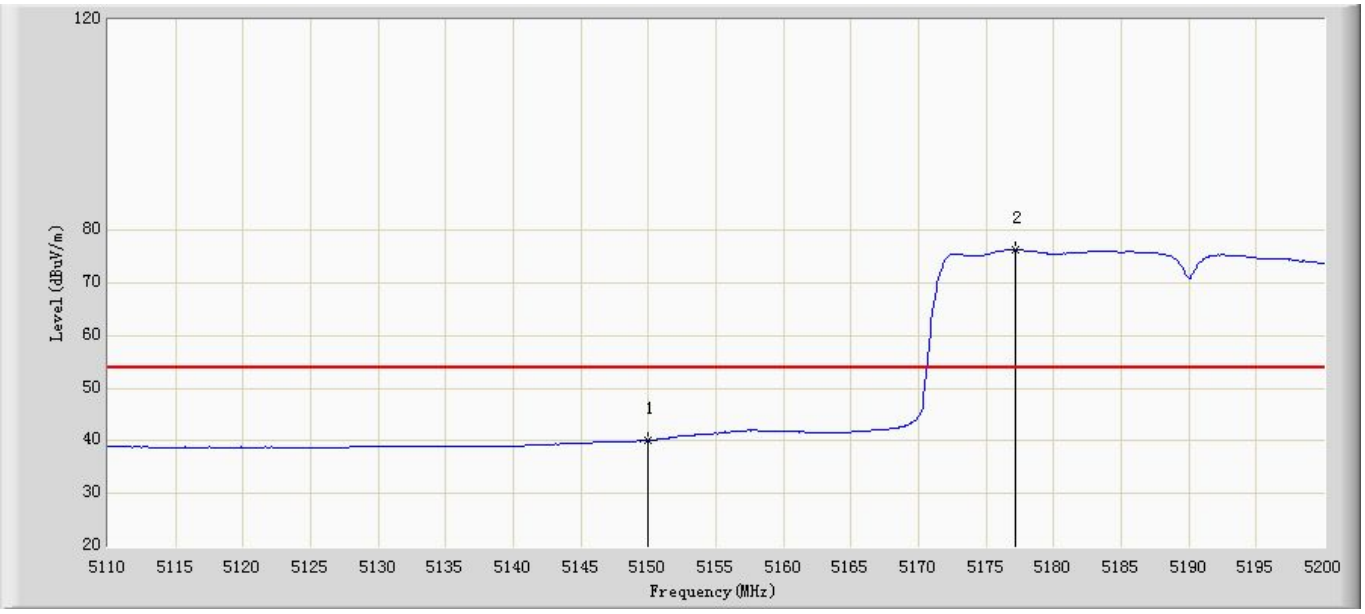

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	40.085	0.438	-13.915	54.000	39.647	AV
2	*	5177.140	76.296	36.657	N/A	N/A	39.639	AV

Site: AC102	Time: 2015/07/12 - 18:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5230 by 802.11ac(40MHz) Ant0	

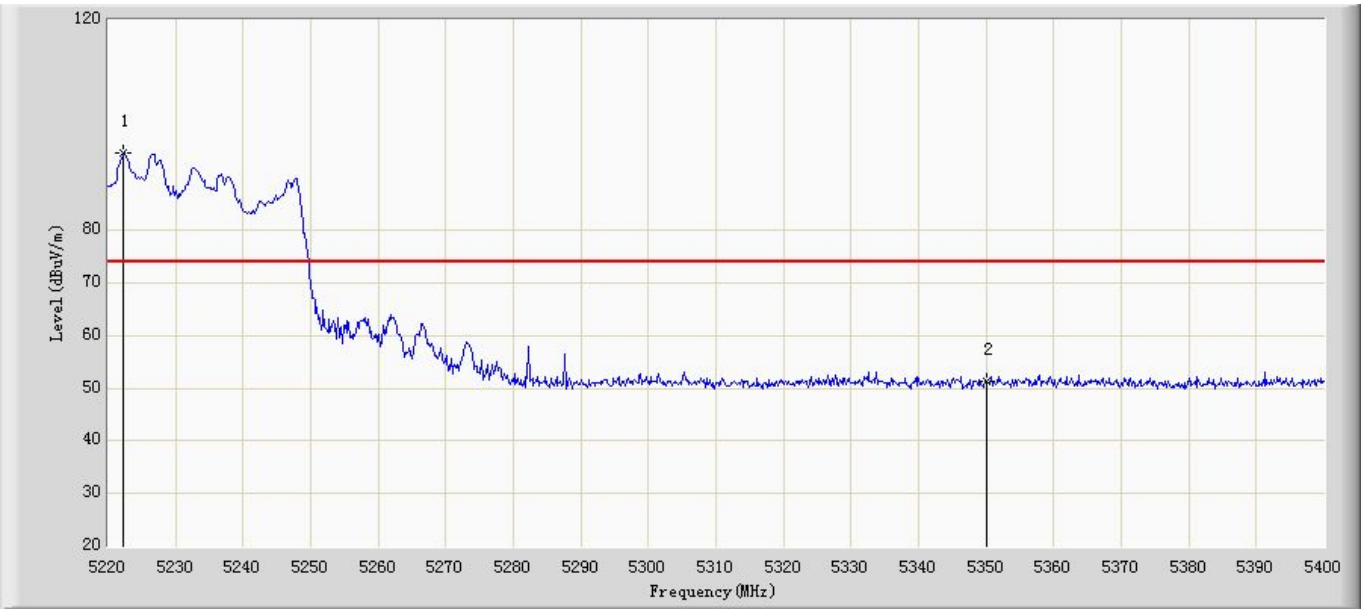

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5222.340	94.624	54.982	N/A	N/A	39.642	PK
2		5350.000	51.335	11.715	-22.665	74.000	39.620	PK

Site: AC102	Time: 2015/07/12 - 18:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5230 by 802.11ac(40MHz) Ant0	

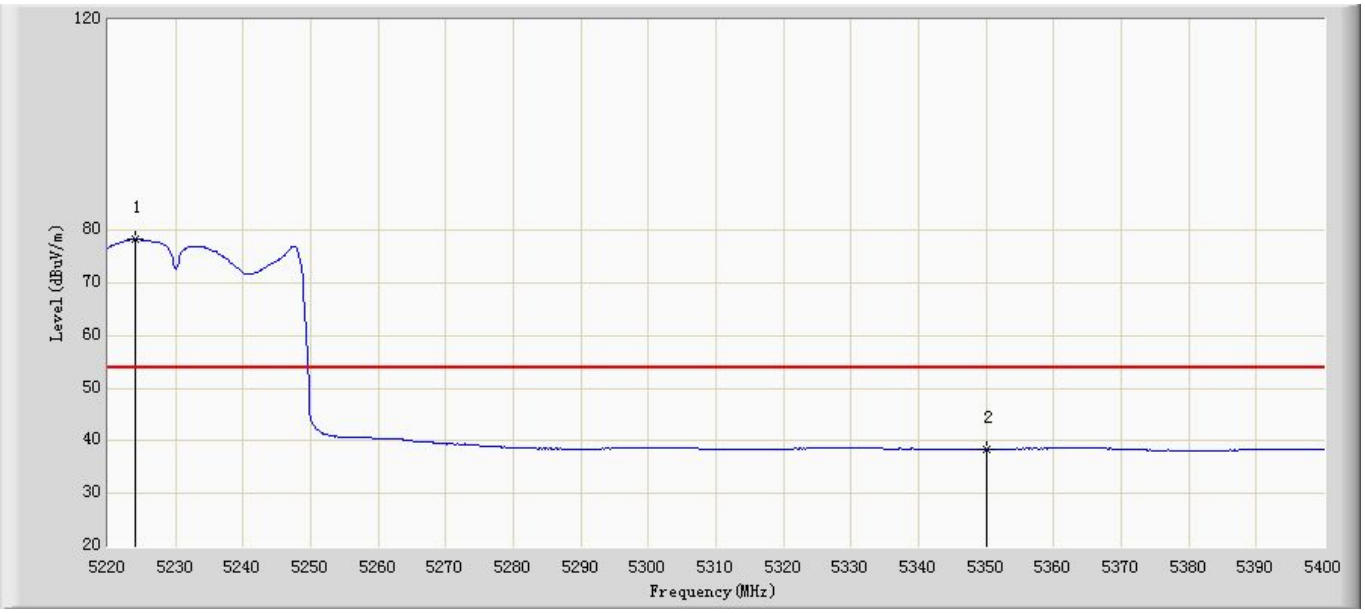

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5224.140	78.275	38.633	N/A	N/A	39.642	AV
2		5350.000	38.285	-1.335	-15.715	54.000	39.620	AV

Site: AC102	Time: 2015/07/12 - 18:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5755 by 802.11ac(40MHz) Ant0	

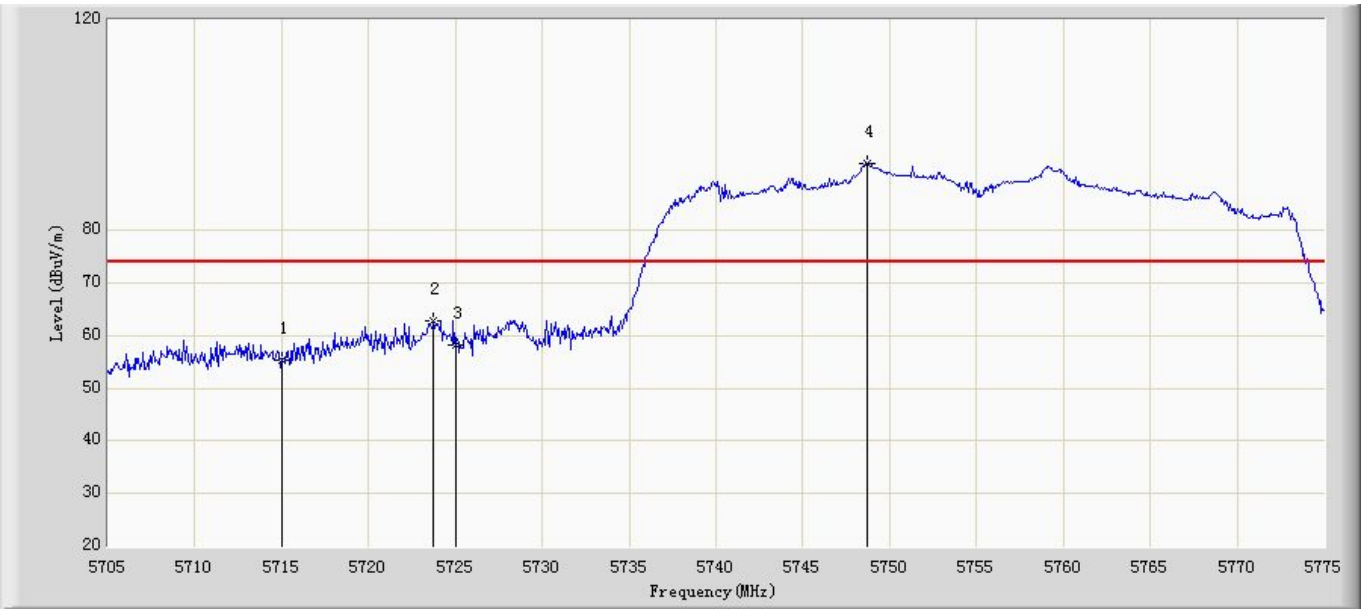

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	55.385	15.455	-12.815	68.2	39.930	PK
2		5723.760	62.68	22.739	-15.52	78.2	39.941	PK
3		5725.000	58.341	18.398	-19.859	78.2	39.943	PK
4	*	5748.680	92.832	52.864	N/A	N/A	39.968	PK