



FCC TEST REPORT

REPORT NO.: RF900914R01
MODEL NO.: MX5500RF (for Memorex)
MX5200RF (for Lilly)
RECEIVED: September 10, 2001
TESTED: Sep. 13 ~ Sep. 27, 2001

APPLICANT: Behavior Tech Computer Corporation
ADDRESS: 2F, 51, Tung Hsing Road, Taipei, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chia Pau Tsuen, Linkou Hsiang, Taipei, Taiwan, R.O.C.

This test report consists of 15 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by NVLAP or any U.S. government agencies. The test results in the report only apply to the tested sample.



0528



Lab Code: 200102-0



Table of Contents

1	CERTIFICATION.....	3
2	SUMMARY OF TEST RESULTS.....	4
3	GENERAL INFORMATION.....	5
3.1	GENERAL DESCRIPTION OF EUT.....	5
3.2	DESCRIPTION OF TEST MODES.....	6
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	6
3.4	DESCRIPTION OF SUPPORT UNITS.....	7
4	TEST PROCEDURE AND RESULT.....	8
4.1	CONDUCTED EMISSION MEASUREMENT.....	8
4.2	RADIATED EMISSION MEASUREMENT.....	8
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	8
4.2.2	TEST INSTRUMENT.....	9
4.2.3	TEST PROCEDURE.....	10
4.2.4	TEST SETUP.....	11
4.2.5	EUT OPERATING CONDITION.....	11
4.2.6	TEST RESULT.....	12
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	14
6	INFORMATION ON THE TESTING LABORATORIES.....	15



1 CERTIFICATION

PRODUCT : Wireless Keyboard
MODEL NO : MX5500RF (for Memorex)
MX5200RF (for Lilly)
APPLICANT : Behavior Tech Computer Corporation
STANDARDS : 47 CFR Part 15, Subpart C(15.227)
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from September 13 ~ September 27, 2001. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

TESTED BY : Gary Chang , DATE: Sept. 28, 2001
Gary Chang

CHECKED BY : Emily Lu , DATE: Sep. 28, 2001
Emily Lu

APPROVED BY : Alan Lane , DATE: Sept. 28, 2001
Dr. Alan Lane, Manager



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.107	Conducted Emission Test	N/A	Power supply is 3VDC from batteries
15.227	Radiated Emission Test	PASS	Minimum passing margin is -10.40dBuV at 81.59MHz

NOTE: The receiver part to communicate with the EUT has been verified to comply with FCC Part 15, Subpart B, Class B (DoC). The test report can be provided upon request.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Keyboard
MODEL NO.	MX5500RF (for Memorex) MX5200RF (for Lilly)
POWER SUPPLY	3VDC from battery
MODULATION TYPE	FSK
FREQUENCY RANGE	27.045-27.195 MHz
CARRIER FREQUENCY OF EACH CHANNEL	27.045 / 27.095 MHz
BANDWIDTH OF EACH CHANNEL	10KHz
NUMBER OF CHANNEL	2
ANTENNA TYPE	Integral antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT is the transmitter part of a Wireless Keyboard.
2. The MX5500RF and MX5200RF are identical except for brand name and model number.
3. For more detailed features description of the EUT, please refer to the manufacturer's specifications or the User's Manual.



3.2 DESCRIPTION OF TEST MODES

Four channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	27.045 MHz	2	27.095 MHz

NOTE: Two channels were pre-tested in chamber. Channel 1, the worst case, was chosen for final test.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is the transmitter part of a Wireless Keyboard. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C(15.227)

ANSI C63.4-1992

All tests have been performed and recorded as per the above standards.



3.4 DESCRIPTION OF SUPPORT UNITS

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER	NTI	PIII-500	P201167	FCC DoC APPROVED
2	MONITOR	HP	D2842A	KR93473168	BEJCB910
3	MODEM	ACEEX	1414	980020503	IFAXDM1414
4	PRINTER	HP	2225C+	3123S97230	DSI6XU2225
5	PS/2 MOUSE	LOGITECH	M-S43	LZE00703207	DZL211106

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core.
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
4	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
5	1.8 m foil shielded wire, terminated with PS/2 connector via drain wire, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).



4 TEST PROCEDURE AND RESULT

4.1 CONDUCTED EMISSION MEASUREMENT

NA

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.227 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
26.96-27.28	100	80

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Other Frequencies (MHz)	Field Strength of Fundamental	
	uV/meter	dBuV/meter
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
*HP Spectrum Analyzer	8590L	3544A01176	May 7, 2002
*HP Preamplifier	8447D	2944A08485	Nov. 3, 2001
HP Preamplifier	8449B	3008A01201	Dec. 13, 2001
HP Preamplifier	8449B	3008A01292	Aug. 21, 2002
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 25, 2002
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2001
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 4, 2001
* Broadband Test Antenna	VILB 9163	121	April 3, 2002
SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 6, 2002
EMCO Horn Antenna	3115	9312-4192	April 15, 2002
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	AS61D3	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Aug. 4, 2001
* TIMES RF cable	LMR-600	CABLE-ST5-01	Aug. 4, 2001
Antenna (Horn)	BBHA9120-D	D130	July 10, 2002
Open Field Test Site	Site 5	ADT-R05	July 28, 2001
VCCI Site Registration No.	Site 5	R-1039	NA
Site Registration No.	FCC: 90422 Canada IC: IC 3789 VCCI : R-1039		

NOTE: 1. "*" = These equipment are used for the final measurement.

2. The preamplifiers are not used while R&S receiver is doing the measurements.

3. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.

4. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

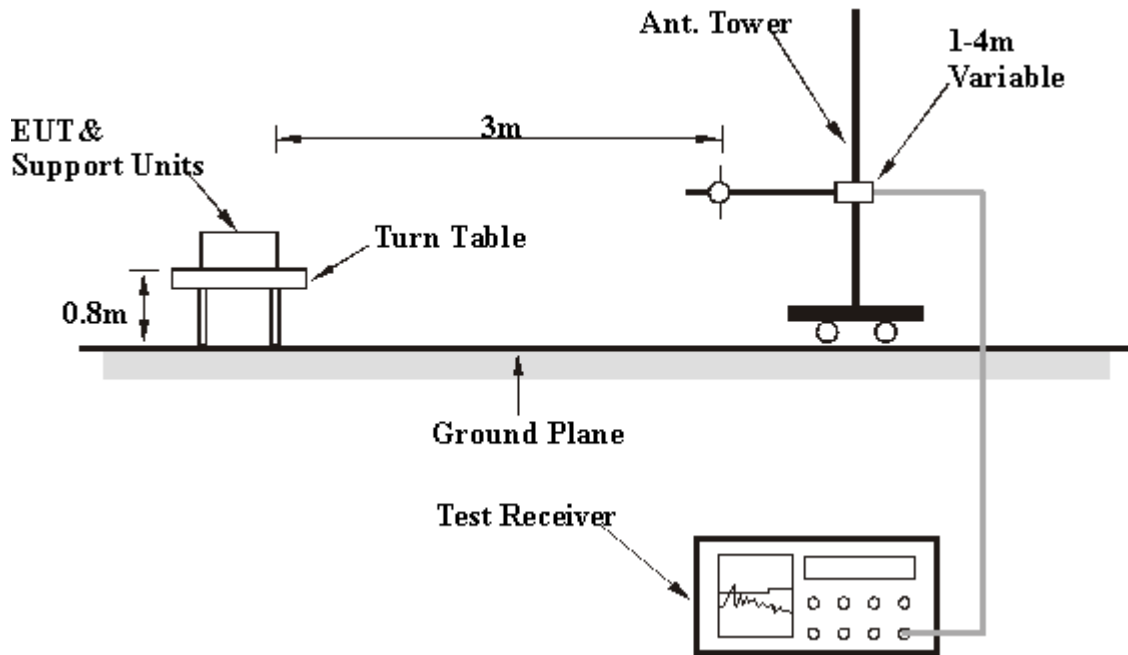

For the actual test configuration, please refer to the related item in this test report - Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITION

Set the EUT under transmission condition continuously at specific channel frequency.



4.2.6 TEST RESULT

EUT	Wireless Keyboard	MODEL	MX5500RF, MX5200RF
MODE	Channel 1	FREQUENCY RANGE	30-1000 MHz
INPUT POWER	3VDC	DETECTOR FUNCTION	Peak / Quasi-Peak / Average
ENVIRONMENTAL CONDITIONS	25 deg. C, 55 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*27.20	61.4 PK	100.00	-38.60	1.38H	61	76.45	11.35	0.57	27.00	15.08
2	*27.20	50.3 AV	80.00	-29.70	1.38H	61	38.34	11.35	0.57	0.00	-11.92
3	81.59	29.6 QP	40.00	-10.40	2.14H	103	21.40	7.33	0.85	0.00	-8.18
4	108.79	31.3 QP	43.50	-12.20	2.74H	299	19.40	10.87	1.01	0.00	-11.88
5	190.33	29.5 QP	43.50	-14.00	1.72H	311	19.20	8.95	1.39	0.00	-10.34
6	217.57	29.7 QP	46.00	-16.30	1.84H	232	18.20	9.97	1.50	0.00	-11.48
7	244.70	30.4 QP	46.00	-15.60	1.35H	165	17.10	11.70	1.64	0.00	-13.34
8	271.94	31.8 QP	46.00	-14.20	1.53H	103	17.50	12.53	1.72	0.00	-14.26
9	353.25	33.1 QP	46.00	-12.90	2.49H	38	16.70	14.31	2.05	0.00	-16.37

- NOTE:**
1. Emission level = Raw Value – Correction Factor
 2. Correction Factor = Pre-Amplifier Factor - Antenna Factor - Cable Factor
(Pre-Amplifier Factor = 0, when a Pre-Amplifier is not used for the test.)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. "*" = Fundamental frequency.



EUT	Wireless Keyboard	MODEL	MX5500RF, MX5200RF
MODE	Channel 1	FREQUENCY RANGE	30-1000 MHz
INPUT POWER	3VDC	DETECTOR FUNCTION	Peak / Quasi-Peak / Average
ENVIRONMENTAL CONDITIONS	25 deg. C, 55 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*27.20	59.0 PK	100.00	-41.00	1.00V	25	74.10	11.35	0.57	27.00	15.08
2	*27.20	49.0 AV	80.00	-31.00	1.00V	25	37.10	11.35	0.57	0.00	-11.92
3	108.79	30.1 QP	43.50	-13.40	1.35V	245	18.20	10.87	1.01	0.00	-11.88
4	136.14	29.9 QP	43.50	-13.60	1.90V	304	17.80	10.95	1.15	0.00	-12.10
5	190.34	27.5 QP	43.50	-16.00	1.43V	266	17.20	8.95	1.39	0.00	-10.33
6	217.52	29.7 QP	46.00	-16.30	1.99V	53	18.20	9.97	1.50	0.00	-11.47
7	353.55	33.9 QP	46.00	-12.10	2.33V	215	17.50	14.31	2.05	0.00	-16.36
8	433.74	33.8 QP	46.00	-12.20	1.00V	298	15.20	16.28	2.35	0.00	-18.63

- NOTE:**
1. Emission level = Raw Value – Correction Factor
 2. Correction Factor = Pre-Amplifier Factor - Antenna Factor - Cable Factor
(Pre-Amplifier Factor = 0, when a Pre-Amplifier is not used for the test.)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. "*" = Fundamental frequency.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab:

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.