
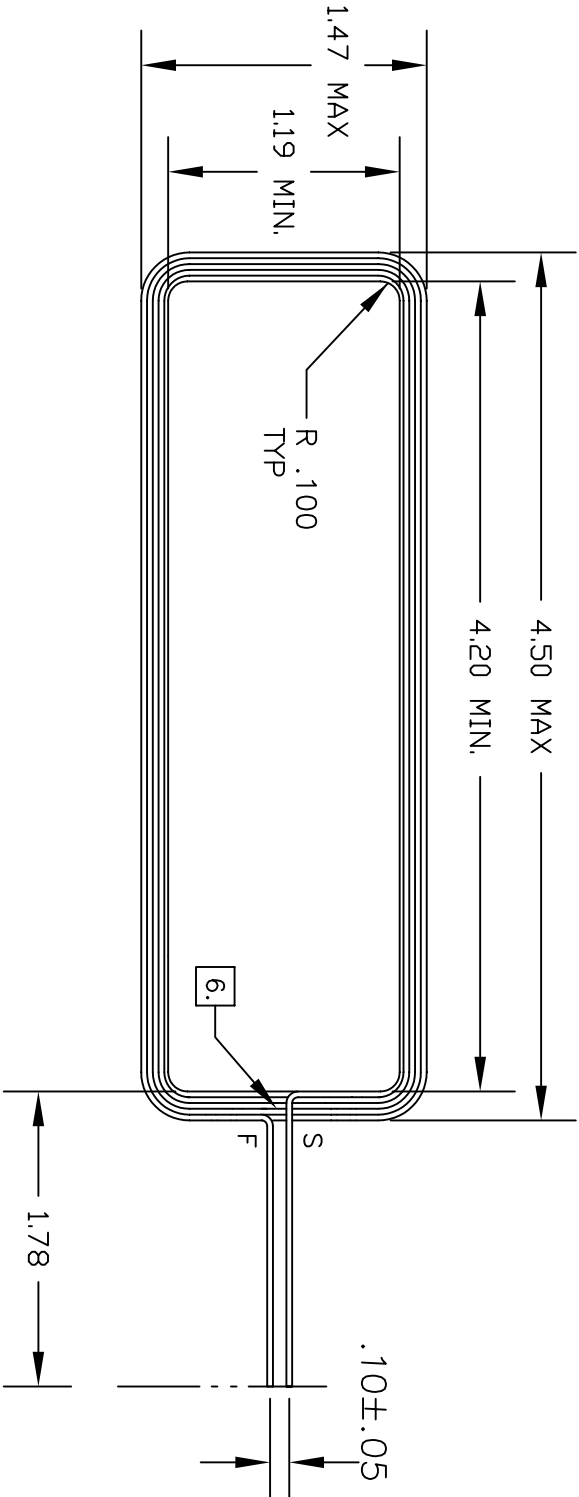


ECO NUMBER	STATUS CODE	REVISION	DRAFTER	DESCRIPTION OF CHANGE	DATE	APPROVAL
SJC1055	----	2	SJR	ENG RELEASE	8-28-02	
SJC1159	----	A	GD	RELEASE TO PRODUCTION	12/30/02	

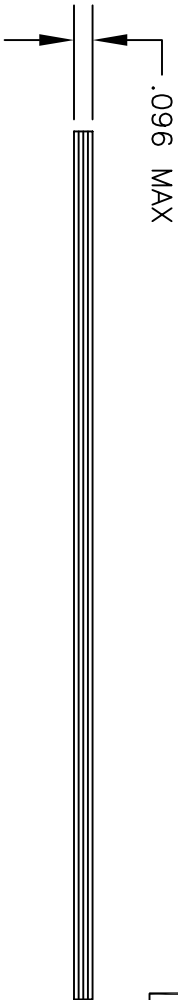

1. ALL MEASUREMENTS ARE IN INCHES.
2. TOLERANCE: .XX = ± .03 UNLESS OTHERWISE SPECIFIED
3. MATERIAL: 32 AWG. POLYBOND #2.
4. SPECIFICATIONS:
- WIND APPROXIMATELY 60 TURNS TO OBTAIN 676 uH ±2%.
- INTERWINDING CAPACITANCE APPROX. 3.7 nF
- ELECTRICAL MEASUREMENTS TAKEN WITH HP 4262A LCR METER OR EQUIVALENT IN “REMOTE SENSE” MODE, MEASURED AT 100 KHZ.
5. STRIP AND TIN LEADS BACK .10”±.05”.
6. APPLY A SMALL DROP OF ADHESIVE TO SECURE COIL LEADS AT THEIR BREAK OUT LOCATIONS.
7. EACH COIL TO BE TESTED FOR SPECIFICATIONS LISTED IN NOTE 4. STATISTICAL DATA TO BE PROVIDED WITH EACH LOT.

INDALA

6850 B Santa Teresa Blvd,
SAN JOSE, CALIF. 95119
ph: (408) 361-4700
fx: (408) 361-4760

TITLE:

MISC, ASSY, COIL, EM RDR
PHASE 1

DWG SIZE	DRAWING NO.	STATUS CODE	REVISION
B	07615-001	-	A

PLOTTING SCALE: 1 of 1

FILE NAME: 07615_A.DWG

SHEET: 1 of 1

HARD COPY IS UNCONTROLLED

DRAWING NO. 07615-001

SHT: 1