



FCC TEST REPORT

REPORT NO.: RF900702R01

MODEL NO.: AP310

RECEIVED: June 11, 2001

TESTED: June 11 ~ June 13, 2001

APPLICANT: Intel Corporation

ADDRESS: DP2-303 2800 Center Drive DuPont City

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 49 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528



Lab Code: 200102-0



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS.....	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	7
3.4	DESCRIPTION OF SUPPORT UNITS.....	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST PROCEDURES.....	10
4.1.4	TEST SETUP	10
4.1.5	EUT OPERATING CONDITIONS.....	11
4.1.6	TEST RESULTS.....	12
4.2	RADIATED EMISSION MEASUREMENT	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	18
4.2.2	TEST INSTRUMENTS	19
4.2.3	TEST PROCEDURES.....	20
4.2.4	TEST SETUP	21
4.2.5	EUT OPERATING CONDITIONS.....	21
4.2.6	TEST RESULTS.....	22
4.3	6DB BANDWIDTH MEASUREMENT	27
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	27
4.3.2	TEST INSTRUMENTS	27
4.3.3	TEST PROCEDURE	28
4.3.4	TEST SETUP	28
4.3.5	EUT OPERATING CONDITIONS.....	28
4.3.6	TEST RESULTS.....	29
4.4	MAXIMUM PEAK OUTPUT POWER	33
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	33
4.4.2	TEST INSTRUMENTS	33
4.4.3	TEST PROCEDURES.....	34
4.4.4	TEST SETUP.....	34
4.4.5	EUT OPERATING CONDITIONS.....	34



4.4.6	TEST RESULTS.....	35
4.5	POWER SPECTRAL DENSITY MEASUREMENT	36
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	36
4.5.2	TEST INSTRUMENTS	36
4.5.3	TEST PROCEDURE	37
4.5.4	TEST SETUP	37
4.5.5	EUT OPERATING CONDITIONS.....	37
4.5.6	TEST RESULTS.....	38
4.6	BAND EDGES MEASUREMENT	42
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	42
4.6.2	TEST INSTRUMENTS	42
4.6.3	TEST PROCEDURE	42
4.6.4	EUT OPERATING CONDITION	43
4.6.5	TEST RESULTS.....	43
4.7	ANTENNA REQUIREMENT.....	46
4.7.1	STANDARD APPLICABLE.....	46
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	46
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	47
6	INFORMATION ON THE TESTING LABORATORIES.....	49



1 CERTIFICATION

PRODUCT : Intel AnyPoint Wireless II Network USB Adapter
BRAND NAME : Intel
MODEL NO. : AP310
APPLICANT : Intel Corporation
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from June 11, 2001 to June 13, 2001, The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

TESTED BY: Gary Chang, **DATE:** July 3, 2001
Gary Chang

CHECKED BY: Demi Chen, **DATE:** July 3, 2001
Demi Chen

APPROVED BY: Dr. Alan Lane, **DATE:** July 3, 2001
Dr. Alan Lane
Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.107	AC Power Conducted Emission Limit: 48dBuV	PASS	Meet the requirement of limit Minimum passing margin is -7.95dBuV at 2.74144MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -8.5dBuV/m at 131.98 MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Intel AnyPoint Wireless II Network USB Adapter
MODEL NO.	AP310
POWER SUPPLY	5VDC from computer
MODULATION TYPE	CCK, BPSK, QPSK
RADIO TECHNOLOGY	DSSS
TRANSFER RATE	1/2/5.5/11Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	15 dBm
ANTENNA TYPE	Dipole antenna
DATA CABLE	1.1m (Nonshielded)
I/O PORTS	USB
ASSOCIATED DEVICES	NA

NOTE: For a more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Intel Any Point Wireless II Network USB Adapter, according to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C. (15.247)
ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	IBM	TYPE2635-9AH	97-84L54	FCC DoC Approved
2	PRINTER	HP	2225C+	3123S97230	DSI6XU2225
3	MODEM	ACEEX	1414	980020510	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.45 – 30	48	-

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 6, 2001
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 9, 2001
ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 28, 2001
ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Dec. 3, 2001
EMCO-L.I.S.N. (for support units)	3825/2	9204-1964	July 9, 2001
Software	Cond-V2e	NA	NA
RF cable (JYEBAO)	RG-58A/U	Cable-C02.01	July 9, 2001
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 20, 2002
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 20, 2002
Shielded Room	Site 2	ADT-C02	NA
VCCI Site Registration No.	Site 2	C-240	NA


NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. “*” = These equipments are used for the final measurement.

4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

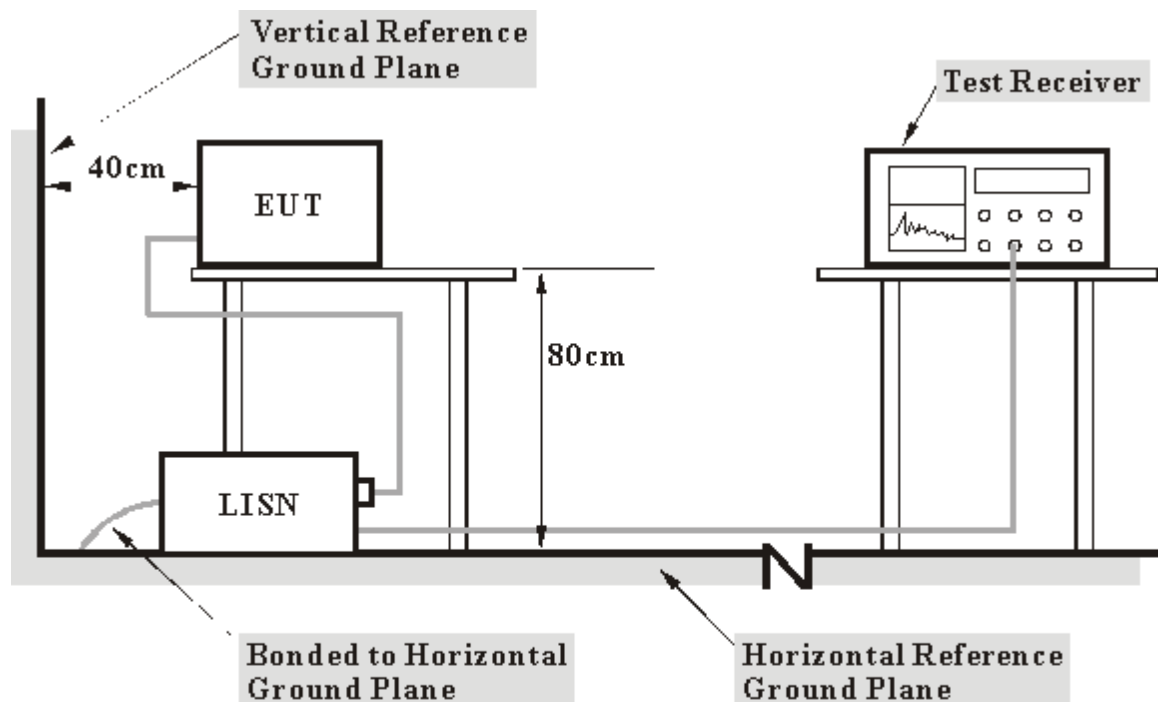

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.5 EUT OPERATING CONDITIONS

- a. Connected the EUT to a computer system placed on a testing table.
- b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.


4.1.6 TEST RESULTS

EUT	Intel AnyPoint Wireless II Network USB Adapter	MODEL	AP310
MODE	Channel 1	6dB BANDWIDTH	10 kHz
INPUT POWER	110Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	30 deg. C, 65%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.49800	0.20	25.37	-	25.57	-	48.00	-	-22.43	-
2	2.08244	0.21	27.42	-	27.63	-	48.00	-	-20.37	-
3	2.38500	0.24	29.24	-	29.48	-	48.00	-	-18.52	-
4	2.67743	0.27	39.11	-	39.38	-	48.00	-	-8.62	-
5	9.04693	0.65	34.18	-	34.83	-	48.00	-	-13.17	-
6	12.16181	0.83	33.56	-	34.39	-	48.00	-	-13.61	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

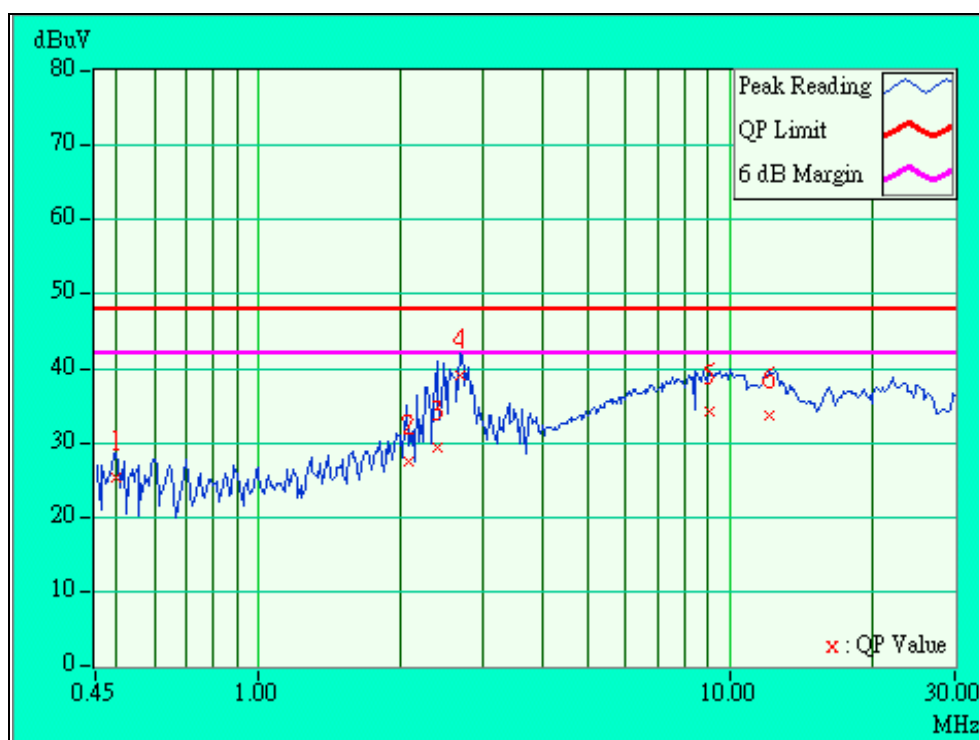


EUT	Intel AnyPoint Wireless II Network USB Adapter	MODEL	AP310
MODE	Channel 1	6dB BANDWIDTH	10 kHz
INPUT POWER	110Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	30 deg. C, 65%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	2.26581	0.23	32.51	-	32.74	-	48.00	-	-15.26	-
2	2.26581	0.23	32.33	-	32.56	-	48.00	-	-15.44	-
3	2.56243	0.26	39.01	-	39.27	-	48.00	-	-8.73	-
4	9.49690	0.58	33.68	-	34.26	-	48.00	-	-13.74	-
5	12.32000	0.74	32.83	-	33.57	-	48.00	-	-14.43	-
6	25.32236	1.31	30.89	-	32.20	-	48.00	-	-15.80	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

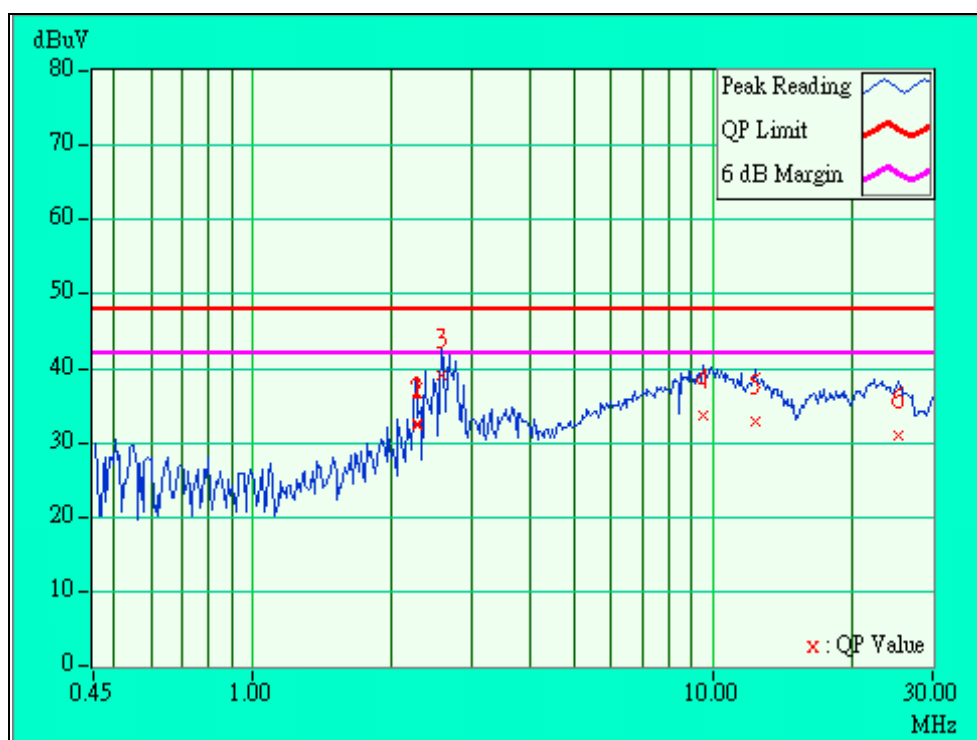


EUT	Intel AnyPoint Wireless II Network USB Adapter	MODEL	AP310
MODE	Channel 6	6dB BANDWIDTH	10 kHz
INPUT POWER	110Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	30 deg. C, 65%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.50344	0.20	26.03	-	26.23	-	48.00	-	-21.77	-
2	2.57644	0.26	38.04	-	38.30	-	48.00	-	-9.70	-
3	3.46200	0.35	31.60	-	31.95	-	48.00	-	-16.05	-
4	8.33300	0.62	32.13	-	32.75	-	48.00	-	-15.25	-
5	12.26163	0.84	33.56	-	34.40	-	48.00	-	-13.60	-
6	23.70535	1.32	30.93	-	32.25	-	48.00	-	-15.75	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

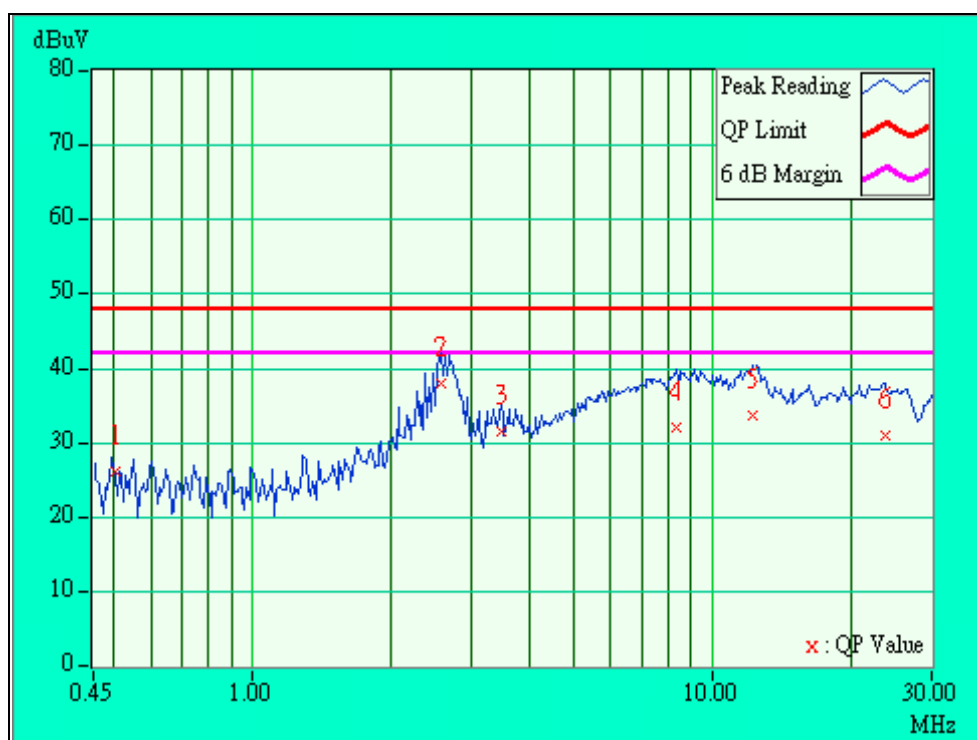


EUT	Intel AnyPoint Wireless II Network USB Adapter	MODEL	AP310
MODE	Channel 6	6dB BANDWIDTH	10 kHz
INPUT POWER	110Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	28 deg. C, 60%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.65100	0.20	24.38	-	24.58	-	48.00	-	-23.42	-
2	2.27700	0.23	31.45	-	31.68	-	48.00	-	-16.32	-
3	2.57650	0.26	38.08	-	38.34	-	48.00	-	-9.66	-
4	3.72636	0.37	33.16	-	33.53	-	48.00	-	-14.47	-
5	12.46700	0.75	34.25	-	35.00	-	48.00	-	-13.00	-
6	22.40900	1.14	31.14	-	32.28	-	48.00	-	-15.72	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

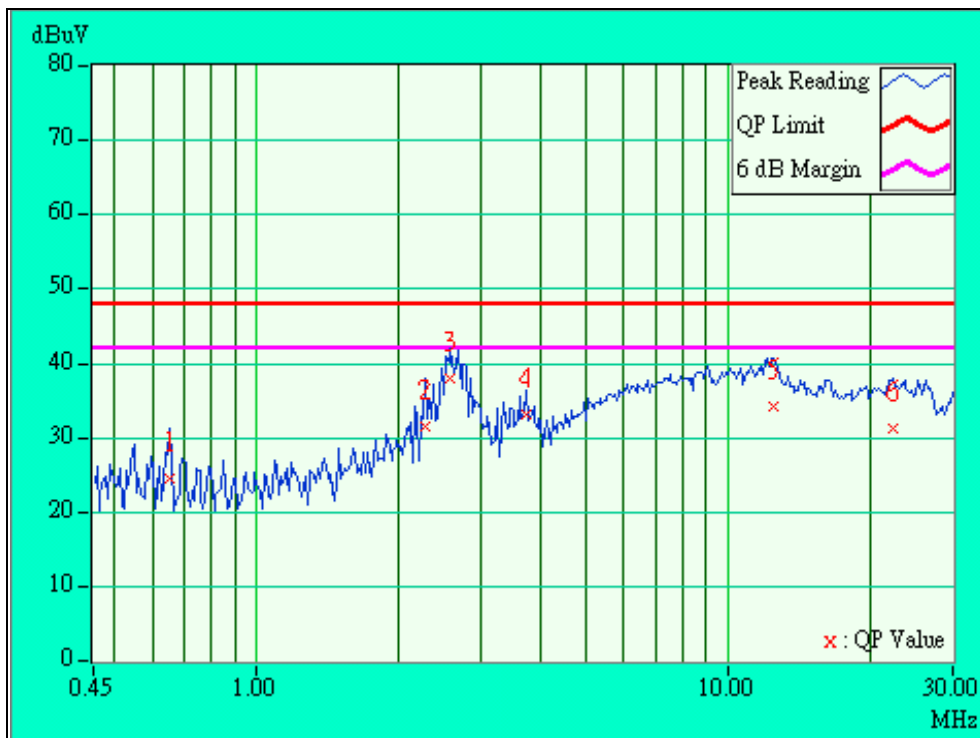


EUT	Intel AnyPoint Wireless II Network USB Adapter	MODEL	AP310
MODE	Channel 11	6dB BANDWIDTH	10 kHz
INPUT POWER	110Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	30 deg. C, 65%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.50400	0.20	25.35	-	25.55	-	48.00	-	-22.45	-
2	2.74144	0.27	39.78	-	40.05	-	48.00	-	-7.95	-
3	3.46326	0.35	30.62	-	30.97	-	48.00	-	-17.03	-
4	10.23800	0.71	33.62	-	34.33	-	48.00	-	-13.67	-
5	12.09200	0.83	33.22	-	34.05	-	48.00	-	-13.95	-
6	23.69600	1.32	30.54	-	31.86	-	48.00	-	-16.14	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

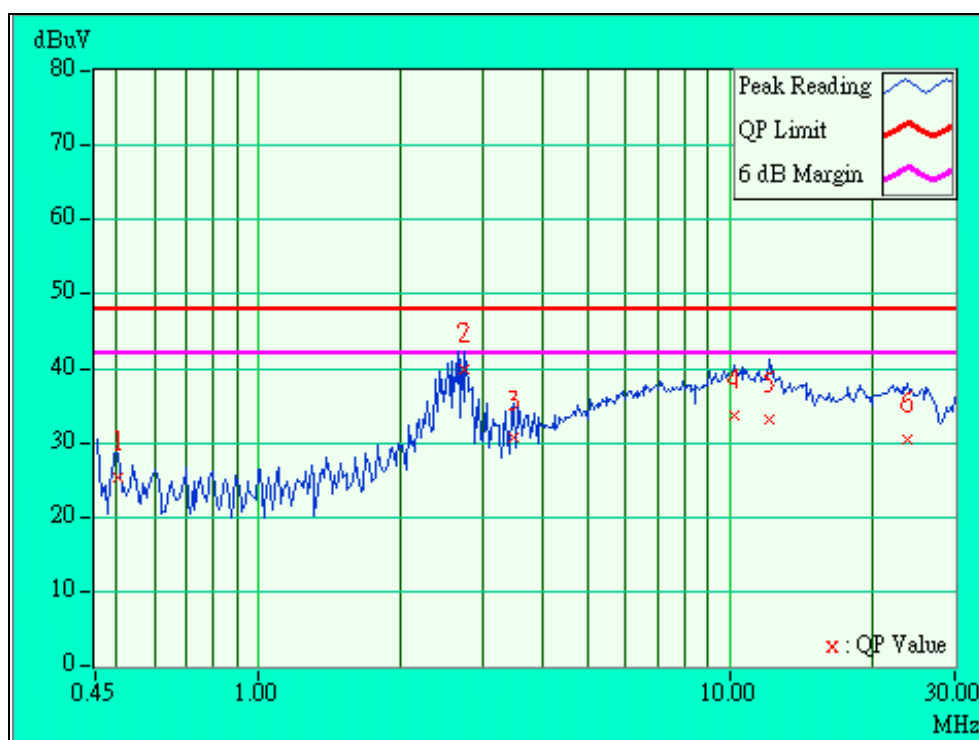


EUT	Intel AnyPoint Wireless II Network USB Adapter	MODEL	AP310
MODE	Channel 11	6dB BANDWIDTH	10 kHz
INPUT POWER	110Vac, 60 Hz	PHASE	Netural (N)
ENVIRONMENTAL CONDITIONS	30 deg. C, 65%RH, 1005 hPa	TESTED BY: Gary Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.54600	0.20	25.71	-	25.91	-	48.00	-	-22.09	-
2	2.68581	0.27	39.27	-	39.54	-	48.00	-	-8.46	-
3	3.72000	0.37	33.42	-	33.79	-	48.00	-	-14.21	-
4	12.53600	0.75	33.36	-	34.11	-	48.00	-	-13.89	-
5	16.38800	0.93	30.22	-	31.15	-	48.00	-	-16.85	-
6	23.66900	1.22	30.98	-	32.20	-	48.00	-	-15.80	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

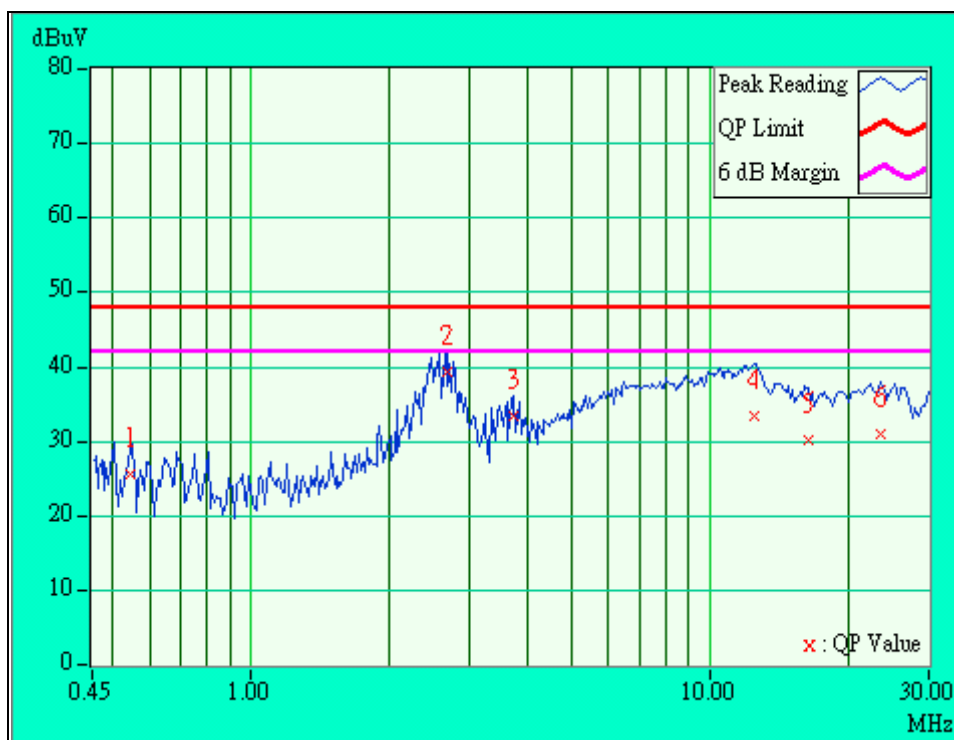

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	uV/m	dBuV/m
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
*HP Spectrum Analyzer	8590L	3544A01176	May 7, 2002
*HP Preamplifier	8447D	2944A08485	Nov. 4, 2001
* HP Preamplifier	8449B	3008A01201	Dec. 13, 2001
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 25, 2002
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2001
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 4, 2001
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	AS61D	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Aug. 4, 2001
* TIMES RF cable	LMR-600	CABLE-ST5-01	Aug. 4, 2001
* Antenna (Horn)	BBHA9120-D	D130	July 10, 2001
Open Field Test Site	Site 5	ADT-R05	July 28, 2001
Site Registration No.	FCC: 90422 Canada IC: IC 3789 VCCI : R-1039		

NOTE:

1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. "*" = These equipments are used for the final measurement.




4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

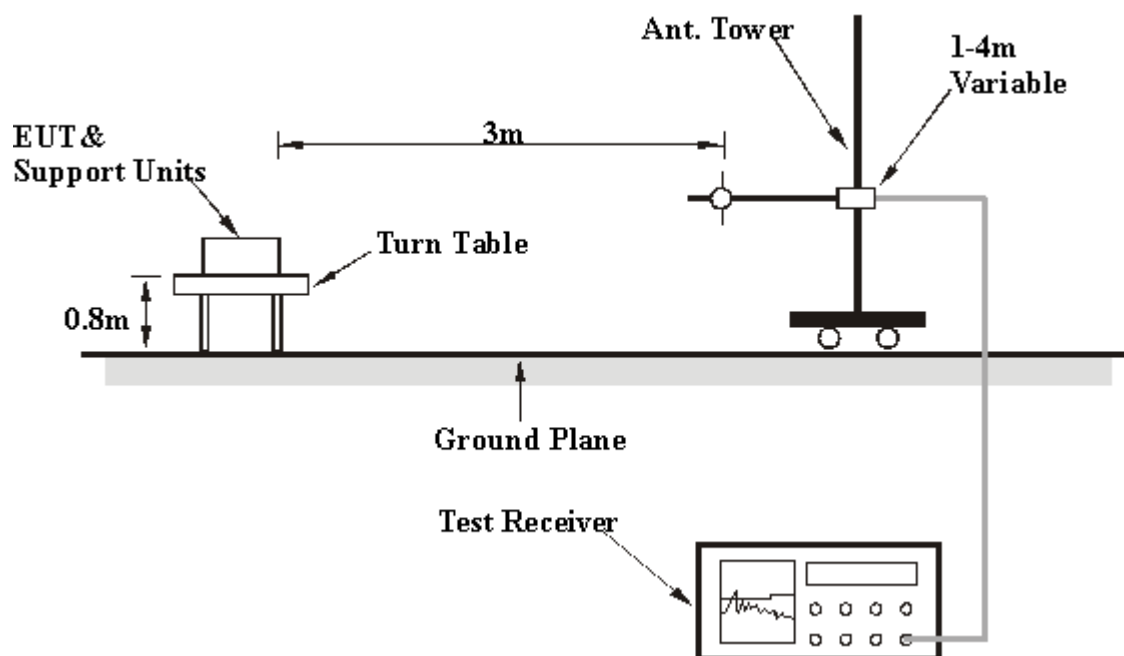

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.

4.2.6 TEST RESULTS

EUT	Intel AnyPoint Wireless II Network USB Adapter	MODEL	AP310
MODE	11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	30 deg. C, 65 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	132.45	32.2 QP	43.50	-11.30	1.00H	265	18.70	10.97	2.52	0.00	-13.49
2	144.05	31.2 QP	43.50	-12.30	1.00H	230	18.20	10.43	2.58	0.00	-13.00
3	176.52	30.8 QP	43.50	-12.70	1.00H	303	19.40	8.73	2.65	0.00	-11.38
4	220.45	32.1 QP	46.00	-13.90	1.00H	168	19.50	9.73	2.83	0.00	-12.56
5	288.05	33.3 QP	46.00	-12.70	1.00H	8	17.90	12.35	3.04	0.00	-15.39
6	747.12	37.3 QP	46.00	-8.70	1.47H	96	14.30	18.80	4.21	0.00	-23.03
7	792.35	36.9 QP	46.00	-9.10	1.68H	8	13.70	19.10	4.10	0.00	-23.21

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.

EUT	Intel AnyPoint Wireless II Network USB Adapter	MODEL	AP310
MODE	11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	30 deg. C, 65 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	131.98	35.0 QP	43.50	-8.50	1.00V	35	21.50	10.97	2.52	0.00	-13.49
2	176.23	30.6 QP	43.50	-12.90	1.00V	3	19.20	8.73	2.65	0.00	-11.39
3	220.42	30.1 QP	46.00	-15.90	1.00V	343	17.50	9.73	2.83	0.00	-12.56
4	264.10	32.4 QP	46.00	-13.60	1.00V	277	17.40	12.00	2.96	0.00	-14.96
5	748.21	35.4 QP	46.00	-10.60	1.78V	20	12.40	18.80	4.21	0.00	-23.03
6	792.35	34.4 QP	46.00	-11.60	1.72V	6	11.20	19.10	4.10	0.00	-23.21

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.

EUT	Intel AnyPoint Wireless II Network USB Adapter	MODEL	AP310
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30 deg. C, 65 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2038.10	49.0 PK	74.00	-25.00	1.21H	191	18.18	27.57	3.29	0.00	-30.86
2	*2413.40	93.2 AV	NA	NA	1.07H	97	61.20	28.33	3.62	0.00	-31.95.
3	*2413.40	101.0 PK	NA	NA	1.07H	97	69.00	28.33	3.62	0.00	-31.95.
4	4076.20	53.3 PK	54.00	-20.70	1.76H	201	16.09	32.40	4.77	0.00	-37.17
5	4824.10	52.9 PK	54.00	-21.10	1.27H	148	14.70	32.99	5.21	0.00	-38.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2038.00	49.4 PK	74.00	-24.60	1.04V	57	18.58	27.57	3.29	0.00	-30.86
2	*2413.20	94.7 PK	NA	NA	1.86V	255	62.75	28.33	3.62	0.00	-31.96
3	*2413.20	86.6 AV	NA	NA	1.86V	255	54.68	28.33	3.62	0.00	-31.96
4	4076.20	53.4 PK	74.00	-20.60	1.00V	76	16.20	32.40	4.77	0.00	-37.17
5	4824.30	52.0 PK	74.00	-22.00	1.02V	167	13.80	32.99	5.21	0.00	-38.20

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " * " : Fundamental frequency
5. The other emission levels were very low against the limit.

EUT	Intel AnyPoint Wireless II Network USB Adapter	MODEL	AP310
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30 deg. C, 65 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2062.30	48.9 PK	74.00	-25.10	1.24H	188	17.97	27.61	3.31	0.00	-30.92
2	*2436.40	100.9 PK	NA	NA	1.00H	267	70.00	27.61	3.31	0.00	-30.93
3	*2436.40	91.9 AV	NA	NA	1.00H	267	61.00	27.61	3.31	0.00	-30.93
4	4126.10	52.9 PK	74.00	-21.10	1.00H	195	15.69	32.40	4.79	0.00	-37.19
5	4874.20	52.4 PK	74.00	-21.60	1.16H	45	14.10	33.07	5.25	0.00	-38.32
6	4874.60	43.6 AV	54.00	-30.40	1.00H	164	5.28	33.07	5.25	0.00	-38.31

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2062.30	50.0 PK	74.00	-24.00	1.52V	173	19.10	27.61	3.31	0.00	-30.92
2	*2436.40	98.3 PK	NA	NA	1.48V	211	66.33	28.38	3.64	0.00	-32.03
3	*2436.40	89.4 AV	NA	NA	1.48V	211	57.39	28.38	3.64	0.00	-32.03
4	4126.30	53.3 PK	74.00	-20.70	1.07V	250	16.12	32.40	4.79	0.00	-37.19
5	4874.10	52.5 PK	74.00	-21.50	1.06V	315	14.20	33.07	5.25	0.00	-38.31

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " * " : Fundamental frequency
5. The other emission levels were very low against the limit.

EUT	Intel AnyPoint Wireless II Network USB Adapter	MODEL	AP310
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30 deg. C, 65 % RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2088.00	48.8 PK	74.00	-25.20	1.54H	203	17.85	27.66	3.33	0.00	-30.99
2	*2463.20	100.3 PK	NA	NA	1.00H	259	68.26	28.42	3.66	0.00	-32.09
3	*2463.20	92.7 AV	NA	NA	1.00H	259	60.62	28.42	3.66	0.00	-32.09
4	2484.20	51.5 PK	74.00	-22.50	1.52H	322	19.40	28.47	3.68	0.00	-32.15
5	4176.20	53.1 PK	74.00	-20.90	1.01H	193	15.90	32.40	4.81	0.00	-37.21
6	4924.40	52.7 PK	74.00	-21.30	1.45H	132	14.30	33.15	5.28	0.00	-38.43

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB/m)
1	2087.90	47.8 PK	74.00	-26.20	1.79V	263	16.83	27.66	3.33	0.00	-30.99
2	*2463.20	101.7 PK	NA	NA	1.84V	245	69.58	28.42	3.66	0.00	-32.09
3	*2463.20	93.0 AV	NA	NA	1.84V	245	60.90	28.42	3.66	0.00	-32.09
4	2483.50	53.5 PK	74.00	-20.50	1.59V	295	21.40	28.47	3.68	0.00	-32.15
5	4176.20	52.6 PK	74.00	-21.40	2.00V	326	15.38	32.40	4.81	0.00	-37.21
6	4924.40	53.6 PK	74.00	-20.40	1.19V	275	15.20	33.15	5.28	0.00	-38.43

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " * " : Fundamental frequency
5. The other emission levels were very low against the limit.

4.3 6DB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ TEST RECEIVER	ESMI	839379/002	Dec. 28, 2001
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7475A	2641V27755	N/A


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.6 TEST RESULTS


EUT	Intel AnyPoint Wireless II Network USB Adapter	MODEL	AP310
INPUT POWER (SYSTEM)	110Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	30 deg. C, 65%RH, 1005 hPa
TESTED BY: Gary Chang			

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	10.18	0.5	PASS
6	2437	10.00	0.5	PASS
11	2462	10.00	0.5	PASS


CH1

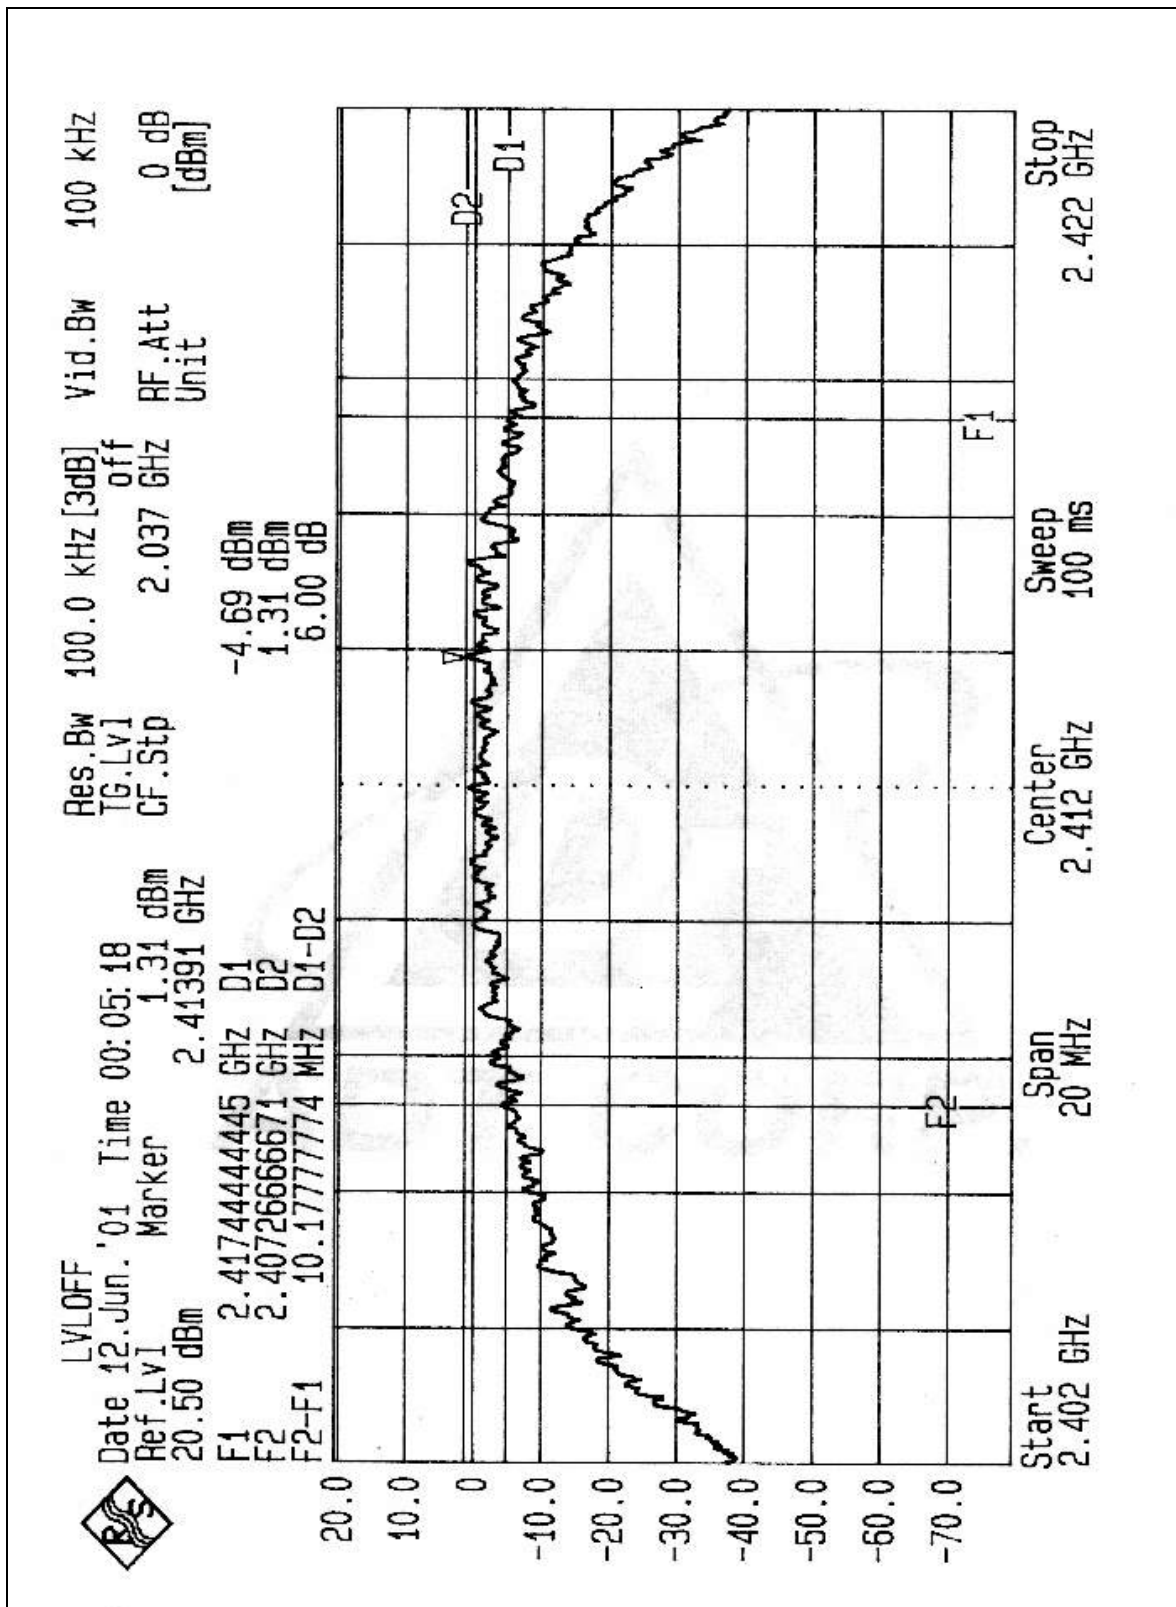

CH6

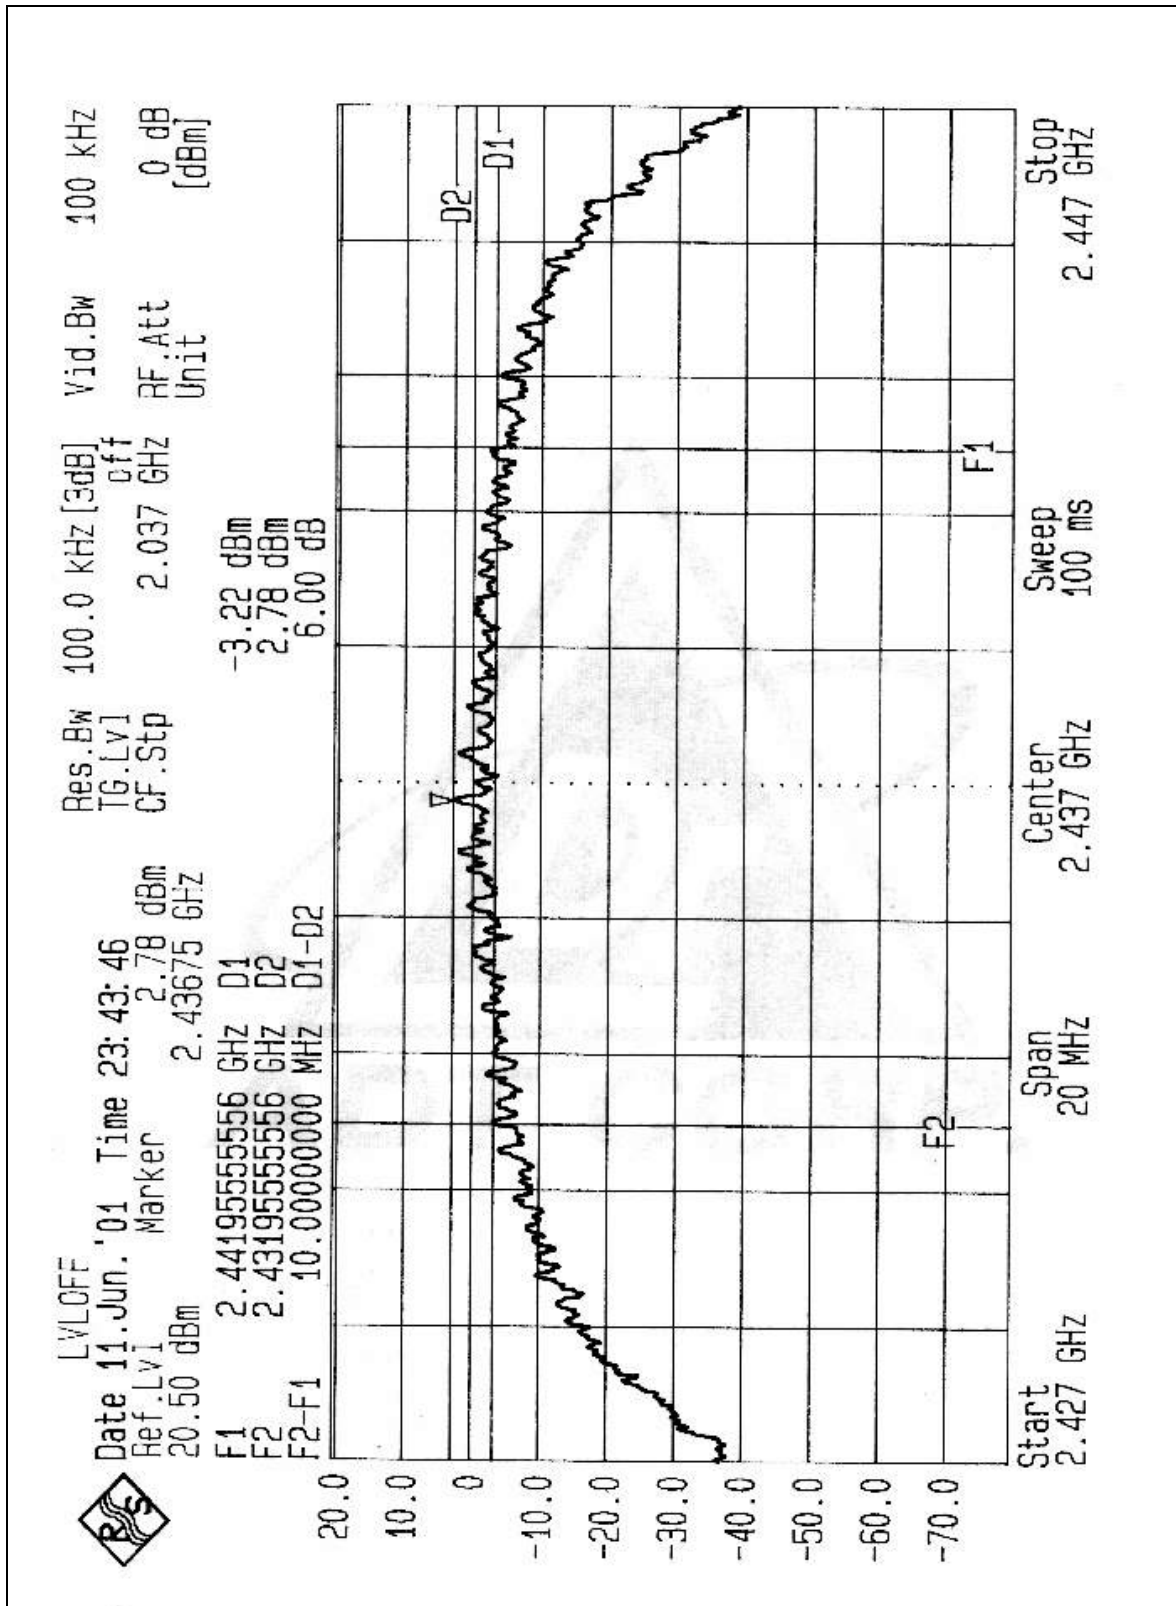

CH11

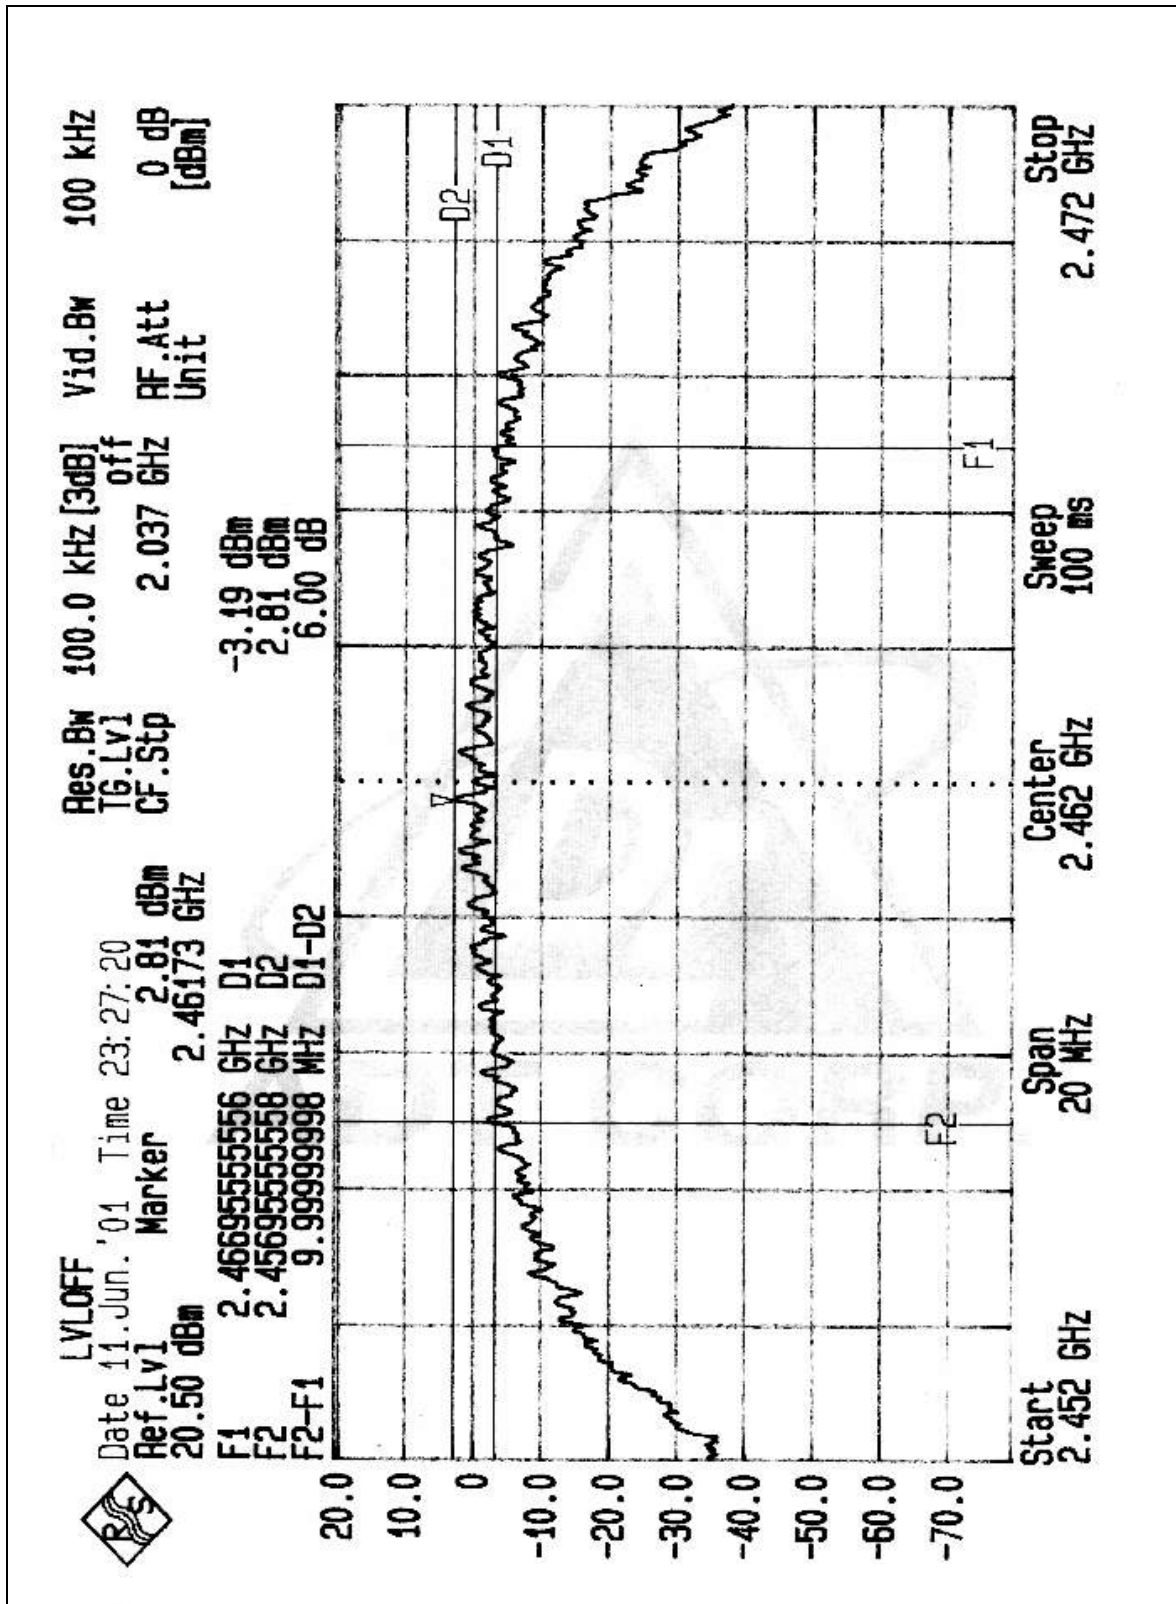

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ TEST RECEIVER	ESMI	839379/002	Dec. 28, 2001
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7475A	2641V27755	N/A

NOTE:


1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

- a. The transmitter output was connected to the spectrum analyzer through an attenuator.
- b. The center frequency of the spectrum analyzer was set to the fundamental frequency and using 3 MHz RBW and 3 MHz VBW.
- c. The span of the spectrum analyzer should be larger than 6dB BandWidth plus 10MHz.
- d. Used Peak Search to read the peak power after Maximum Hold function was activated.
- e. Shifted the marker to +/- 3MHz and +/-6MHz, and recorded the reading.
- f. The Maximum Peak Output Power was the linear summation of the 5 readings in (4) and (5).

NOTE: This measurement is the total power of 15MHz bandwidth which is far more wider than 6dB bandwidth.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5

4.4.6 TEST RESULTS

EUT	Intel AnyPoint Wireless II Network USB Adapter	MODEL	AP310
INPUT POWER (SYSTEM)	110Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	30 deg. C, 65%RH, 1005 hPa
TESTED BY: Gary Chang			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	17.85	30	PASS
6	2437	18.03	30	PASS
11	2462	18.13	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ TEST RECEIVER	ESMI	839379/002	Dec. 28, 2001
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7475A	2641V27755	N/A


NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITIONS


Same as 4.3.5

4.5.6 TEST RESULTS


EUT	Intel AnyPoint Wireless II Network USB Adapter	MODEL	AP310
INPUT POWER (SYSTEM)	110Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	30 deg. C, 65%RH, 1005 hPa
TESTED BY: Gary Chang			

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.24	8	PASS
6	2437	-12.61	8	PASS
11	2462	-12.05	8	PASS

CH1

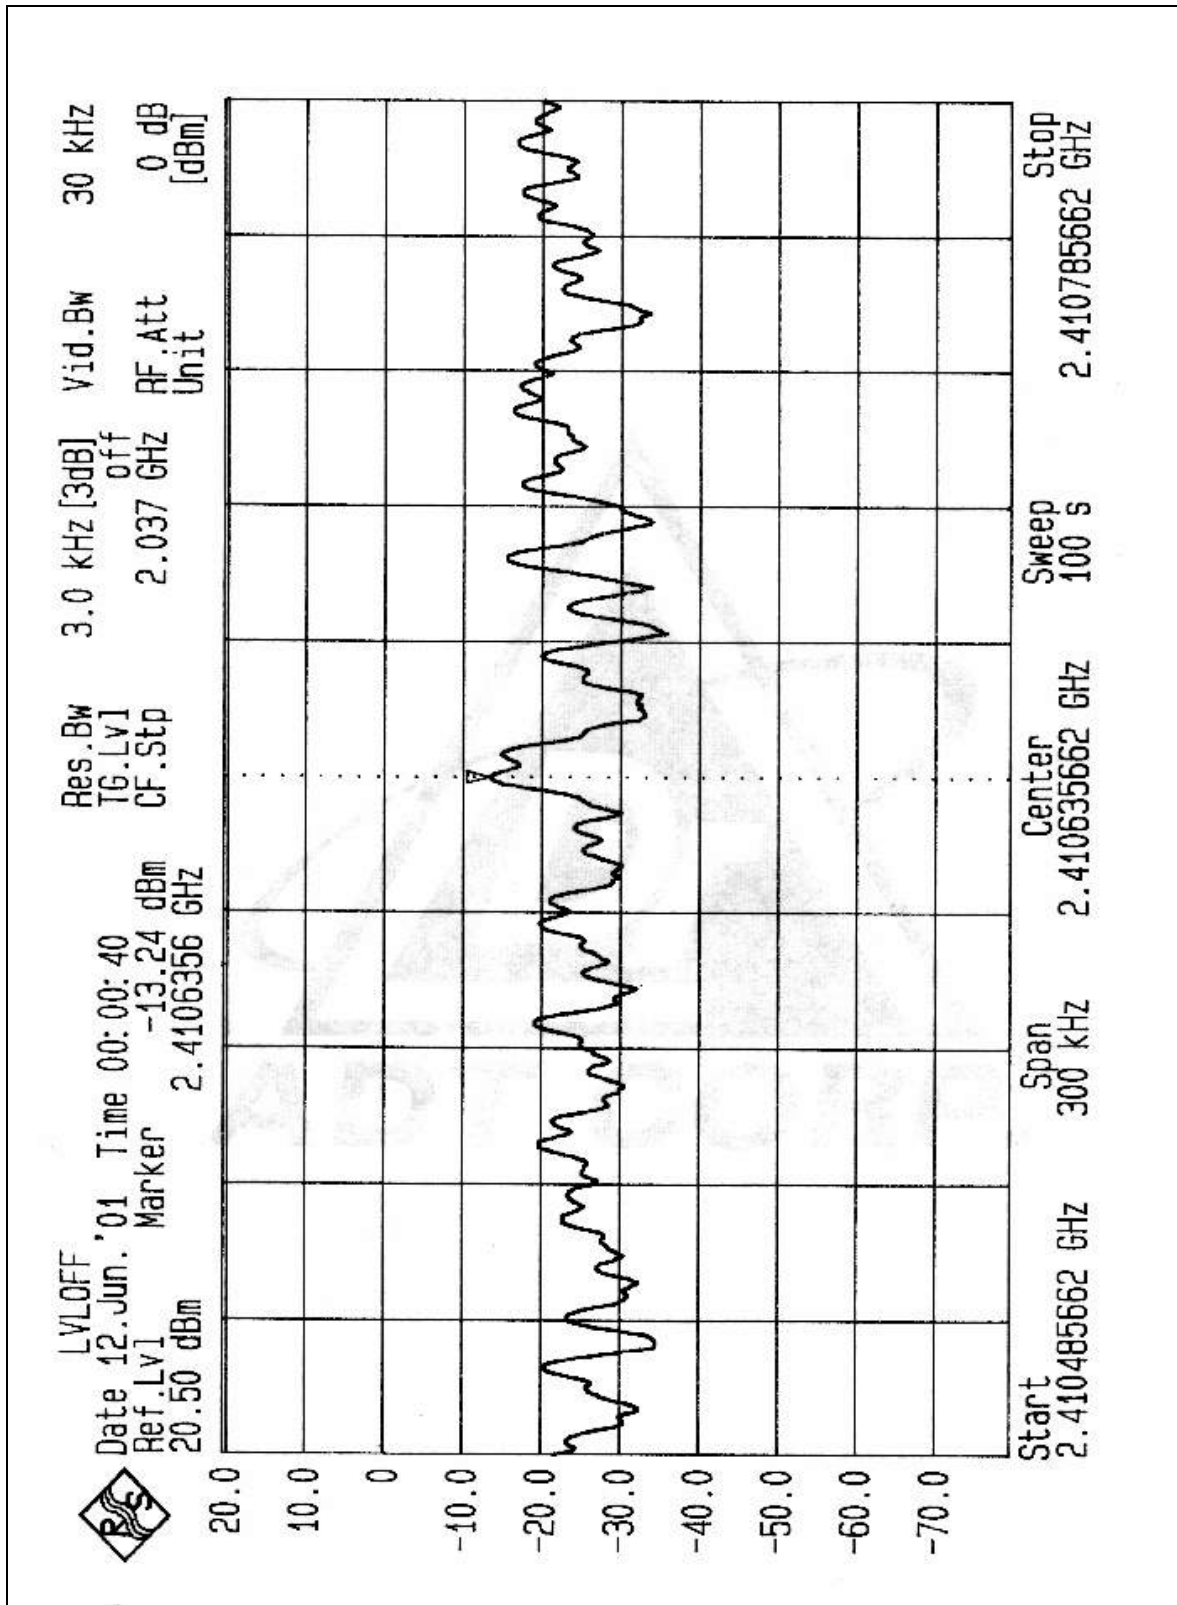

CH6

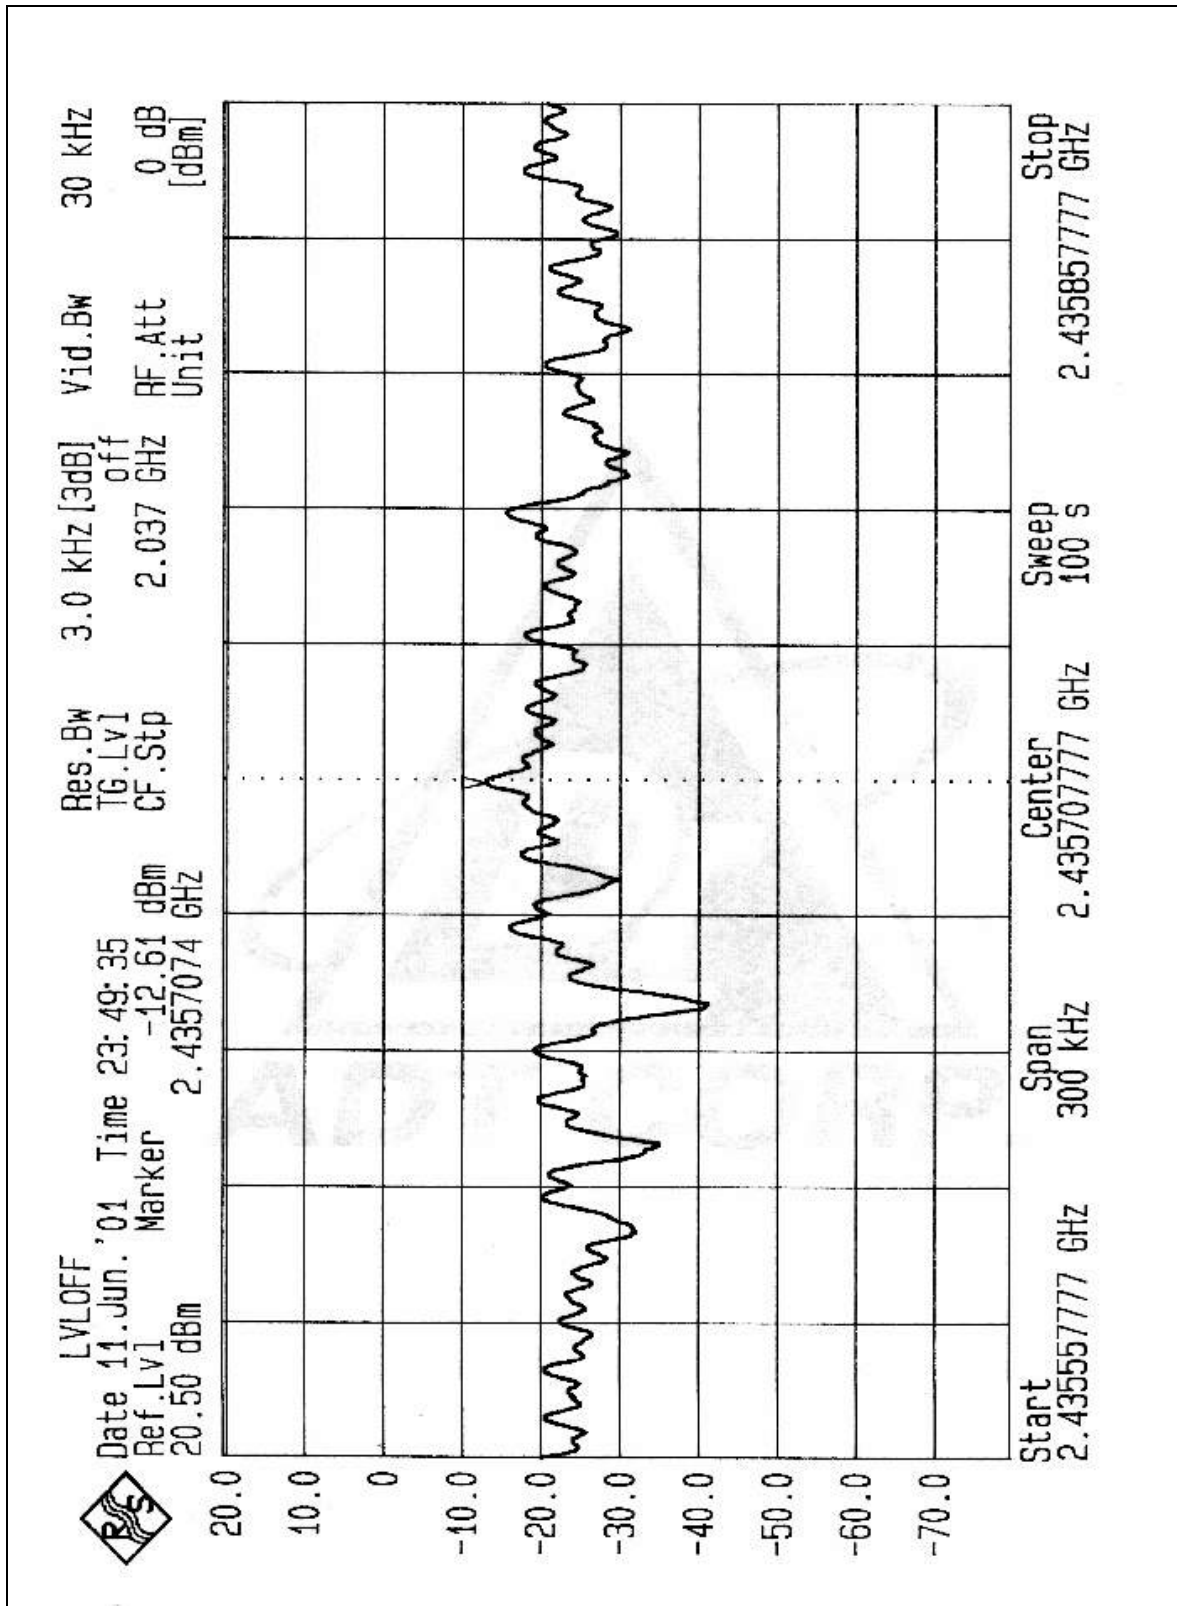

CH11

