Mode	24	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz	
ANT	CDD 1S4T	
Pol.	Vertical	Fundamental
Peak	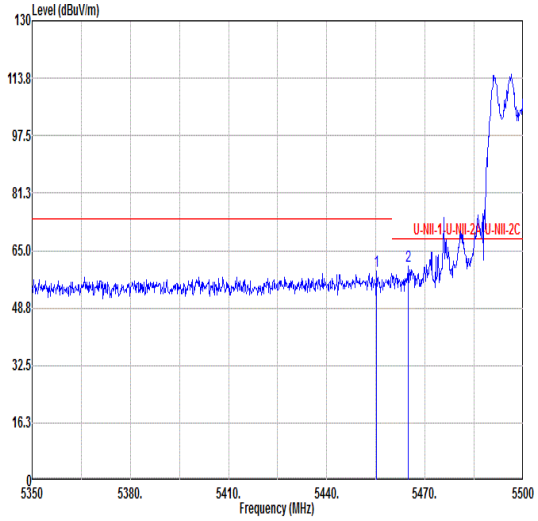 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5455.15 59.25 74.00 -14.75 46.52 34.70 10.02 31.99 0.00 246 178 PEAK 2 5464.90 60.49 68.20 -7.71 47.75 34.70 10.03 31.99 0.00 246 178 PEAK	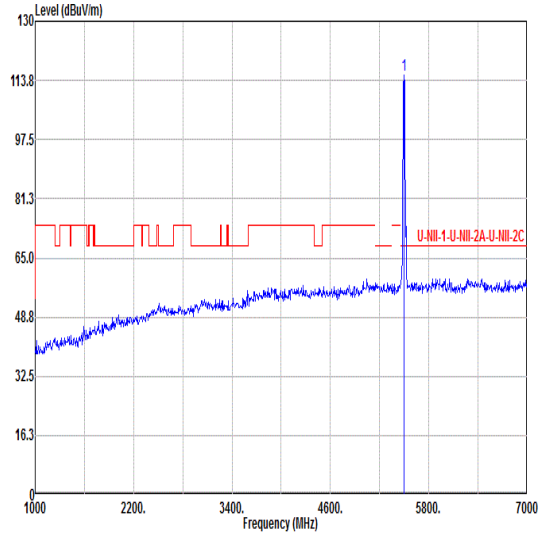 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 115.04 ------ ------ 102.26 34.70 10.09 32.01 0.00 246 178 PEAK
Avg	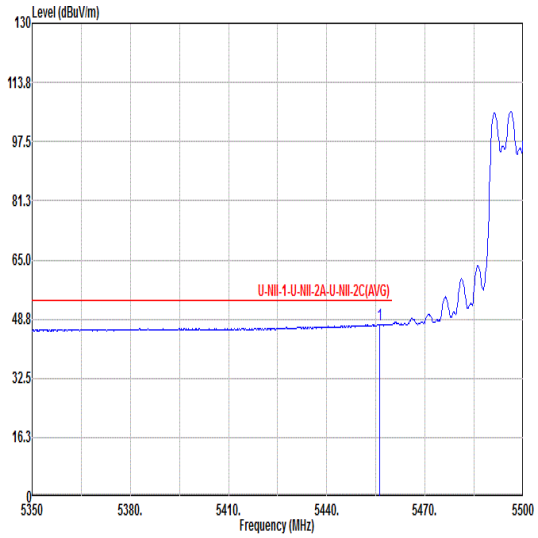 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5456.05 47.38 54.00 -6.62 34.65 34.70 10.02 31.99 0.00 246 178 AVERAGE	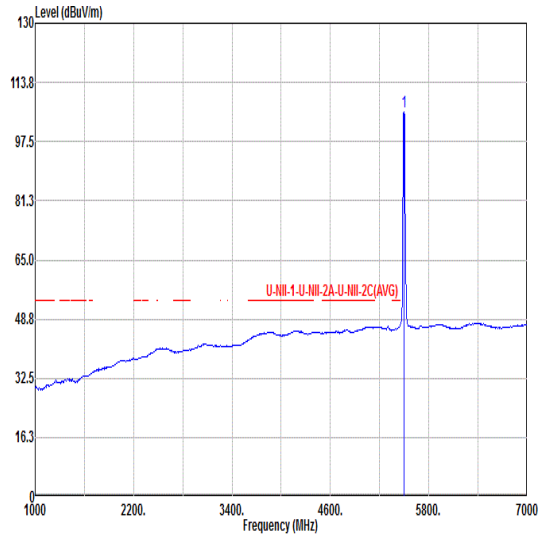 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 105.58 ------ ------ 92.81 34.70 10.08 32.01 0.00 246 178 AVERAGE

Mode	24	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	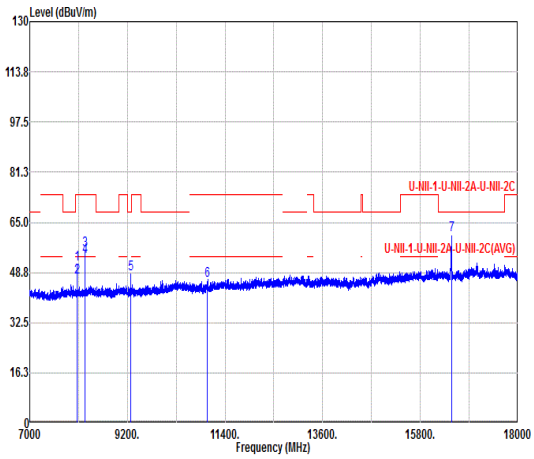 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8068.10 51.29 74.00 -22.71 68.50 36.17 13.42 66.80 0.00 292 294 Peak 2 8068.10 47.34 54.00 -6.66 64.55 36.17 13.42 66.80 0.00 292 294 Average 3 8249.60 55.90 74.00 -18.10 72.68 36.40 13.63 66.81 0.00 301 60 Peak 4 8249.60 53.89 54.00 -0.11 70.67 36.40 13.63 66.81 0.00 301 60 Average 5 9271.50 48.33 68.20 -19.87 64.18 36.54 14.53 66.92 0.00 -- -- Peak 6 11000.00 46.14 74.00 -27.86 58.67 37.90 16.04 66.47 0.00 -- -- PEAK 7 16500.00 60.83 68.20 -7.37 64.48 40.90 19.68 64.23 0.00 300 47 PEAK	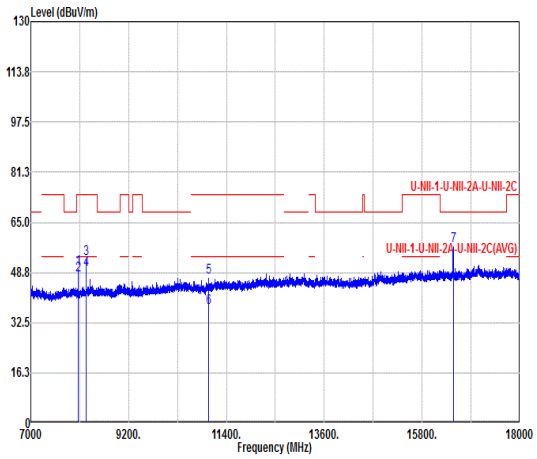 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8068.10 49.90 74.00 -24.10 67.11 36.17 13.42 66.80 0.00 254 311 Peak 2 8068.10 47.79 54.00 -6.21 65.00 36.17 13.42 66.80 0.00 254 311 Average 3 8249.60 53.21 74.00 -20.79 69.99 36.40 13.63 66.81 0.00 322 0 Peak 4 8249.60 49.75 54.00 -4.25 66.53 36.40 13.63 66.81 0.00 322 0 Average 5 11000.00 47.09 74.00 -26.91 59.62 37.90 16.04 66.47 0.00 100 0 PEAK 6 11000.00 37.21 54.00 -16.79 49.74 37.90 16.04 66.47 0.00 100 0 AVERAGE 7 16500.00 57.30 68.20 -10.90 60.95 40.90 19.67 64.22 0.00 197 24 PEAK
Peak Avg	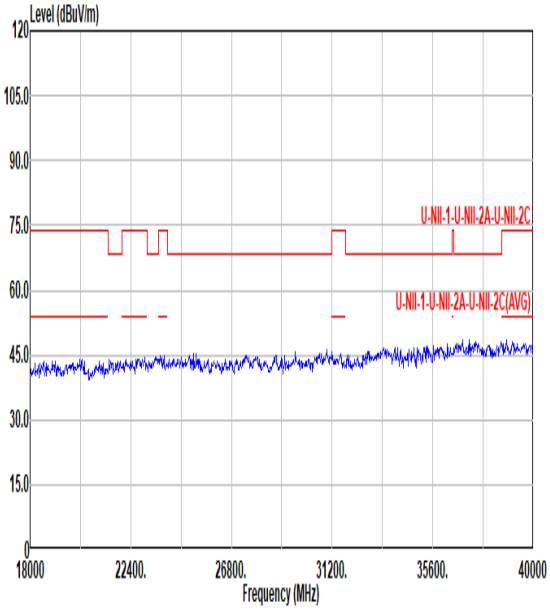	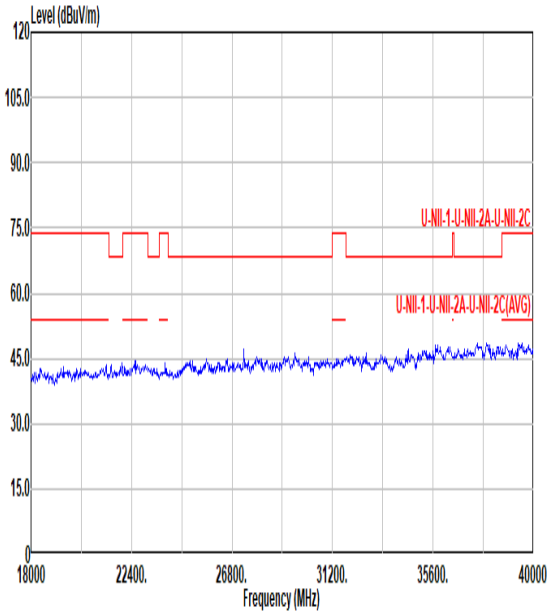

Mode	25	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	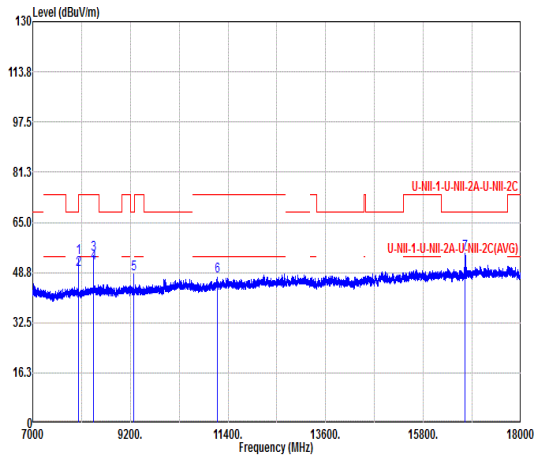 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8035.10 53.65 74.00 -20.35 70.91 36.14 13.39 66.79 0.00 217 302 Peak 2 8035.10 49.53 54.00 -4.47 66.79 36.14 13.39 66.79 0.00 217 302 Average 3 8370.60 54.68 74.00 -19.32 71.39 36.33 13.79 66.83 0.00 252 68 Peak 4 8370.60 51.85 54.00 -2.15 68.56 36.33 13.79 66.83 0.00 252 68 Average 5 9272.60 48.42 68.20 -19.78 64.26 36.55 14.53 66.92 0.00 -- -- Peak 6 11160.00 47.40 74.00 -26.60 59.62 38.03 16.15 66.40 0.00 -- -- PEAK 7 16731.70 54.85 68.20 -13.35 58.23 41.09 19.83 64.30 0.00 -- -- Peak	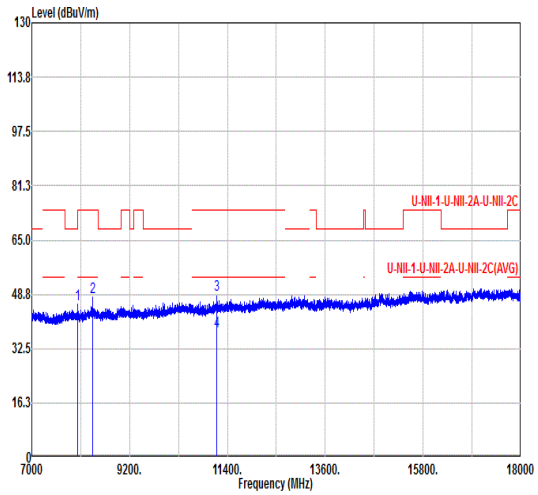 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8035.10 45.73 74.00 -28.27 62.99 36.14 13.39 66.79 0.00 -- -- Peak 2 8369.50 47.74 74.00 -26.26 64.45 36.33 13.79 66.83 0.00 -- -- Peak 3 11160.00 48.51 74.00 -25.49 60.73 38.03 16.15 66.40 0.00 300 0 PEAK 4 11160.00 37.84 54.00 -16.16 50.06 38.03 16.15 66.40 0.00 300 0 AVERAGE

Mode	26	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Fundamental
Peak	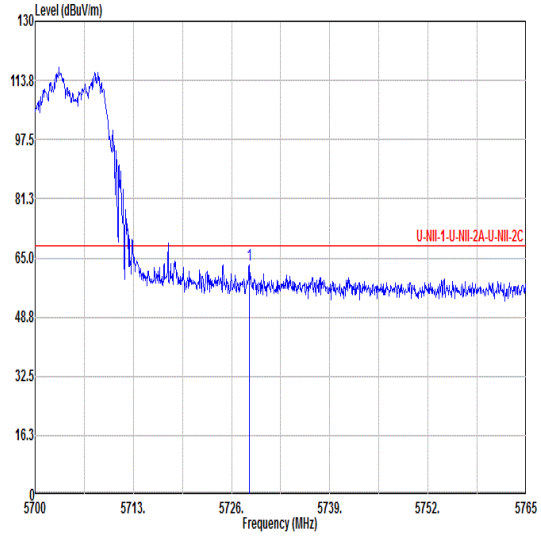 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5728.34 63.21 68.20 -4.99 50.25 34.64 10.35 32.03 0.00 126 269 PEAK	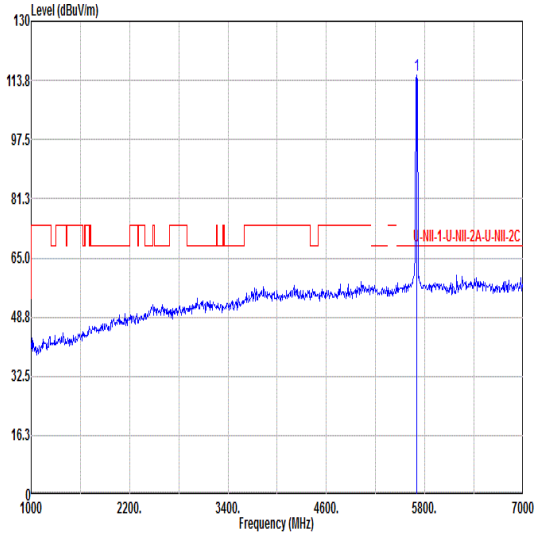 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 115.21 ------ ------ 102.24 34.70 10.32 32.05 0.00 126 269 PEAK
Avg	Blank	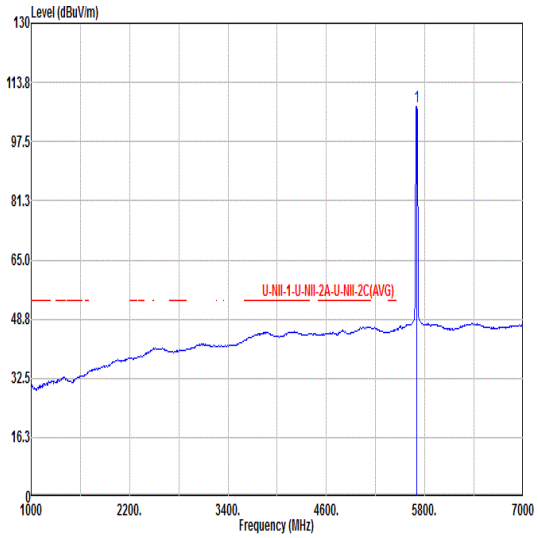 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 107.05 ------ ------ 94.08 34.70 10.32 32.05 0.00 126 269 AVERAGE

Mode	26	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz	
ANT	CDD 1S4T	
Pol.	Vertical	Fundamental
Peak	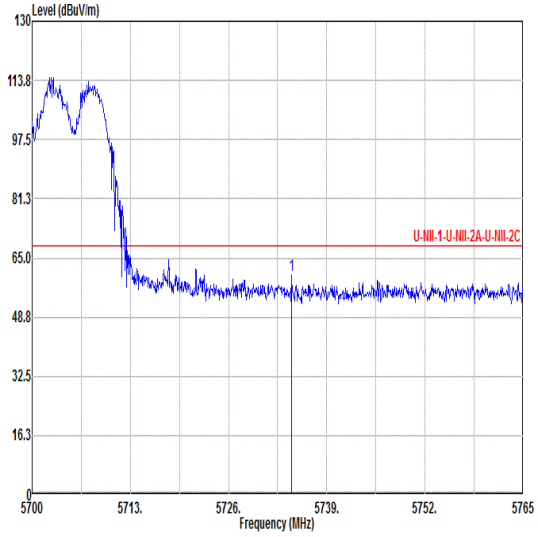 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5734.32 60.13 68.20 -8.07 47.17 34.63 10.35 32.02 0.00 271 0 PEAK	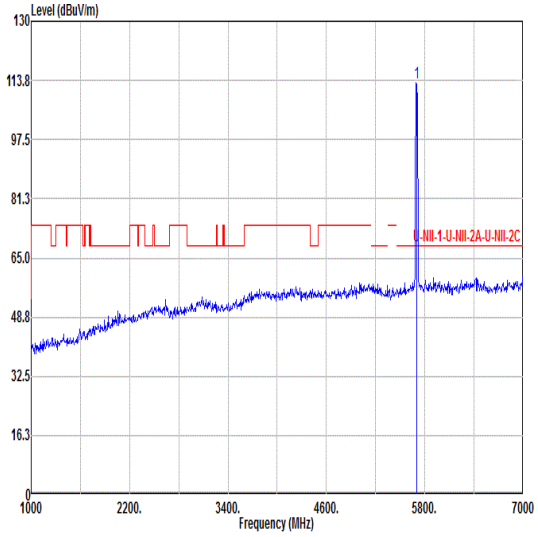 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 112.91 ------ ------ 99.97 34.68 10.32 32.06 0.00 271 0 PEAK
Avg	Blank	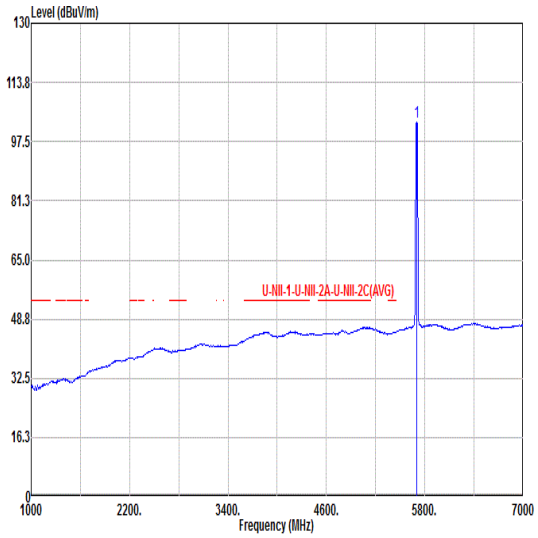 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 102.78 ------ ------ 89.81 34.70 10.32 32.05 0.00 271 0 AVERAGE

Mode	26	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	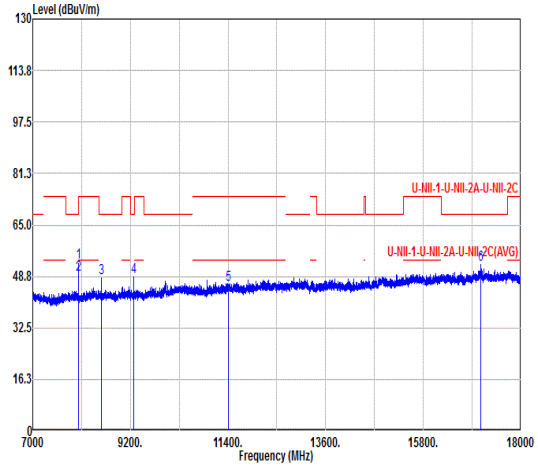 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8035.10 53.23 74.00 -20.77 70.49 36.14 13.39 66.79 0.00 217 302 Peak 2 8035.10 49.23 54.00 -4.77 66.49 36.14 13.39 66.79 0.00 217 302 Average 3 8549.90 48.25 68.20 -19.95 64.97 36.25 13.89 66.86 0.00 -- -- Peak 4 9272.60 48.45 68.20 -19.75 64.29 36.55 14.53 66.92 0.00 -- -- Peak 5 11400.00 46.19 74.00 -27.81 57.96 38.22 16.30 66.29 0.00 -- -- PEAK 6 17101.30 52.59 68.20 -15.61 55.71 41.28 20.07 64.47 0.00 -- -- Peak	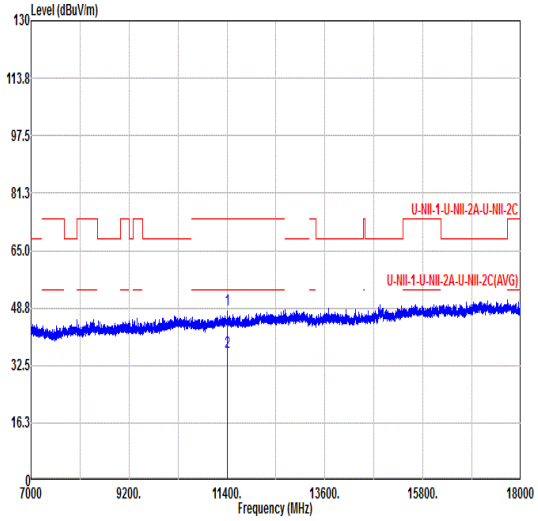 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11400.00 48.15 74.00 -25.85 59.92 38.22 16.30 66.29 0.00 300 0 PEAK 2 11400.00 36.37 54.00 -17.63 48.14 38.22 16.30 66.29 0.00 300 0 AVERAGE

Mode	27	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_Full RU_5720MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	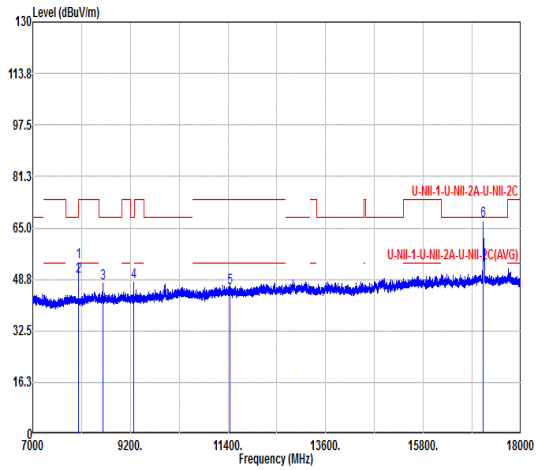 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8035.10 54.18 74.00 -19.82 71.44 36.14 13.39 66.79 0.00 217 302 Peak 2 8035.10 49.73 54.00 -4.27 66.99 36.14 13.39 66.79 0.00 217 302 Average 3 8579.60 47.42 68.20 -20.78 64.17 36.22 13.90 66.87 0.00 -- -- Peak 4 9272.60 47.84 68.20 -20.36 63.68 36.55 14.53 66.92 0.00 -- -- Peak 5 11440.00 46.14 74.00 -27.86 57.85 38.25 16.32 66.28 0.00 -- -- PEAK 6 17155.20 67.44 68.20 -0.76 70.58 41.27 20.10 64.51 0.00 193 71 Peak	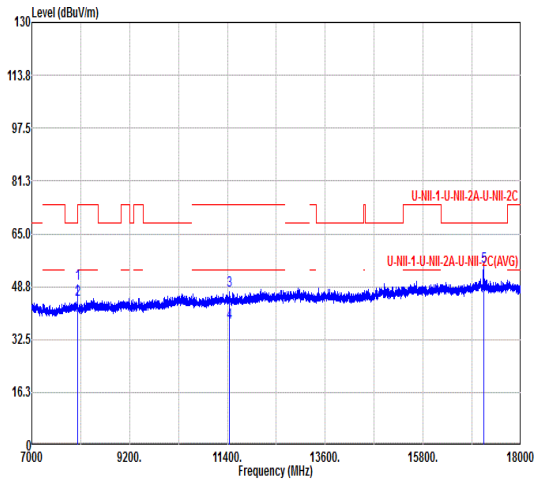 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8034.00 49.72 74.00 -24.28 67.00 36.13 13.38 66.79 0.00 391 329 Peak 2 8034.00 44.72 54.00 -9.28 62.00 36.13 13.38 66.79 0.00 391 329 Average 3 11440.00 47.55 74.00 -26.45 59.26 38.25 16.32 66.28 0.00 300 360 PEAK 4 11440.00 37.66 54.00 -16.34 49.37 38.25 16.32 66.28 0.00 300 360 AVERAGE 5 17161.80 54.80 68.20 -13.40 57.94 41.27 20.11 64.52 0.00 -- -- Peak

Mode	28	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Fundamental
Peak	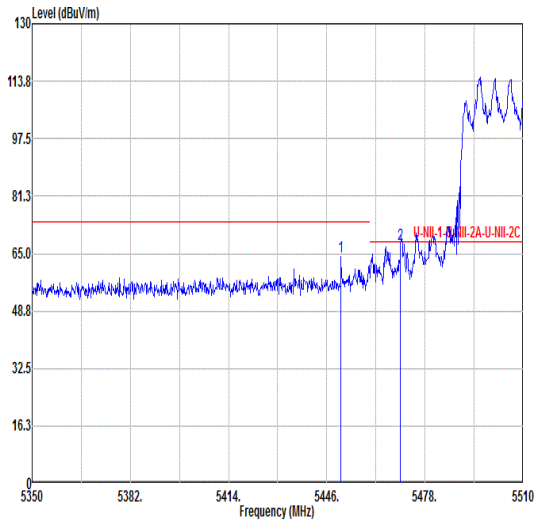 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5450.64 64.18 74.00 -9.82 51.45 34.70 10.01 31.98 0.00 309 91 PEAK 2 5470.00 67.59 68.20 -0.61 54.85 34.70 10.04 32.00 0.00 309 91 PEAK	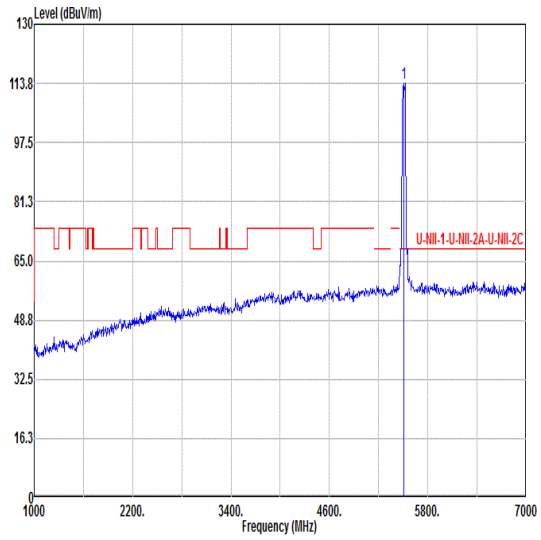 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 113.86 ------ ------ 101.12 34.65 10.12 32.03 0.00 309 91 PEAK
Avg	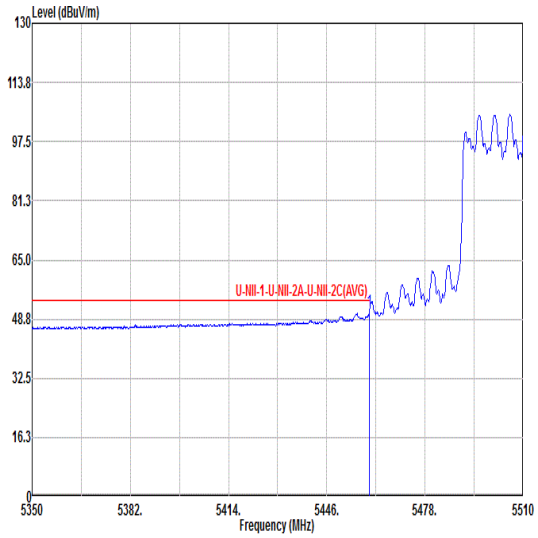 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.92 51.25 54.00 -2.75 38.51 34.70 10.03 31.99 0.00 309 91 AVERAGE	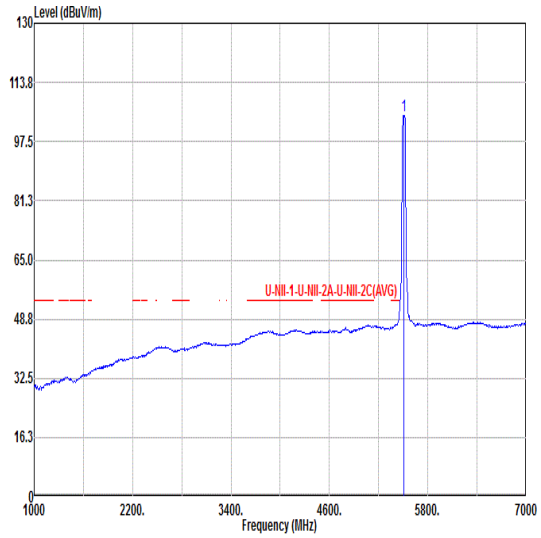 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 104.65 ------ ------ 91.88 34.69 10.10 32.02 0.00 309 91 AVERAGE

Mode	28	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Fundamental
Peak	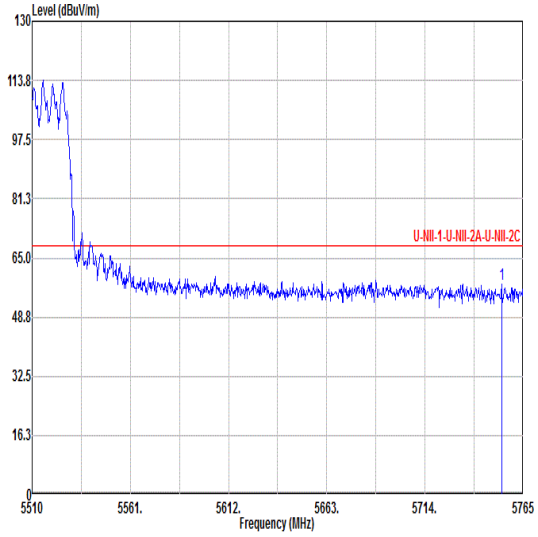 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5753.78 57.70 68.20 -10.50 44.73 34.61 10.37 32.01 0.00 309 91 PEAK	Blank

Mode	28	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz	
ANT	CDD 1S4T	
Pol.	Vertical	Fundamental
Peak	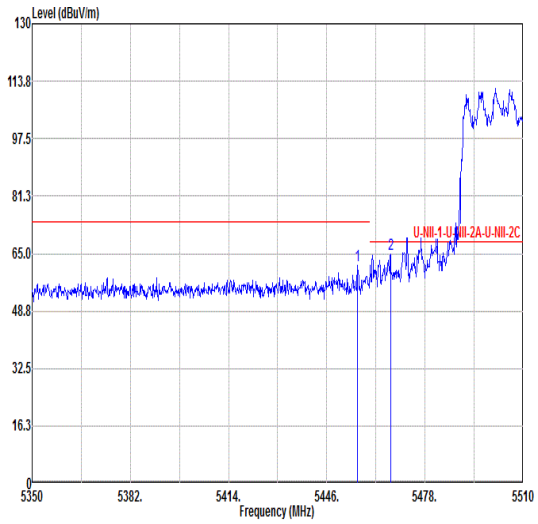 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5456.08 61.67 74.00 -12.33 48.94 34.70 10.02 31.99 0.00 300 183 PEAK 2 5466.80 64.66 68.20 -3.54 51.91 34.70 10.04 31.99 0.00 300 183 PEAK	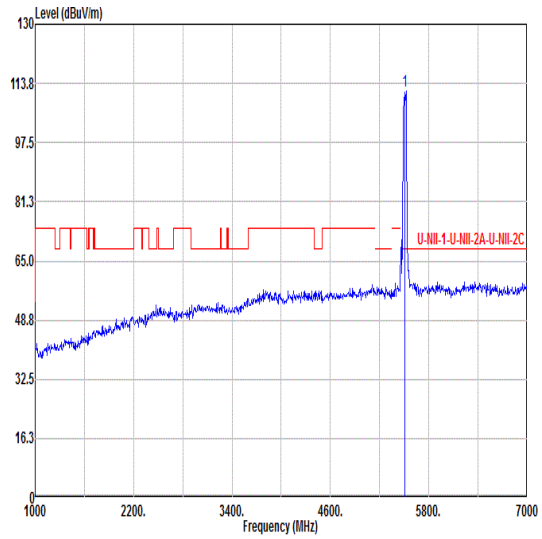 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 111.79 ------ ------ 99.05 34.65 10.12 32.03 0.00 300 183 PEAK
Avg	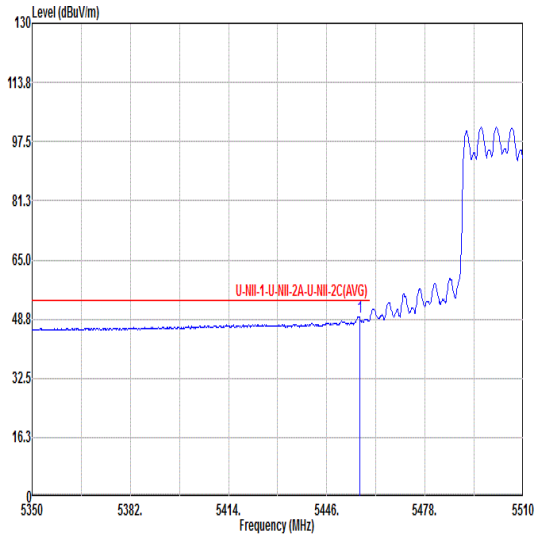 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5456.72 49.45 54.00 -4.55 36.72 34.70 10.02 31.99 0.00 300 183 AVERAGE	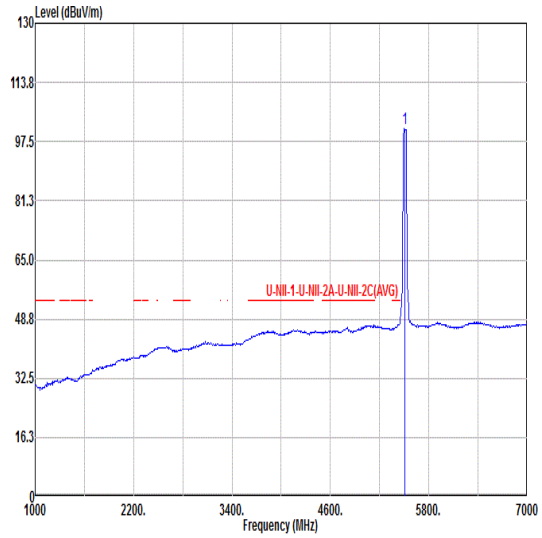 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 101.22 ------ ------ 88.44 34.70 10.09 32.01 0.00 300 183 AVERAGE

Mode	28	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz	
ANT	CDD 1S4T	
Pol.	Vertical	Fundamental
Peak	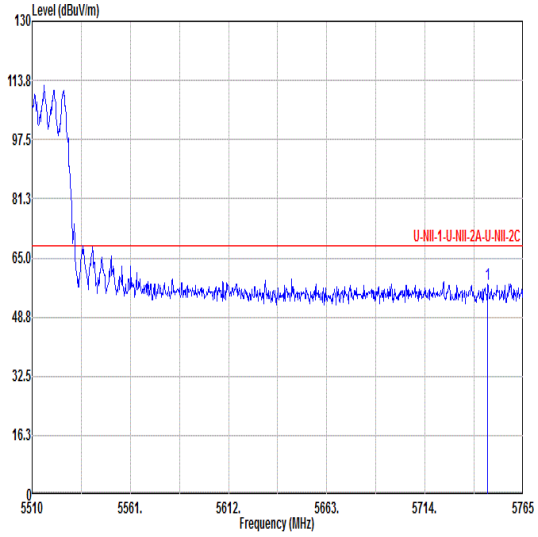 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5746.64 57.93 68.20 -10.27 44.97 34.61 10.36 32.01 0.00 300 183 PEAK	Blank

Mode	28	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	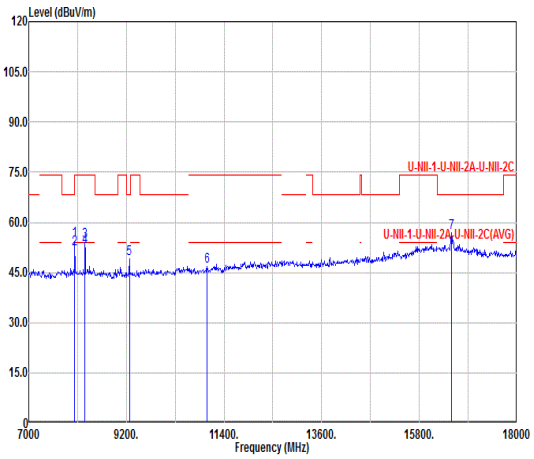 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8034.00 54.58 74.00 -19.42 66.18 35.87 12.43 59.90 0.00 100 235 Peak 2 8034.00 51.92 54.00 -2.08 63.52 35.87 12.43 59.90 0.00 100 235 Average 3 8265.00 54.43 74.00 -19.57 66.25 35.93 12.52 60.27 0.00 121 111 PEAK 4 8265.00 52.61 54.00 -1.39 64.43 35.93 12.52 60.27 0.00 121 111 AVERAGE 5 9266.00 49.11 68.20 -19.09 60.09 36.53 13.27 60.78 0.00 -- -- Peak 6 11020.00 46.71 74.00 -27.29 55.01 38.00 14.58 60.88 0.00 -- -- Peak 7 16526.00 56.92 68.20 -11.28 56.39 41.43 17.99 58.89 0.00 -- -- Peak	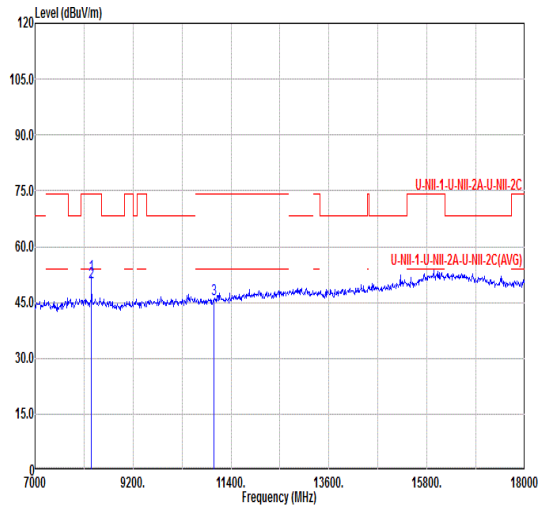 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8265.00 52.42 74.00 -21.58 64.24 35.93 12.52 60.27 0.00 359 180 PEAK 2 8265.00 50.46 54.00 -3.54 62.28 35.93 12.52 60.27 0.00 359 180 AVERAGE 3 11020.00 45.99 74.00 -28.01 54.29 38.00 14.58 60.88 0.00 -- -- Peak

Mode	29	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full RU_5550MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	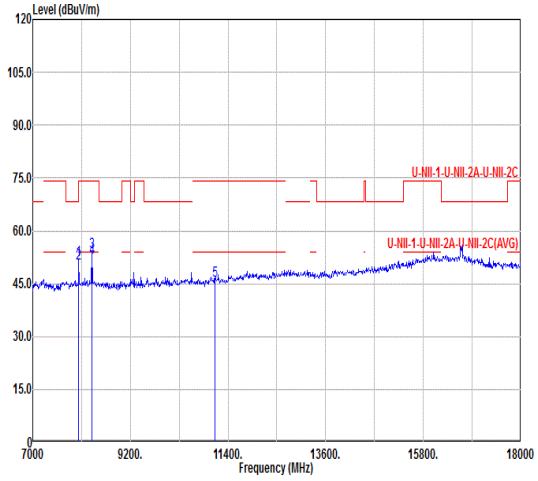 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8034.00 51.80 74.00 -22.20 63.40 35.87 12.43 59.90 0.00 100 251 Peak 2 8034.00 50.67 54.00 -3.33 62.27 35.87 12.43 59.90 0.00 100 251 Average 3 8325.00 53.88 74.00 -20.12 65.71 35.95 12.59 60.37 0.00 100 127 PEAK 4 8325.00 52.44 54.00 -1.56 64.27 35.95 12.59 60.37 0.00 100 127 AVERAGE 5 11100.00 45.76 74.00 -28.24 54.00 38.00 14.63 60.87 0.00 -- -- Peak	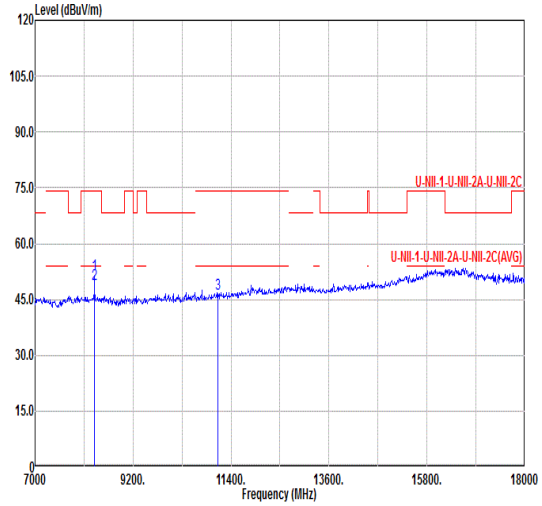 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8325.00 51.56 74.00 -22.44 63.39 35.95 12.59 60.37 0.00 373 175 PEAK 2 8325.00 49.07 54.00 -4.93 60.90 35.95 12.59 60.37 0.00 373 175 AVERAGE 3 11100.00 46.42 74.00 -27.58 54.66 38.00 14.63 60.87 0.00 -- -- Peak

Mode	30	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Fundamental
Peak	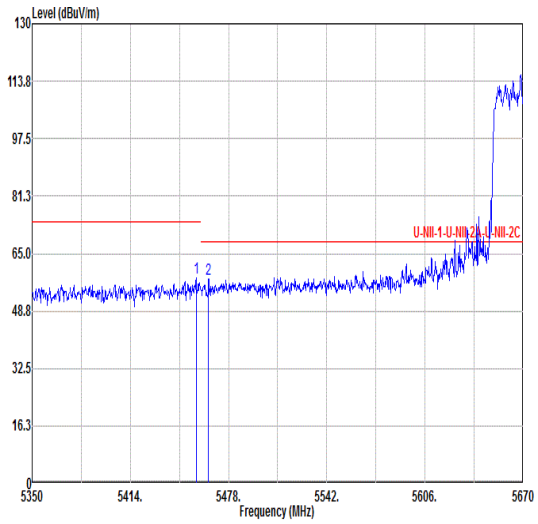 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5456.88 58.15 74.00 -15.85 45.42 34.70 10.02 31.99 0.00 100 266 PEAK 2 5464.88 57.68 68.20 -10.52 44.94 34.70 10.03 31.99 0.00 100 266 PEAK	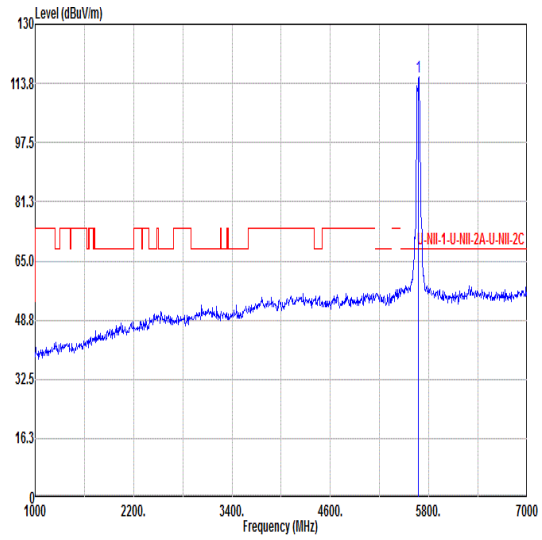 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 115.64 ------ ------ 102.74 34.66 10.31 32.07 0.00 100 266 PEAK
Avg	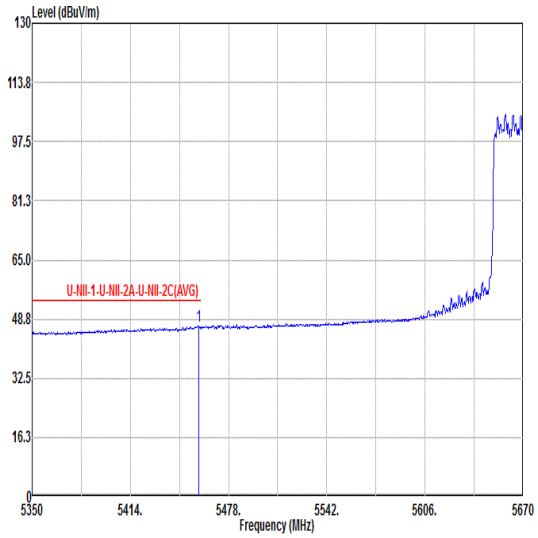 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.48 47.01 54.00 -6.99 34.28 34.70 10.02 31.99 0.00 100 266 AVERAGE	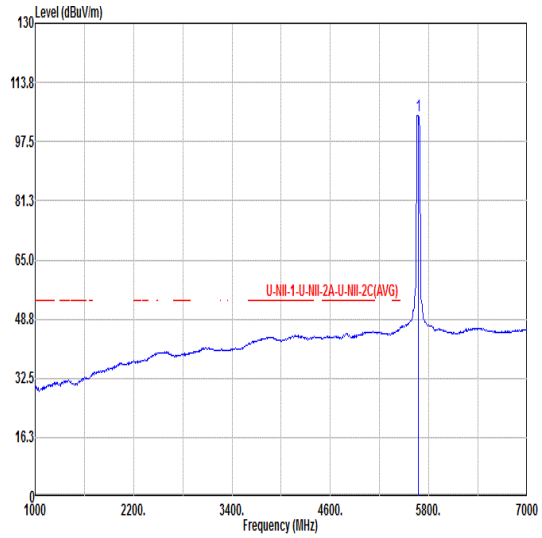 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 104.75 ------ ------ 91.94 34.61 10.29 32.09 0.00 100 266 AVERAGE

Mode	30	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Fundamental
Peak	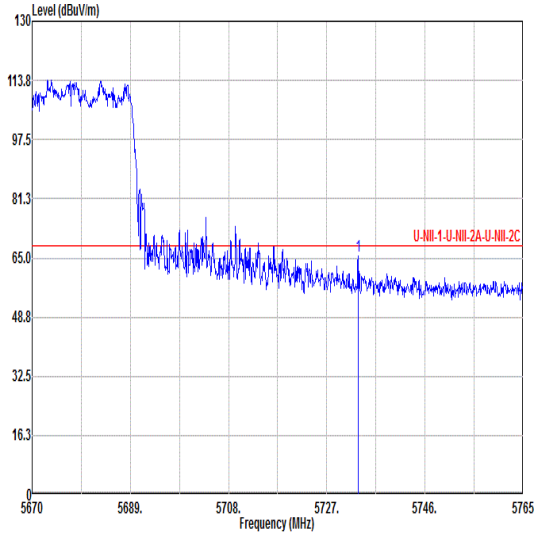 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5733.08 65.69 68.20 -2.51 52.73 34.63 10.35 32.02 0.00 100 266 Peak	Blank

Mode	30	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz	
ANT	CDD 1S4T	
Pol.	Vertical	Fundamental
Peak	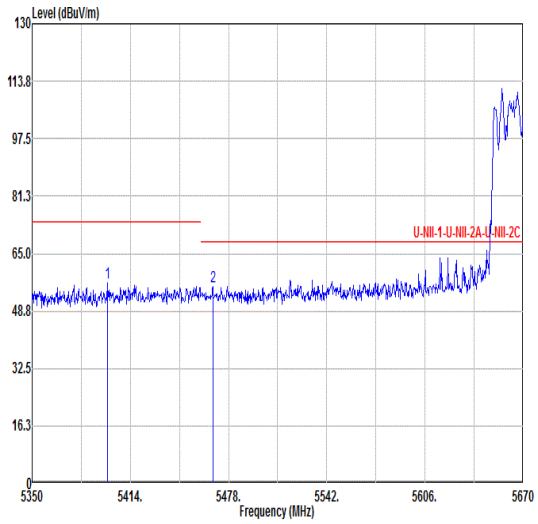 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5398.96 56.55 74.00 -17.45 43.86 34.70 9.94 31.95 0.00 300 185 PEAK 2 5467.76 55.50 68.20 -12.70 42.76 34.70 10.04 32.00 0.00 300 185 PEAK	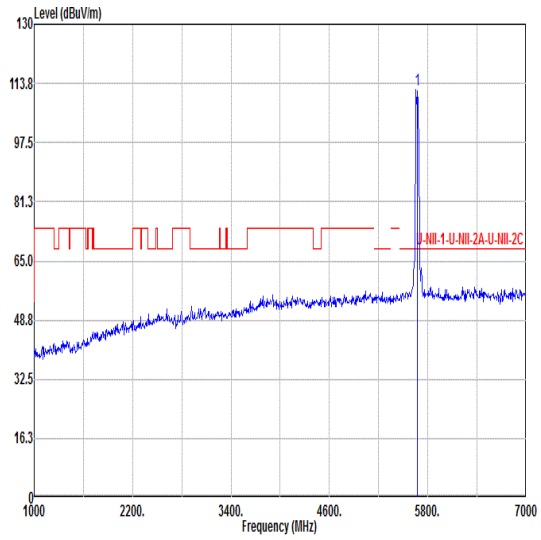 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 111.94 ------ ------ 99.13 34.61 10.29 32.09 0.00 300 185 PEAK
Avg	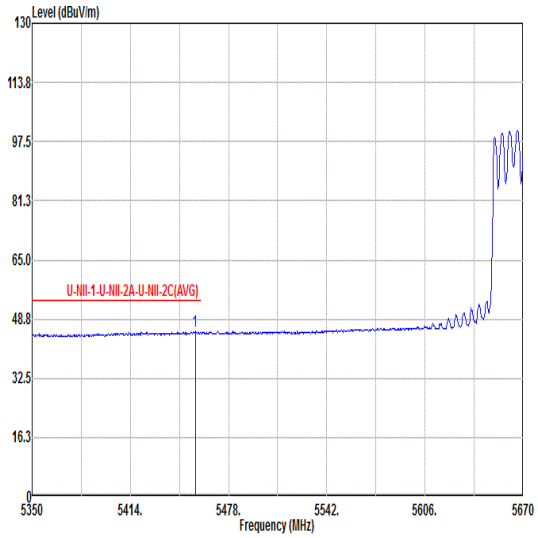 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5456.24 45.33 54.00 -8.67 32.60 34.70 10.02 31.99 0.00 300 185 AVERAGE	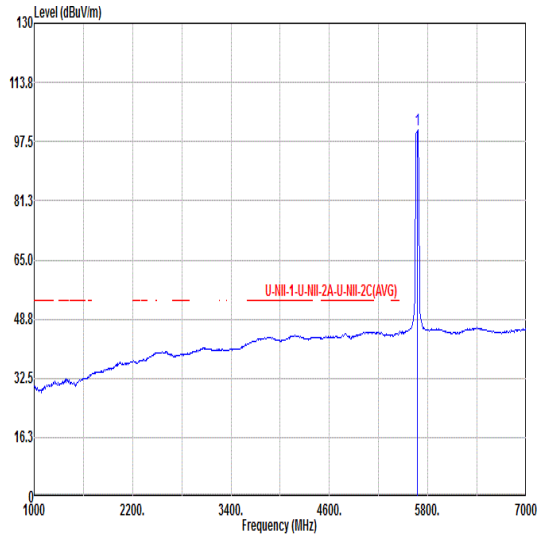 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 100.87 ------ ------ 87.97 34.66 10.31 32.07 0.00 300 185 AVERAGE

Mode	30	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz	
ANT	CDD 1S4T	
Pol.	Vertical	Fundamental
Peak	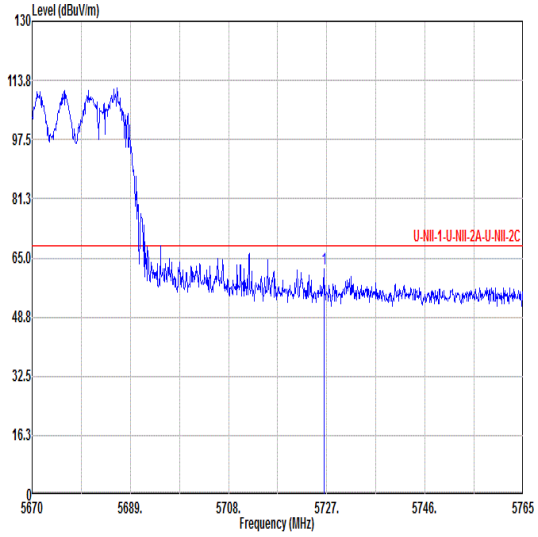 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.43 61.89 68.20 -6.31 48.92 34.65 10.35 32.03 0.00 300 185 PEAK	Blank

Mode	30	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	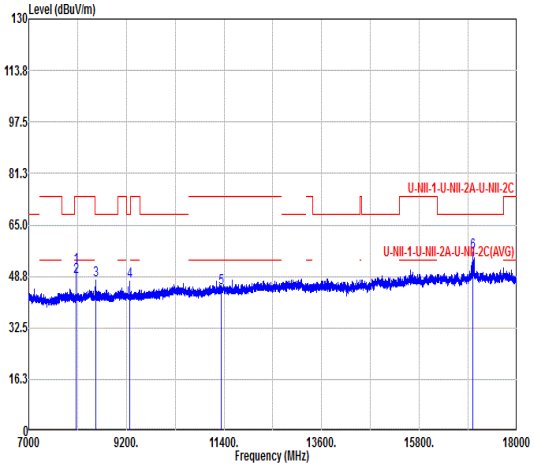 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8068.10 51.89 74.00 -22.11 69.10 36.17 13.42 66.80 0.00 282 296 Peak 2 8068.10 48.49 54.00 -5.51 65.70 36.17 13.42 66.80 0.00 282 296 Average 3 8504.80 47.50 68.20 -20.70 64.17 36.30 13.87 66.84 0.00 -- -- Peak 4 9271.50 47.26 68.20 -20.94 63.11 36.54 14.53 66.92 0.00 -- -- Peak 5 11340.00 45.24 74.00 -28.76 57.13 38.17 16.26 66.32 0.00 -- -- PEAK 6 17002.30 56.31 68.20 -11.89 59.40 41.30 20.00 64.39 0.00 -- -- Peak	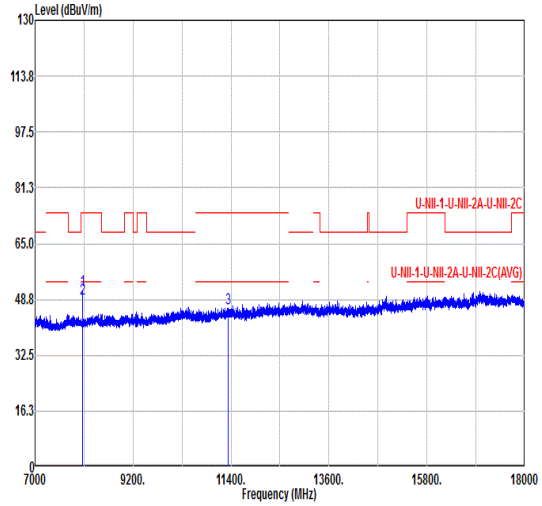 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8067.00 51.58 74.00 -22.42 68.79 36.17 13.42 66.80 0.00 352 142 Peak 2 8067.00 49.00 54.00 -5.00 66.21 36.17 13.42 66.80 0.00 352 142 Average 3 11340.00 45.98 74.00 -28.02 57.87 38.17 16.26 66.32 0.00 -- -- PEAK

Mode	31	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_Full RU_5710MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	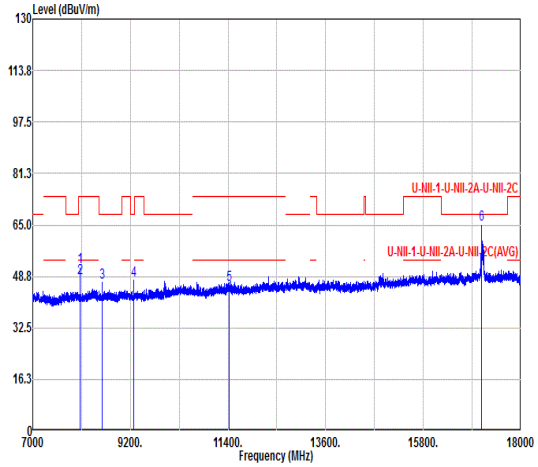 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8067.00 51.79 74.00 -22.21 69.00 36.17 13.42 66.80 0.00 281 297 Peak 2 8067.00 48.37 54.00 -5.63 65.58 36.17 13.42 66.80 0.00 281 297 Average 3 8565.30 46.83 68.20 -21.37 63.56 36.23 13.90 66.86 0.00 -- -- Peak 4 9272.60 47.54 68.20 -20.66 63.38 36.55 14.53 66.92 0.00 -- -- Peak 5 11420.00 45.98 74.00 -28.02 57.71 38.24 16.31 66.28 0.00 -- -- PEAK 6 17120.00 65.08 68.20 -3.12 68.21 41.28 20.08 64.49 0.00 211 38 Peak	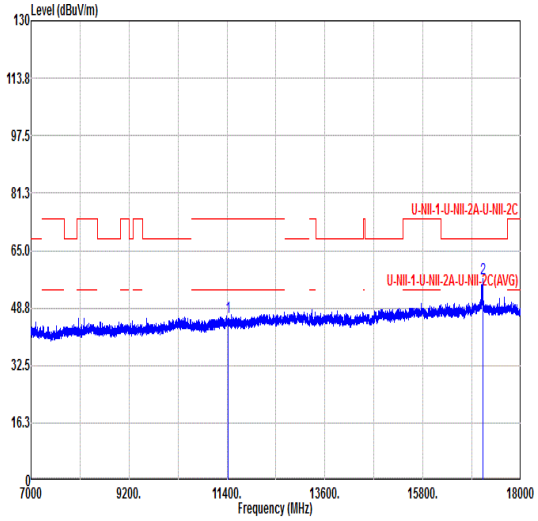 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11420.00 46.14 74.00 -27.86 57.87 38.24 16.31 66.28 0.00 -- -- PEAK 2 17142.00 57.08 68.20 -11.12 60.21 41.27 20.10 64.50 0.00 -- -- Peak

Mode	32	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Fundamental
Peak	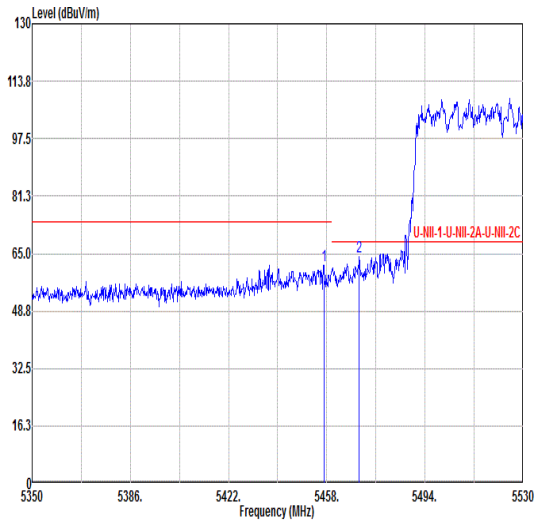 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5456.92 61.76 74.00 -12.24 49.03 34.70 10.02 31.99 0.00 140 276 PEAK 2 5469.88 64.13 68.20 -4.07 51.39 34.70 10.04 32.00 0.00 140 276 PEAK	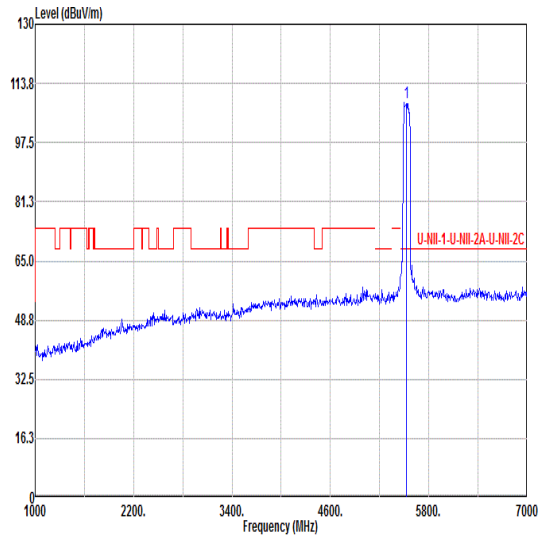 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 108.66 ------ ------ 95.89 34.70 10.08 32.01 0.00 140 276 PEAK
Avg	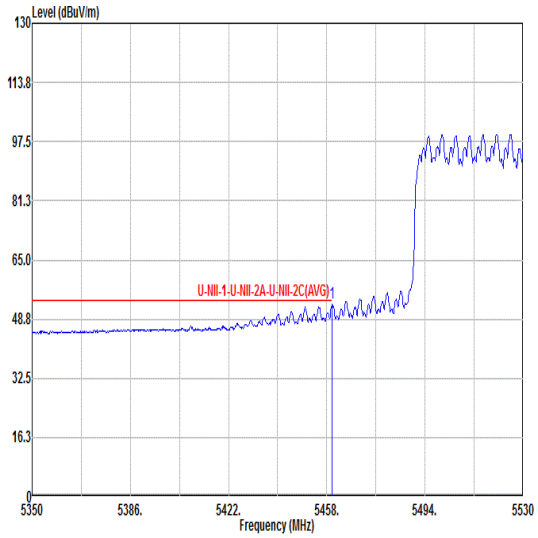 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.98 53.06 54.00 -0.94 40.32 34.70 10.03 31.99 0.00 140 276 AVERAGE	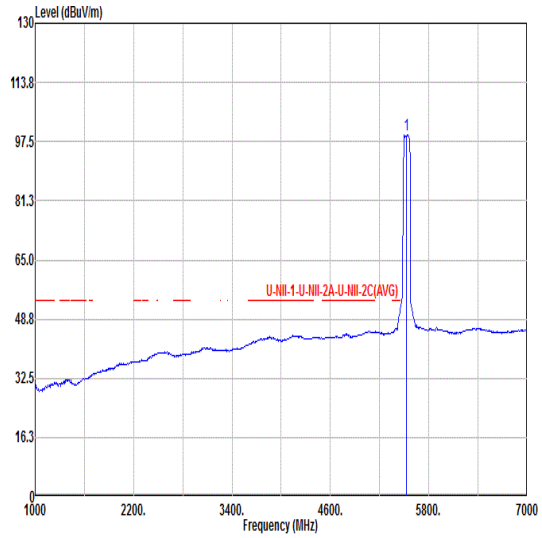 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 99.49 ------ ------ 86.71 34.70 10.09 32.01 0.00 140 276 AVERAGE

Mode	32	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Fundamental
Peak	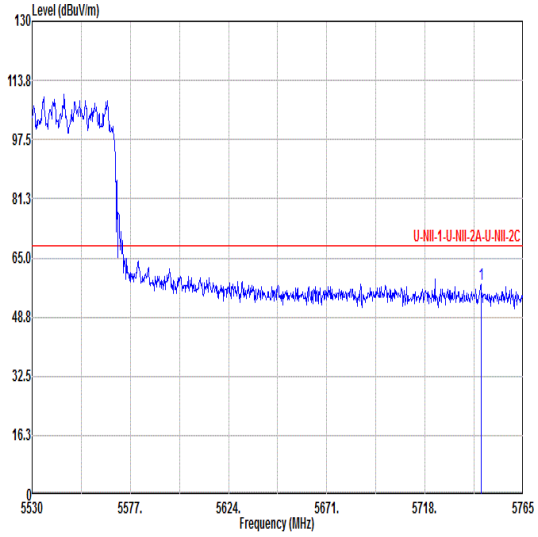 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5744.79 57.80 68.20 -10.40 44.84 34.61 10.36 32.01 0.00 140 276 PEAK	Blank

Mode	32	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz	
ANT	CDD 1S4T	
Pol.	Vertical	Fundamental
Peak	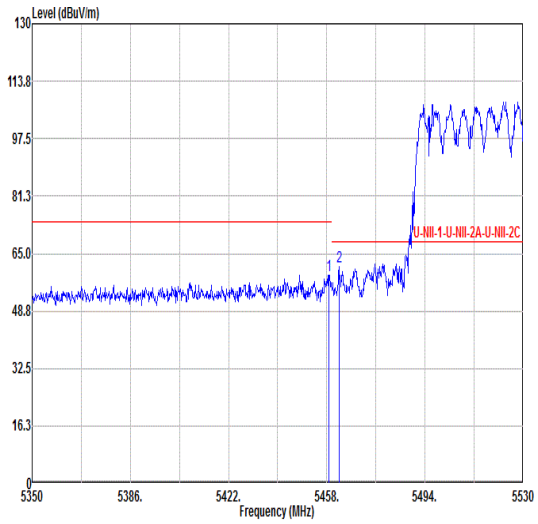 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.90 58.84 74.00 -15.16 46.11 34.70 10.02 31.99 0.00 281 360 PEAK 2 5462.50 61.29 68.20 -6.91 48.55 34.70 10.03 31.99 0.00 281 360 PEAK	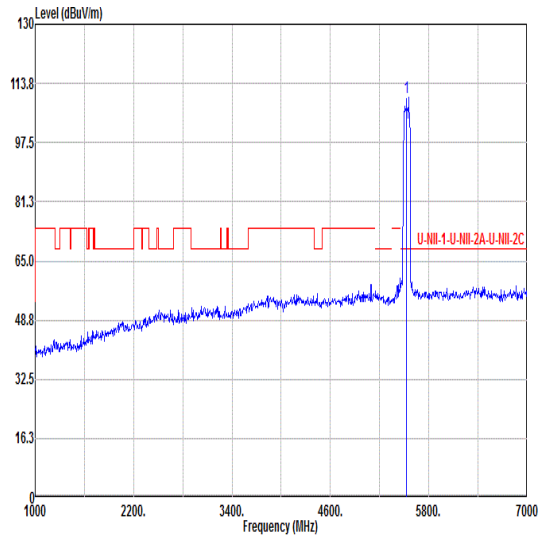 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 109.79 ------ ------ 97.06 34.61 10.17 32.05 0.00 281 360 PEAK
Avg	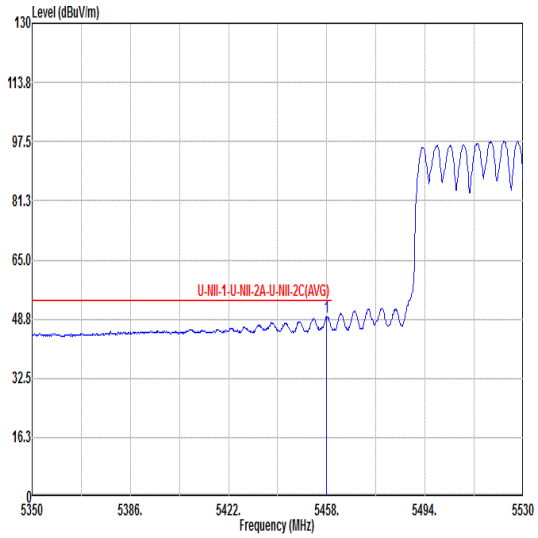 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.82 49.32 54.00 -4.68 36.59 34.70 10.02 31.99 0.00 281 360 AVERAGE	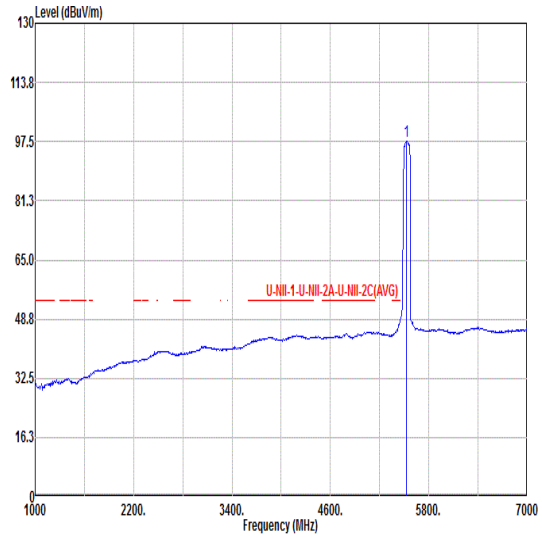 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 97.65 ------ ------ 84.92 34.63 10.14 32.04 0.00 281 360 AVERAGE

Mode	32	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz	
ANT	CDD 1S4T	
Pol.	Vertical	Fundamental
Peak	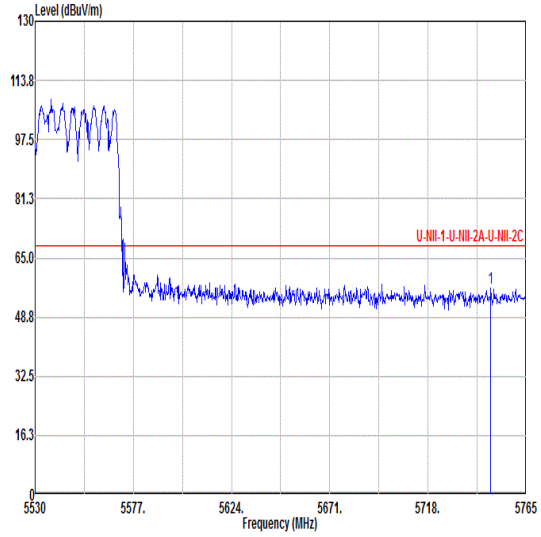 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5748.08 56.57 68.20 -11.63 43.62 34.60 10.36 32.01 0.00 281 360 PEAK	Blank

Mode	32	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	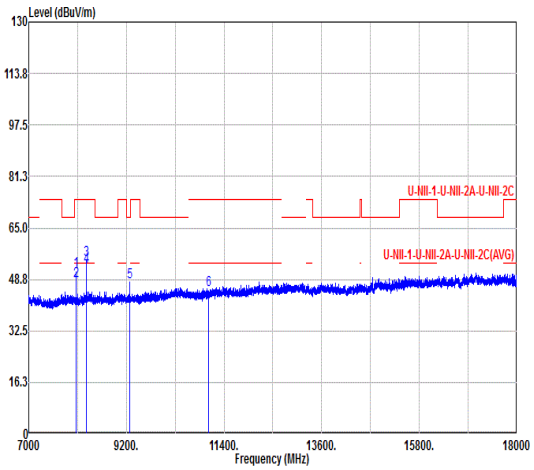 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8065.90 51.59 74.00 -22.41 68.80 36.17 13.42 66.80 0.00 290 296 Peak 2 8065.90 48.37 54.00 -5.63 65.58 36.17 13.42 66.80 0.00 290 296 Average 3 8295.80 55.07 74.00 -18.93 71.80 36.40 13.69 66.82 0.00 287 69 Peak 4 8295.80 52.85 54.00 -1.15 69.58 36.40 13.69 66.82 0.00 287 69 Average 5 9273.70 48.06 68.20 -20.14 63.89 36.55 14.54 66.92 0.00 -- -- Peak 6 11060.00 45.31 74.00 -28.69 57.72 37.95 16.08 66.44 0.00 -- -- PEAK	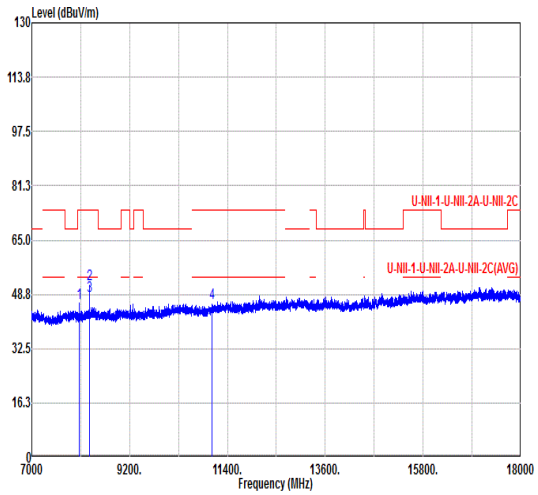 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8065.90 46.14 74.00 -27.86 63.35 36.17 13.42 66.80 0.00 -- -- Peak 2 8294.70 51.77 74.00 -22.23 68.50 36.40 13.69 66.82 0.00 320 360 Peak 3 8294.70 48.27 54.00 -5.73 65.00 36.40 13.69 66.82 0.00 320 360 Average 4 11060.00 46.00 74.00 -28.00 58.41 37.95 16.08 66.44 0.00 -- -- PEAK

Mode	33
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz
ANT	CDD 1S4T

Pol.	Horizontal	Fundamental
Peak	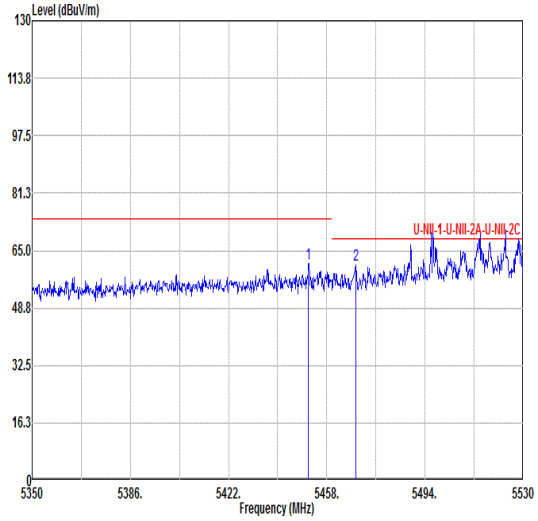 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5451.34 61.15 74.00 -12.85 48.43 34.70 10.01 31.99 0.00 300 98 PEAK 2 5468.62 60.81 68.20 -7.39 48.07 34.70 10.04 32.00 0.00 300 98 PEAK	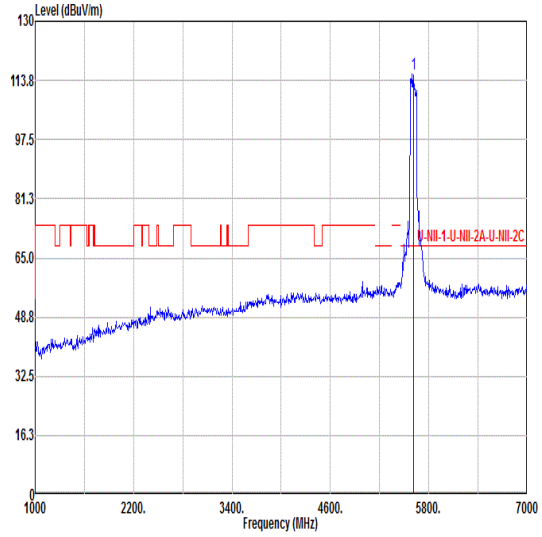 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 115.52 ------ ------ 102.67 34.69 10.23 32.07 0.00 300 98 PEAK
Avg	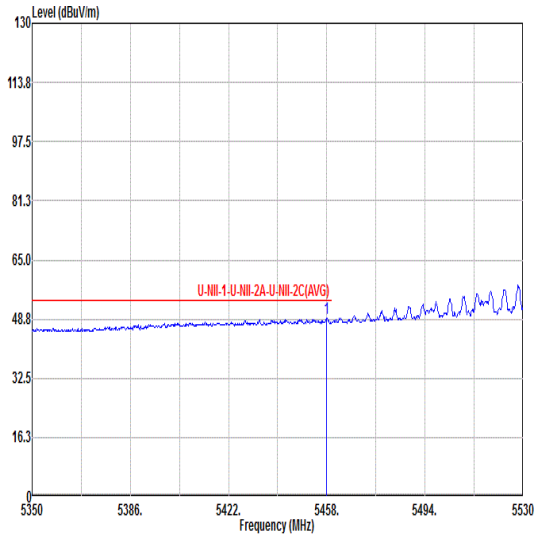 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.82 49.10 54.00 -4.90 36.37 34.70 10.02 31.99 0.00 300 98 AVERAGE	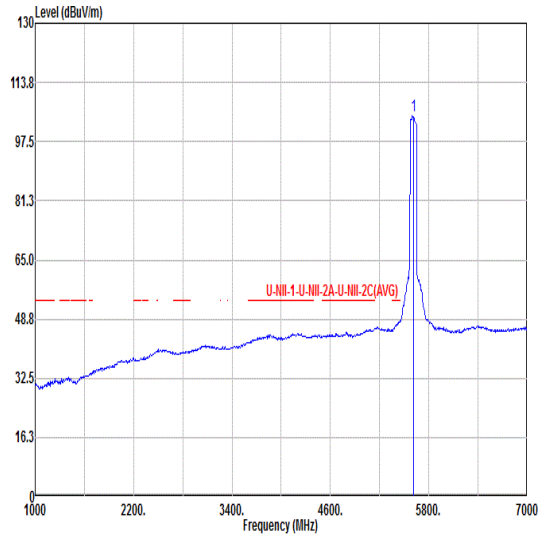 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 104.59 ------ ------ 91.74 34.69 10.23 32.07 0.00 300 98 AVERAGE

Mode	33	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Fundamental
Peak	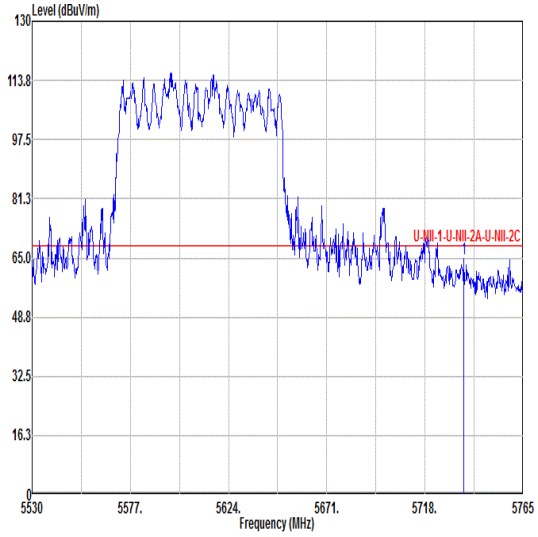 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5736.57 64.76 68.20 -3.44 51.80 34.63 10.35 32.02 0.00 300 98 PEAK	Blank

Mode	33	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz	
ANT	CDD 1S4T	
Pol.	Vertical	Fundamental
Peak	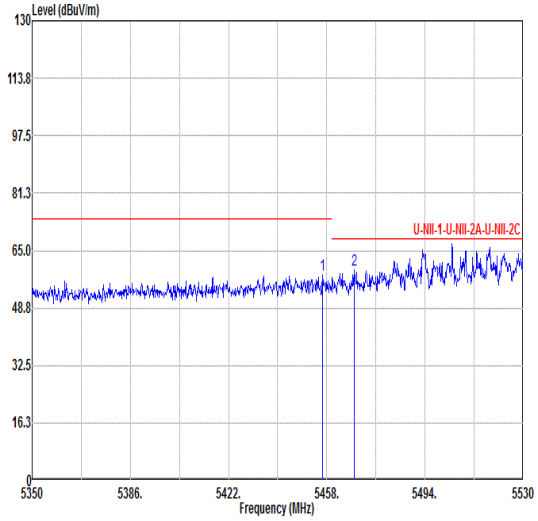 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5456.38 58.25 74.00 -15.75 45.52 34.70 10.02 31.99 0.00 245 360 PEAK 2 5468.08 59.60 68.20 -8.60 46.86 34.70 10.04 32.00 0.00 245 360 PEAK	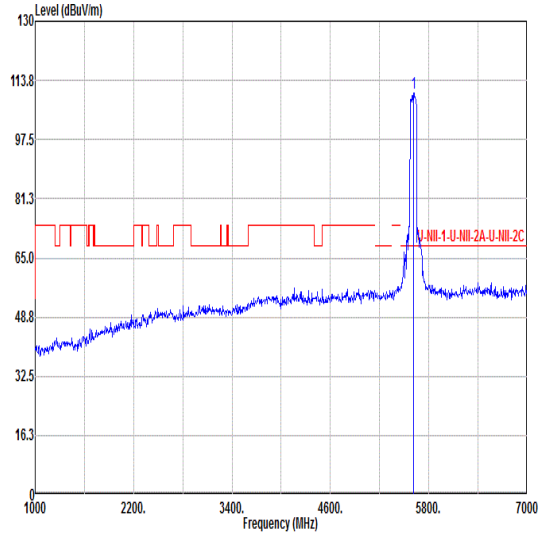 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 110.38 ------ ------ 97.53 34.67 10.26 32.08 0.00 245 360 PEAK
Avg	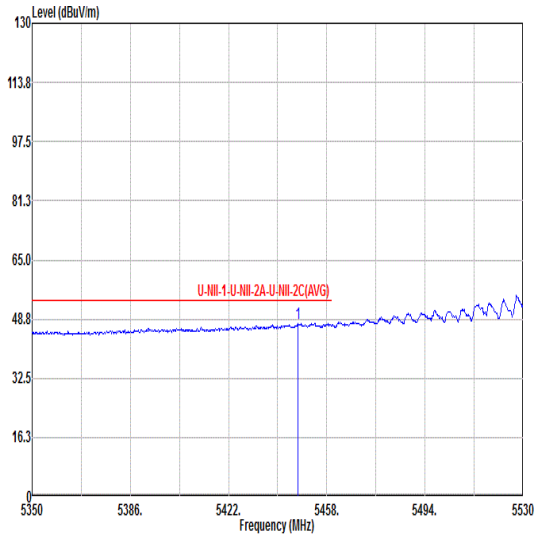 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5447.56 47.50 54.00 -6.50 34.77 34.70 10.01 31.98 0.00 245 360 AVERAGE	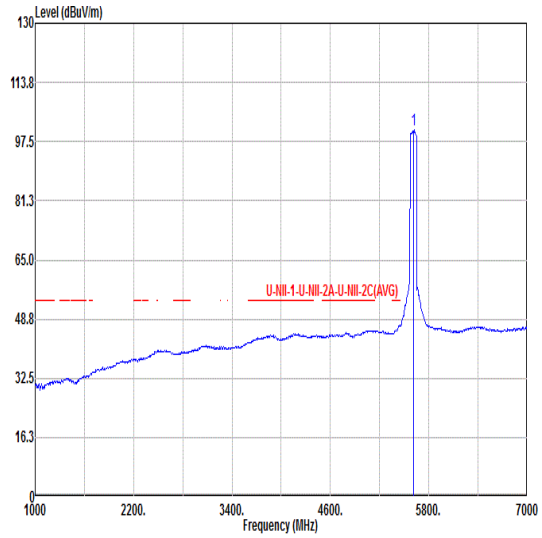 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 100.89 ------ ------ 88.06 34.66 10.26 32.09 0.00 245 360 AVERAGE

Mode	33	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz	
ANT	CDD 1S4T	
Pol.	Vertical	Fundamental
Peak	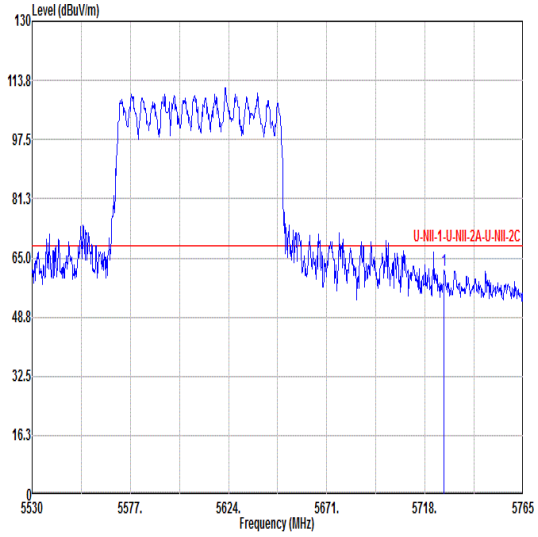 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5727.17 61.58 68.20 -6.62 48.61 34.65 10.35 32.03 0.00 245 360 PEAK	Blank

Mode	33	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	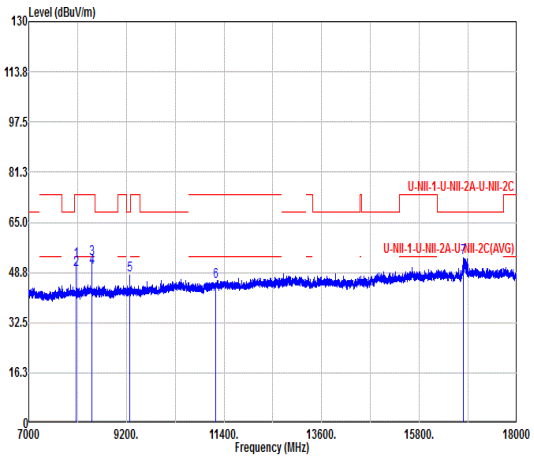 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8068.10 52.54 74.00 -21.46 69.75 36.17 13.42 66.80 0.00 228 310 Peak 2 8068.10 49.79 54.00 -4.21 67.00 36.17 13.42 66.80 0.00 228 310 Average 3 8415.70 53.32 74.00 -20.68 70.02 36.30 13.83 66.83 0.00 237 71 Peak 4 8415.70 50.50 54.00 -3.50 67.20 36.30 13.83 66.83 0.00 237 71 Average 5 9271.50 47.74 68.20 -20.46 63.59 36.54 14.53 66.92 0.00 -- -- Peak 6 11220.00 45.77 74.00 -28.23 57.88 38.08 16.18 66.37 0.00 -- -- PEAK 7 16794.40 53.50 68.20 -14.70 56.81 41.14 19.87 64.32 0.00 -- -- Peak	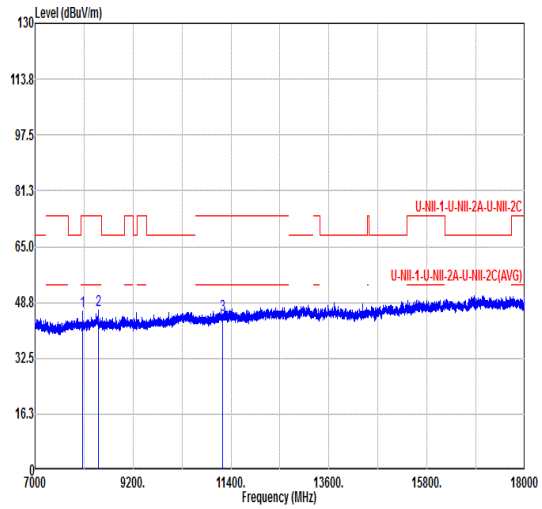 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8068.10 46.18 74.00 -27.82 63.39 36.17 13.42 66.80 0.00 -- -- Peak 2 8415.70 46.64 74.00 -27.36 63.34 36.30 13.83 66.83 0.00 -- -- Peak 3 11220.00 45.25 74.00 -28.75 57.36 38.08 16.18 66.37 0.00 -- -- PEAK

Mode	34	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH138_Full RU_5690MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	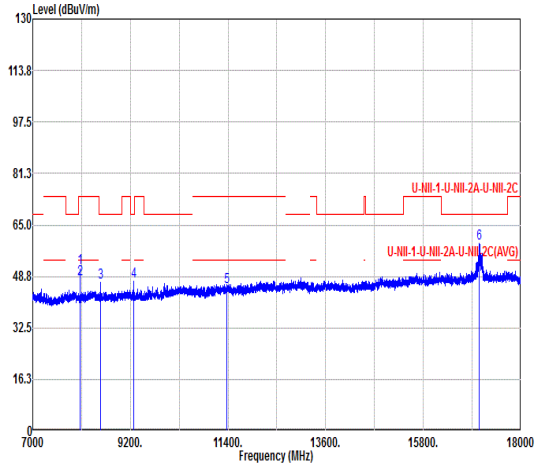 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8067.00 51.29 74.00 -22.71 68.50 36.17 13.42 66.80 0.00 300 295 Peak 2 8067.00 47.82 54.00 -6.18 65.03 36.17 13.42 66.80 0.00 300 295 Average 3 8535.60 46.98 68.20 -21.22 63.69 36.26 13.88 66.85 0.00 -- -- Peak 4 9272.60 47.37 68.20 -20.83 63.21 36.55 14.53 66.92 0.00 -- -- Peak 5 11380.00 45.42 74.00 -28.58 57.23 38.20 16.29 66.30 0.00 -- -- PEAK 6 17057.30 59.23 68.20 -8.97 62.34 41.29 20.04 64.44 0.00 -- -- Peak	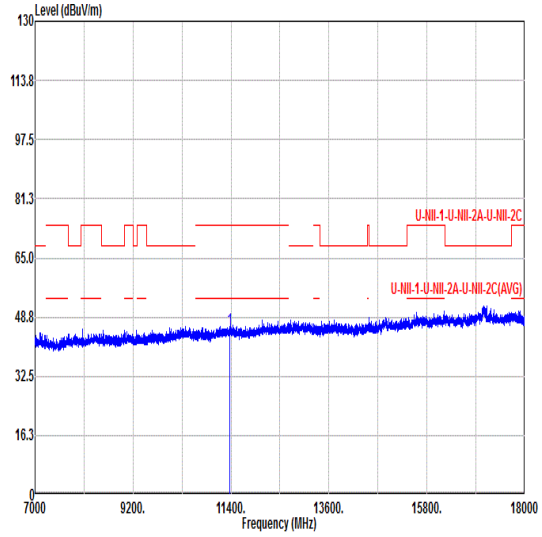 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11380.00 45.52 74.00 -28.48 57.33 38.20 16.29 66.30 0.00 -- -- PEAK

Mode	35	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Fundamental
Peak	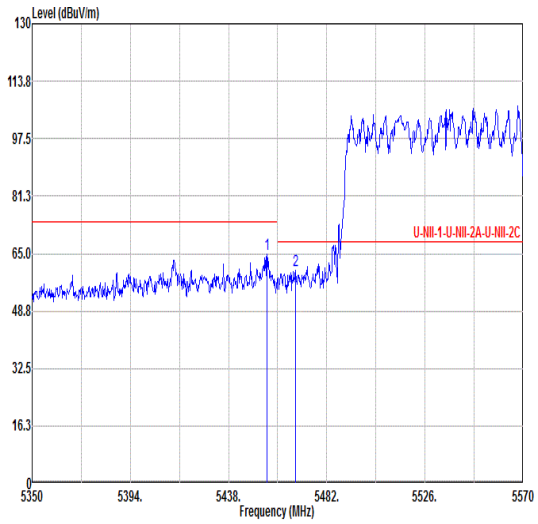 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5455.16 64.84 74.00 -9.16 52.11 34.70 10.02 31.99 0.00 300 96 PEAK 2 5468.14 60.35 68.20 -7.85 47.61 34.70 10.04 32.00 0.00 300 96 PEAK	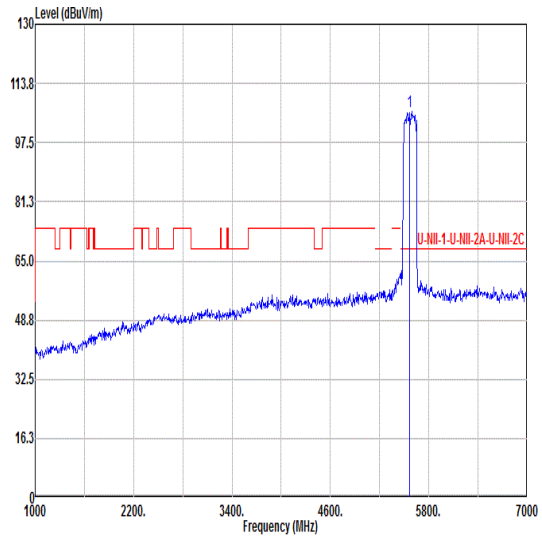 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 105.95 ------ ------ 93.12 34.68 10.22 32.07 0.00 300 96 PEAK
Avg	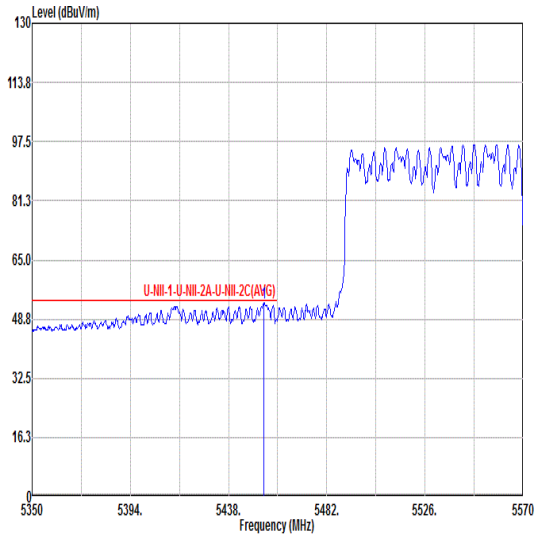 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5453.62 53.29 54.00 -0.71 40.56 34.70 10.02 31.99 0.00 300 96 AVERAGE	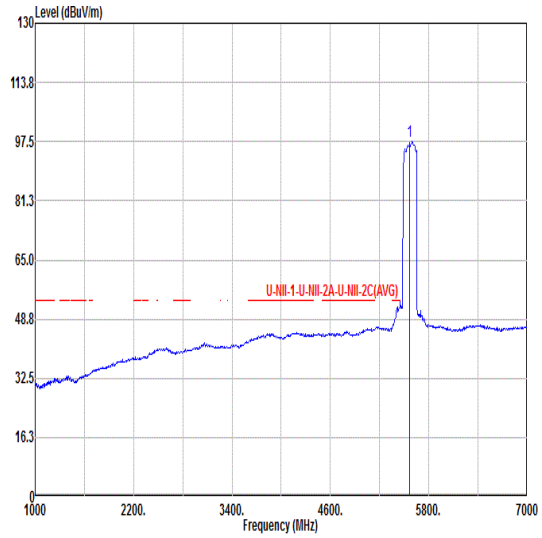 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 97.73 ------ ------ 84.88 34.69 10.23 32.07 0.00 300 96 AVERAGE

Mode	35	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Fundamental
Peak	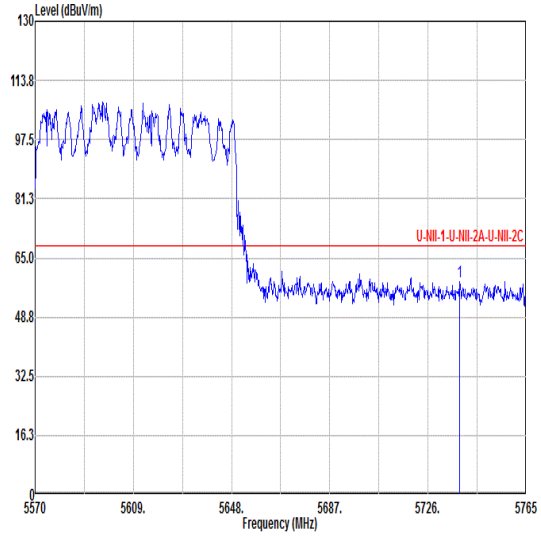 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5738.68 58.54 68.20 -9.66 45.58 34.62 10.36 32.02 0.00 300 96 PEAK	Blank

Mode	35	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz	
ANT	CDD 1S4T	
Pol.	Vertical	Fundamental
Peak	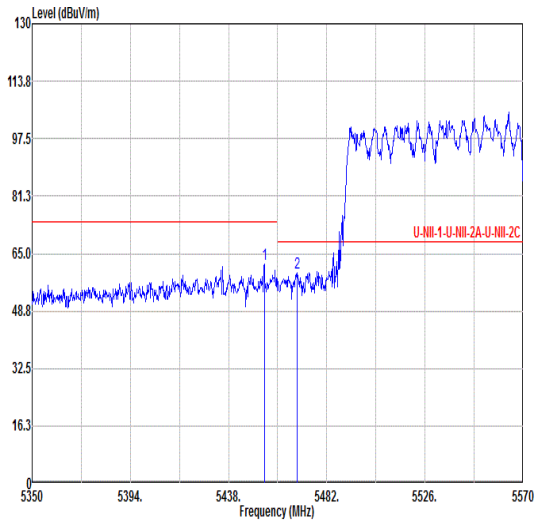 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5454.06 61.95 74.00 -12.05 49.22 34.70 10.02 31.99 0.00 248 360 PEAK 2 5468.80 59.60 68.20 -8.60 46.86 34.70 10.04 32.00 0.00 248 360 PEAK	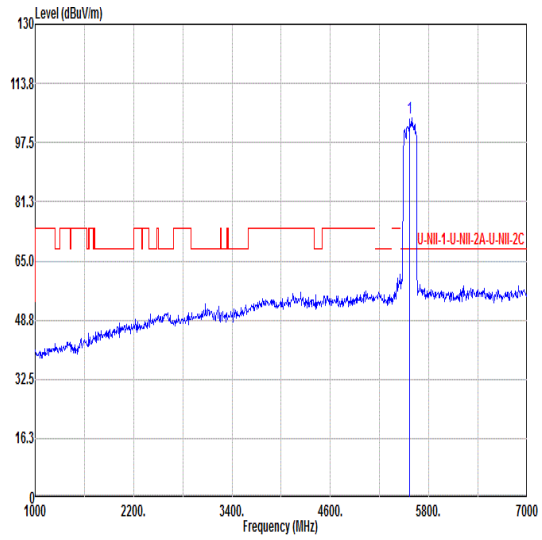 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 104.12 ------ ------ 91.29 34.68 10.22 32.07 0.00 248 360 PEAK
Avg	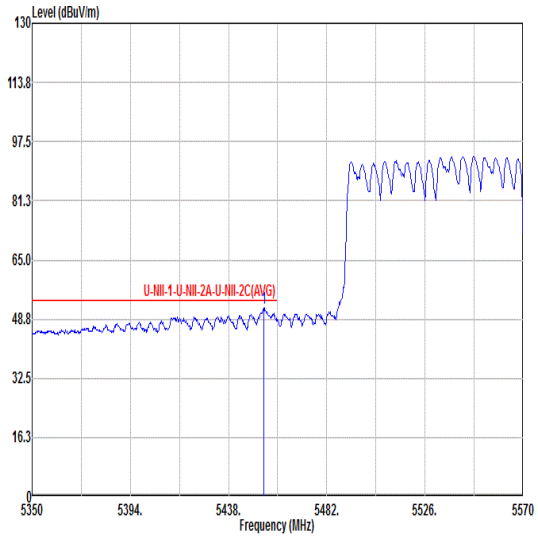 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5453.84 51.89 54.00 -2.11 39.16 34.70 10.02 31.99 0.00 248 360 AVERAGE	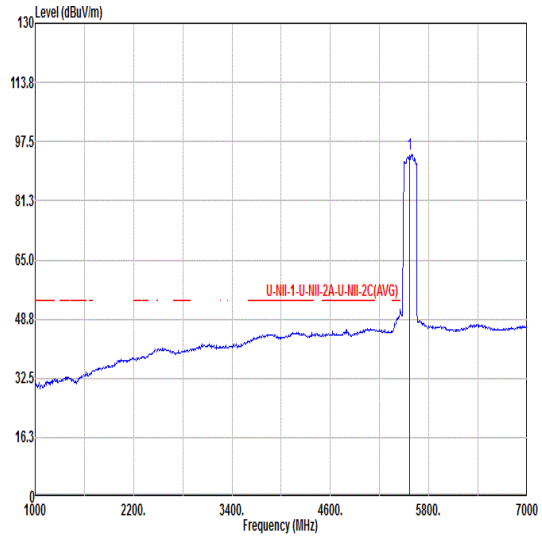 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 94.08 ------ ------ 81.25 34.68 10.22 32.07 0.00 248 360 AVERAGE

Mode	35	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz	
ANT	CDD 1S4T	
Pol.	Vertical	Fundamental
Peak	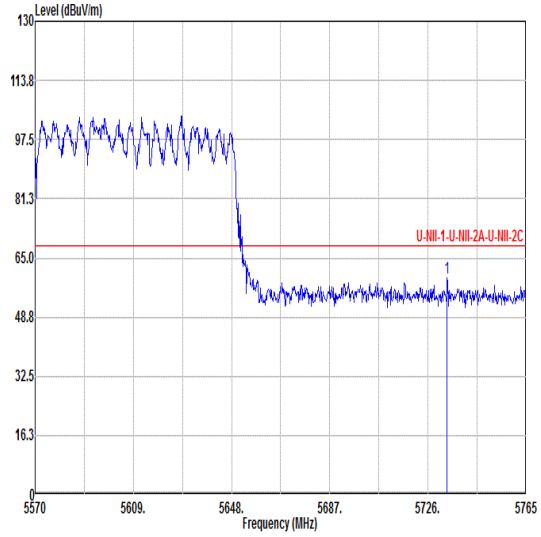 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5733.61 59.65 68.20 -8.55 46.69 34.63 10.35 32.02 0.00 248 360 PEAK	Blank

Mode	35	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	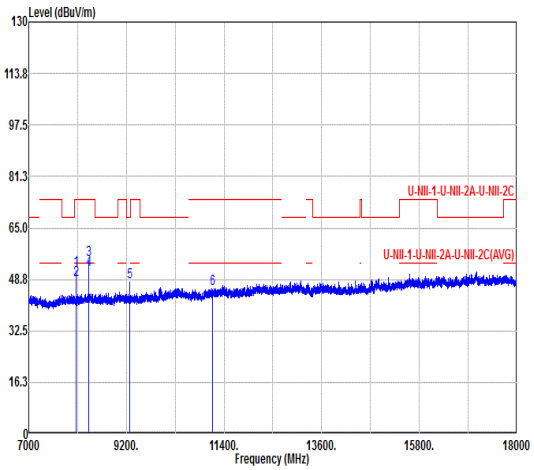 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8067.00 51.79 74.00 -22.21 69.00 36.17 13.42 66.80 0.00 280 297 Peak 2 8067.00 48.59 54.00 -5.41 65.80 36.17 13.42 66.80 0.00 280 297 Average 3 8355.20 54.79 74.00 -19.21 71.51 36.34 13.77 66.83 0.00 238 67 Peak 4 8355.20 51.95 54.00 -2.05 68.67 36.34 13.77 66.83 0.00 238 67 Average 5 9271.50 47.78 68.20 -20.42 63.63 36.54 14.53 66.92 0.00 -- -- Peak 6 11140.00 45.65 74.00 -28.35 57.92 38.01 16.13 66.41 0.00 -- -- PEAK	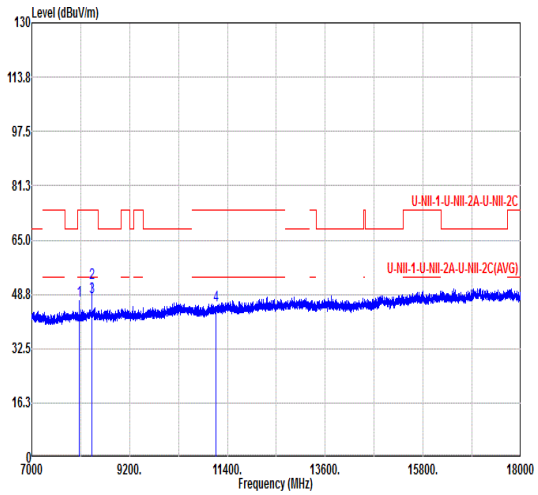 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8067.00 46.70 74.00 -27.30 63.91 36.17 13.42 66.80 0.00 -- -- Peak 2 8355.20 52.29 74.00 -21.71 69.01 36.34 13.77 66.83 0.00 138 25 Peak 3 8355.20 48.09 54.00 -5.91 64.81 36.34 13.77 66.83 0.00 138 25 Average 4 11140.00 45.29 74.00 -28.71 57.56 38.01 16.13 66.41 0.00 -- -- PEAK

Mode	-	
	LF	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak QP	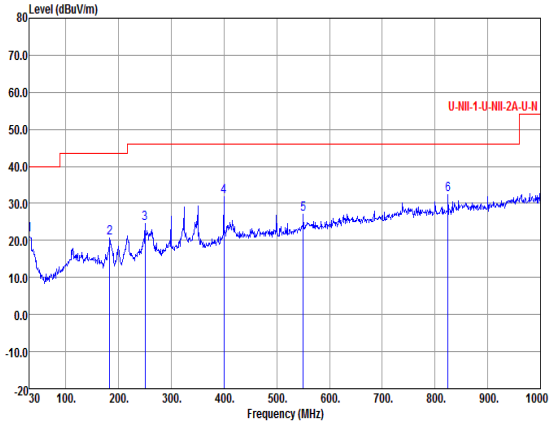 	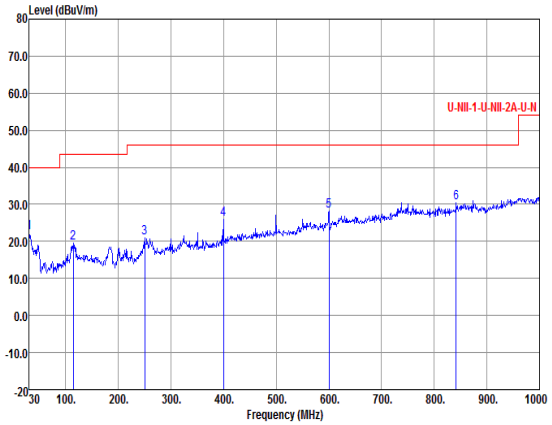

Horizontal:

	Freq	Level	Over Limit	Limit Line	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	21.58	-18.42	40.00	28.32	25.10	0.45	32.29	---	---	Peak
2	183.26	20.57	-22.93	43.50	35.91	15.01	1.82	32.17	---	---	Peak
3	250.19	24.48	-21.52	46.00	35.50	19.02	2.13	32.17	---	---	Peak
4	399.57	31.67	-14.33	46.00	39.32	21.90	2.70	32.25	---	---	Peak
5	549.92	27.16	-18.84	46.00	31.09	25.40	3.16	32.49	---	---	Peak
6 p	824.43	32.26	-13.74	46.00	31.57	28.74	3.88	31.93	---	---	Peak

Vertical:

	Freq	Level	Over Limit	Limit Line	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	22.29	-17.71	40.00	29.03	25.10	0.45	32.29	---	---	Peak
2	114.39	19.42	-24.08	43.50	32.89	17.27	1.43	32.17	---	---	Peak
3	250.19	20.94	-25.06	46.00	31.96	19.02	2.13	32.17	---	---	Peak
4	399.57	26.00	-20.00	46.00	33.65	21.90	2.70	32.25	---	---	Peak
5	600.36	28.09	-17.91	46.00	31.36	25.80	3.31	32.38	---	---	Peak
6 p	841.89	30.38	-15.62	46.00	29.18	29.13	3.91	31.84	---	---	Peak

Mode	36	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Fundamental
Peak	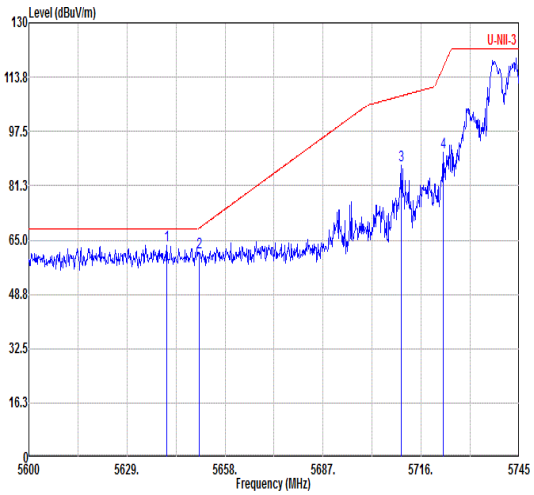 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5640.75 63.57 68.20 -4.63 50.77 34.62 10.28 32.10 0.00 118 270 Peak 2 5650.32 61.37 68.53 -7.16 48.58 34.60 10.28 32.09 0.00 118 270 Peak 3 5710.06 87.48 108.12 -20.64 74.51 34.68 10.33 32.04 0.00 118 270 Peak 4 5722.53 91.33 116.66 -25.33 78.37 34.65 10.34 32.03 0.00 118 270 Peak	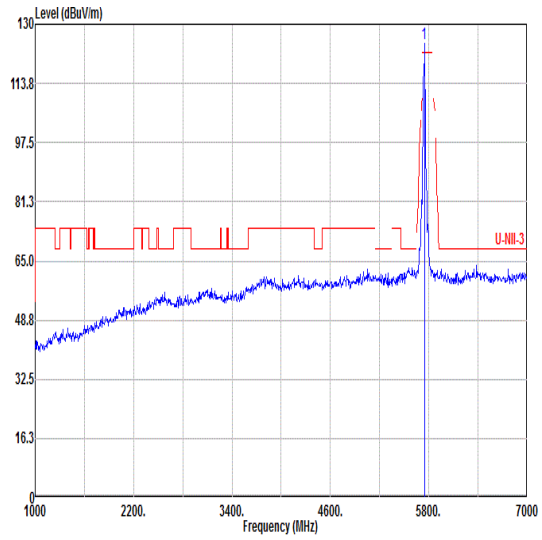 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5745.00 124.84 ------ ------ 111.88 34.61 10.36 32.01 0.00 118 270 PEAK
Avg	Blank	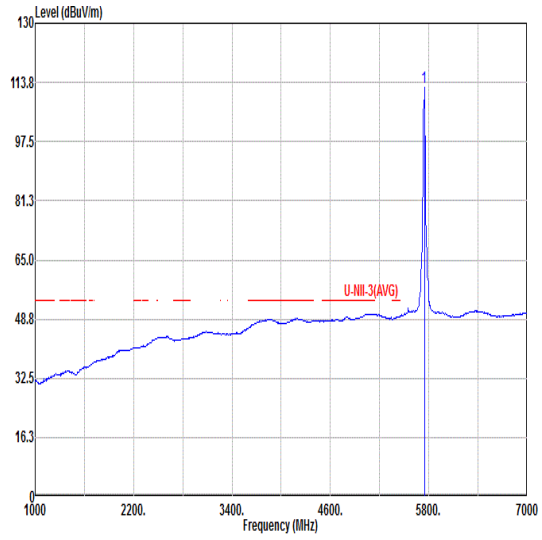 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5745.00 112.30 ------ ------ 99.34 34.60 10.37 32.01 0.00 118 270 AVERAGE

Mode	36	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	CDD 1S4T	
Pol.	Vertical	Fundamental
Peak	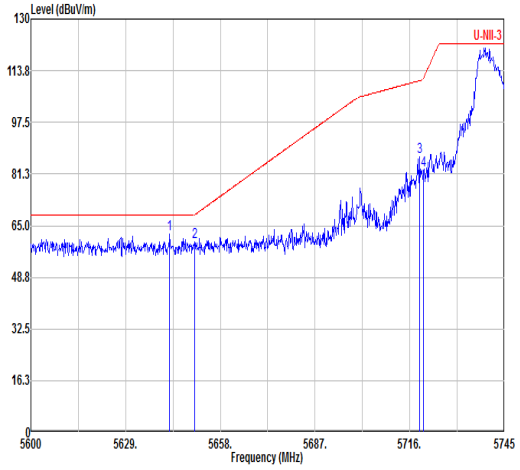 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5642.49 62.23 68.20 -5.97 49.43 34.62 10.28 32.10 0.00 345 0 Peak 2 5650.03 59.99 68.32 -8.33 47.20 34.60 10.28 32.09 0.00 345 0 Peak 3 5718.90 86.51 110.59 -24.08 73.55 34.66 10.34 32.04 0.00 345 0 Peak 4 5720.21 82.59 111.37 -28.78 69.62 34.66 10.34 32.03 0.00 345 0 Peak	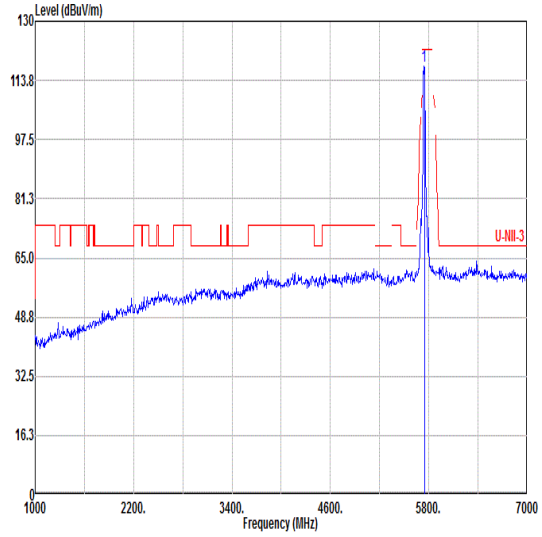 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 117.68 ------ ------ 104.72 34.61 10.36 32.01 0.00 345 0 PEAK
Avg	Blank	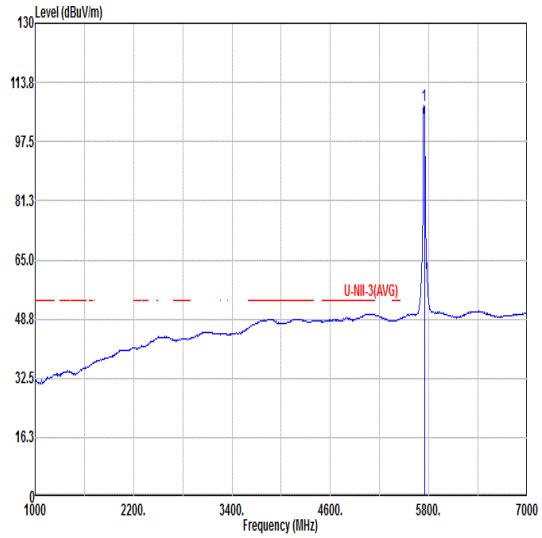 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 107.33 ------ ------ 94.37 34.62 10.36 32.02 0.00 345 0 AVERAGE

Mode	36	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	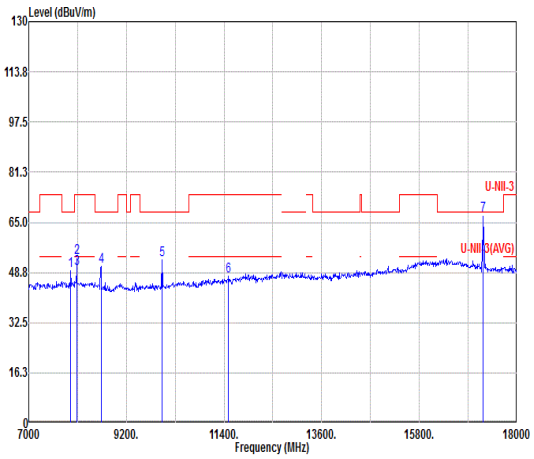 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7946.00 49.16 68.20 -19.04 60.85 35.90 12.35 59.94 0.00 -- -- Peak 2 8078.00 53.66 74.00 -20.34 65.29 35.90 12.44 59.97 0.00 123 239 Peak 3 8078.00 50.16 54.00 -3.84 61.79 35.90 12.44 59.97 0.00 123 239 Average 4 8628.00 50.70 68.20 -17.50 62.49 35.96 12.95 60.70 0.00 -- -- Peak 5 10003.00 52.83 68.20 -15.37 62.35 37.50 13.89 60.91 0.00 -- -- Peak 6 11490.00 47.46 74.00 -26.54 55.21 38.20 14.91 60.86 0.00 -- -- PEAK 7 17241.00 67.35 68.20 -0.85 66.96 40.96 18.37 58.94 0.00 -- -- Peak	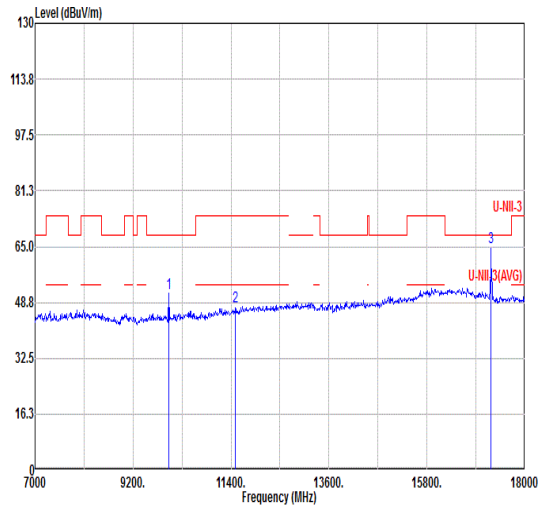 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10003.00 51.29 68.20 -16.91 60.81 37.50 13.89 60.91 0.00 -- -- Peak 2 11490.00 47.53 74.00 -26.47 55.28 38.20 14.91 60.86 0.00 -- -- PEAK 3 17241.00 64.69 68.20 -3.51 64.30 40.96 18.37 58.94 0.00 -- -- Peak

Mode	37	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	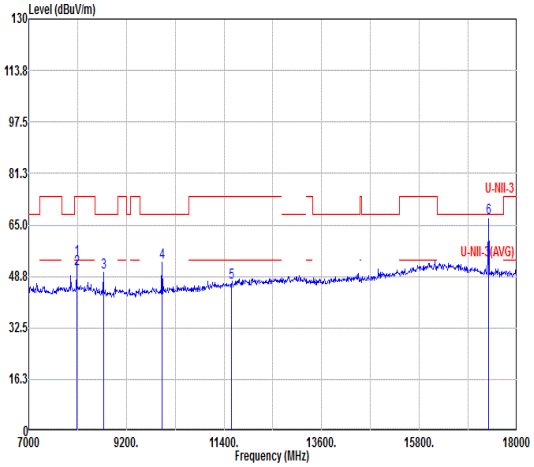 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8078.00 54.22 74.00 -19.78 65.85 35.90 12.44 59.97 0.00 100 244 Peak 2 8078.00 51.00 54.00 -3.00 62.63 35.90 12.44 59.97 0.00 100 244 Average 3 8683.00 50.13 68.20 -18.07 61.83 36.07 12.95 60.72 0.00 -- -- Peak 4 10003.00 53.06 68.20 -15.14 62.58 37.50 13.89 60.91 0.00 -- -- Peak 5 11570.00 46.90 74.00 -27.10 54.41 38.34 14.97 60.82 0.00 -- -- PEAK 6 17362.00 67.25 68.20 -0.95 66.97 40.84 18.44 59.00 0.00 -- -- Peak	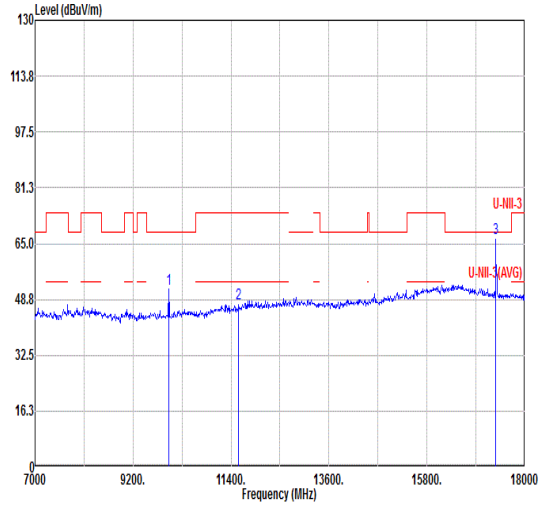 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10003.00 51.66 68.20 -16.54 61.18 37.50 13.89 60.91 0.00 -- -- Peak 2 11570.00 47.50 74.00 -26.50 55.01 38.34 14.97 60.82 0.00 -- -- PEAK 3 17351.00 66.41 68.20 -1.79 66.11 40.85 18.44 58.99 0.00 -- -- Peak

Mode	38
	Band Edge
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz
ANT	CDD 1S4T

Pol.	Horizontal	Fundamental
Peak	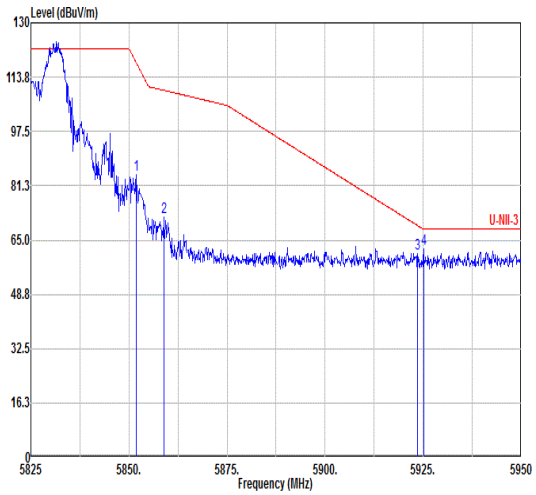 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5851.88 84.42 118.02 -33.60 71.01 34.90 10.45 31.94 0.00 111 269 Peak 2 5858.88 71.84 109.81 -37.97 58.40 34.92 10.46 31.94 0.00 111 269 Peak 3 5923.63 60.95 69.31 -8.36 47.34 35.09 10.51 31.99 0.00 111 269 PEAK 4 5925.13 62.42 68.20 -5.78 48.79 35.10 10.52 31.99 0.00 111 269 PEAK	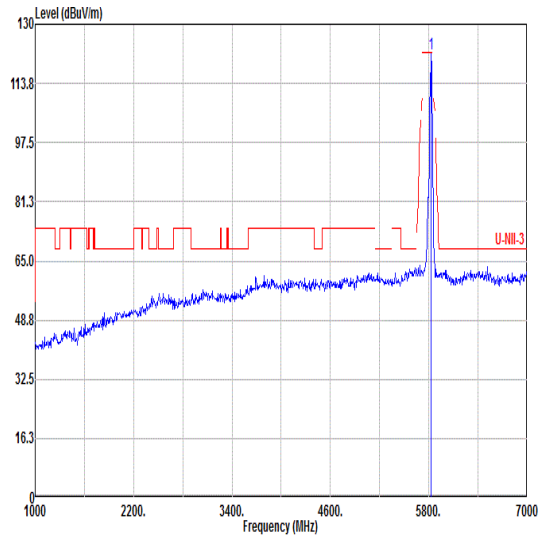 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 121.84 ------ ------ 108.56 34.80 10.43 31.95 0.00 111 269 PEAK
Avg	Blank	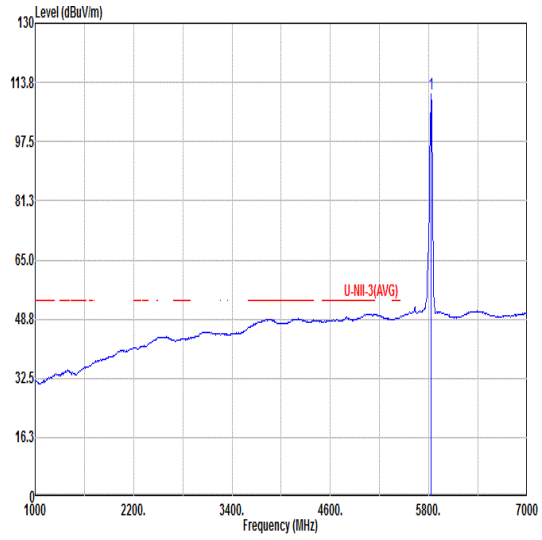 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 110.62 ------ ------ 97.31 34.82 10.43 31.94 0.00 111 269 AVERAGE

Mode	38
	Band Edge
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz
ANT	CDD 1S4T

Pol.	Vertical	Fundamental
Peak	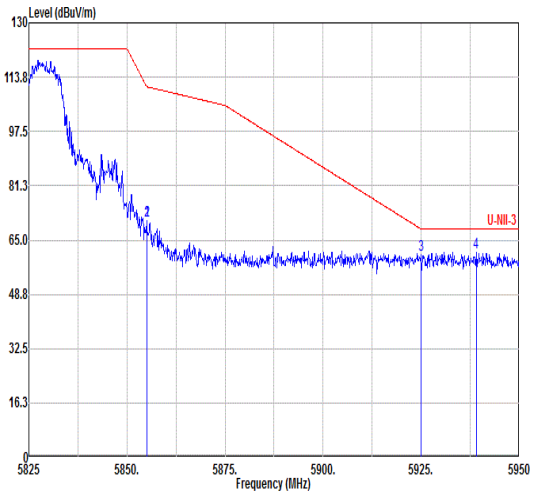 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 70.95 110.90 -39.95 57.53 34.91 10.45 31.94 0.00 225 0 PEAK 2 5855.00 70.95 110.90 -39.95 57.53 34.91 10.45 31.94 0.00 225 0 PEAK 3 5924.88 60.59 68.39 -7.80 46.96 35.10 10.52 31.99 0.00 225 0 PEAK 4 5939.00 61.47 68.20 -6.73 47.78 35.16 10.53 32.00 0.00 225 0 PEAK	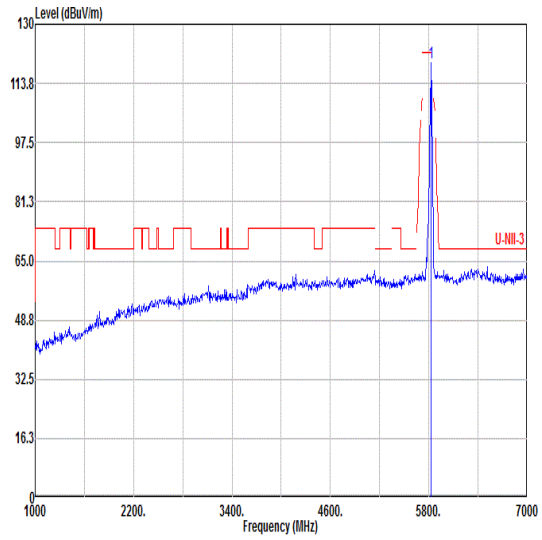 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 119.60 ------ ------ 106.32 34.80 10.43 31.95 0.00 225 0 PEAK
Avg	Blank	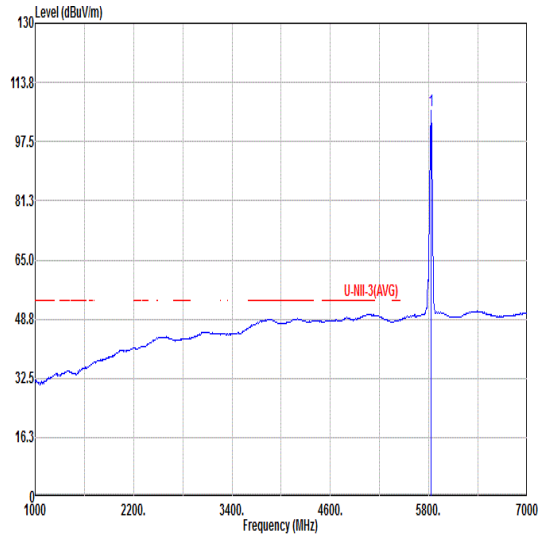 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 106.07 ------ ------ 92.76 34.82 10.43 31.94 0.00 225 0 AVERAGE

Mode	38	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	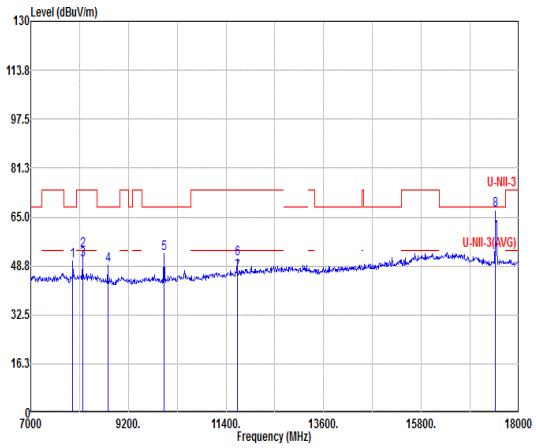 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7946.00 50.32 68.20 -17.88 62.01 35.90 12.35 59.94 0.00 -- -- Peak 2 8166.00 53.74 74.00 -20.26 65.50 35.90 12.45 60.11 0.00 112 238 Peak 3 8166.00 50.57 54.00 -3.43 62.33 35.90 12.45 60.11 0.00 112 238 Average 4 8738.00 49.07 68.20 -19.13 60.67 36.18 12.96 60.74 0.00 -- -- Peak 5 10003.00 52.84 68.20 -15.36 62.36 37.50 13.89 60.91 0.00 -- -- Peak 6 11653.00 51.17 74.00 -22.83 58.40 38.51 15.03 60.77 0.00 100 95 Peak 7 11653.00 46.39 54.00 -7.61 53.62 38.51 15.03 60.77 0.00 100 95 Average 8 17472.00 67.46 68.20 -0.74 67.12 40.87 18.51 59.04 0.00 -- -- Peak	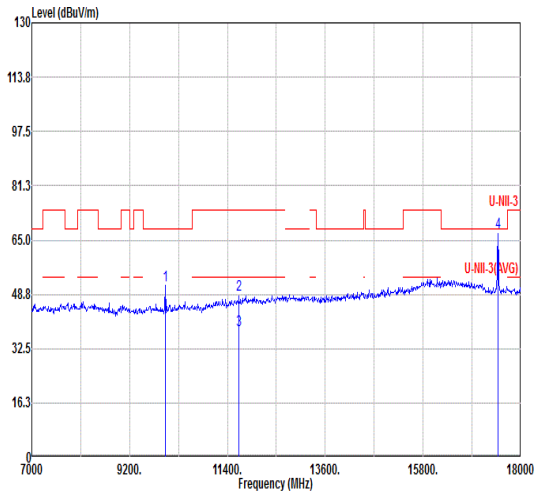 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10003.00 51.57 68.20 -16.63 61.09 37.50 13.89 60.91 0.00 100 138 Peak 2 11650.00 48.72 74.00 -25.28 55.97 38.50 15.02 60.77 0.00 100 0 PEAK 3 11650.00 38.01 54.00 -15.99 45.27 38.49 15.02 60.77 0.00 100 0 AVERAGE 4 17483.00 67.19 68.20 -1.01 66.84 40.88 18.52 59.05 0.00 300 161 Peak

Mode	39
	Band Edge
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz
ANT	CDD 1S4T

Pol.	Horizontal	Fundamental
Peak	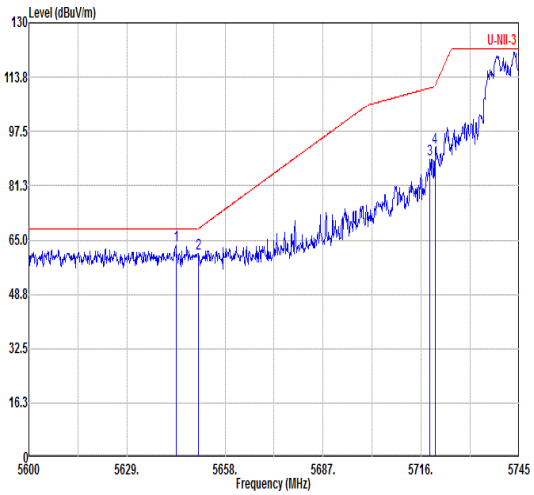 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5643.50 63.48 68.20 -4.72 50.69 34.61 10.28 32.10 0.00 100 266 Peak 2 5650.03 60.80 68.32 -7.52 48.01 34.60 10.28 32.09 0.00 100 266 Peak 3 5718.61 89.15 110.51 -21.36 76.19 34.66 10.34 32.04 0.00 100 266 Peak 4 5720.06 92.80 111.04 -18.24 79.83 34.66 10.34 32.03 0.00 100 266 Peak	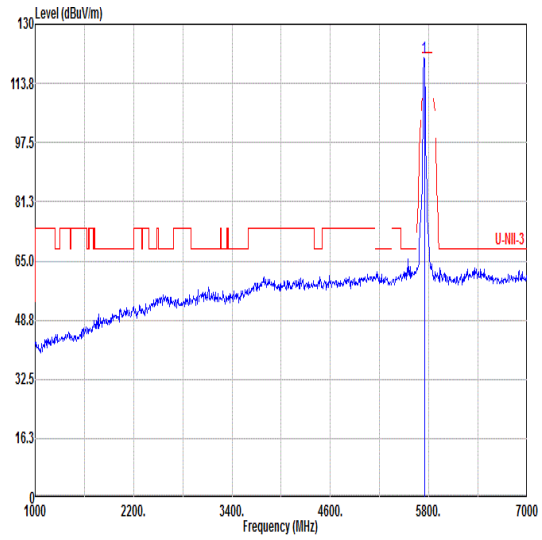 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5745.00 120.97 ------ ------ 108.01 34.61 10.36 32.01 0.00 100 266 PEAK
Avg	Blank	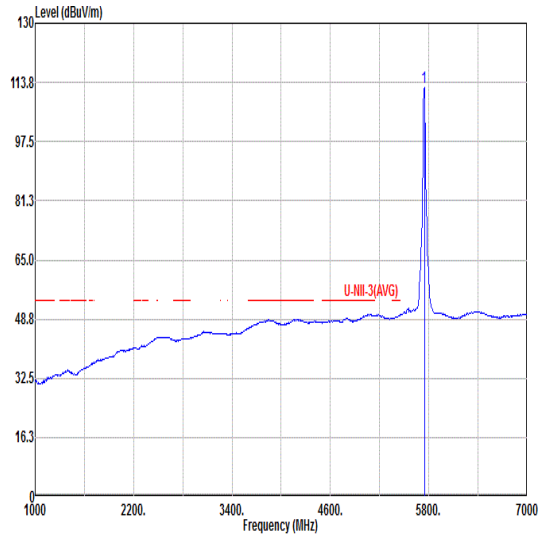 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5745.00 112.55 ------ ------ 99.59 34.61 10.36 32.01 0.00 100 266 AVERAGE

Mode	39	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz	
ANT	CDD 1S4T	
Pol.	Vertical	Fundamental
Peak	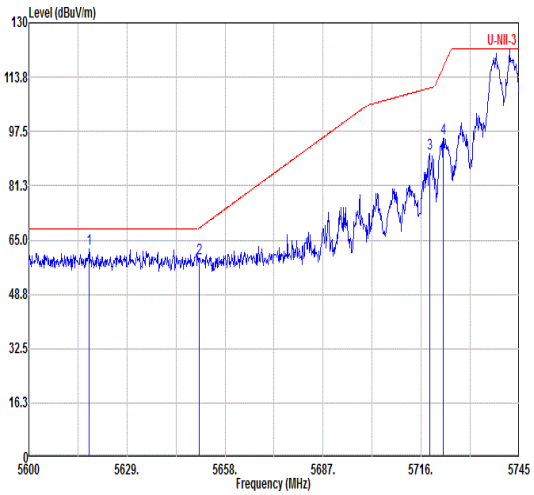 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5617.84 62.21 68.20 -5.99 49.38 34.66 10.26 32.09 0.00 279 0 Peak 2 5650.32 59.64 68.53 -8.89 46.85 34.60 10.28 32.09 0.00 279 0 Peak 3 5718.47 90.73 110.47 -19.74 77.77 34.66 10.34 32.04 0.00 279 0 Peak 4 5722.53 95.38 116.66 -21.28 82.42 34.65 10.34 32.03 0.00 279 0 Peak	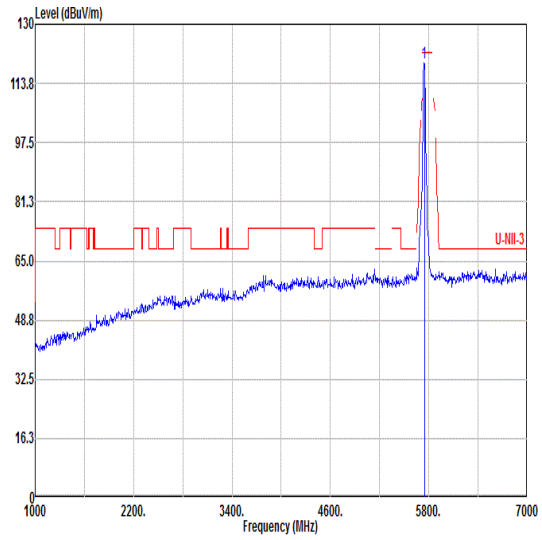 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5745.00 119.36 ------ ------ 106.40 34.61 10.36 32.01 0.00 279 0 PEAK
Avg	Blank	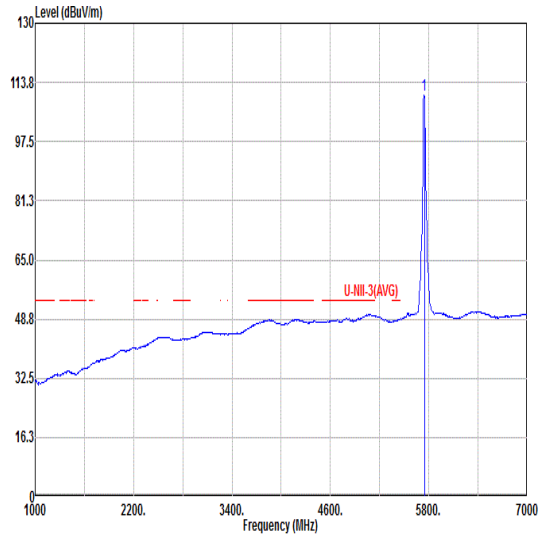 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5745.00 110.22 ------ ------ 97.26 34.62 10.36 32.02 0.00 279 0 AVERAGE

Mode	39	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full RU_5745MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	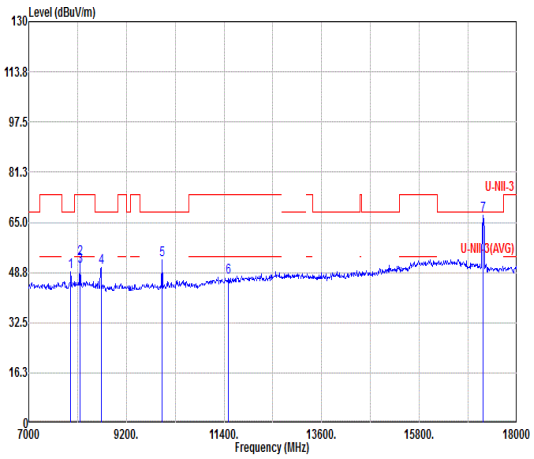 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7946.00 49.09 68.20 -19.11 60.78 35.90 12.35 59.94 0.00 -- -- Peak 2 8155.00 53.26 74.00 -20.74 65.00 35.90 12.45 60.09 0.00 113 239 Peak 3 8155.00 50.56 54.00 -3.44 62.30 35.90 12.45 60.09 0.00 113 239 Average 4 8628.00 50.46 68.20 -17.74 62.25 35.96 12.95 60.70 0.00 -- -- Peak 5 10003.00 52.95 68.20 -15.25 62.47 37.50 13.89 60.91 0.00 -- -- Peak 6 11490.00 47.17 74.00 -26.83 54.92 38.20 14.91 60.86 0.00 -- -- PEAK 7 17230.00 67.37 68.20 -0.83 66.98 40.97 18.36 58.94 0.00 -- -- Peak	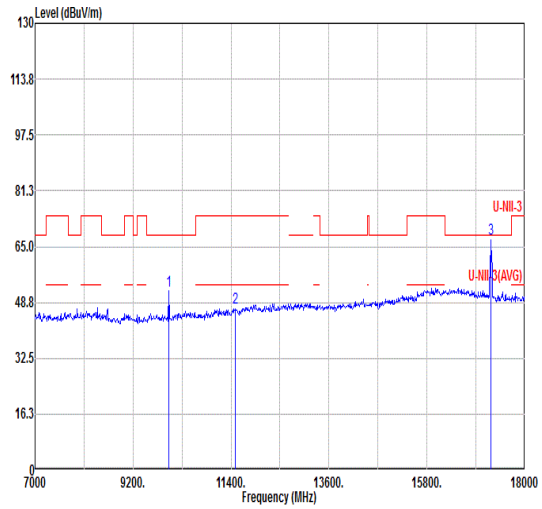 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10003.00 52.07 68.20 -16.13 61.59 37.50 13.89 60.91 0.00 -- -- Peak 2 11490.00 47.17 74.00 -26.83 54.92 38.20 14.91 60.86 0.00 -- -- PEAK 3 17241.00 67.18 68.20 -1.02 66.79 40.96 18.37 58.94 0.00 -- -- Peak

Mode	40	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full RU_5785MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	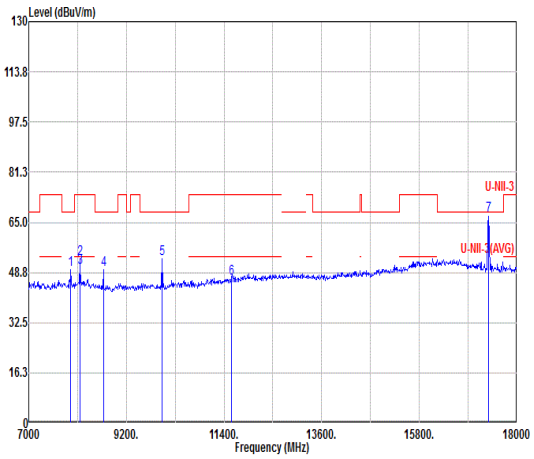 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7946.00 49.62 68.20 -18.58 61.31 35.90 12.35 59.94 0.00 -- -- Peak 2 8155.00 53.26 74.00 -20.74 65.00 35.90 12.45 60.09 0.00 112 239 Peak 3 8155.00 50.46 54.00 -3.54 62.20 35.90 12.45 60.09 0.00 112 239 Average 4 8683.00 49.59 68.20 -18.61 61.29 36.07 12.95 60.72 0.00 -- -- Peak 5 10003.00 53.13 68.20 -15.07 62.65 37.50 13.89 60.91 0.00 -- -- Peak 6 11570.00 46.77 74.00 -27.23 54.28 38.34 14.97 60.82 0.00 -- -- PEAK 7 17362.00 67.40 68.20 -0.80 67.12 40.84 18.44 59.00 0.00 -- -- Peak	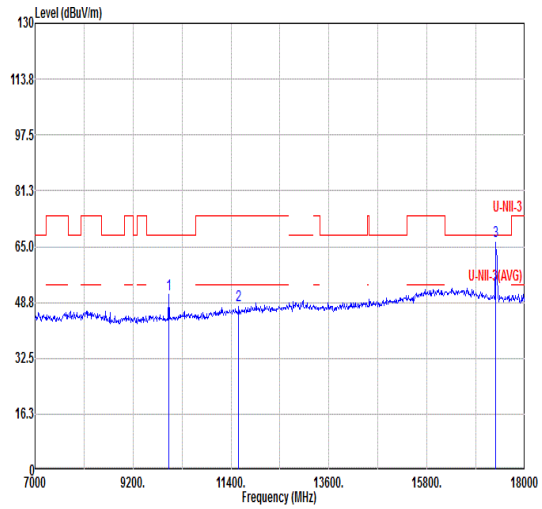 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10003.00 51.04 68.20 -17.16 60.56 37.50 13.89 60.91 0.00 -- -- Peak 2 11570.00 47.89 74.00 -26.11 55.40 38.34 14.97 60.82 0.00 -- -- PEAK 3 17351.00 66.68 68.20 -1.52 66.38 40.85 18.44 58.99 0.00 -- -- Peak

Mode	41
	Band Edge
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz
ANT	CDD 1S4T

Pol.	Horizontal	Fundamental
Peak	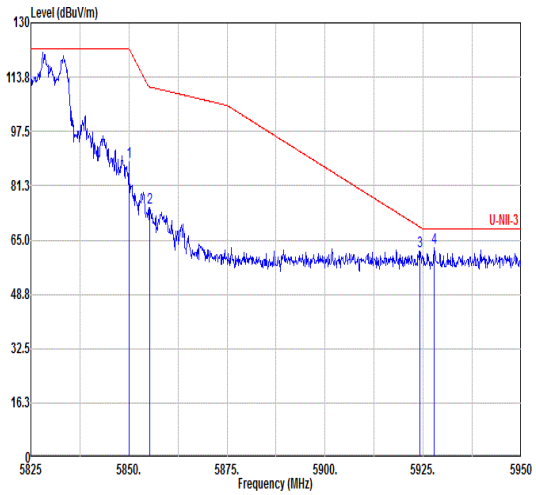 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5850.00 88.34 122.30 -33.96 74.92 34.90 10.45 31.93 0.00 119 268 PEAK 2 5855.38 74.66 110.79 -36.13 61.24 34.91 10.45 31.94 0.00 119 268 PEAK 3 5924.13 61.81 68.94 -7.13 48.19 35.10 10.51 31.99 0.00 119 268 PEAK 4 5927.75 62.60 68.20 -5.60 48.96 35.11 10.52 31.99 0.00 119 268 PEAK	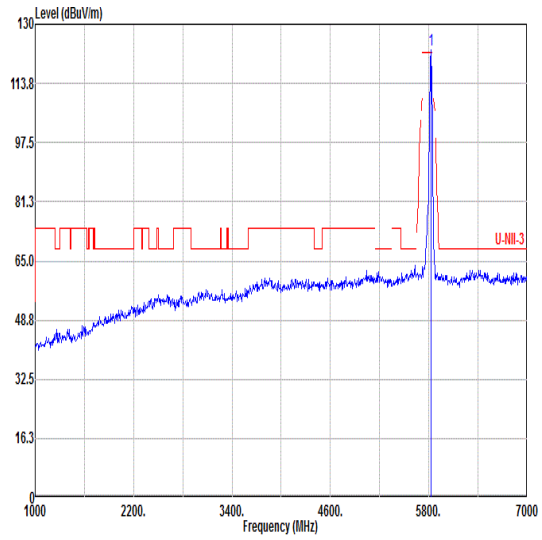 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 122.99 ------ ------ 109.71 34.80 10.43 31.95 0.00 119 268 PEAK
Avg	Blank	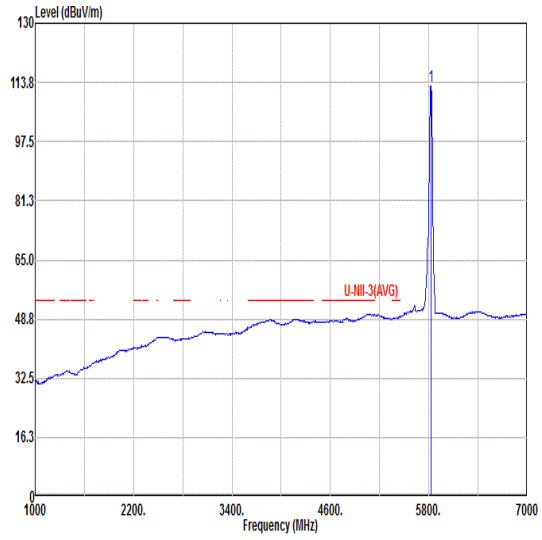 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 112.60 ------ ------ 99.36 34.77 10.42 31.95 0.00 119 268 AVERAGE

Mode	41
	Band Edge
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz
ANT	CDD 1S4T

Pol.	Vertical	Fundamental
Peak	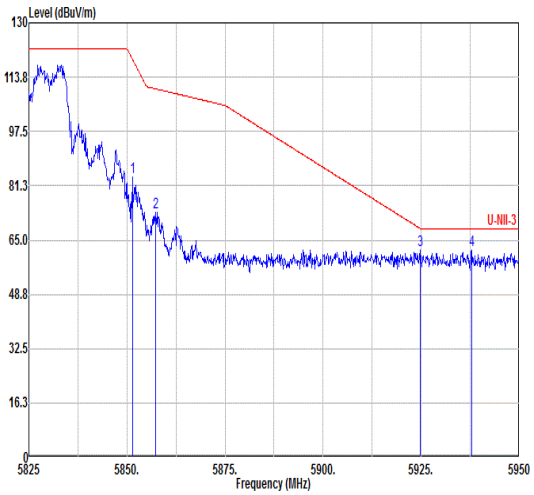 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5851.38 83.87 119.16 -35.29 70.45 34.90 10.45 31.93 0.00 273 0 PEAK 2 5857.38 73.45 110.23 -36.78 60.02 34.91 10.46 31.94 0.00 273 0 PEAK 3 5924.75 62.06 68.48 -6.42 48.43 35.10 10.52 31.99 0.00 273 0 PEAK 4 5937.88 61.85 68.20 -6.35 48.17 35.15 10.53 32.00 0.00 273 0 PEAK	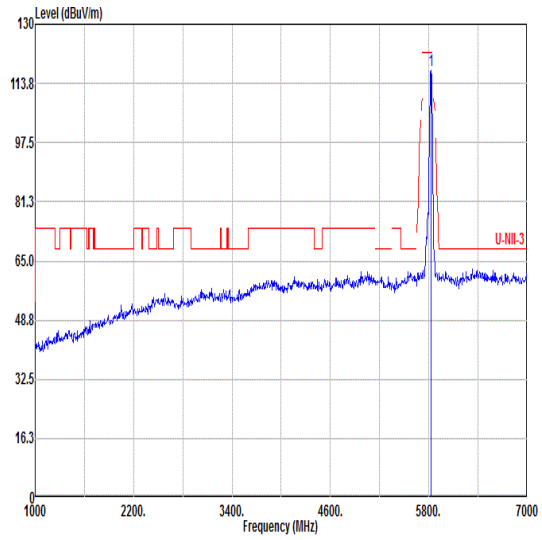 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 117.37 ------ ------ 104.09 34.80 10.43 31.95 0.00 273 0 PEAK
Avg	Blank	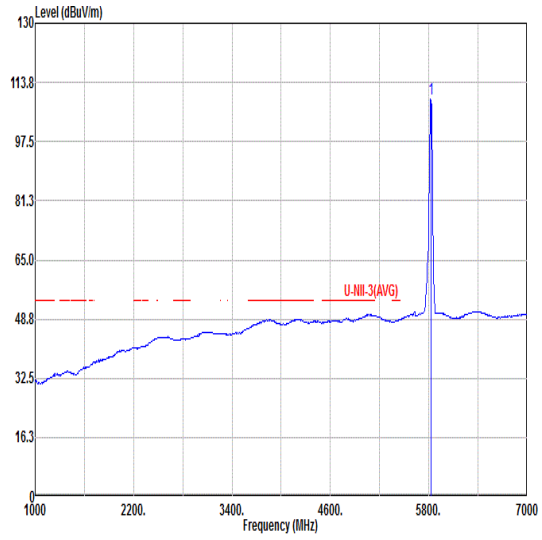 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 109.28 ------ ------ 96.04 34.77 10.42 31.95 0.00 273 0 AVERAGE

Mode	41	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full RU_5825MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	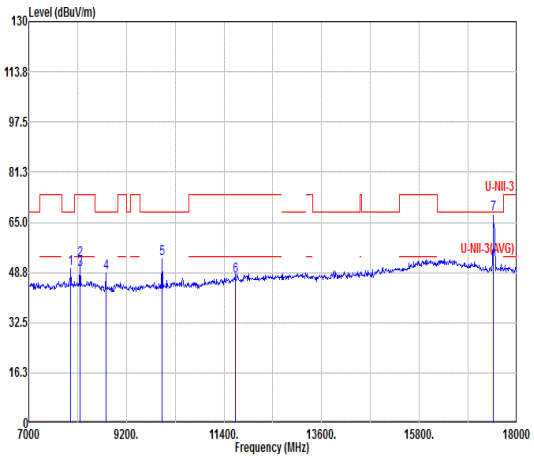 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7946.00 50.01 68.20 -18.19 61.70 35.90 12.35 59.94 0.00 -- -- Peak 2 8155.00 52.96 74.00 -21.04 64.70 35.90 12.45 60.09 0.00 105 245 Peak 3 8155.00 49.76 54.00 -4.24 61.50 35.90 12.45 60.09 0.00 105 245 Average 4 8738.00 48.57 68.20 -19.63 60.17 36.18 12.96 60.74 0.00 -- -- Peak 5 10003.00 53.07 68.20 -15.13 62.59 37.50 13.89 60.91 0.00 -- -- Peak 6 11650.00 47.64 74.00 -26.36 54.89 38.50 15.02 60.77 0.00 -- -- PEAK 7 17472.00 67.65 68.20 -0.55 67.31 40.87 18.51 59.04 0.00 -- -- Peak	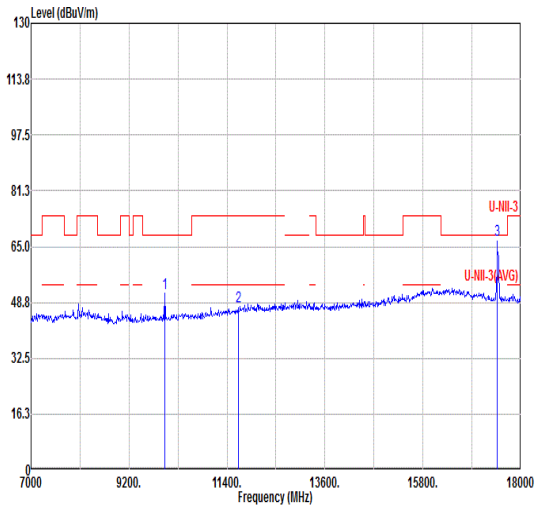 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10003.00 51.34 68.20 -16.86 60.86 37.50 13.89 60.91 0.00 -- -- Peak 2 11650.00 47.58 74.00 -26.42 54.83 38.50 15.02 60.77 0.00 -- -- PEAK 3 17472.00 67.05 68.20 -1.15 66.71 40.87 18.51 59.04 0.00 -- -- Peak

Mode	42	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Fundamental
Peak	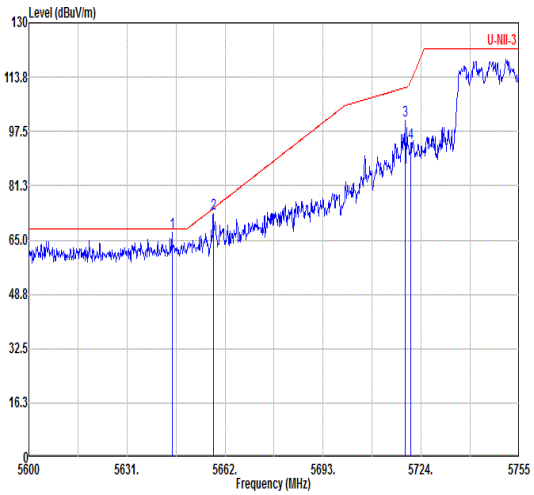 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5645.26 67.27 68.20 -0.93 54.48 34.61 10.28 32.10 0.00 100 275 Peak 2 5658.28 72.77 74.45 -1.68 59.95 34.62 10.29 32.09 0.00 100 275 Peak 3 5719.04 100.77 110.63 -9.86 87.80 34.66 10.34 32.03 0.00 100 275 Peak 4 5720.75 94.24 112.60 -18.36 81.27 34.66 10.34 32.03 0.00 100 275 Peak	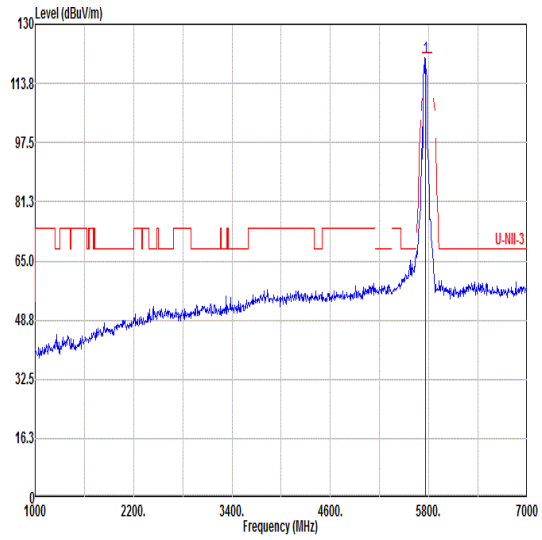 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 120.71 ------ ------ 107.75 34.60 10.37 32.01 0.00 100 275 PEAK
Avg	Blank	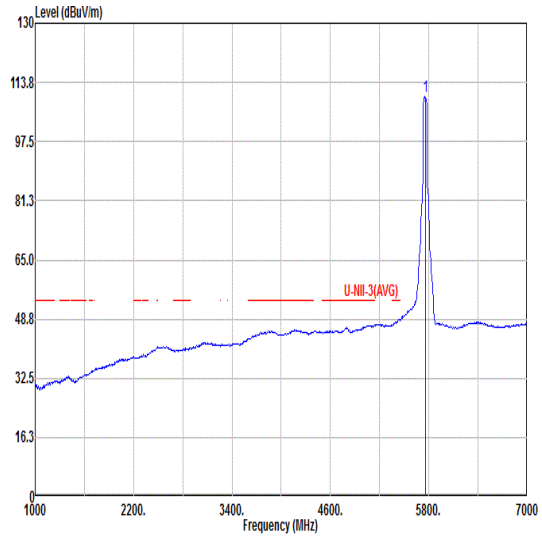 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 109.83 ------ ------ 96.86 34.61 10.37 32.01 0.00 100 275 AVERAGE

Mode	42	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Fundamental
Peak	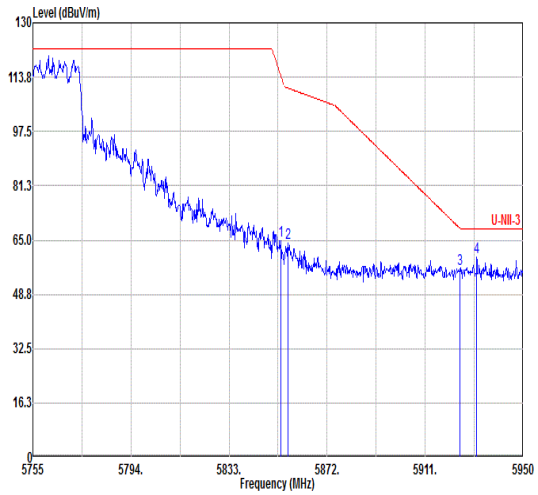 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5853.67 64.82 113.93 -49.11 51.40 34.91 10.45 31.94 0.00 100 275 PEAK 2 5856.40 63.95 110.51 -46.56 50.52 34.91 10.46 31.94 0.00 100 275 PEAK 3 5924.85 56.20 68.41 -12.21 42.57 35.10 10.52 31.99 0.00 100 275 PEAK 4 5931.48 59.84 68.20 -8.36 46.19 35.13 10.52 32.00 0.00 100 275 PEAK	Blank

Mode	42	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz	
ANT	CDD 1S4T	
Pol.	Vertical	Fundamental
Peak	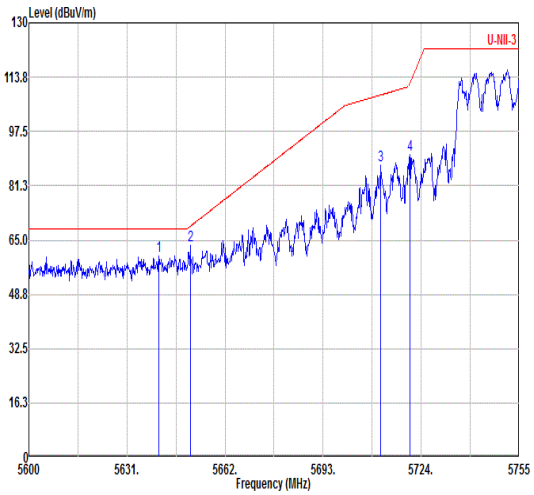 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5641.08 60.30 68.20 -7.90 47.50 34.62 10.28 32.10 0.00 300 130 Peak 2 5651.00 63.34 69.04 -5.70 50.54 34.60 10.29 32.09 0.00 300 130 Peak 3 5711.14 87.28 108.42 -21.14 74.31 34.68 10.33 32.04 0.00 300 130 Peak 4 5720.44 90.69 111.89 -21.20 77.72 34.66 10.34 32.03 0.00 300 130 Peak	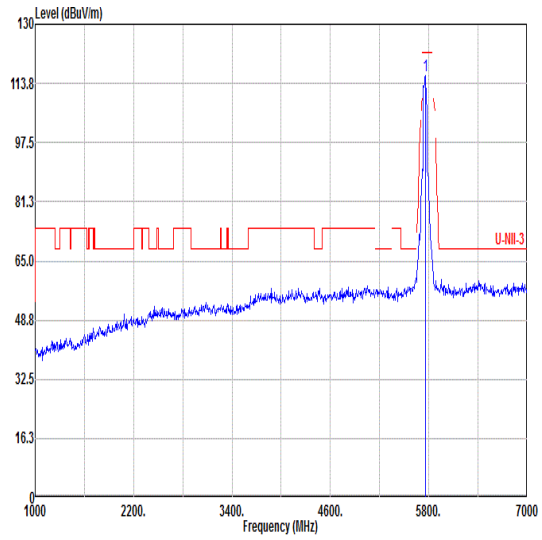 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 115.97 ------ ------ 102.98 34.62 10.37 32.00 0.00 300 130 PEAK
Avg	Blank	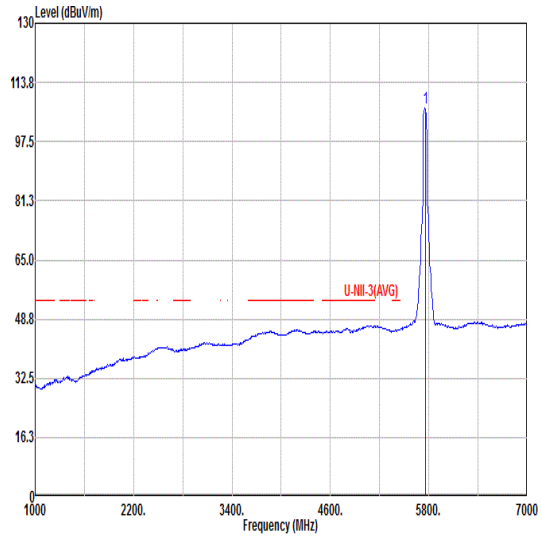 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 106.60 ------ ------ 93.63 34.61 10.37 32.01 0.00 300 130 AVERAGE

Mode	42	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz	
ANT	CDD 1S4T	
Pol.	Vertical	Fundamental
Peak	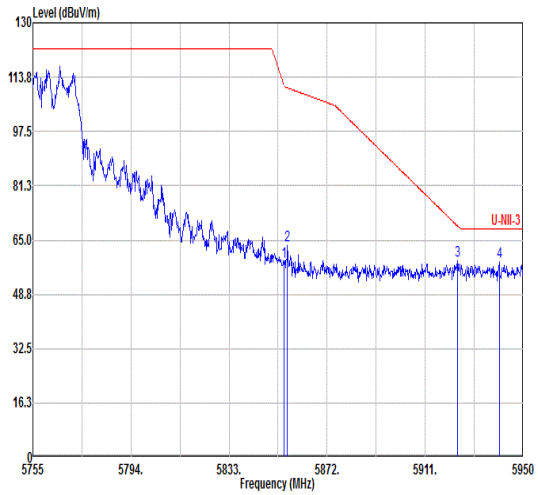 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.84 58.32 111.26 -52.94 44.90 34.91 10.45 31.94 0.00 300 130 PEAK 2 5856.21 63.40 110.56 -47.16 49.98 34.91 10.45 31.94 0.00 300 130 PEAK 3 5923.87 58.77 69.13 -10.36 45.15 35.10 10.51 31.99 0.00 300 130 PEAK 4 5940.45 58.52 68.20 -9.68 44.83 35.16 10.53 32.00 0.00 300 130 PEAK	Blank

Mode	42	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	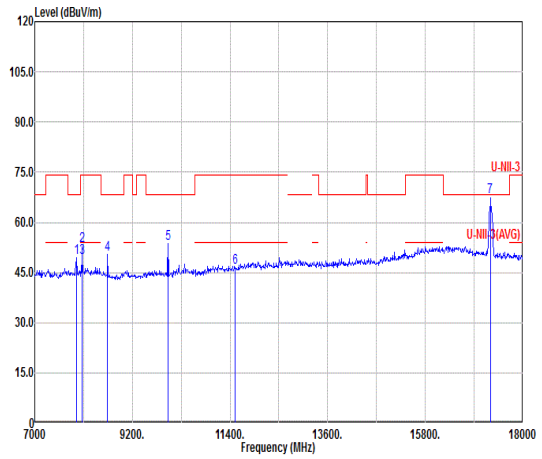 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7946.00 49.33 68.20 -18.87 61.02 35.90 12.35 59.94 0.00 -- -- Peak 2 8067.00 53.05 74.00 -20.95 64.66 35.90 12.44 59.95 0.00 108 237 Peak 3 8067.00 49.59 54.00 -4.41 61.20 35.90 12.44 59.95 0.00 108 237 Average 4 8639.00 50.54 68.20 -17.66 62.31 35.98 12.95 60.70 0.00 -- -- Peak 5 10003.00 53.66 68.20 -14.54 63.18 37.50 13.89 60.91 0.00 -- -- Peak 6 11510.00 46.51 74.00 -27.49 54.22 38.22 14.92 60.85 0.00 -- -- PEAK 7 17263.00 67.71 68.20 -0.49 67.34 40.94 18.38 58.95 0.00 -- -- Peak	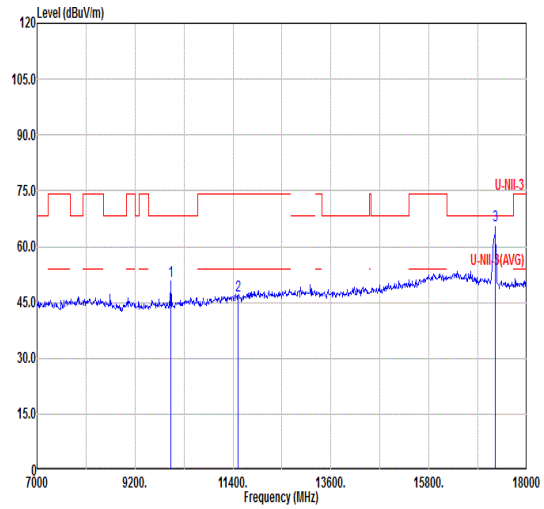 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10003.00 50.58 68.20 -17.62 60.10 37.50 13.89 60.91 0.00 -- -- Peak 2 11510.00 46.84 74.00 -27.16 54.55 38.22 14.92 60.85 0.00 -- -- PEAK 3 17285.00 65.68 68.20 -2.52 65.33 40.92 18.39 58.96 0.00 -- -- Peak
Peak Avg	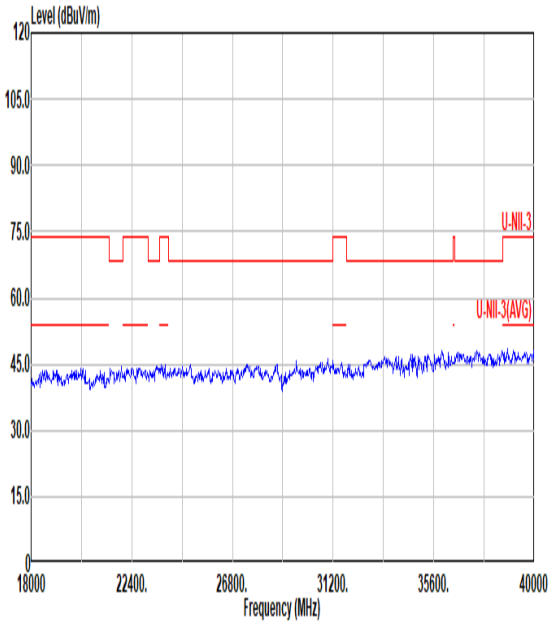	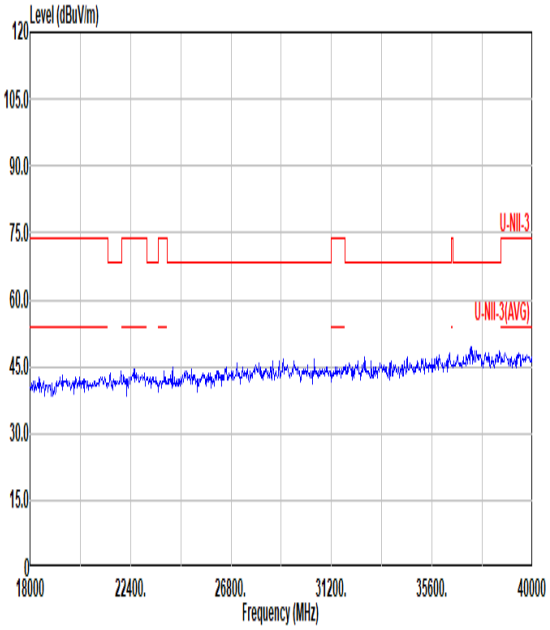

Mode	43	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Fundamental
Peak	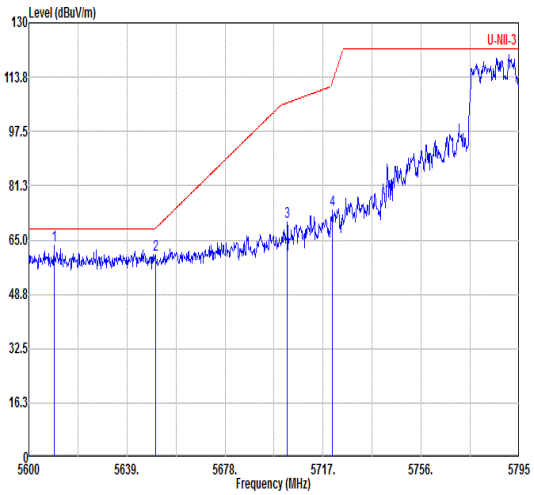 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5609.95 63.38 68.20 -4.82 50.53 34.68 10.25 32.08 0.00 100 274 PEAK 2 5650.31 60.47 68.53 -8.06 47.68 34.60 10.28 32.09 0.00 100 274 PEAK 3 5702.77 70.39 106.08 -35.69 57.42 34.69 10.33 32.05 0.00 100 274 PEAK 4 5720.71 74.07 112.51 -38.44 61.10 34.66 10.34 32.03 0.00 100 274 PEAK	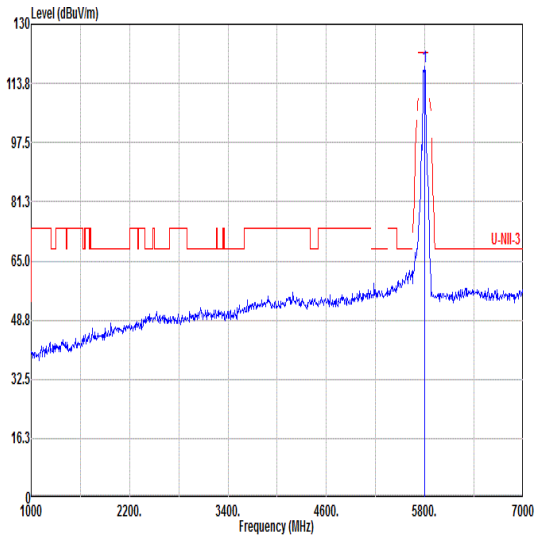 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5795.00 118.42 ------ ------ 105.28 34.70 10.41 31.97 0.00 100 274 PEAK
Avg	Blank	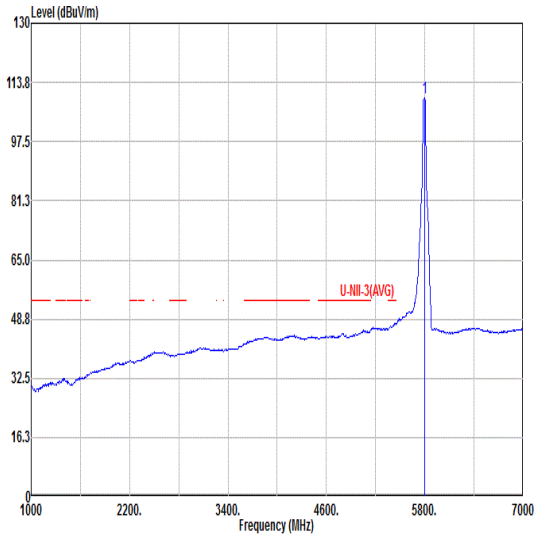 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5795.00 109.43 ------ ------ 96.31 34.69 10.40 31.97 0.00 100 274 AVERAGE

Mode	43	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Fundamental
Peak	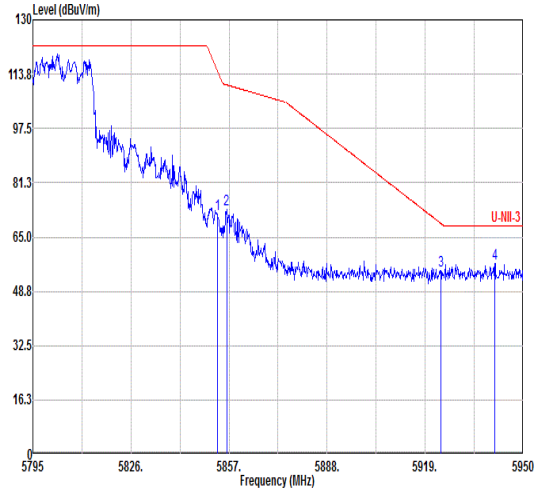 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5853.44 71.93 114.47 -42.54 58.51 34.91 10.45 31.94 0.00 100 274 PEAK 2 5856.23 73.20 110.56 -37.36 59.78 34.91 10.45 31.94 0.00 100 274 PEAK 3 5923.96 54.84 69.07 -14.23 41.22 35.10 10.51 31.99 0.00 100 274 PEAK 4 5941.01 57.06 68.20 -11.14 43.37 35.16 10.53 32.00 0.00 100 274 PEAK	Blank

Mode	43
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz
ANT	CDD 1S4T

Pol.	Vertical	Fundamental
Peak	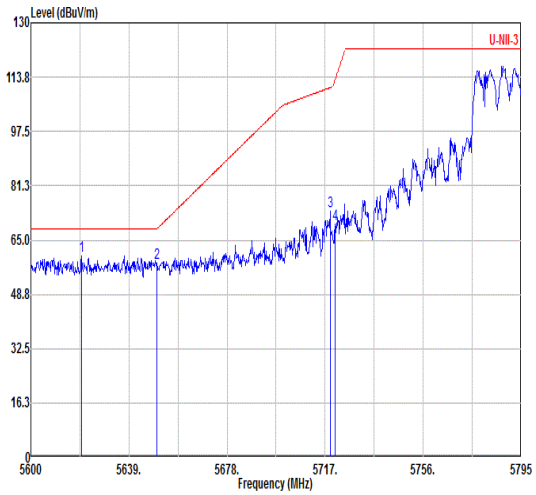 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5620.09 60.36 68.20 -7.84 47.53 34.66 10.26 32.09 0.00 300 4 PEAK 2 5650.12 58.25 68.39 -10.14 45.46 34.60 10.28 32.09 0.00 300 4 PEAK 3 5718.95 73.79 110.61 -36.82 60.83 34.66 10.34 32.04 0.00 300 4 PEAK 4 5720.90 69.64 112.95 -43.31 56.67 34.66 10.34 32.03 0.00 300 4 PEAK	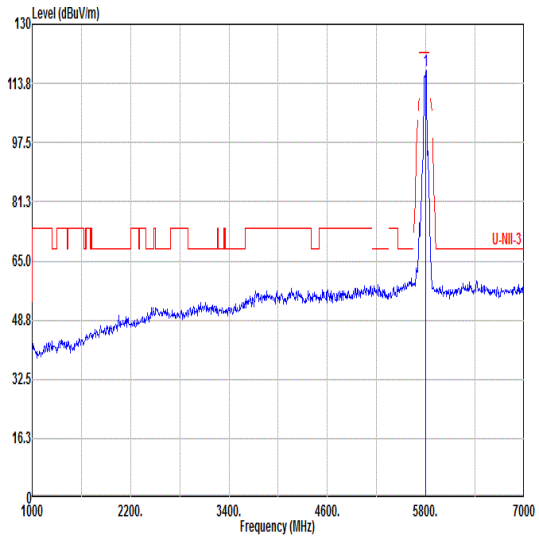 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5795.00 117.43 ------ ------ 104.26 34.72 10.41 31.96 0.00 300 4 PEAK
Avg	Blank	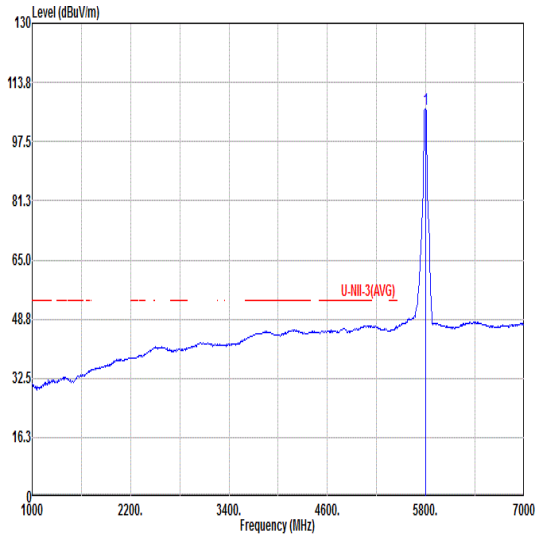 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5795.00 106.46 ------ ------ 93.34 34.69 10.40 31.97 0.00 300 4 AVERAGE

Mode	43	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz	
ANT	CDD 1S4T	
Pol.	Vertical	Fundamental
Peak	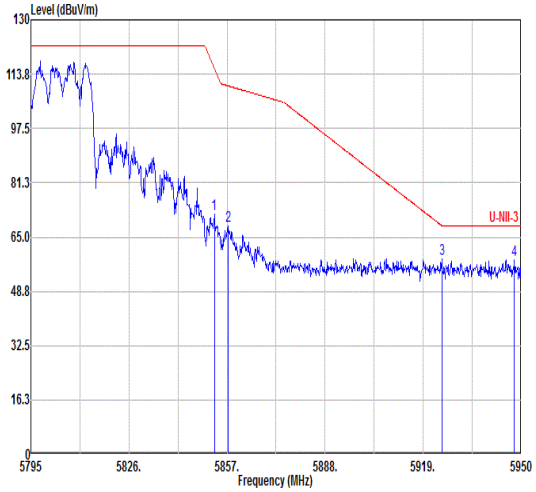 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5852.97 72.00 115.53 -43.53 58.58 34.91 10.45 31.94 0.00 300 4 PEAK 2 5857.47 68.35 110.21 -41.86 54.92 34.91 10.46 31.94 0.00 300 4 PEAK 3 5924.89 58.35 68.38 -10.03 44.72 35.10 10.52 31.99 0.00 300 4 PEAK 4 5947.83 58.23 68.20 -9.97 44.51 35.19 10.54 32.01 0.00 300 4 PEAK	Blank

Mode	43	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	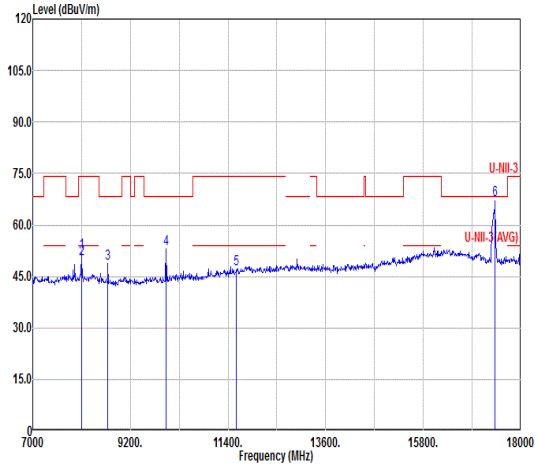 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8100.00 52.03 74.00 -21.97 63.69 35.90 12.44 60.00 0.00 100 244 Peak 2 8100.00 50.23 54.00 -3.77 61.89 35.90 12.44 60.00 0.00 100 244 Average 3 8694.00 48.84 68.20 -19.36 60.52 36.09 12.95 60.72 0.00 -- -- Peak 4 10003.00 52.97 68.20 -15.23 62.49 37.50 13.89 60.91 0.00 -- -- Peak 5 11590.00 47.27 74.00 -26.73 54.72 38.38 14.98 60.81 0.00 -- -- PEAK 6 17406.00 67.46 68.20 -0.74 67.19 40.81 18.47 59.01 0.00 -- -- Peak	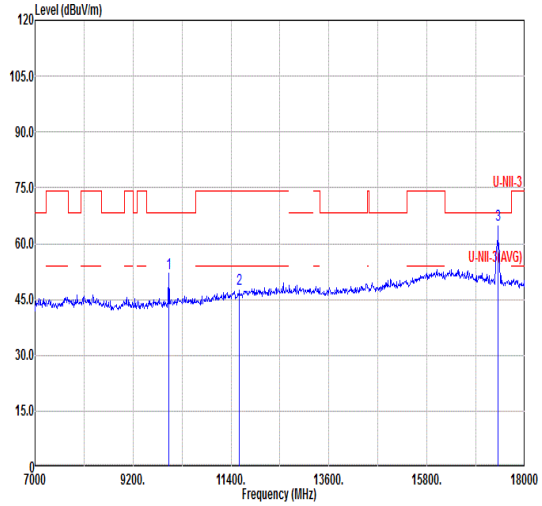 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10003.00 52.08 68.20 -16.12 61.60 37.50 13.89 60.91 0.00 -- -- Peak 2 11590.00 47.65 74.00 -26.35 55.10 38.38 14.98 60.81 0.00 -- -- PEAK 3 17395.00 64.91 68.20 -3.29 64.65 40.81 18.46 59.01 0.00 -- -- Peak

Mode	44
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz
ANT	CDD 1S4T

Pol.	Horizontal	Fundamental
Peak	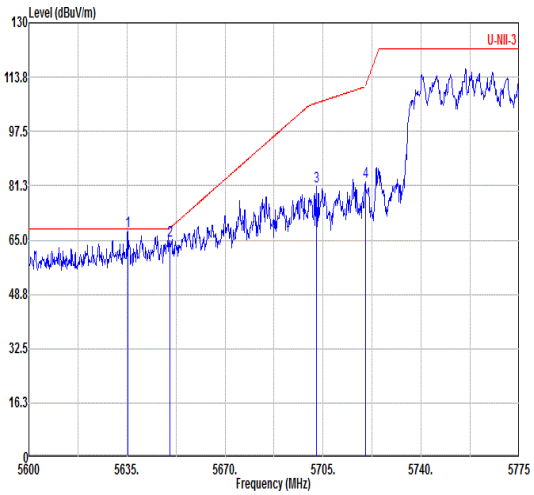 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5635.35 67.56 68.20 -0.64 54.76 34.63 10.27 32.10 0.00 131 279 Peak 2 5650.40 64.93 68.60 -3.67 52.14 34.60 10.28 32.09 0.00 131 279 Peak 3 5702.73 81.17 106.06 -24.89 68.20 34.69 10.33 32.05 0.00 131 279 Peak 4 5720.05 82.58 111.01 -28.43 69.61 34.66 10.34 32.03 0.00 131 279 Peak	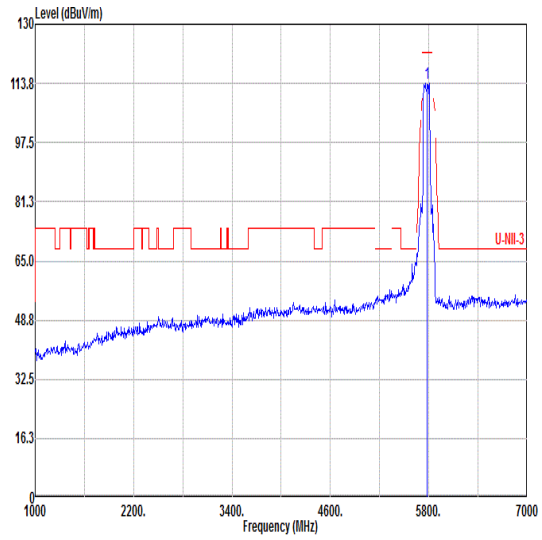 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5775.00 113.67 ------ ------ 100.68 34.62 10.37 32.00 0.00 131 279 PEAK
Avg	Blank	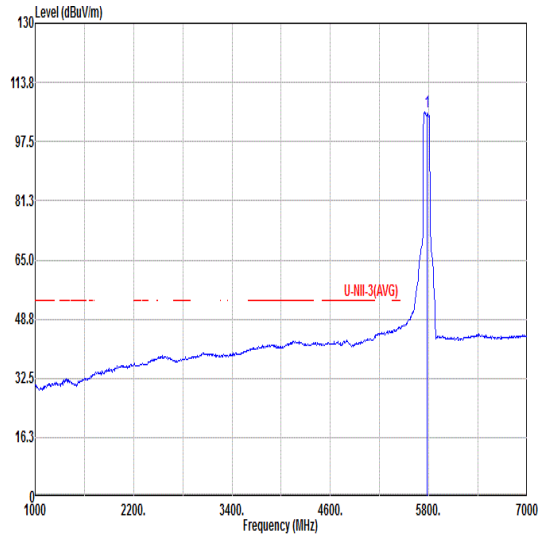 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5775.00 105.69 ------ ------ 92.65 34.65 10.38 31.99 0.00 131 279 AVERAGE

Mode	44	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Fundamental
Peak	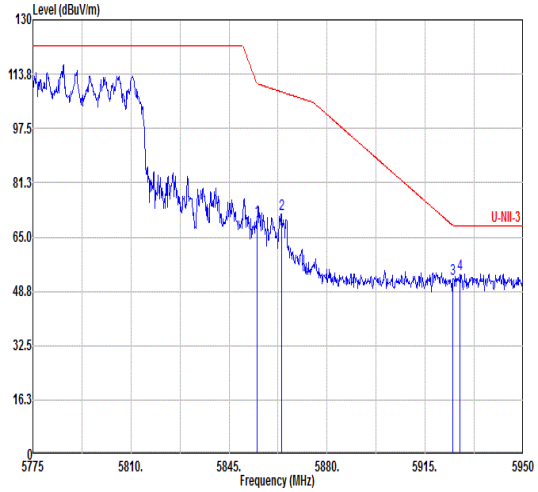 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.98 70.08 110.96 -40.88 56.66 34.91 10.45 31.94 0.00 131 279 PEAK 2 5863.73 71.81 108.45 -36.64 58.36 34.93 10.46 31.94 0.00 131 279 PEAK 3 5924.98 52.59 68.32 -15.73 38.96 35.10 10.52 31.99 0.00 131 279 PEAK 4 5927.43 54.06 68.20 -14.14 40.42 35.11 10.52 31.99 0.00 131 279 PEAK	Blank

Mode	44
	Band Edge - L
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz
ANT	CDD 1S4T

Pol.	Vertical	Fundamental
Peak	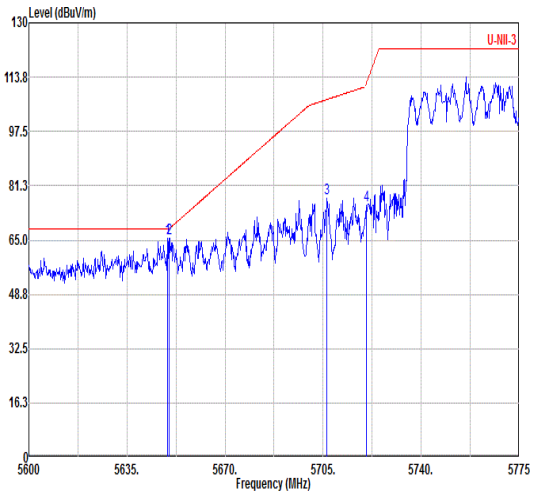 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5649.35 65.51 68.20 -2.69 52.72 34.60 10.28 32.09 0.00 391 3 PEAK 2 5650.05 65.45 68.34 -2.89 52.66 34.60 10.28 32.09 0.00 391 3 PEAK 3 5706.40 77.49 107.09 -29.60 64.52 34.69 10.33 32.05 0.00 391 3 PEAK 4 5720.58 75.27 112.21 -36.94 62.30 34.66 10.34 32.03 0.00 391 3 Peak	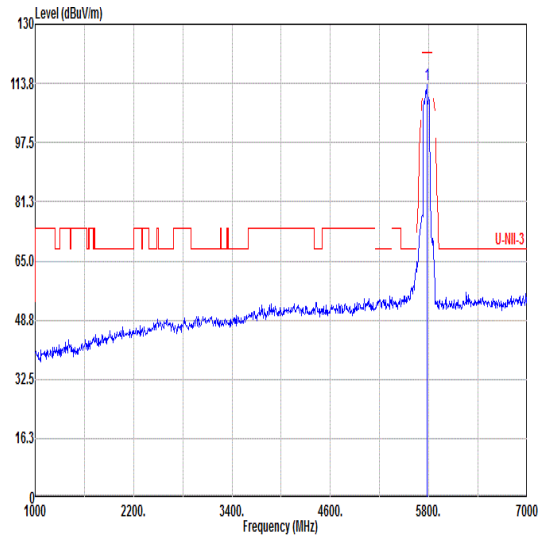 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 113.34 ------ ------ 100.29 34.65 10.39 31.99 0.00 391 3 PEAK
Avg	Blank	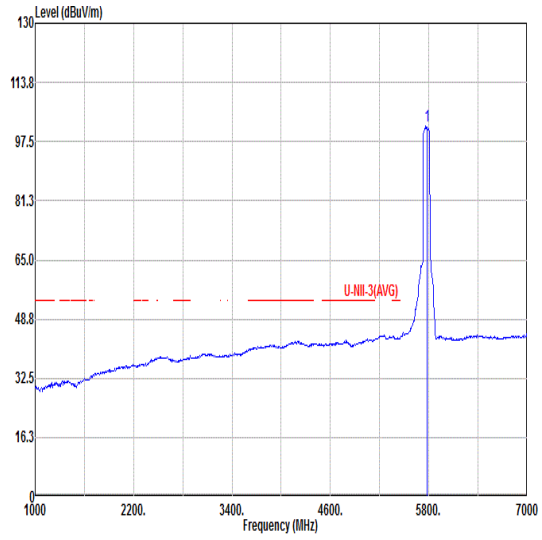 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 101.77 ------ ------ 88.73 34.65 10.38 31.99 0.00 391 3 AVERAGE

Mode	44	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz	
ANT	CDD 1S4T	
Pol.	Vertical	Fundamental
Peak	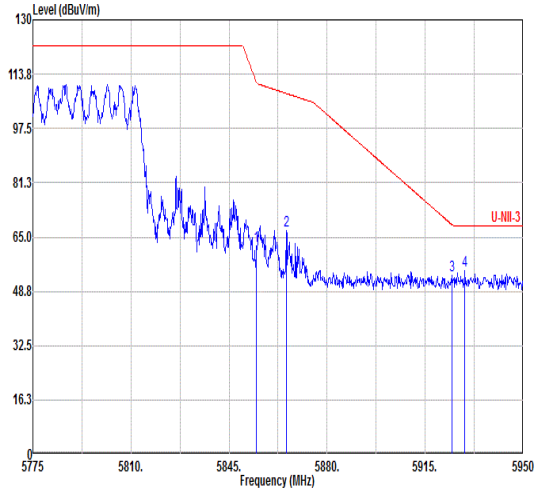 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 62.23 111.36 -49.13 48.81 34.91 10.45 31.94 0.00 391 3 PEAK 2 5865.48 66.77 107.96 -41.19 53.33 34.93 10.46 31.95 0.00 391 3 PEAK 3 5924.45 53.52 68.71 -15.19 39.89 35.10 10.52 31.99 0.00 391 3 PEAK 4 5929.18 55.06 68.20 -13.14 41.42 35.12 10.52 32.00 0.00 391 3 PEAK	Blank

Mode	44	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz	
ANT	CDD 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	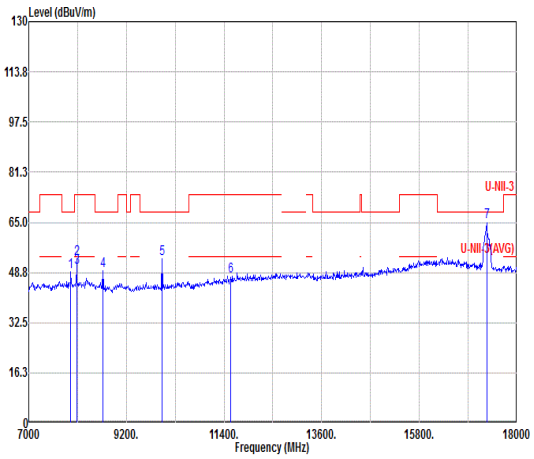 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7946.00 49.01 68.20 -19.19 60.70 35.90 12.35 59.94 0.00 -- -- Peak 2 8078.00 53.22 74.00 -20.78 64.85 35.90 12.44 59.97 0.00 100 240 Peak 3 8078.00 50.22 54.00 -3.78 61.85 35.90 12.44 59.97 0.00 100 240 Average 4 8672.00 49.27 68.20 -18.93 61.00 36.04 12.95 60.72 0.00 -- -- Peak 5 10003.00 53.30 68.20 -14.90 62.82 37.50 13.89 60.91 0.00 -- -- Peak 6 11550.00 47.40 74.00 -26.60 54.98 38.30 14.95 60.83 0.00 -- -- PEAK 7 17318.00 65.23 68.20 -2.97 64.92 40.88 18.41 58.98 0.00 -- -- Peak	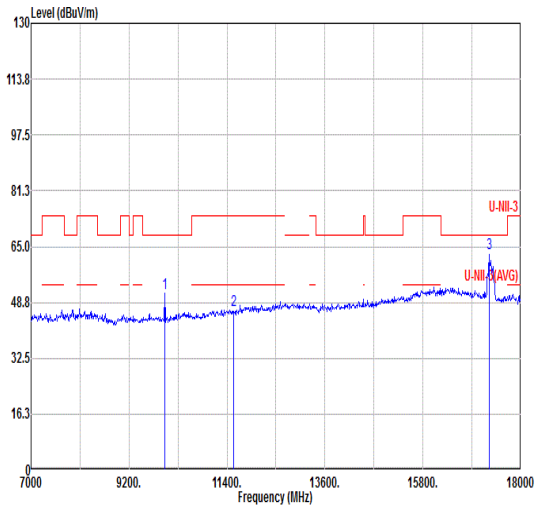 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10003.00 51.29 68.20 -16.91 60.81 37.50 13.89 60.91 0.00 -- -- Peak 2 11550.00 46.57 74.00 -27.43 54.15 38.30 14.95 60.83 0.00 -- -- PEAK 3 17285.00 63.12 68.20 -5.08 62.77 40.92 18.39 58.96 0.00 -- -- Peak

Mode	-
	LF
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz
ANT	CDD 1S4T

Pol.	Horizontal	Vertical
Peak QP	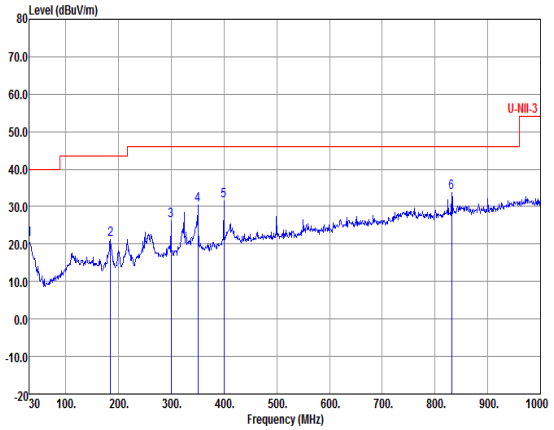 Freq Level Over Limit Limit Line ReadLevel Antenna Factor Cable Loss Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 30.00 21.28 -18.72 40.00 28.02 25.10 0.45 32.29 --- --- Peak 2 184.23 21.31 -22.19 43.50 36.67 14.98 1.83 32.17 --- --- Peak 3 299.66 26.24 -19.76 46.00 36.67 19.40 2.34 32.17 --- --- Peak 4 350.10 30.30 -15.70 46.00 39.49 20.50 2.52 32.21 --- --- Peak 5 399.57 31.64 -14.36 46.00 39.29 21.90 2.70 32.25 --- --- Peak 6 p 831.22 33.66 -12.34 46.00 32.78 28.89 3.89 31.90 --- --- Peak	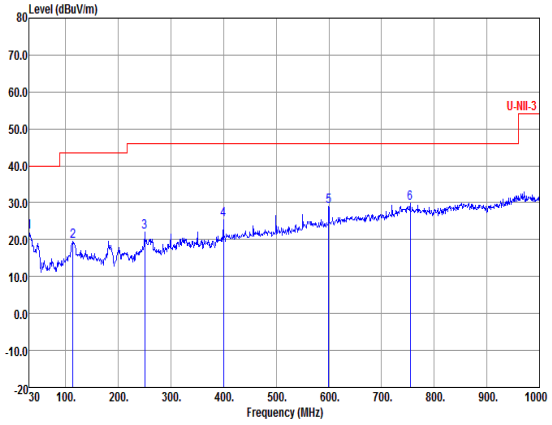 Freq Level Over Limit Limit Line ReadLevel Antenna Factor Cable Loss Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 30.00 22.18 -17.82 40.00 28.92 25.10 0.45 32.29 --- --- Peak 2 113.42 19.52 -23.98 43.50 33.05 17.22 1.42 32.17 --- --- Peak 3 250.19 22.14 -23.86 46.00 33.16 19.02 2.13 32.17 --- --- Peak 4 399.57 25.36 -20.64 46.00 33.01 21.90 2.70 32.25 --- --- Peak 5 599.39 28.93 -17.07 46.00 32.21 25.79 3.31 32.38 --- --- Peak 6 p 754.59 29.86 -16.14 46.00 30.11 28.20 3.71 32.16 --- --- Peak

<TXBF 1S4T>:

Mode	45	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Fundamental
Peak	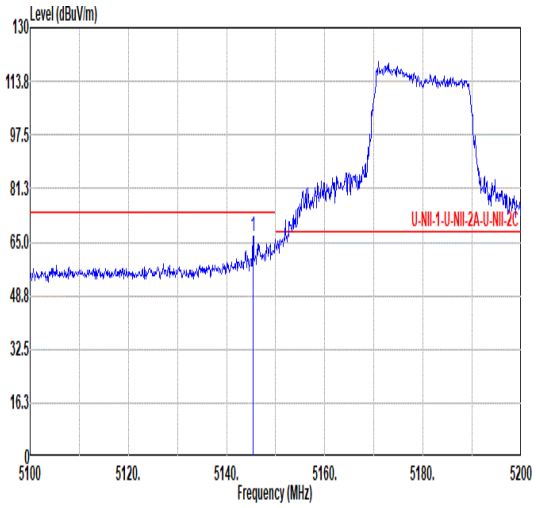 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.40 66.80 74.00 -7.20 58.54 34.14 10.60 36.48 0.00 100 203 Peak	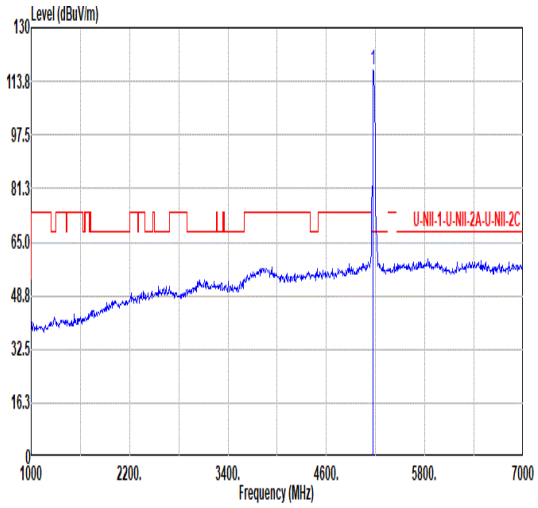 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5170.00 117.37 ------ ------ 109.08 34.21 10.63 36.55 0.00 100 203 Peak
Avg	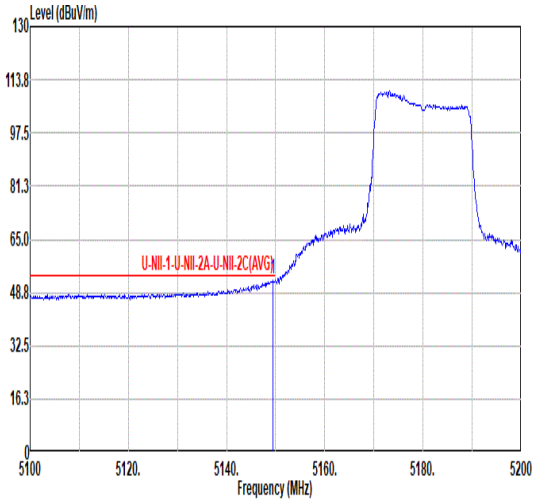 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.50 53.01 54.00 -0.99 44.74 34.15 10.61 36.49 0.00 100 203 Average	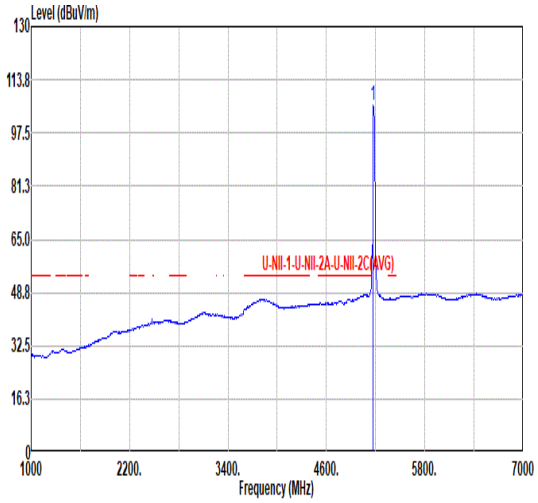 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5170.00 105.93 ------ ------ 97.64 34.21 10.63 36.55 0.00 100 203 Average

Mode	45	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz	
ANT	BF 1S4T	
Pol.	Vertical	Fundamental
Peak	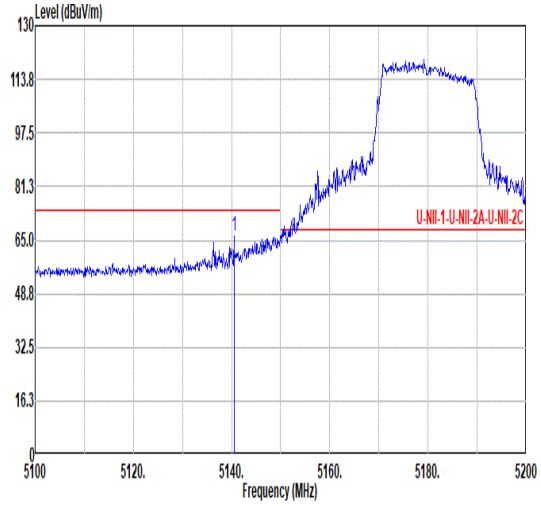 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5140.50 66.31 74.00 -7.69 58.07 34.12 10.60 36.48 0.00 248 191 Peak	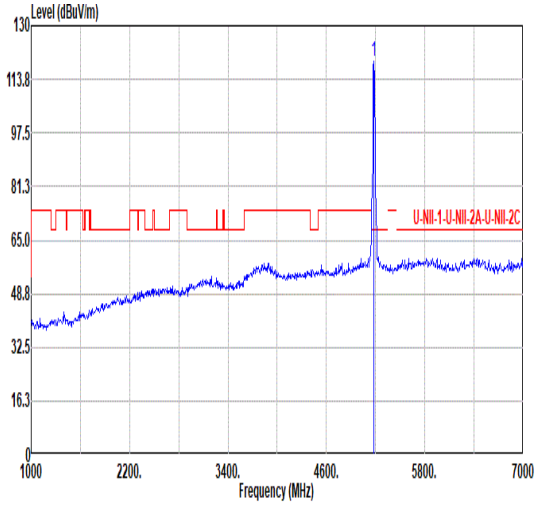 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5176.00 119.01 ------ ------ 110.71 34.23 10.64 36.57 0.00 248 191 Peak
Avg	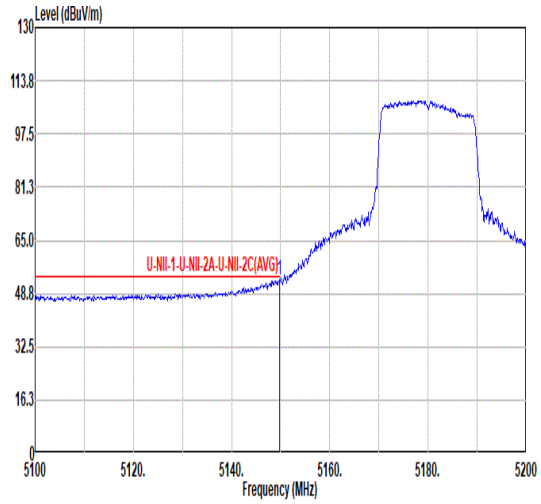 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5149.70 53.14 54.00 -0.86 44.87 34.15 10.61 36.49 0.00 248 191 Average	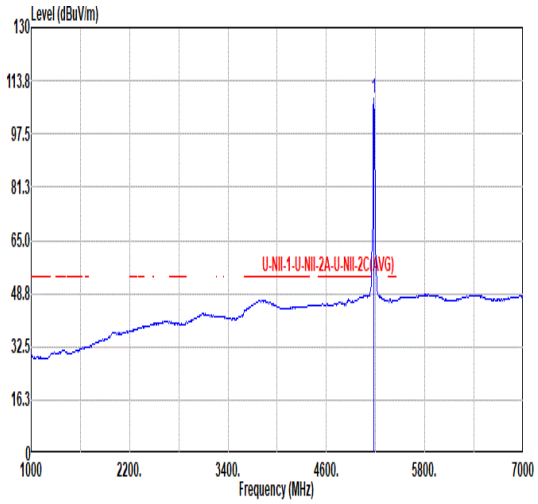 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5176.00 108.50 ------ ------ 100.20 34.23 10.64 36.57 0.00 248 191 Average

Mode	45	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	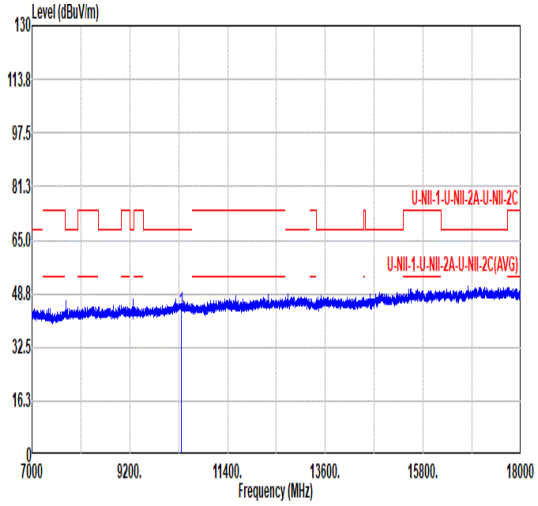 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.50 43.40 68.20 -24.80 57.24 37.45 15.45 66.74 0.00 -- -- Peak	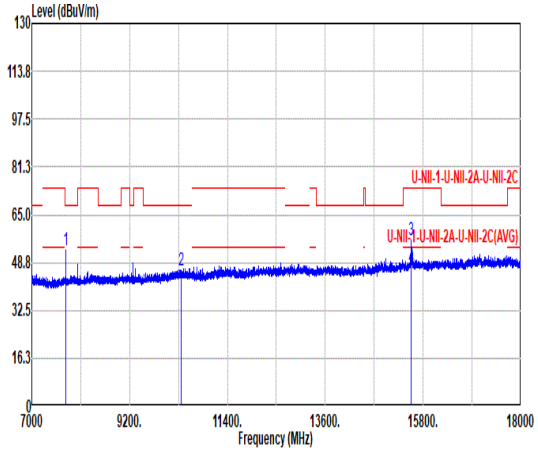 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7770.00 53.22 68.20 -14.98 70.96 35.97 13.17 66.88 0.00 -- -- Peak 2 10360.50 45.91 68.20 -22.29 59.75 37.45 15.45 66.74 0.00 -- -- Peak 3 15537.10 56.17 74.00 -17.83 61.23 40.08 19.04 64.18 0.00 100 81 Peak 4 15537.10 47.11 54.00 -6.89 52.17 40.08 19.04 64.18 0.00 100 81 Average

Mode	46	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	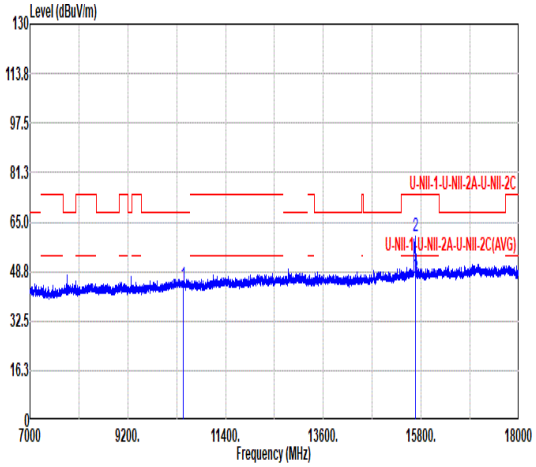 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10439.70 44.35 68.20 -23.85 58.03 37.51 15.52 66.71 0.00 -- -- Peak 2 15668.00 60.49 74.00 -13.51 65.31 40.20 19.13 64.15 0.00 300 170 Peak 3 15668.00 46.49 54.00 -7.51 51.31 40.20 19.13 64.15 0.00 300 170 Average	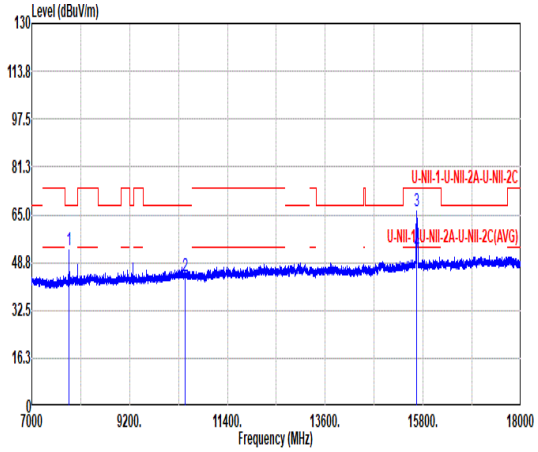 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7830.50 53.20 68.20 -15.00 70.80 36.03 13.22 66.85 0.00 -- -- Peak 2 10439.70 44.34 68.20 -23.86 58.02 37.51 15.52 66.71 0.00 -- -- Peak 3 15660.30 66.21 74.00 -7.79 71.05 40.19 19.12 64.15 0.00 100 127 Peak 4 15660.30 52.54 54.00 -1.46 57.38 40.19 19.12 64.15 0.00 100 127 Average

Mode	47	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Fundamental
Peak	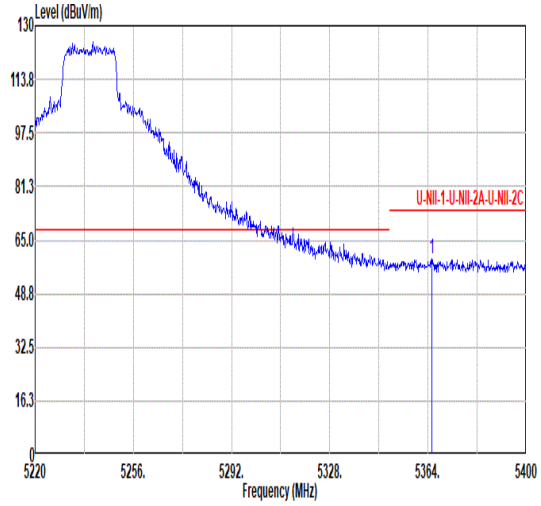 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5365.44 59.25 74.00 -14.75 50.34 34.50 10.76 36.35 0.00 218 271 Peak	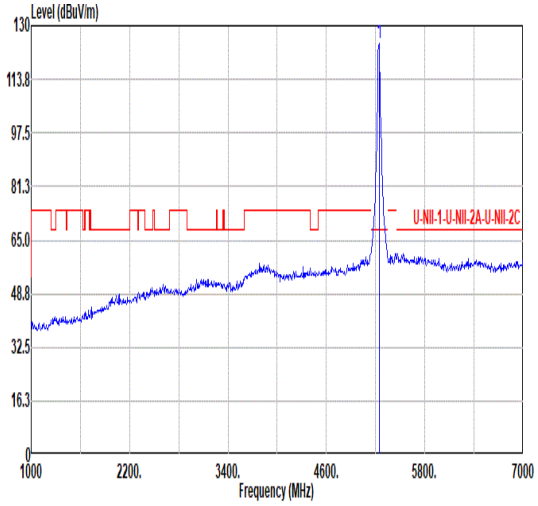 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5242.00 124.53 ------ ------ 116.09 34.38 10.68 36.62 0.00 218 271 Peak
Avg	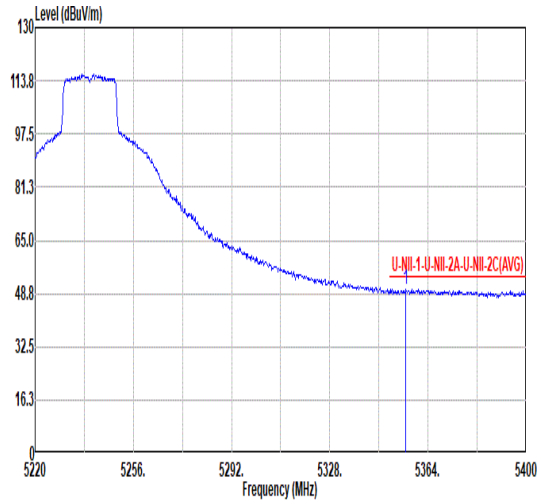 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5355.90 50.18 54.00 -3.82 41.33 34.50 10.75 36.40 0.00 218 271 Average	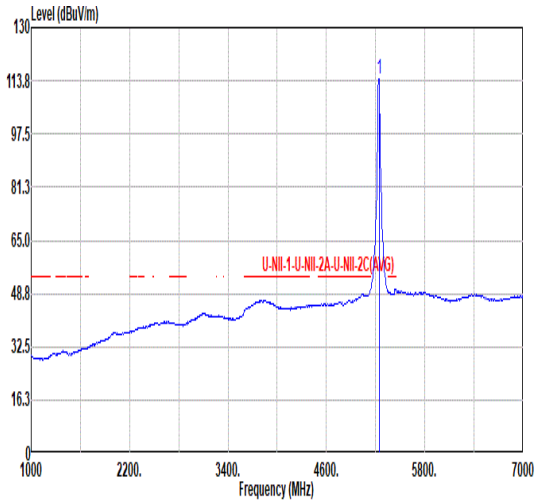 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5242.00 114.49 ------ ------ 106.05 34.38 10.68 36.62 0.00 218 271 Average

Mode	47	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz	
ANT	BF 1S4T	
Pol.	Vertical	Fundamental
Peak	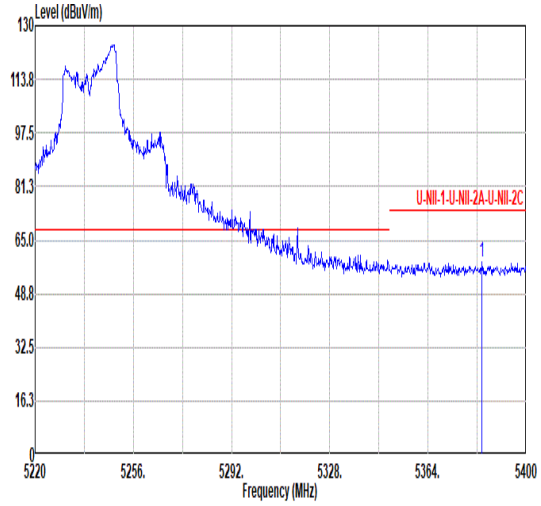 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5383.80 58.16 74.00 -15.84 49.13 34.50 10.77 36.24 0.00 247 0 Peak	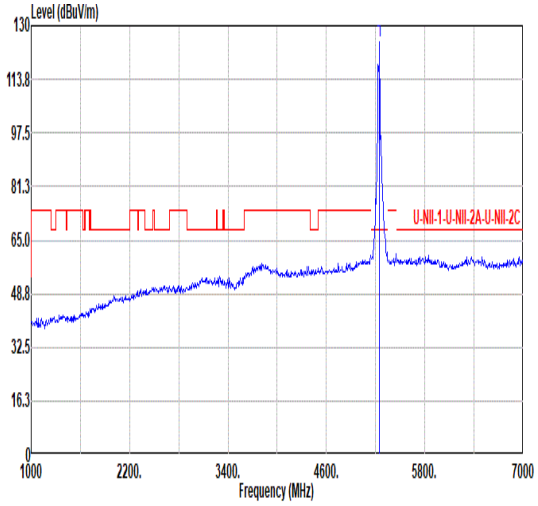 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5248.00 125.27 ------ ------ 116.80 34.40 10.69 36.62 0.00 247 0 Peak
Avg	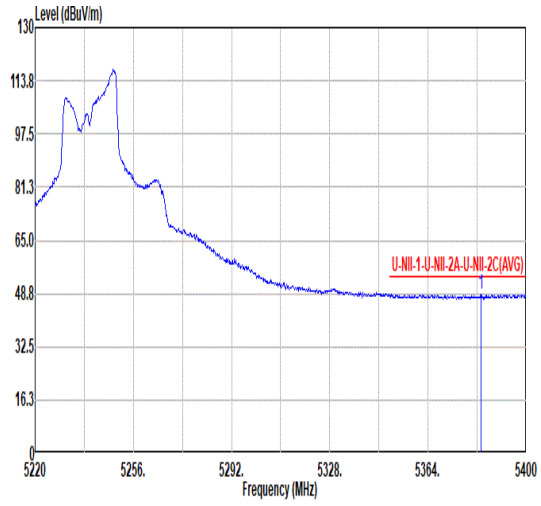 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5383.44 48.44 54.00 -5.56 39.41 34.50 10.77 36.24 0.00 247 0 Average	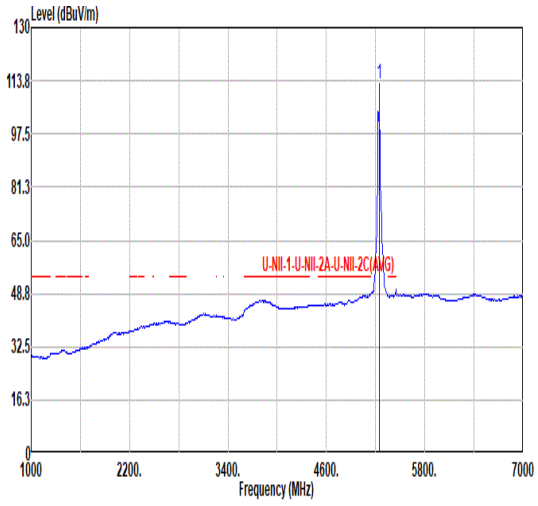 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5248.00 112.69 ------ ------ 104.22 34.40 10.69 36.62 0.00 247 0 Average

Mode	47	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	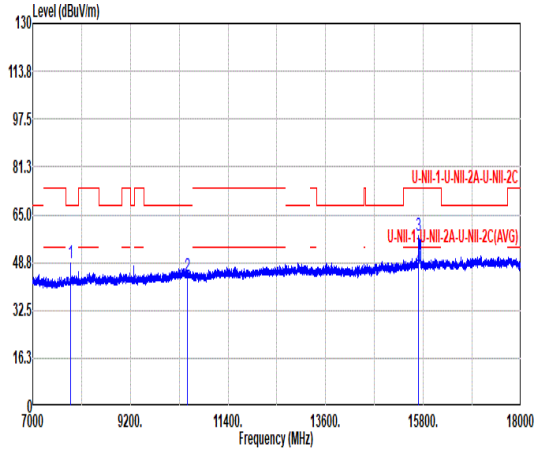 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7860.20 48.58 68.20 -19.62 66.12 36.06 13.24 66.84 0.00 -- -- Peak 2 10480.40 44.15 68.20 -24.05 57.74 37.54 15.56 66.69 0.00 -- -- Peak 3 15697.70 58.07 74.00 -15.93 62.83 40.23 19.15 64.14 0.00 100 111 Peak 4 15697.70 46.72 54.00 -7.28 51.48 40.23 19.15 64.14 0.00 100 111 Average	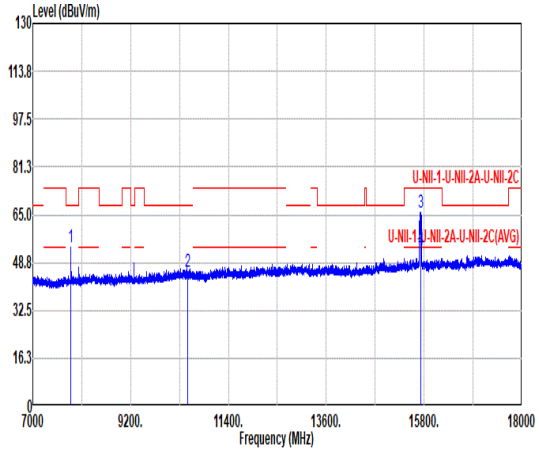 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7860.20 53.95 68.20 -14.25 71.49 36.06 13.24 66.84 0.00 -- -- Peak 2 10480.40 45.51 68.20 -22.69 59.10 37.54 15.56 66.69 0.00 -- -- Peak 3 15732.90 65.93 74.00 -8.07 70.63 40.26 19.17 64.13 0.00 300 137 Peak 4 15732.90 52.98 54.00 -1.02 57.68 40.26 19.17 64.13 0.00 300 137 Average

Mode	48	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Fundamental
Peak	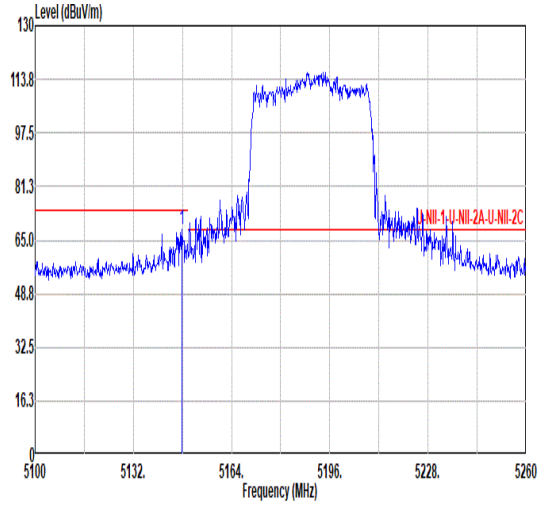 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5147.84 68.10 74.00 -5.90 59.84 34.14 10.61 36.49 0.00 172 72 PEAK	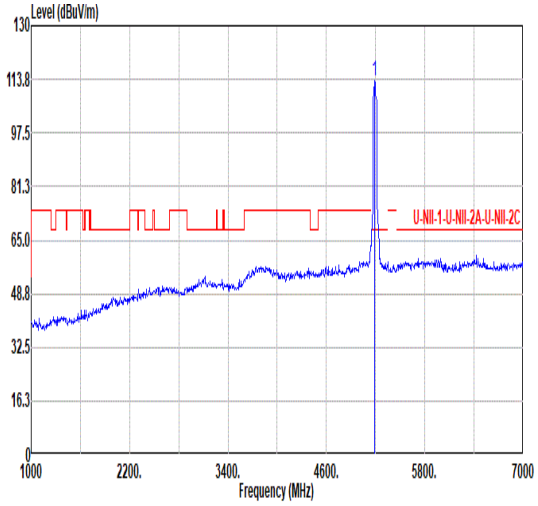 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5188.00 113.12 ------ ------ 104.82 34.26 10.65 36.61 0.00 172 72 Peak
Avg	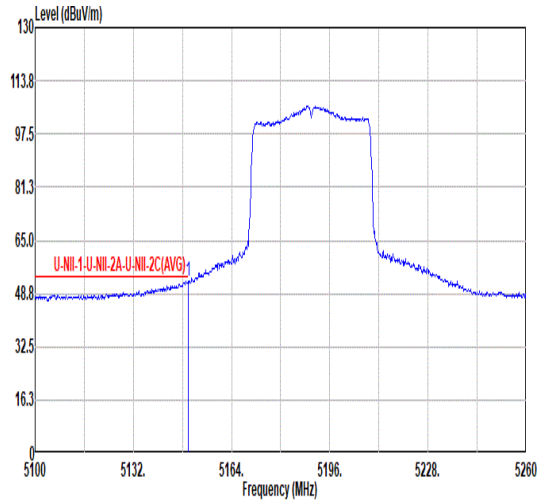 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5149.92 52.57 54.00 -1.43 44.30 34.15 10.61 36.49 0.00 172 72 Average	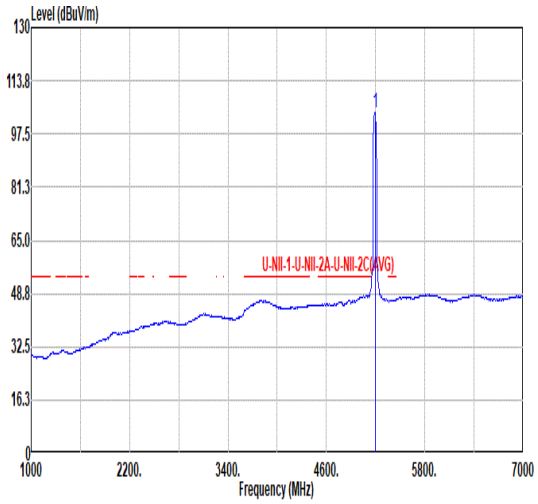 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5194.00 104.11 ------ ------ 95.81 34.28 10.65 36.63 0.00 172 72 Average

Mode	48	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Fundamental
Peak	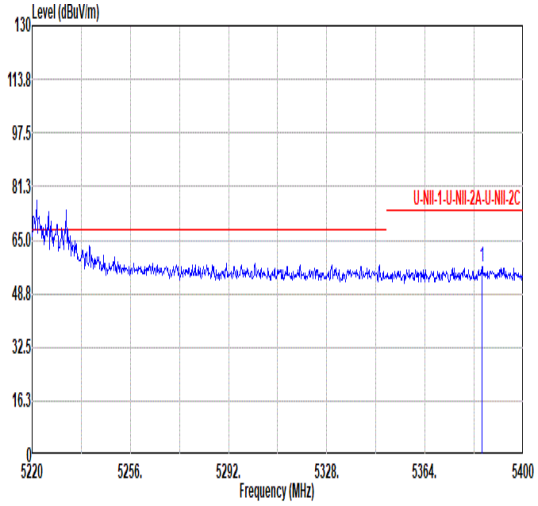 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5384.88 57.07 74.00 -16.93 48.03 34.50 10.77 36.23 0.00 172 72 Peak	Blank
Avg	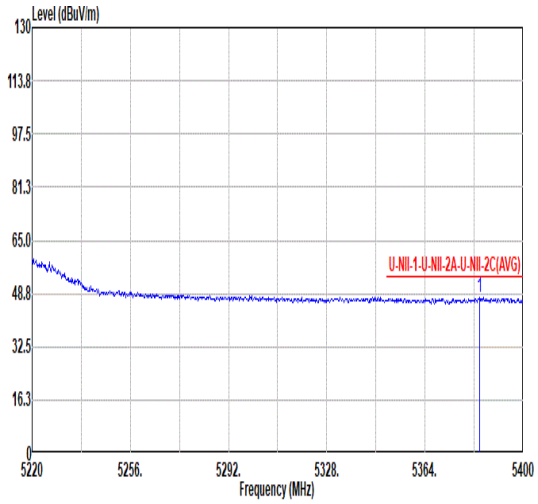 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5383.98 47.57 54.00 -6.43 38.54 34.50 10.77 36.24 0.00 172 72 Average	Blank

Mode	48	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz	
ANT	BF 1S4T	
Pol.	Vertical	Fundamental
Peak	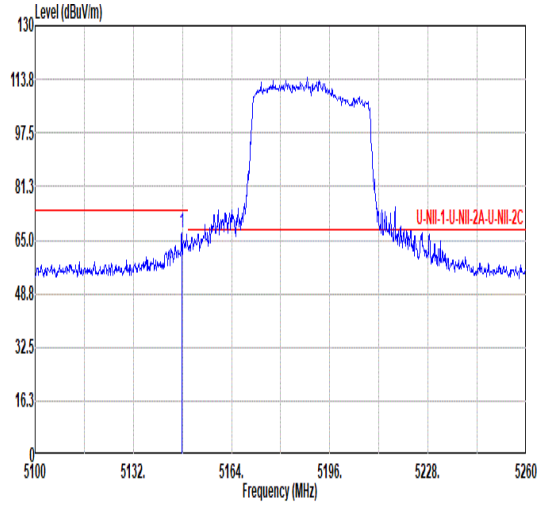 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.84 67.03 74.00 -6.97 58.77 34.14 10.61 36.49 0.00 300 201 Peak	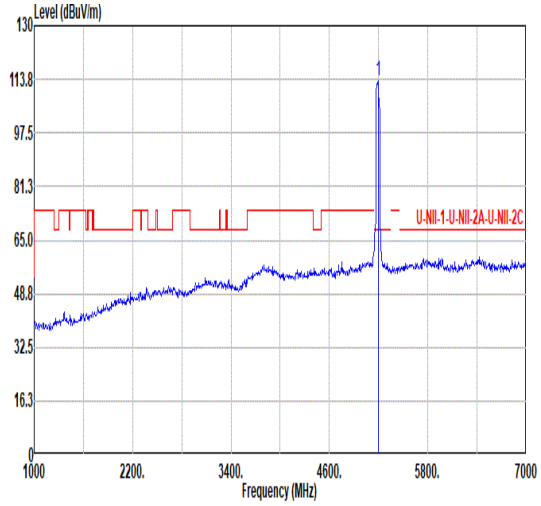 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5194.00 113.56 ------ ------ 105.26 34.28 10.65 36.63 0.00 300 201 Peak
Avg	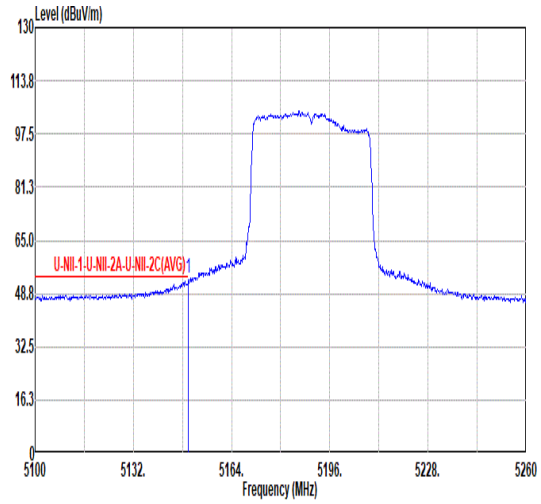 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.92 53.25 54.00 -0.75 44.98 34.15 10.61 36.49 0.00 300 201 Average	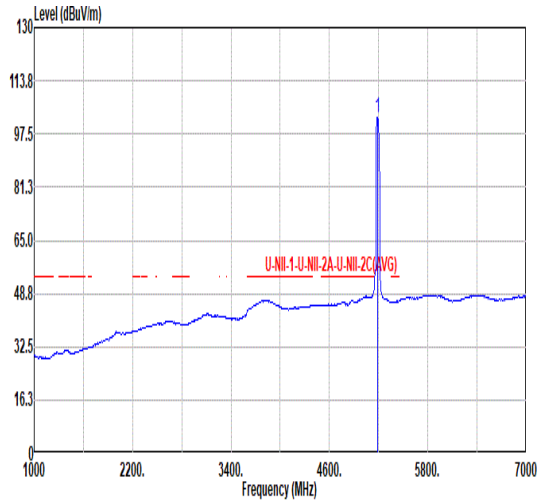 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5188.00 102.49 ------ ------ 94.19 34.26 10.65 36.61 0.00 300 201 Average

Mode	48	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz	
ANT	BF 1S4T	
Pol.	Vertical	Fundamental
Peak	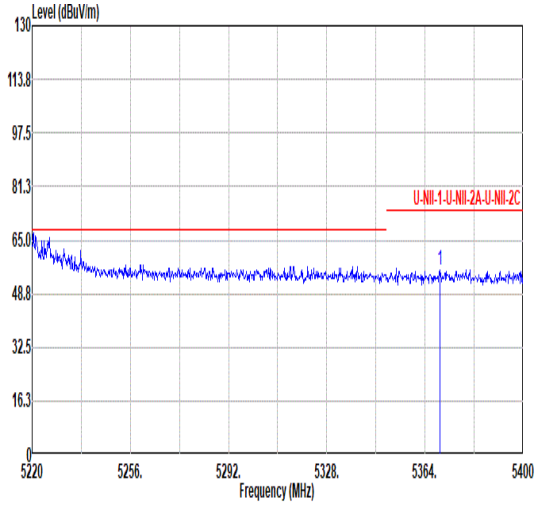 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5369.58 56.12 74.00 -17.88 47.18 34.50 10.76 36.32 0.00 300 201 Peak	Blank
Avg	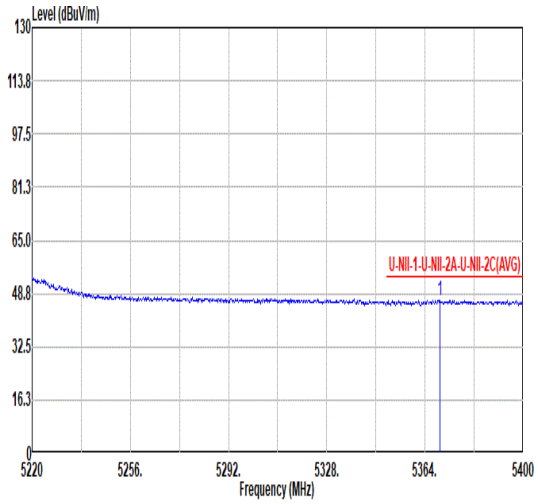 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5369.58 46.78 54.00 -7.22 37.84 34.50 10.76 36.32 0.00 300 201 Average	Blank

Mode	48	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	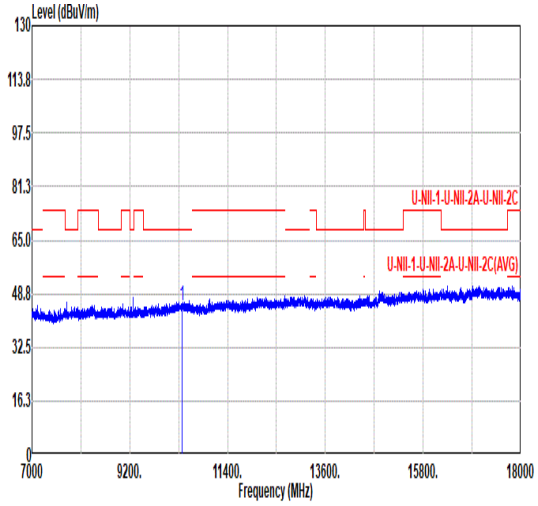 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10380.30 45.30 68.20 -22.90 59.10 37.47 15.47 66.74 0.00 -- -- Peak	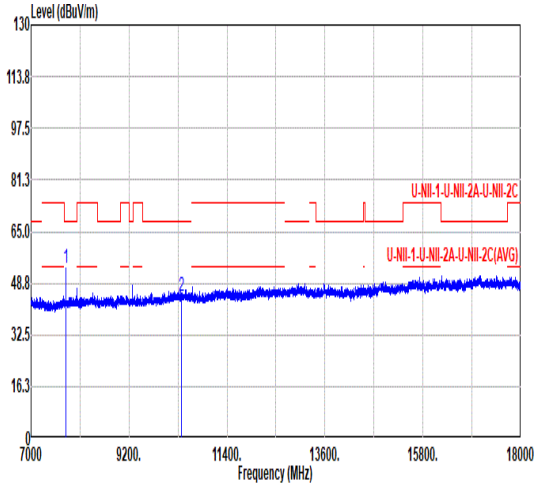 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7785.40 53.25 68.20 -14.95 70.95 35.99 13.18 66.87 0.00 -- -- Peak 2 10380.30 44.83 68.20 -23.37 58.63 37.47 15.47 66.74 0.00 -- -- Peak

Mode	49	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	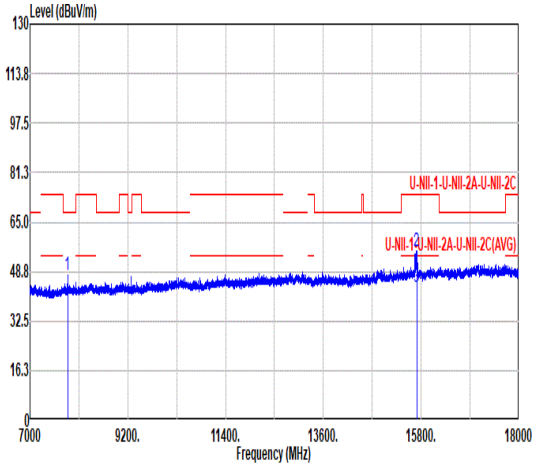 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7844.80 47.56 68.20 -20.64 65.14 36.04 13.23 66.85 0.00 -- -- Peak 2 15698.80 55.44 74.00 -18.56 60.20 40.23 19.15 64.14 0.00 100 119 Peak 3 15698.80 43.82 54.00 -10.18 48.58 40.23 19.15 64.14 0.00 100 119 Average	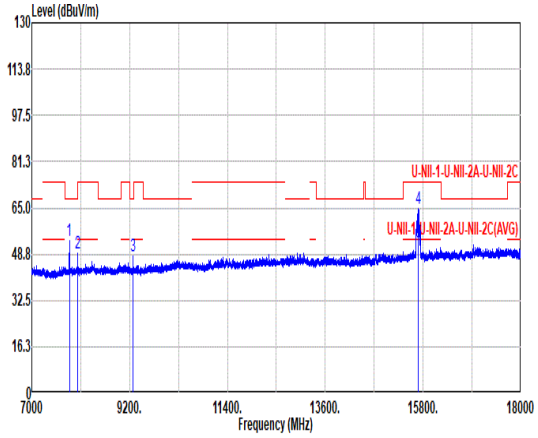 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7844.80 53.63 68.20 -14.57 71.21 36.04 13.23 66.85 0.00 -- -- Peak 2 8032.90 49.24 74.00 -24.76 66.52 36.13 13.38 66.79 0.00 -- -- Peak 3 9272.60 47.96 68.20 -20.24 63.80 36.55 14.53 66.92 0.00 -- -- Peak 4 15687.80 64.73 74.00 -9.27 69.51 40.22 19.14 64.14 0.00 100 83 Peak 5 15687.80 53.07 54.00 -0.93 57.85 40.22 19.14 64.14 0.00 100 83 Average

Mode	50	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Fundamental
Peak	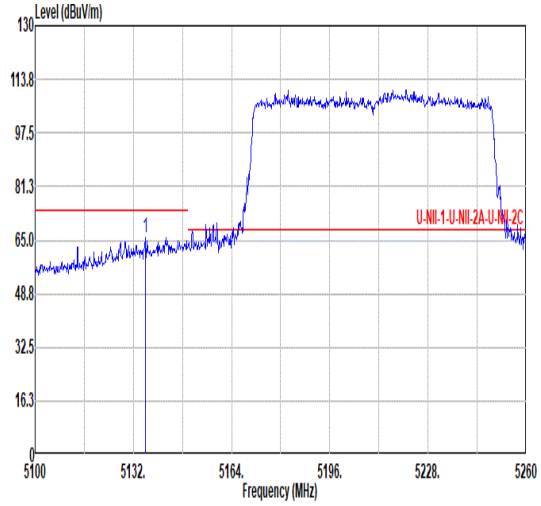 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5135.84 65.96 74.00 -8.04 57.74 34.11 10.59 36.48 0.00 222 271 Peak	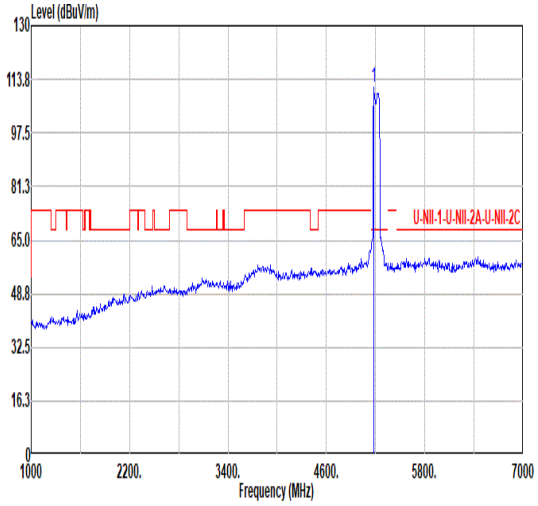 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5182.00 111.13 ------ ------ 102.83 34.25 10.64 36.59 0.00 222 271 Peak
Avg	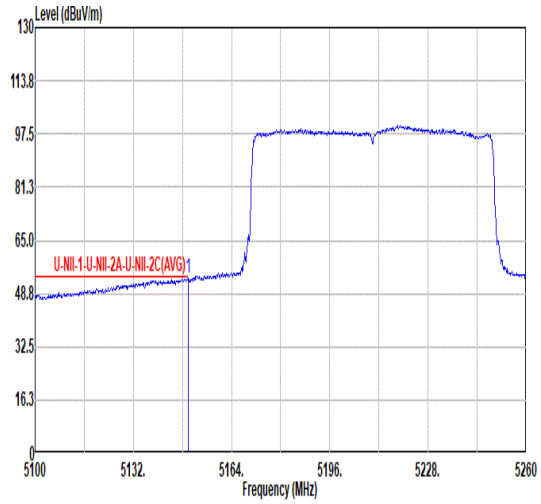 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5149.92 53.36 54.00 -0.64 45.09 34.15 10.61 36.49 0.00 222 271 Average	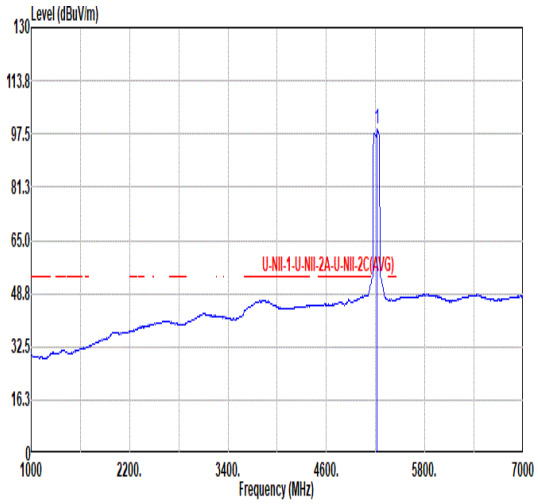 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5218.00 99.12 ------ ------ 90.75 34.34 10.67 36.64 0.00 222 271 Average

Mode	50	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Fundamental
Peak	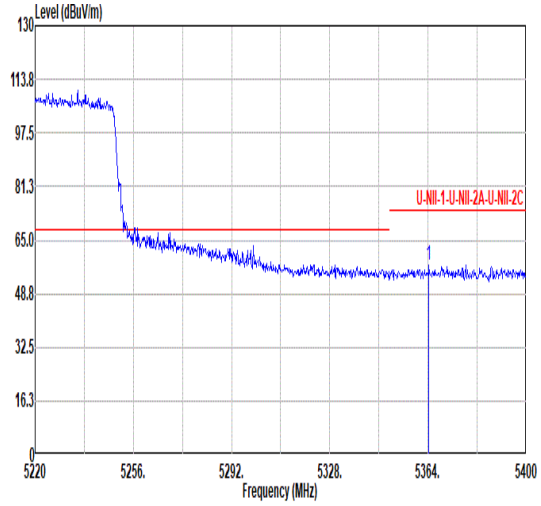 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5364.36 57.39 74.00 -16.61 48.49 34.50 10.75 36.35 0.00 222 271 Peak	Blank
Avg	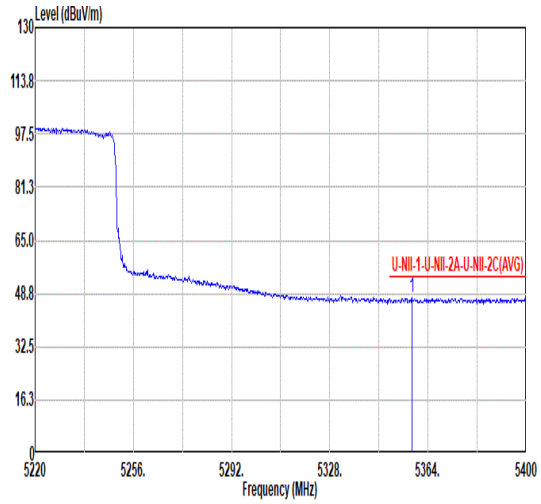 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5358.06 47.47 54.00 -6.53 38.61 34.50 10.75 36.39 0.00 222 271 Average	Blank

Mode	50	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz	
ANT	BF 1S4T	
Pol.	Vertical	Fundamental
Peak	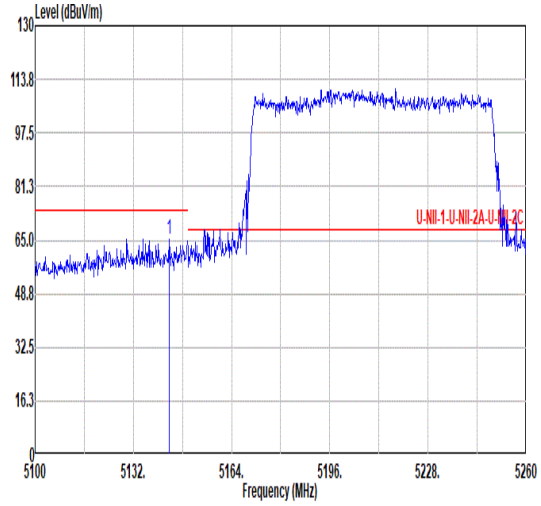 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5143.68 65.28 74.00 -8.72 57.03 34.13 10.60 36.48 0.00 314 200 PEAK	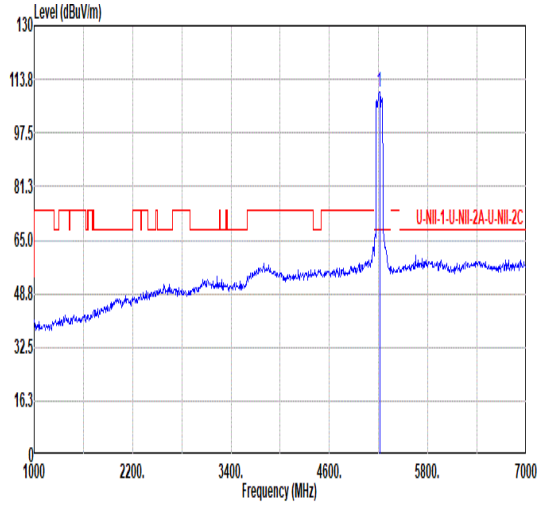 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5212.00 110.06 ------ ------ 101.71 34.32 10.67 36.64 0.00 314 200 Peak
Avg	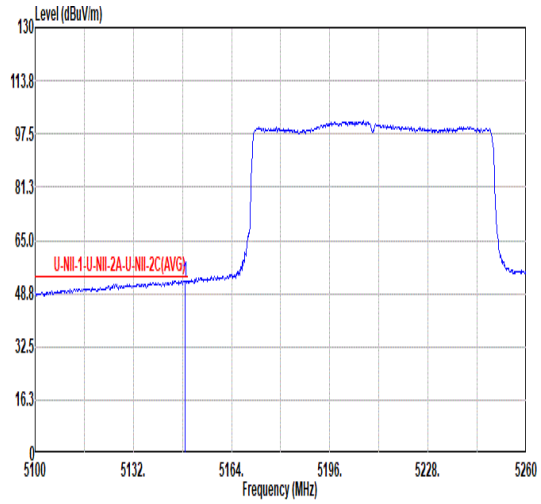 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.96 52.66 54.00 -1.34 44.39 34.15 10.61 36.49 0.00 314 200 Average	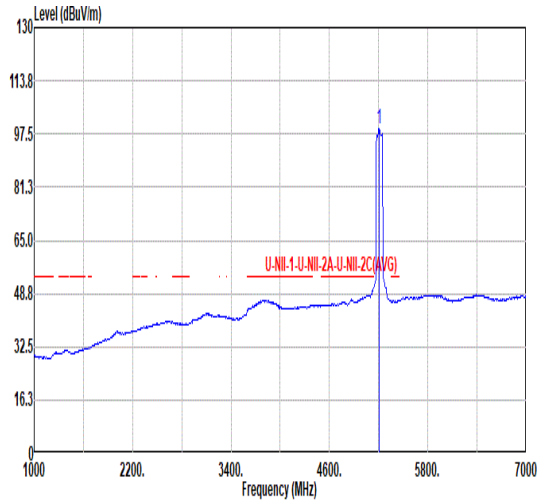 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5206.00 99.22 ------ ------ 90.90 34.31 10.66 36.65 0.00 314 200 Average

Mode	50	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz	
ANT	BF 1S4T	
Pol.	Vertical	Fundamental
Peak	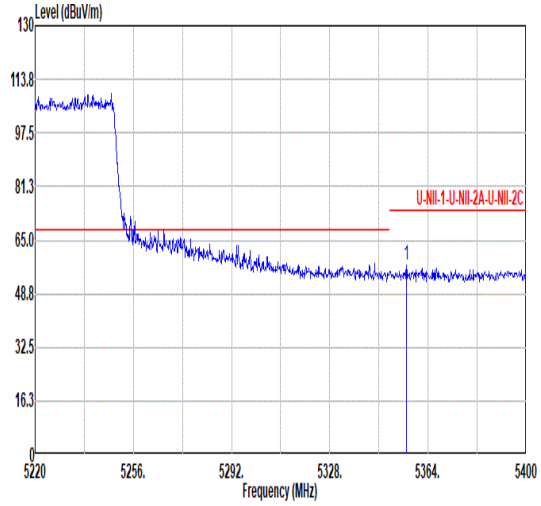 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5356.08 57.44 74.00 -16.56 48.59 34.50 10.75 36.40 0.00 314 200 Peak	Blank
Avg	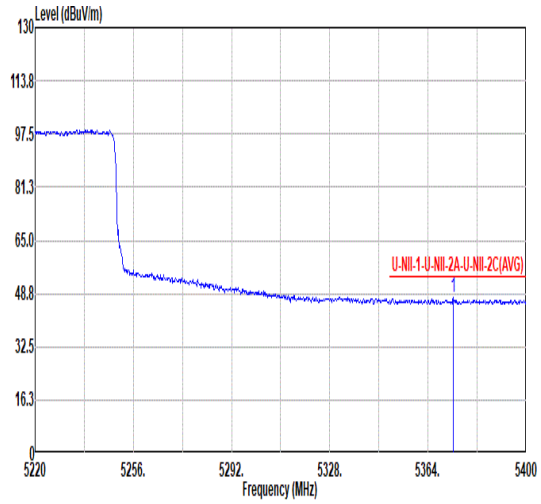 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5373.18 47.40 54.00 -6.60 38.44 34.50 10.76 36.30 0.00 314 200 Average	Blank

Mode	50	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	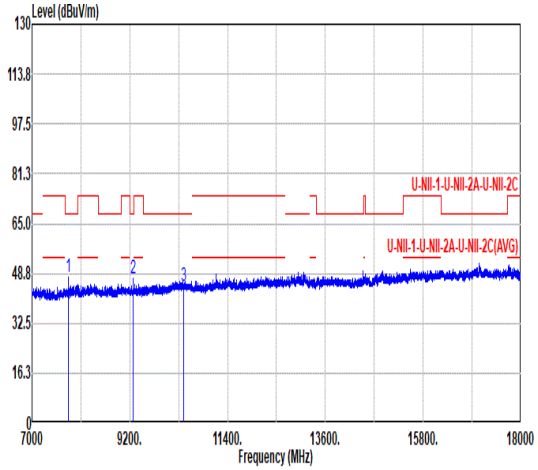 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7815.10 47.70 68.20 -20.50 65.33 36.02 13.21 66.86 0.00 -- -- Peak 2 9272.60 47.30 68.20 -20.90 63.14 36.55 14.53 66.92 0.00 -- -- Peak 3 10420.00 44.85 68.20 -23.35 58.57 37.49 15.51 66.72 0.00 -- -- Peak	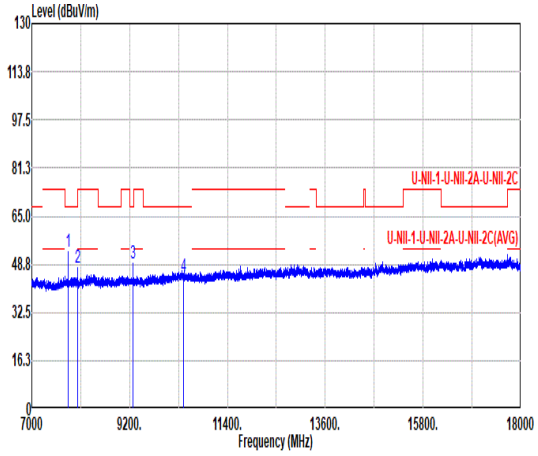 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7815.10 52.98 68.20 -15.22 70.61 36.02 13.21 66.86 0.00 -- -- Peak 2 8032.90 47.39 74.00 -26.61 64.67 36.13 13.38 66.79 0.00 -- -- Peak 3 9272.60 48.93 68.20 -19.27 64.77 36.55 14.53 66.92 0.00 -- -- Peak 4 10420.00 44.62 68.20 -23.58 58.34 37.49 15.51 66.72 0.00 -- -- Peak

Mode	51	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE160_CH50_Full RU_5250MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Fundamental
Peak	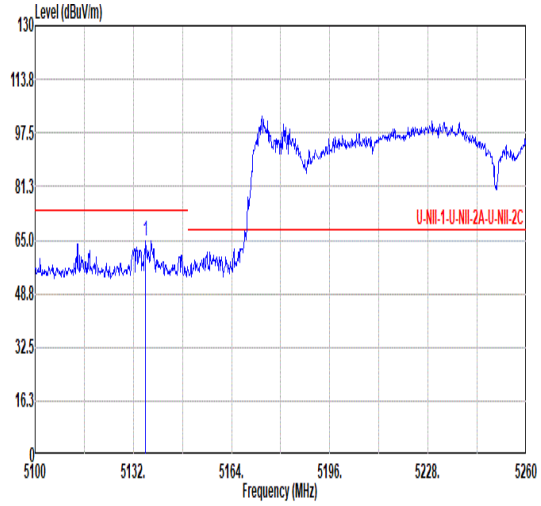 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5136.00 64.81 74.00 -9.19 56.59 34.11 10.59 36.48 0.00 101 104 Peak	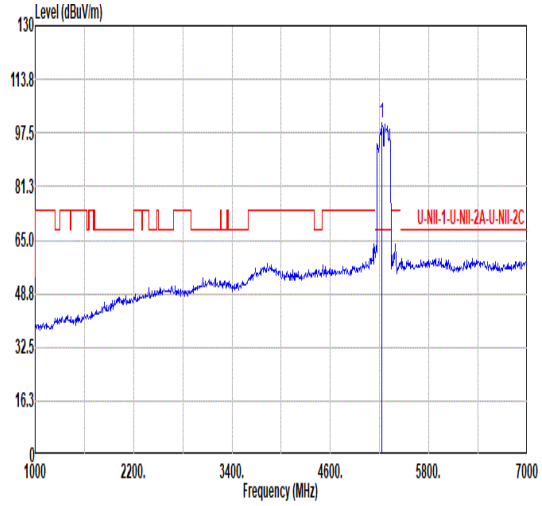 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5224.00 100.76 ------ ------ 92.37 34.35 10.67 36.63 0.00 101 104 Peak
Avg	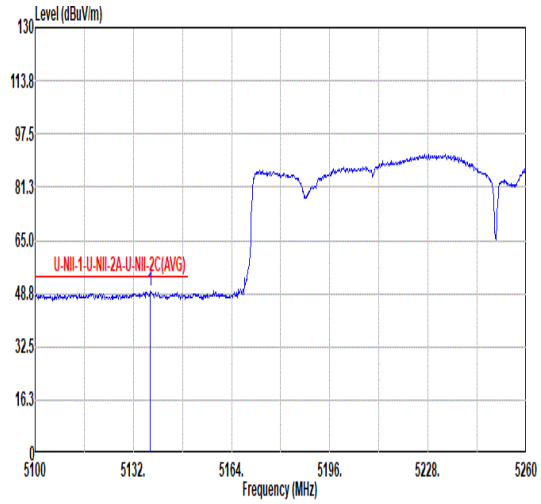 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5137.44 49.68 54.00 -4.32 41.45 34.11 10.60 36.48 0.00 101 104 Average	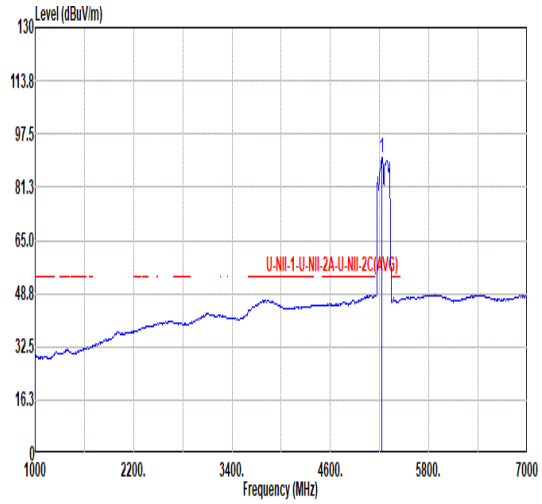 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 90.47 ------ ------ 82.06 34.36 10.68 36.63 0.00 101 104 Average

Mode	51	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE160_CH50_Full RU_5250MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Fundamental
Peak	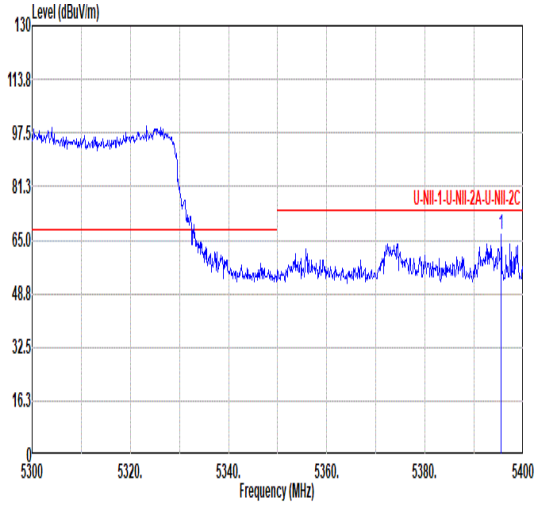 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5395.50 66.87 74.00 -7.13 57.77 34.50 10.77 36.17 0.00 101 104 Peak	Blank
Avg	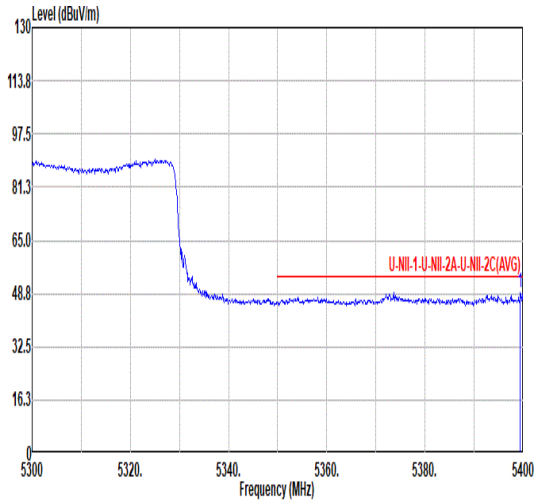 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5399.40 49.16 54.00 -4.84 40.03 34.50 10.78 36.15 0.00 101 104 Average	Blank

Mode	51	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE160_CH50_Full RU_5250MHz	
ANT	BF 1S4T	
Pol.	Vertical	Fundamental
Peak	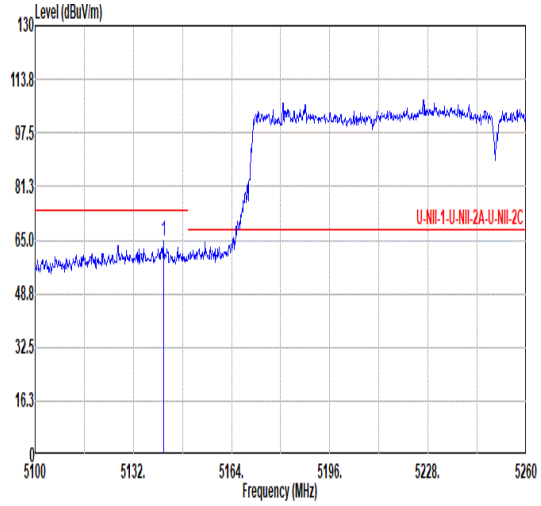 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5141.76 64.52 74.00 -9.48 56.27 34.13 10.60 36.48 0.00 165 280 Peak	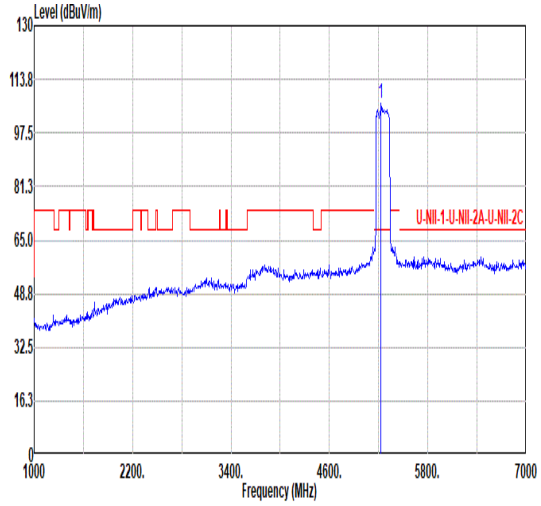 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 106.23 ------ ------ 97.82 34.36 10.68 36.63 0.00 165 280 Peak
Avg	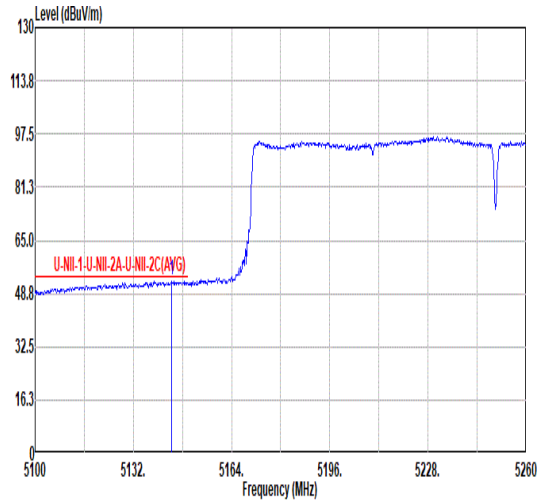 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5144.48 53.21 54.00 -0.79 44.96 34.13 10.60 36.48 0.00 165 280 Average	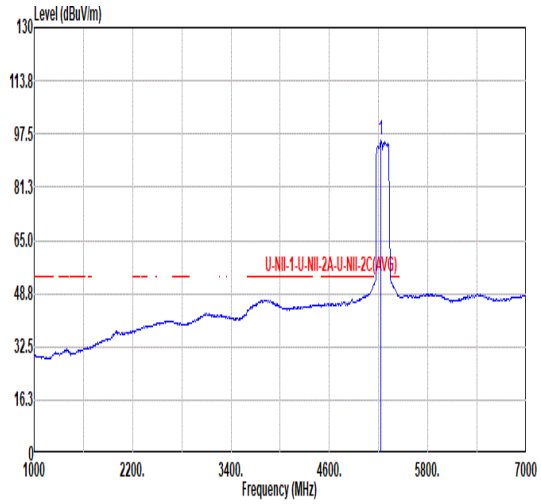 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 95.58 ------ ------ 87.17 34.36 10.68 36.63 0.00 165 280 Average

Mode	51	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE160_CH50_Full RU_5250MHz	
ANT	BF 1S4T	
Pol.	Vertical	Fundamental
Peak	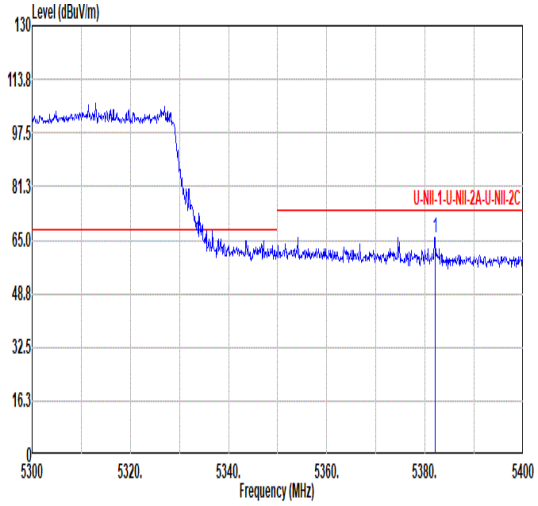 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5382.00 65.81 74.00 -8.19 56.79 34.50 10.77 36.25 0.00 165 280 Peak	Blank
Avg	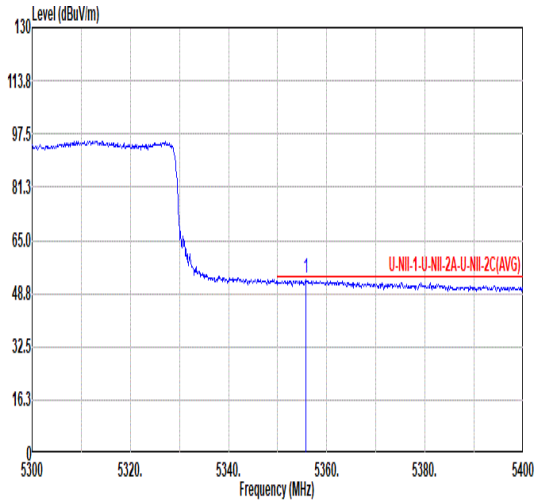 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5355.80 53.47 54.00 -0.53 44.62 34.50 10.75 36.40 0.00 165 280 Average	Blank

Mode	51	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE160_CH50_Full RU_5250MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	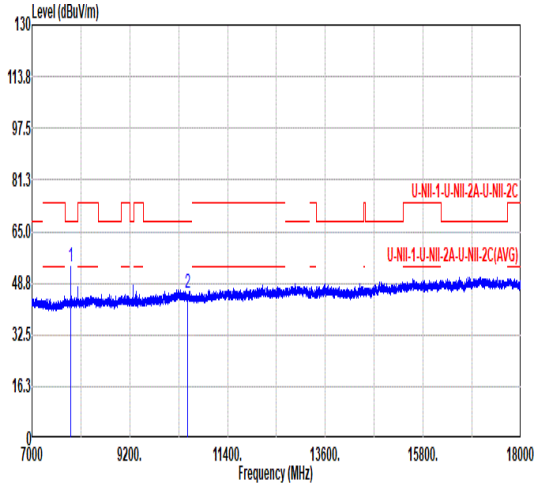 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7875.60 54.01 68.20 -14.19 71.52 36.08 13.25 66.84 0.00 -- -- Peak 2 10500.00 45.81 68.20 -22.39 59.36 37.55 15.58 66.68 0.00 -- -- PEAK	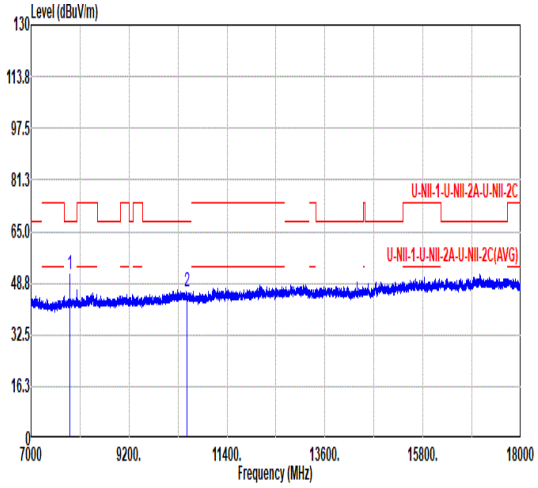 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7875.60 51.39 68.20 -16.81 68.90 36.08 13.25 66.84 0.00 -- -- 2 10500.00 46.33 68.20 -21.87 59.93 37.53 15.56 66.69 0.00 -- -- PEAK

Mode	52	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Fundamental
Peak	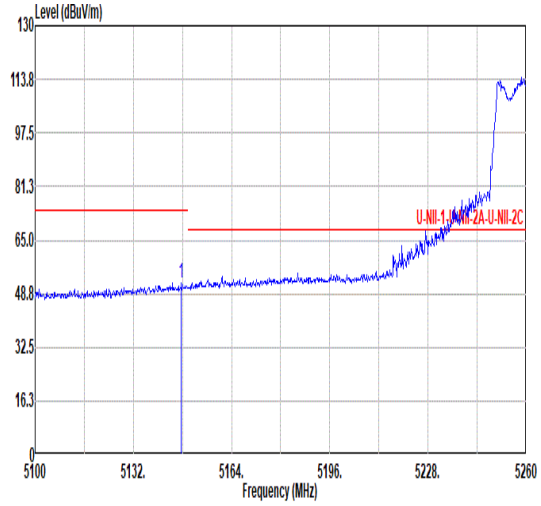 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.68 52.17 74.00 -21.83 43.91 34.14 10.61 36.49 0.00 100 130 Peak	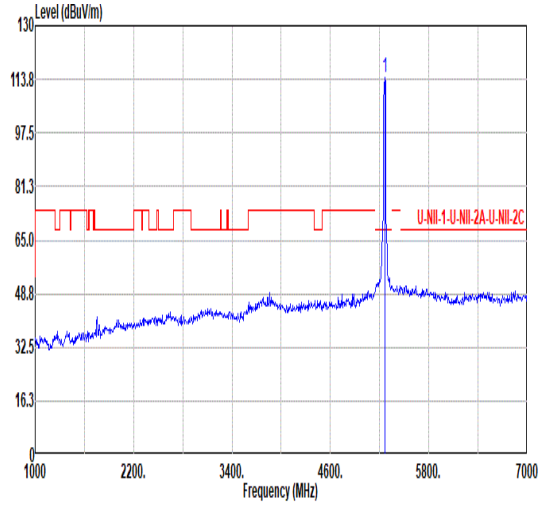 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5266.00 114.41 ------ ------ 105.87 34.43 10.70 36.59 0.00 100 130 Peak
Avg	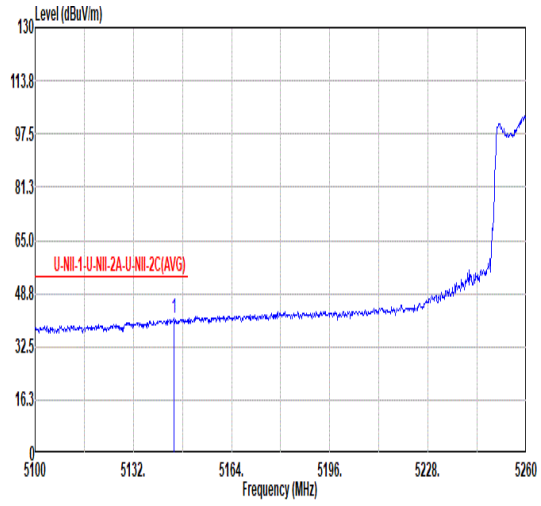 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.12 41.24 54.00 -12.76 32.98 34.14 10.60 36.48 0.00 100 130 Average	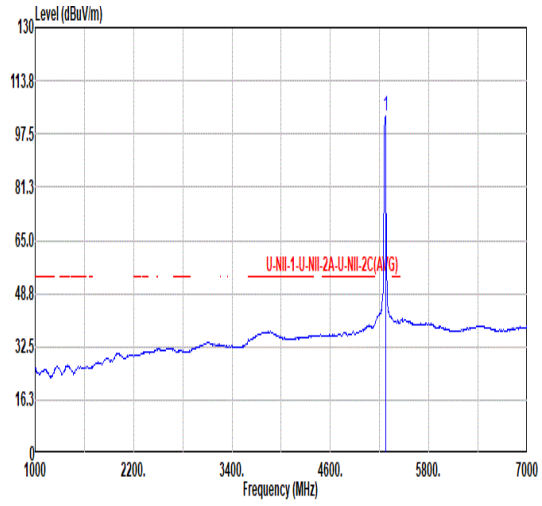 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5272.00 103.10 ------ ------ 94.53 34.44 10.70 36.57 0.00 100 130 Average

Mode	52	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz	
ANT	BF 1S4T	
Pol.	Vertical	Fundamental
Peak	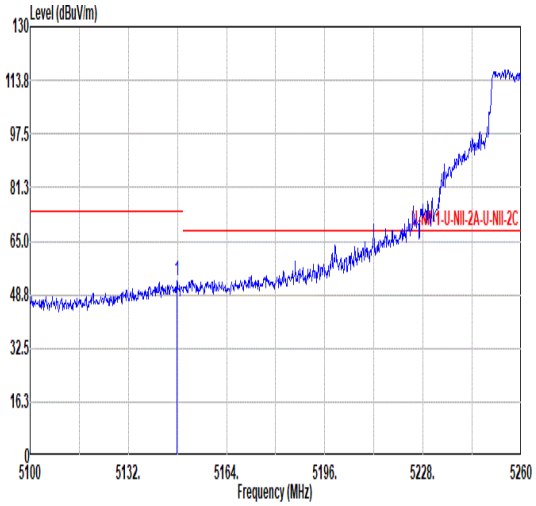 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.84 52.78 74.00 -21.22 44.52 34.14 10.61 36.49 0.00 184 269 Peak	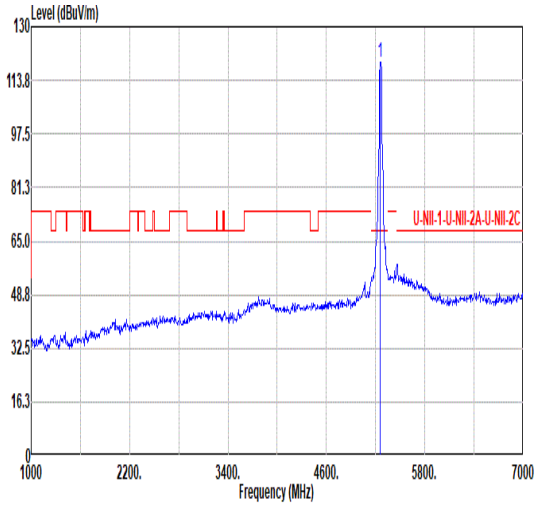 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5254.00 119.23 ------ ------ 110.74 34.41 10.69 36.61 0.00 184 269 Peak
Avg	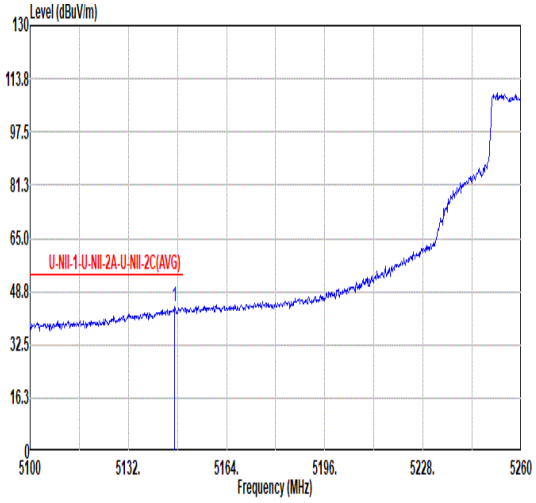 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.04 44.32 54.00 -9.68 36.05 34.14 10.61 36.48 0.00 184 269 Average	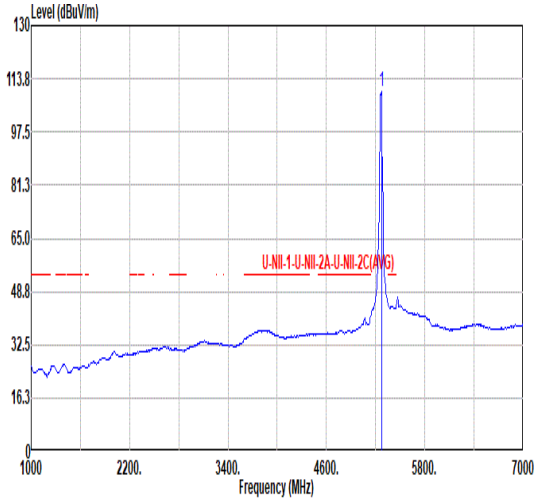 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5272.00 109.93 ------ ------ 101.36 34.44 10.70 36.57 0.00 184 269 Average

Mode	52	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	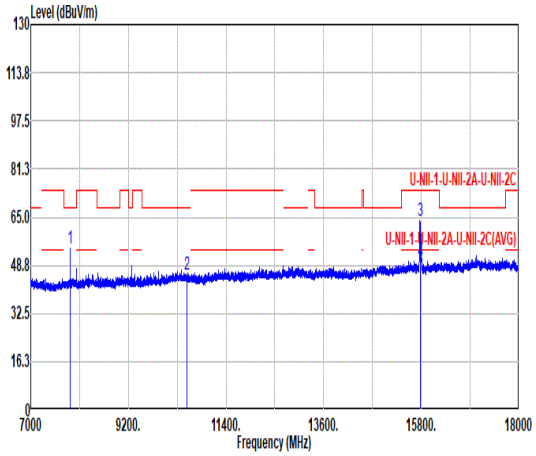 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7889.90 54.43 68.20 -13.77 71.91 36.09 13.26 66.83 0.00 -- -- Peak 2 10520.00 45.54 68.20 -22.66 59.05 37.56 15.60 66.67 0.00 -- -- PEAK 3 15780.00 63.86 74.00 -10.14 68.48 40.30 19.20 64.12 0.00 286 51 Peak 4 15780.00 50.20 54.00 -3.80 54.82 40.30 19.20 64.12 0.00 286 51 AVERAGE	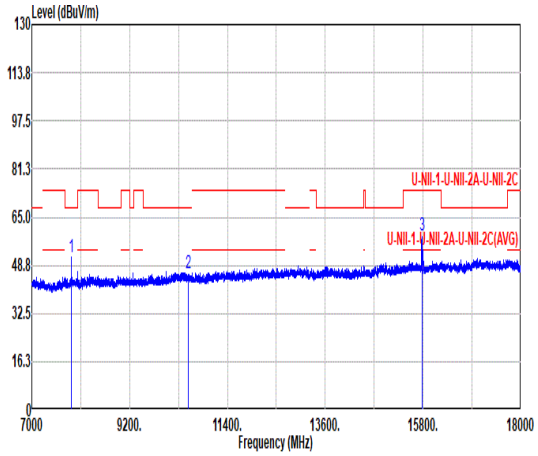 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7889.90 51.72 68.20 -16.48 69.20 36.09 13.26 66.83 0.00 -- -- Peak 2 10520.00 45.90 68.20 -22.30 59.41 37.56 15.60 66.67 0.00 -- -- PEAK 3 15780.00 58.68 74.00 -15.32 63.30 40.30 19.20 64.12 0.00 100 12 PEAK 4 15780.00 43.93 54.00 -10.07 48.53 40.31 19.21 64.12 0.00 100 12 AVERAGE

Mode	53	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_Full RU_5300MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	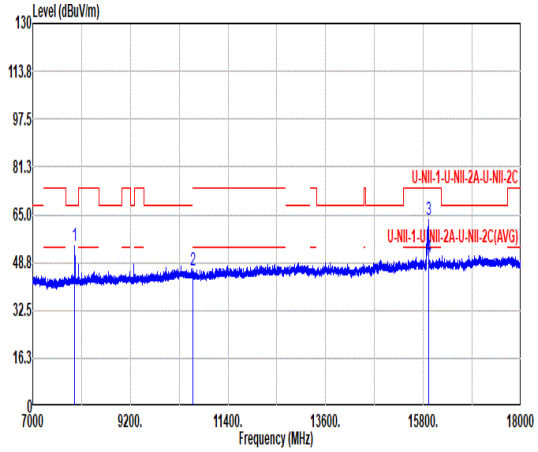 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7950.40 54.25 68.20 -13.95 71.65 36.10 13.31 66.81 0.00 -- -- Peak 2 10600.00 45.96 74.00 -28.04 59.31 37.62 15.67 66.64 0.00 -- -- PEAK 3 15915.50 63.35 74.00 -10.65 67.72 40.42 19.29 64.08 0.00 197 77 Peak 4 15915.50 50.35 54.00 -3.65 54.72 40.42 19.29 64.08 0.00 197 77 Average	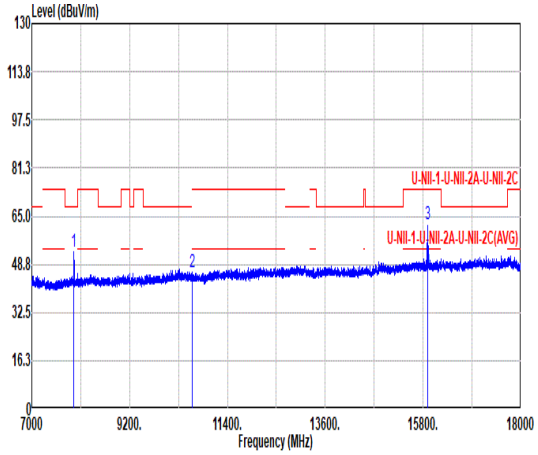 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7950.40 53.17 68.20 -15.03 70.57 36.10 13.31 66.81 0.00 -- -- Peak 2 10600.00 45.87 74.00 -28.13 59.22 37.62 15.67 66.64 0.00 -- -- PEAK 3 15900.00 62.23 74.00 -11.77 66.63 40.41 19.28 64.09 0.00 217 35 PEAK 4 15900.00 46.14 54.00 -7.86 50.54 40.41 19.28 64.09 0.00 217 35 AVERAGE

Mode	54	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Fundamental
Peak	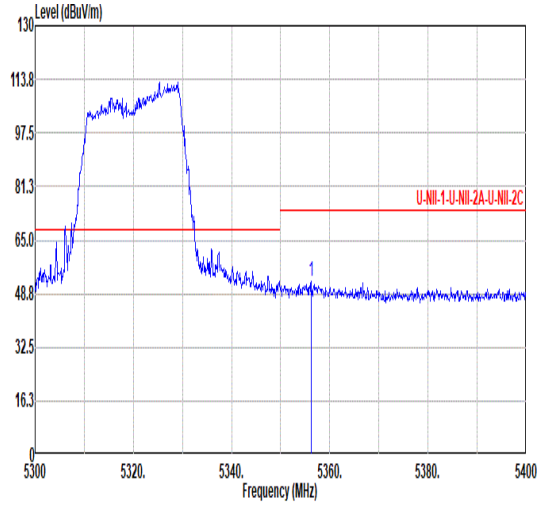 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5356.20 52.27 74.00 -21.73 43.42 34.50 10.75 36.40 0.00 102 121 Peak	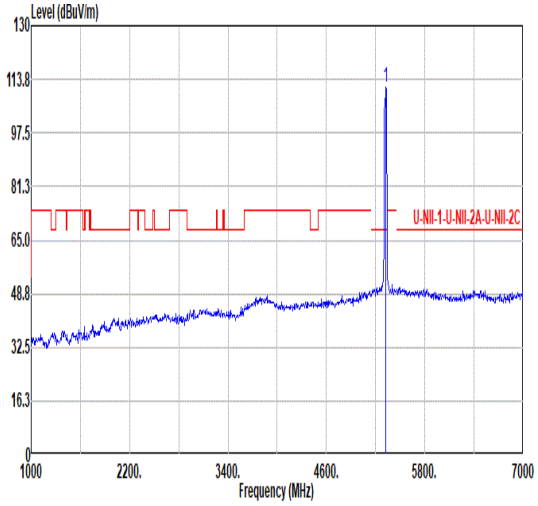 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5326.00 111.47 ------ ------ 102.72 34.50 10.73 36.48 0.00 102 121 Peak
Avg	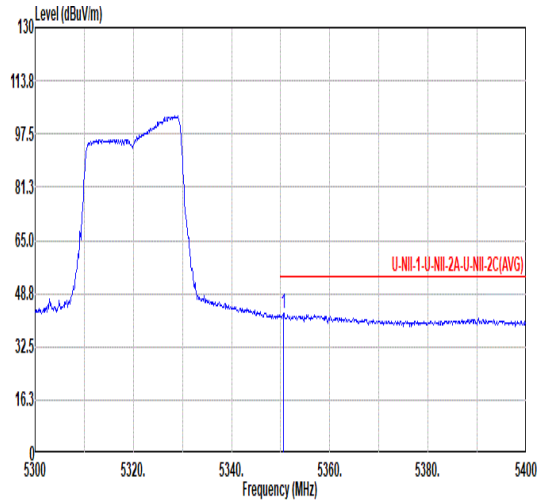 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5350.60 42.50 54.00 -11.50 33.68 34.50 10.75 36.43 0.00 102 121 Average	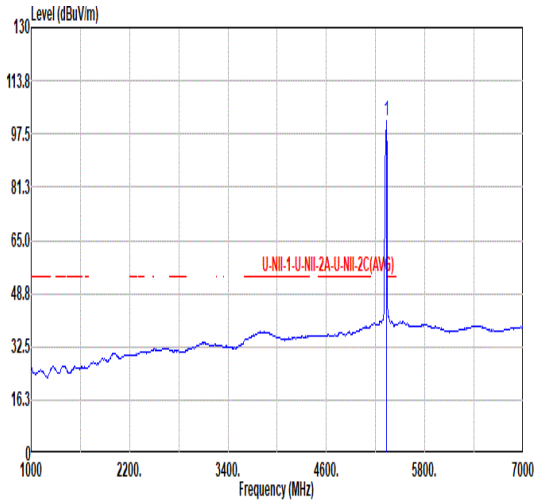 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5332.00 101.63 ------ ------ 92.86 34.50 10.74 36.47 0.00 102 121 Average

Mode	54	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz	
ANT	BF 1S4T	
Pol.	Vertical	Fundamental
Peak	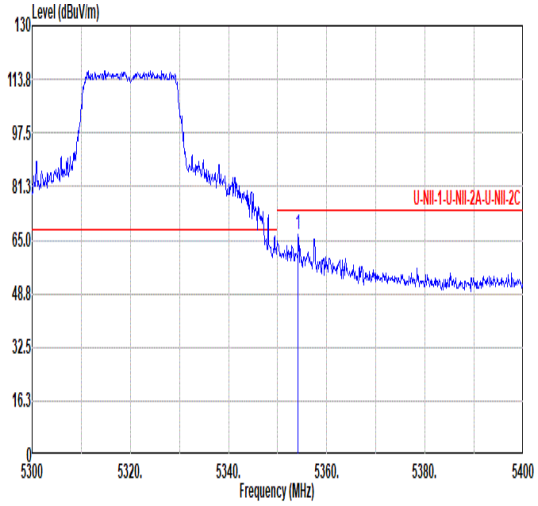 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5354.20 66.74 74.00 -7.26 57.90 34.50 10.75 36.41 0.00 189 268 Peak	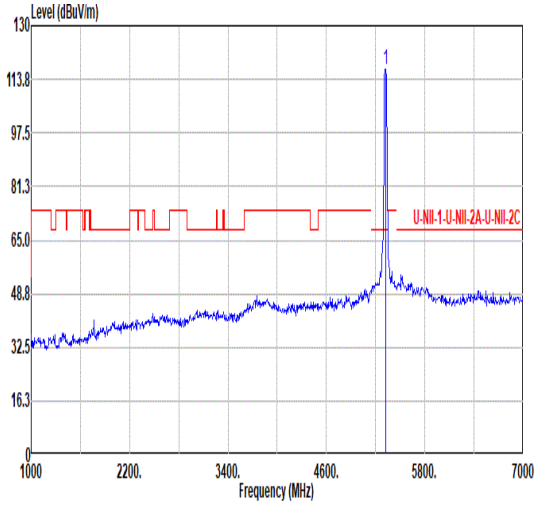 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5326.00 116.76 ------ ------ 108.01 34.50 10.73 36.48 0.00 189 268 Peak
Avg	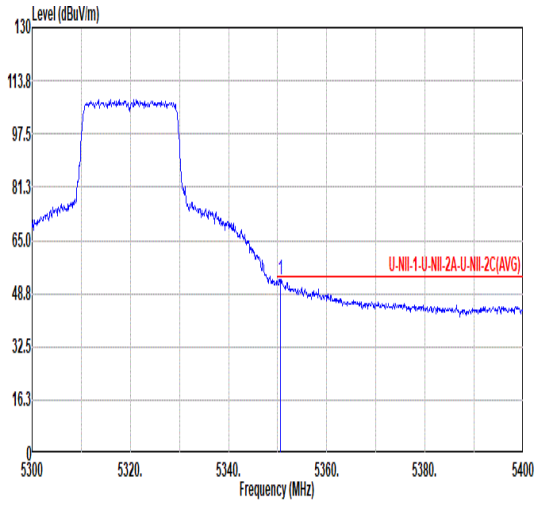 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.60 53.07 54.00 -0.93 44.25 34.50 10.75 36.43 0.00 189 268 Average	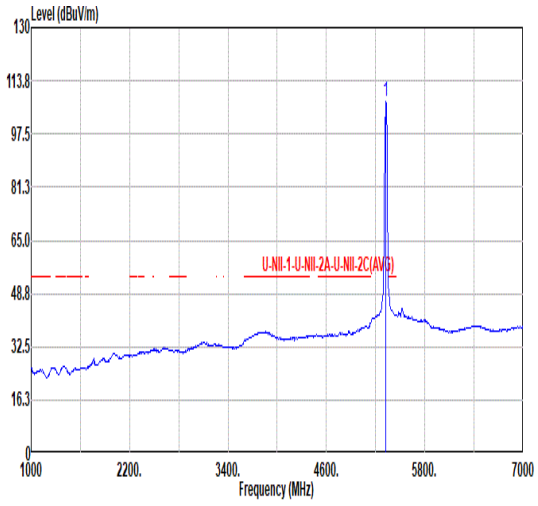 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5326.00 107.38 ------ ------ 98.63 34.50 10.73 36.48 0.00 189 268 Average

Mode	54	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	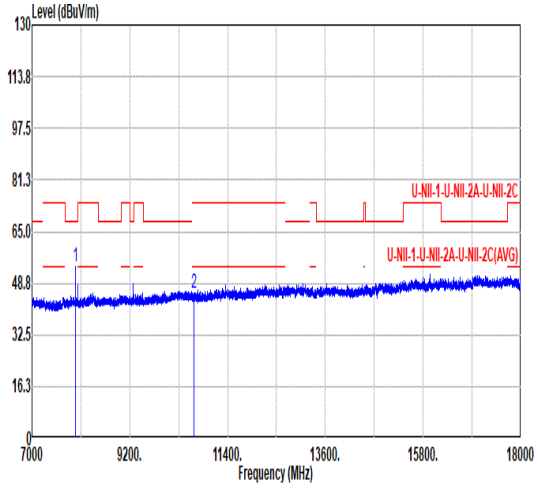 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7980.10 54.06 68.20 -14.14 71.43 36.10 13.33 66.80 0.00 -- -- Peak 2 10639.90 45.43 74.00 -28.57 58.69 37.65 15.71 66.62 0.00 -- -- Peak	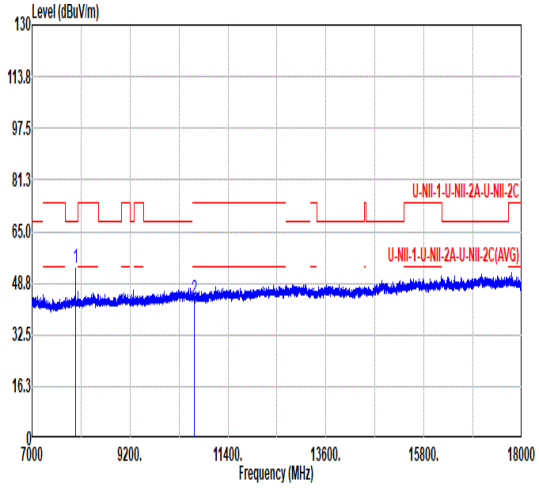 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7980.10 53.25 68.20 -14.95 70.62 36.10 13.33 66.80 0.00 -- -- Peak 2 10639.90 43.85 74.00 -30.15 57.11 37.65 15.71 66.62 0.00 -- -- Peak

Mode	55	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full RU_5270MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Fundamental
Peak	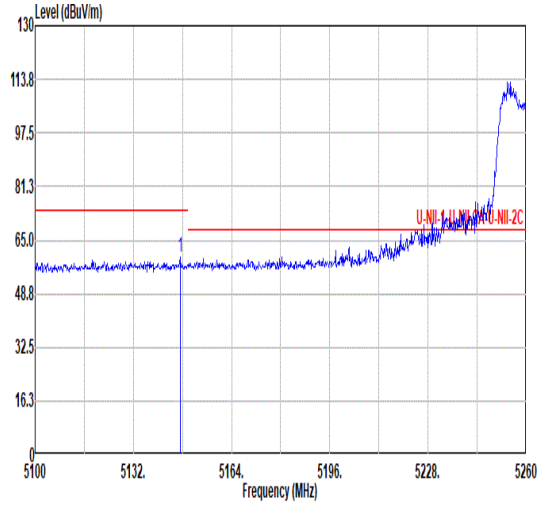 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.20 59.94 74.00 -14.06 51.67 34.14 10.61 36.48 0.00 105 102 Peak	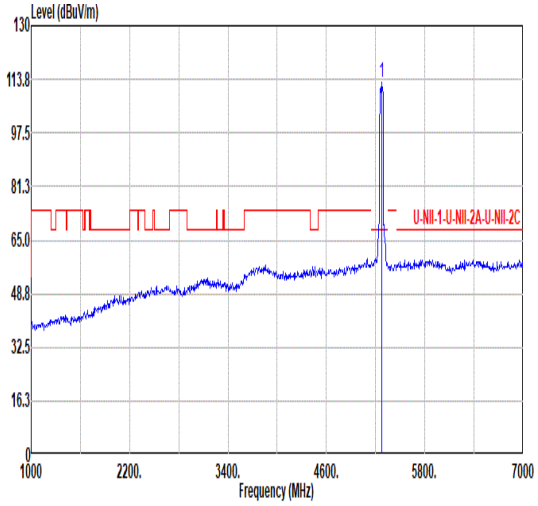 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5278.00 112.65 ------ ------ 104.04 34.46 10.71 36.56 0.00 105 102 Peak
Avg	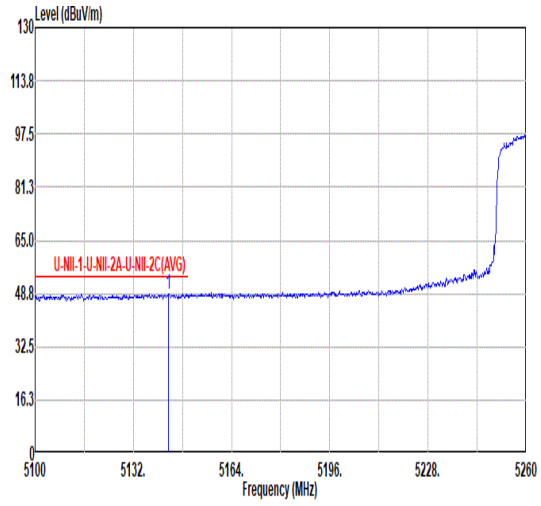 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5143.36 48.79 54.00 -5.21 40.54 34.13 10.60 36.48 0.00 105 102 Average	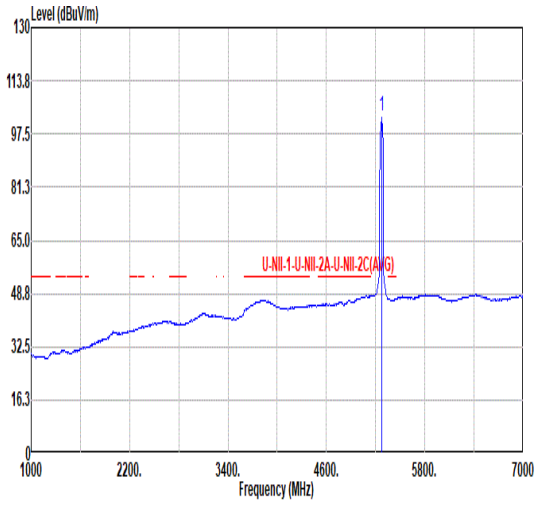 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5272.00 102.87 ------ ------ 94.30 34.44 10.70 36.57 0.00 105 102 Average

Mode	55	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full RU_5270MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Fundamental
Peak	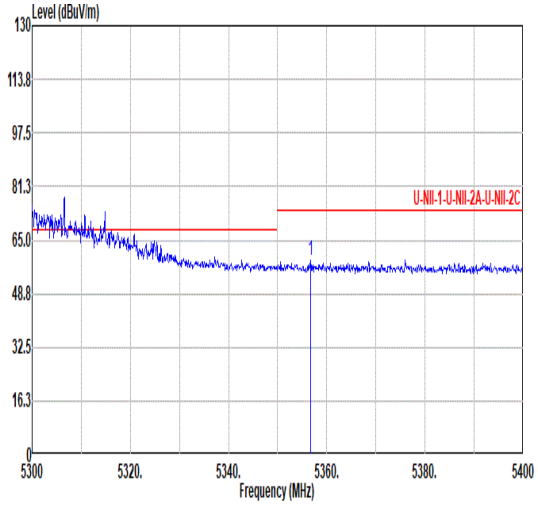 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5356.70 58.69 74.00 -15.31 49.84 34.50 10.75 36.40 0.00 105 102 Peak	Blank
Avg	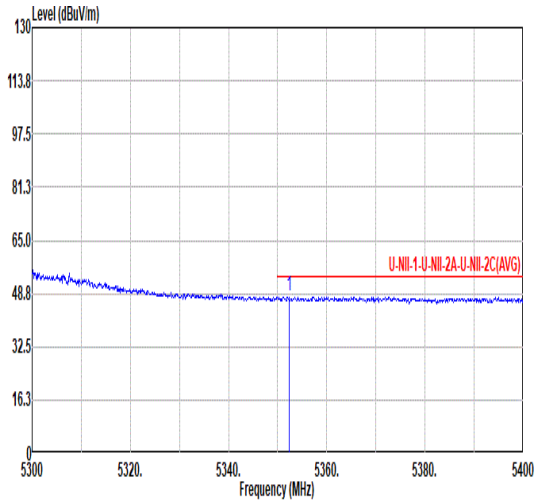 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.30 47.92 54.00 -6.08 39.09 34.50 10.75 36.42 0.00 105 102 Average	Blank

Mode	55	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full RU_5270MHz	
ANT	BF 1S4T	
Pol.	Vertical	Fundamental
Peak	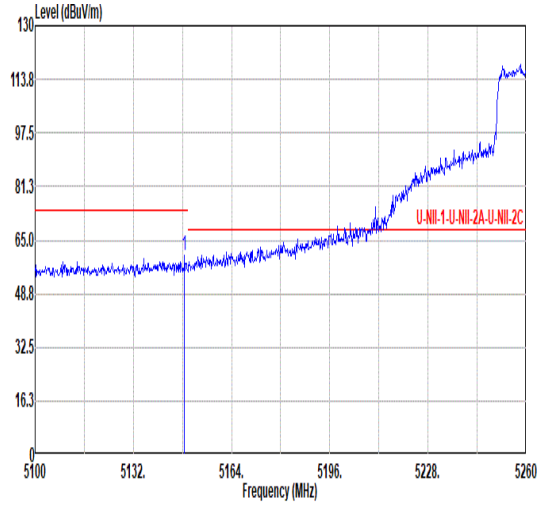 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.64 60.28 74.00 -13.72 52.01 34.15 10.61 36.49 0.00 196 277 Peak	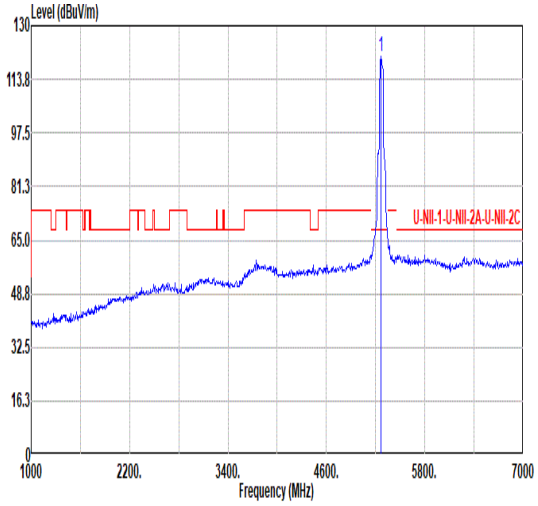 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5266.00 120.45 ------ ------ 111.91 34.43 10.70 36.59 0.00 196 277 Peak
Avg	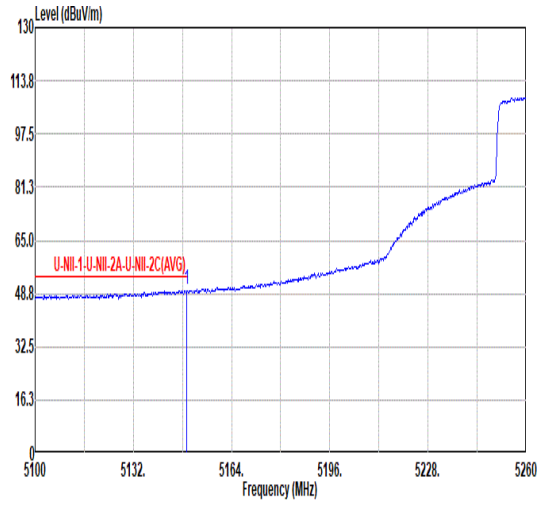 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.44 49.81 54.00 -4.19 41.54 34.15 10.61 36.49 0.00 196 277 Average	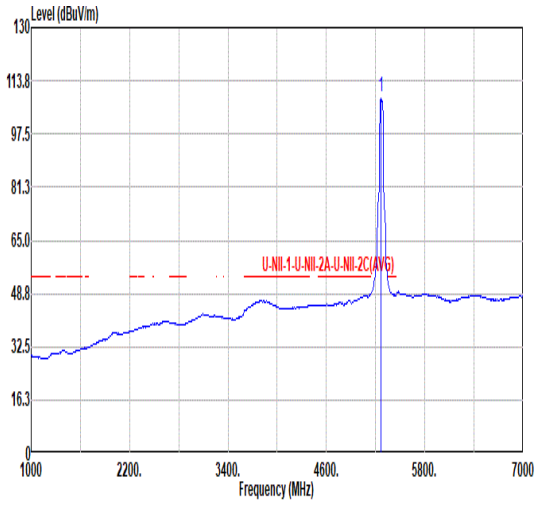 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5266.00 108.66 ------ ------ 100.12 34.43 10.70 36.59 0.00 196 277 Average

Mode	55	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full RU_5270MHz	
ANT	BF 1S4T	
Pol.	Vertical	Fundamental
Peak	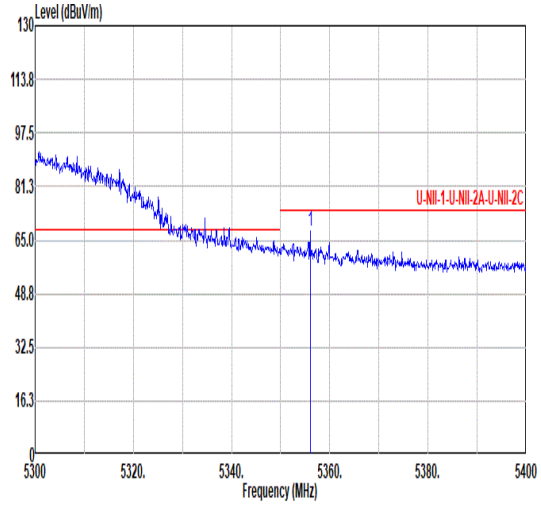 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5356.00 67.59 74.00 -6.41 58.74 34.50 10.75 36.40 0.00 196 277 Peak	Blank
Avg	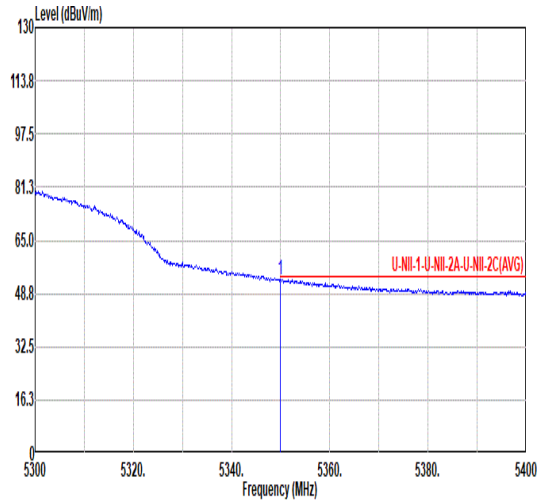 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.00 53.01 54.00 -0.99 44.20 34.50 10.75 36.44 0.00 196 277 Average	Blank

Mode	55	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full RU_5270MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	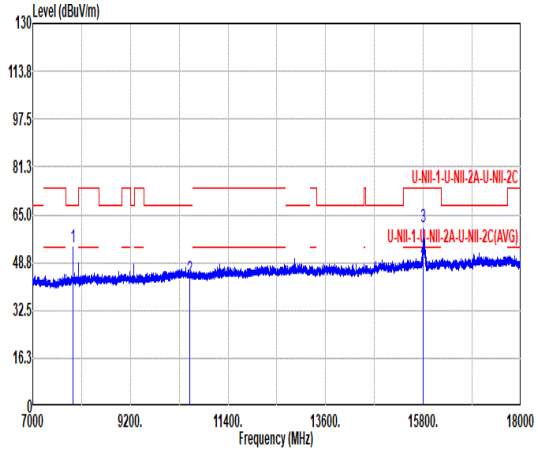 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7905.30 53.98 68.20 -14.22 71.43 36.10 13.28 66.83 0.00 -- -- Peak 2 10539.80 43.33 68.20 -24.87 56.80 37.58 15.62 66.67 0.00 -- -- Peak 3 15801.10 60.69 74.00 -13.31 65.26 40.32 19.22 64.11 0.00 300 59 Peak 4 15801.10 49.69 54.00 -4.31 54.26 40.32 19.22 64.11 0.00 300 59 Average	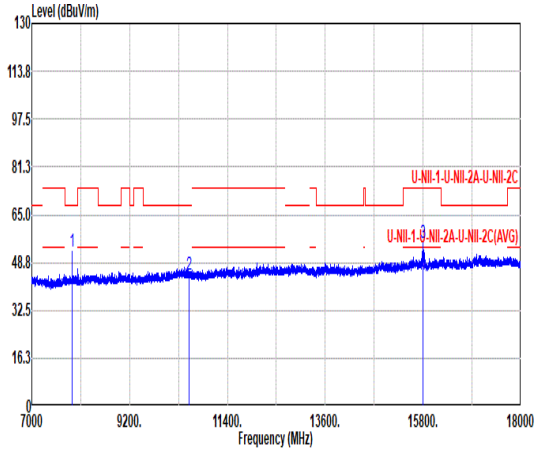 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7905.30 52.66 68.20 -15.54 70.11 36.10 13.28 66.83 0.00 -- -- Peak 2 10539.80 44.57 68.20 -23.63 58.04 37.58 15.62 66.67 0.00 -- -- Peak 3 15802.20 55.29 74.00 -18.71 59.86 40.32 19.22 64.11 0.00 100 12 Peak 4 15802.20 44.75 54.00 -9.25 49.32 40.32 19.22 64.11 0.00 100 12 Average

Mode	56	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full RU_5310MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Fundamental
Peak	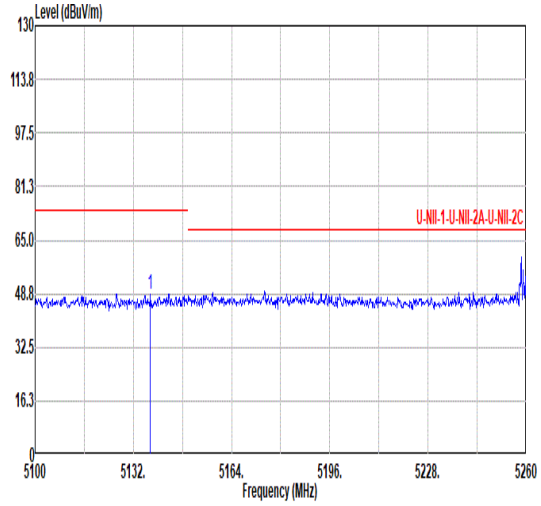 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5137.60 48.75 74.00 -25.25 40.52 34.11 10.60 36.48 0.00 400 96 Peak	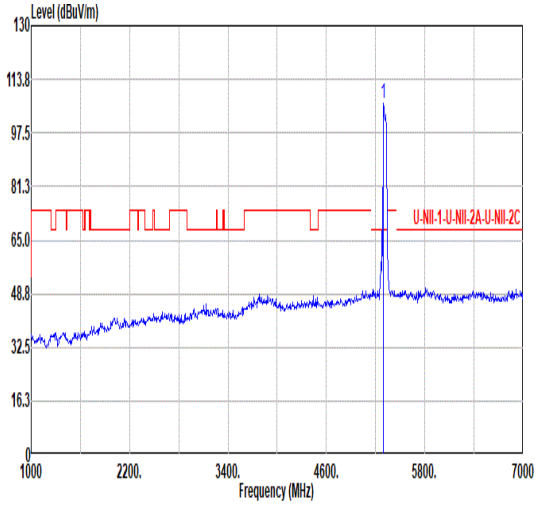 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5296.00 106.29 ------ ------ 97.61 34.49 10.72 36.53 0.00 400 96 Peak
Avg	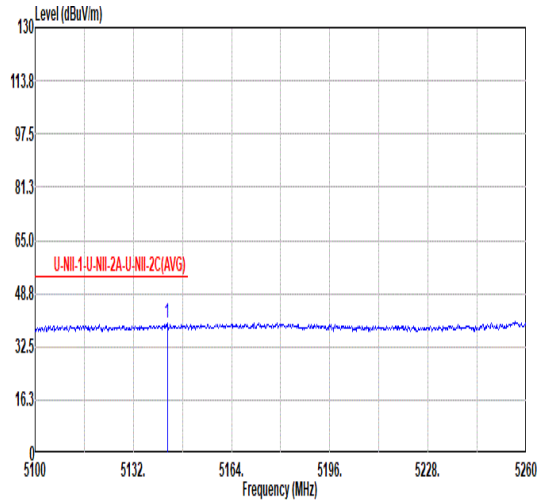 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5143.04 39.57 54.00 -14.43 31.32 34.13 10.60 36.48 0.00 400 96 Average	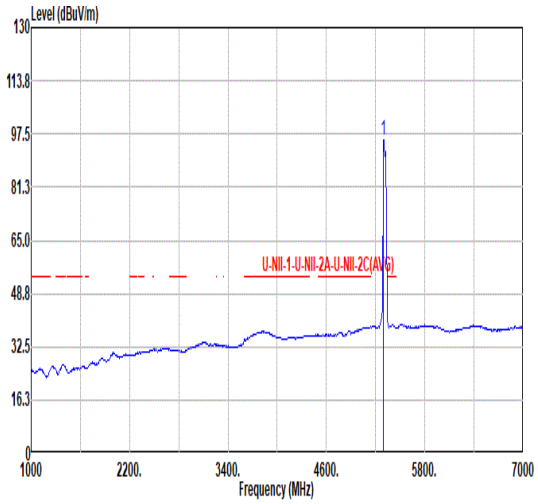 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5296.00 95.50 ------ ------ 86.82 34.49 10.72 36.53 0.00 400 96 Average

Mode	56	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full RU_5310MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Fundamental
Peak	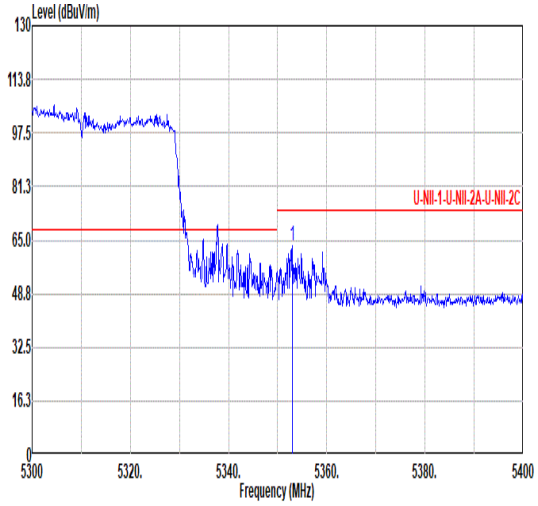 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.00 63.20 74.00 -10.80 54.37 34.50 10.75 36.42 0.00 400 96 Peak	Blank
Avg	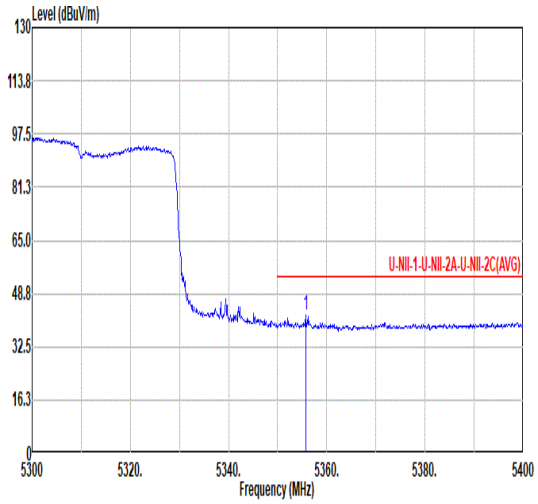 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5355.70 42.29 54.00 -11.71 33.44 34.50 10.75 36.40 0.00 400 96 Average	Blank

Mode	56	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full RU_5310MHz	
ANT	BF 1S4T	
Pol.	Vertical	Fundamental
Peak	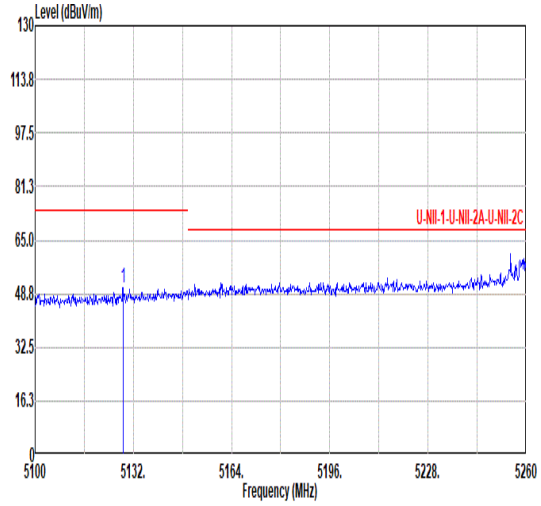 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5128.64 50.58 74.00 -23.42 42.37 34.09 10.59 36.47 0.00 107 277 Peak	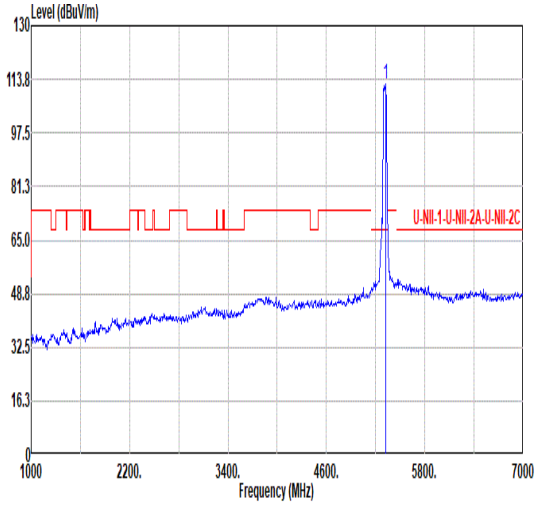 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5326.00 112.45 ------ ------ 103.70 34.50 10.73 36.48 0.00 107 277 Peak
Avg	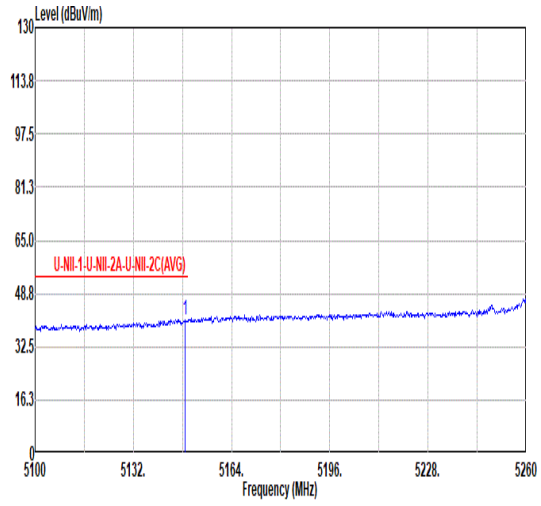 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.80 40.81 54.00 -13.19 32.54 34.15 10.61 36.49 0.00 107 277 Average	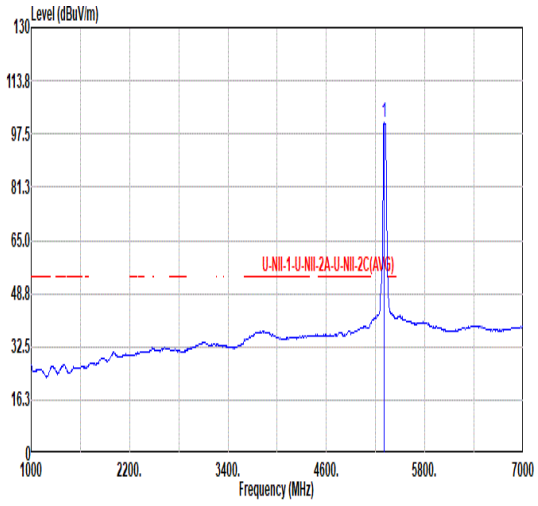 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5302.00 100.86 ------ ------ 92.16 34.50 10.72 36.52 0.00 107 277 Average

Mode	56	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full RU_5310MHz	
ANT	BF 1S4T	
Pol.	Vertical	Fundamental
Peak	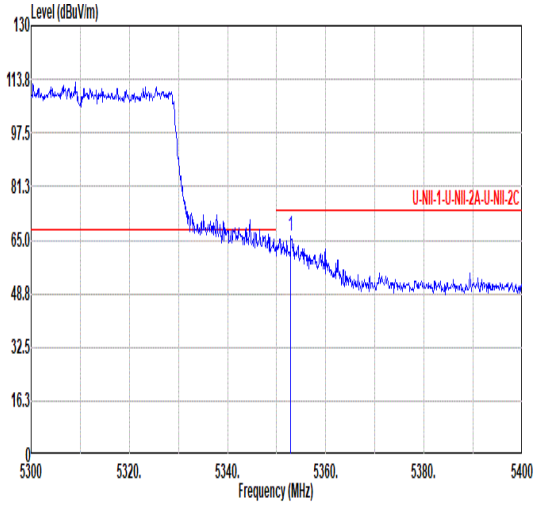 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.90 66.27 74.00 -7.73 57.44 34.50 10.75 36.42 0.00 107 277 Peak	Blank
Avg	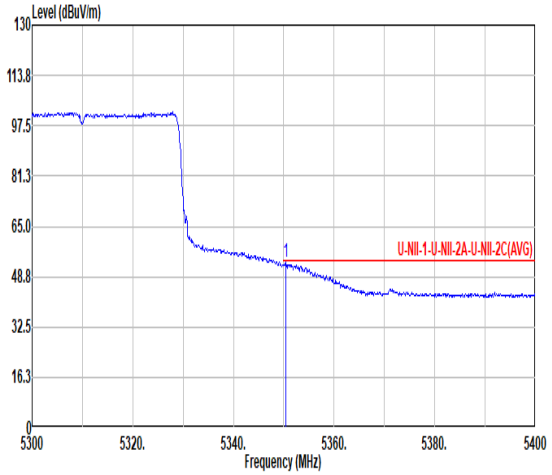 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.40 53.40 54.00 -0.60 44.59 34.50 10.75 36.44 0.00 107 277 Peak	Blank

Mode	56	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full RU_5310MHz	
ANT	BF 1S4T	
Pol.	Horizontal	Vertical
Peak Avg	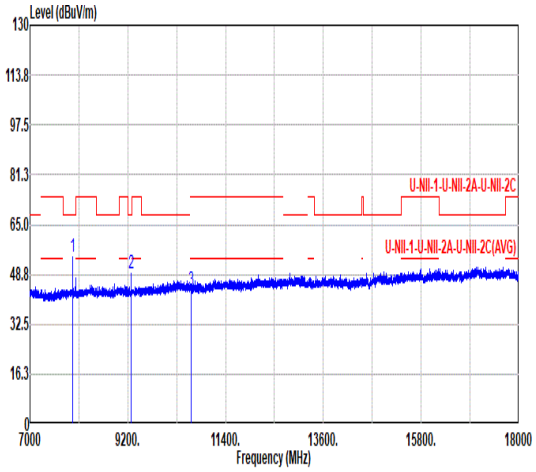 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7964.70 54.26 68.20 -13.94 71.64 36.10 13.32 66.80 0.00 -- -- Peak 2 9272.60 49.10 68.20 -19.10 64.94 36.55 14.53 66.92 0.00 -- -- Peak 3 10620.10 43.80 74.00 -30.20 57.11 37.63 15.69 66.63 0.00 -- -- Peak	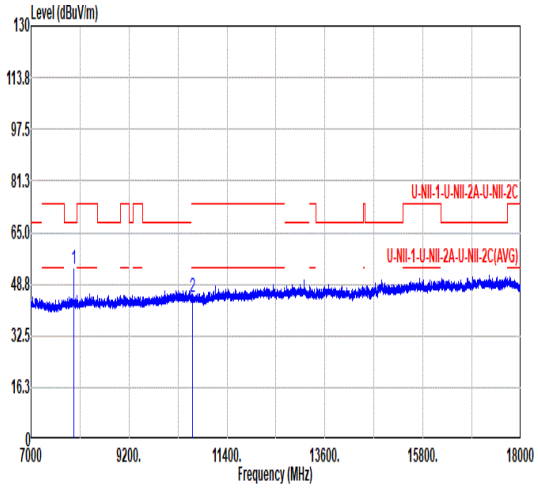 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7964.70 53.69 68.20 -14.51 71.07 36.10 13.32 66.80 0.00 -- -- Peak 2 10620.10 44.86 74.00 -29.14 58.17 37.63 15.69 66.63 0.00 -- -- Peak