



XVA-CBL-OBDPRO-01

INSTALLATION GUIDE

Interface Cable

DOC. 1014A | 04/2026





Xirgo and the Xirgo logo are either trademarks or registered trademarks of Xirgo Holdings, Inc. in the United States and/or other countries. Geotab, Geotab GO, and MyGeotab are either trademarks or registered trademarks in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Xirgo disclaims any proprietary interest in the marks and names of others.

Xirgo is not responsible for errors in typography or photography.

© 2026 Xirgo Holdings, Inc.



TABLE OF CONTENTS

Introduction	1
Safety Checklist	2
Hardware Description	3
Specifications	4
Hardware Hookup	5
Connect the Cable to the Dashcam	5
Connect the Cable to the Vehicle's OBD-II Port	5
Safety Advice	6
Regulatory Information	7
FCC	7
Warning: California Proposition 65	7
IC	8
Hardware and Software Versions	8



INTRODUCTION


The XVA-CBL-OBDFPRO-01 is an interface cable for use with a Xirgo XVD-302 AI dashcam and a vehicle's OBDFPro port. The cable carries vehicle data from the OBDF-II port to the XVD-302 for transmittal to receiving data infrastructure.

SAFETY CHECKLIST

WARNING: Installation should be performed by a qualified individual or installation professional only. Working with a vehicle's power system can be dangerous to both you and your vehicle. Since vehicle designs and power/input sources can vary from vehicle to vehicle, the procedures described here are intended as a guide only.

- **Personal Protection Equipment:** To prevent injury, please wear the following equipment at all times when working on or near the vehicle.


Hardhat



Steel toe shoes




High visibility vest



Eye protection




- **Site Requirements:** Place the vehicle on a flat surface in an area that is sheltered from weather (rain, snow, wind, etc.).

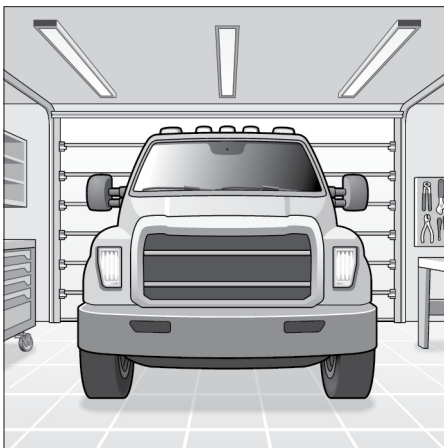

HARDWARE DESCRIPTION

XVA-CBL-OBDFPRO-01 parts

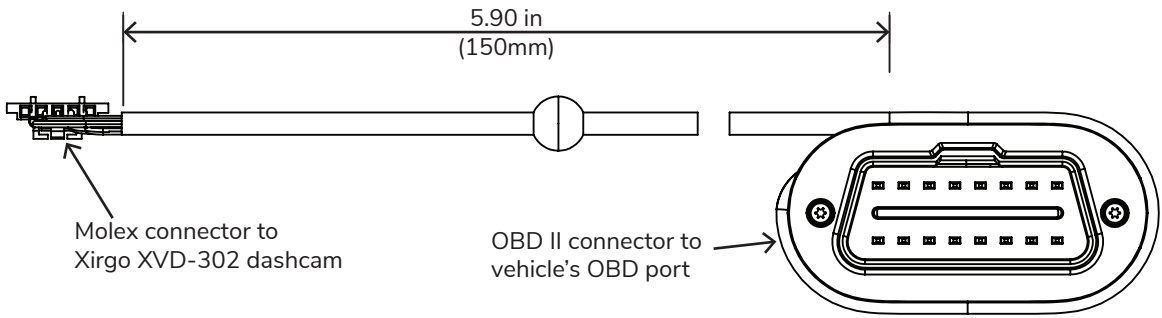



SPECIFICATIONS

Specification	Description
Functionality	Universal RS232-type cable
Weight	~100g
Effective cable length	5.9 in (150 mm)
Nominal Input Voltage	12/24 VDC
Maximum continuous current	100 mA
Connectors	Female OBD-II connector: Power and data 5-Pin Molex 50579705 with the following pinouts: 1. GND & SGND (Black & Black/White) 2. RS232 Tx (Green) 3. RS232 Rx (Yellow) 4. Not used 5. Power (Red)
Compatible devices	OBD-II equipped vehicles




HARDWARE HOOKUP


Connect the XVA-CBL-OBDP-01 to the XVD-302 dashcam and the vehicle's OBD-II port.

Connect the Cable to the Dashcam

Connect cable to Xirgo dashcam

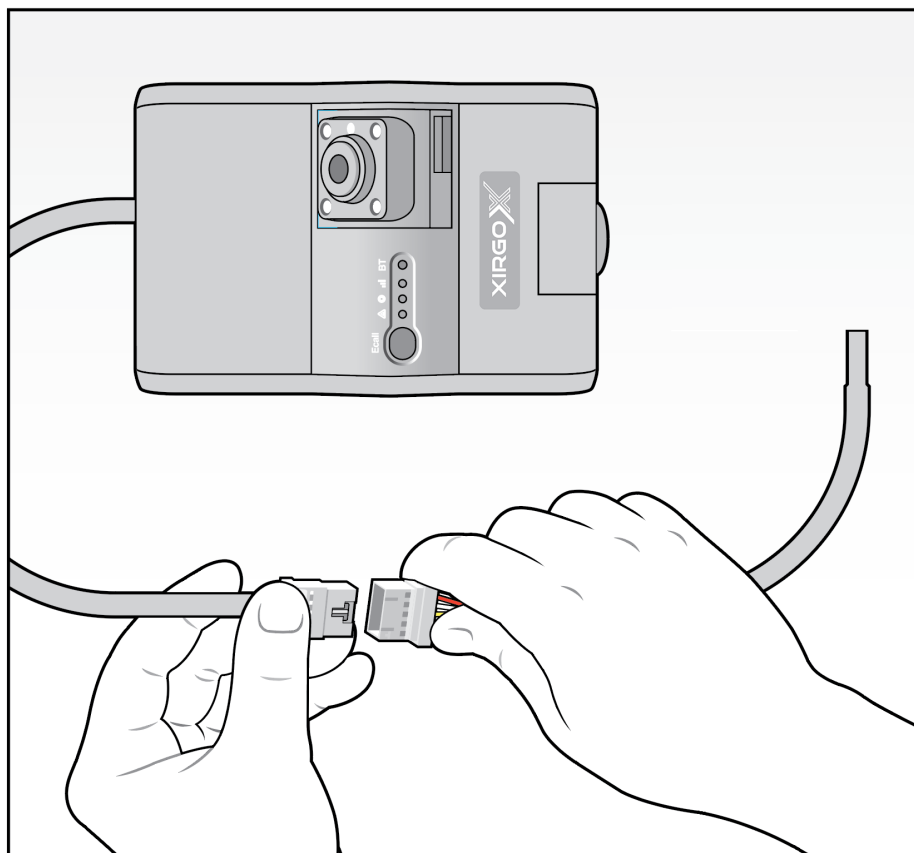

Connect the Cable to the Vehicle's OBD-II Port

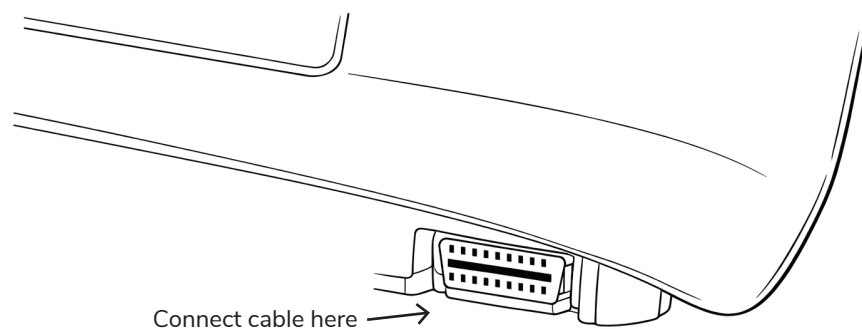



SAFETY ADVICE

Caution

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution

Any changes or modifications (including the antennas) to this device that are not expressly approved by the manufacturer may void the user's authority to operate the equipment.



REGULATORY INFORMATION

FCC

This equipment with FCC ID: GKM-XVA-OBDPRO

Subject to the Federal Communications Commission (FCC) and Industry Canada (IC) rules.

Notice:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

1. This device may not cause harmful interference,
2. This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications made to this equipment not expressly approved by Xirgo Technologies, LLC may void the FCC authorization to operate this equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio/TV technician for help.

Radio frequency radiation exposure information:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Warning: California Proposition 65

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.



IC

IC: 10281A-XVAOBDPRO

Antenna Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the Equivalent Isotropically Radiated Power (E.I.R.P.) is not more than that necessary for successful communication.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la Puissance Isotrope Rayonnée Équivalente (P.I.R.E.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

License exempt

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

1. This device may not cause interference,
2. This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. L'appareil ne doit pas produire de brouillage, et
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Hardware and Software Versions

HW Version: OBDPRO-01-001

SW Version: OBDPRO-01-001



XVA-CBL-OBDFPRO-01 INSTALLATION GUIDE

DOC. 1014A / PUBLISHED 04/2026