

The University of Michigan
Radiation Laboratory
3228 EECS Building
Ann Arbor, MI 48109-2122
Tel: (734) 647-1792

Measured Radio Frequency Emissions
From

TRW Receiver Door Control
PN: 89741-AA020

Report No. 415031-065
January 18, 2001

Copyright © 2001


For:
TRW Automotive Electronics
24175 Research Drive
Farmington Hills, MI 48335-2642

Contact:
Saad Jabro
Tel: 248-442-5187
Fax: 248-478-7241
PO: pending

Measurements made by:

Joseph Brunett
Valdis V. Liepa

Tests supervised by:
Report approved by:


Valdis V. Liepa
Research Scientist

Summary

Tests for compliance with FCC Regulations subject to Part 15, Subpart B, and with Industry Canada Regulations subject to RSS-210, were performed on TRW RKE Receiver. This device is subject to Rules and Regulations as a Receiver. As a Digital Device it is exempt, but such measurements were made to assess the receiver's overall emissions.

In testing performed on January 15 and 16, 2001, the device tested in the worst case met the allowed specifications for radiated emissions from the receiver section by greater than 11.4 dB (see p. 6). The line conducted emission tests do not apply, since the device is powered from an external 12-volt DC, originating from automotive 12-volt electric system.

1. Introduction

TRW superheterodyne security receiver was tested for compliance with FCC Regulations, Part 15, adopted under Docket 87-389, April 18, 1989, and with Industry Canada RSS-210, Issue 2, dated February 14, 1998. The tests were performed at the University of Michigan Radiation Laboratory Willow Run Test Range following the procedures described in ANSI C63.4-1992 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The Site description and attenuation characteristics of the Open Site facility are on file with FCC Laboratory, Columbia, Maryland (FCC Reg. No: 91050) and with Industry Canada, Ottawa, ON (File Ref. No: IC 2057).

2. Test Procedure and Equipment Used

The test equipment commonly used in our facility is listed in Table 2.1 below. The second column identifies the specific equipment used in these tests. The HP 8593E spectrum analyzer is used for primary amplitude and frequency reference.

Table 2.1. Test Equipment.

Test Instrument	Equipment Used	Manufacturer/Model	Cal. Date/By
Spectrum Analyzer (9kHz-22GHz)	X	Hewlett-Packard 8593A SN: 3107A01358	December 2000/UM
Spectrum Analyzer (9kHz-26GHz)	X	Hewlett-Packard 8593E SN: 3107A01131	December 2000/HP
Spectrum Analyzer (0.1-1500 MHz)		Hewlett-Packard 182T/8558B SN: 1529A01114/543592	December 2000/UM
Preamplifier (5-1000MHz)	X	Watkins-Johnson A11 -1 plus A25-1S	December 2000/UM
Preamplifier (5-4000 MHz)	X	Avantek	Oct. 1999/ U of M Rad Lab
Broadband Bicone (20-200 MHz)	X	University of Michigan	June 1996/U of M Rad Lab
Broadband Bicone (200-1000 MHz)	X	University of Michigan	June 1996/U of M Rad Lab
Dipole Antenna Set (25-1000 MHz)		University of Michigan	June 2000/UM
Dipole Antenna Set (30-1000 MHz)		EMCO 3121C SN: 992	June 2000/UM
Active Loop Antenna (0.090-30MHz)		EMCO 6502 SN: 2855	December 1993/ EMCO
Active Rod (30Hz-50 MHz)		EMCO 3301B SN: 3223	December 1993/EMCO
Ridge-horn Antenna (0.5-5 GHz)	X	University of Michigan	March 1999/U of M Rad Lab
LISN Box		University of Michigan	Dec. 1997/U of M Rad Lab
Signal Cables	X	Assorted	January 1993/U of M Rad Lab
X-Y Plotter		Hewlett-Packard 7046A	During Use/U of M Rad Lab
Signal Generator (0.1-990 MHz)		Hewlett-Packard 8656A	January 1990/U of M Rad Lab
Printer	X	Hewlett-Packard 2225A	August 1989/HP

3. Configuration and Identification of Device Under Test

The DUT is a 315.0 MHz superheterodyne receiver, designed for onboard automobile security/convenience applications, and as such, it is powered from an automotive 12-volt DC source. The receiver is based on a single-chip receiver, with 325.7 MHz LO. The receiver is packaged in a plastic case approximately 2.25 x 2.75 x 1.25 inches, with attached metal mounting bracket to the case. Antenna is internal. For testing for radiated emissions, a 3 meter long section of generic harness was used, with power wires separated from the control/signal lines. In the receiver decoding and signal processing are performed by a micro.

The DUT was designed and manufactured by TRW Automotive Electronics Group, 24175 Research Drive, Farmington Hills, MI 48335-2642. It is identified as:

TRW Receiver Door Control
PN: 89741-AA020
SN: 27
FCC ID: GQ43VT27R
CANADA:

3.1 Modifications Made

There were no modifications made to the DUT by this laboratory.

4. Emission Limits

For FCC the DUT falls under Part 15, Subpart B, "Unintentional Radiators". For Industry Canada the DUT falls under Receiver category and is subject to technical requirement of sections 7.1 to 7.4 in RSS-210. The pertinent test frequencies, with corresponding emission limits, are given in Tables 4.1 and 4.2 below.

4.1 Radiated Emission Limits

Table 4.1. Radiated Emission Limits (FCC: 15.33, 15.35, 15.109; IC: RSS-210, 7.3).

Freq. (MHz)	E _{lim} (3m) μ V/m	E _{lim} dB(μ V/m)
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
960-2000	500	54.0

Note: Quasi-Peak readings apply to 1000 MHz (120 kHz BW)
Average readings apply above 1000 MHz (1 MHz BW)

4.2 Conducted Emission Limits

Table 4.2. Conducted Emission Limits (FCC: 15.107; IC: RSS-210, 6.6).

Freq. (MHz)	μ V	dB(μ V)
0.450 - 1.705	250	48.0
1.705 - 30.0	250	48.0

Note: Quasi-Peak readings apply here

5. Emission Tests and Results

5.1 Anechoic Chamber Radiated Emission Tests

To familiarize with the radiated emission behavior of the DUT, it was studied and measured in the shielded anechoic chamber. In the chamber there is a set-up similar to that of an outdoor 3-meter site, with turntable, antenna mast, and a ground plane. Instrumentation includes spectrum analyzers and other equipment as needed.

To study and test for radiated emissions, the DUT was powered by a laboratory power supply. A 315 MHz CW signal was injected (radiated) from a nearby signal generator using a short wire antenna. The DUT was placed on the test table on each of its three axis. For each placement, the table was rotated to obtain maximum signal for vertical and horizontal emission polarizations. This sequence was repeated throughout the required frequency range.

In the chamber we studied and recorded all the emissions using a ridge-horn antenna, which covers 200 MHz to 5000 MHz, up to 2 GHz. In scanning from 30 MHz to 2.0 GHz, there were no spurious emissions observed other than the LO, the injection signal, and the LO harmonics. Figures 5.1 and 5.2 show emissions measured 0-1000 MHz and 1000-2000 MHz, respectively. These measurements are made with a ridge-horn antenna at 3m, with spectrum analyzer in peak hold mode and the receiver rotated in all orientations. The measurements up to 1000 MHz (Fig. 5.1) are used for initial evaluation only, but those above 1000 MHz (Fig. 5.2) are used in final assessment for compliance.

5.2 Open Site Radiated Emission Tests

The DUT was then moved to the 3 meter Open Field Test Site where measurements were repeated up to 1000 MHz using a small bicone, or dipoles when the measurement is near the limit. The DUT was exercised as described in Sec. 5.1 above. The measurements were made with a spectrum analyzer using 120 kHz IF bandwidth and peak detection mode, and, when appropriate, using Quasi-Peak or average detection. The test set-up photographs are in the Appendix (i.e., end of this report).

The emissions from digital circuitry were measured using a standard bicone. These results are also presented in Table 5.1.

5.3 Computations and Results for Radiated Emissions

To convert the dBm's measured on the spectrum analyzer to dB(μ V/m), we use expression

$$E_3(\text{dB}\mu\text{V/m}) = 107 + P_R + K_A - K_G$$

where P_R = power recorded on spectrum analyzer, dB, measured at 3m

K_A = antenna factor, dB/m

K_G = pre-amplifier gain, including cable loss, dB

When presenting the data, at each frequency the highest measured emission under all of the possible orientations is given. Computations and results are given in Table 5.1. There we see that the DUT meets the limit by more than 11.4 dB.

5.4 Conducted Emission Tests

These tests do not apply, since the DUT is powered from a 12-volt automotive supply.

6. Other Measurements

6.1 Emission Spectrum Near Fundamental

Near operating frequency emission spectrum is measured typically over 50 MHz span with and without injection signal. These data are taken with the DUT close to antenna and, hence, amplitudes are relative. The plot is shown in Figure 6.1.

6.2 Effect of Supply Voltage Variation

For the subject device, the radiated emissions (i.e., LO) are extremely low and were unmeasurable in our standard (FCC) measurement set-up.

6.3 Operating Voltage and Current

V	=	12.8 VDC
I	=	1.0 mADC

The University of Michigan
Radiation Laboratory
3228 EECS Building
Ann Arbor, Michigan 48109-2122
(734) 647-1792

Table 5.1 Highest Emissions Measured

Radiated Emission - RF											TRW RX; FCC/IC
#	Freq. MHz	Ant. Used	Ant. Pol.	Pr dBm	Det. Used	Ka dB/m	Kg dB	E3 dBμV/m	E3lim dBμV/m	Pass dB	Comments
1	325.7	SBic	H	-90.1	Pk	19.2	21.7	14.4	46.0	31.6	max of all, noise; 10 kHz BW
2	325.7	SBic	V	-88.5	Pk	19.2	21.7	16.0	46.0	30.0	max of all, noise; 10 kHz BW
3	651.4	SBic	H	-82.0	Pk	25.5	18.3	32.2	46.0	13.8	max of all, noise; 10 kHz BW
4	651.4	SBic	V	-83.0	Pk	25.5	18.3	31.2	46.0	14.8	max of all, noise; 10 kHz BW
5	977.1	SBic	H	-91.2	Pk	29.2	15.7	29.3	54.0	24.7	max of all, noise; 10 kHz BW
6	977.1	SBic	V	-90.3	Pk	29.2	15.7	30.2	54.0	23.8	max of all, noise; 10 kHz BW
7	1303.0	Horn	H	-71.0	Pk	31.8	28.1	39.7	54.0	14.3	max of all, noise; 1 MHz BW
8	1629.0	Horn	H	-70.0	Pk	33.8	28.2	42.6	54.0	11.4	max of all, noise; 1 MHz BW
9	1950.0	Horn	H	-72.0	Pk	35.5	28.1	42.4	54.0	11.6	max of all, noise; 1 MHz BW
10											
11											
12		All receiver orientations were measured; no signal was observed at 3 m distance,									
13		nor with the antenna on top of the DUT									
14											
15											
16											

Radiated Emission - Digital (Class B)											
1											
2											
3		Digital Emissions more than 20 dB below FCC Class B limits									
4											
5											
6											
7											
8											
9											
10											
11											
12											

Conducted Emissions							
#	Freq. MHz	Line Side	Det. Used	Vtest dBμV	Vlim dBμV	Pass dB	Comments
1							
2							Not applicable
3							

Meas. 01/15,16/2001; U of Mich.

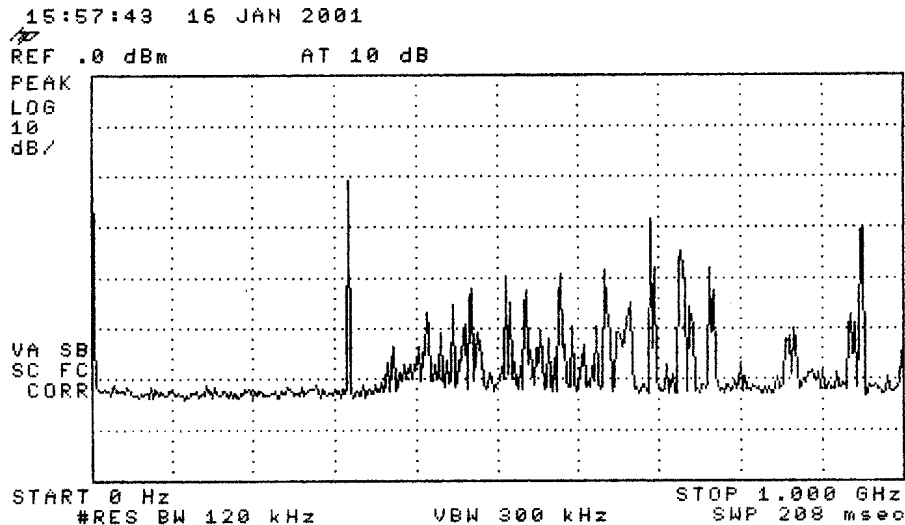
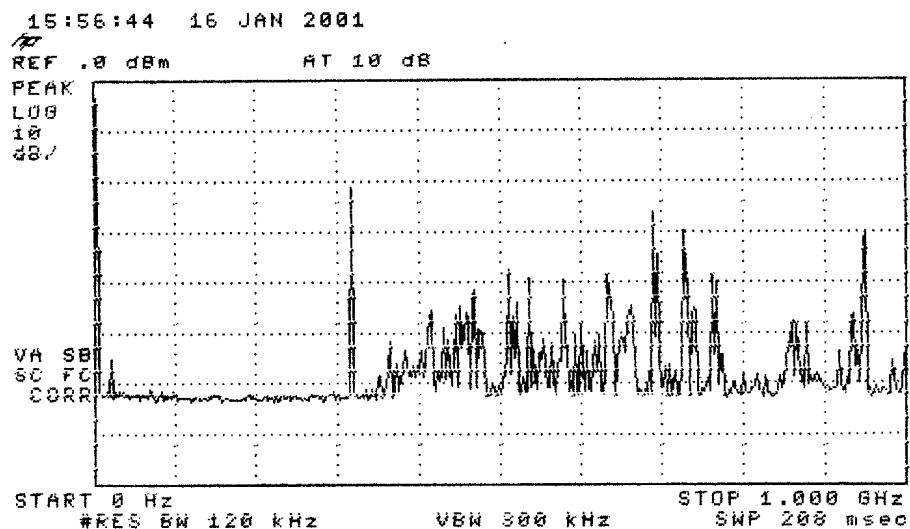


Figure 5.1. Emissions measured at 3 meters in anechoic chamber, 0-1000 MHz.
(top) Receiver plus ambient
(bottom) Ambient

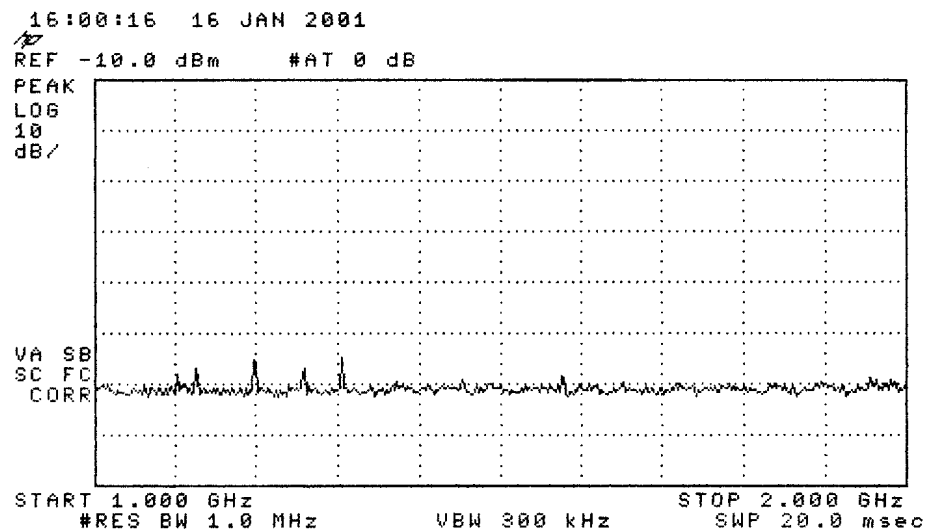
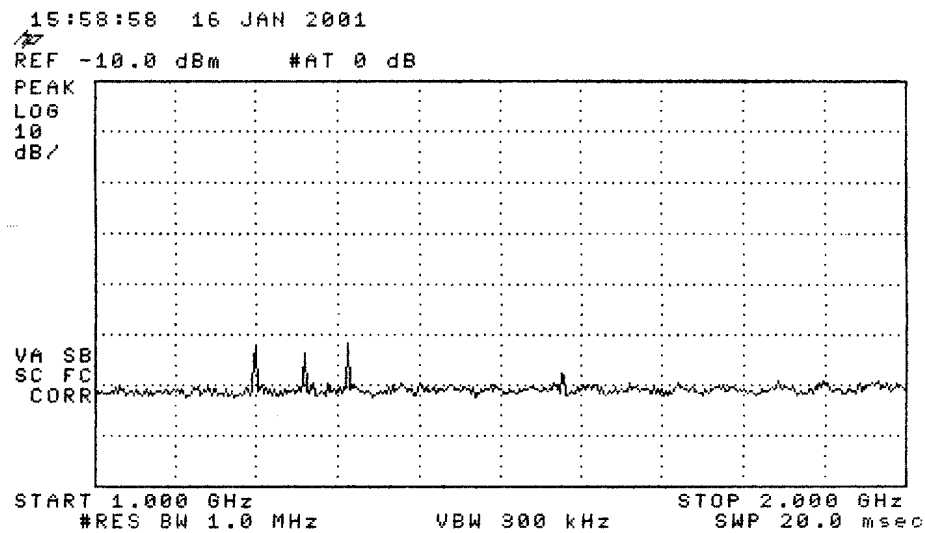


Figure 5.2. Emissions measured at 3 meters in anechoic chamber, 1000-2000 MHz.
 (top) Receiver plus ambient
 (bottom) Ambient

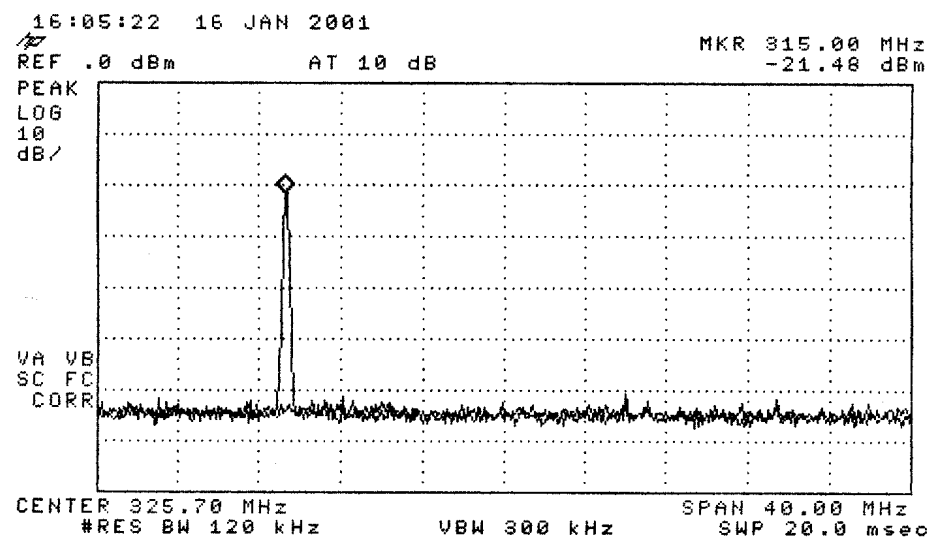


Figure 6.1. Relative receiver emissions in stand-by and "locked-in" modes.
The final emission measurements were made with the receiver in
"locked-in" mode.