



FCC TEST REPORT

REPORT NO.: RF930209A11

MODEL NO.: 72216

RECEIVED: Feb. 9, 2004

TESTED: Mar. 1, 2004

APPLICANT: ACCO Brands, Inc.

ADDRESS: 2000 Alameda de las Pulgas 2nd Floor, San Mateo,
CA 94403

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 13 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA or any U.S. government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Table of Contents

1	CERTIFICATION.....	3
2	SUMMARY OF TEST RESULTS	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF TEST MODES	6
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	6
3.4	DESCRIPTION OF SUPPORT UNITS	6
4	TEST PROCEDURE AND RESULT.....	7
4.2	RADIATED EMISSION MEASUREMENT.....	7
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	7
4.2.2	TEST INSTRUMENT	8
4.2.3	TEST PROCEDURE.....	9
4.2.4	DEVIATION FROM TEST STANDARD.....	9
4.2.5	TEST SETUP.....	10
4.2.6	EUT OPERATING CONDITION.....	10
4.2.7	TEST RESULT.....	11
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	12
6	INFORMATION ON THE TESTING LABORATORIES.....	13



1 CERTIFICATION

PRODUCT : PilotMouse Optical Wireless 3 Button
BRAND NAME : Kensington, Primax, ACCO
MODEL NO : 72216
APPLICANT : ACCO Brands, Inc.
STANDARDS : 47 CFR Part 15, Subpart C(15.227)
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility on Mar. 1, 2004. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: Annie Chang , **DATE:** Mar. 16, 2004
(Annie Chang)

APPROVED BY: Mike Su , **DATE:** Mar. 16, 2004
(Mike Su, Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.207	Conducted Emission Test	N/A	Power supply is 3VDC from batteries
15.227	Radiated Emission Test	PASS	Minimum passing margin is -3.79dBuV at 30.00MHz

NOTE: The receiver part to communicate with the EUT has been verified to comply with FCC Part 15, Subpart B, Class B (DoC). The test report can be provided upon request.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	PilotMouse Optical Wireless 3 Button
MODEL NO.	72216
POWER SUPPLY	3VDC from battery
MODULATION TYPE	FSK
CARRIER FREQUENCY OF EACH CHANNEL	27.045MHz
NUMBER OF CHANNEL	1
ANTENNA TYPE	Loop antenna
DATA CABLE	1.5m (Shielded)
I/O PORTS	USB port (Additional PS/2 adapter)
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT is the transmitter part of PilotMouse Optical Wireless 3 Button.
2. For more detailed features description of the EUT, please refer to the manufacturer's specifications or the User's Manual.

3.2 DESCRIPTION OF TEST MODES

One channel was provided to this EUT.

Channel	Frequency
1	27.045MHz

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is the transmitter part of a PilotMouse Optical Wireless 3 Button. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C (15.227)

ANSI C63.4-1992

All tests have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT was tested standalone.

4 TEST PROCEDURE AND RESULT

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.227 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
26.96-27.28	100	80

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Preamplifier	8447D	2432A03504	Jun. 10, 2004
* HP Preamplifier	8449B	3008A01924	Oct. 12, 2004
* HP Preamplifier	8449B	3008A01638	Oct. 17, 2004
SCHWARZBECK Tunable Dipole Antenna	VHA 9103	NA	Nov. 15, 2004
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 12, 2005
Schwarzbeck Antenna	VULB9168	137	Feb. 27, 2005
* EMCO Horn Antenna	3115	6714	Nov. 26, 2004
* EMCO Horn Antenna	3115	9312-4192	Feb. 28 2005
ADT. Turn Table	TT100	0306	NA
ADT. Tower	AT100	0306	NA
Software	ADT_Radiated_V6	NA	NA
TIMES RF cable	LL142	CABLE-CH6-01	Apr. 30, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. "*" = These equipment are used for the final measurement.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The test was performed in ADT Chamber No. 6.

4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

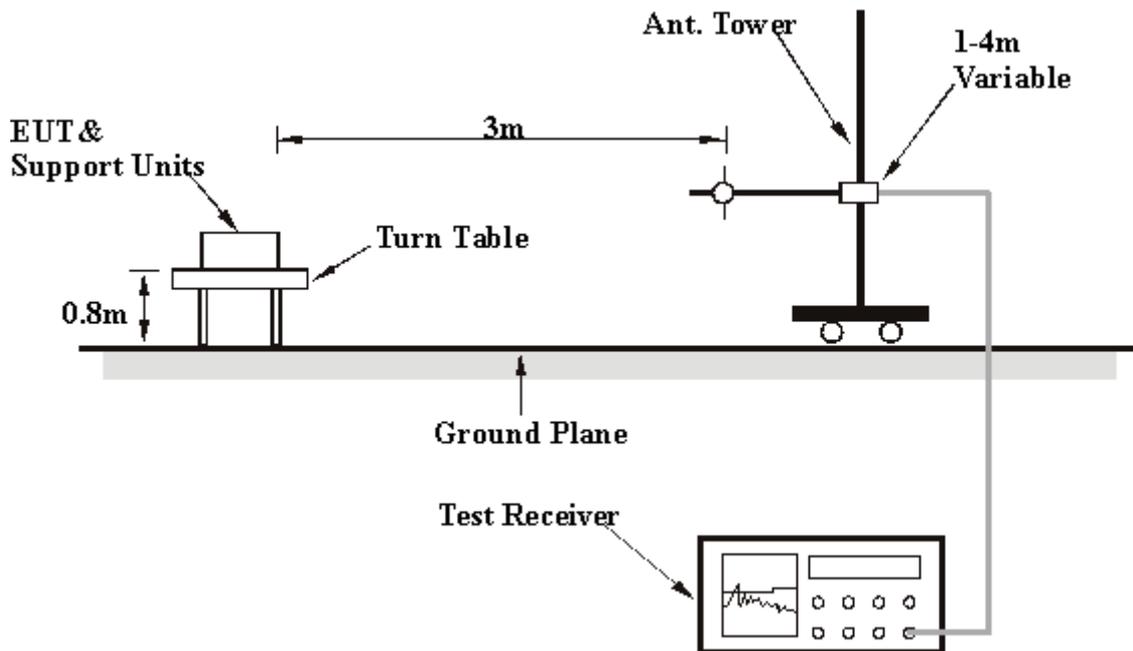

For the actual test configuration, please refer to the related item in this test report - Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITION

Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.



4.2.7 TEST RESULT

EUT	PilotMouse Optical Wireless 3 Button	MODEL	72216
MODE	Channel 1	INPUT POWER	3VDC
FREQUENCY RANGE	30-1000 MHz	DETECTOR FUNCTION	Peak / Quasi-Peak / Average
ENVIRONMENTAL CONDITIONS	22 deg. C, 65 % RH, 1050 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.04	41.27 AV	80.00	-38.73	2.27 H	6	29.13	12.14
2	*27.04	46.12 PK	100.00	-53.88	2.27 H	6	33.98	12.14
3	54.09	13.71 QP	40.00	-26.29	1.46 H	99	0.60	13.11
4	81.13	16.34 QP	40.00	-23.66	1.40 H	236	7.52	8.82
5	108.14	17.41 QP	43.50	-26.09	1.86 H	241	6.72	10.69
6	135.22	18.63 QP	43.50	-24.87	1.25 H	276	5.65	12.98
7	162.26	17.60 QP	43.50	-25.90	1.27 H	224	4.06	13.54

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*27.04	36.15 AV	80.00	-43.85	1.47 V	293	24.01	12.14
2	*27.04	39.15 PK	100.00	-60.88	1.47 V	293	27.01	12.14
3	30.00	36.21 QP	40.00	-3.79	1.47 V	293	23.83	12.38
4	54.08	15.82 QP	40.00	-24.18	1.31 V	28	2.71	13.11
5	81.14	14.81 QP	40.00	-25.19	1.58 V	229	5.98	8.82
6	108.17	16.34 QP	43.50	-27.16	1.32 V	168	5.64	10.70
7	135.22	15.78 QP	43.50	-27.72	1.63 V	273	2.80	12.98
8	162.09	17.63 QP	43.50	-25.87	1.44 V	225	4.07	13.56

NOTE:

1. Emission level = Raw Value – Correction Factor
2. Correction Factor = Pre-Amplifier Factor - Antenna Factor - Cable Factor
(Pre-Amplifier Factor = 0, when a Pre-Amplifier is not used for the test.)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. "*" = Fundamental frequency.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Linko RF & Telecom Lab.
Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.