

FCC TEST REPORT

for

PART 15, SUBPART B CLASS B

Equipment : SCANNER

MODEL NO. : SL-760A

F C C I D : GYUSL760A

Filing Type : Original Grant

APPLICANT : SILITEK CORPORATION

10F, No. 25, Sec. 1, Tung Hwa S. Rd.,
Taipei, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.

SPORTON INTERNATIONAL INC.

6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

TABLE OF CONTENT

SECTION TITLE	PAGE
CERTIFICATE OF COMPLIANCE	3
1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST.....	4
1.1. APPLICANT	4
1.2. MANUFACTURER	4
1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST	4
1.4. FEATURE OF EQUIPMENT UNDER TEST.....	4
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	5
2.1. TEST MANNER	5
2.2. DESCRIPTION OF TEST SYSTEM	5
2.3. CONNECTION DIAGRAM OF TEST SYSTEM.....	7
3. TEST SOFTWARE.....	8
4. GENERAL INFORMATION OF TEST.....	9
4.1. TEST FACILITY	9
4.1. TEST FACILITY	9
4.2. STANDARD FOR METHODS OF MEASUREMENT	9
4.3. TEST IN COMPLIANCE WITH.....	9
4.4. FREQUENCY RANGE INVESTIGATED	9
4.5. TEST DISTANCE.....	9
5. TEST OF CONDUCTED POWERLINE.....	10
5.1. MAJOR MEASURING INSTRUMENTS.....	10
5.2. TEST PROCEDURES	11
5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE	12
5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION	13
5.5. PHOTOGRAPHS OF CONDUCTED POWERLINE TEST CONFIGURATION	14
6. TEST OF RADIATED EMISSION.....	16
6.1. MAJOR MEASURING INSTRUMENTS.....	16
6.2. TEST PROCEDURES	17
6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION	18
6.4. TEST RESULT OF RADIATED EMISSION	19
6.5. PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION	20
7. ANTENNA FACTOR AND CABLE LOSS.....	21
8. LIST OF MEASURING INSTRUMENTS USED.....	22

CERTIFICATE OF COMPLIANCE

for

FCC PART 15, SUBPART B CLASS B

Equipment : SCANNER

MODEL NO. : SL-760A

F C C I D : GYUSL760A


Filing Type : Original Grant

APPLICANT : **SILITEK CORPORATION**

10F, No. 25, Sec. 1, Tung Hwa S. Rd.,
Taipei, Taiwan, R.O.C.

I HEREBY CERTIFY THAT :

The measurement shown in this report were made in accordance with the procedures given in **ANSI C63.4 -1992** and the energy emitted by this equipment was **passed** both radiated and conducted emissions class B limits. Testing was carried out on May. 21, 1998 at **SPORTON International Inc.** in Nei Hwu.

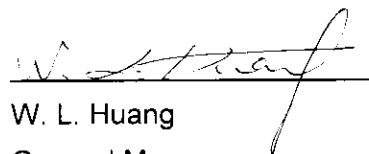
W. L. Huang
General Manager

SPORTON International Inc.

6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST

1.1. APPLICANT

SILITEK CORPORATION

10F, No. 25, Sec. 1, Tung Hwa S. Rd.,
Taipei, Taiwan, R.O.C.

1.2. MANUFACTURER

Same as 1.1

1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

EQUIPMENT : SCANNER

FCC ID: GYUSL760A

MODEL NO. :SL-760A

TRADE NAME : SILITEK

DATA CABLE : Shielded

POWER SUPPLY TYPE : from PC

POWER CORD : N/A

1.4. FEATURE OF EQUIPMENT UNDER TEST

- Scanner type: portable color sheetfed scanner
- Resolution: Horizontal/300dpi, Vertical/600dpi
- Scanning modes: 24bit color, 256 gray scale, B&W text mode
- Max. scan size:8.5" x 14"
- Min. scan size:3.5" x 2.2"
- Scanning speed: 9ms/line ,3ms/line
- Interface: USB
- Power requirements: USB bus power, +5V, 500mA

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST

2.1. TEST MANNER

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The HONEYWELL keyboard, SONY monitor, HP printer, SILITEK scanner, KYE mouse and ACEEX modem were connected to the LEO PC.
- c. Frequency range investigated: Conduction 450 KHz to 30 MHz, Radiation 30 MHz to 1000 MHz.

2.2. DESCRIPTION OF TEST SYSTEM

Support Device 5. --- PERSONAL COMPUTER (LEO)

FCC ID :N/A
Model No. :P2L97
Serial No. :SP1037
Data Cable :Shielded, 360 degree via metal backshells.
Power Supply Type :Switching
Power Cord :Non-shielded

Remark: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Device 2. --- MODEM (ACEEX)

FCC ID :IFAXDM1414
Model No. :DM1414
Serial No. :SP0016
Data Cable :Shielded, 360 degree via metal backshells
Power Supply Type :Linear

FCC TEST REPORTREPORT NO. : F832005

Support Device 3. --- PRINTER (HP)

FCC ID :DSI6XU2225
Model No. :2225C
Serial No. :SP0003
Data Cable :Shielded, 360 degree via metal backshells
Power Supply Type :Linear

Support Device 4. --- MONITOR (SONY)

FCC ID :AK8GDM17SE2T
Model No. :GDM-17SE27
Serial No. :SP1045
Data Cable :Shielded
Power Supply Type :Switching
Power Cord :Non-shielded

Support Device 5. --- KEYBOARD (HONEYWELL)

FCC ID :GJK101RX-6
Model No. :PC7XL-AA
Serial No. :SP1008
Data Cable :Shielded, 360 degree via metal backshells


Support Device 6. --- VGA CARD (BRITEK)

FCC ID :ILLS386XP
Model No. :BTK-076
Serial No. :SP1015
Data Cable : Shielded, 360 degree via metal backshells

Support Device 7. --- MOUSE (KYE)

FCC ID :FSUGMZFC
Model No. :NETMOUSE
Serial No. :SP1036
Data Cable :Non-shielded

2.3. CONNECTION DIAGRAM OF TEST SYSTEM

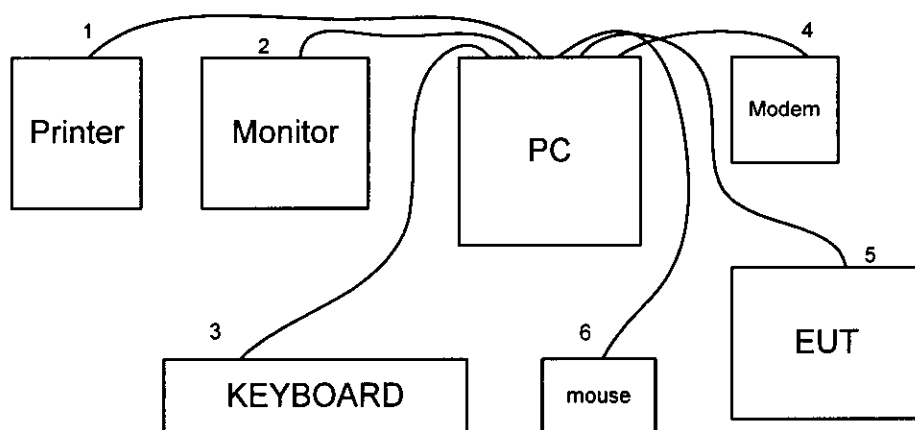

1. The I/O cable is connected to the support device 3.
2. The I/O cable is connected to the support device 4.
3. The I/O cable is connected to the support device 5.
4. The I/O cable is connected to the support device 2.
5. The I/O cable is connected to the EUT.
6. The I/O cable is connected to the support device 7.

3. TEST SOFTWARE

An executive program, FCC.EXE, which generates a complete line of continuously repeating " H " pattern is used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem.
- f. The PC sends " H " messages to the internal Hard Disk, then the hard disk reads and writes the message.
- g. Repeat the steps from b to g.

4. GENERAL INFORMATION OF TEST

4.1. TEST FACILITY

4.1. TEST FACILITY

This test was carried out by SPORTON INTERNATIONAL INC. in an openarea test site.

Openarea Test Site Location : No. 3, Lane 238, Kang Lo Street, Nei Hwu District,
Taipei 11424, Taiwan, R.O.C.

TEL : 886-2-2631-4739

FAX : 886-2-2631-9740

4.2. STANDARD FOR METHODS OF MEASUREMENT

ANSI C63.4-1992

4.3 .TEST IN COMPLIANCE WITH

FCC PART 15, SUBPART B CLASS B

4.4. FREQUENCY RANGE INVESTIGATED

- a. Conduction : from 450 KHz to 30 MHz
- b. Radiation : from 30 MHz to 1000 MHz

4.5. TEST DISTANCE

The test distance of radiated emission from antenna to EUT is 3M.

5. TEST OF CONDUCTED POWERLINE

Conducted Emissions were measured from 450 KHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in Figure 5-3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

5.1. MAJOR MEASURING INSTRUMENTS

- Test Receiver

Attenuation	0 dB
Start Frequency	0.45 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 KHz

5.2. TEST PROCEDURES

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room and was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm , 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 450 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be retested on by one using the quasi-peak method and reported.

5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION

- Frequency Range of Test : from 0.45 MHz to 30 MHz
- Temperature : 29°C
- Relative Humidity :65% RH
- All emissions not reported here are more than 10 dB below the prescribed limit.
- Test Date : MAY. 21, 1998

The Conducted Emission test was passed at minimum margin

LINE 0.58MHz / 39.90dBuV.

Frequency Line / Neutral		Meter Reading		Limits		Margin
(MHz)		(dBuV)	(uV)	(dBuV)	(uV)	(dB)
0.51	L	37.00	70.79	48.00	251.19	-11.00
0.58	L	39.90	98.86	48.00	251.19	-8.10
0.73	L	39.70	96.61	48.00	251.19	-8.30
0.58	N	39.10	90.16	48.00	251.19	-8.90
0.73	N	39.30	92.26	48.00	251.19	-8.70
0.89	N	39.20	91.20	48.00	251.19	-8.80

Test Engineer :

Roxy Chou

ROXY CHOU

6. TEST OF RADIATED EMISSION

Radiated emissions from 30 MHz to 1000MHz were measured with a bandwidth of 120 KHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in Figure 6-3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

6.1. MAJOR MEASURING INSTRUMENTS

- RF Preselector

Attenuation	0 dB
RF Gain	20 dB
Signal Input	Input 2 (for 20 MHz to 2 GHz)

- Spectrum Analyzer

Attenuation	0 dB
Start Frequency	30 MHz
Stop Frequency	1000MHz
Resolution Bandwidth	1 MHz
Video Bandwidth	1 MHz
Signal Input	Input 1 (for 100Hz to 1.5 GHz)


- Quasi-Peak Adapter

Resolution Bandwidth	120 KHz
Frequency Band	30 MHz to 1 GHz
Quasi-Peak Detector	ON for Quasi-Peak Mode
OFF for Peak Mode	

6.2. TEST PROCEDURES

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION

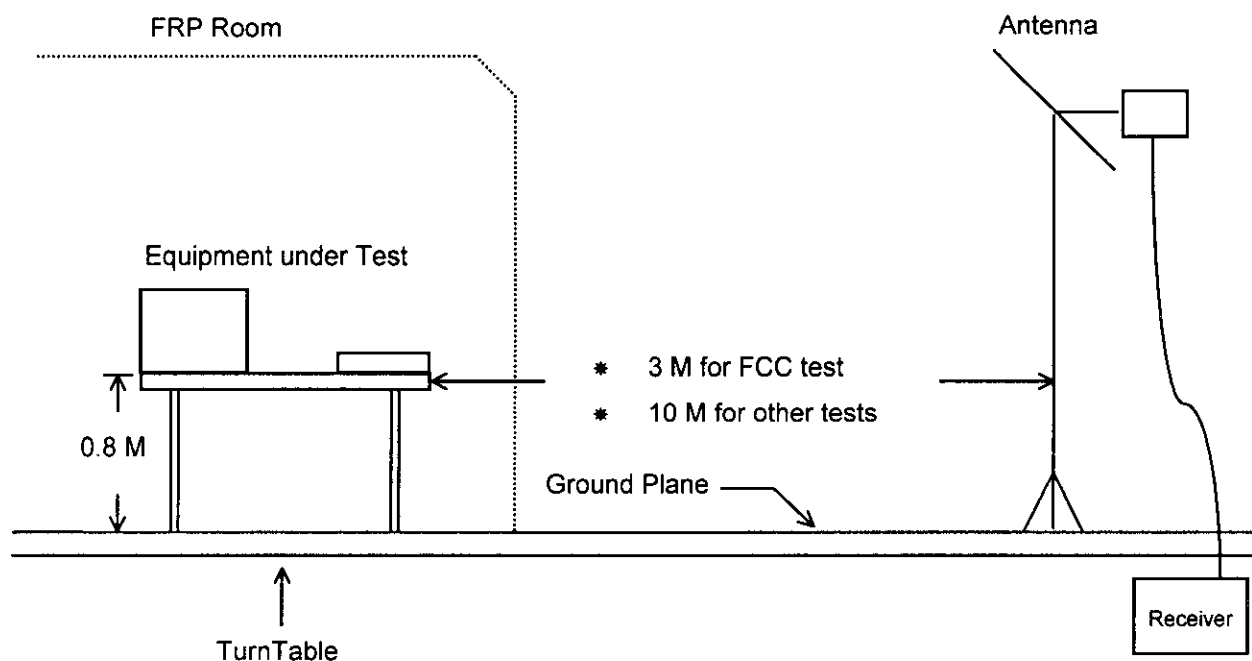

6.4. TEST RESULT OF RADIATED EMISSION

- Equipment meets the technical specifications of 15.109
- Frequency Range of Test : from 30 MHz to 1000 MHz
- Test Distance : 3 M
- Temperature : 29°C
- Relative Humidity :68% RH
- Test Date :MAY. 21, 1998
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Sample Calculation at 199.70MHz
Corrected Reading = 14.03+ 2.40+ 15.37= 31.80(dBuV/m)

The Radiated Emission test was passed at minimum margin

Vertical 47.90 MHz / 36.46dBuV

Antenna Height 1Meter , Turntable Degree 45°.

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin		
(MHz)	Polarity	Factor (dB/m)	Loss (dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)
47.90	V	1.97	1.18	33.31	40.00	100	36.46	66.53	-3.54
160.70	V	12.28	2.12	20.38	43.50	150	34.78	54.83	-8.72
167.20	V	12.59	2.18	21.02	43.50	150	35.79	61.59	-7.71
48.00	H	1.99	1.17	27.33	40.00	100	30.50	33.50	-9.50
178.90	H	12.99	2.29	15.29	43.50	150	30.57	33.77	-12.93
199.70	H	14.03	2.40	15.37	43.50	150	31.80	38.90	-11.70

Test Engineer :

Roxy Chou

ROXY CHOU

7. ANTENNA FACTOR AND CABLE LOSS

Frequency (Mhz)	Antenna Factor (dB)	Cable Loss (dB)
30	-2.20	0.80
35	-0.70	0.82
40	0.51	0.94
45	1.30	1.00
50	2.39	1.00
55	3.14	1.11
60	4.40	1.20
65	5.14	1.20
70	5.59	1.20
75	6.11	1.30
80	7.10	1.40
85	7.53	1.40
90	8.22	1.40
95	8.80	1.40
100	9.36	1.50
110	10.11	1.60
120	10.41	1.70
130	10.74	1.80
140	11.42	1.91
150	11.91	2.01
160	12.25	2.01
170	12.22	2.21
180	13.02	2.30
190	13.50	2.30
200	14.05	2.40
220	14.31	2.40
240	15.11	2.50
260	17.11	2.61
280	17.50	2.70
300	17.99	3.11
320	18.10	3.10
340	19.13	3.20
360	20.14	3.30
380	21.81	3.40
400	22.29	3.60
450	22.40	3.80
500	22.31	4.10
550	23.42	4.40
600	24.01	4.60
650	25.11	5.00
700	26.00	5.30
750	26.51	5.51
800	27.10	5.70
850	27.51	5.90
900	27.90	6.20
950	30.01	6.30
1000	29.00	6.40

※Remark: For frequency above 1000 MHz, we used low cable loss BNC cable to test.

8. LIST OF MEASURING INSTRUMENTS USED

INSTRUMENT	Manufacturer	Model No.	Serial No.	Characteristic	Calibration date	Remark
Spectrum monitor	R&S	EZM	894987/011	---	Apr. 13, 1998	C
Test Receiver	R&S	ESH3	893495/013	9 KHz - 30MHz	Apr. 13, 1998	C
LISN	EMCO	3825/2	9510-2484	50 ohm / 50 uH	Nov. 29, 1997	C
LISN	KYORITSU	KNW-407	8-1010-15	50 ohm / 50 uH	Nov. 10, 1997	C
EMI Filter	CORCOM	MRI-2030	N/A	480 VAC / 30 A	N/A	C
EMI Filter	CORCOM	MRI-2030	N/A	480 VAC / 30 A	N/A	C
Spectrum Analyzer (site 1)	HP	8568B	2928A04713	100Hz - 1500MHz	Jul. 19, 1997	R
Quasi-peak Adapter (site 1)	HP	85650A	2811A01285	9KHz -1 GHz	Jul. 19, 1997	R
RF Preselector (site 1)	HP	85685A	2926A00951	20Hz-1GHz	Aug. 12, 1997	R
Bilog Antenna (1)	CHASE	CBL6112A	2296	30 MHz -2000 MHz	Jul. 24, 1997	R
Half-wave dipole antenna	EMCO	3121C	8912-496	28M-1GHZ	Aug. 12, 1997	R
Turn Table	EMCO	1060-1.211	9507-1805	0 ~ 360 degree	N/A	R
Antenna Mast	EMCO	1051-1.2	9502-1868	1 m- 4 m	N/A	R

※ The column of Remark indicates that the instruments used for conduction ("C") or radiation