

FCC TEST REPORT

for

CISPR PUB. 22 Class B

Equipment : USB HUB

Model No. : PT-9001

FCC ID : H52PT-9001

Filing Type : Original Grant

Applicant : **PURETEK INDUSTRIAL CO., LTD.**
4F, NO. 12, LANE 235, PAO-CHIAO RD.,
HSINTIEN CITY, TAIPEI, TAIWAN, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

CERTIFICATE OF COMPLIANCE	3
1. General Description of Equipment under Test	4
1.1. Applicant	4
1.2. Manufacturer	4
1.3. Basic Description of Equipment under Test	4
1.4. Feature of Equipment under Test	4
2. Test Configuration of Equipment under Test	5
2.1. Test Manner	5
2.2. Description of Test System	5
2.3. Connection Diagram of Test System	7
3. Test Software	8
4. General Information of Test	9
4.1. Test Facility	9
4.2. Standard for Methods of Measurement	9
4.3. Test in Compliance with	9
4.4. Frequency Range Investigated	9
4.5. Test Distance	9
5. Test of Conducted Powerline	10
5.1. Major Measuring Instruments	10
5.2. Test Procedures	11
5.3. Typical Test Setup Layout of Conducted Powerline	12
5.4. Test Result of AC Powerline Conducted Emission	13
5.5. Photographs of Conducted Powerline Test Configuration	14
6. Test of Radiated Emission	16
6.1. Major Measuring Instruments	16
6.2. Test Procedures	17
6.3. Typical Test Setup Layout of Radiated Emission	18
6.4. Test Result of Radiated Emission	19
6.5. Photographs of Radiated Emission Test Configuration	20
7. Antenna Factor & Cable Loss	21
8. List of Measuring Equipment Used	22

CERTIFICATE OF COMPLIANCE

for

CISPR PUB. 22 Class B

Equipment : USB HUB

Model No. : PT-9001

FCC ID : H52PT-9001

Applicant : **PURETEK INDUSTRIAL CO., LTD.**
4F, NO. 12, LANE 235, PAO-CHIAO RD.,
HSINTIEN CITY, TAIPEI, TAIWAN, R.O.C.

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was ***passed* CISPR PUB. 22** both radiated and conducted emission class B limits. Testing was carried out on Oct. 15, 1999 at **SPORTON International Inc.** LAB. in Nei Hwu.

W. L. Huang
General Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

PURETEK INDUSTRIAL CO., LTD.

4F, NO. 12, LANE 235, PAO-CHIAO RD.,
HSINTIEN CITY, TAIPEI, TAIWAN, R.O.C.

1.2. Manufacturer

Same as 1.1.

1.3. Basic Description of Equipment under Test

Equipment : USB HUB
Model No. : PT-9001
FCC ID : H52PT-9001
Trade Name : PURETEK
USB Data Cable : Shielded, 1.5 m
Power Supply Type : From PC
Power Cord : N/A

1.4. Feature of Equipment under Test

- Full compliance with the USB specification Rev. 1.1
- Tiered star topology supporting up to 4 tiers and 127 devices, reliable transmission for 5 meters USB cable segment is excellent.
- Per port over current detection, protection and recovery.
- Plug and Play capability for fault or dummy USB port in directly inserted M.B.

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The SONY Monitor, PRIMAX PS/2 Mouse, DELL PS/2 Keyboard, WINIC USB Mouse, HP Printer, ACEEX Modem and EUT were connected to the FIC PC for EMI test.
- c. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 1000MHz.

2.2. Description of Test System

Support Unit 1. -- Personal Computer (FIC)

FCC ID	: N/A
Model No.	: P2L97
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0037
Data Cable	: Shielded, 360 degree via metal backshells
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. -- Monitor (SONY)

FCC ID	: AK8GDM17SE2T
Model No.	: GDM-17SE2T
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0013
Data Cable	: Shielded, 360 degree via metal backshells, 1.75m

Support Unit 3. -- PS/2 Mouse (PRIMAX)

FCC ID	: EMJMUJQ
Model No.	: MUS9J
Serial No.	: SP0045
Data Cable	: Non-shielded, 1.75m

Support Unit 4. -- PS/2 Keyboard (DELL)

FCC ID : GYUM90SK
Model No. : AT101W
Serial No. : SP0019
Data Cable : Shielded, 360 degree via metal backshells, 2.0m

Support Unit 5. -- USB Mouse (WINIC)

FCC ID : F4ZFDM-A50
Model No. : FDM-A50
Serial No. : SP0092
Data Cable : Non-shielded, 1.5m


Support Unit 6. -- Printer (HP)

FCC ID : DSI6XU2225
Model No. : 2225C
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0014
Data Cable : Shielded, 360 degree via metal backshells, 1.2m

Support Unit 7. -- Modem (ACEEX)

FCC ID : IFAXDM1414
Model No. : DM1414
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0015
Data Cable : Shielded, 360 degree via metal backshells, 1.2m

2.3. Connection Diagram of Test System

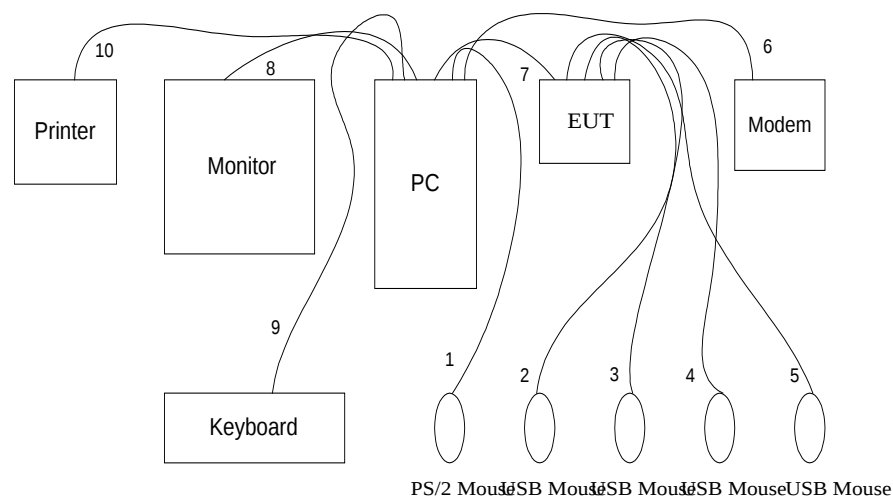

1. The I/O cable is connected from PC to the support unit 3.
2. The I/O cable is connected from EUT to the support unit 5.
3. The I/O cable is connected from EUT to the support unit 5.
4. The I/O cable is connected from EUT to the support unit 5.
5. The I/O cable is connected from EUT to the support unit 5.
6. The I/O cable is connected from PC to the support unit 7.
7. The I/O cable is connected from PC to the EUT.
8. The I/O cable is connected from PC to the support unit 2.
9. The I/O cable is connected from PC to the support unit 4.
10. The I/O cable is connected from PC to the support unit 6.

3. Test Software

An executive program, EMITEST.EXE under WIN 98, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem.
- f. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.

4. General Information of Test

4.1. Test Facility

This test was carried out by SPORTON International Inc.

Test Site Location : No. 3, Lane 238, Kang Lo Street, Nei Hwu District,
Taipei 11424, Taiwan, R.O.C.

TEL : 886-2-2631-9739

FAX : 886-2-2631-9740

4.2. Standard for Methods of Measurement

ANSI C63.4-1992

4.3. Test in Compliance with

CISPR PUB. 22 Class B

4.4. Frequency Range Investigated

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation : from 30 MHz to 1,000 MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 10 M.

5. Test of Conducted Powerline

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 5.3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


5.1. Major Measuring Instruments

● Test Receiver	(R&S ESH3)
Attenuation	0 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 KHz

5.2. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be retested one by one using the quasi-peak method and reported.

5.3. Typical Test Setup Layout of Conducted Powerline

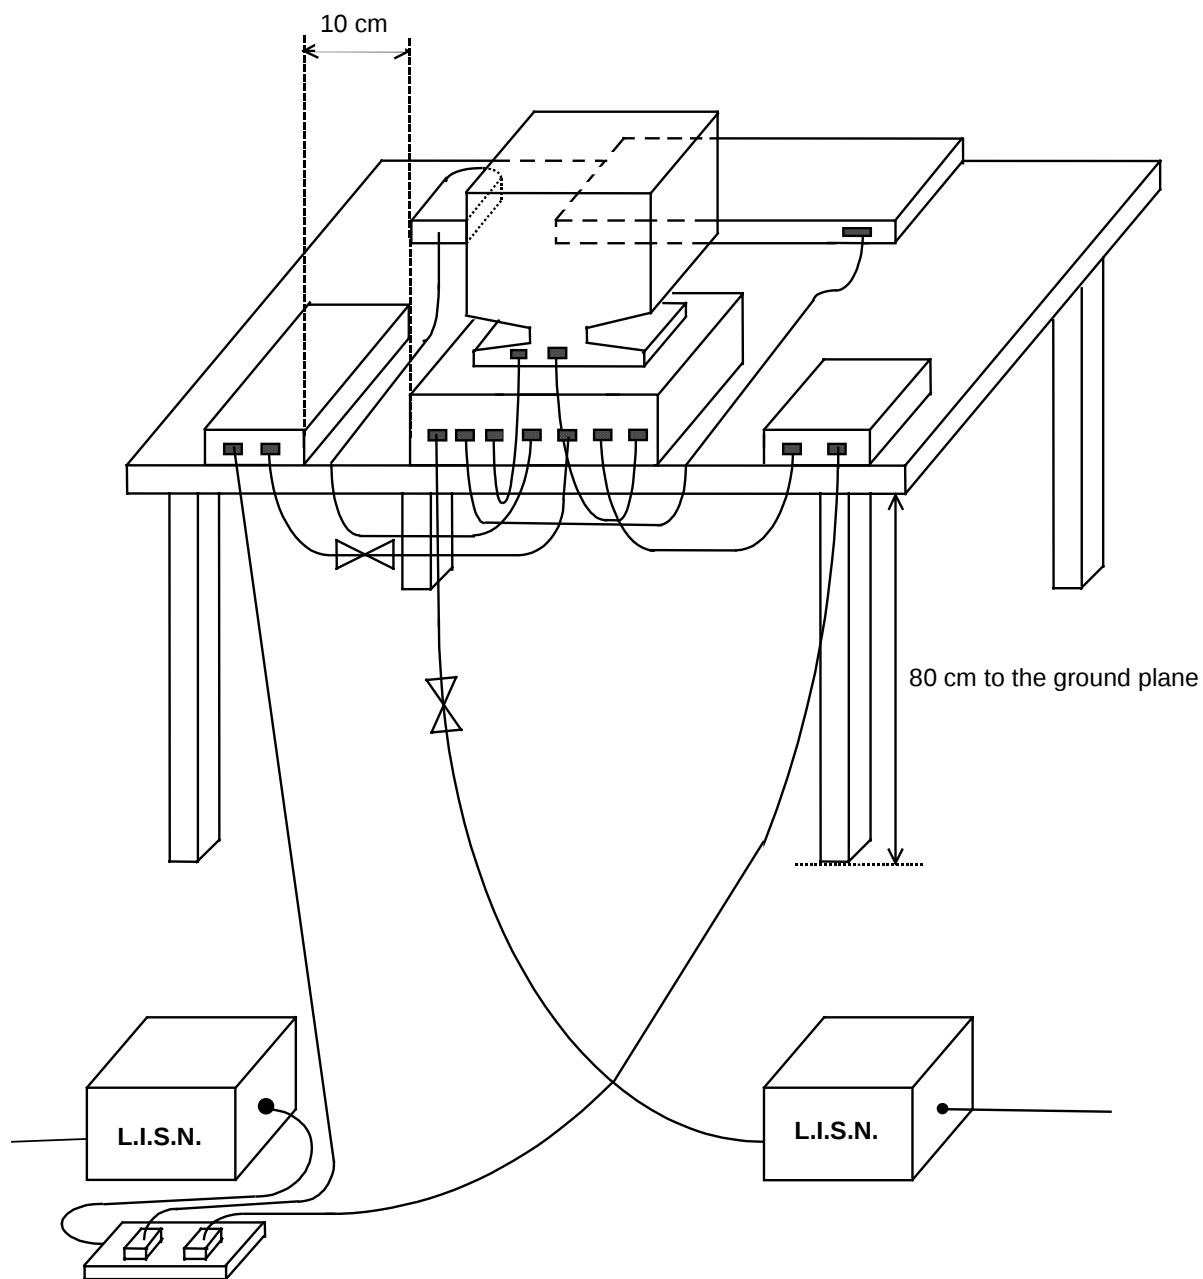

5.4. Test Result of AC Powerline Conducted Emission

- Frequency Range of Test : from 0.15 MHz to 30 MHz
- Temperature : 25°C
- Relative Humidity : 58 %
- Test Date : Oct. 15, 1999

The Conducted Emission test was passed at minimum margin

NEUTRAL 0.210 MHz / 48.00 dBuV.

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.200	L	48.20	25.60	257.04	19.05	63.61	53.61	1515.40	479.21	-15.4	-28.0
0.630	L	36.20	17.20	64.57	7.24	56.00	46.00	630.96	199.53	-19.8	-28.8
11.970	L	39.20	19.20	91.20	9.12	60.00	50.00	1000.00	316.23	-20.8	-30.8
0.210	N	48.00	25.30	251.19	18.41	63.21	53.21	1446.32	457.37	-15.2	-27.9
0.460	N	37.70	18.80	76.74	8.71	56.69	46.69	683.33	216.09	-19.0	-27.9
11.970	N	38.20	16.50	81.28	6.68	60.00	50.00	1000.00	316.23	-21.8	-33.5

Test Engineer : _____

LOUIS LIN

5.5. Photographs of Counducted Powerline Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW



SIDE VIEW



6. Test of Radiated Emission

Radiated emissions from 30 MHz to 1,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

6.1. Major Measuring Instruments

- RF Preselector (HP 85685A)
 - Attenuation 0 dB
 - RF Gain 25 dB
 - Signal Input 20 MHz to 1.5 GHz


- Spectrum Analyzer (HP 8568B)
 - Attenuation 0 dB
 - Start Frequency 30 MHz
 - Stop Frequency 1000 MHz
 - Resolution Bandwidth 1 MHz
 - Video Bandwidth 1 MHz
 - Signal Input 100 Hz to 1.5 GHz

- Quasi-Peak Adapter (HP 85650A)
 - Resolution Bandwidth 120 KHz
 - Frequency Band 30 MHz to 1 GHz
 - Quasi-Peak Detector ON for Quasi-Peak Mode
OFF for Peak Mode

6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. Typical Test Setup Layout of Radiated Emission

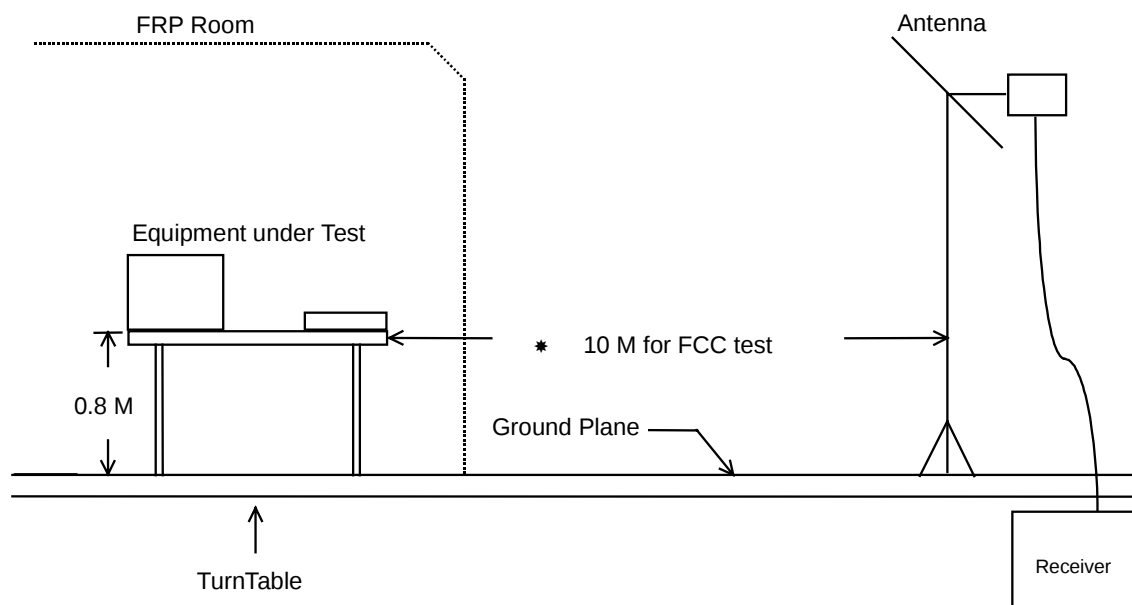

6.4. Test Result of Radiated Emission

- Frequency Range of Test : from 30 MHz to 1,000 MHz
- Test Distance : 10 M
- Temperature : 28°C
- Relative Humidity : 66 %
- Test Date : Oct. 14, 1999
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

120.100 MHz / 26.63 dBuV (VERTICAL) Antenna Height 4 Meter, Turntable Degree 88 °.

Frequency (MHz)	Polarity	Antenna Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV/m)	Level (uV/m)	Margin (dB)
					(dBuV/m)	(uV/m)			
96.000	H	9.94	1.70	13.70	30.00	31.62	25.34	18.49	-4.66
120.100	H	12.33	1.90	10.30	30.00	31.62	24.53	16.85	-5.47
192.046	H	9.51	2.00	15.10	30.00	31.62	26.61	21.40	-3.39
120.100	V	12.33	1.90	12.40	30.00	31.62	26.63	21.45	-3.37
200.000	V	9.35	2.00	12.70	30.00	31.62	24.05	15.94	-5.95
214.400	V	10.31	2.14	13.80	30.00	31.62	26.25	20.54	-3.75

Test Engineer : _____
LOUIS LIN

6.5. Photographs of Radiated Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW



7. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	17.2	0.8
35	16.2	0.9
40	13.0	0.9
45	10.5	1.0
50	7.0	1.0
55	6.2	1.1
60	5.3	1.0
65	5.2	1.2
70	5.2	1.2
75	5.9	1.3
80	6.8	1.4
85	7.9	1.5
90	9.0	1.8
95	9.8	1.7
100	10.6	1.7
110	11.5	1.9
120	12.3	1.9
130	10.9	1.9
140	10.5	1.8
150	10.5	1.8
160	9.6	1.8
170	9.6	2.0
180	9.7	2.0
190	9.5	2.0
200	9.4	2.0
220	10.7	2.2
240	12.0	2.3
260	12.8	2.5
280	13.0	2.6
300	13.3	2.8
320	13.8	2.8
340	14.3	2.9
360	14.7	3.0
380	15.1	3.1
400	15.5	3.2
450	16.7	3.6
500	17.8	3.4
550	19.2	4.2
600	19.0	3.7
650	18.7	4.5
700	18.5	4.2
750	18.5	4.7
800	16.8	3.9
850	17.0	4.6
900	19.0	4.3
950	19.9	4.3
1000	20.4	5.6

NHOP1

8. List of Measuring Equipment Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Test Receiver	R&S	ESH3	893495/013	9 KHz - 30 MHz	Apr. 19, 1999	Conduction
Spectrum Monitor	R&S	EZM	894987/011	N/A	Apr. 21, 1999	Conduction
LISN (for EUT)	KYORITSU	KNW-407	8-1010-15	50 ohm / 50 μ H	Nov. 17, 1998	Conduction
LISN (for support device)	EMCO	3810/2	9703-1838	50 ohm / 50 μ H	Aug. 30, 1999	Conduction
EMI Filter	CORCOM	MRI-2030	N/A	480VAC / 30A	N/A	Conduction
RF Preselector	HP	85685A	2926A00951	20Hz -1.5GHz	Apr. 19, 1999	Radiation
Spectrum Analyzer (site 1)	HP	8568B	2928A04713	100Hz – 1.5GHz	Apr. 19, 1999	Radiation
Quasi-peak Adapter (site 1)	HP	85650A	2811A01285	9KHz – 1GHz	Apr. 19, 1999	Radiation
Bilog Antenna (site 1)	CHASE	CBL6112A	2302	30MHz - 2GHz	Jan. 29, 1999	Radiation
Half-wave dipole antenna (site 1)	EMCO	3121C	8912-1285	20MHz - 1GHz	May. 18, 1999	Radiation
Turn Table	EMCO	1060-1.211	9507-1805	0 ~ 360 degree	N/A	Radiation
Antenna Mast	EMCO	2075	9806-2160	1 m - 4 m	N/A	Radiation