

EXHIBIT 3

Report Of Measurement

Includes sample calculations, block diagrams, photographs of test configurations and properly signed and dated report.

Illustration of bench

1. Connection

Tip of each wire harness with tag +B(ECU),+B(PWR), GND, MPX I/O 1, P/W OUT1, and P/W OUT2 connect to each connector +B(ECU),+B(PWR), GND, MPX I/O 1, P/W OUT1, and P/W OUT2 of bench.

2. Appearance of bench

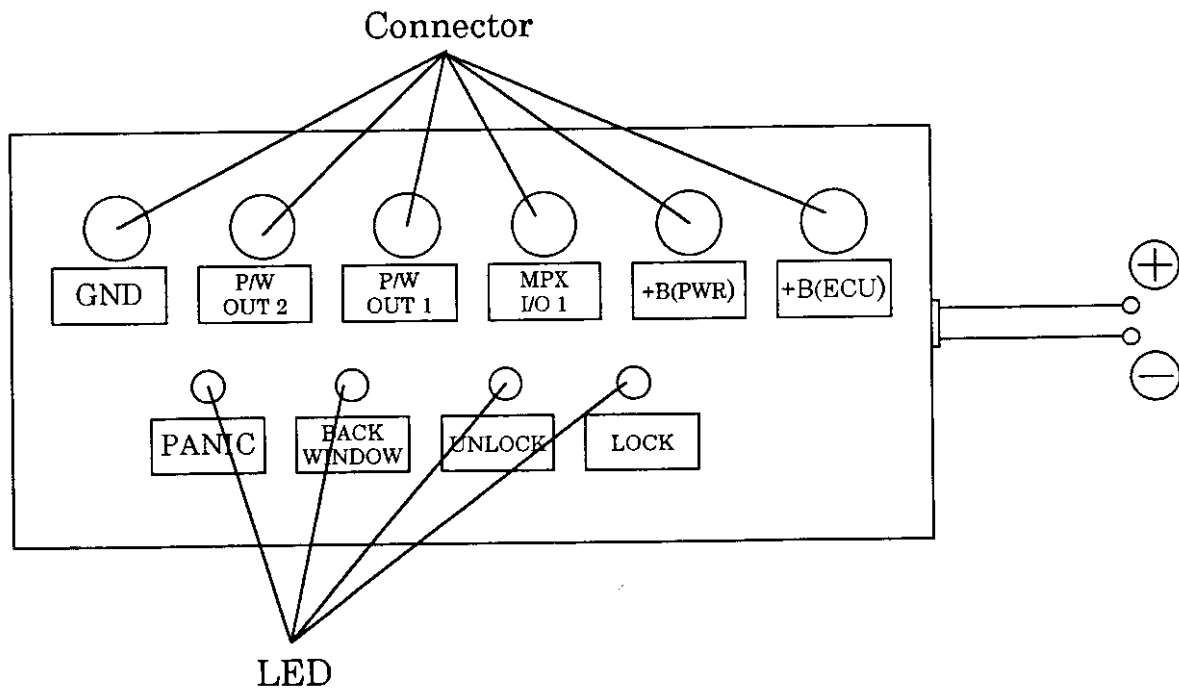
If you push Lock button of transmitter, LED of LOCK of bench blink.

If you push Unlock button of transmitter, LED of UNLOCK of bench blink.

If you push Panic button of transmitter, LED of PANIC of bench blink.

If you push Back-window open button of transmitter, LED of BACK WINDOW of bench blink.

3. Appearance of bench



TEST RESULT SUMMARY

FCC PART 15 SUBPART B Class B Limit

MANUFACTURER'S NAME	Denso Corporation
NAME OF EQUIPMENT	Remote Keyless Entry System (Receiver)
MODEL NUMBER	13BAE
MANUFACTURER'S ADDRESS	1-1 Showa-cho Kariya-shi, Aichi-ken, 448-8661, Japan
TEST REPORT NUMBER	W8092
TEST DATE	01 April 1998

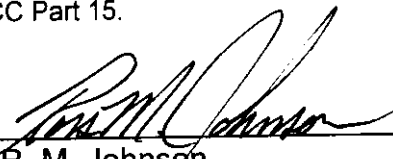
According to testing performed at TÜV Product Service Inc, the above-mentioned unit is in compliance with the electromagnetic compatibility requirements defined in FCC Part 15.


It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. Any modifications necessary for compliance made during testing on the above mentioned date(s) must be implemented in all production units for compliance to be maintained.

TÜV Product Service Inc, as an independent testing laboratory, declares that the equipment tested as specified above conforms to the requirements of FCC Part 15.

Date: 02 April 1998

Location: Taylors Falls MN
USA


R. M. Johnson
Test Engineer


J. T. Schneider
Site Manager

Not Transferable

EMC EMISSION - TEST REPORT

Test Report File No. : **W011809201** Date of issue: 02 April 1998

Model / Serial No. : **13BAE /**

Product Type : **Remote Keyless Entry System (Receiver)**

Applicant : **Denso Corporation**

Manufacturer : **Denso Corporation**

License holder : **Denso Corporation**

Address : **1-1 Showa-cho**
: **Kariya-shi, Aichi-ken, 448-8661, Japan**

Test Result : ☒ **Positive** ☐ **Negative**

Test Project Number :
Reference(s) : **W8092**

Total pages including
Appendices : **22**

TÜV Product Service Inc is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO/IEC Guide 25 and EN 45001.

TÜV Product Service Inc reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. TÜV Product Service Inc shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV Product Service Inc issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval. This report shall not be used by the client to claim product endorsement by NVLAP or any agency of the US government.

TÜV Product Service Inc and its professional staff hold government and professional organization certifications and are members of AAMI, ACIL, AEA, ANSI, IEEE, NVLAP, and VCCI

DIRECTORY - EMISSIONS

		Page(s)
A) Documentation		
Test report		<u>1 - 10</u>
Directory		<u>2</u>
Test Regulations		<u>3</u>
Deviation from standard/Summary		<u>10</u>
Test-setups (Photos)		<u>11 - 12</u>
Test-setup (drawing)		<u>Appendix A</u>
B) Test data		
Conducted emissions	10/150 kHz - 30 MHz	<u>5, 9</u>
Radiated emissions	10 kHz - 30 MHz	<u>5, 9</u>
Radiated emissions	30 MHz - 1000 MHz	<u>6, 9</u>
Interference power	30 MHz - 300 MHz	<u>6, 9</u>
Equivalent Radiated emissions	1 GHz - 18 GHz	<u>7, 9</u>
C) Appendix A		
Test Data Sheets and Test Setup Drawing(s)		<u>A2 - A5</u>
D) Appendix B		
Constructional Data Form		<u>B2</u>
Product Information Form(s)		<u>B3</u>
E) Appendix C		
Measurement Protocol		<u>C1 - C2</u>

EMISSIONS TEST REGULATIONS :

The emissions tests were performed according to following regulations:

- | | | |
|--|---|---|
| ☐ - EN 50081-1 / 1991 | ☐ - Group 1 | ☐ - Group 2 |
| ☐ - EN 55011 / 1991 | ☐ - Class A | ☐ - Class B |
| ☐ - EN 55013 / 1990 | ☐ - Household appliances and similar | |
| ☐ - EN 55014 / 1987 | ☐ - Portable tools | |
| | ☐ - Semiconductor devices | |
| ☐ - EN 55014 / A2:1990 | ☐ - Household appliances and similar | |
| ☐ - EN 55014 / 1993 | ☐ - Portable tools | |
| | ☐ - Semiconductor devices | |
| ☐ - EN 55015 / 1987 | | |
| ☐ - EN 55015 / A1:1990 | | |
| ☐ - EN 55015 / 1993 | ☐ - Class A | ☐ - Class B |
| ☐ - EN 55022 / 1987 | ☐ - Class A | ☐ - Class B |
| ☐ - EN 55022 / 1994 | | |
| ☐ - BS | ☐ - Class A | ☐ - Class B |
| ☐ - VCCI | ☐ - Class A | ☒ - Class B |
| ☒ - FCC Part 15, Subpart B | | |
| ☐ - AS 3548 (1992) | ☐ - Class A | ☐ - Class B |
| ☐ - CISPR 11 (1990) | ☐ - Group 1 | ☐ - Group 2 |
| | ☐ - Class A | ☐ - Class B |
| ☐ - CISPR 22 (1993) | ☐ - Class A | ☐ - Class B |

Environmental conditions in the lab:

	<u>Actual</u>
Temperature	: 15 °C
Relative Humidity	: 48 %
Atmospheric pressure	: 99.3 kPa
Power supply system	: 12 VDC

Sign Explanations:

- ☐ - not applicable
☒ - applicable

Emissions Test Conditions: CONDUCTED EMISSIONS (Interference Voltage)

The *CONDUCTED EMISSIONS (INTERFERENCE VOLTAGE)* measurements were performed at the following test location:

☒ - Test not applicable

- ☐ - Wild River Lab Large Test Site (Open Area Test Site)
- ☐ - Wild River Lab Small Test Site (Open Area Test Site)
- ☐ - Oakwood Lab (Open Area Test Site)
- ☐ - Wild River Lab Screen Room
- ☐ - New Brighton Lab Shielded Room

Test equipment used :

Model Number	Manufacturer	Description	Serial Number	Cal Date
--------------	--------------	-------------	---------------	----------

Emissions Test Conditions: RADIATED EMISSIONS (Magnetic Field)

The *RADIATED EMISSIONS (MAGNETIC FIELD)* measurements were performed at the following test location:

- ☐ - Wild River Lab Large Test Site (Open Area Test Site)
- ☐ - Wild River Lab Small Test Site (Open Area Test Site)
- ☐ - Oakwood Lab (Open Area Test Site)

at a test distance of :

- ☐ - 3 meters
- ☐ - 30 meters

☒ - Test not applicable

Test equipment used :

Model Number	Manufacturer	Description	Serial Number	Cal Date
--------------	--------------	-------------	---------------	----------

Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)

The *RADIATED EMISSIONS (ELECTRIC FIELD)* measurements, in the frequency range of 30 MHz-1000 MHz, were tested in a horizontal and vertical polarization at the following test location :

☐ - Test not applicable

- ☐ - Wild River Lab Large Test Site (Open Area Test Site)
☒ - Wild River Lab Small Test Site (Open Area Test Site)
☐ - Oakwood Lab (Open Area Test Site)

at a test distance of :

- ☒ - 3 meters
☐ - 10 meters
☐ - 30 meters

Test equipment used :

Model Number	Manufacturer	Description	Serial Number	Cal Date
■ - 3146	Electro-Mechanics (EMCO)	Log Periodic Antenna	9406-3865	6-97
■ - 3108	Electro-Mechanics (EMCO)	Biconical Antenna	2119	6-97
■ - 8566B	Hewlett-Packard	Spectrum Analyzer	2430A00930	4-97
■ - 85662A	Hewlett-Packard	Analyzer Display	2403A08134	4-97
■ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2521A01006	4-97
■ - ZHL-1042J	Mini-Circuits	Preamplifier	H07121493	4-97

Use of the calibrated equipment on this list ensures traceability to national and international standards.

Emissions Test Conditions: INTERFERENCE POWER

The *INTERFERENCE POWER* measurements were performed by using the absorbing clamp on the mains and interface cables in the frequency range 30 MHz - 300 MHz at the following test location :

☒ - Test not applicable

- ☐ - Wild River Lab Large Test Site (Open Area Test Site)
☐ - Wild River Lab Small Test Site (Open Area Test Site)
☐ - Oakwood Lab (Open Area Test Site)
☐ - Wild River Lab Screen Room
☐ - New Brighton Lab Shielded Room

Test equipment used :

Model Number	Manufacturer	Description	Serial Number	Cal Date
--------------	--------------	-------------	---------------	----------

Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)

The *EQUIVALENT RADIATED EMISSIONS* measurements in the frequency range 1 GHz - 2 GHz were performed in a horizontal and vertical polarization at the following test location :

- ☐ - Wild River Lab Large Test Site (Open Area Test Site)
- ☒ - Wild River Lab Small Test Site (Open Area Test Site)
- ☐ - Oakwood Lab (Open Area Test Site)
- ☐ - Wild River Lab Screen Room

at a test distance of:

- ☐ - 1 meters
- ☒ - 3 meters
- ☐ - 10 meters

☐ - Test not applicable

Test equipment used :

Model Number	Manufacturer	Description	Serial Number	Cal Date
■ - 3115	Electro-Mechanics (EMCO)	Horn Antenna	2483	10-97
■ - 8566B	Hewlett-Packard	Spectrum Analyzer	2430A00930	4-97
■ - 85662A	Hewlett-Packard	Analyzer Display	2403A08134	4-97
■ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2521A01006	4-97
■ - ZHL-1042J	Mini-Circuits	Preamplifier	H081396-16	4-97

Use of the calibrated equipment on this list ensures traceability to national and international standards.

Equipment Under Test (EUT) Test Operation Mode - Emission tests :

The device under test was operated under the following conditions during emissions testing:

- ☐ - Standby
- ☐ - Test program (H - Pattern)
- ☐ - Test program (color bar)
- ☐ - Test program (customer specific)
- ☐ - Practice operation
- ☐ - Normal Operating Mode
- ☒ - Checked in lock, unlock, window and panic modes from associated transmitter.

Configuration of the device under test:

- ☐ - See Constructional Data Form in Appendix B - Page B2
- ☒ - See Product Information Form in Appendix B - beginning on Page B3

The following peripheral devices and interface cables were connected during the measurement:

- | | |
|---|----------------|
| ☐ - _____ | Type : _____ |
| ☐ - _____ | Type : _____ |
| ☐ - _____ | Type : _____ |
| ☐ - _____ | Type : _____ |
| ☐ - _____ | Type : _____ |
| ☐ - _____ | Type : _____ |
| ☐ - _____ | Type : _____ |
| ☐ - _____ | Type : _____ |
| ☐ - unshielded power cable | |
| ☒ - unshielded cables | |
| ☐ - shielded cables | MPS.No.: _____ |
| ☐ - customer specific cables | |
| ☐ - _____ | |
| ☐ - _____ | |

Emission Test Results:**Conducted emissions 10/150 kHz - 30 MHz**

The requirements are ☐ - MET ☐ - NOT MET

Minimum limit margin _____ dB at _____ kHz

Maximum limit exceeding _____ dB at _____ MHz

Remarks: No connection to AC mains.

Radiated emissions (magnetic field) 10 kHz - 30 MHz

The requirements are ☐ - MET ☐ - NOT MET

Minimum limit margin _____ dB at _____ MHz

Maximum limit exceeding _____ dB at _____ MHz

Remarks: _____

Radiated emissions (electric field) 30 MHz - 1000 MHz

The requirements are ☒ - MET ☐ - NOT MET

Minimum limit margin for fundamental _____ >10 dB at _____ MHz

Maximum limit exceeding _____ dB at _____ MHz

Remarks: No signals detected within 10 dB of the limit.

Interference Power at the mains and interface cables 30 MHz - 300 MHz

The requirements are ☐ - MET ☐ - NOT MET

Minimum limit margin _____ dB at _____ MHz

Maximum limit exceeding _____ dB at _____ MHz

Remarks: _____

Equivalent Radiated emissions 1 GHz - 2 GHz

The requirements are ☒ - MET ☐ - NOT MET

Minimum limit margin _____ >10 dB at _____ MHz

Maximum limit exceeding _____ dB at _____ MHz

Remarks: No signals detected within 10 dB of the limit.

DEVIATIONS FROM STANDARD:

None.

GENERAL REMARKS:

The receiver could only be coerhed by using the associated coded transmitter.

SUMMARY:

The requirements according to the technical regulations are

☒ - met

☐ - not met.

The device under test does

☒ - fulfill the general approval requirements mentioned on page 3.

☐ - not fulfill the general approval requirements mentioned on page 3.

Testing Start Date: 01 April 1998

Testing End Date: 01 April 1998

- TÜV PRODUCT SERVICE INC -

Joel T. Schneider
J. T. Schneider
Site Manager

Tested By:
R. M. Johnson

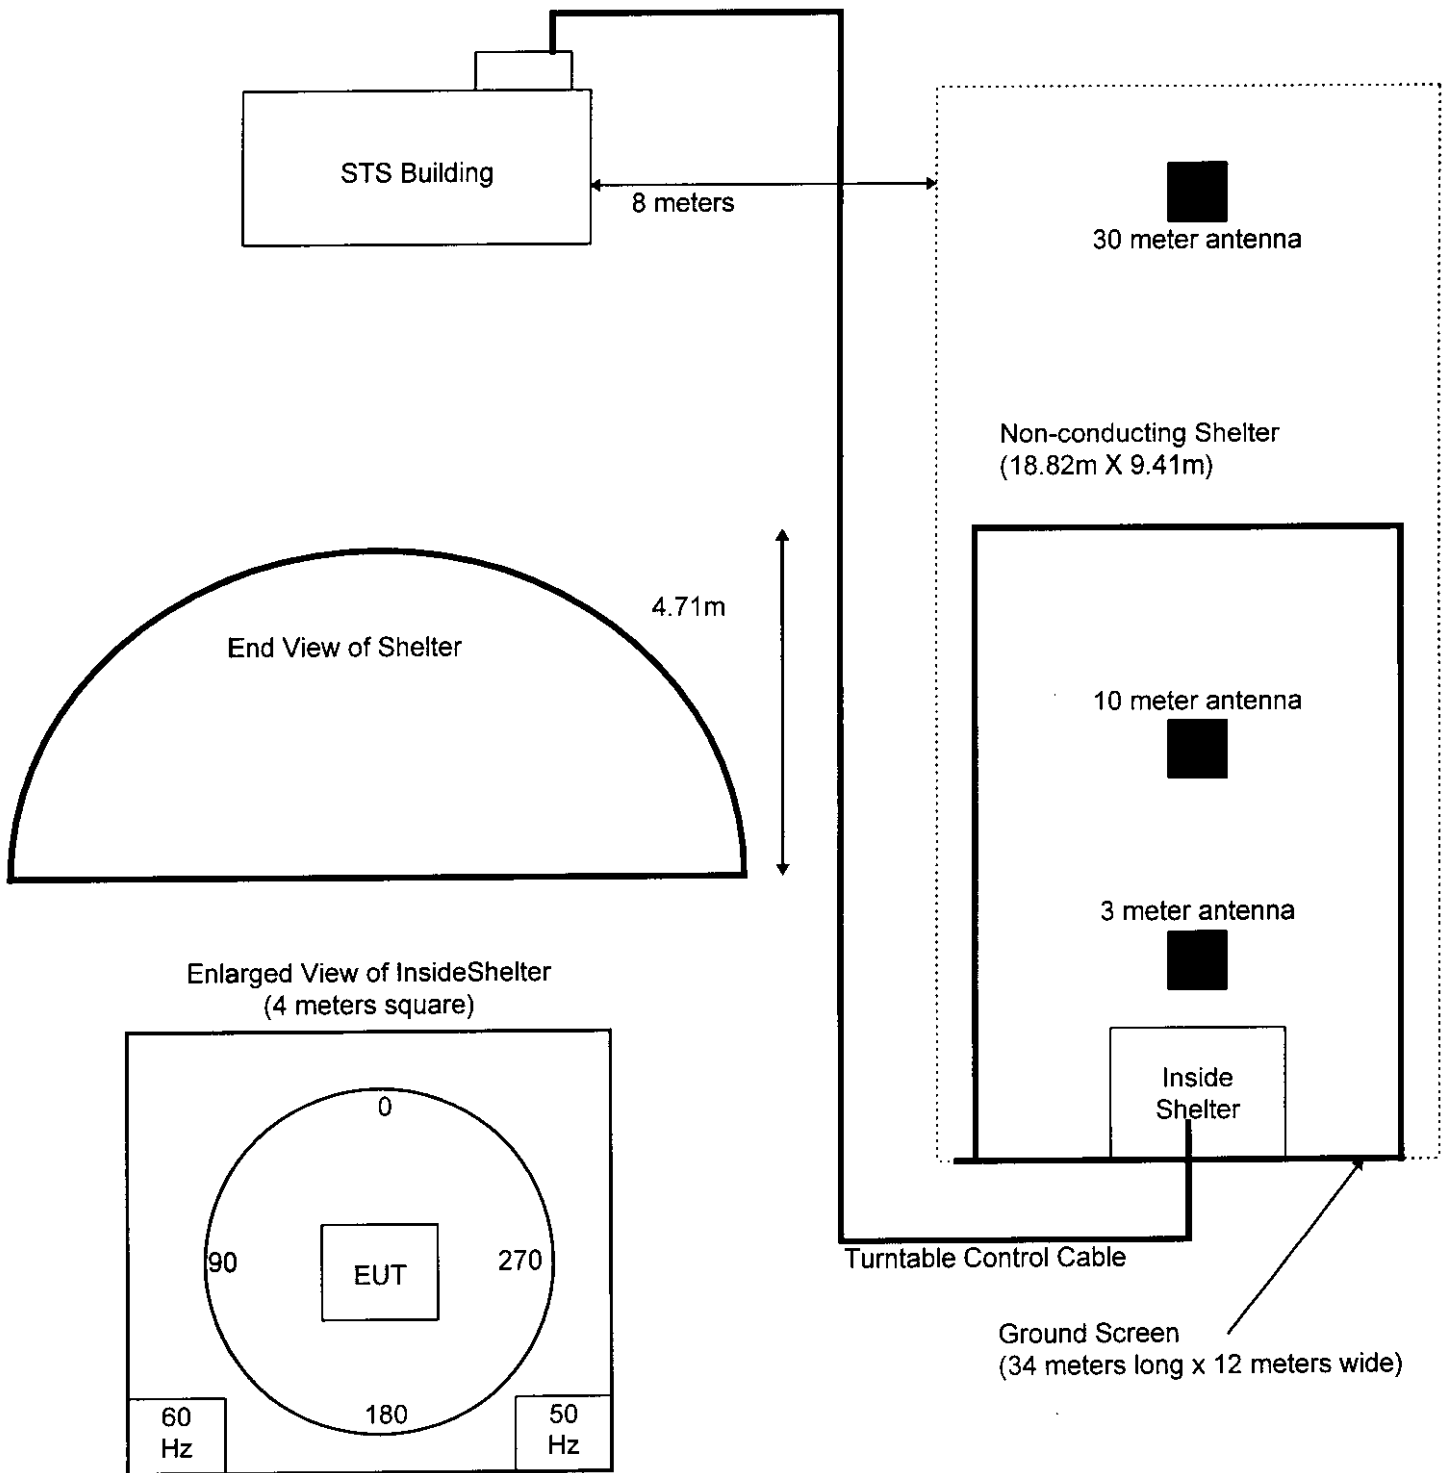
Test-setup photo(s):
Conducted emission 10/150 kHz - 30 MHz

Not Applicable

Appendix A

Test Data Sheets
and
Test Setup Drawing(s)

TEST SETUP FOR EMISSIONS TESTING

WILD RIVER LAB
Small Test Site (STS)

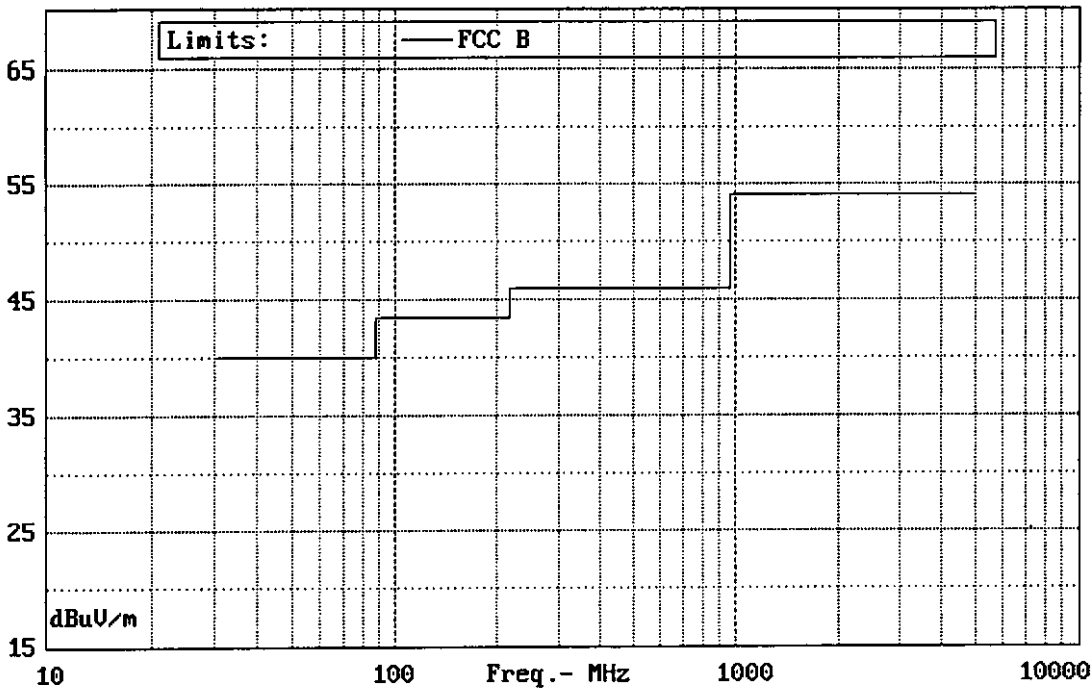
Turntable is 1.2 meters in diameter

File No. W011809201, Page A2 of A5

REPORT #W8092
RUN 1

TÜV PRODUCT SERVICE
RADIATED EMISSIONS AT 3 METERS
DENSO REMOTE KEYLESS ENTRY SYSTEM
MODEL (13BAE)

04/01/98



T U V P R O D U C T S E R V I C E

RADIATED EMISSIONS

Small Test Site
3 Meter Antenna Distance
Equipment Under Test:
DENSO
REMOTE KEYLESS ENTRY SYSTEM
Notes: MODEL (13BAE)

Report W8092 Run 1
Date 04/01/98 Page 1
Engineer _____
Tech: RMJ _____
Requester _____

Frequency MHz	Level dBuV	Factor dB	Cable dB	Final dBuV/m	Az deg	Polar\ Height	Delta FCC B	Delta
------------------	---------------	--------------	-------------	-----------------	-----------	------------------	----------------	-------

0 DEGREES VERTICAL 1 METER HIGH.

NO EMISSIONS FOUND FROM 30 - 200MHZ HORIZONTAL OR VERTICAL AT ALL AZIMUTHS.

NO EMISSIONS FOUND FROM 200 - 1000MHZ HORIZONTAL OR VERTICAL AT ALL AZIMUTHS.

NO SIGNIFICANT EMISSIONS FOUND FROM 1 - 2GHZ (H) OR (V), AT ALL AZIMUTHS.

T U V P R O D U C T S E R V I C E

RADIATED EMISSIONS

Small Test Site
3 Meter Antenna Distance
Equipment Under Test:
DENSO
REMOTE KEYLESS ENTRY SYSTEM
Notes: MODEL (13BAE)

Figure _____

Report W8092 Run 1
Date 04/01/98 Page 2
Engineer _____
Tech: RMJ _____
Requester _____

Measurement Summary

Frequency	-----	Final	-----	Azimuth	Polar\	Delta	Delta
MHz		dBuV/m	uV/m	deg	Height	FCC B	

Minimum Passing Margin for FCC B is 99 dB at 0 MHz

File W8092 Run 1

FCC ID: HYQ13BAE



Appendix B

Constructional Data Form
and
Product Information Form(s)

FCC ID: HYQ13BAE



Constructional Data Form

Not Applicable

2. Technical description of the system2.1. Type number

- Receiver : 13BAE

2.2. Specifications of receiver

- Nominal Frequency : 314.35 MHz
- Microcomputer clock Frequency : 7.98 MHz
- Type of receiving system : Super-regenerative
- Power Supply
 - Nominal Supply Voltage : 12 VDC(vehicle battery)
- Nominal Input Impedance : 50 Ω
- Antenna : Built-in type (Fixed)

Appendix C

MEASUREMENT PROTOCOL FOR FCC

GENERAL INFORMATION

Measurement Uncertainty

The test system for conducted emissions is defined as the LISN, tuned receiver or spectrum analyzer, and coaxial cable. The test system for radiated emissions is defined as the antenna, the pre-amplifier, the spectrum analyzer and the coaxial cable. These test systems have a measurement uncertainty of ± 4.5 dB. The equipment comprising the test systems are calibrated on an annual basis.

Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into its characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

CONDUCTED EMISSIONS

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

RADIATED EMISSIONS

The final level, expressed in dB μ V/m, is arrived at by taking the reading from the spectrum analyzer (Level dB μ V) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has the FCC limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets in Attachment B. The amplifier gain is automatically accounted for by using an analyzer offset.

Example:

Frequency (MHz)	Level (dB μ V)	+	Factor & Cable (dB)	=	Final (dB μ V/m)	-	FCC B Limit (dB μ V/m)	=	Delta FCC B (dB)
32.21	13.9	+	16.3	=	30.2	-	40.0	=	-9.8

DETAILS OF TEST PROCEDURES**General Standard Information**

The test methods used comply with ANSI C63.4-1992 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

Conducted Emissions

Conducted emissions on the 60 Hz power interface of the EUT are measured in the frequency range of 450 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50 Ω /50 μ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeters above the floor and is positioned 40 centimeters from the vertical ground plane (wall) of the screen room. In some cases, a pre-scan using a spectrum analyzer is initially performed on the units comprising the system under test to locate the highest emissions. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver or spectrum analyzer with quasi-peak and average detection and recorded on the data sheets.

Radiated Emissions

Radiated emissions from the EUT are measured in the frequency range of 30 to 1000 MHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection and measurements above 1000 MHz are made with a 1 MHz/6 dB bandwidth and peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees. Intentional radiators are rotated through three orthogonal axes to determine the attitude that maximizes the emissions.

Test-setup photo(s):
Radiated emission 30 MHz - 2000 MHz

