

## FCC/IC TEST REPORT

Test report No.: EMC- FCC- R0166  
FCC ID: IFHFLASH8  
IC: 3420A-FLASH8  
Type of equipment: 2.4GHz Radio Control System  
Basic Model Name: FLASH8  
Applicant: Hitec RCD Inc.  
Max.RF Output Power: 12.13 dBm  
FCC Rule Part(s): FCC Part 15 Subpart C 15.247  
IC Rule: RSS-210, RSS-GEN  
Frequency Range: 2 409.2 MHz ~ 2 474.0 MHz / 2 409.0 MHz ~2 480.0 MHz  
Test result: Complied

The above equipment was tested by EMC compliance Testing Laboratory for compliance with the requirements of FCC Rules and Regulations.


The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of receipt: 2014. 02. 24

Date of test: 2014. 05. 20 ~ 05. 22

Issued date: 2014. 05. 23

Tested by:



AHN, BYUNG WOO

Approved by:



YOO, SEONG YEONG

## [ Contents ]

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>1. Client information.....</b>                           | <b>3</b>  |
| <b>2. Laboratory information .....</b>                      | <b>4</b>  |
| <b>3. Description of E.U.T.....</b>                         | <b>5</b>  |
| 3.1 Basic description .....                                 | 5         |
| 3.2 General description .....                               | 5         |
| 3.3 Test frequency .....                                    | 6         |
| 3.4 Test Voltage .....                                      | 6         |
| <b>4. Summary of test results.....</b>                      | <b>7</b>  |
| 4.1 Standards & results .....                               | 7         |
| 4.2 Uncertainty.....                                        | 7         |
| <b>5. Test results .....</b>                                | <b>8</b>  |
| 5.1 Antenna Requirement .....                               | 8         |
| 5.2 Maximum Peak Output Power .....                         | 9         |
| 5.3 Carrier Frequency Separation .....                      | 14        |
| 5.4 20 dB Channel Bandwidth .....                           | 19        |
| 5.5 Number of Hopping Channels .....                        | 27        |
| 5.6 Time of Occupancy(Dwell Time) .....                     | 32        |
| 5.7 Spurious Emission, Band edge, and Restricted bands..... | 37        |
| <b>6. Test equipment used for test .....</b>                | <b>56</b> |

## 1. Client information

**Applicant:** Hitec RCD Inc.  
**Address:** 12115 Paine Street, Poway, California, 92064 USA  
**Telephone number:** 858-748-6948  
**Facsimile number:** 858-748-1767  
**Contact person:** Tony Ohm / [tonyo@hitecrd.com](mailto:tonyo@hitecrd.com)

**Manufacturer:** Hitec RCD PHILIPPINES, INC.  
**Address:** Lot 6 and 8 Blk. 24, Phase 4 CEPZ, Rosario, Cavite, Philippines

## 2. Laboratory information

### Address

#### **EMC compliance Ltd.**

65, Sinwon-ro, Yeongtong-gu, Suwon- si, Gyeonggi-do, 443-390, Korea  
Telephone Number: 82-31-336-9919 Facsimile Number: 82-505-299-8311

### Certificate

KOLAS No.: 231  
FCC Site Registration No.: 687132  
VCCI Site Registration No.: R-3327, G-198, C-3706, T-1849  
IC Site Registration No.:8035A-2

### SITE MAP



#### **EMC compliance Ltd.**

65, Sinwon-ro, Yeongtong-gu, Suwon- si, Gyeonggi-do, 443-390, Korea  
82-31-336-9919 (Main) 82-505-299-8311 (Fax)

### 3. Description of E.U.T.

#### 3.1 Basic description

|                         |                                                                 |
|-------------------------|-----------------------------------------------------------------|
| Applicant:              | Hitec RCD Inc.                                                  |
| Address of Applicant    | 12115 Paine Street, Poway, California, 92064 USA                |
| Manufacturer            | Hitec RCD PHILIPPINES, INC.                                     |
| Address of Manufacturer | Lot 6 and 8 Blk. 24, Phase 4 CEPZ, Rosario, Cavite, Philippines |
| Type of equipment       | 2.4GHz Radio Control System                                     |
| Basic Model             | FLASH8                                                          |
| Serial number           | Proto Type                                                      |

#### 3.2 General description

|                    |                                                                                      |
|--------------------|--------------------------------------------------------------------------------------|
| Frequency Range    | 2 409.2 MHz ~ 2 474.0 MHz / 2 409.0 MHz ~2 480.0 MHz                                 |
| Type of Modulation | Modulation technologies: FHSS<br>Modulation : Opti-Mini(21ms), Opti-Mini(7ms), S.L.T |
| Number of Channels | 121 channels , 75 channels                                                           |
| Type of Antenna    | Dipole                                                                               |
| Antenna Gain       | 1.88 dBi                                                                             |
| Transmit Power     | 12.13 dBm                                                                            |
| Power supply       | DC 6.4 V*                                                                            |

\* Declared by the applicant.

### 3.3 Test frequency

\* Opti-Mini(21ms), Opti-Mini(7ms)

|                  | Frequency   |
|------------------|-------------|
| Low frequency    | 2 409.2 MHz |
| Middle frequency | 2 441.6 MHz |
| High frequency   | 2 474.0 MHz |

\* S.L.T

|                  | Frequency   |
|------------------|-------------|
| Low frequency    | 2 409.0 MHz |
| Middle frequency | 2 439.0 MHz |
| High frequency   | 2 480.0 MHz |

### 3.4 Test Voltage

| mode             | Voltage  |
|------------------|----------|
| Norminal voltage | DC 6.4 V |

#### ※ 15.247 Requirements for Frequency Hopping System transmitter

- This Frequency Hopping System has been tested by a Frequency Hopping System Qualification Lab, and we confirm the following:
  - 1) This system is hopping pseudo-randomly.
  - 2) Each frequency is used equally on the average by each transmitter.
  - 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
  - 4) The receiver shifts frequencies in synchronization with the transmitted signals.
- 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
- 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

## 4. Summary of test results

### 4.1 Standards & results

| FCC Rule                                                                   | IC Rule                                          | Parameter                                       | Report Section | Test Result |
|----------------------------------------------------------------------------|--------------------------------------------------|-------------------------------------------------|----------------|-------------|
| 15.203,<br>15.247(b)(4)                                                    | RSS-GEN, 7.1.2                                   | Antenna Requirement                             | 5.1            | C           |
| 15.247(b)(1), (4)                                                          | RSS-210, A8.4(2)                                 | Maximum Peak Output Power                       | 5.2            | C           |
| 15.247(a)(1)                                                               | RSS-210, A8.1(b)                                 | Carrier Frequency Separation                    | 5.3            | C           |
| 15.247(a)(1)                                                               | RSS-210, A8.1(a)                                 | 20dB Channel Bandwidth                          | 5.4            | C           |
| -                                                                          | RSS-210, A1.1                                    | Occupied Bandwidth                              | 5.4            | C           |
| 15.247(a)(iii)<br>15.247(b)(1)                                             | RSS-210, A8.1(d)                                 | Number of Hopping Channel                       | 5.5            | C           |
| 15.247(a)(iii)                                                             | RSS-210, A8.1(d)                                 | Time of Occupancy(Dwell Time)                   | 5.6            | C           |
| 15.247(d),<br>15.205(a),<br>15.209(a)                                      | RSS-210, A8.5<br>RSS-210, A2.9<br>RSS-GEN, 7.2.3 | Spurious Emission, BandEdge,<br>Restricted Band | 5.7            | C           |
| 15.207(a)                                                                  | RSS-GEN, 7.2.4                                   | Conducted Emissions                             | -              | N/A         |
| Note: C=complies<br>NC= Not complies<br>NT=Not tested<br>NA=Not Applicable |                                                  |                                                 |                |             |

\* The method of measurement used to test this DSS device is FCC Public Notice DA 00-705

\* The general test methods used to test this device is ANSI C63.4 2003 (or 2009, or ANSI C63.10 2009)

### 4.2 Uncertainty

| Measurement Item             | Expanded Uncertainty<br>$U = KUc$ ( $K = 2$ ) |                      |
|------------------------------|-----------------------------------------------|----------------------|
| Conducted RF power           | $\pm 1.36$ dB                                 |                      |
| Occupied Bandwidth           | $\pm 2.54$ kHz                                |                      |
| Conducted Spurious Emissions | $\pm 1.52$ dB                                 |                      |
| Radiated Spurious Emissions  | 30 MHz ~ 300 MHz:                             | + 4.86 dB, - 4.88 dB |
|                              | 300 MHz ~ 1 000 MHz:                          | + 4.98 dB, - 4.99 dB |
|                              | 1 GHz ~ 6 GHz:                                | + 6.19 dB, - 6.20 dB |
|                              | 6 GHz ~ 18 GHz:                               | + 6.41 dB, - 6.53 dB |

## 5. Test results

### 5.1 Antenna Requirement

#### 5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 5.1.2 Result

##### -Complied

The transmitter has an Dipole of antenna. The directional gain of the antenna is 1.88 dBi.

## 5.2 Maximum Peak Output Power

### 5.2.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.2.2 Measurement Procedure

The method of measurement used to test this DSS device is FCC Public Notice DA 00-705.

1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable.
3. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via UART interface or Bluetooth tester and make sure the spectrum analyzer is operated in its linear range.
4. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  $RBW > \text{the } 20 \text{ dB bandwidth of the emission being measured}$   $VBW \geq RBW$   
Sweep = auto Detector function = peak Trace = max hold
5. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
6. Repeat above procedures until all frequencies measured were complete.

### 5.2.3 Test Result

- Complied

\* Opti-Mini(21ms)

| Channel | Frequency (MHz) | Result (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------|-------------|-------------|
| Low     | 2 409.2         | 12.02        | 30.00       | 17.98       |
| Middle  | 2 441.6         | 10.78        | 30.00       | 19.22       |
| High    | 2 474.0         | 9.33         | 30.00       | 20.67       |

\* Opti-Mini(7ms)

| Channel | Frequency (MHz) | Result (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------|-------------|-------------|
| Low     | 2 409.2         | 12.13        | 30.00       | 17.87       |
| Middle  | 2 441.6         | 10.78        | 30.00       | 19.22       |
| High    | 2 474.0         | 9.11         | 30.00       | 20.89       |

\* S.L.T

| Channel | Frequency (MHz) | Result (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------|-------------|-------------|
| Low     | 2 409.0         | 12.11        | 30.00       | 17.89       |
| Middle  | 2 439.0         | 10.82        | 30.00       | 19.18       |
| High    | 2 480.0         | -5.04        | 30.00       | 35.04       |

NOTE:


1. Since the directional gain of the integral antenna declared by the manufacturer ( $G_{ANT} = 1.88 \text{ dBi}$ ) does not exceed 6.0 dBi, there was no need to reduce the output power.
2. We took the insertion loss of the cable loss into consideration within the measuring instrument.

## 5.2.4 Test Plot


Figure 1. Plot of the Maximum Peak Output Power (Conducted)

\* Opti-Mini(21ms)


Lowest Channel  
(2 409.2 MHz)

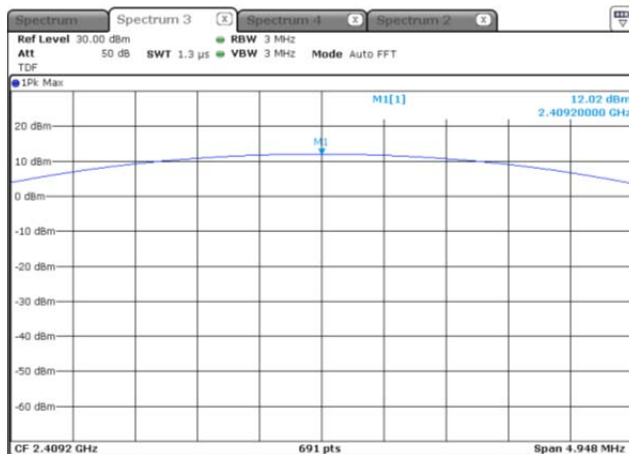

Middle Channel  
(2 441.6 MHz)

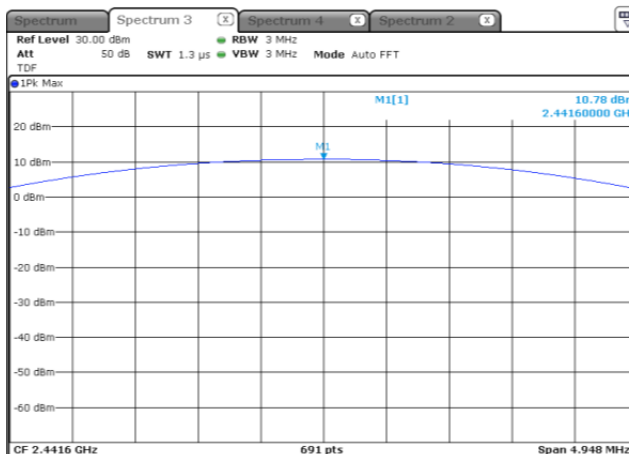


Highest Channel  
(2 474.0 MHz)

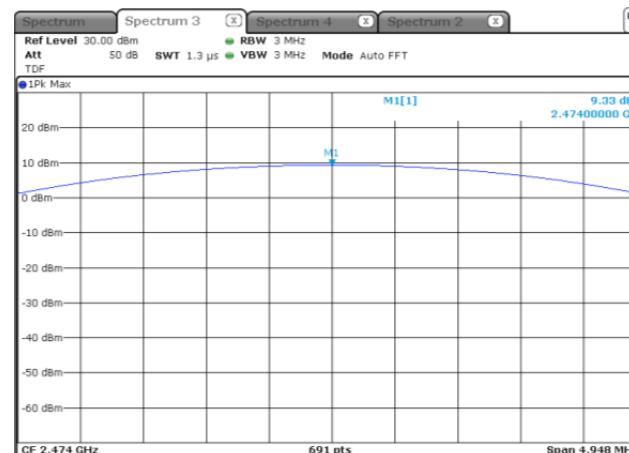


**\* Opti-Mini(7ms)**


Lowest Channel  
(2 409.2 MHz)

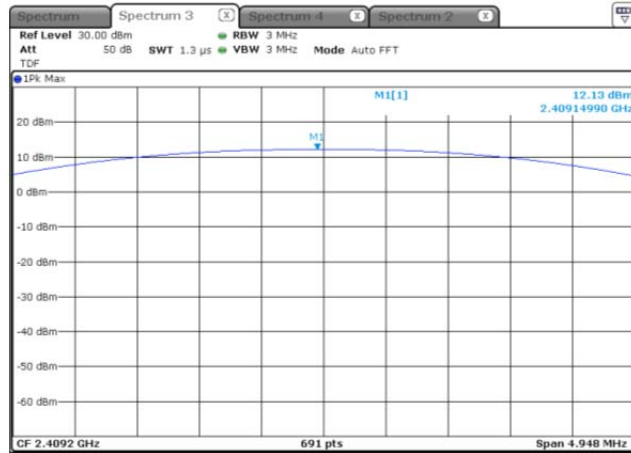

Middle Channel  
(2 441.6 MHz)

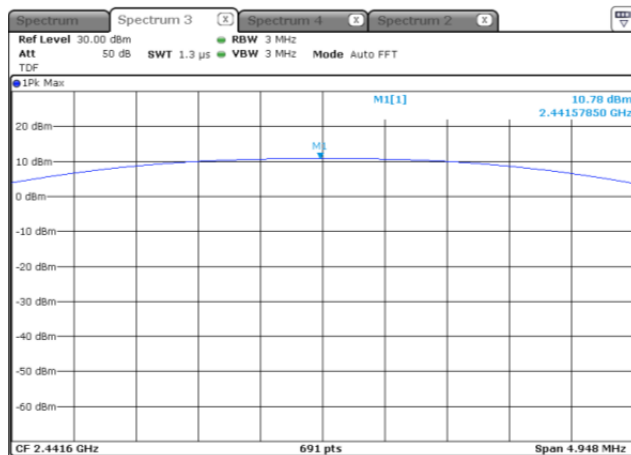


Highest Channel  
(2 474.0 MHz)

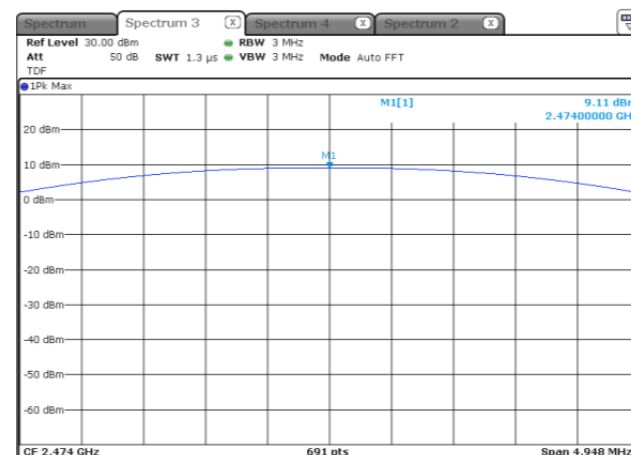


**\* S.L.T**


Lowest Channel  
(2 409.0 MHz)

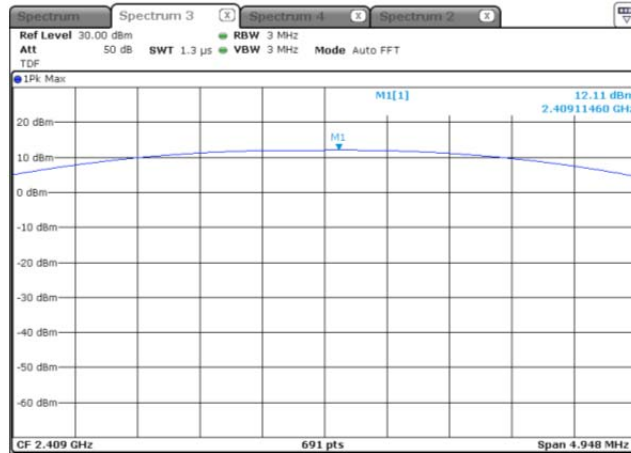

Middle Channel  
(2 439.0 MHz)

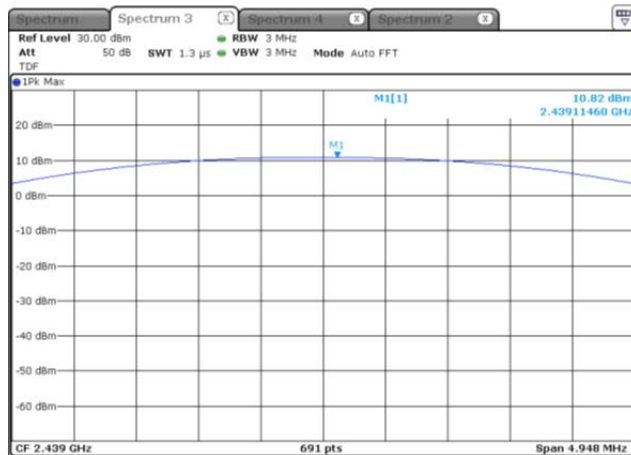

Highest Channel  
(2 480.0 MHz)

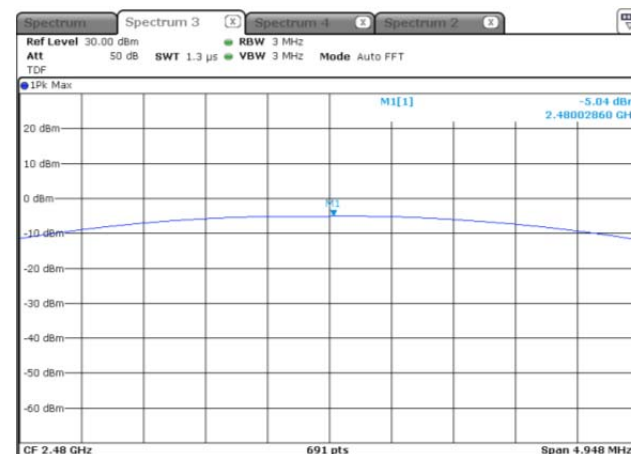

## 5.3 Carrier Frequency Separation

### 5.3.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

### 5.3.2 Measurement Procedure

The method of measurement used to test this DSS device is FCC Public Notice DA 00-705.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable and attenuator.
3. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via UART interface or Bluetooth tester.
4. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW)  $\geq 1\%$  of the span Video (or Average) Bandwidth (VBW)  $\geq$  RBW Sweep = auto Detector function = peak Trace = max hold
5. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
6. Repeat above procedures until all frequencies measured were complete.

### 5.3.3 Test Result

- Complied

\* Opti-Mini(21ms)

| Channel | Carrier frequency separation (MHz) | Limit                                              |
|---------|------------------------------------|----------------------------------------------------|
| Middle  | 1.802                              | $\geq 25$ kHz or two-thirds of the 20 dB bandwidth |

\* Opti-Mini(7ms)

| Channel | Carrier frequency separation (MHz) | Limit                                              |
|---------|------------------------------------|----------------------------------------------------|
| Middle  | 1.804                              | $\geq 25$ kHz or two-thirds of the 20 dB bandwidth |

\* S.L.T

| Channel | Carrier frequency separation (MHz) | Limit                                              |
|---------|------------------------------------|----------------------------------------------------|
| Middle  | 2.006                              | $\geq 25$ kHz or two-thirds of the 20 dB bandwidth |

NOTE1: We took the insertion loss of the cable loss into consideration within the measuring instrument.


NOTE2: It is all separation difference due to choosing 21 channels randomly. The above value is the worst case.

### 5.3.4 Test Plot

Figure 2. Plot of the Carrier Frequency Separation (Conducted)


**\* Opti-Mini(21ms)**

Middle Channel  
 (2 441.6 MHz)

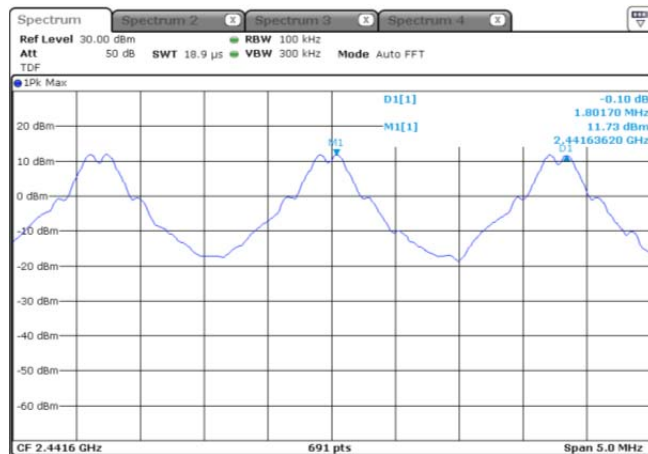


**\* Opti-Mini(7ms)**

Middle Channel  
(2 441.6 MHz)

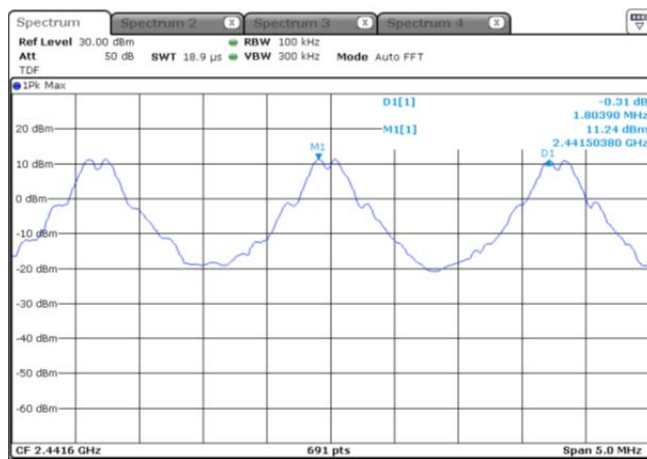

\* S.L.T

Middle Channel  
(2 439.0 MHz)

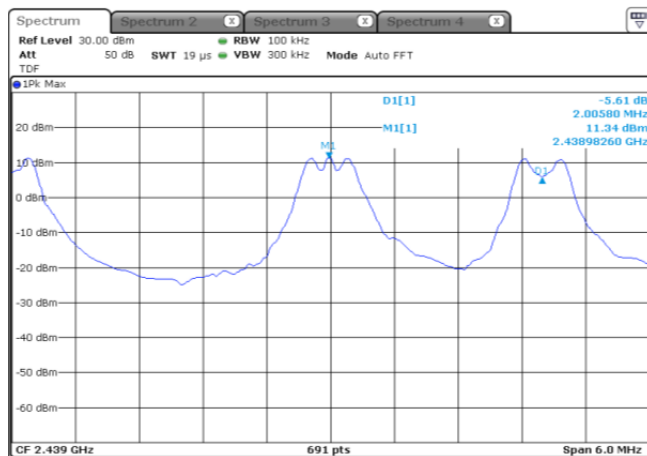

## 5.4 20 dB Channel Bandwidth

### 5.4.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

### 5.4.2 Measurement Procedure

The method of measurement used to test this DSS device is FCC Public Notice DA 00-705.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable and attenuator.
3. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via UART interface or Bluetooth tester and make sure the spectrum analyzer is operated in its linear range.
4. Set the spectrum analyzer as follows: Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  $RBW \geq 1\%$  of the 20 dB bandwidth  $VBW \geq RBW$  Sweep = auto Detector function = peak Trace = max hold
5. Set a reference level on it equal to the highest peak value.
6. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
7. Repeat above procedures until all frequencies measured were complete..

### 5.4.3 Test Result

#### - Complied

##### \* Opti-Mini(21ms)

| Channel | 20 dB Channel Bandwidth(MHz) | Carrier frequency Separation(MHz) | Occupied Bandwidth (99 % BW)(MHz) |
|---------|------------------------------|-----------------------------------|-----------------------------------|
| Low     | 0.782                        | 1.194                             | 0.777                             |
| Middle  | 0.786                        | 1.802                             | 0.786                             |
| High    | 0.786                        | 5.405                             | 0.799                             |

##### \* Opti-Mini(7ms)

| Channel | 20 dB Channel Bandwidth(MHz) | Carrier frequency Separation(MHz) | Occupied Bandwidth (99 % BW)(MHz) |
|---------|------------------------------|-----------------------------------|-----------------------------------|
| Low     | 0.786                        | 1.203                             | 0.764                             |
| Middle  | 0.782                        | 1.804                             | 0.760                             |
| High    | 0.790                        | 5.405                             | 0.790                             |

##### \* S.L.T

| Channel | 20 dB Channel Bandwidth(MHz) | Carrier frequency Separation(MHz) | Occupied Bandwidth (99 % BW)(MHz) |
|---------|------------------------------|-----------------------------------|-----------------------------------|
| Low     | 0.769                        | 1.990                             | 0.725                             |
| Middle  | 0.782                        | 2.006                             | 0.708                             |
| High    | 0.790                        | 5.970                             | 0.712                             |


NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.

#### 5.4.4 Test Plot


Figure 3. Plot of the 20 dB Channel Bandwidth / Occupied Bandwidth (Conducted)

##### \* Opti-Mini(21ms) (20 dB Channel Bandwidth)


Lowest Channel  
(2 409.2 MHz)

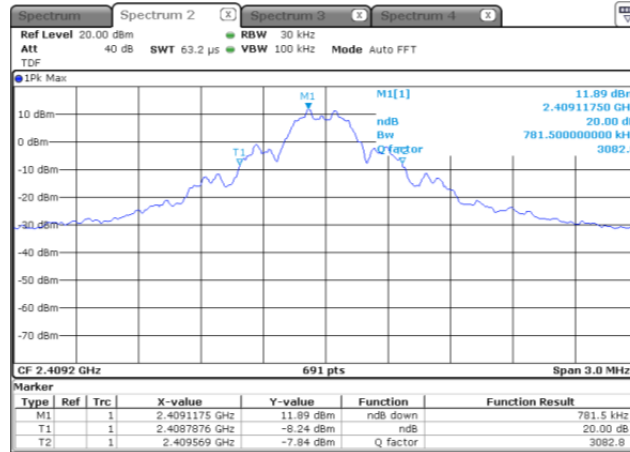

Middle Channel  
(2 441.6 MHz)

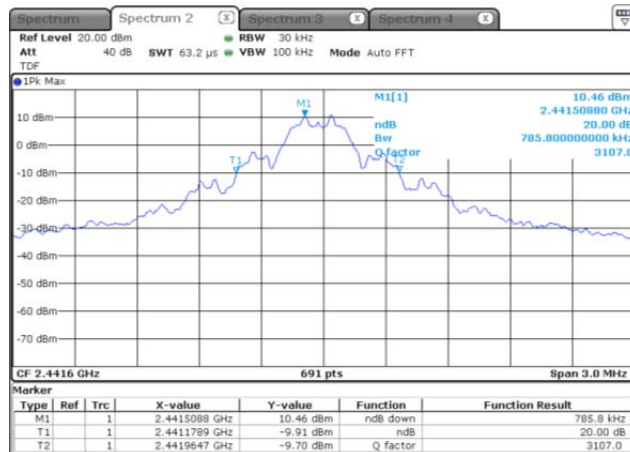


Highest Channel  
(2 474.0 MHz)

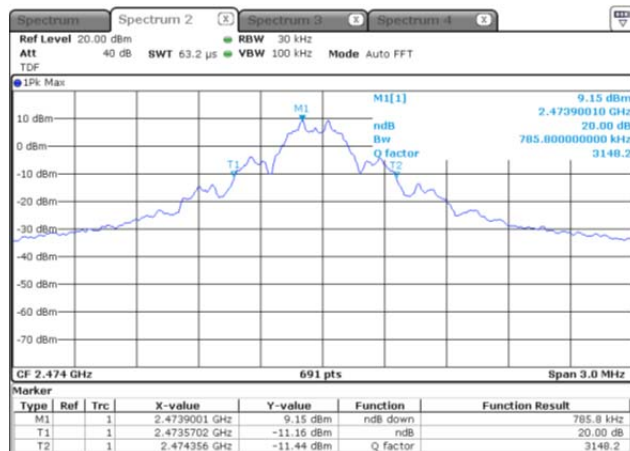


**\* Opti-Mini(7ms) (20 dB Channel Bandwidth)**

Lowest Channel  
(2 409.2 MHz)

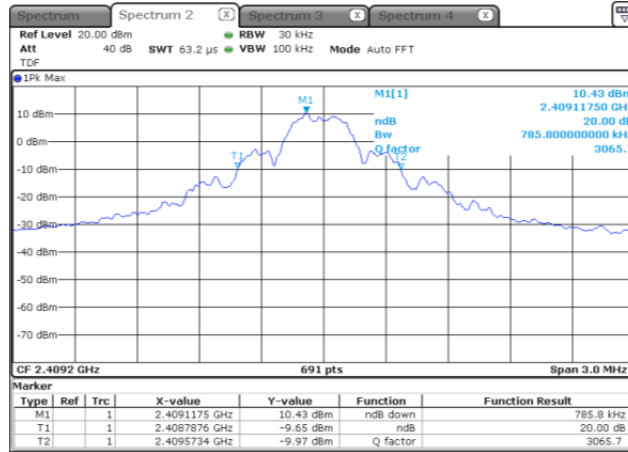

Middle Channel  
(2 441.6 MHz)

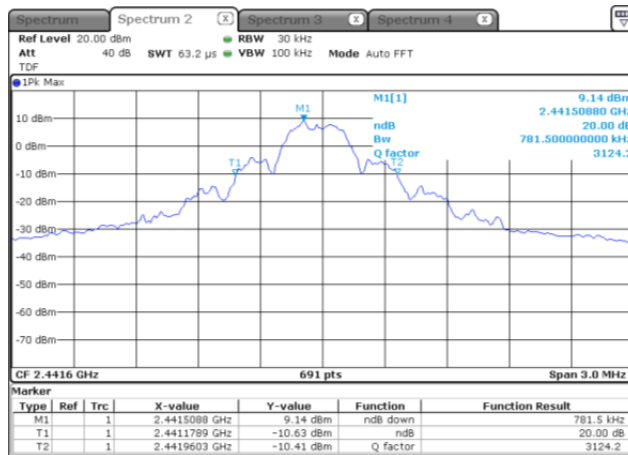


Highest Channel  
(2 474.0 MHz)




**\* S.L.T (20 dB Channel Bandwidth)**


Lowest Channel  
(2 409.0 MHz)

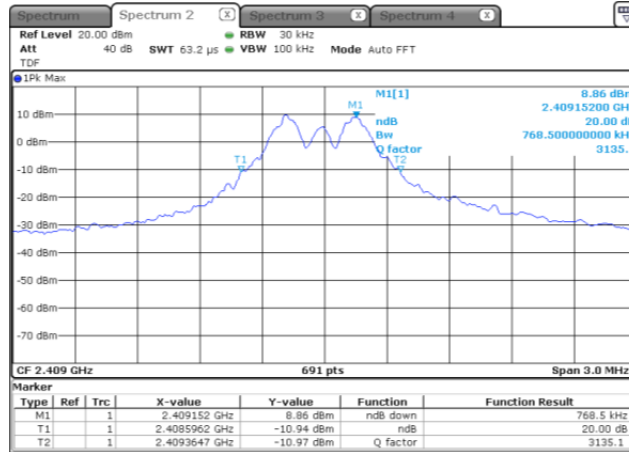

Middle Channel  
(2 439.0 MHz)

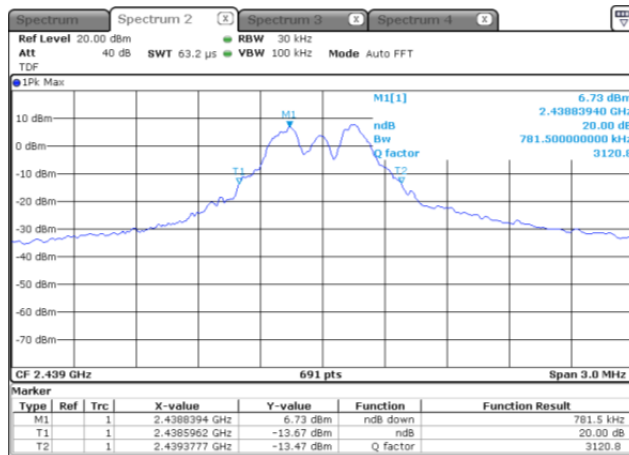

Highest Channel  
(2 480.0 MHz)

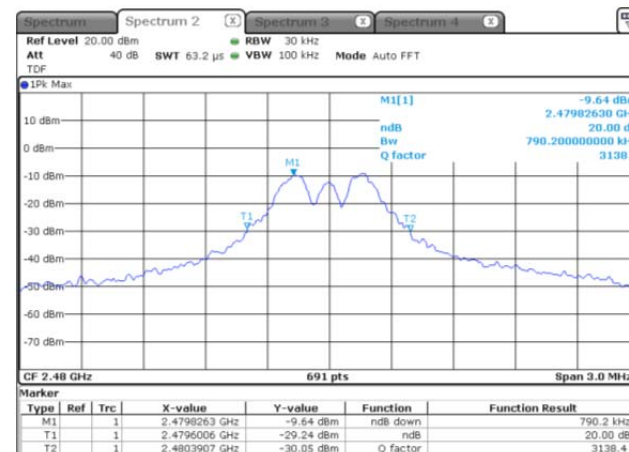


**\* Opti-Mini(21ms) (Occupied Bandwidth)**


Lowest Channel  
(2 409.2 MHz)



Middle Channel  
(2 441.6 MHz)

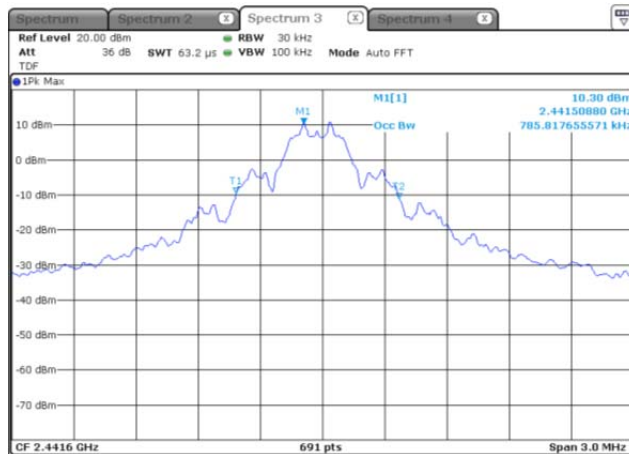


Highest Channel  
(2 474.0 MHz)

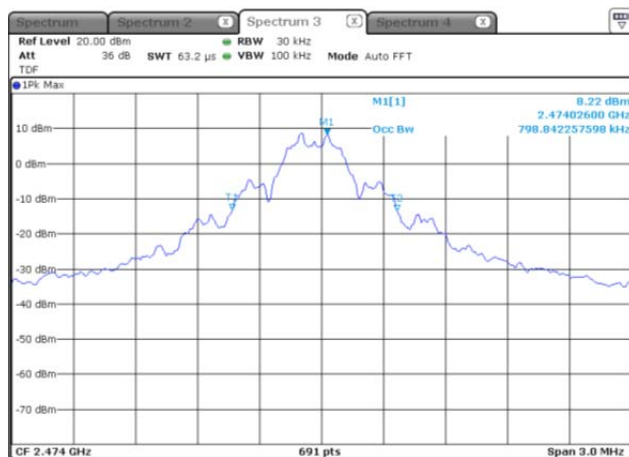


**\* Opti-Mini(7ms) (Occupied Bandwidth)**


Lowest Channel  
(2 409.2 MHz)

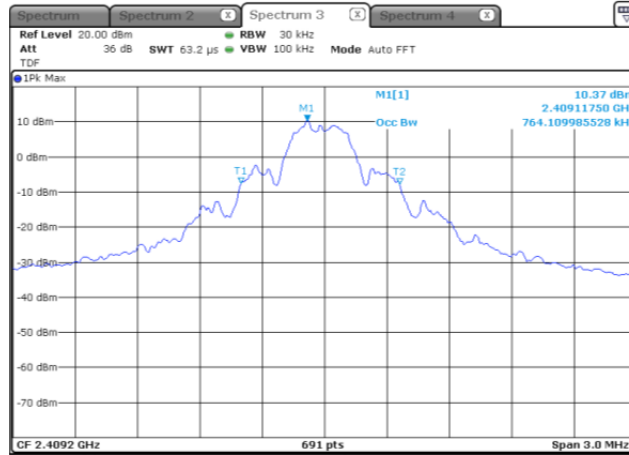

Middle Channel  
(2 441.6 MHz)

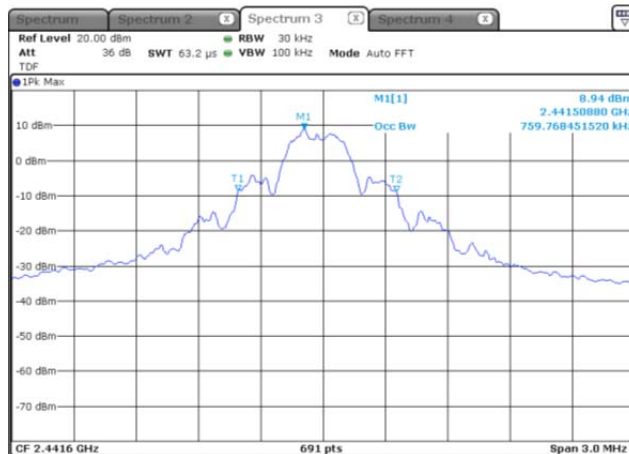


Highest Channel  
(2 474.0 MHz)

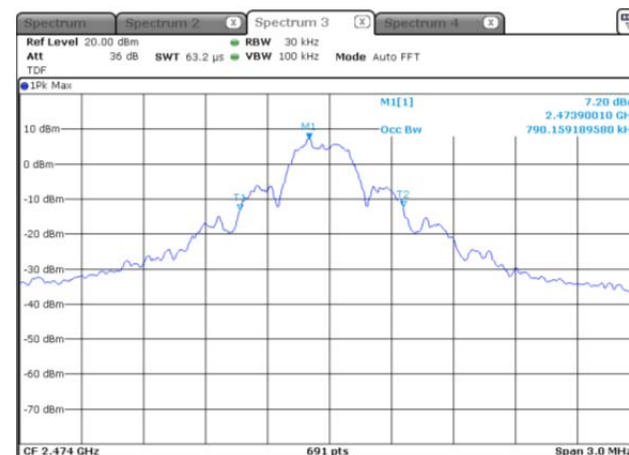


**\* S.L.T (Occupied Bandwidth)**


Lowest Channel  
(2 409.0 MHz)

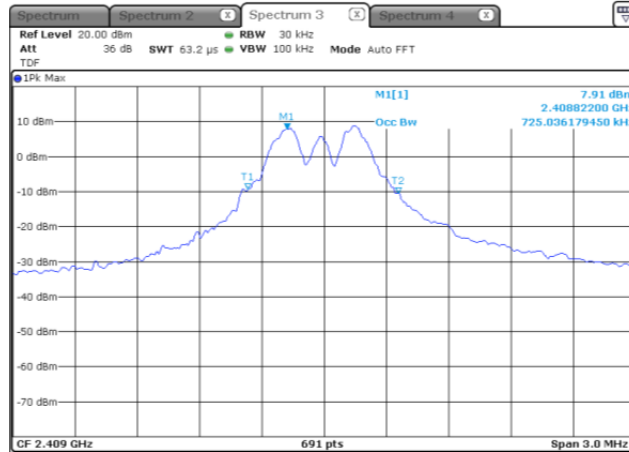

Middle Channel  
(2 439.0 MHz)

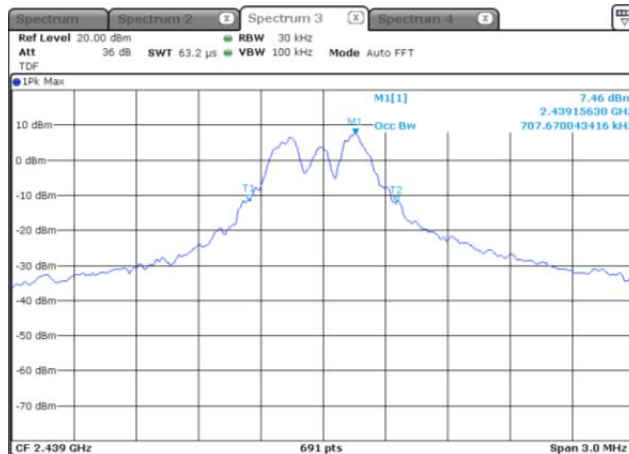

Highest Channel  
(2 480.0 MHz)

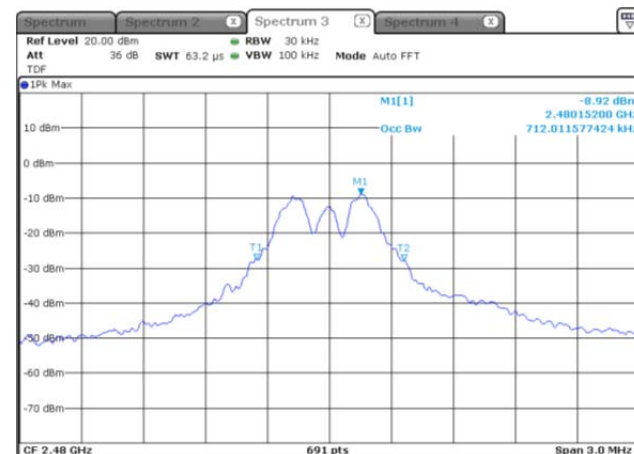

## 5.5 Number of Hopping Channels

### 5.5.1 Regulation

According to §15.247(a)(1)(iii), Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 5.5.2 Measurement Procedure

The method of measurement used to test this DSS device is FCC Public Notice DA 00-705.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable and attenuator.
3. Turn on the EUT and set the hopping function enabled by controlling it via UART interface or Bluetooth tester.
4. Set the spectrum analyzer as follows: Span = the frequency band of operation  $RBW \geq 1\%$  of the span  $VBW \geq RBW$  Sweep = auto Detector function = peak Trace = max hold
5. Record the number of hopping channels.

### 5.5.3 Test Result

#### - Complied

##### \* Opti-Mini(21ms)

| Frequency             | Number of hopping channel | Limit |
|-----------------------|---------------------------|-------|
| 2 409.2 – 2 474.0 MHz | 21                        | ≥15   |

##### \* Opti-Mini(7ms)

| Frequency             | Number of hopping channel | Limit |
|-----------------------|---------------------------|-------|
| 2 409.2 – 2 474.0 MHz | 21                        | ≥15   |

##### \* S.L.T

| Frequency             | Number of hopping channel | Limit |
|-----------------------|---------------------------|-------|
| 2 409.0 – 2 480.0 MHz | 16                        | ≥15   |


NOTE1: We took the insertion loss of the cable loss into consideration within the measuring instrument.

NOTE2: It can use 121 channels. In that case of TX and RX, it can choose 21 channels randomly on the most clean condition.


#### 5.5.4 Test Plot

Figure 4. Plot of the Number of Hopping Channels (Conducted)


**\* Opti-Mini(21ms)**

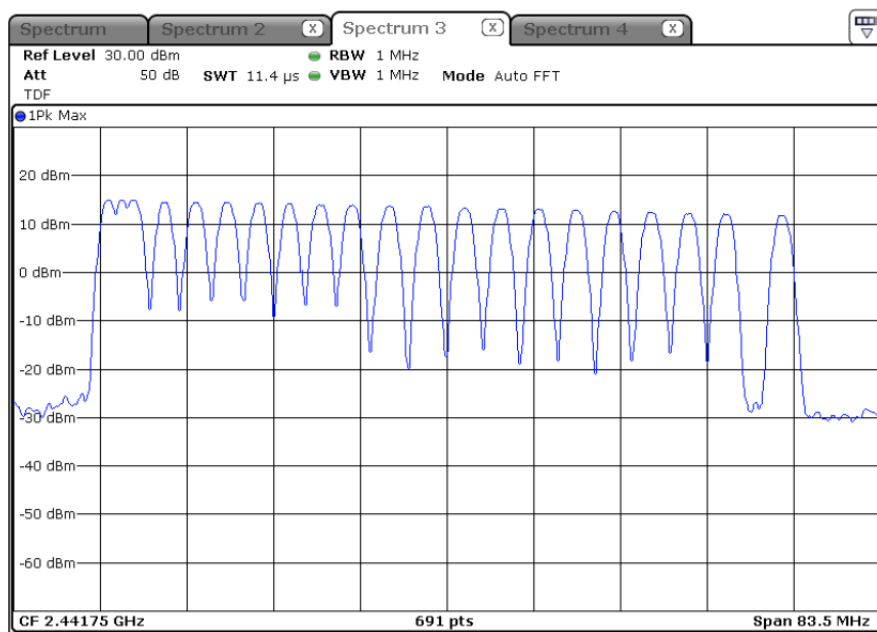

**\* Opti-Mini(7ms)**

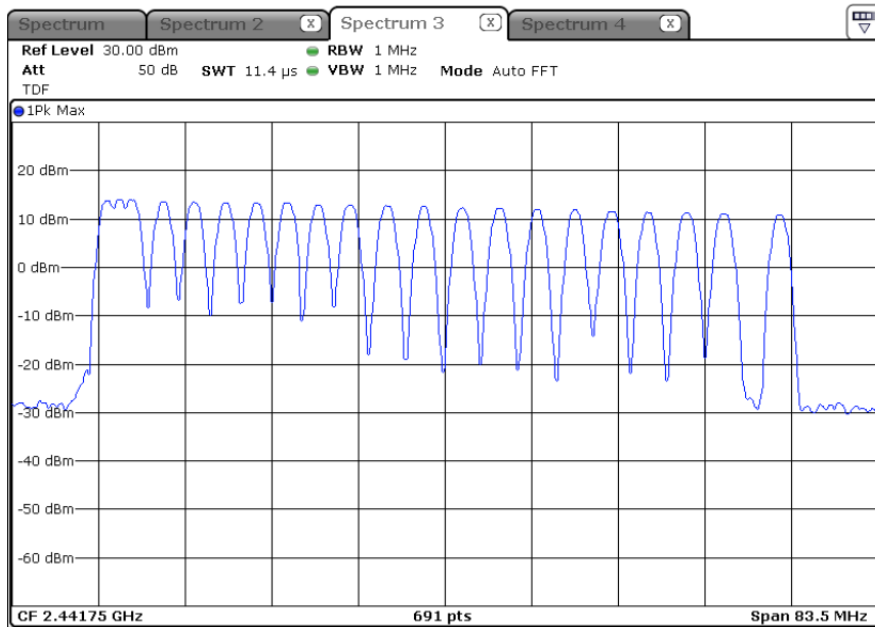

\* S.L.T

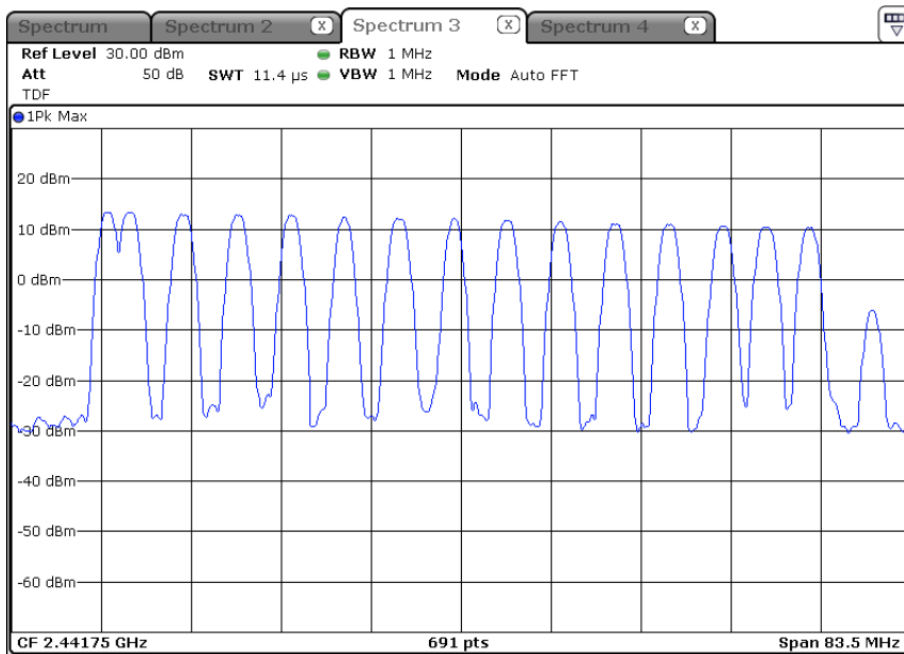

## 5.6 Time of Occupancy(Dwell Time)

### 5.6.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 5.6.2 Measurement Procedure

The method of measurement used to test this DSS device is FCC Public Notice DA 00-705.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable.
3. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via UART interface or Bluetooth tester.
4. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel RBW = 1 MHz  
VBW  $\geq$  RBW Sweep = as necessary to capture the entire dwell time per hopping channel Detector function = peak Trace = max hold
5. Measure the dwell time using the marker-delta function.
6. Repeat above procedures until all frequencies measured were complete.
7. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

### 5.6.3 Test Result

#### - Complied

##### \* Opti-Mini(21ms)

| Channel | Reading[ms] | Hopping rate [hop/s] | Number of Channels | Actual[s] | Limit[s] |
|---------|-------------|----------------------|--------------------|-----------|----------|
| Low     | 1.827       | 47                   | 21                 | 0.034     | 0.40     |

##### \* Opti-Mini(7ms)

| Channel | Reading[ms] | Hopping rate [hop/s] | Number of Channels | Actual[s] | Limit[s] |
|---------|-------------|----------------------|--------------------|-----------|----------|
| Low     | 1.765       | 96                   | 21                 | 0.068     | 0.40     |

**Actual = Reading × (Hopping rate / Number of channels) × Test period**

**Test period = 0.4 [seconds / channel] × 75 [channel] = 30.0 [seconds]**

NOTE:

1. We took the insertion loss of the cable loss into consideration within the measuring instrument.

##### \* S.L.T

| Channel | Reading[ms] | Hopping rate [hop/s] | Number of Channels | Actual[s] | Limit[s] |
|---------|-------------|----------------------|--------------------|-----------|----------|
| Low     | 0.613       | 141                  | 16                 | 0.035     | 0.40     |

**Actual = Reading × (Hopping rate / Number of channels) × Test period**

**Test period = 0.4 [seconds / channel] × 121 [channel] = 48.4 [seconds]**

NOTE:


1. We took the insertion loss of the cable loss into consideration within the measuring instrument.

## 5.6.4 Test Plot

Figure 5. Plot of the Time of Occupancy (Conducted)


\* Opti-Mini(21ms)

Lowest Channel  
(2 409.2 MHz)

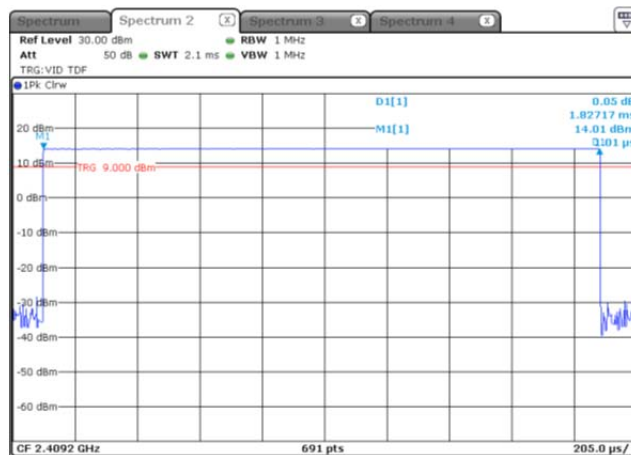


**\* Opti-Mini(7ms)**

Lowest Channel  
(2 409.2 MHz)

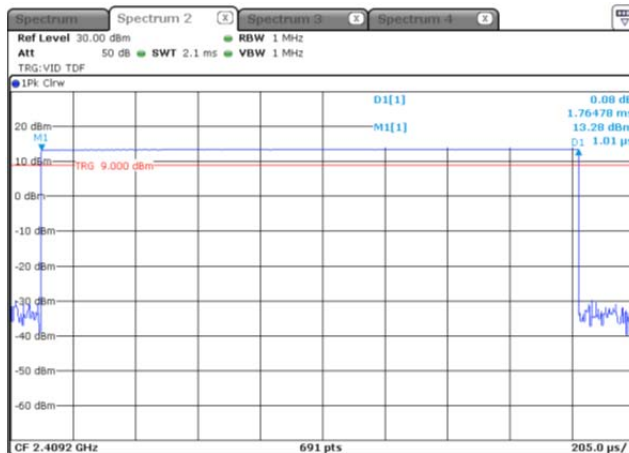

\* S.L.T

Lowest Channel  
(2 409.0 MHz)

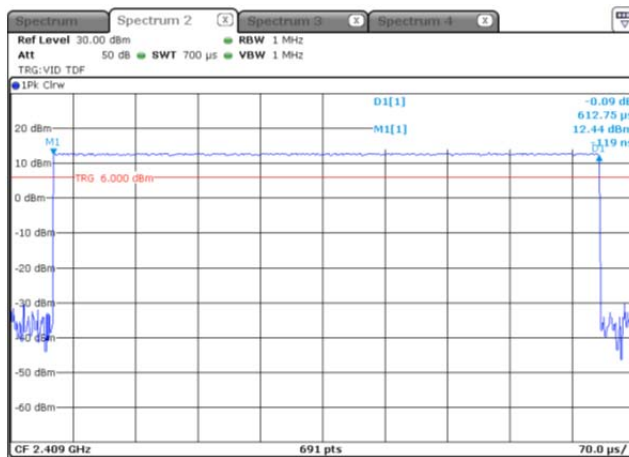

## 5.7 Spurious Emission, Band edge, and Restricted bands

### 5.7.1 Regulation

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

According to §15.209(a), Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field strength ( $\mu V/m$ ) | Measurement distance (m) |
|-----------------|------------------------------|--------------------------|
| 0.009 - 0.490   | 2400/F(kHz)                  | 300                      |
| 0.490 - 1.705   | 24000/F(kHz)                 | 30                       |
| 1.705 - 30      | 30                           | 30                       |
| 30 - 88         | 100**                        | 3                        |
| 88 - 216        | 150**                        | 3                        |
| 216 - 960       | 200**                        | 3                        |
| Above 960       | 500                          | 3                        |

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

According to § 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                 | MHz                   | MHz             | GHz           |
|---------------------|-----------------------|-----------------|---------------|
| 0.009 - 0.110       | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15    |
| 0.495 - 0.505       | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46   |
| 2.1735 - 2.1905     | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75   |
| 4.125 - 4.128       | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5   |
| 4.17725 - 4.17775   | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2     |
| 4.20725 - 4.20775   | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5     |
| 6.215 - 6.218       | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7   |
| 6.26775 - 6.26825   | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4  |
| 6.31175 - 6.31225   | 123 - 138             | 2200 - 2300     | 14.47 - 14.5  |
| 8.291 - 8.294       | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2  |
| 8.362 - 8.366       | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4   |
| 8.37625 - 8.38675   | 156.7 - 156.9         | 2690 - 2900     | 22.01 - 23.12 |
| 8.41425 - 8.41475   | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0   |
| 12.29 - 12.293      | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8   |
| 12.51975 - 12.52025 | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5  |
| 12.57675 - 12.57725 | 322 - 335.4           | 3600 - 4400     | Above 38.6    |
| 13.36 - 13.41       |                       |                 |               |

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

## 5.7.2 Measurement Procedure

The method of measurement used to test this DSS device is FCC Public Notice DA 00-705.

### 1) Band-edge Compliance of RF Conducted Emissions

#### 1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation  
 RBW  $\geq$  1% of the span  
 VBW  $\geq$  RBW  
 Sweep = auto  
 Detector function = peak  
 Trace = max hold

#### 2. Allow the trace to stabilize. Set the marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is greater than that at the band-edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.

#### 3. Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

## 2) Spurious RF Conducted Emissions:

### 1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.  
Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.

a 4 × 4 meter at the Open Area Test Site. The EUT was tested at a distance 3 meters.

### 3. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

## 3) Spurious Radiated Emissions:

### 1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters.

### 2. The EUT was placed on the top of the 0.8-meter height, 1 × 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.

### 3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 9 kHz to 30 MHz using the loop antenna, and from 30 to 1000 MHz using the TRILOG broadband antenna, and from 1000 MHz to 26500 MHz using the horn antenna.

### 4. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 4 × 4 meter at the Open Area Test Site. The EUT was tested at a distance 3 meters.

### 5. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

## Note

### 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1 GHz.

### 2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.

### 3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (≥1/T) for Average detection (AV) at frequency above 1 GHz. (where T = pulse width)

### 4. The radiated restricted band edge and Spurious radiated emissions average measurements use a duty cycle correction factor (DCCF).

### 5.7.3 Test Result

#### - Complied

1. Band edge compliance of RF Conducted Emissions was shown in figure 6.
2. Band edge compliance of RF Radiated Emissions was shown in figure 7.
3. Spurious RF conducted Emissions were shown in the Figure 8.

Note: We took the insertion loss of the cable into consideration within the measuring instrument.

4. Measured value of the Field strength of spurious Emissions (Radiated)

※ Noise was not measured. (Margin was more than 20dB)

Worst value of noise floor was recorded.

#### \* Below 1 GHz data (Worst-case: Opti-Mini(21ms)\_Low channel)

##### Opti-Mini(7ms)\_Low channel (2 409.2 MHz)

| Frequency<br>[MHz]                             | Receiver<br>Bandwidth<br>[kHz] | Pol.<br>[V/H] | Reading<br>[dB(μV)] | Factor<br>[dB] | Result<br>[dB(μV/m)] | Limit<br>[dB(μV/m)] | Margin<br>[dB] |
|------------------------------------------------|--------------------------------|---------------|---------------------|----------------|----------------------|---------------------|----------------|
| <b>Quasi-Peak DATA. Emissions below 30 MHz</b> |                                |               |                     |                |                      |                     |                |
| 10.73                                          | 120                            | V             | 42.1                | -11.7          | 30.4                 | 49.5                | 19.1           |
| Below<br>30.00                                 | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |
| <b>Quasi-Peak DATA. Emissions below 1 GHz</b>  |                                |               |                     |                |                      |                     |                |
| 176.96                                         | 120                            | H             | 55.4                | -14.3          | 41.1                 | 54.0                | 12.9           |
| 353.86                                         | 120                            | H             | 47.6                | -10.5          | 37.1                 | 54.0                | 16.9           |
| Above<br>400.00                                | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |

**\* Above 1 GHz data**

**Opti-Mini(21ms)\_Low channel (2 409.2 MHz)**

| Frequency<br>[MHz]                         | Receiver<br>Bandwidth<br>[kHz] | Pol.<br>[V/H] | Reading<br>[dB(μV)] | Factor<br>[dB] | Result<br>[dB(μV/m)] | Limit<br>[dB(μV/m)] | Margin<br>[dB] |
|--------------------------------------------|--------------------------------|---------------|---------------------|----------------|----------------------|---------------------|----------------|
| <b>Peak DATA. Emissions above 1 GHz</b>    |                                |               |                     |                |                      |                     |                |
| 2 985.75                                   | 1 000                          | H             | 40.4                | 0.6            | 41.0                 | 74.0                | 33.0           |
| Above<br>3 000.00                          | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |
| <b>Average DATA. Emissions above 1 GHz</b> |                                |               |                     |                |                      |                     |                |
| 2 985.75                                   | 1 000                          | H             | 22.7                | -0.4           | 22.3                 | 54.0                | 31.7           |
| Above<br>3 000.00                          | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |

**Opti-Mini(21ms)\_Middle channel (2 441.6 MHz)**

| Frequency<br>[MHz]                         | Receiver<br>Bandwidth<br>[kHz] | Pol.<br>[V/H] | Reading<br>[dB(μV)] | Factor<br>[dB] | Result<br>[dB(μV/m)] | Limit<br>[dB(μV/m)] | Margin<br>[dB] |
|--------------------------------------------|--------------------------------|---------------|---------------------|----------------|----------------------|---------------------|----------------|
| <b>Peak DATA. Emissions above 1 GHz</b>    |                                |               |                     |                |                      |                     |                |
| 2 791.00                                   | 1 000                          | H             | 41.2                | 0.2            | 41.4                 | 74.0                | 32.6           |
| Above<br>3 000.00                          | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |
| <b>Average DATA. Emissions above 1 GHz</b> |                                |               |                     |                |                      |                     |                |
| 2 791.00                                   | 1 000                          | H             | 21.8                | -0.4           | 21.4                 | 54.0                | 32.6           |
| Above<br>3 000.00                          | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |

**Opti-Mini(21ms)\_High channel (2 474.0 MHz)**

| Frequency<br>[MHz]                         | Receiver<br>Bandwidth<br>[kHz] | Pol.<br>[V/H] | Reading<br>[dB(μV)] | Factor<br>[dB] | Result<br>[dB(μV/m)] | Limit<br>[dB(μV/m)] | Margin<br>[dB] |
|--------------------------------------------|--------------------------------|---------------|---------------------|----------------|----------------------|---------------------|----------------|
| <b>Peak DATA. Emissions above 1 GHz</b>    |                                |               |                     |                |                      |                     |                |
| 2 902.25                                   | 1 000                          | H             | 40.4                | 0.4            | 40.8                 | 74.0                | 33.2           |
| Above<br>3 000.00                          | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |
| <b>Average DATA. Emissions above 1 GHz</b> |                                |               |                     |                |                      |                     |                |
| 2 902.25                                   | 1 000                          | H             | 20.9                | -0.5           | 20.4                 | 54.0                | 33.6           |
| Above<br>3 000.00                          | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |

**Opti-Mini(7ms)\_Low channel (2 409.2 MHz)**

| Frequency<br>[MHz]                         | Receiver<br>Bandwidth<br>[kHz] | Pol.<br>[V/H] | Reading<br>[dB(μV)] | Factor<br>[dB] | Result<br>[dB(μV/m)] | Limit<br>[dB(μV/m)] | Margin<br>[dB] |
|--------------------------------------------|--------------------------------|---------------|---------------------|----------------|----------------------|---------------------|----------------|
| <b>Peak DATA. Emissions above 1 GHz</b>    |                                |               |                     |                |                      |                     |                |
| 2 958.25                                   | 1 000                          | H             | 41.0                | 0.5            | 41.5                 | 74.0                | 32.5           |
| Above<br>3 000.00                          | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |
| <b>Average DATA. Emissions above 1 GHz</b> |                                |               |                     |                |                      |                     |                |
| 2 985.80                                   | 1 000                          | H             | 21.8                | -0.5           | 21.3                 | 54.0                | 32.7           |
| Above<br>3 000.00                          | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |

**Opti-Mini(7ms)\_Middle channel (2 441.6 MHz)**

| Frequency<br>[MHz]                         | Receiver<br>Bandwidth<br>[kHz] | Pol.<br>[V/H] | Reading<br>[dB(μV)] | Factor<br>[dB] | Result<br>[dB(μV/m)] | Limit<br>[dB(μV/m)] | Margin<br>[dB] |
|--------------------------------------------|--------------------------------|---------------|---------------------|----------------|----------------------|---------------------|----------------|
| <b>Peak DATA. Emissions above 1 GHz</b>    |                                |               |                     |                |                      |                     |                |
| 2 713.00                                   | 1 000                          | V             | 41.8                | 0.2            | 42.0                 | 74.0                | 32.0           |
| Above<br>3 000.00                          | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |
| <b>Average DATA. Emissions above 1 GHz</b> |                                |               |                     |                |                      |                     |                |
| 2 713.00                                   | 1 000                          | V             | 20.5                | -0.2           | 20.3                 | 54.0                | 33.7           |
| Above<br>3 000.00                          | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |

**Opti-Mini(7ms)\_Low channel (2 474.0 MHz)**

| Frequency<br>[MHz]                         | Receiver<br>Bandwidth<br>[kHz] | Pol.<br>[V/H] | Reading<br>[dB(μV)] | Factor<br>[dB] | Result<br>[dB(μV/m)] | Limit<br>[dB(μV/m)] | Margin<br>[dB] |
|--------------------------------------------|--------------------------------|---------------|---------------------|----------------|----------------------|---------------------|----------------|
| <b>Peak DATA. Emissions above 1 GHz</b>    |                                |               |                     |                |                      |                     |                |
| 1 716.25                                   | 1 000                          | V             | 46.6                | -1.9           | 44.7                 | 74.0                | 29.3           |
| Above<br>2 000.00                          | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |
| <b>Average DATA. Emissions above 1 GHz</b> |                                |               |                     |                |                      |                     |                |
| 1 716.25                                   | 1 000                          | V             | 27.0                | -0.8           | 26.2                 | 54.0                | 27.8           |
| Above<br>2 000.00                          | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |

**S.L.T\_Low channel (2 409.0 MHz)**

| Frequency<br>[MHz]                         | Receiver<br>Bandwidth<br>[kHz] | Pol.<br>[V/H] | Reading<br>[dB(μV)] | Factor<br>[dB] | Result<br>[dB(μV/m)] | Limit<br>[dB(μV/m)] | Margin<br>[dB] |
|--------------------------------------------|--------------------------------|---------------|---------------------|----------------|----------------------|---------------------|----------------|
| <b>Peak DATA. Emissions above 1 GHz</b>    |                                |               |                     |                |                      |                     |                |
| 2 689.75                                   | 1 000                          | V             | 40.9                | 0.1            | 41.0                 | 74.0                | 33.0           |
| Above<br>3 000.00                          | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |
| <b>Average DATA. Emissions above 1 GHz</b> |                                |               |                     |                |                      |                     |                |
| 2 689.75                                   | 1 000                          | V             | 21.6                | -0.2           | 21.4                 | 54.0                | 32.6           |
| Above<br>3 000.00                          | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |

**S.L.T\_Middle channel (2 439.0 MHz)**

| Frequency<br>[MHz]                         | Receiver<br>Bandwidth<br>[kHz] | Pol.<br>[V/H] | Reading<br>[dB(μV)] | Factor<br>[dB] | Result<br>[dB(μV/m)] | Limit<br>[dB(μV/m)] | Margin<br>[dB] |
|--------------------------------------------|--------------------------------|---------------|---------------------|----------------|----------------------|---------------------|----------------|
| <b>Peak DATA. Emissions above 1 GHz</b>    |                                |               |                     |                |                      |                     |                |
| 2 818.00                                   | 1 000                          | V             | 40.1                | 0.2            | 40.3                 | 74.0                | 33.7           |
| Above<br>3 000.00                          | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |
| <b>Average DATA. Emissions above 1 GHz</b> |                                |               |                     |                |                      |                     |                |
| 2 818.00                                   | 1 000                          | V             | 22.9                | -0.4           | 22.5                 | 54.0                | 31.5           |
| Above<br>3 000.00                          | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |

**S.L.T\_High channel (2 480.0 MHz)**


| Frequency<br>[MHz]                         | Receiver<br>Bandwidth<br>[kHz] | Pol.<br>[V/H] | Reading<br>[dB(μV)] | Factor<br>[dB] | Result<br>[dB(μV/m)] | Limit<br>[dB(μV/m)] | Margin<br>[dB] |
|--------------------------------------------|--------------------------------|---------------|---------------------|----------------|----------------------|---------------------|----------------|
| <b>Peak DATA. Emissions above 1 GHz</b>    |                                |               |                     |                |                      |                     |                |
| 2 920.00                                   | 1 000                          | V             | 40.1                | 0.4            | 40.5                 | 74.0                | 33.5           |
| Above<br>3 000.00                          | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |
| <b>Average DATA. Emissions above 1 GHz</b> |                                |               |                     |                |                      |                     |                |
| 2 920.00                                   | 1 000                          | V             | 22.7                | -0.5           | 22.2                 | 54.0                | 31.8           |
| Above<br>3 000.00                          | Not<br>Detected                | -             | -                   | -              | -                    | -                   | -              |

## 5.7.4 Test Plot


Figure 6. Plot of the Band Edge (Conducted)

### \* Opti-Mini(21ms) (Without hopping)

Lowest Channel  
(2 409.2 MHz)

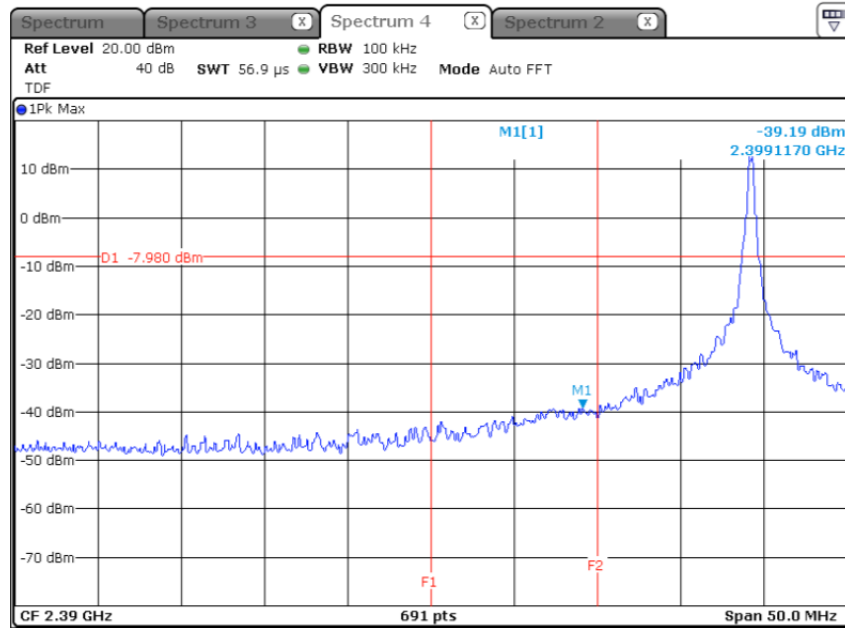


Highest Channel  
(2 474.0 MHz)

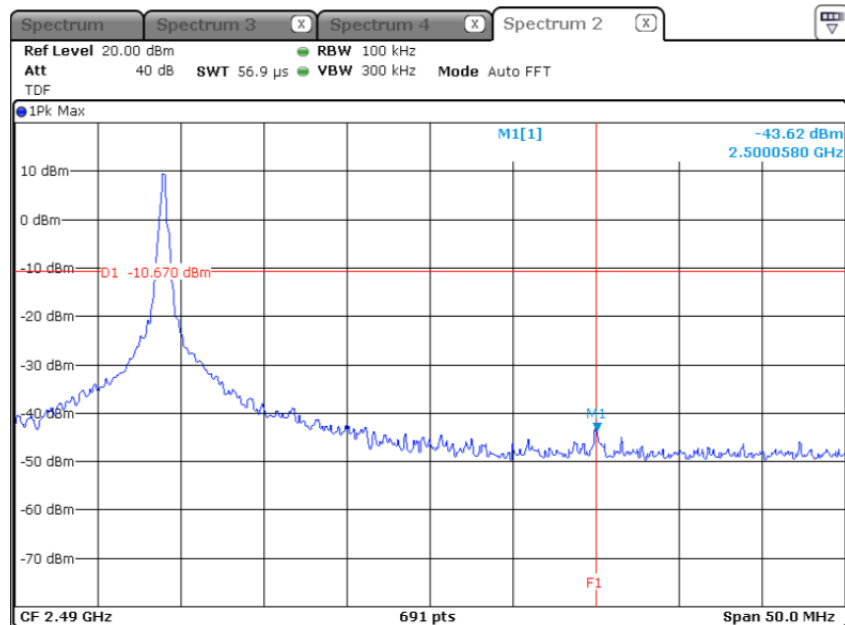


**\* Opti-Mini(21ms) (With hopping)**

Lowest Channel  
(2 409.2 MHz)

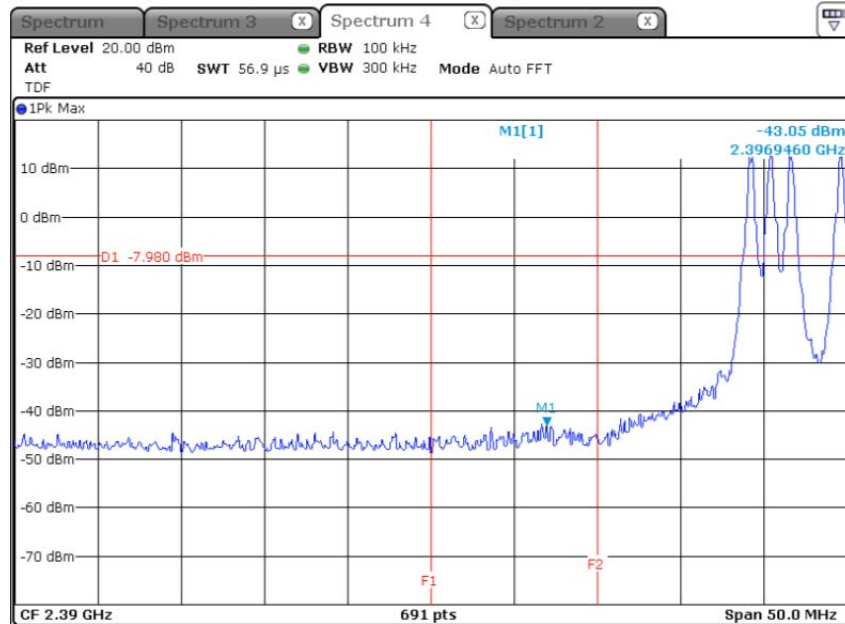


Highest Channel  
(2 474.0 MHz)

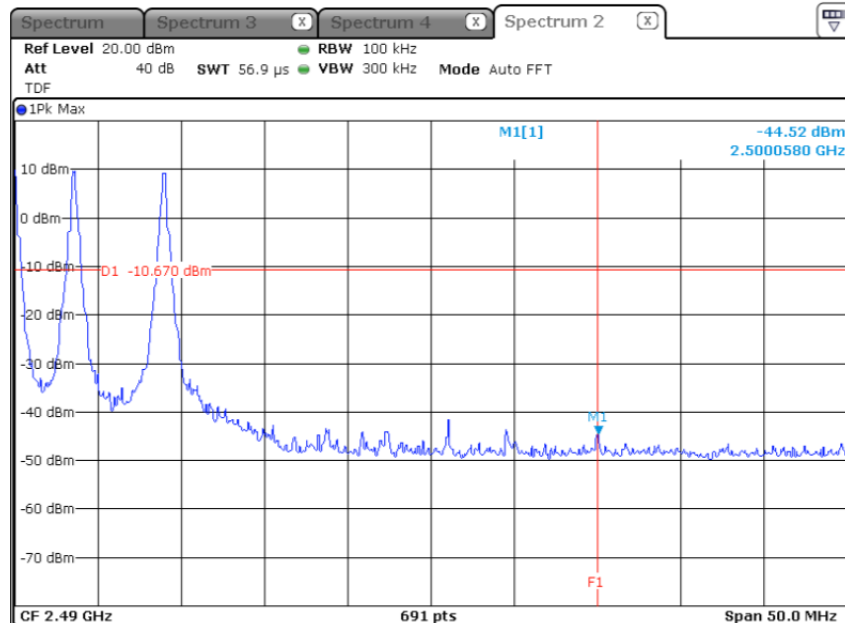


**\* Opti-Mini(7ms) (Without hopping)**

Lowest Channel  
(2 409.2 MHz)

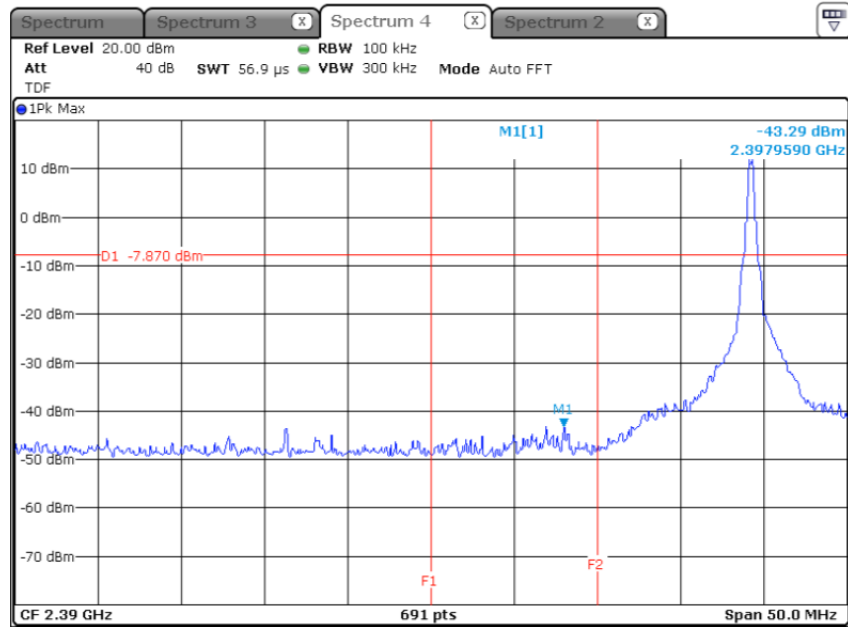


Highest Channel  
(2 474.0 MHz)

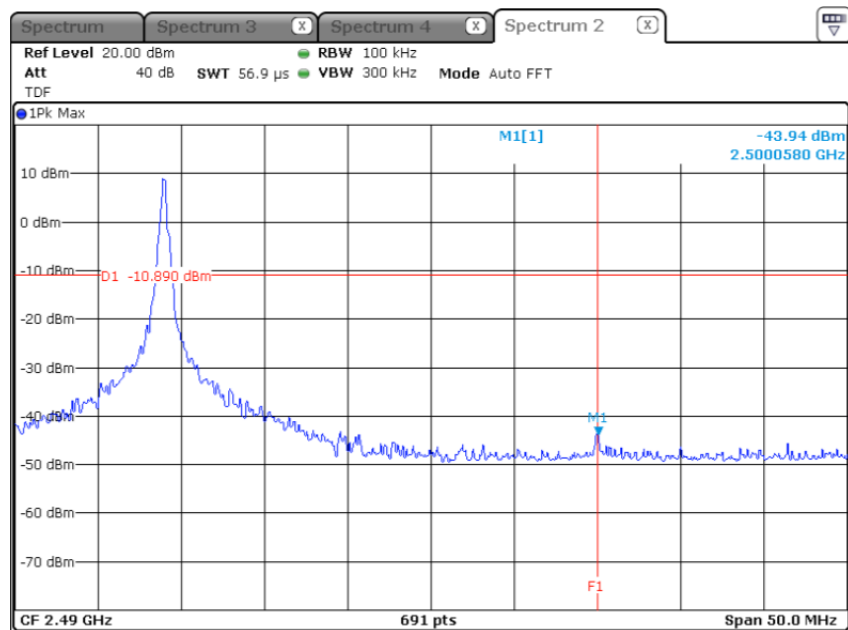


**\* Opti-Mini(7ms) (With hopping)**

Lowest Channel  
(2 409.2 MHz)

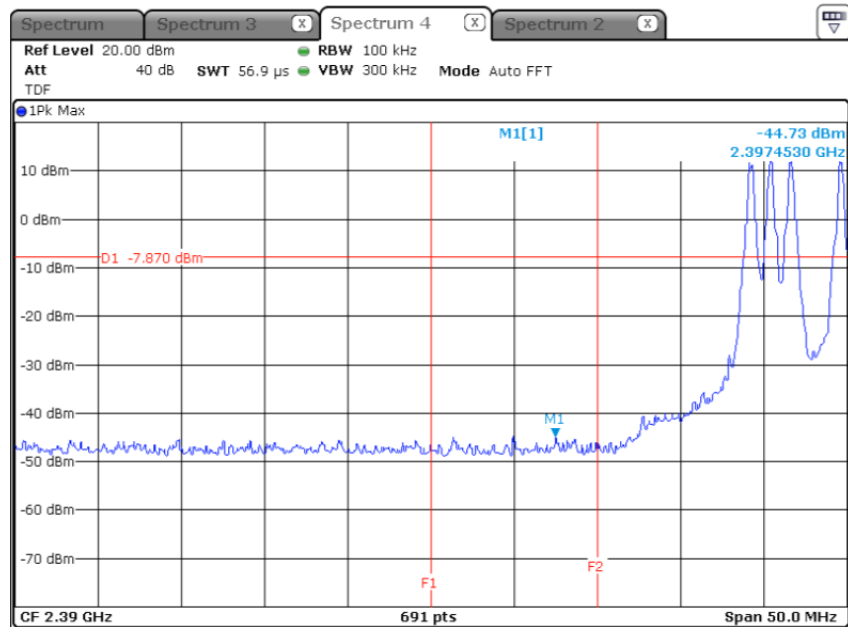


Highest Channel  
(2 474.0 MHz)

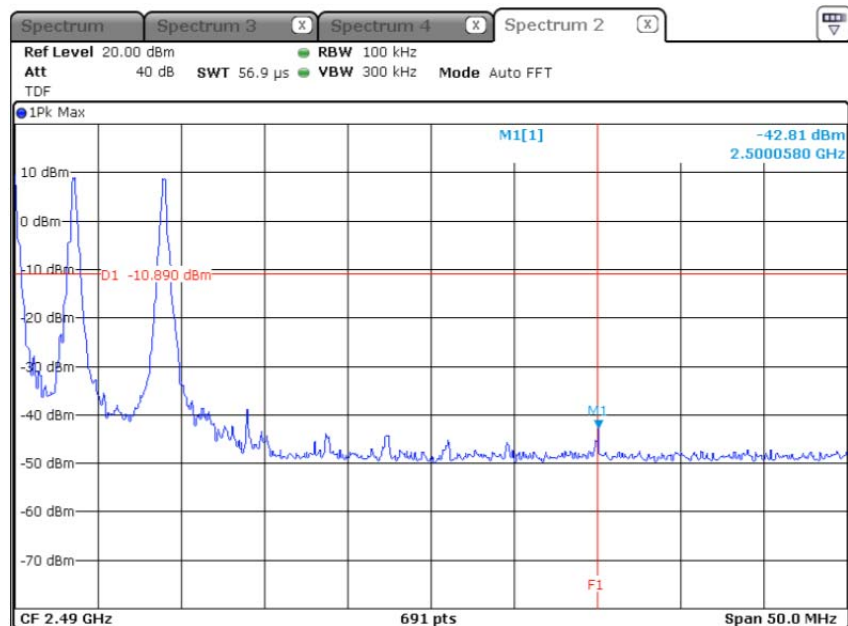


**\* S.L.T (Without hopping)**

Lowest Channel  
(2 409.0 MHz)

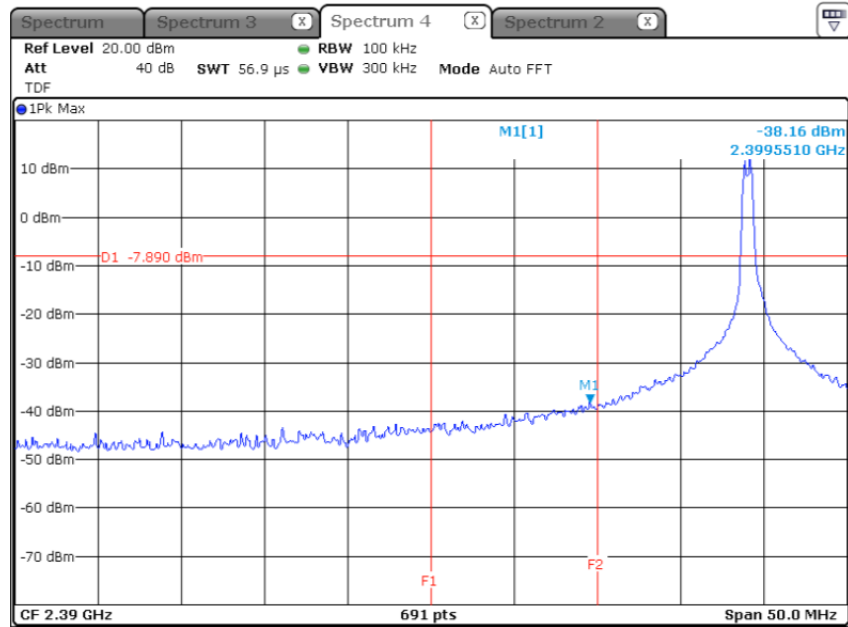


Highest Channel  
(2 480.0 MHz)

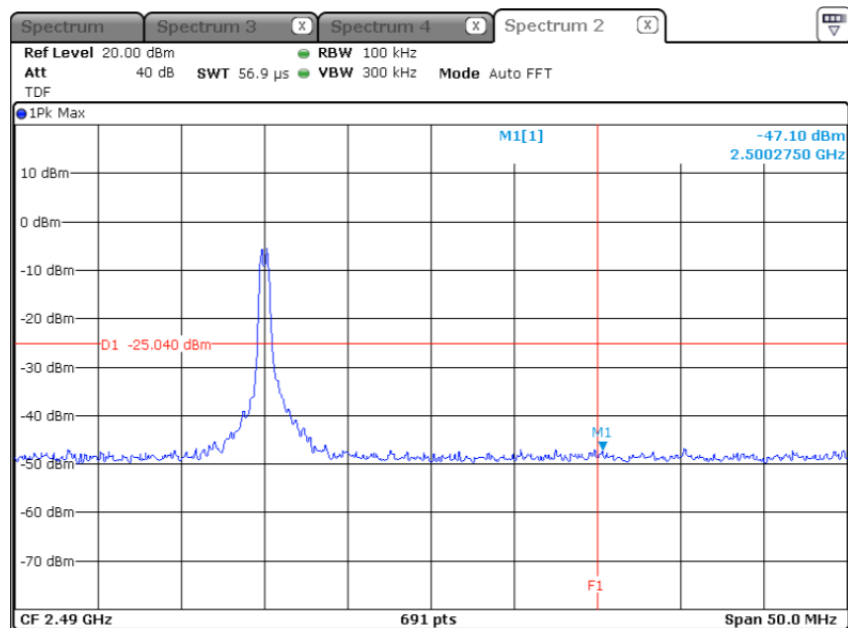


**\* S.L.T (With hopping)**

Lowest Channel  
(2 409.0 MHz)

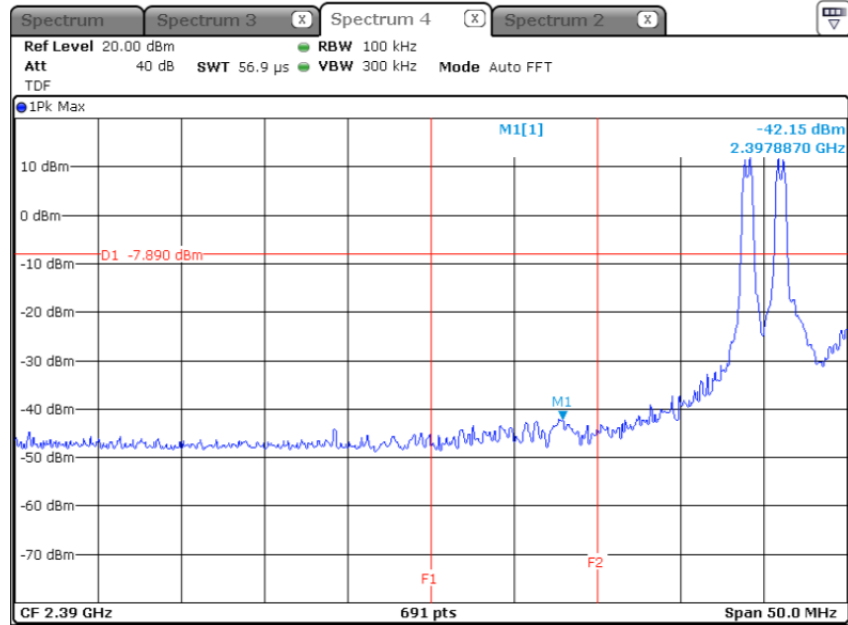

Highest Channel  
(2 480.0 MHz)

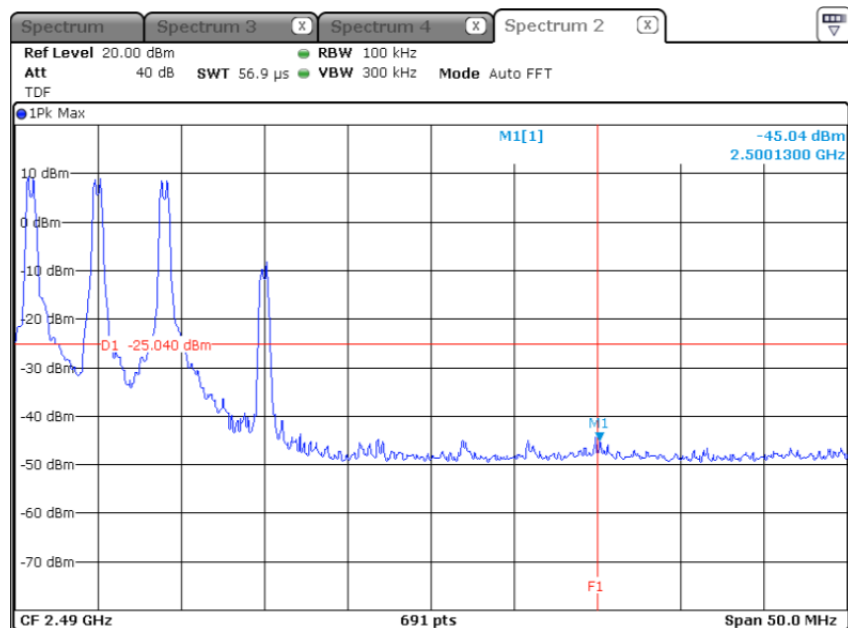


## 5.7.4 Test Plot (Continue)


Figure 7. Plot of the Band Edge (Radiated)

### \* Opti-Mini(21ms)


Lowest Channel(2 409.2 MHz): PEAK

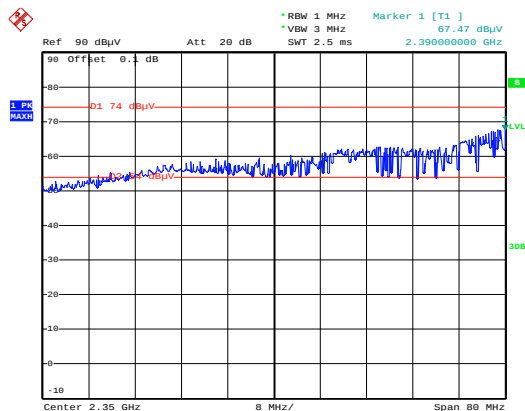


Lowest Channel(2 409.2 MHz): AVERAGE

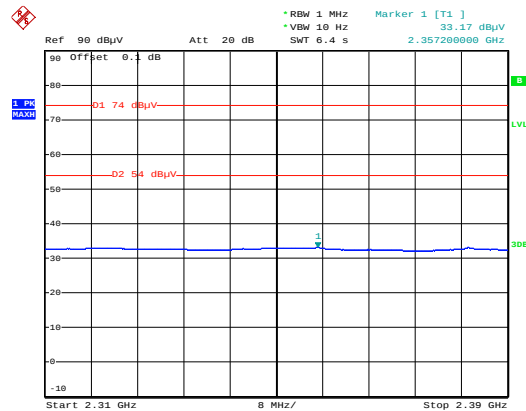

Highest Channel(2 474.0 MHz): PEAK

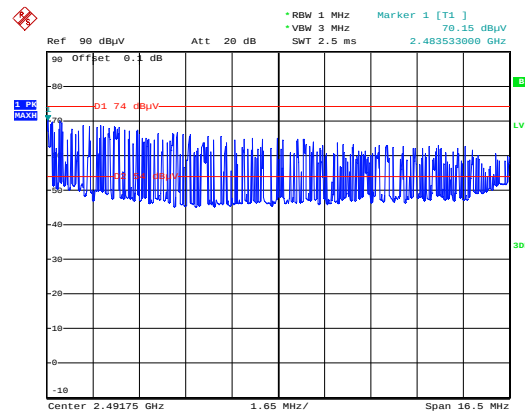

Highest Channel(2 474.0 MHz): AVERAGE

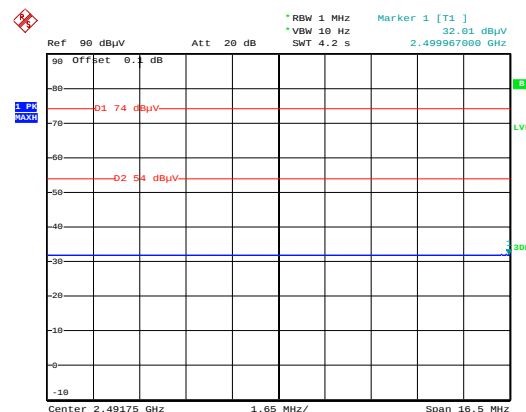


#### Note.

Peak offset(dB) = ANT Factor- Amp Gain + Cable Loss


Average offset (dB) = ANT Factor- Amp Gain + Cable Loss

**\* Opti-Mini(7ms)**


Lowest Channel(2 409.2 MHz): PEAK

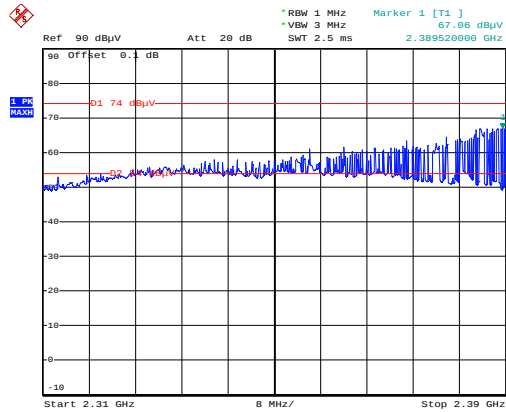


Lowest Channel(2 409.2 MHz): AVERAGE

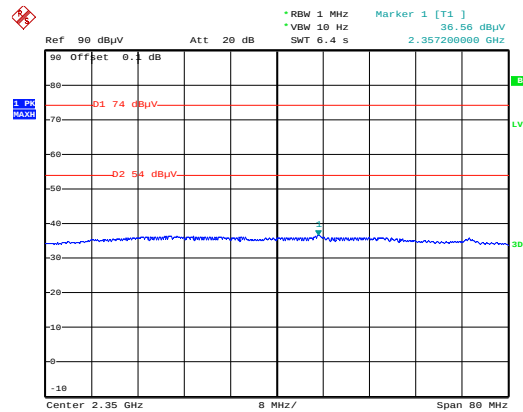

Highest Channel(2 474.0 MHz): PEAK

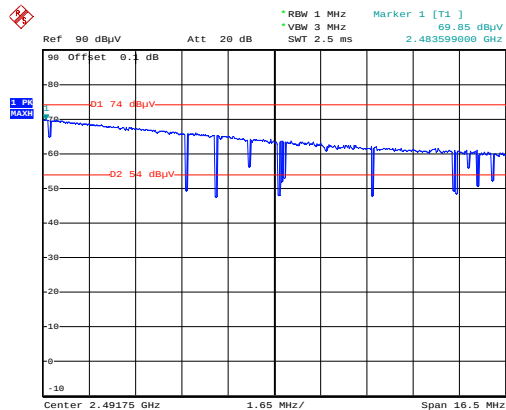

Highest Channel(2 474.0 MHz): AVERAGE

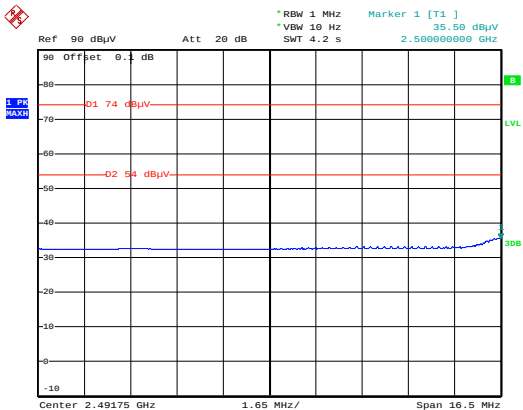


Note.

Peak offset(dB) = ANT Factor- Amp Gain + Cable Loss


Average offset (dB) = ANT Factor- Amp Gain + Cable Loss

**\* S.L.T**


Lowest Channel(2 409.0 MHz): PEAK

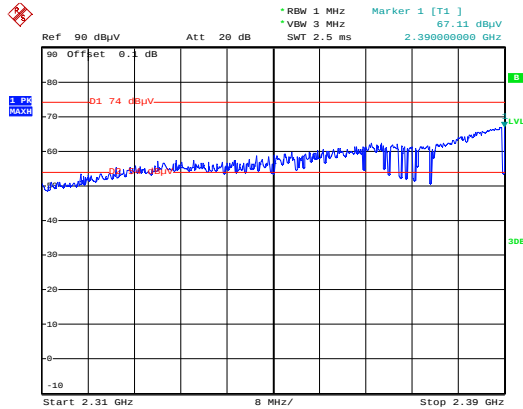


Lowest Channel(2 409.0 MHz): AVERAGE

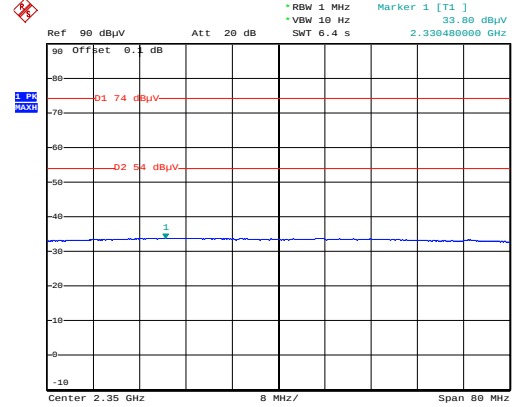

Highest Channel(2 480.0 MHz): PEAK

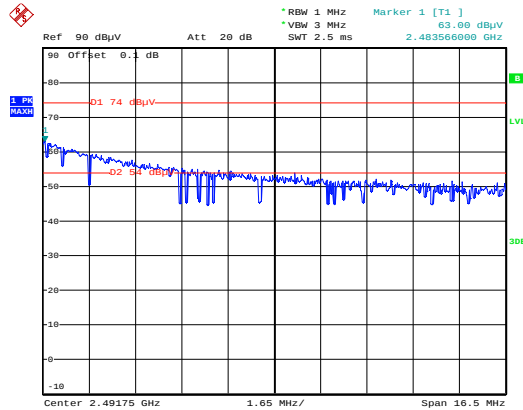

Highest Channel(2 480.0 MHz): AVERAGE

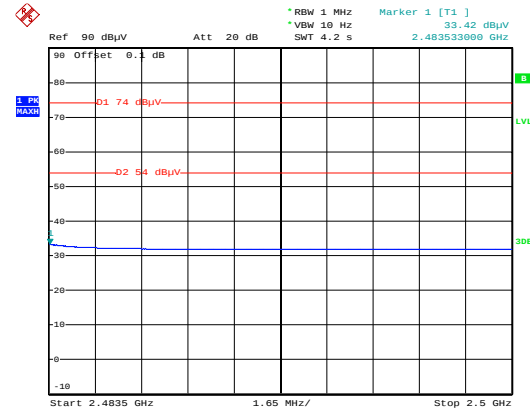

Note.


Peak offset(dB) = ANT Factor- Amp Gain + Cable Loss

Average offset (dB) = ANT Factor- Amp Gain + Cable Loss


Figure 8. Plot of the Spurious RF conducted emissions

**\* Opti-Mini(21ms)**


Lowest Channel(2 409.2 MHz):30 MHz ~ 25GHz

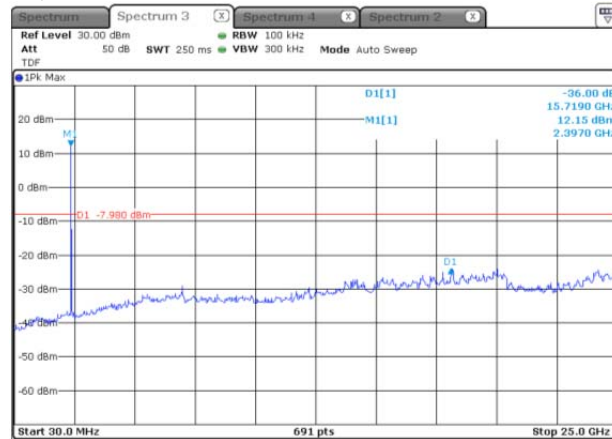

Middle Channel(2 441.6 MHz): 30 MHz ~ 25 GHz

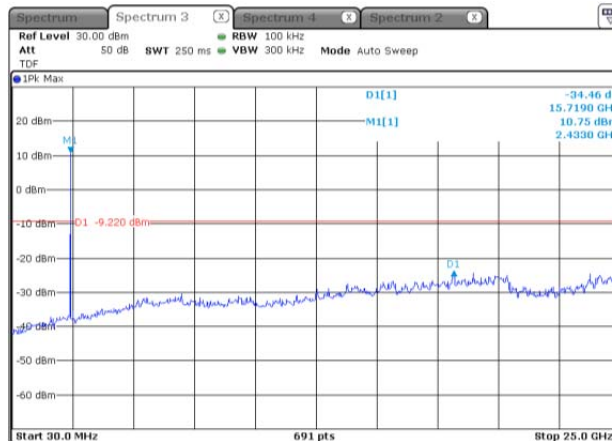


Highest Channel(2 474.0 MHz): 30 MHz ~ 25 GHz

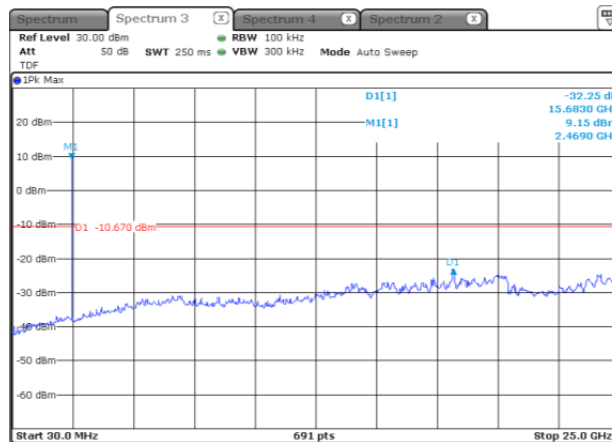


**\* Opti-Mini(7ms)**


Lowest Channel(2 409.2 MHz): 30 MHz ~ 25 GHz

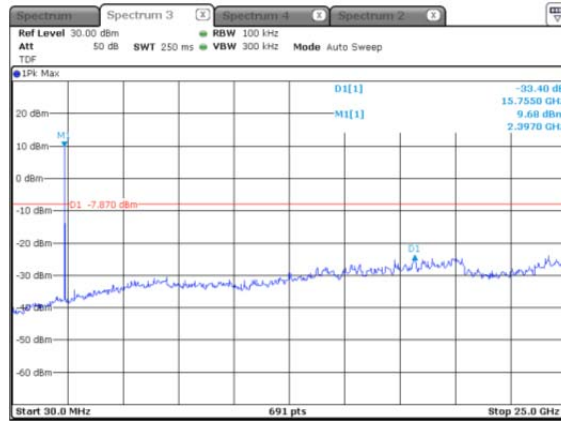

Middle Channel(2 441.6 MHz): 30 MHz ~ 25 GHz

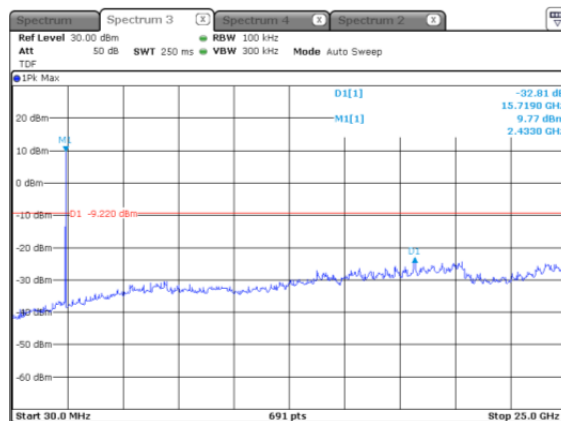


Highest Channel(2 474.0 MHz): 30 MHz ~ 25 GHz

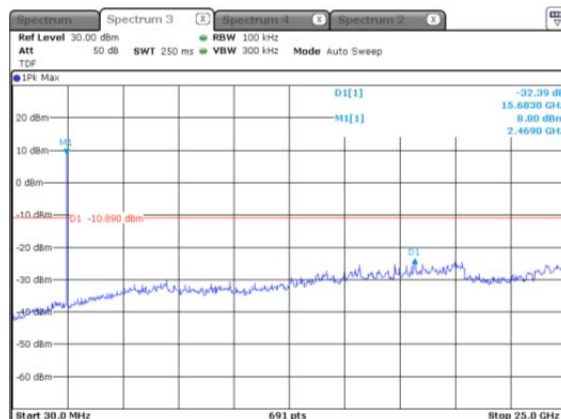


**\* S.L.T**


Lowest Channel(2 409.0 MHz):30 MHz ~ 25GHz

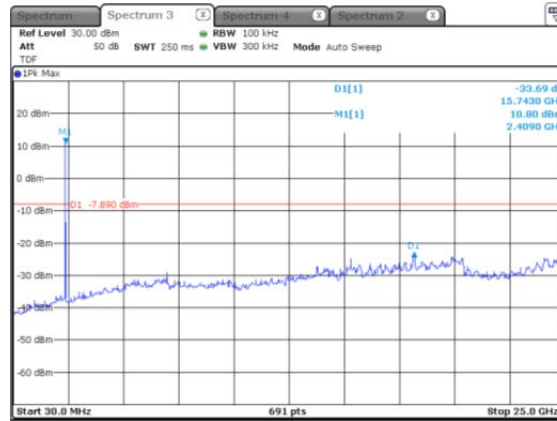

Middle Channel(2 439.0 MHz): 30 MHz ~ 25 GHz

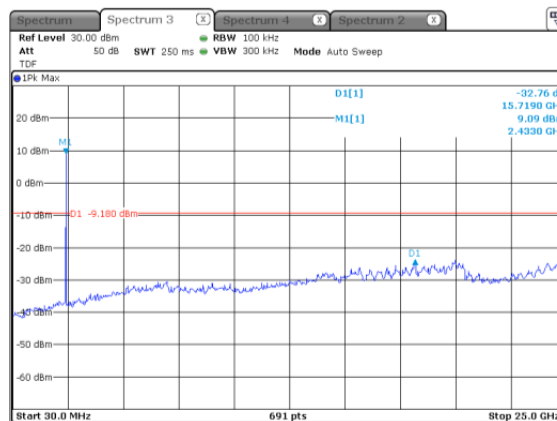

Highest Channel(2 480.0 MHz): 30 MHz ~ 25 GHz

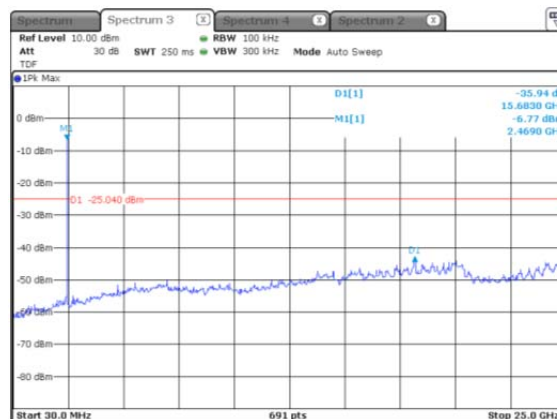

## 6. Test equipment used for test

|   | Description            | Manufacture                       | Model No.  | Serial No. | Next Cal Date. |
|---|------------------------|-----------------------------------|------------|------------|----------------|
| ■ | Spectrum Analyzer      | R&S                               | FSP30      | 100914     | 14.08.19       |
| ■ | DC Power Supply        | Agilent                           | E3632A     | MY51220373 | 14.12.24       |
| ■ | Signal Generator       | R&S                               | SMR40      | 100007     | 14.06.11       |
| ■ | Amplifier              | Sonoma Instrument                 | 310N       | 293004     | 14.10.31       |
| ■ | Spectrum Analyzer      | R&S                               | FSV40      | 100989     | 15.01.29       |
| ■ | Spectrum Analyzer      | R&S                               | FSP40      | 100209     | 14.10.21       |
| ■ | Broadband Preamplifier | Schwarzbeck                       | BBV9718    | 216        | 14.06.10       |
| ■ | Broadband Preamplifier | Schwarzbeck                       | BBV9721    | 2          | 15.05.09       |
| ■ | Power Divider          | Aeroflex/<br>Weinschel, Inc       | 1580-1     | RM986      | 15.04.08       |
| ■ | Loop Antenna           | R&S                               | HFH2-Z2    | 100355     | 15.06.19       |
| ■ | Bi-Log Antenna         | Schwarzbeck                       | VULB9163   | 552        | 14.07.18       |
| ■ | Horn Antenna           | ETS –<br>Lindgren                 | 3115       | 62589      | 14.11.11       |
| ■ | Horn Antenna           | ETS –<br>Lindgren                 | 3116       | 86635      | 15.02.26       |
| ■ | Attenuator             | HP                                | 8491A      | 16861      | 14.07.08       |
| ■ | Highpass Filter        | Wainwright<br>Instruments<br>GmbH | WHKX3.0/   | 44         | 15.02.05       |
| ■ | Antenna Mast           | Innco Systems                     | MA4000-EP  | 303        | -              |
| ■ | Turn Table             | Innco Systems                     | DT2000S-1t | 79         | -              |