

# ELITE ELECTRONIC ENGINEERING CO

h<sub>p</sub> REF 18.0 dBm MKR 1.889 970 0 GHz  
-18.50 dBm

ATTEN 30 dB + 20dB EXT

MANUFACTURER : TRL TECHNOLOGY  
MODEL : SYN8486A  
SERIAL No. : NONE ASSIGNED  
TEST PERFORMED : FCC-24 OCCUPIED BANDWIDTH  
MODE : FM @ 1889.97MHz  
NOTES : INPUT


D. CROWDER  
13 Mar 2000  
13:47:11

10 dB/


DL -12.0  
dBm

Page 23 of 41

CENTER 1.889 970 GHz RES BW 300 Hz UBW 1 kHz SPAN 150 kHz SWP 4.50 sec

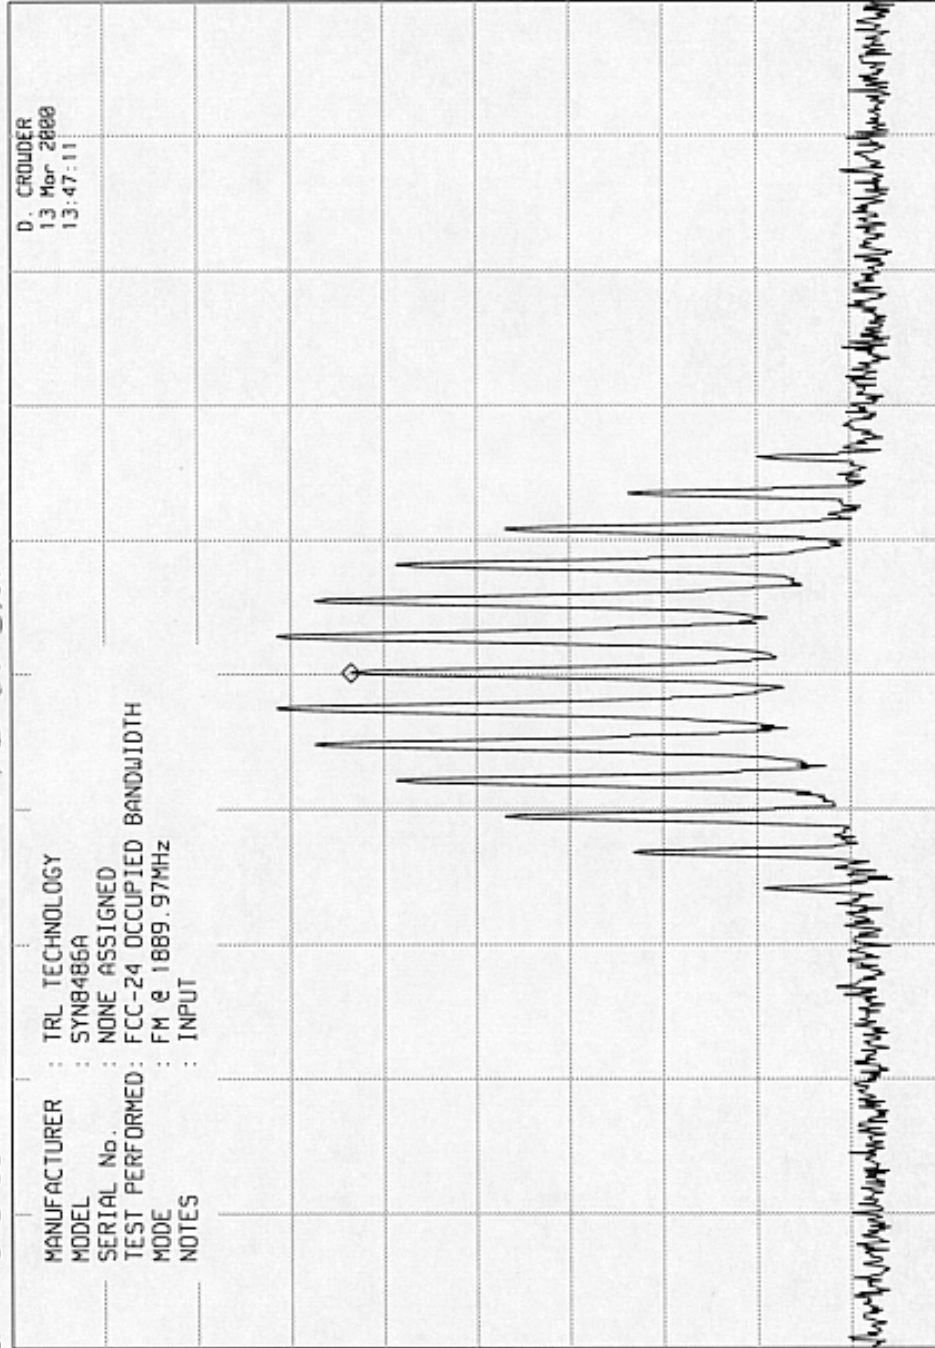

ELITE ELECTRONIC ENGINEERING CO

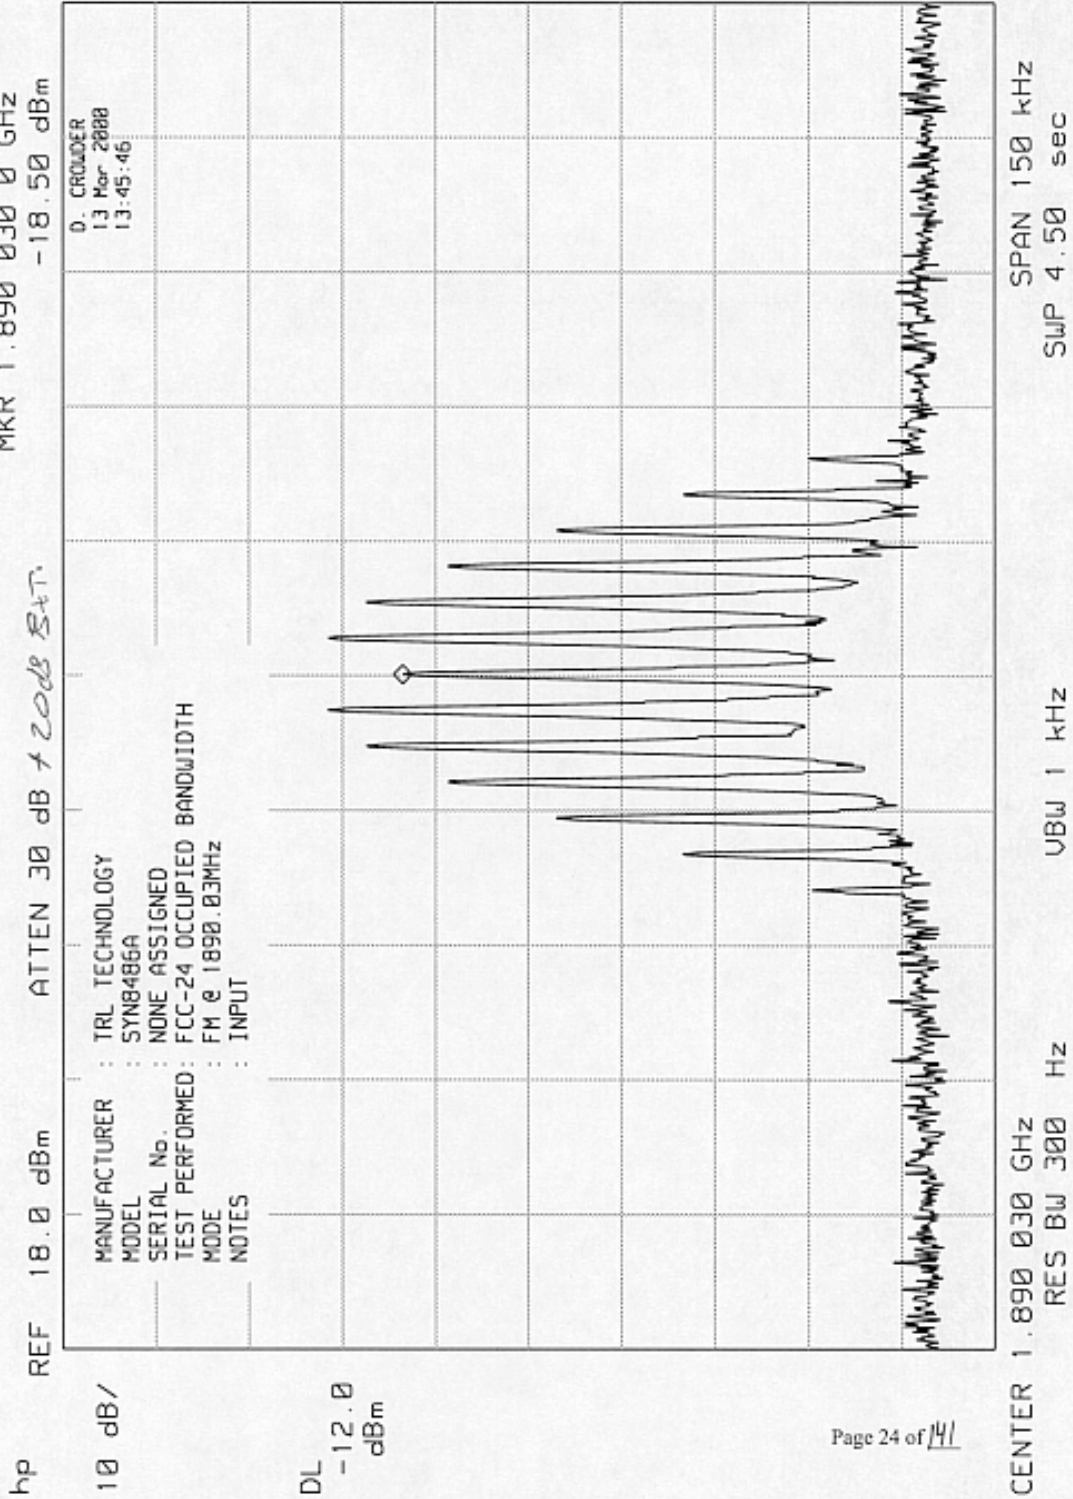

ELITE ELECTRONIC ENGINEERING CO

hp REF 18.0 dBm MKR 1.909 970 0 GHz  
-18.40 dBm

ATTEN 30 dB + 20dB EXT

10 dB/


MANUFACTURER : TRL TECHNOLOGY  
MODEL : SYN8486A  
SERIAL No. : NONE ASSIGNED  
TEST PERFORMED: FCC-24 OCCUPIED BANDWIDTH  
MODE : FM @ 1909.97MHz  
NOTES : INPUT

D. CROJDER  
13 Mar 2000  
13:44:21

DL -12.0  
dBm

Page 25 of 41

CENTER 1.909 970 GHz RES BW 300 Hz UBW 1 kHz SPAN 150 kHz SWP 4.50 sec

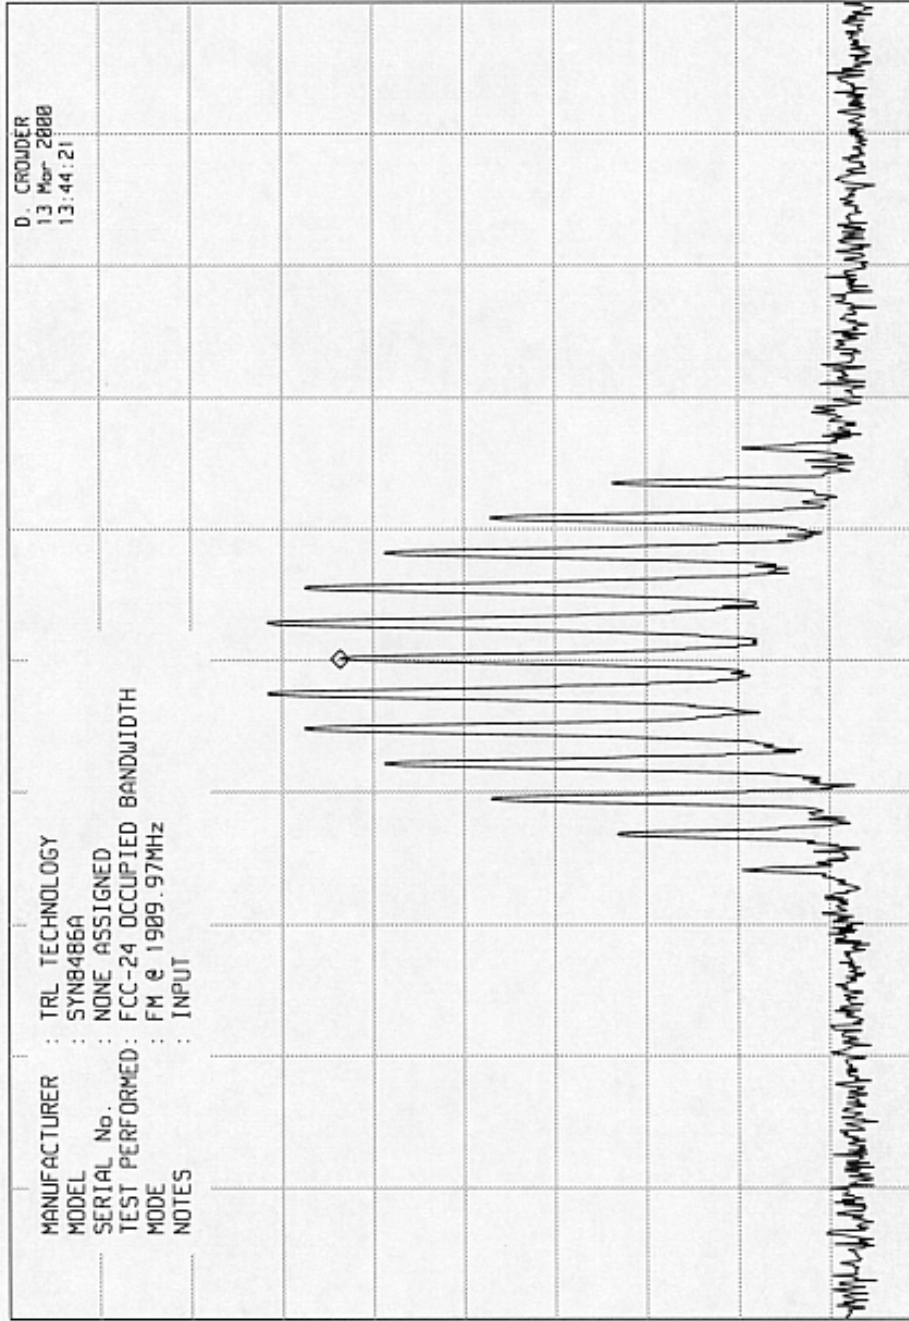

# ELITE ELECTRONIC ENGINEERING CO

h<sub>p</sub> REF 18.0 dBm MKR 1.850 029 4 GHz  
-45.60 dBm

ATTEN 30 dB + 40 dB EXT

MANUFACTURER : TRL TECHNOLOGY  
MODEL : SYN8486A  
SERIAL No. : NONE ASSIGNED  
TEST PERFORMED : FCC-24 OCCUPIED BANDWIDTH  
MODE : FM @ 1850.03MHz  
NOTES : FULL OUTPUT (15dB GAIN)

D. CROUDER  
13 Mar 2008  
13:26:12

10 dB/

DL -12.0  
dBm

30 kHz

40 dBc

25.5 kHz

CENTER 1.850 030 GHz  
RES BW 300 Hz

UBW 1 kHz

SPAN 150 kHz  
SWP 4.50 sec