

ELITE ELECTRONIC ENGINEERING INCORPORATED
1516 CENTRE CIRCLE
DOWNERS GROVE, ILLINOIS 60515-1082

ELITE PROJECT: 27841

DATES TESTED: June 28 and 29, 1999

TEST PERSONNEL: Daniel E. Crowder


TEST SPECIFICATION: Federal Communication Commission (FCC) Part 22
and TIA/EIA/IS-98-A

ENGINEERING TEST REPORT NO. 21810
MEASUREMENT OF RF INTERFERENCE FROM
A MODEL SYN8015A
SINGLE CARRIER 800MHz RF LINEAR COMPENSATOR

FOR: TRL Technologies
Hofmann Estates, IL

PURCHASE ORDER NO: 98-286

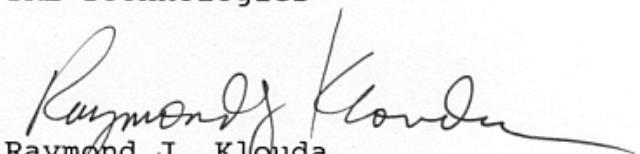
Report By:


Neil J. Hurley

Witnessed By:

Heip Lam
TRL Technologies

Approved By:


Raymond J. Klouda
Registered Professional
Engineer of Illinois - 44894

ENGINEERING TEST REPORT NO. 21810

ADMINISTRATIVE DATA AND SUMMARY OF TESTS

DESCRIPTION OF TEST ITEM: Single Carrier 800MHz RF Linear Compensator

MODEL NO: SYN8015A

SERIAL NO: None Assigned

MANUFACTURER: TRL Technologies

APPLICABLE SPECIFICATIONS: FCC Part 22

QUANTITY OF ITEMS TESTED: One (1)

TEST PERFORMED BY: ELITE ELECTRONIC ENGINEERING INCORPORATED
Radio Interference Consultants
Downers Grove, Illinois 60515

DATE RECEIVED: June 28, 1999

DATES TESTED: June 28 and 29, 1999

PERSONNEL (OPERATORS, OBSERVERS, AND CO-ORDINATORS):

CUSTOMER: Hiep Lam of TRL Technologies was present.

ELITE ELECTRONIC: Daniel E. Crowder

ELITE JOB NO.: 27841

ABSTRACT: The model SYN8015A Single Carrier 800MHz RF Linear Compensator complies with the technical requirements in FCC Part 22. See test results and data pages for more details.

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

TABLE OF CONTENTS

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
1.0	INTRODUCTION	4
1.1	DESCRIPTION OF TEST ITEM	4
1.2	PURPOSE	4
1.3	DEVIATIONS, ADDITIONS AND EXCLUSIONS	4
1.4	APPLICABLE DOCUMENTS	4
1.5	SUBCONTRACTOR IDENTIFICATION	5
1.6	LABORATORY CONDITIONS	5
2.0	TEST ITEM SETUP AND OPERATION	5
2.1	POWER INPUT	5
2.2	GROUNDING	5
2.3	PERIPHERAL EQUIPMENT	5
2.4	MODULATION	5
2.5	FREQUENCY SELECTION	6
2.6	RF POWER OUTPUT	6
3.0	TEST EQUIPMENT	6
3.1	TEST EQUIPMENT LIST	6
3.2	CALIBRATION TRACEABILITY	7
4.0	REQUIREMENTS, PROCEDURES AND RESULTS	7
4.1	RF POWER OUTPUT MEASUREMENTS	7
4.1.1	REQUIREMENTS	7
4.1.2	PROCEDURES	7
4.1.3	RESULTS	7
4.2	OCCUPIED BANDWIDTH MEASUREMENTS	8
4.2.1	REQUIREMENTS:	8
4.2.2	PROCEDURES	8
4.2.3	RESULTS	9
4.3	SPURIOUS EMISSIONS AT ANTENNA TERMINAL	9
4.3.1	REQUIREMENTS	9
4.3.2	PROCEDURES	10
4.3.3	RESULTS	11
4.4	FIELD STRENGTH OF SPURIOUS EMISSIONS	11
4.4.1	PRELIMINARY RADIATED MEASUREMENTS	11
4.4.1.1	REQUIREMENTS	11
4.4.1.2	PROCEDURES	11
4.4.1.3	RESULTS	12
4.4.2	FINAL RADIATED EMISSIONS	13
4.4.2.1	REQUIREMENTS	13
4.4.2.2	PROCEDURES	13
4.4.2.3	RESULTS OF OPEN FIELD RADIATED TEST	14
4.5	FREQUENCY STABILITY	14
4.5.1	REQUIREMENTS	14
5.0	CONCLUSION	14
6.0	CERTIFICATION	14
7.0	ENDORSEMENT DISCLAIMER	15
TABLE I	EQUIPMENT LIST	16

TOTAL NUMBER OF PAGES IN THIS DOCUMENT,
(INCLUDING DATA SHEETS): 70

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

Page 3 of 70

ENGINEERING TEST REPORT NO. 21810
MEASUREMENT OF RF INTERFERENCE FROM
A MODEL SYN8015A

SINGLE CARRIER 800MHZ RF LINEAR COMPENSATOR

1.0 INTRODUCTION:

1.1 DESCRIPTION OF TEST ITEM: During the period of June 28 and 29, 1999, a series of radio interference measurements were performed on a model SYN8015A Single Carrier 800MHZ RF Linear Compensator, (hereinafter referred to as the test item). No serial number was assigned to the test item. The tests were performed for TRL Technologies of Hoffman Estates, IL.

The test item is a single carrier RF linear compensator that operates in the 800MHZ Cellular bands, 869MHZ to 894MHZ and 835MHZ to 849MHZ. The test item has a rated gain of 10dB.

1.2 PURPOSE: The test series was performed to determine if the test item meets the technical requirements of the FCC Part 22 for 800MHZ Cellular Radio.

1.3 DEVIATIONS, ADDITIONS AND EXCLUSIONS: There were no deviations, additions to, or exclusions from the test specification during this test series.

1.4 APPLICABLE DOCUMENTS: The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 22, dated 1 October 1998
- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 2, dated 1 October 1998
- ANSI C63.4-1992, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"

ENGINEERING TEST REPORT NO. 21810

- TIA/EIA/IS-98-A, "Recommended Minimum Performance standards for Dual-Mode Wideband Spectrum Cellular Mobile Stations", dated July 1996

1.5 SUBCONTRACTOR IDENTIFICATION: This series of tests was performed by Elite Electronic Engineering Incorporated, of Downers Grove, Illinois. The laboratory is accredited by the National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP). NVLAP Lab Code: 100278-0.

1.6 LABORATORY CONDITIONS: The temperature at the time of the test was 21°C and the relative humidity was 41%.

2.0 TEST ITEM SETUP AND OPERATION:

2.1 POWER INPUT: The test item obtained 12VDC from a Tektronix PS280 DC Power Supply through two, 1/2 meter long, unshielded leads.

2.2 GROUNDING: Since the test item was powered with 12VDC from a DC power supply, it was ungrounded during the tests.

2.3 PERIPHERAL EQUIPMENT: The following peripheral equipment was submitted with the test item:

<u>ITEM</u>	<u>DESCRIPTION</u>
HP Signal Generator	M/N E4432B, S/N VS38440973
Ophir Amplifier	M/N GRF5064, S/N 1006
HP Power Meter	M/N 437B, S/N 3110A05097, Next Cal 05/27/00

The output of the signal generator was routed through the amplifier. The output of the amplifier was connected to the test item through a 1 meter long coaxial cable. The power meter was connected to the test item through a 1 meter long coaxial cable.

2.4 MODULATION: The test signal was modulated with three different representative types of modulations: (1) Analog - AMPS 30kHz; (2) Digital I/Q modulations - TDMA 30kHz; CDMA 1.23 MHz. The

ENGINEERING TEST REPORT NO. 21810

input signals were supplied from an HP M/N E4432B Signal Generator.

The RP Power Output, the Occupied Bandwidth and the Spurious Emissions at Antenna Terminal tests were performed with AMPS, TDMA, and CDMA modulated input signals. The preliminary Field Strength of Spurious Emissions tests were performed with CW, AMPS, TDMA and CDMA modulated input signals. The final Field Strength of Spurious Emissions tests were performed with CW and CDMA modulated input signals.

2.5 FREQUENCY SELECTION: One test frequency was selected for each frequency band. The specified channel spacings for each modulation are shown below:

Modulation	Channel Spacing
AMPS	30kHz
TDMA	30kHz
CDMA	1.23MHz

The specific test frequencies are designated as follows:

Band	Frequency (MHz)
Uplink	836.5
Downlink	881.5

2.6 RP POWER OUTPUT: The input levels were adjusted to reach the rated output levels shown below:

Modulation	Rated Power (dBm)	Rated Power (Watts)
AMPS	28	0.63
TDMA	31.2	1.3
CDMA	29.5	0.89

3.0 TEST EQUIPMENT:

3.1 TEST EQUIPMENT LIST: A list of the test equipment used can be found on Table I. All equipment was calibrated per the instruction manuals supplied by the manufacturer.

3.2 CALIBRATION TRACEABILITY: Test equipment is maintained and calibrated on a regular basis. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

4.0 REQUIREMENTS, PROCEDURES AND RESULTS:

4.1 RP POWER OUTPUT MEASUREMENTS:

4.1.1 REQUIREMENTS: In accordance with paragraph 22.913, the effective radiated power (ERP) level is allowed up to 7 watts for mobile transmitters.

4.1.2 PROCEDURES: The test item was adjusted for the rated gain. The test item was operated to measure the output for the uplink path.

(a) The input signal was set to 836.5MHz.

(b) The input signal was AMPS modulated.

(c) The HP 437B Power Meter was connected to the output of the test item and the output of the test item was monitored.

(d) The amplitude of the input signal was adjusted until the rated output level was measured. The output power level was measured and recorded.

(e) Steps (b) through (d) were repeated with the input signal TDMA modulated.

(f) Steps (b) through (d) were repeated with the input signal CDMA modulated.

4.1.3 RESULTS: The output power measurements are presented on data page 17. The power outputs achieved for the uplink path were 0.63 watts (AMPS Modulation), 1.3 watts (TDMA Modulation) and 0.89 watts (CDMA Modulation). The remainder of the tests were performed at these power levels. The power output complies with the FCC requirements.

ENGINEERING TEST REPORT NO. 21810

The ERP limit does not apply to the power output alone, but the combination of the power output and the antenna. Compliance to the power output will be based on the system configuration. Therefore, the ERP requirement cannot be directly applied to the test item.

4.2 OCCUPIED BANDWIDTH MEASUREMENTS:

4.2.1 REQUIREMENTS: For AMPS and TDMA modulations, in accordance with paragraph 22.917(d), the mean power of any emission shall be attenuated below the unmodulated carrier power (P) in accordance with the following schedule:

- (1) On any frequency removed from the carrier frequency by more than 20kHz but not more than 45kHz: At least 26dB
- (2) On any frequency removed from the carrier frequency by more than 45kHz, up to the first multiple of the carrier frequency: At least 60dB or $43 + 10 \log (P)$ dB, whichever is the lesser attenuation.

For CDMA modulation, in accordance with paragraph 10.5.1.3 of the TIA/EIA/IS-98-A specification, the mean power of any emission shall be attenuated below the unmodulated carrier power (P) in accordance with the following schedule:

- (1) For offset frequencies greater than 900kHz from the CDMA Channel center frequency: At least 42dB
- (2) For offset frequencies greater than 1.98MHz from the CDMA Channel center frequency: At least 54dB

4.2.2 PROCEDURES:

The test was performed using each of the modulation types listed in paragraph 2.2 (AMPS, TDMA, CDMA).

(a) The input signal was set to 836.5MHz. The input signal level was adjusted to provide the rated level at the test item output. The reference level was recorded.

(b) The input signal was AMPS modulated.

ENGINEERING TEST REPORT NO. 21810

(c) A spectrum analyzer was connected to the output of the test item. With a bandwidth of the spectrum analyzer set to 300 Hz, the output of the test item was measured and recorded.

(d) The input signal from the signal generator was measured with the spectrum analyzer and recorded over the same frequency range.

(e) The modulation was changed to TDMA and steps (c) and (d) were repeated separately with the input signal set to 836.5MHz.

(f) The modulation was changed to CDMA and steps (c) and (d) were repeated separately with the input signal set to 836.5MHz. The bandwidth of the spectrum analyzer was set to 30kHz.

4.2.3 RESULTS: The plots of the occupied bandwidth measured with the AMPS modulation of the carrier are presented on data pages 18 through 20. The plots of the occupied bandwidth measured with the TDMA modulation of the carrier are presented on data pages 21 through 23. The plots of the occupied bandwidth measured with the CDMA modulation of the carrier are presented on data pages 24 through 26.

The limits, shown on the plots, are referenced to the power measured from the unmodulated carrier.

As can be seen from the data, the test item output met the occupied bandwidth requirements with the AMPS, TDMA and CDMA modulations of the carrier. The sideband emissions measured at the test item output were similar to the sideband emissions measured from the input signals.

4.3 SPURIOUS EMISSIONS AT ANTENNA TERMINAL:

4.3.1 REQUIREMENTS: This test determines whether the test item produces excessive spurious emissions.

In accordance with paragraph 22.917(e), on any frequency twice or more than twice the fundamental frequency, the spurious emissions

ENGINEERING TEST REPORT NO. 21810

and intermodulation products shall be attenuated below the unmodulated carrier power (P) by at least $43 + 10 \log(P)$ dB. This requirement translates to a field strength limit of -13dBm (ERP). The peak power of the emissions shall be measured from 30MHz up to the 10th harmonic of the fundamental frequency.

For CDMA modulation, the mean power of any emission shall be attenuated below the unmodulated carrier power (P) in accordance with the following schedule:

- (1) Outside the cellular band (824-849MHz), the attenuation shall be at least $43 + 10 \log(\text{mean output power in watts})$ dB.

4.3.2 PROCEDURES: In general, this test will measure spurious emissions at the antenna terminals. The test was performed using each of the modulation types listed in paragraph 2.2 (AMPS, TDMA, CDMA).

- (a) The input signal was set to 836.5MHz. The input signal level was adjusted to provide the rated level at the test item output.

- (b) The input signal was AMPS modulated.

- (c) A spectrum analyzer was connected to the output of the test item. The frequency span was adjusted to cover 30 MHz up to 1 GHz. With a bandwidth of the spectrum analyzer set to 100 kHz, the output of the test item was measured and recorded.

- (d) The frequency span was adjusted to cover 824 MHz up to 849 MHz (cellular band). With a bandwidth of the spectrum analyzer set to 30 kHz, the output of the test item was measured and recorded.

- (e) The frequency span was adjusted to cover 1 GHz up to 2 GHz. With a bandwidth of the spectrum analyzer set to 1 MHz, the output of the test item was measured and recorded.

- (f) The frequency span was adjusted to cover 2 GHz up to 10 GHz.

ENGINEERING TEST REPORT NO. 21810

With a bandwidth of the spectrum analyzer set to 1 MHz, the output of the test item was measured and recorded. This range covers up through the 10th harmonic.

(g) Steps (e) through (f) were repeated on the input signal from the signal generator.

(h) The modulation was changed to TDMA and steps (c) through (f) were repeated separately with the input signal set to 836.5MHz. The frequency span was adjusted to cover 869 MHz up to 894 MHz (cellular band) for step (d).

(i) The modulation was changed to CDMA and steps (c) through (f) were repeated separately with the input signal set to 836.5MHz.

4.3.3 RESULTS: The plots of the antenna conducted output measurements are presented on data pages 27 through 50. As can be seen from the data, the test item did not produce spurious emissions in excess of the -13 dBm limit.

4.4 FIELD STRENGTH OF SPURIOUS EMISSIONS:

4.4.1 PRELIMINARY RADIATED MEASUREMENTS:

4.4.1.1 REQUIREMENTS: Because emission levels in the open field may be masked by interference from sources other than the test item, preliminary radiated measurements are first performed in the low ambient environment of a shielded enclosure. The radiated emissions from the test item were first measured using peak detection. This data was then automatically plotted. The frequencies with significant emission levels were measured in the open field.

4.4.1.2 PROCEDURES: All preliminary tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is

installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4 1992 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All power lines and signal lines entering the enclosure pass through filters on the enclosure wall. The power line filters prevent extraneous signals from entering the enclosure on these leads.

The test was performed using each of the modulation types listed in paragraph 2.2 (AMPS, TDMA, CDMA) and CW.

(a) The preliminary measurements were performed with the test item operating with an input signal (uplink) at 836.5MHz, with CW modulation. The broadband measuring antenna was positioned at a 1 meter distance from the test item. The frequency range from 30MHz to 10GHz was investigated. The readings were taken with a peak detector function and recorded.

(b) The modulation was changed to AMPS and step (a) was repeated separately with the input signal (uplink) set to 836.5MHz.

(c) The modulation was changed to TDMA and step (a) was repeated separately with the input signal (uplink) set to 836.5MHz.

(d) The modulation was changed to CDMA and step (a) was repeated separately with the input signal (uplink) set to 836.5MHz.

(e) Steps (a) through (d) were repeated separately with the input signal (downlink) set to 881.5MHz.

4.4.1.3 RESULTS: The preliminary plots are presented on data pages 51 through 66. Factors for the antenna and distance correction were added to the data before it was plotted.

This data is only presented for a reference, and is not used as

official data. All significant radiated emissions were subsequently measured at an open field test site.

4.4.2 FINAL RADIATED EMISSIONS:

4.4.2.1 REQUIREMENTS: In accordance with paragraph 22.917(e), on any frequency twice or more than twice the fundamental frequency, the emissions shall be attenuated below the unmodulated carrier power (P) by at least $43 + 10 \log(P)$ dB. This requirement translates to a limit of -13dBm. The peak power of the emissions shall be measured from 30MHz up to the 10th harmonic of the fundamental frequency.

4.4.2.2 PROCEDURES: Final open field measurements were performed at Elite's open field test site located in Downers Grove, Illinois. The open field test site is located in a clear area and is equipped with a 1/4-inch wire mesh ground plane.

The final open field emission test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in 50 ohms for Uplink tests and the phone output was terminated in 50 ohms for the Downlink tests.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization.
- e) The maximum meter reading was recorded. Measurement BW was 1 MHz and Video of 3MHz. Peak readings were recorded. No averaging methods or corrections were applied.
- f) Measurements were performed with the input signal modulated with CW and CDMA.
- g) Measurements were performed separately at each frequency used during the preliminary measurements.

The equivalent power into a dipole antenna was calculated from

ENGINEERING TEST REPORT NO. 21810

the field intensity levels measured at 3 meters using the equation shown below:

$$P_g = E^2 4\pi d^2 / 120\pi = E^2 d^2 / 30$$

where P = power in watts
 g = arithmetic gain of transmitting antenna over isotropic radiator.
 E = maximum field strength in volts/meter
 d = measurement distance in meter

Using a dipole gain of 1.67 or 2.2 dB and a test distance of 3 meters, this equation reduces to:

$$P(\text{dBm}) = E(\text{dBuV/m}) - 97.2\text{dB}$$

4.4.2.3 RESULTS OF OPEN FIELD RADIATED TEST: The final open field radiated levels are presented on data pages 67 through 70. The radiated emissions were measured through the 10th harmonic. All emissions measured from the test item were within the specification limits. The emissions level closet to the limit occurred at 4182.5MHz, with the transmit frequency at 836.5MHz and CDMA modulation. The emissions level at this frequency was 16.7dB within the limit.

4.5 FREQUENCY STABILITY:

4.5.1 REQUIREMENTS: This requirement does not apply to a Single Carrier 800MHz RF Linear Compensator.

5.0 CONCLUSION:

It was found that the TRL Technologies model SYN8015A Single Carrier 800MHz RF Linear Compensator, complies with the RF Power Output, the Occupied Bandwidth, the Spurious Emissions at Antenna Terminal and the Field Strength of Spurious Emissions requirements of the FCC Part 22 and 2 and TIA/EIA/IS-98-A. The Frequency Stability requirements were deemed to be not applicable.

6.0 CERTIFICATION:

Elite Electronic Engineering incorporated certifies that the

ENGINEERING TEST REPORT NO. 21810

information contained in this report was obtained under conditions which meet or exceed those specified in the test specification.

The data presented in this test report pertains only to the test item at the test date as operated by TRL Technologies personnel. Any electrical or mechanical modification made to the test item subsequent to the specified test date will serve to invalidate the data and void this certification.

7.0 ENDORSEMENT DISCLAIMER:

This report must not be used to claim product endorsement by NVLAP or any agency of the US Government.

ENGINEERING TEST REPORT NO. 21810

TABLE 1: TEST EQUIPMENT LIST

ELITE ELECTRONIC ENG. INC.

Page: 1

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Cal Inv	Due Date
Equipment Type: ACCESSORIES, MISCELLANEOUS								
XPQ0	HIGH PASS FILTER	K&L MICROWAVE	41H30-1804/T	001	1.8-10GHZ	05/14/99	12	05/14/00
XZG1	ATTENUATOR/SWITCH DRIVER	HEWLETT PACKARD	11713A	3439A02724	---		N/A	
Equipment Type: AMPLIFIERS								
APK1	PRE-AMPLIFIER	HEWLETT PACKARD	8449B	3008A01243	1-26.5GHZ	03/04/99	12	03/04/00
Equipment Type: ANTENNAS								
NWH0	DOUBLE RIDGED WAVEGUIDE	TENSOR	4105	2081	1-12.4GHZ	08/26/98	12	08/26/99
Equipment Type: ATTENUATORS								
T1E1	10DB, 25W ATTENUATOR	WEINSCHEL	46-10-43	AU1883	DC-18GHZ	02/10/99	12	02/10/00
T2D8	20DB, 25W ATTENUATOR	WEINSCHEL	46-20-43	AY9247	DC-18GHZ	02/10/99	12	02/10/00
Equipment Type: CONTROLLERS								
CDG3	COMPUTER	HEWLETT PACKARD	D7949T	US91605918	---		N/A	
Equipment Type: PRINTERS AND PLOTTERS								
HRG2	LASERJET 2100XI	HEWLETT PACKARD	C4170A	USCD047796	---		N/A	
Equipment Type: RECEIVERS								
RACD	RF PRESELECTOR	HEWLETT PACKARD	85685A	3010A01205	20HZ-2GHZ	01/29/99	12	01/29/00
RAE5	SPECTRUM ANALYZER	HEWLETT PACKARD	8566B	2532A02136		05/27/99	12	05/27/00

Cal. Interval: Listed in Months I/O: Initial Only N/A: Not Applicable

Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

ENGINEERING TEST REPORT NO. 21810

DATA SHEET

MANUFACTURER : TRL Technologies
TEST ITEM : Single Carrier 800MHz RF Linear Compensator
MODEL NO. : SYN8015A
SPECIFICATION : FCC-22
TEST DESCRIPTION : RF POWER OUTPUT
TEST EQUIPMENT : See Table I
DATE TESTED : June 29, 1999

FREQUENCY MHz	POWER READING dBm	Watts
<u>AMPS Modulation</u> 836.5	28	0.63
<u>TDMA Modulation</u> 836.5	31.2	1.3
<u>CDMA Modulation</u> 836.5	29.5	0.89

CHECKED BY: 