





FR1 n26 / 20MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

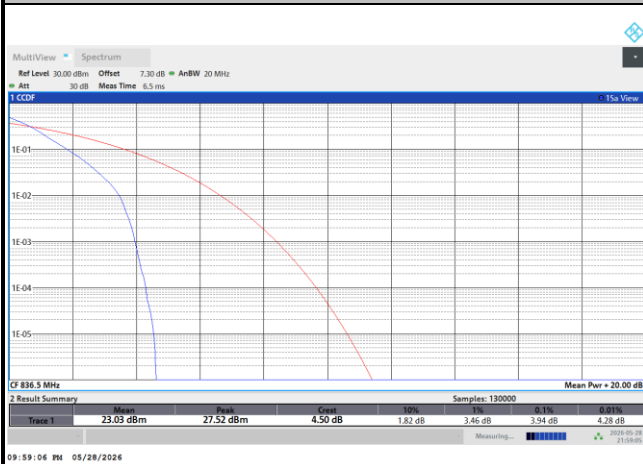


QPSK

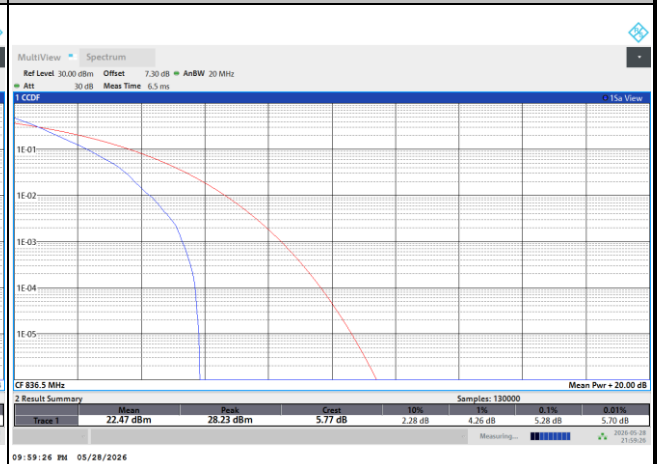


16QAM

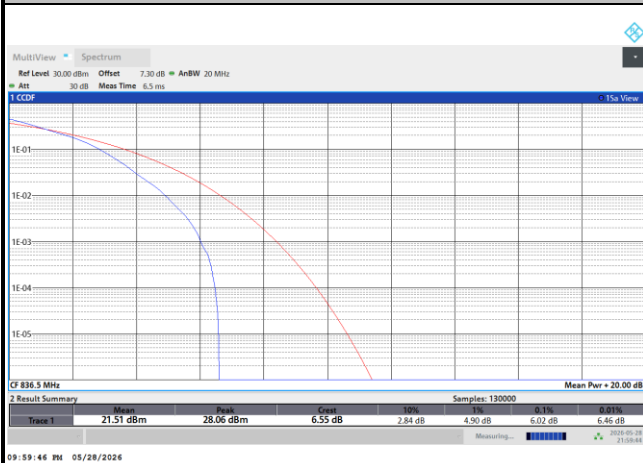

64QAM

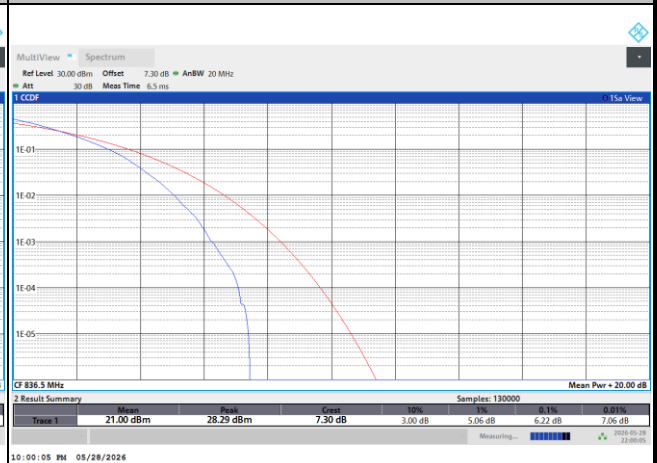

256QAM

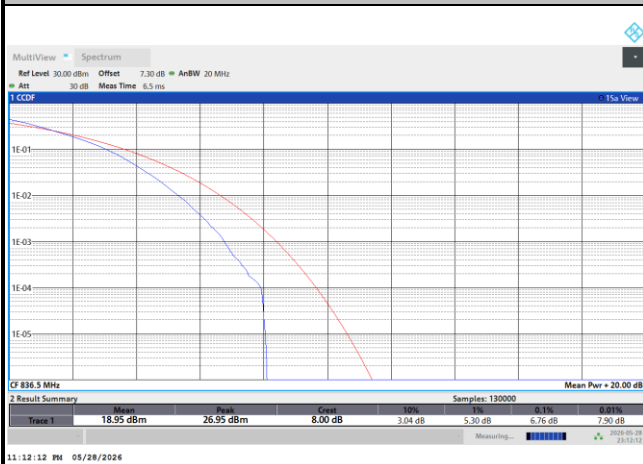


**26dB Bandwidth**

Mode	FR1 n26 : 26dB BW(MHz) / DFT-S OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK
Middle CH	5.13	5.15	9.76	9.90	14.52	14.62	19.36	19.45
Mod.	16QAM		16QAM		16QAM		16QAM	
Middle CH	5.19		9.84		14.52		19.37	




FR1 n26 / 5MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

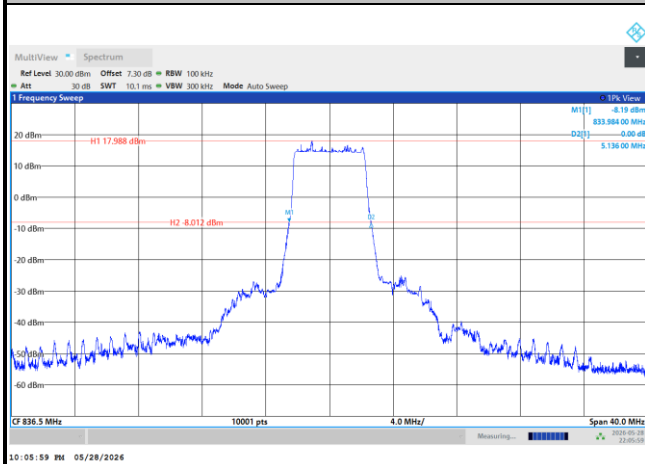


10:05:59 PM 05/28/2026

QPSK

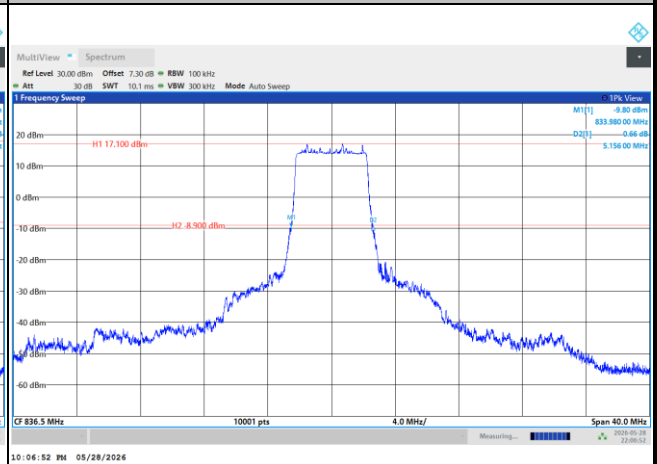

10:06:52 PM 05/28/2026

16QAM

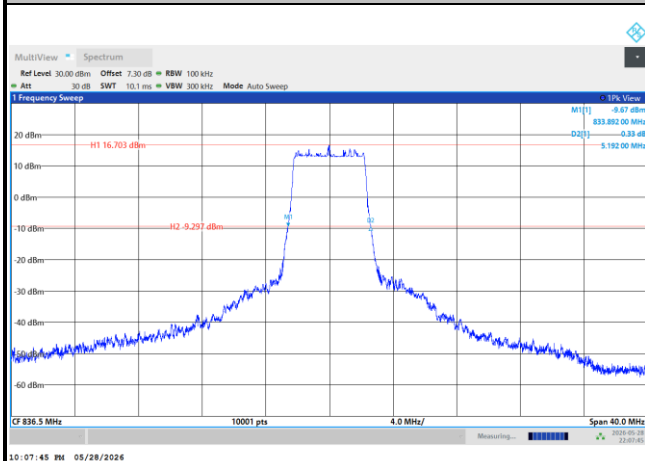


10:07:45 PM 05/28/2026




FR1 n26 / 10MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

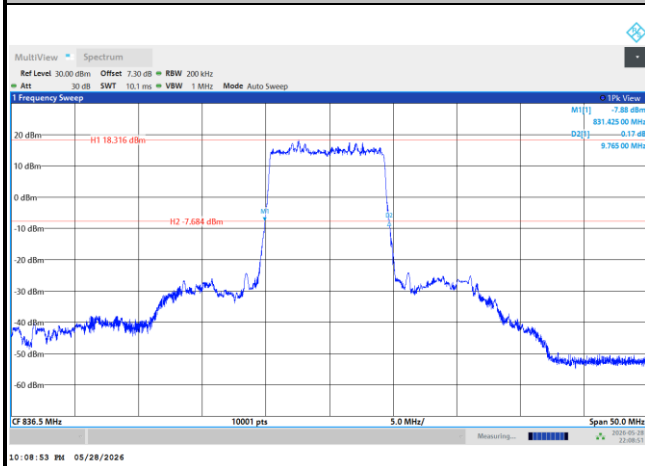

QPSK

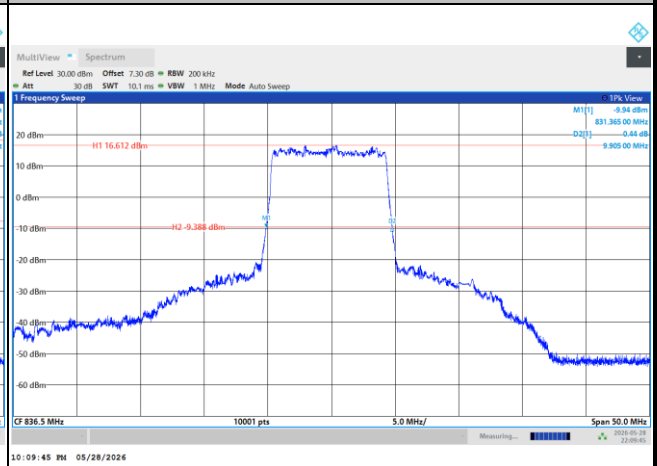


16QAM

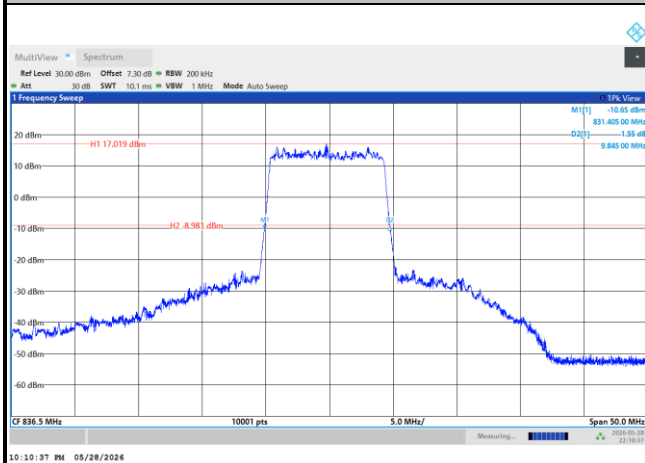




FR1 n26 / 15MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

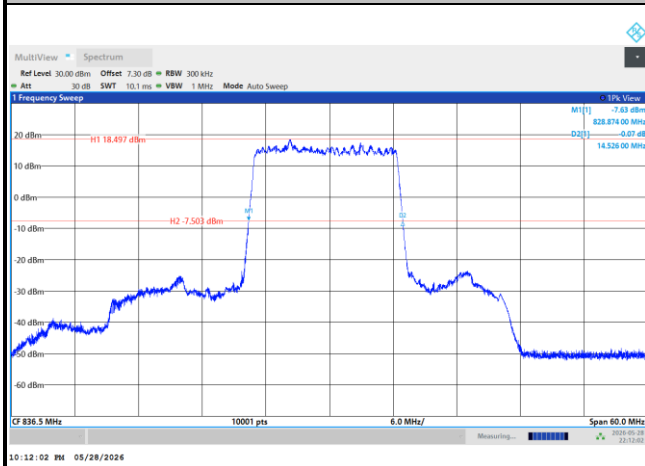

QPSK

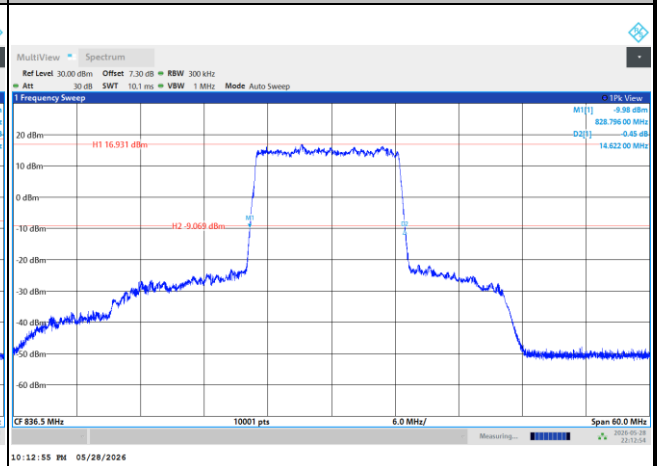


16QAM

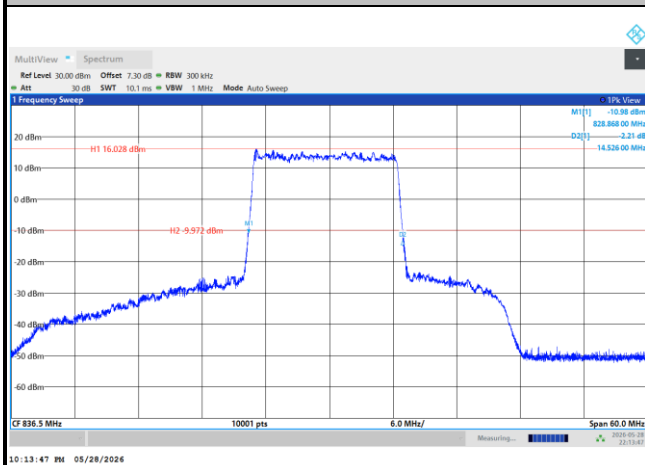




FR1 n26 / 20MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

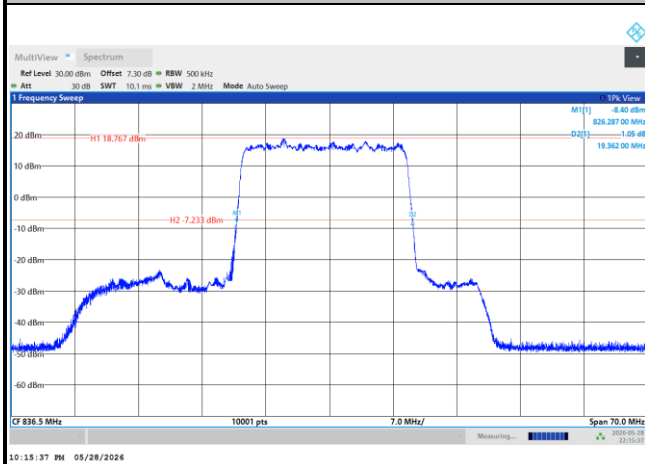

QPSK

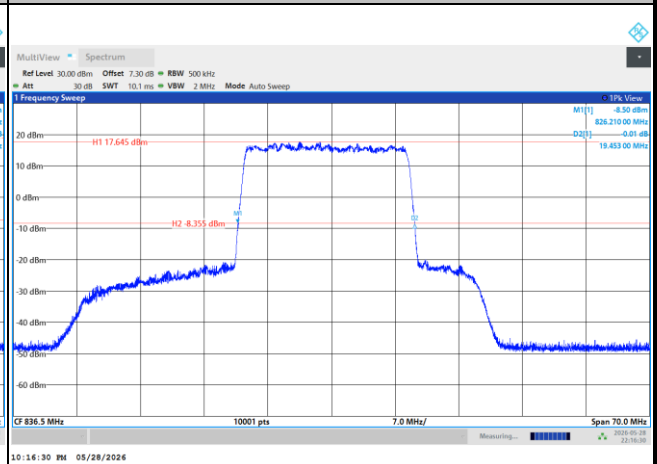

16QAM

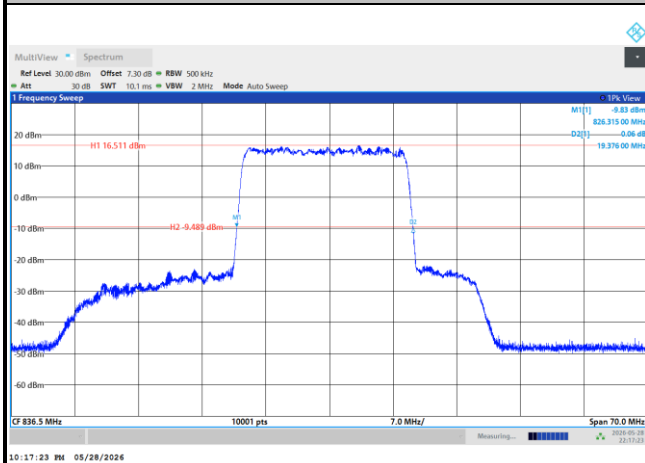


**Occupied Bandwidth**

Mode	FR1 n26 : 99%OBW(MHz) / DFT-S OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK
Middle CH	4.49	4.50	8.95	8.99	13.48	13.48	17.98	17.94
Mod.	16QAM		16QAM		16QAM		16QAM	
Middle CH	4.51		8.99		13.52		17.94	




FR1 n26 / 5MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

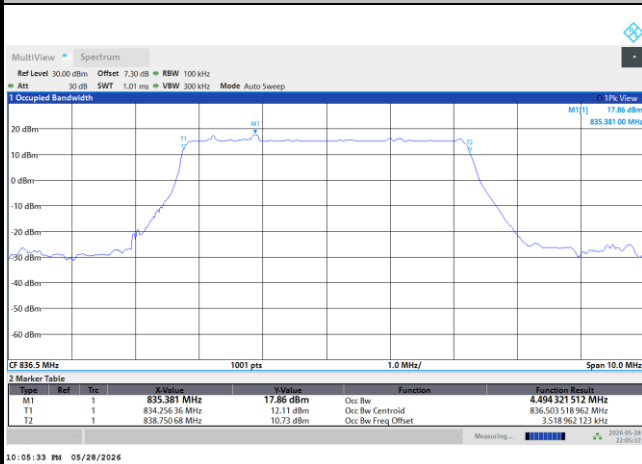

QPSK

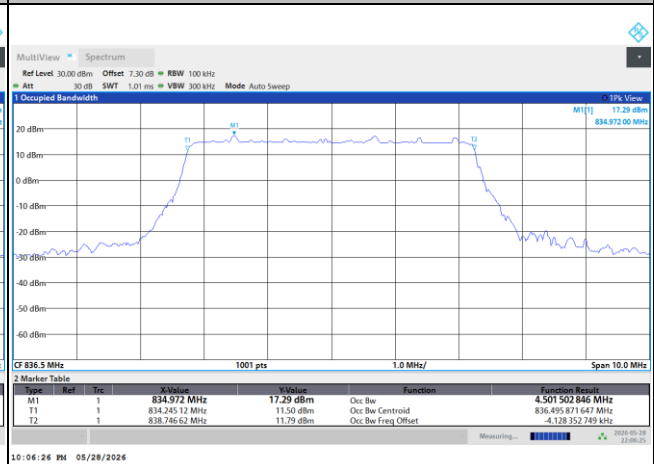


16QAM

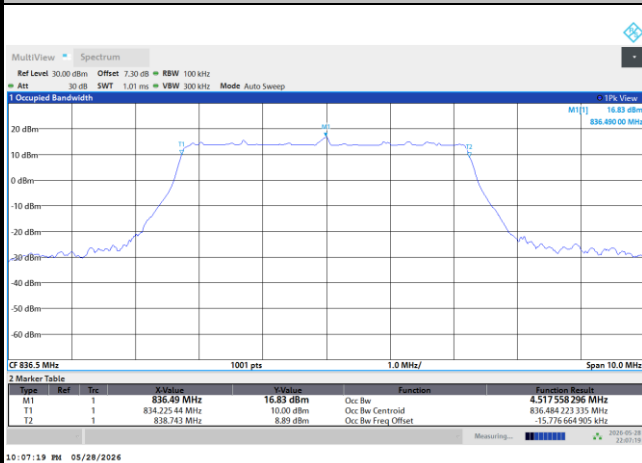




FR1 n26 / 10MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

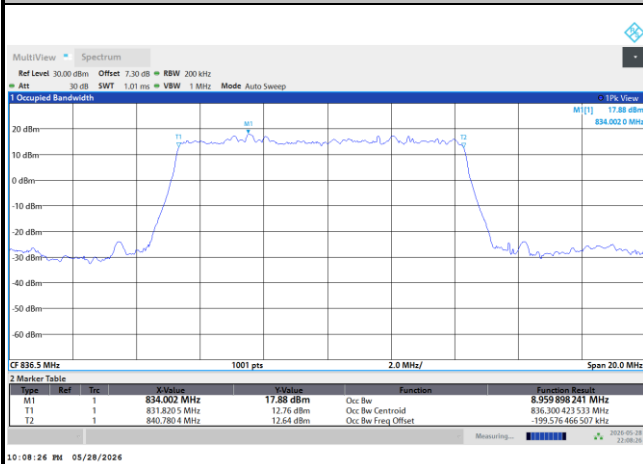

QPSK

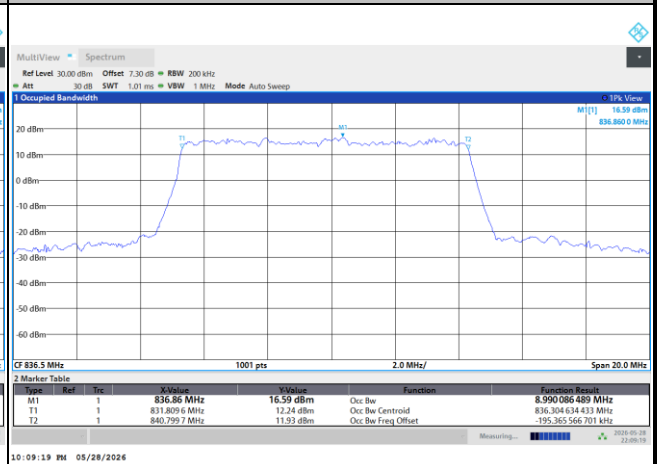


16QAM

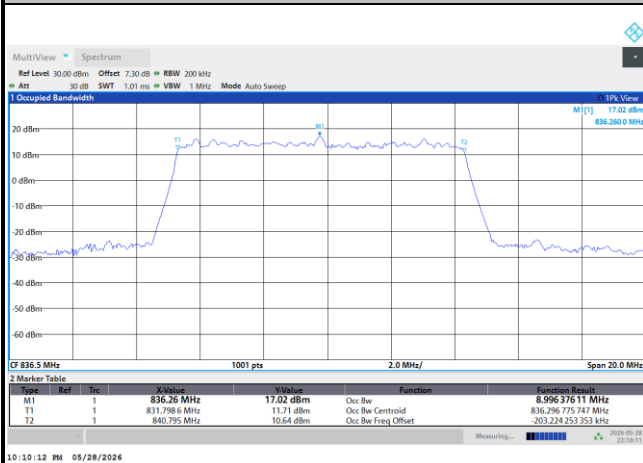




FR1 n26 / 15MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

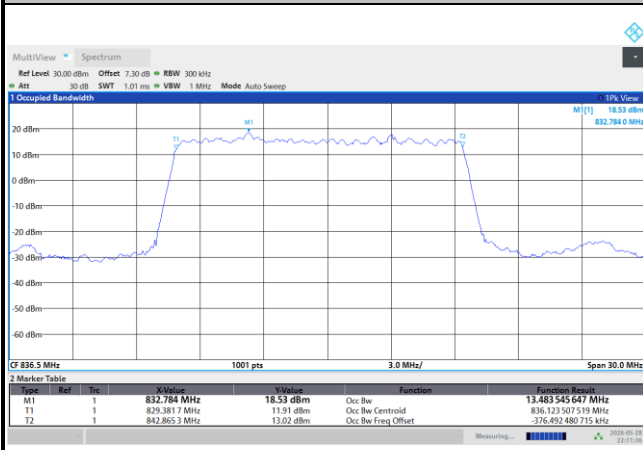

QPSK

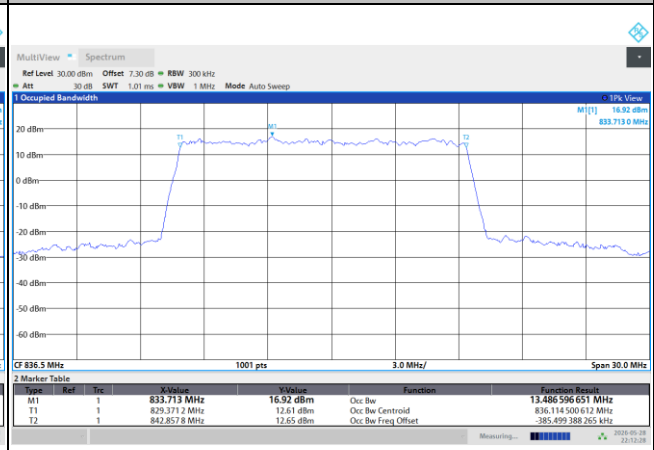


16QAM

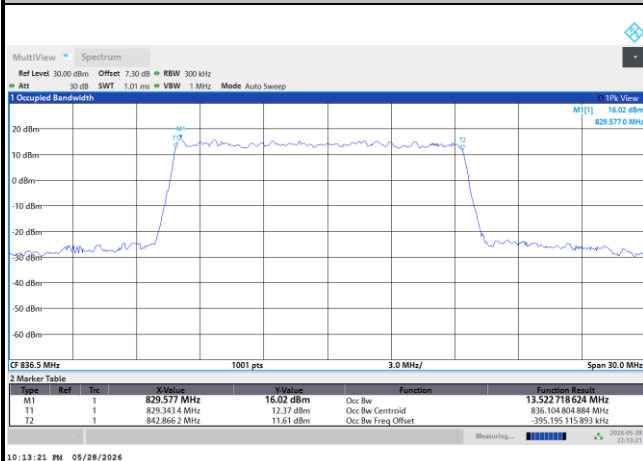




FR1 n26 / 20MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

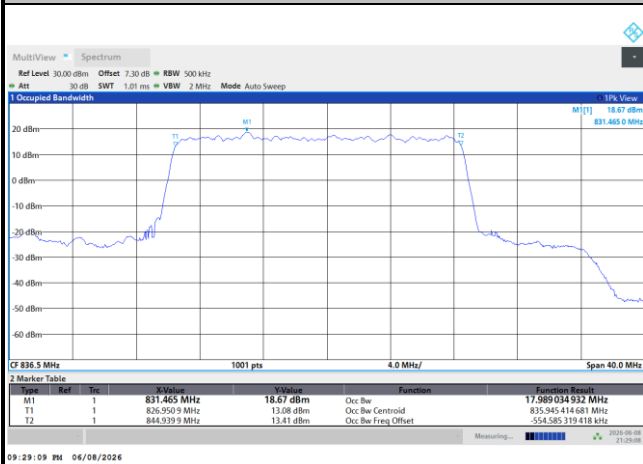

QPSK

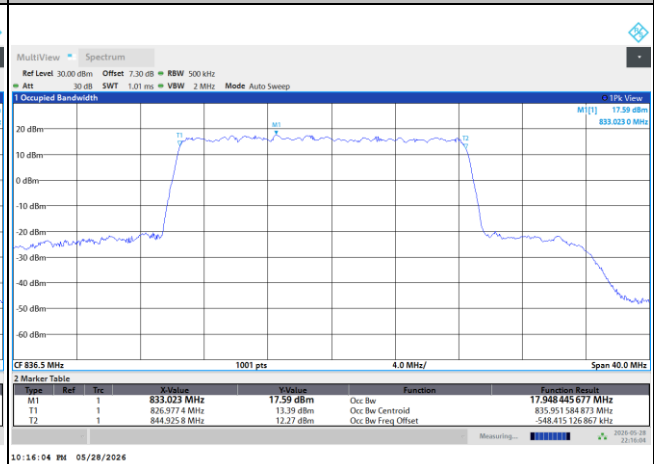

16QAM

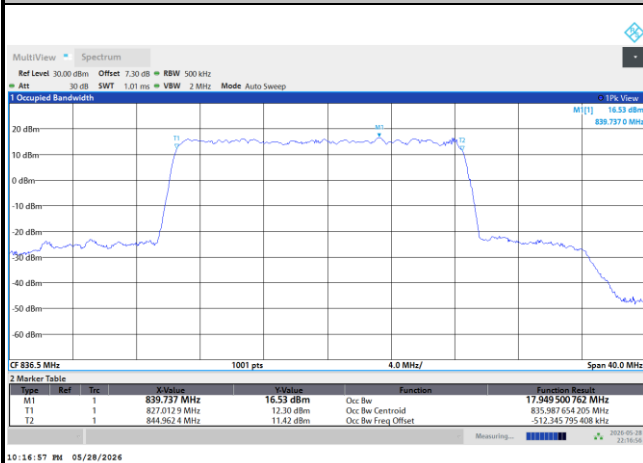





Conducted Band Edge

FR1 n26 / 5MHz / DFT-S OFDM / PI/2 BPSK



Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

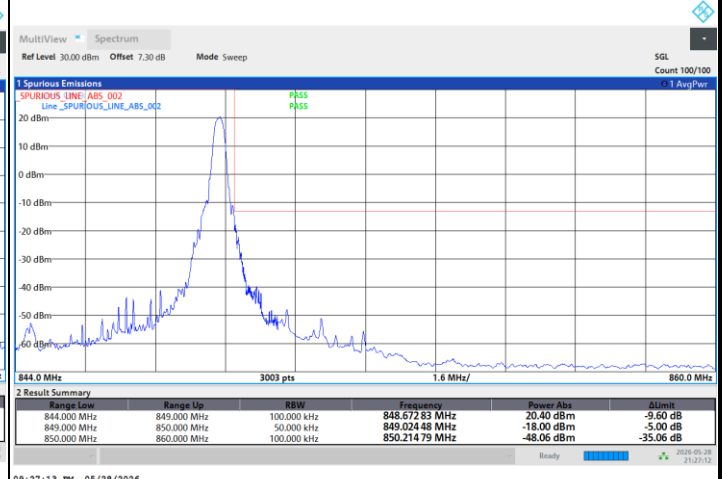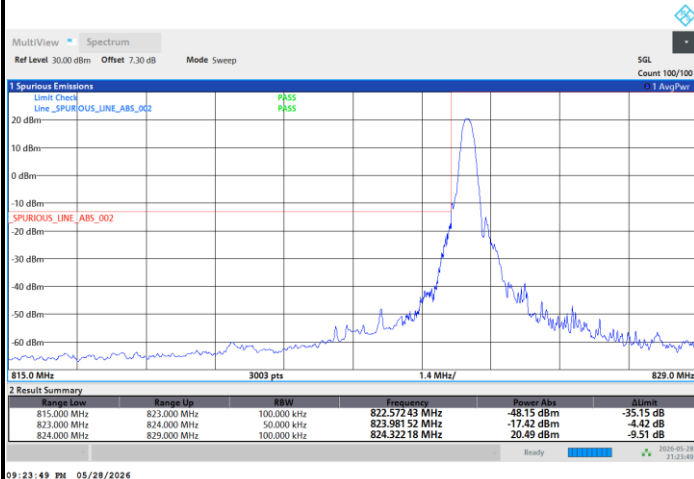

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

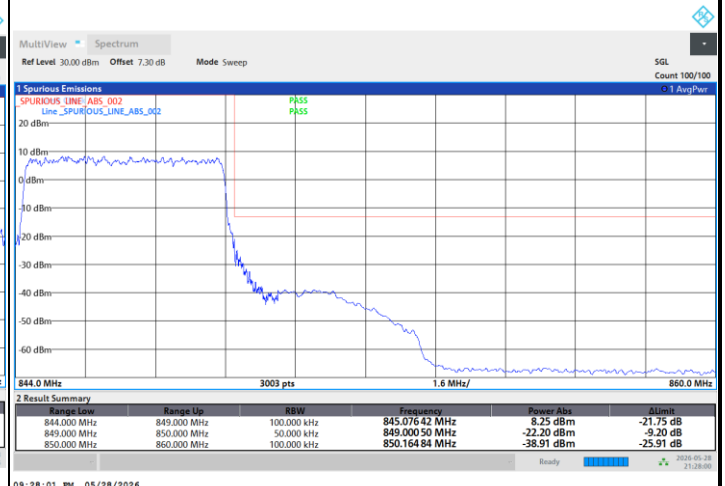
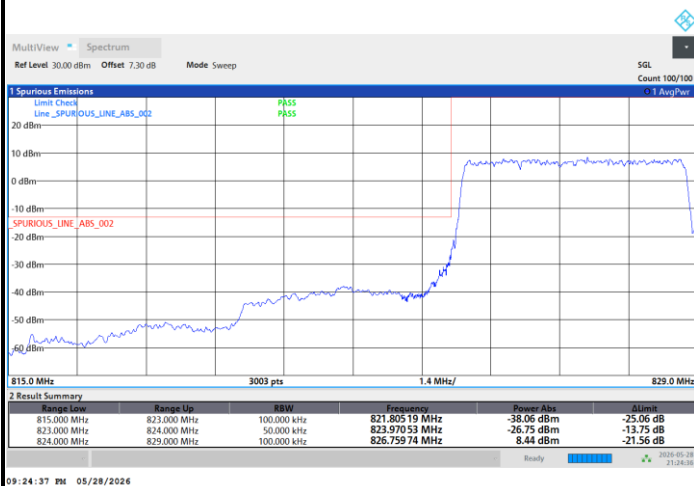




FR1 n26 / 5MHz / DFT-S OFDM / QPSK



Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

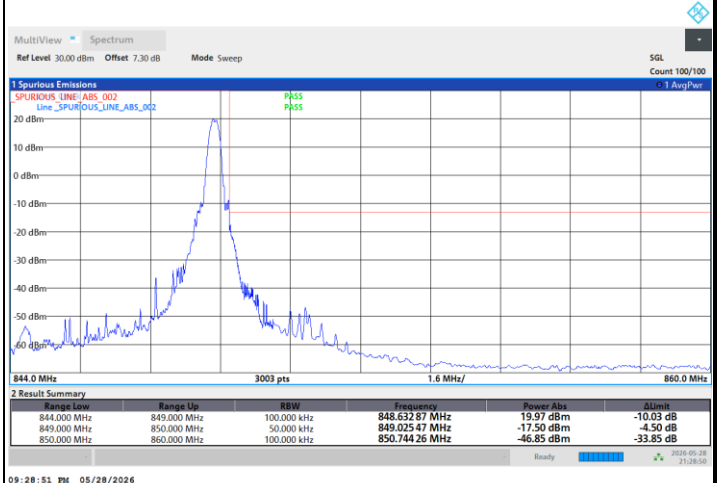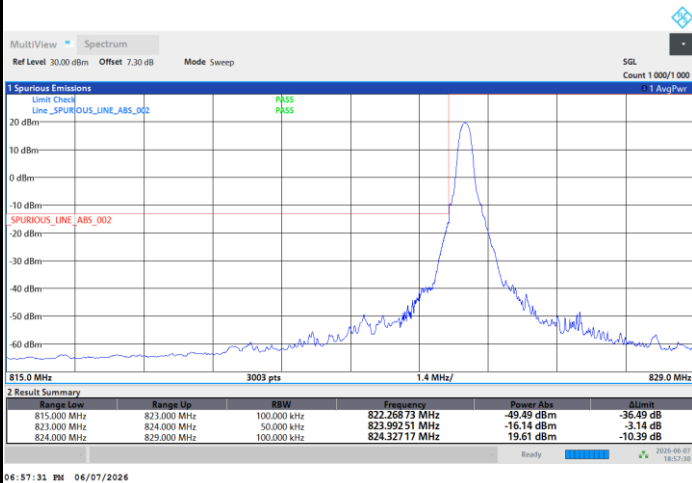

Lowest Band Edge / Full RB


Highest Band Edge / Full RB

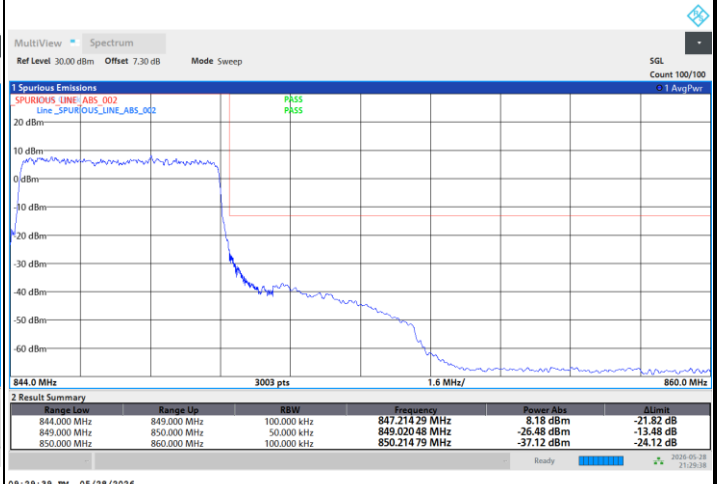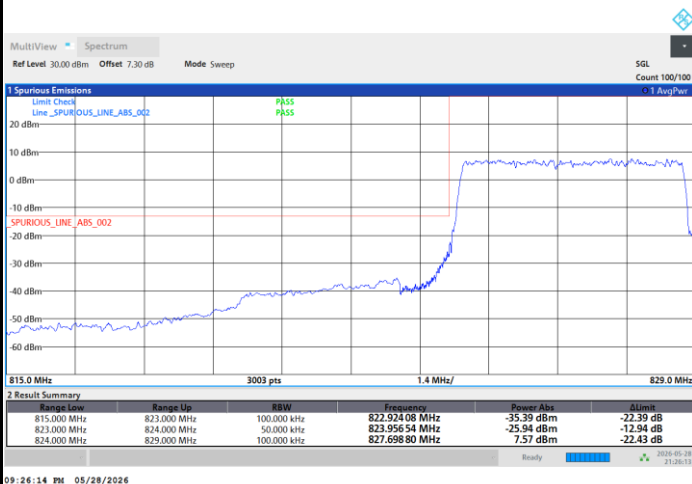




FR1 n26 / 10MHz / DFT-S OFDM / PI/2 BPSK

Lowest Band Edge / Full RB

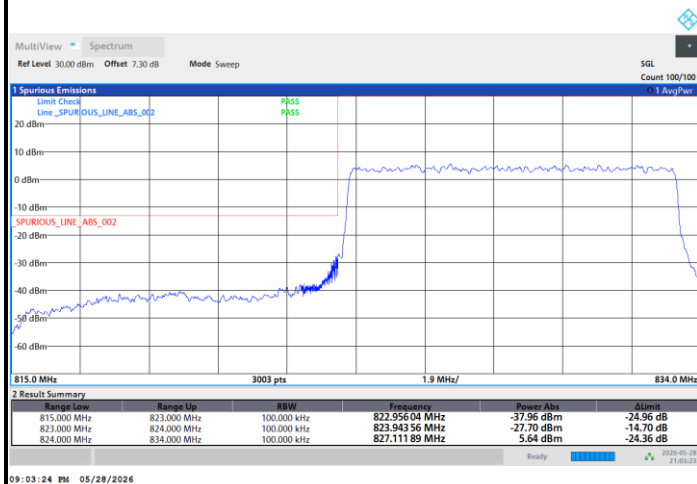


Highest Band Edge / Full RB

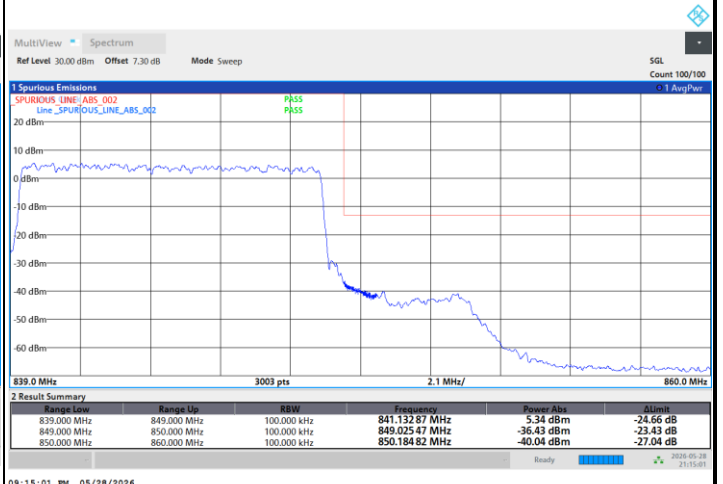


FR1 n26 / 10MHz / DFT-S OFDM / QPSK

Lowest Band Edge / Full RB

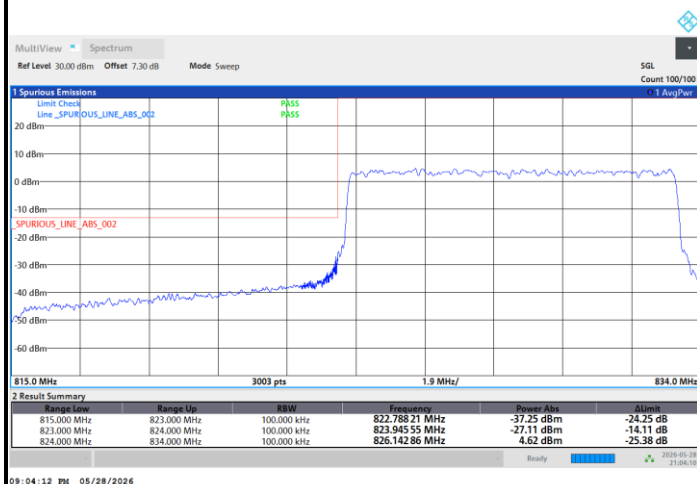


Highest Band Edge / Full RB

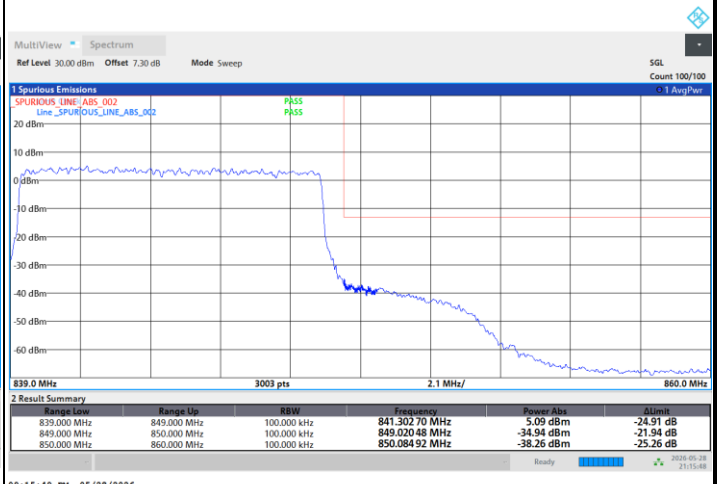




FR1 n26 / 15MHz / DFT-S OFDM / PI/2 BPSK

Lowest Band Edge / Full RB

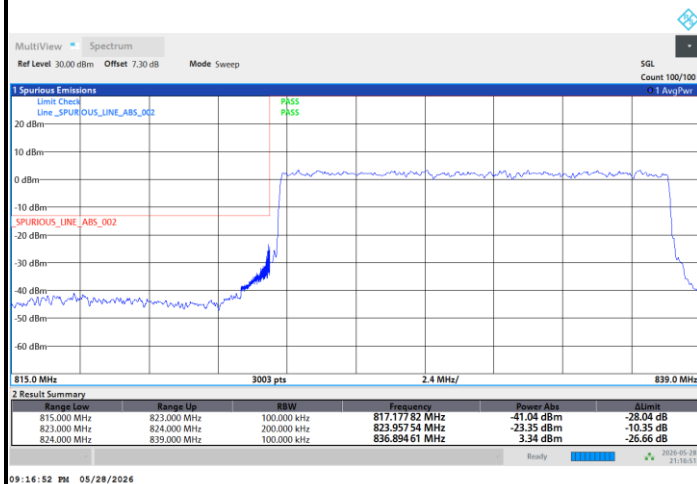


Highest Band Edge / Full RB

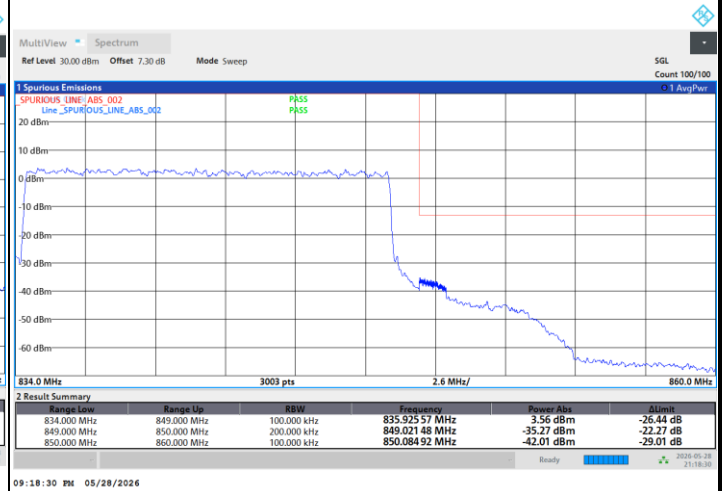


FR1 n26 / 15MHz / DFT-S OFDM / QPSK

Lowest Band Edge / Full RB

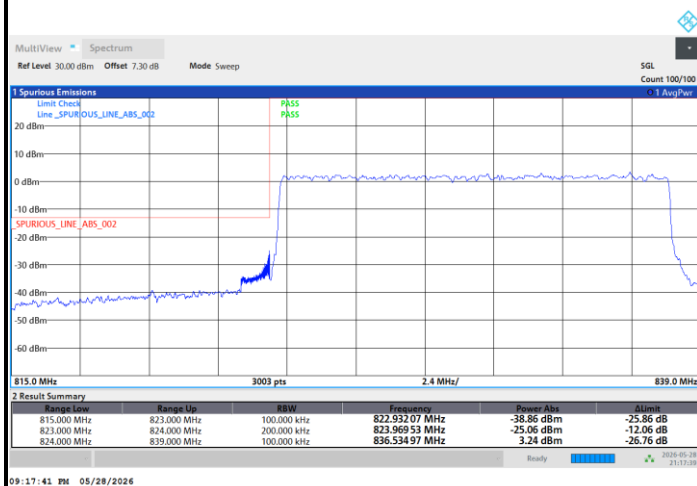


Highest Band Edge / Full RB

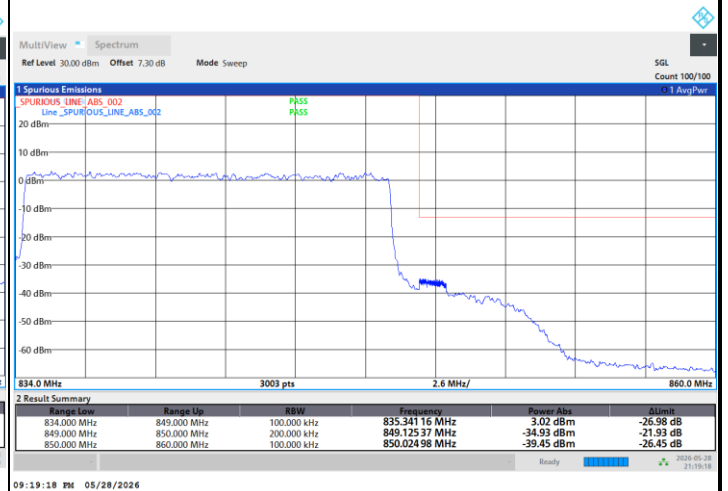




FR1 n26 / 20MHz / DFT-S OFDM / PI/2 BPSK

Lowest Band Edge / Full RB

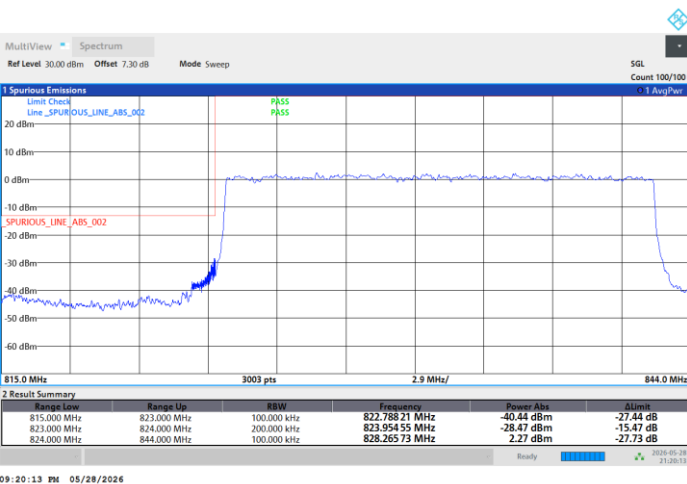


Highest Band Edge / Full RB

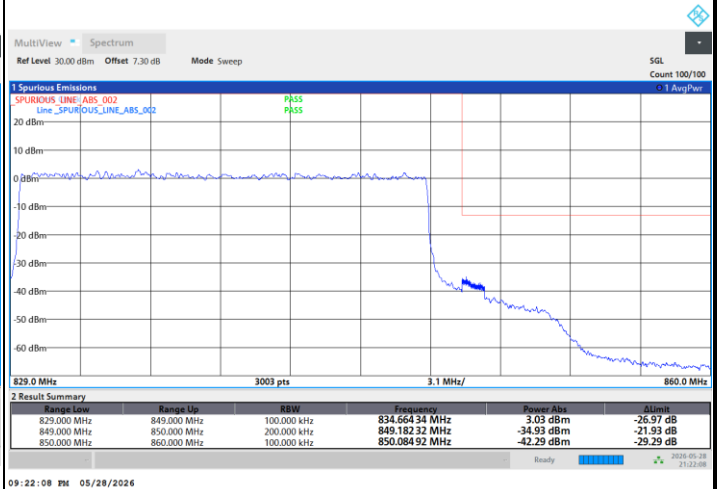


FR1 n26 / 20MHz / DFT-S OFDM / QPSK

Lowest Band Edge / Full RB

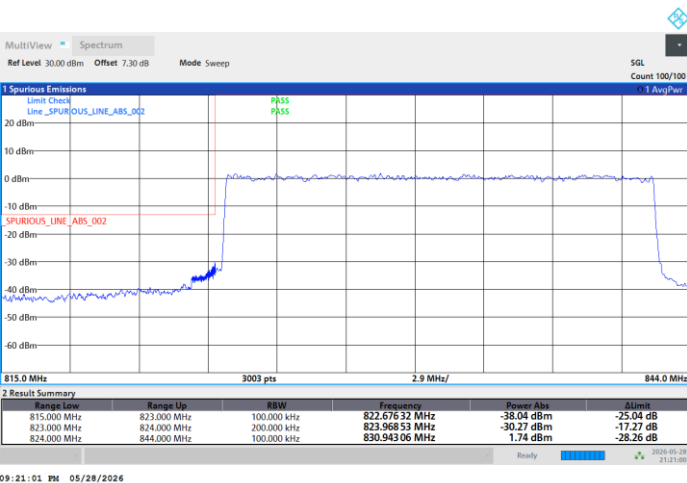

Highest Band Edge / Full RB

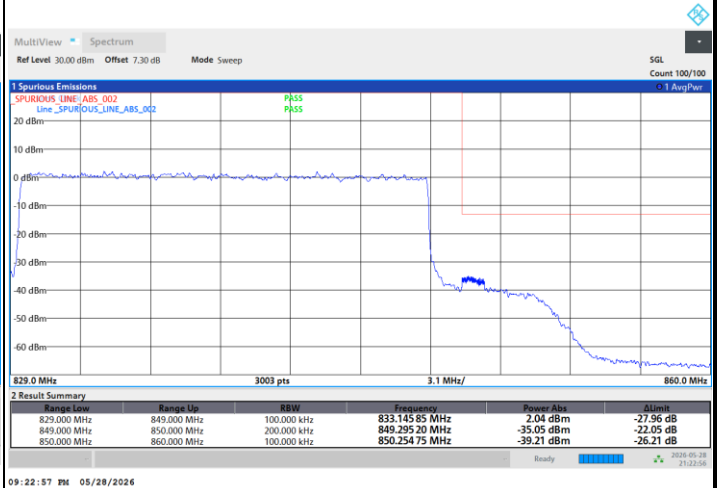





Conducted Spurious Emission

FR1 n26 / 5MHz / DFT-S OFDM / QPSK / 1RB1


Lowest Channel

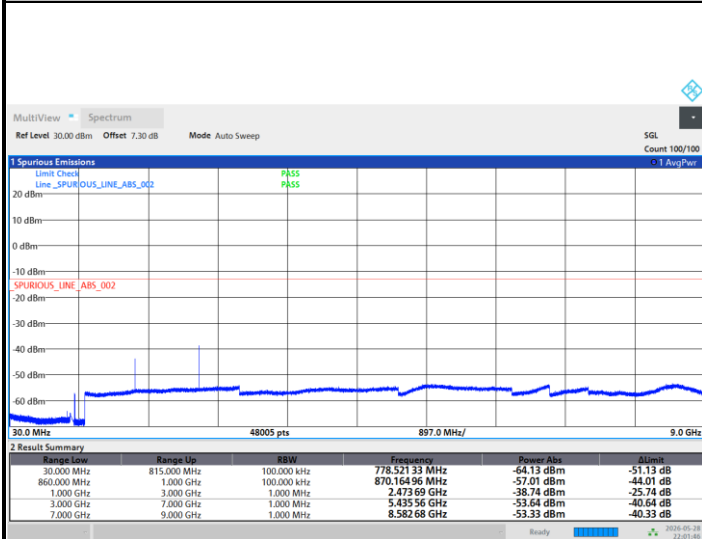

Middle Channel

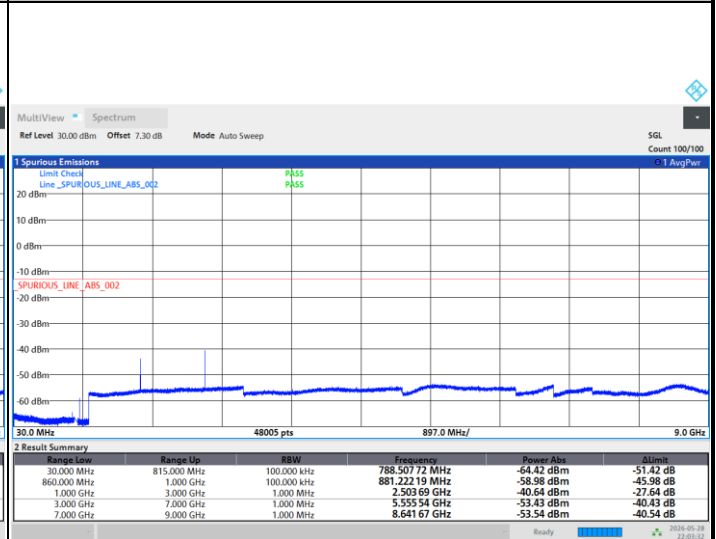

Highest Channel

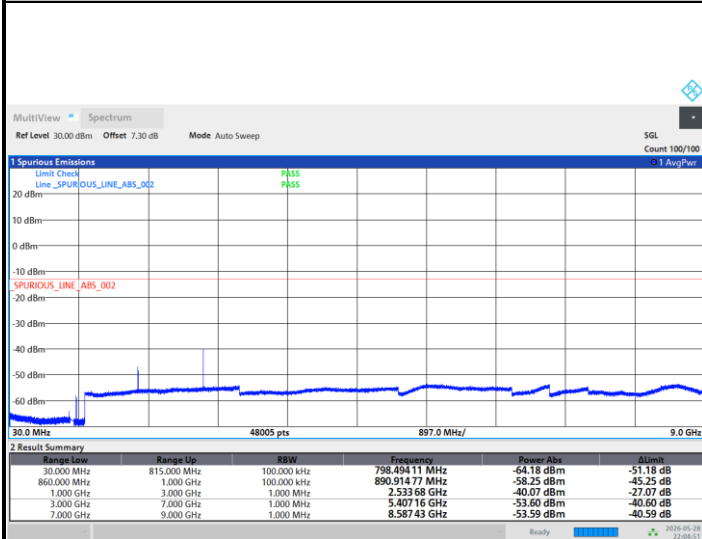

Frequency Stability

Test Conditions		FR1 n26 (BPSK) / Middle Channel 10M			
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Frequency Offset (Δf) (Hz)	Within Authorized Frequency Block(Hz)	Result
50	Normal Voltage	0.0173	14.5	Yes	PASS
40	Normal Voltage	0.0056	4.7	Yes	
30	Normal Voltage	0.0112	9.4	Yes	
20(Ref.)	Normal Voltage	0.0000	0	Yes	
10	Normal Voltage	0.0173	14.5	Yes	
0	Normal Voltage	0.0154	12.9	Yes	
-10	Normal Voltage	0.0030	-2.5	Yes	
-20	Normal Voltage	0.0104	8.7	Yes	
-30	Normal Voltage	0.0092	7.7	Yes	
20	Maximum Voltage	0.0039	3.3	Yes	
20	Normal Voltage	0.0000	0	Yes	
20	Minimum Voltage	0.0008	0.7	Yes	

Note:

1. Normal Voltage = 3.81 V. ; Minimum Voltage = 3.35 V. ; Maximum Voltage = 4.53 V.
2. The frequency fundamental emissions stay within the authorized frequency block.
3. The frequency variation is sufficient to ensure that the occupied bandwidth of all operation channels stay within the operating frequency block or frequency block group.


**FR1 n26****<SISO Mode>****Peak-to-Average Ratio**

Mode	FR1 n26 / 10MHz / DFT-S OFDM				
Mod.	PI/2 BPSK	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	4.06	5.34	6.22	6.38	PASS
Mode	FR1 n26 / 10MHz / DFT-S OFDM				
Mod.	256QAM				Limit: 13dB
RB Size	Full RB				Result
Middle CH	6.64				PASS




FR1 n26 / 10MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

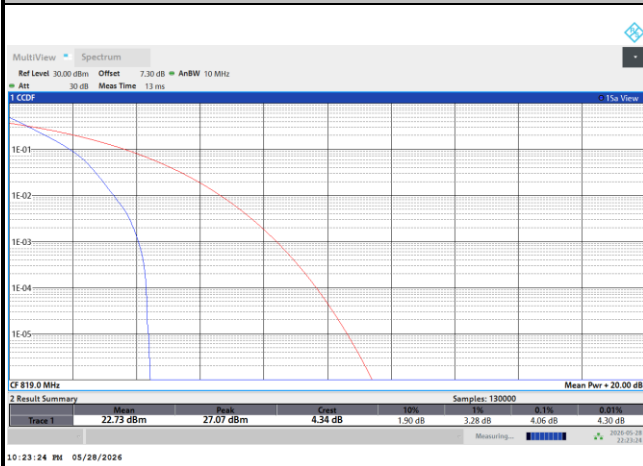


QPSK

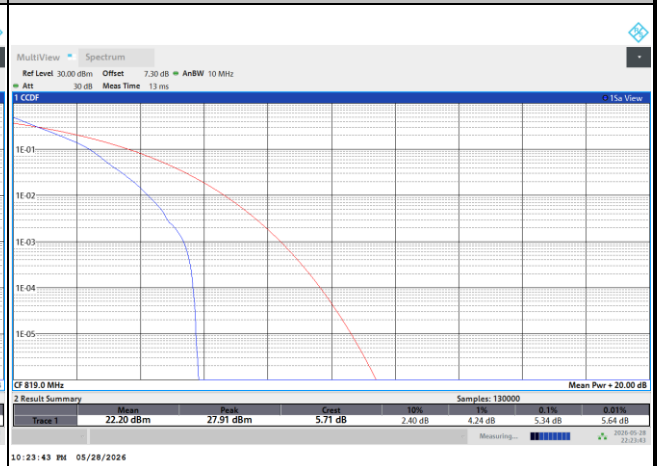


16QAM

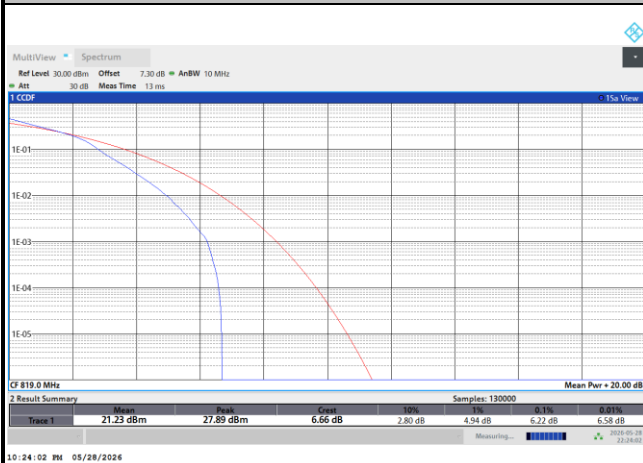

64QAM

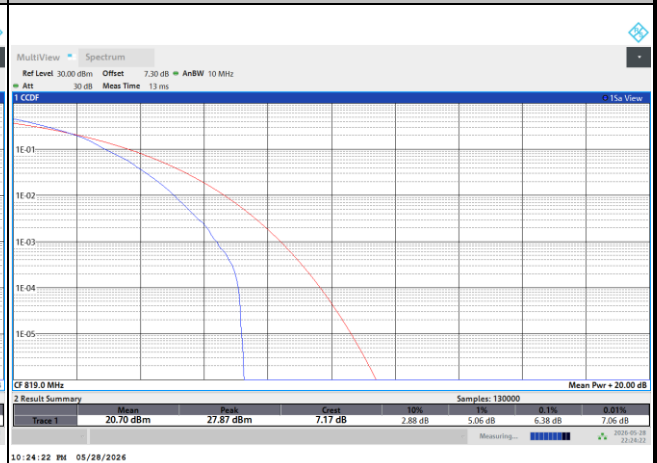

256QAM

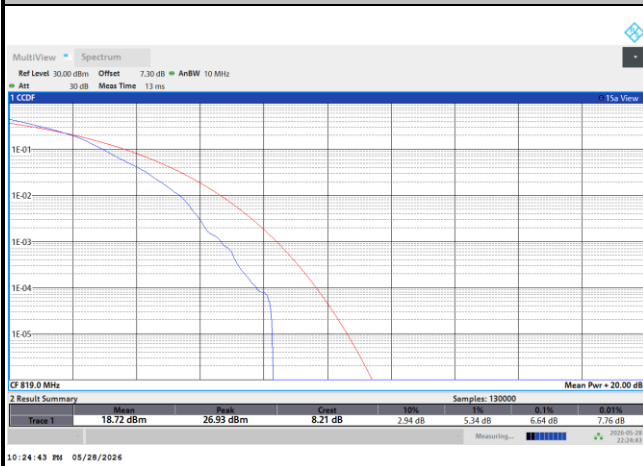


**26dB Bandwidth**

Mode	FR1 n26 : 26dB BW(MHz) / DFT-S OFDM							
BW	5MHz		10MHz					
Mod.	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK				
Middle CH	5.15	5.18	9.81	9.95				
Mod.	16QAM		16QAM					
Middle CH	5.16		9.89					




FR1 n26 / 5MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

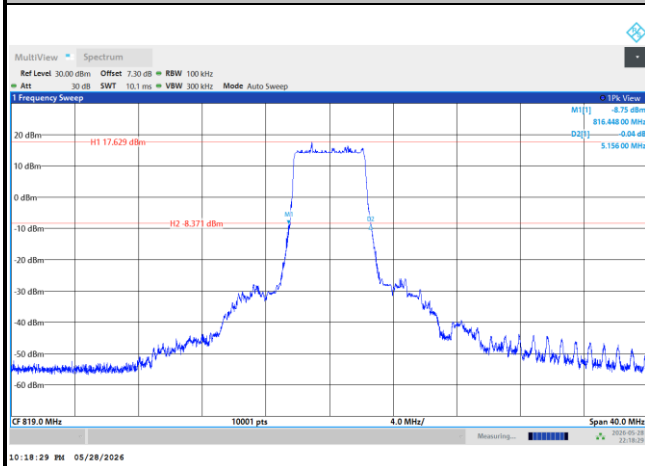

QPSK

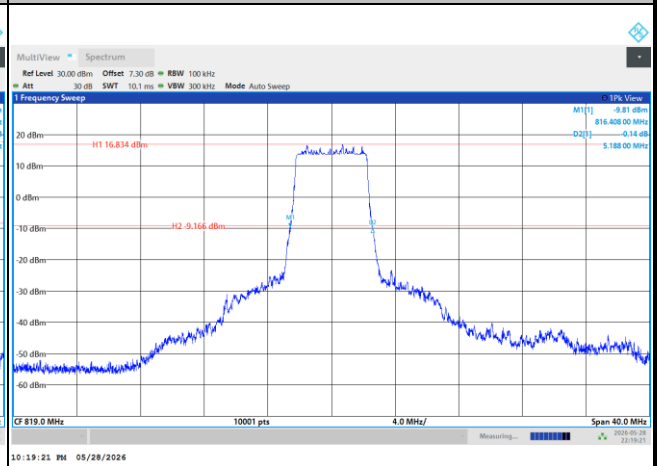


16QAM

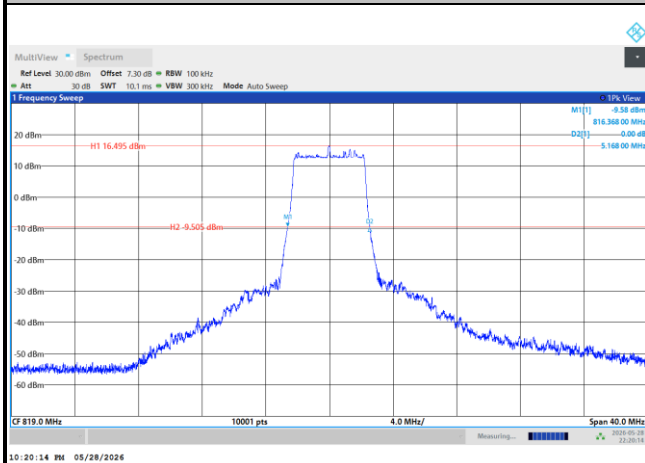




FR1 n26 / 10MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

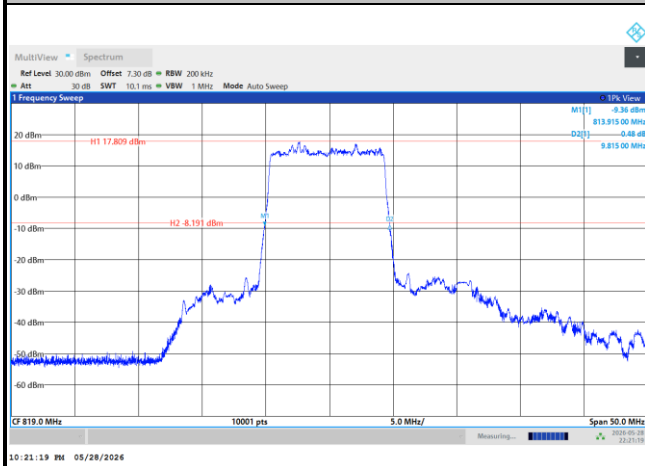

QPSK

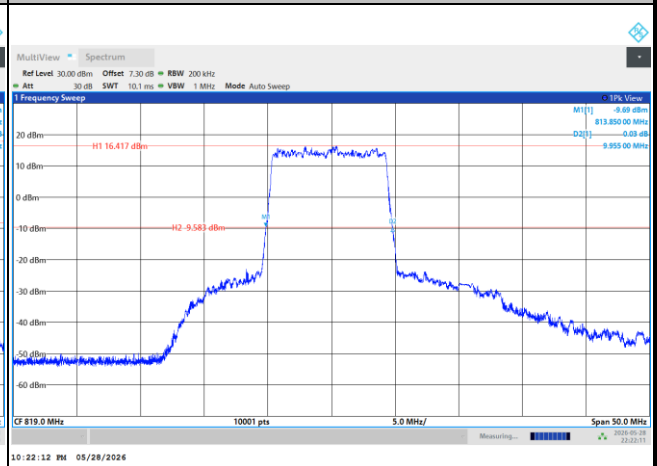

16QAM

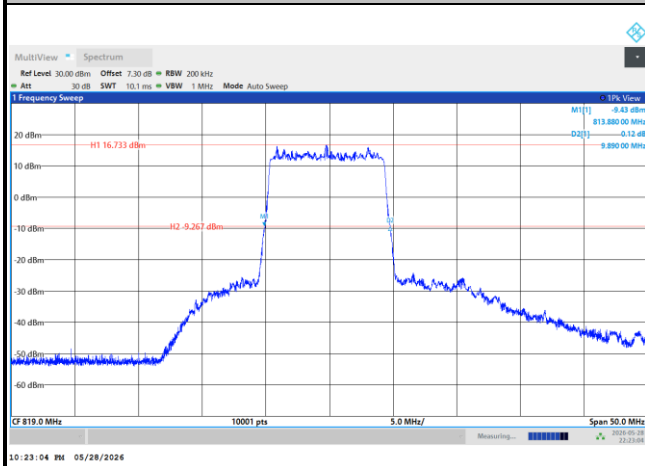


**Occupied Bandwidth**

Mode	FR1 n26 : 99%OBW(MHz) / DFT-S OFDM							
BW	5MHz		10MHz					
Mod.	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK				
Middle CH	4.48	4.50	8.96	8.99				
Mod.	16QAM		16QAM					
Middle CH	4.50		8.99					




FR1 n26 / 5MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

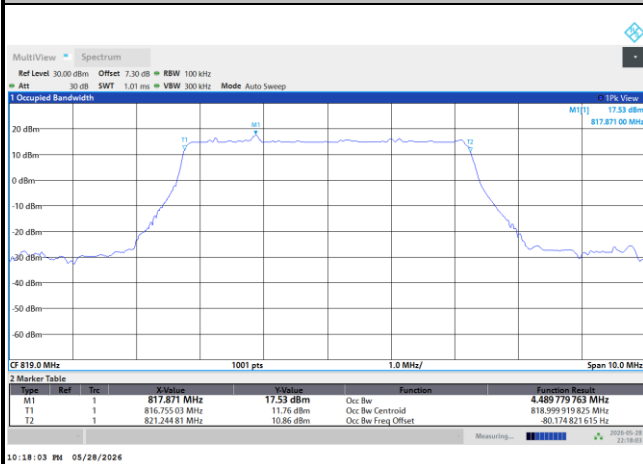


10:18:03 PM 05/28/2026

QPSK

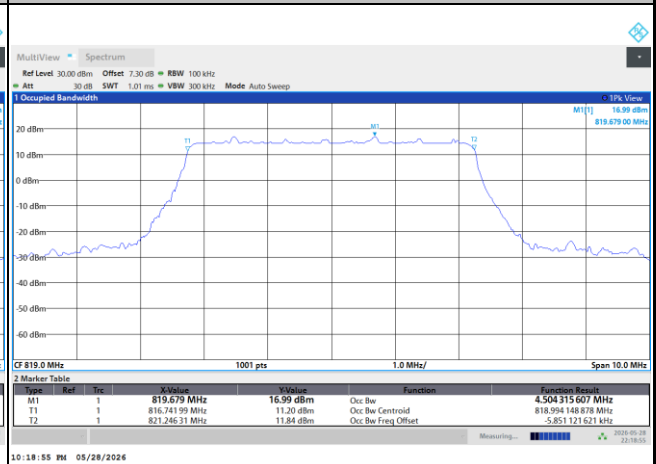

10:18:55 PM 05/28/2026

16QAM

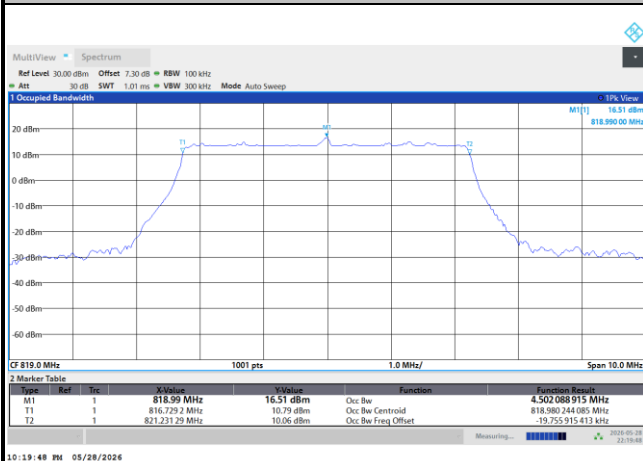


10:19:49 PM 05/28/2026




FR1 n26 / 10MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

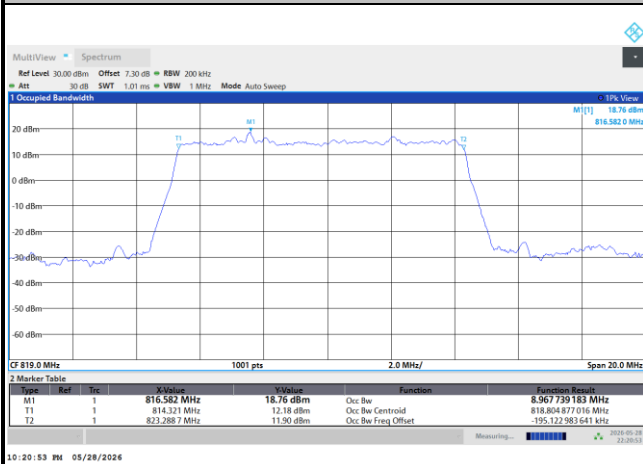

QPSK

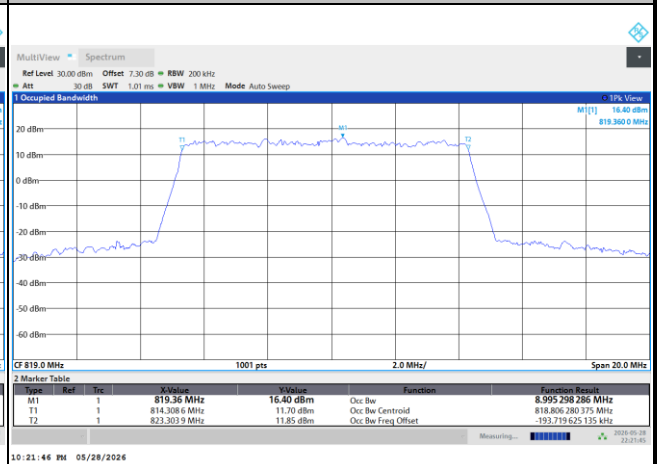

16QAM

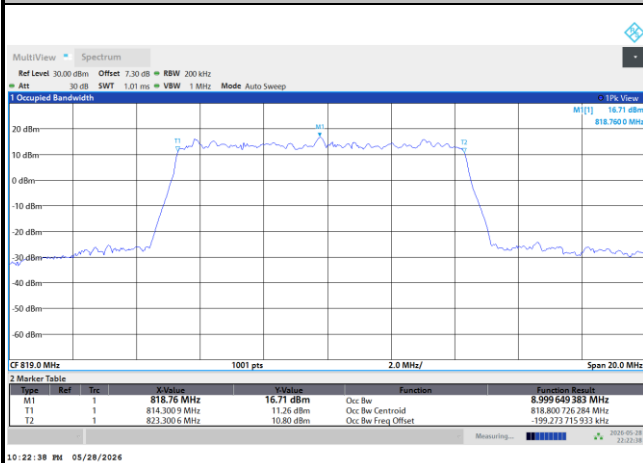





Emission masks – In-band emissions

FR1 n26 / 5MHz / DFT-S OFDM / PI/2 BPSK


Lowest MASK / 1RB0

Lowest MASK / 1RB0

Channel power -17.22dBm > -13dBm (PASS)

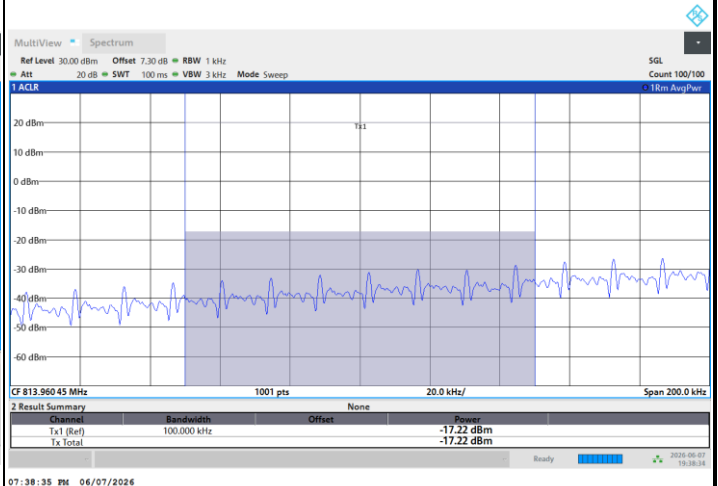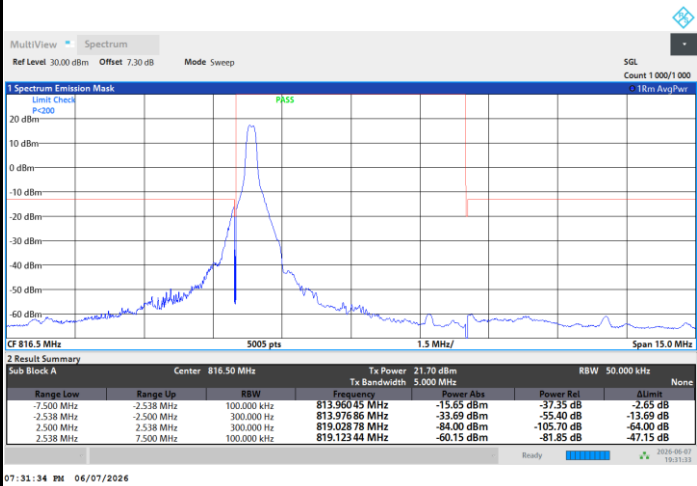


Highest MASK / 1RBmax

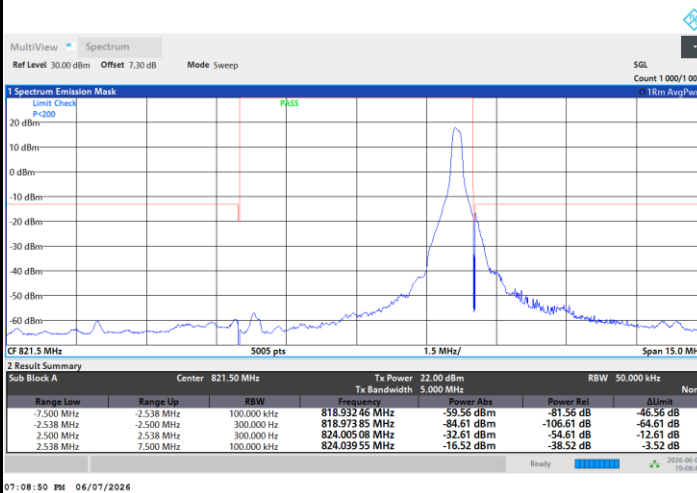




Lowest MASK / Full RB

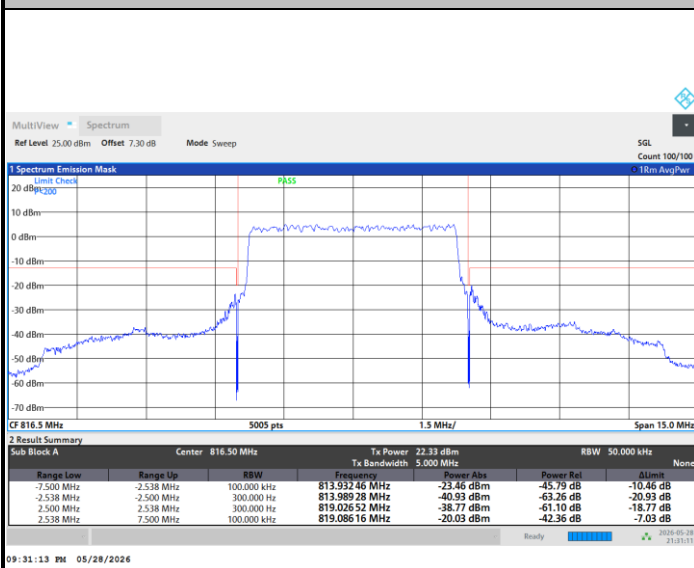


Highest MASK / Full RB

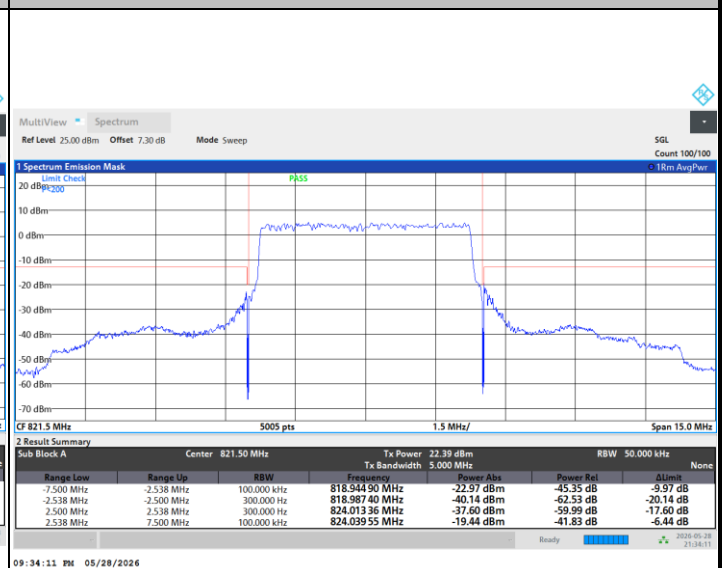




FR1 n26 / 5MHz / DFT-S OFDM / QPSK

Lowest MASK / 1RB0

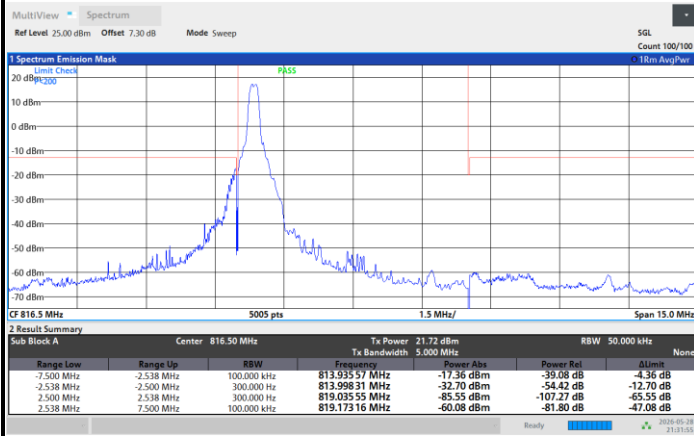


09:31:55 PM 05/28/2026

Highest MASK / 1RBmax

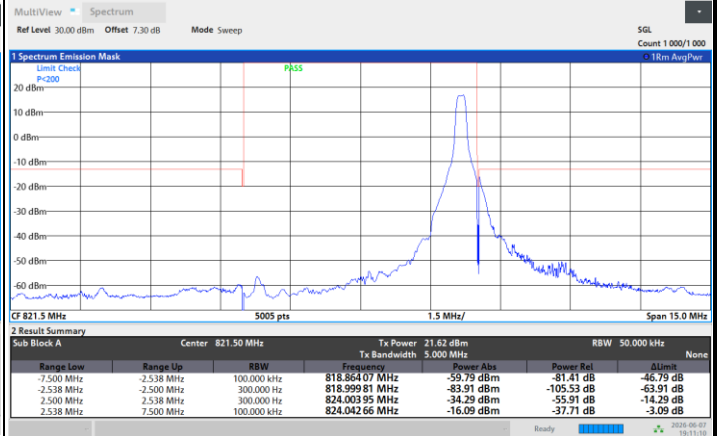


07:11:10 PM 06/07/2026

Lowest MASK / Full RB

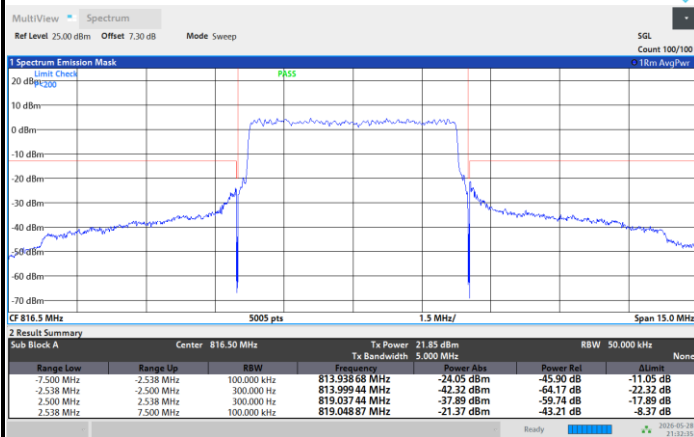

09:32:36 PM 05/28/2026

Highest MASK / Full RB

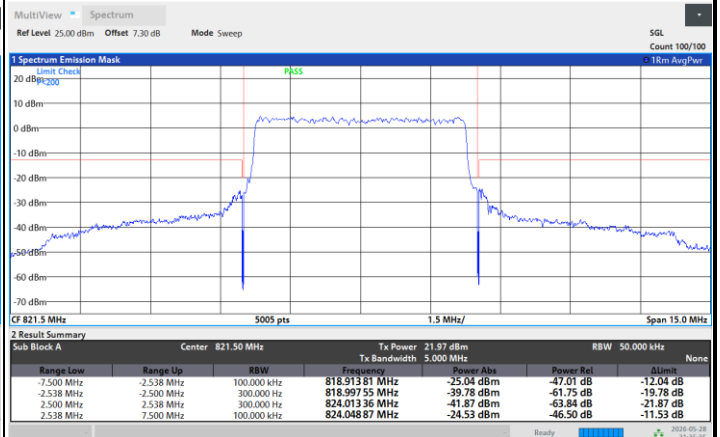


09:35:35 PM 05/28/2026



FR1 n26 / 10MHz / DFT-s-OFDM / PI/2 BPSK


Middle MASK / Full RB

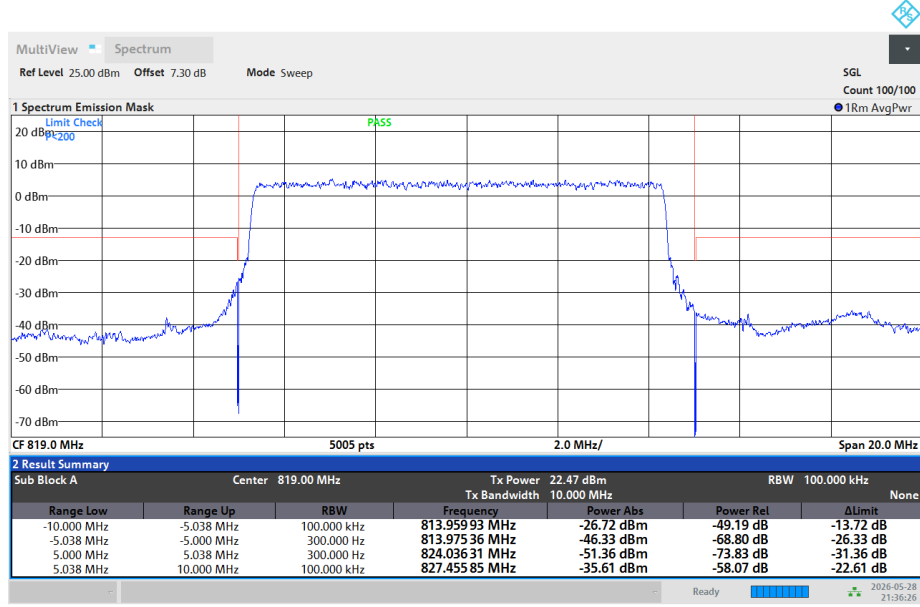

09:36:26 PM 05/28/2026

FR1 n26 / 10MHz / DFT-s-OFDM / QPSK




Middle MASK / Full RB

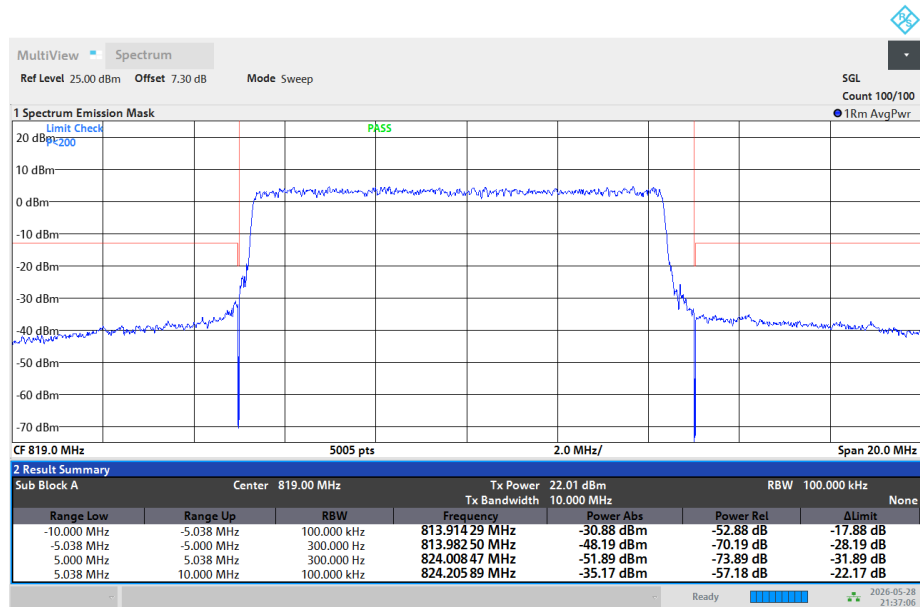

09:37:07 PM 05/28/2026

**Emission masks – Out of band emissions**

FR1 n26 / 5MHz / DFT-S OFDM / QPSK / 1RB1

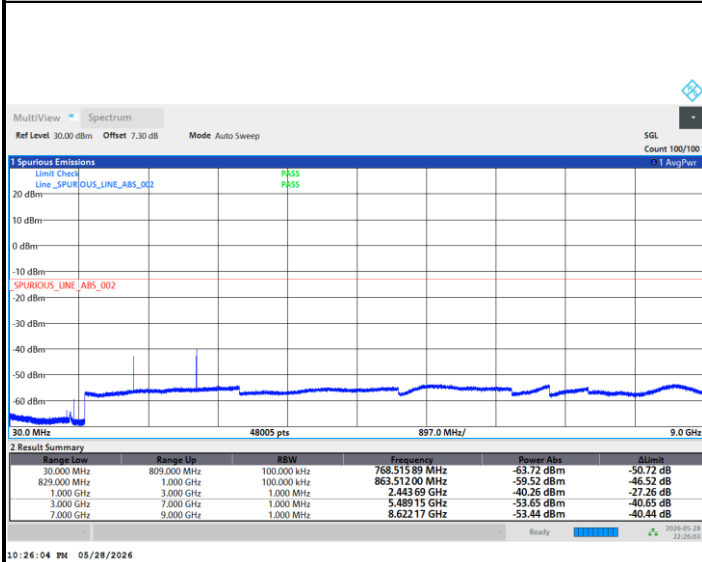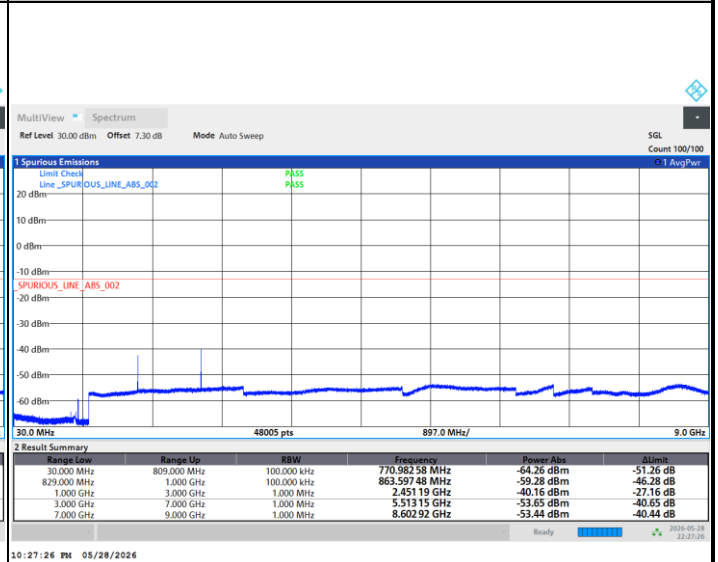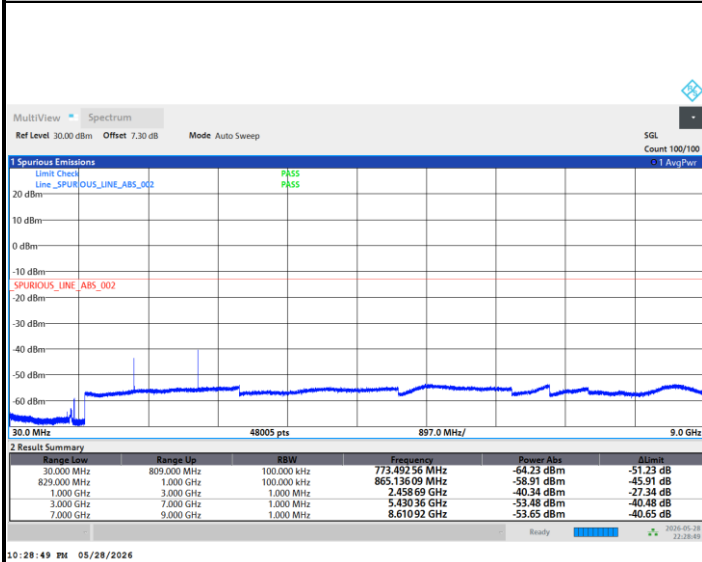Lowest Channel**Middle Channel****Highest Channel**

**Frequency Stability**

Test Conditions		FR1 n26 (BPSK) / Middle Channel 10M			
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Frequency Offset (Δf) (Hz)	Within Authorized Frequency Block(Hz)	Result
50	Normal Voltage	0.0049	-4	Yes	PASS
40	Normal Voltage	0.0017	-1.4	Yes	
30	Normal Voltage	0.0090	-7.4	Yes	
20(Ref.)	Normal Voltage	0.0000	0	Yes	
10	Normal Voltage	0.0049	-4	Yes	
0	Normal Voltage	0.0110	-9	Yes	
-10	Normal Voltage	0.0040	3.3	Yes	
-20	Normal Voltage	0.0104	-8.5	Yes	
-30	Normal Voltage	0.0046	-3.8	Yes	
20	Maximum Voltage	0.0110	9	Yes	
20	Normal Voltage	0.0000	0	Yes	
20	Minimum Voltage	0.0011	0.9	Yes	

Note:

1. Normal Voltage = 3.81 V. ; Minimum Voltage = 3.35 V. ; Maximum Voltage = 4.53 V.
2. The frequency fundamental emissions stay within the authorized frequency block.
3. The frequency variation is sufficient to ensure that the occupied bandwidth of all operation channels stay within the operating frequency block or frequency block group.


**FR1 n26 Part90s Straddle Channel****<SISO Mode>****Peak-to-Average Ratio**

Mode	FR1 n26 / 20MHz / DFT-S OFDM				
Mod.	PI/2 BPSK	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	3.98	5.20	6.08	6.32	PASS
Mode	FR1 n26 / 20MHz / DFT-S OFDM				
Mod.	256QAM				Limit: 13dB
RB Size	Full RB				Result
Middle CH	6.70				PASS




FR1 n26 / 20MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

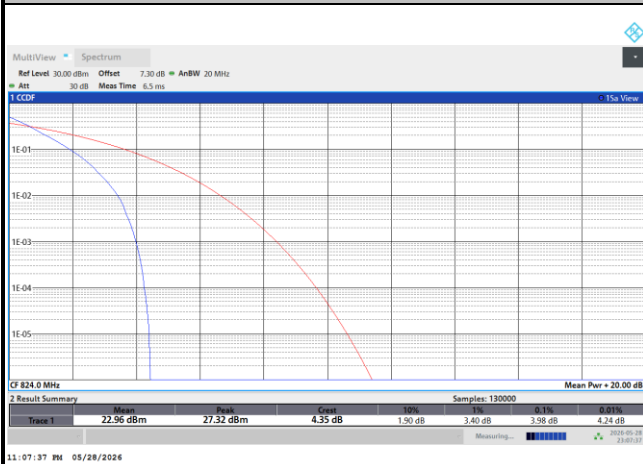


QPSK

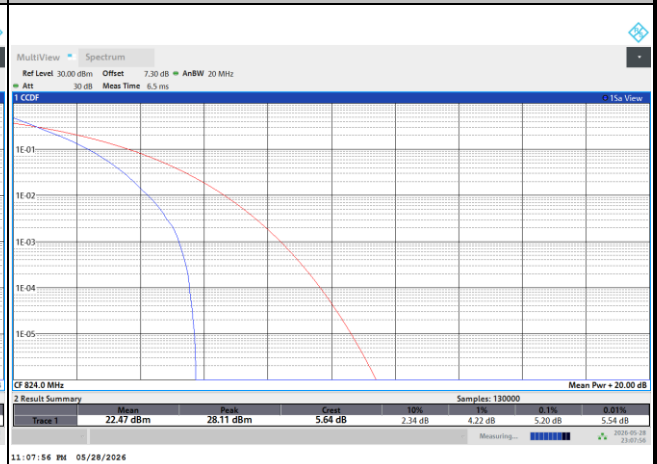


16QAM

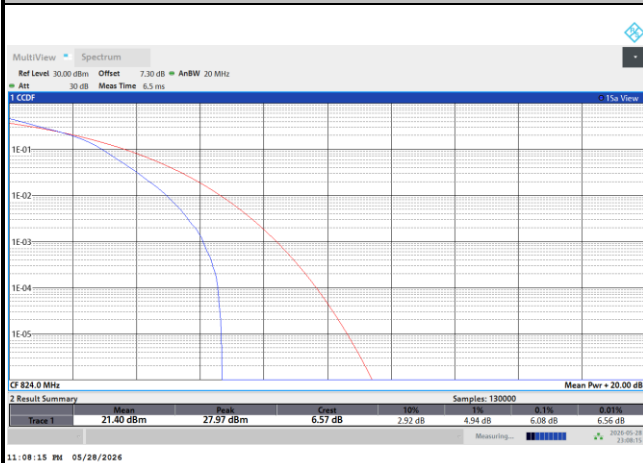

64QAM

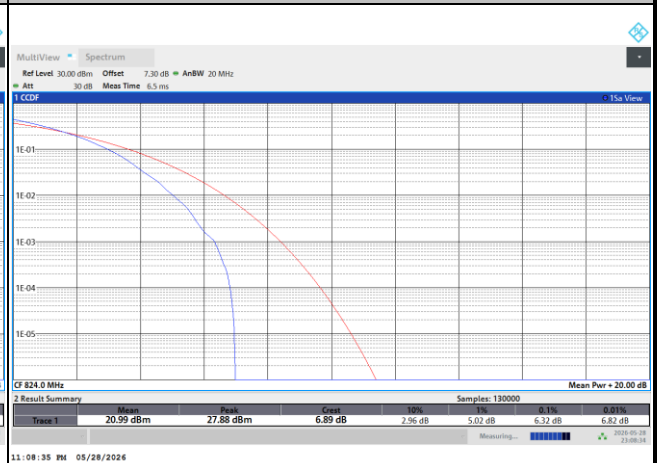

256QAM

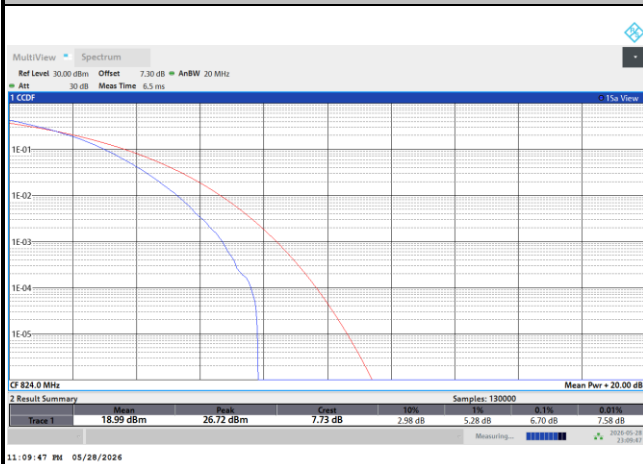


**26dB Bandwidth**

Mode	FR1 n26 : 26dB BW(MHz) / DFT-S OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK	PI/2 BPSK	QPSK
Middle CH	5.16	5.07	9.77	9.89	14.56	14.64	19.28	19.43
Mod.	16QAM		16QAM		16QAM		16QAM	
Middle CH	5.15		9.87		14.56		19.41	




FR1 n26 / 5MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

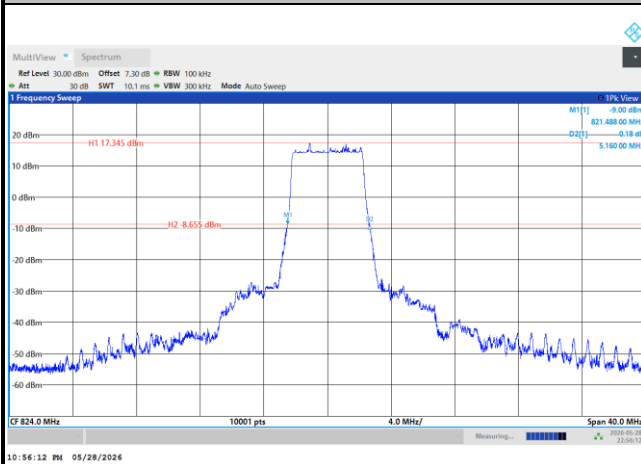

QPSK

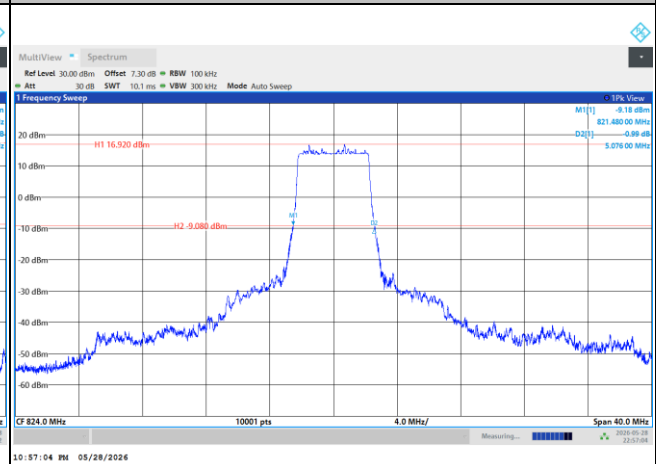


16QAM

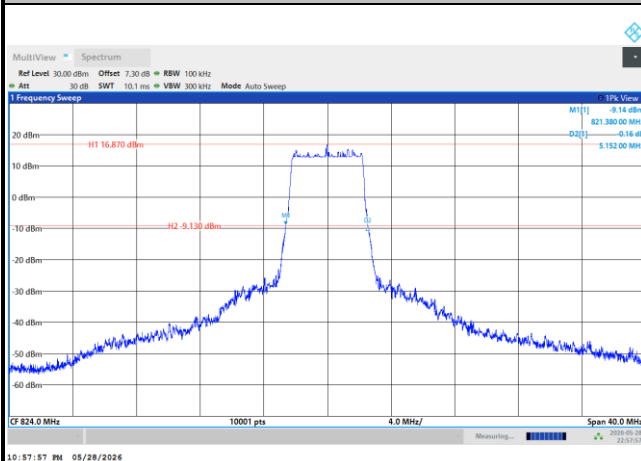




FR1 n26 / 10MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

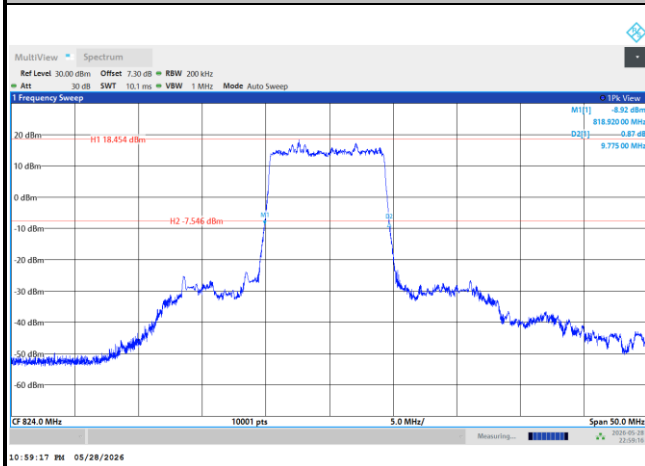

QPSK

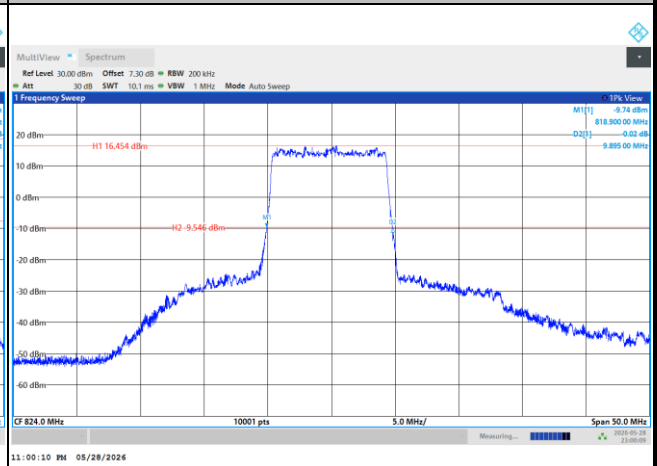

16QAM

