

FCC RADIO TEST REPORT

Applicant's company	Motorola Mobility, Inc.
Applicant Address	8000 W. Sunrise Blvd; Suite A. Plantation, FL 33322 U.S.A.
FCC ID	IHDT6MZ1
Manufacturer's company	Darfon Electronics(Suzhou) Co., Ltd.
Manufacturer Address	99, Zhu Yuan Road, New District, Suzhou, JiangSu, China

Product Name	MOTOROLA SMART CONTROLLER
Brand Name	Motorola
Model Name	RZ100
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Oct. 17, 2011
Final Test Date	Nov. 03, 2011
Submission Type	Original Equipment



Statement

Test result included is only for the Bluetooth part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	3
3.4. Table for Carrier Frequencies	3
3.5. Table for Test Modes	4
3.6. Table for Testing Locations.....	4
3.7. Table for Supporting Units	5
3.8. Table for Parameters of Test Software Setting	5
3.9. Test Configurations	6
4. TEST RESULT	9
4.1. AC Power Line Conducted Emissions Measurement.....	9
4.2. Maximum Peak Output Power Measurement	13
4.3. Hopping Channel Separation Measurement	15
4.4. Number of Hopping Frequency Measurement.....	23
4.5. Dwell Time Measurement.....	26
4.6. Radiated Emissions Measurement	39
4.7. Band Edge Emissions Measurement	53
4.8. Antenna Requirements	58
5. LIST OF MEASURING EQUIPMENTS	59
6. TEST LOCATION.....	61
7. TAF CERTIFICATE OF ACCREDITATION	62
APPENDIX A. TEST PHOTOS	A1 ~ A6
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B5
APPENDIX C. CO-LOCATION REPORT.....	C1 ~ C3


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR1O1728	Rev. 01	Initial issue of report	Nov. 04, 2011
FR1O1728	Rev. 02	Update report to modify Modulation	Nov. 22, 2011

1. CERTIFICATE OF COMPLIANCE

Product Name : MOTOROLA SMART CONTROLLER
Brand Name : Motorola
Model Name : RZ100
Applicant : Motorola Mobility, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 17, 2011 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

 2011.11.22

Jordan Hsiao

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	7.28 dB
4.2	15.247(b)(1)	Maximum Peak Conducted Output Power	Complies	28.22 dB
4.3	15.247(a)(1)	Hopping Channel Separation	Complies	-
4.4	15.247(b)(1)	Number of Hopping Frequency	Complies	-
4.5	15.247(a)(1)	Dwell Time	Complies	-
4.6	15.247(d)	Radiated Emissions	Complies	3.40 dB
4.7	15.247(d)	Band Edge Emissions	Complies	8.00 dB
4.8	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Hopping Channel Separation	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Power Type	From host system and Battery
Modulation	FHSS (GFSK)
Data Rate (Mbps)	GFSK: 1
Frequency Range	2400 ~ 2483.5MHz
Channel Number	79
Channel Band Width (99%)	1.1750 MHz
Peak Conducted Output Power	Chip 1: 1.78 dBm Chip 2: 0.92 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	AT3216 -B2R7HAA	Chip Antenna	N/A	0.5
2	-	AT3216 -B2R7HAA	Chip Antenna	N/A	0.5

The EUT has two RF chip, one is used as button and trackpad and another is used as answer phone.

Chip 1 (Model No.: BCM20730) will collocate with Ant. 1 and is used as button and trackpad (Remote mode).

Chip 2 (Model No.: BCM20741) will collocate with Ant. 2 and is used as answer phone (Calls mode).

3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	0	2402 MHz	40	2442 MHz
	1	2403 MHz	:	:
	:	:	77	2479 MHz
	38	2440 MHz	78	2480 MHz
	39	2441 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emissions	Normal Link	3 Mbps	Hopping 0~78	-
Max. Peak Conducted Output Power	GFSK	3 Mbps	0/39/78	1/2
Hopping Channel Separation	GFSK	3 Mbps	0~1/39~40/77~78	1/2
Number of Hopping Frequency	GFSK	3 Mbps	0~78	1/2
Dwell Time	3DH1/3DH3/3DH5	3 Mbps	0/39/78	1/2
Radiated Emissions Below 1GHz	GFSK	3 Mbps	39	1/2
Radiated Emissions Above 1GHz	GFSK	3 Mbps	0/39/78	1/2
Band Edge Emissions	GFSK	3 Mbps	0/78	1/2

The following test modes were performed for Conducted test:

Mode 1. Remote mode with Charging by chip 1 (Model No.: BCM20730)

The following test modes were performed for Radiated 30MHz ~ 1GHz test:

Mode 1. Remote mode with Charging by chip 1 (Model No.: BCM20730)

Mode 2. Calls mode by chip 2 (Model No.: BCM20741)

The following test modes were performed for Radiated above 1GHz test and other test items:

Mode 1. Remote mode with Charging by chip 1 (Model No.: BCM20730)

Mode 2. Calls mode by chip 2 (Model No.: BCM20741)

<For MPE and Co-location Test>:

The EUT has two bluetooth chips; therefore Maximum Permissible Exposure (please refer to Appendix B) and Co-location (please refer to Appendix C) tests are added for simultaneously transmit between chip 1 and chip 2.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	1340	E2K4965AGNM
Bluetooth Dongle	Mototrola	890-57-280	VZ10010000
Notebook	DELL	D520	E2KWM3945ABG

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of Bluetooth / Mode 1

Test Software Version	Broadcom Blue Tool Version 1.3.8		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	0dBm	0dBm	0dBm

Power Parameters of Bluetooth / Mode 2


Test Software Version	Broadcom Blue Tool Version 1.3.8		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	0dBm	0dBm	0dBm

During the test, "Broadcom Blue Tool Version 1.3.8" under WIN XP was executed the test program to control the EUT continuously transmit RF signal.


3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration


Test Configuration: 30MHz~1GHz

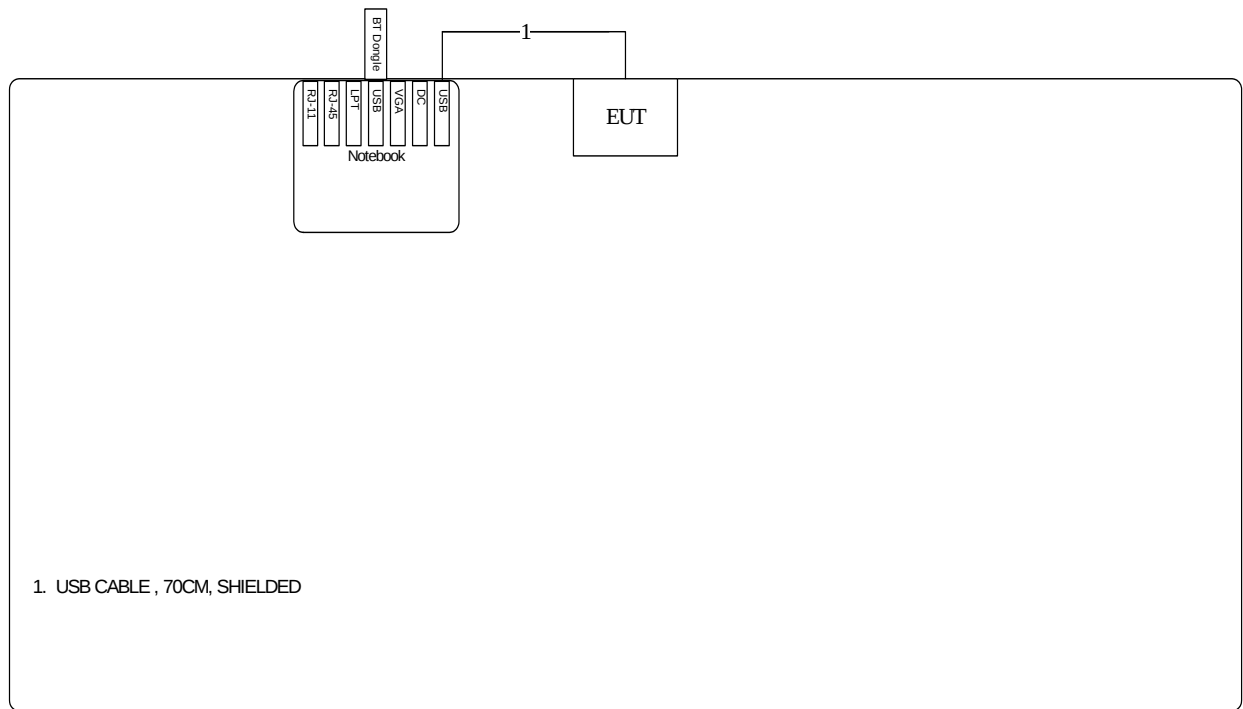

Test Configuration: above 1GHz

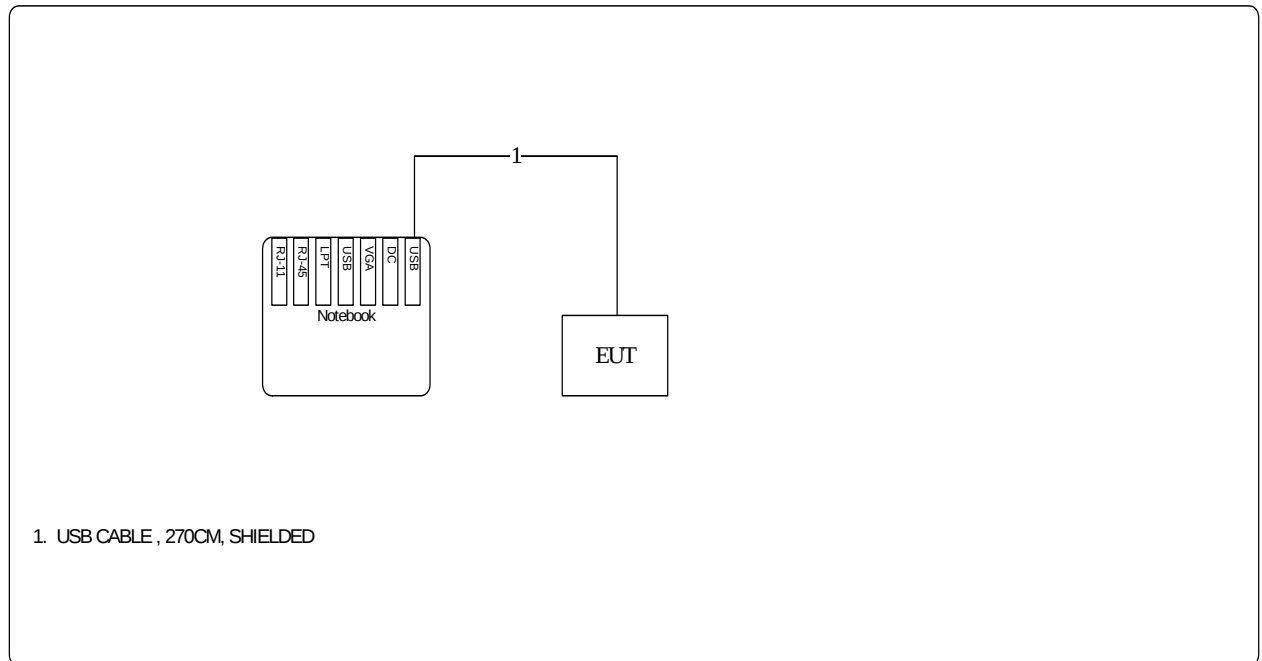

3.9.2. AC Power Line Conduction Emissions Test Configuration

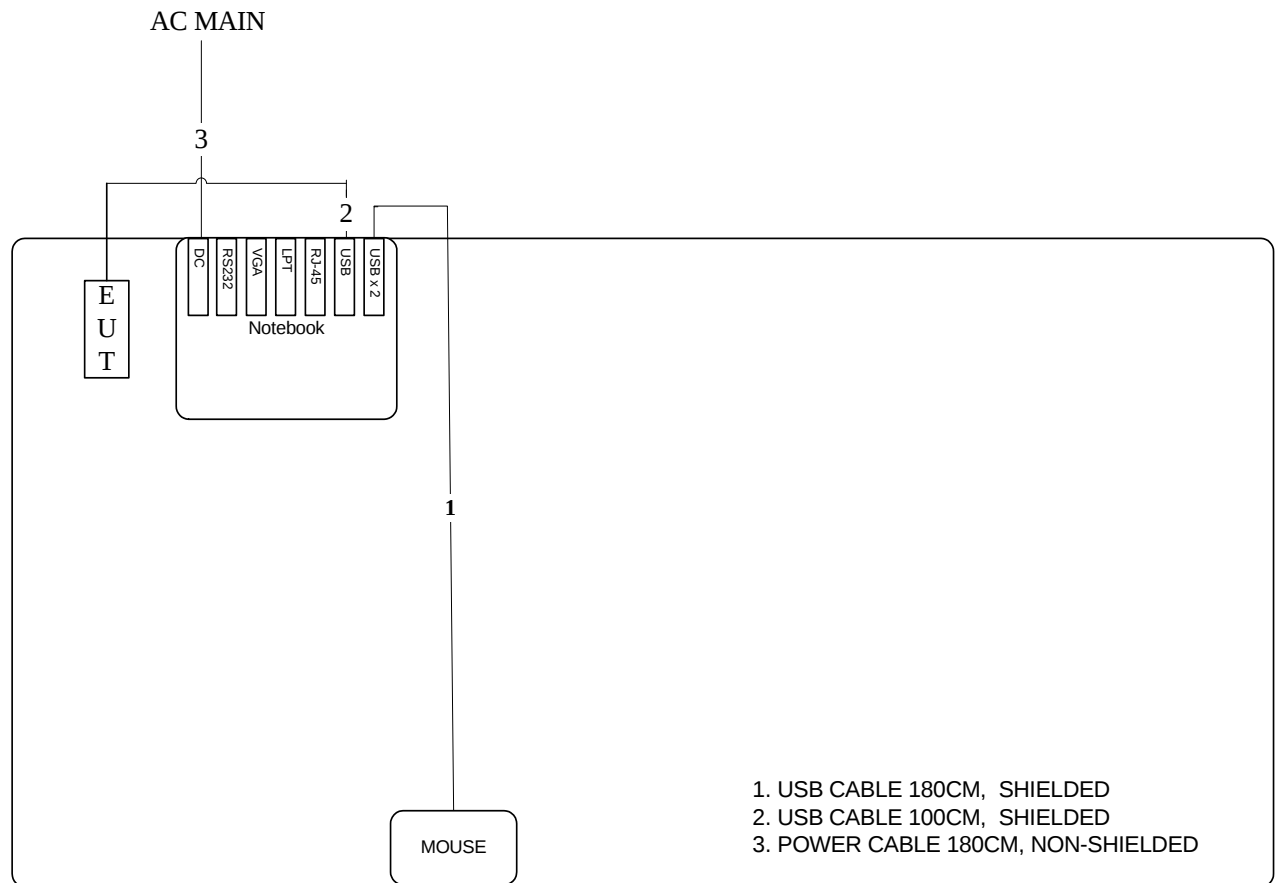

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

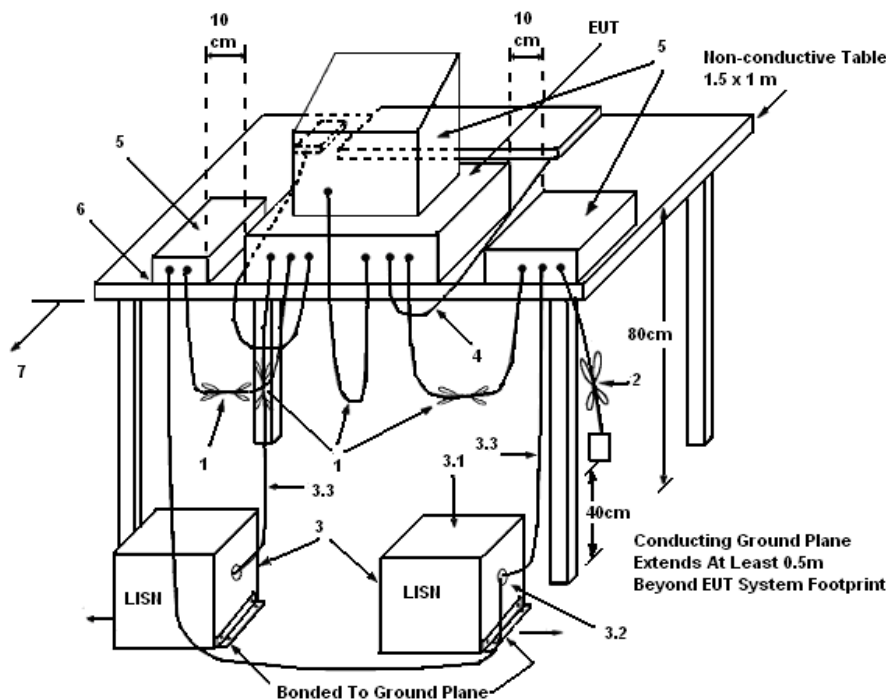

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	62%
Test Engineer	Sin Chang	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1

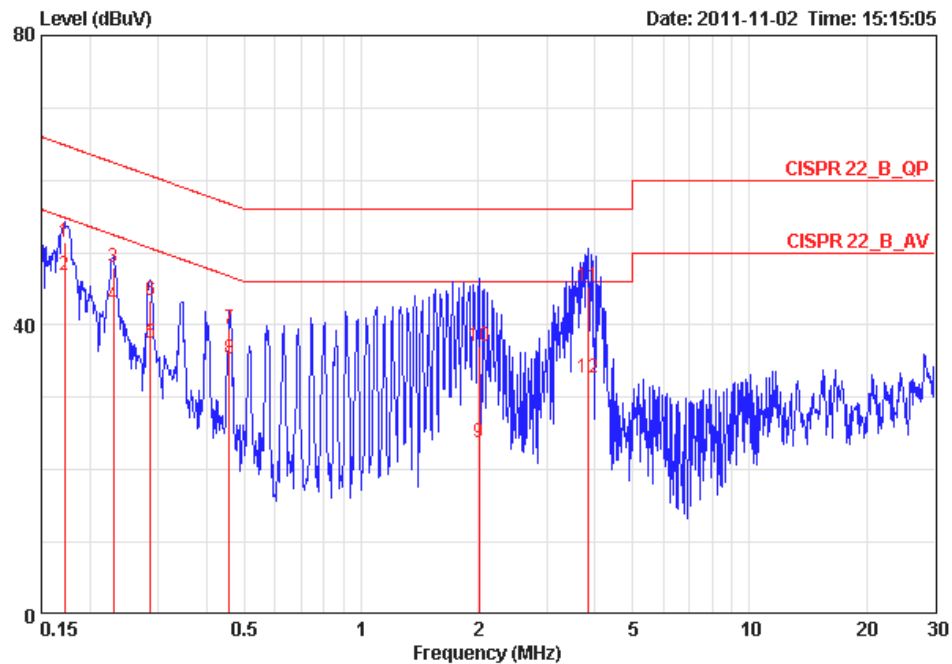

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17215	51.40	-13.45	64.86	51.14	0.06	0.20	QP
2 @	0.17215	46.89	-7.96	54.86	46.63	0.06	0.20	AVERAGE
3	0.23040	48.04	-14.40	62.44	47.79	0.05	0.20	QP
4	0.23040	42.81	-9.63	52.44	42.56	0.05	0.20	AVERAGE
5	0.28630	37.58	-13.05	50.63	37.34	0.04	0.20	AVERAGE
6	0.28630	43.43	-17.20	60.63	43.19	0.04	0.20	QP
7	0.45636	39.36	-17.40	56.76	39.13	0.03	0.20	QP
8	0.45636	35.35	-11.41	46.76	35.12	0.03	0.20	AVERAGE
9	2.012	23.75	-22.25	46.00	23.50	0.05	0.20	AVERAGE
10	2.012	37.14	-18.86	56.00	36.89	0.05	0.20	QP
11	3.840	45.39	-10.61	56.00	44.99	0.10	0.30	QP
12	3.840	32.69	-13.31	46.00	32.29	0.10	0.30	AVERAGE

Temperature	25°C	Humidity	62%
Test Engineer	Sin Chang	Phase	Neutral
Configuration	Normal Link		

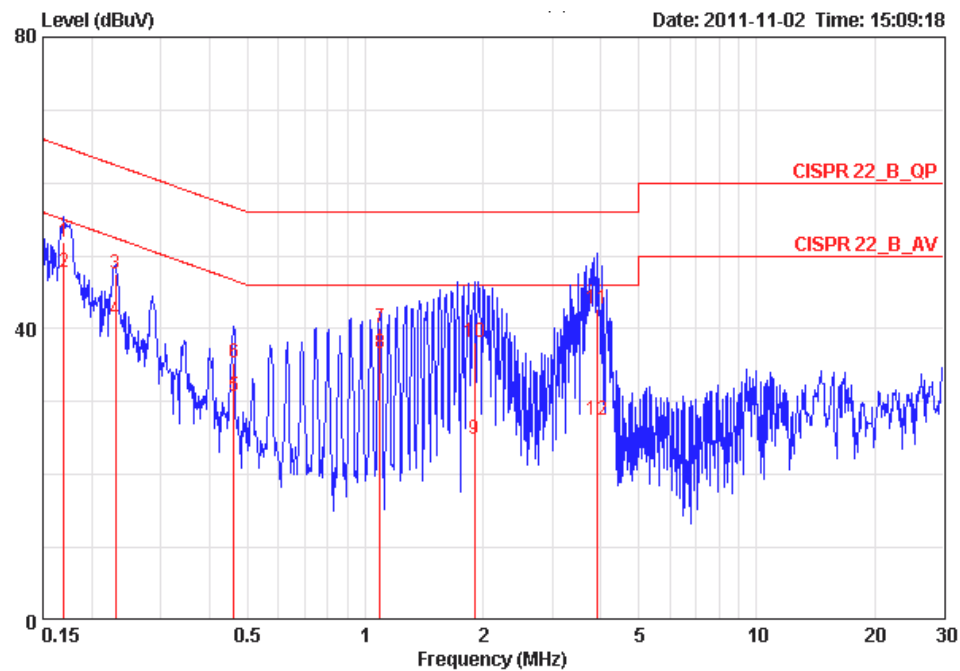

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17004	51.95	-13.00	64.96	51.66	0.09	0.20	QP
2	0.17004	47.67	-7.28	54.96	47.38	0.09	0.20	AVERAGE
3	0.23040	47.50	-14.94	62.44	47.22	0.08	0.20	QP
4	0.23040	41.20	-11.24	52.44	40.92	0.08	0.20	AVERAGE
5	0.46122	30.64	-16.03	46.67	30.37	0.07	0.20	AVERAGE
6	0.46122	35.33	-21.34	56.67	35.06	0.07	0.20	QP
7	1.088	40.00	-16.00	56.00	39.75	0.07	0.18	QP
8	1.088	36.69	-9.31	46.00	36.44	0.07	0.18	AVERAGE
9	1.898	24.94	-21.06	46.00	24.67	0.09	0.18	AVERAGE
10	1.898	38.04	-17.96	56.00	37.77	0.09	0.18	QP
11	3.902	42.68	-13.32	56.00	42.24	0.14	0.30	QP
12	3.902	27.40	-18.60	46.00	26.96	0.14	0.30	AVERAGE

Note: Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Peak Output Power Measurement

4.2.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 1Watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts (21dBm). The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	MA2411B

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

4.2.4. Test Setup Layout

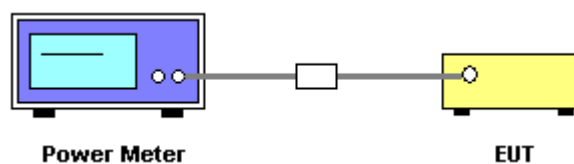

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Peak Output Power

Temperature	23°C	Humidity	65%
Test Engineer	Serway Li	Configurations	GFSK
Test Date	Oct. 31, 2011	Test Mode	Mode 1

Channel	Frequency	Conducted Power (dBm)	Conducted Power (W)	Max. Limit(dBm)	Max. Limit(W)	Result
0	2402 MHz	-0.92	0.0008	30.00	1.00	Complies
39	2441 MHz	-1.10	0.0008	30.00	1.00	Complies
78	2480 MHz	-1.16	0.0008	30.00	1.00	Complies

Temperature	23°C	Humidity	65%
Test Engineer	Serway Li	Configurations	GFSK
Test Date	Oct. 31, 2011	Test Mode	Mode 2

Channel	Frequency	Conducted Power (dBm)	Conducted Power (W)	Max. Limit(dBm)	Max. Limit(W)	Result
0	2402 MHz	1.51	0.0014	30.00	1.00	Complies
39	2441 MHz	1.78	0.0015	30.00	1.00	Complies
78	2480 MHz	1.12	0.0013	30.00	1.00	Complies

4.3. Hopping Channel Separation Measurement

4.3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 300 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilized for 20 dB bandwidth measurement.
3. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were utilized for channel separation measurement.

4.3.4. Test Setup Layout

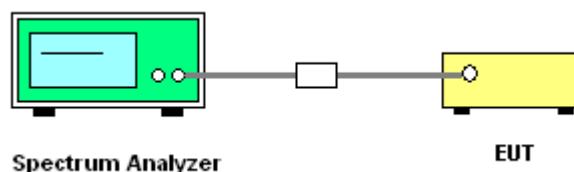

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Hopping Channel Separation


Temperature	23°C	Humidity	65%
Test Engineer	Serway Li	Configurations	GFSK / Mode 1

Frequency	20dB Bandwidth	99% Occupied BW	Channel Separation (MHz)	Two-Thirds of 20dB Bandwidth	Result
2402 MHz	1.0275	0.9349	1.00	0.69	Complies
2441 MHz	1.0246	0.9320	1.00	0.68	Complies
2480 MHz	1.0246	0.9233	1.00	0.68	Complies

Temperature	23°C	Humidity	65%
Test Engineer	Serway Li	Configurations	GFSK / Mode 2


Frequency	20dB Bandwidth	99% Occupied BW	Channel Separation (MHz)	Two-Thirds of 20dB Bandwidth	Result
2402 MHz	1.2880	1.1722	1.00	0.86	Complies
2441 MHz	1.2938	1.1750	1.00	0.86	Complies
2480 MHz	1.2909	1.1750	1.00	0.86	Complies

20 dB Bandwidth Plot on Channel 0 / 2402 MHz / Mode 1

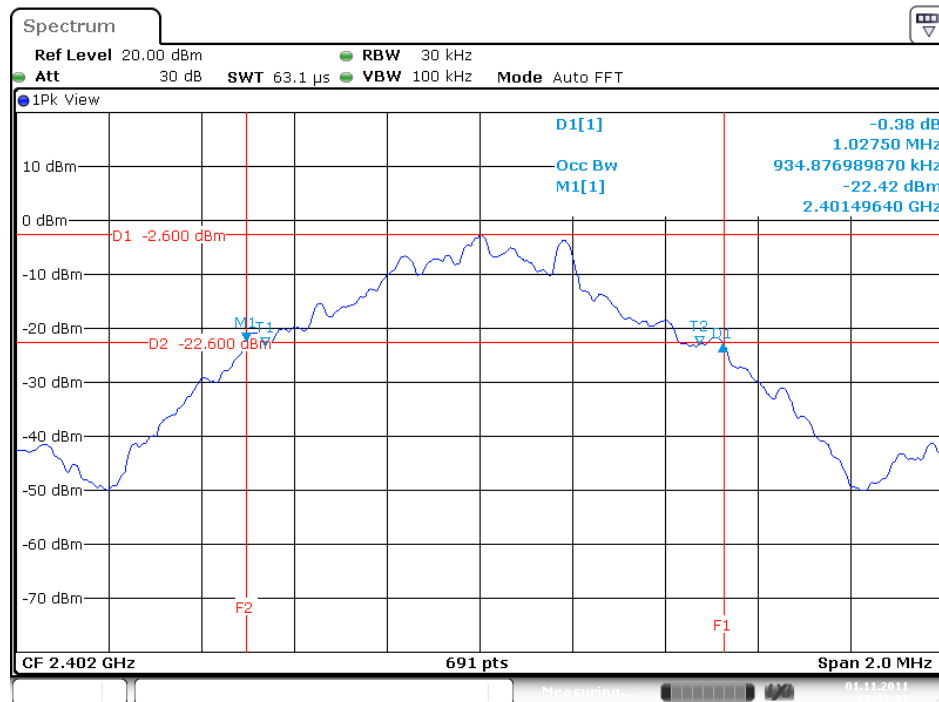


Date: 1.NOV.2011 13:32:37

20 dB Bandwidth Plot on Channel 39 / 2441 MHz / Mode 1

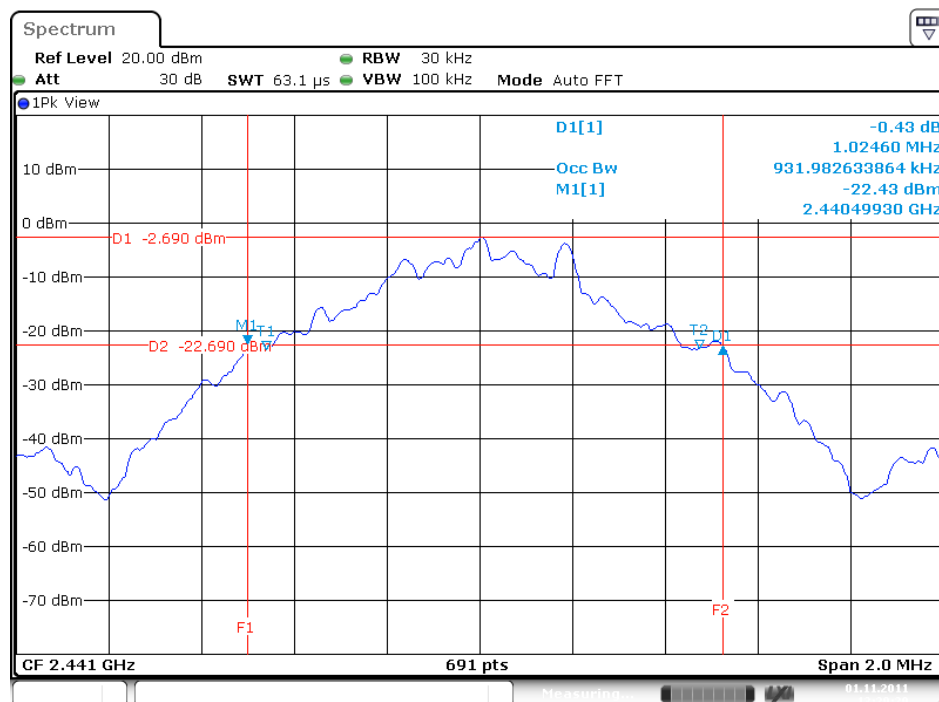


Date: 1.NOV.2011 13:29:30


20 dB Bandwidth Plot on Channel 78 / 2480 MHz / Mode 1

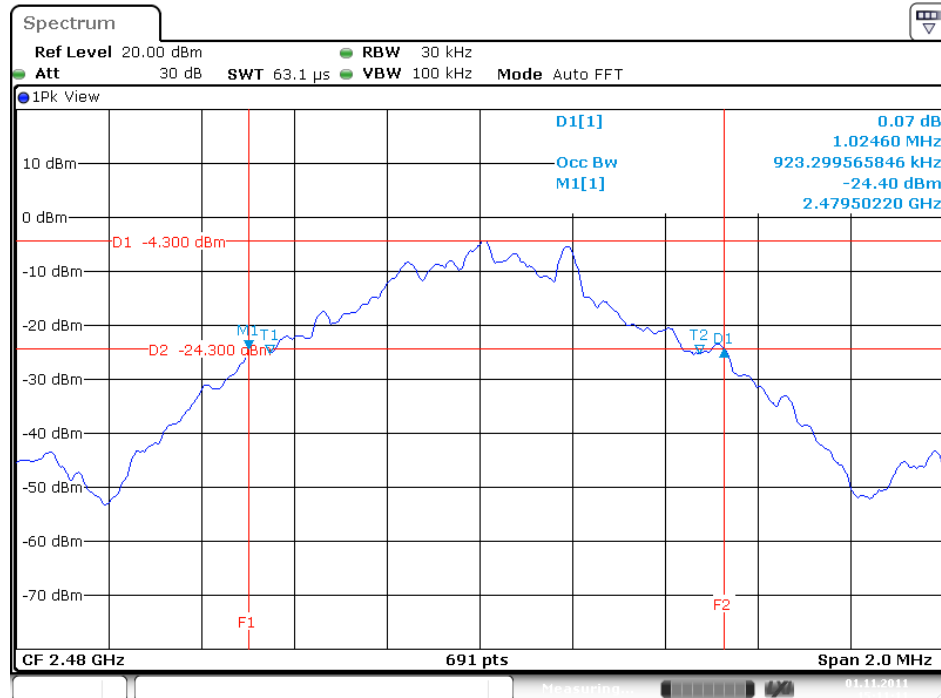

Channel Separation Plot on Channel 0~1 / 2402 MHz ~ 2403 MHz / Mode 1

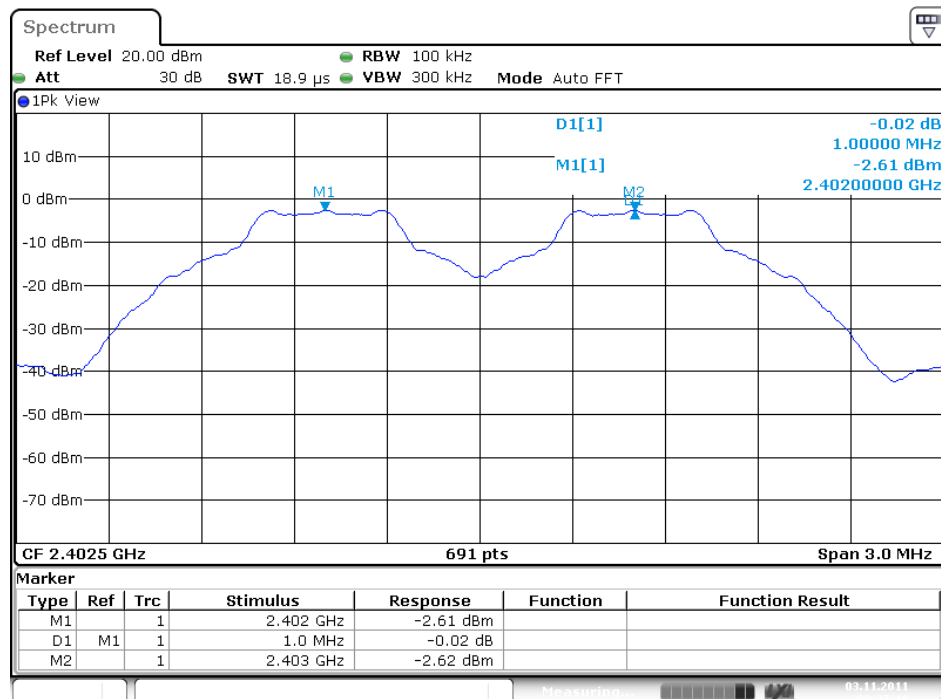


Channel Separation Plot on Channel 39~40 / 2441 MHz ~ 2442 MHz / Mode 1

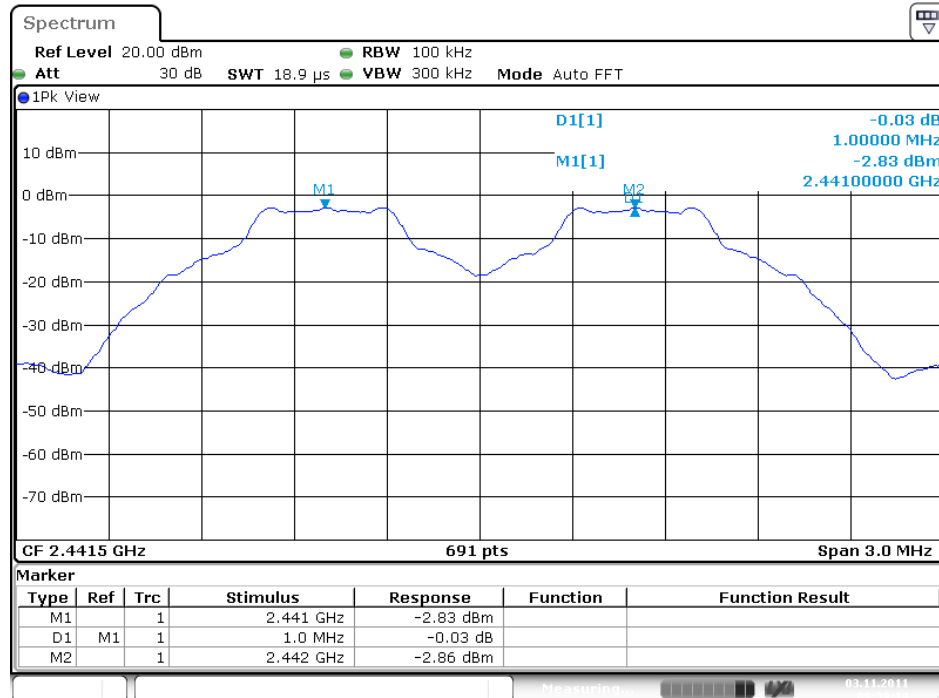


Date: 3.NOV.2011 09:39:14

Channel Separation Plot on Channel 77~78 / 2479 MHz ~ 2480 MHz / Mode 1

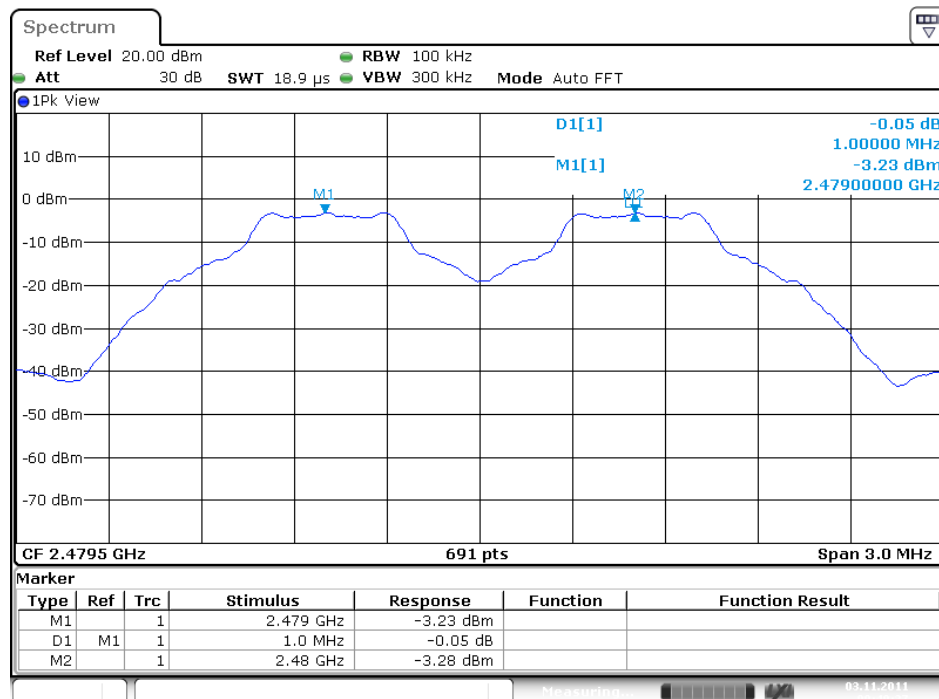


Date: 3.NOV.2011 09:40:37

20 dB Bandwidth Plot on Channel 0 / 2402 MHz / Mode 2

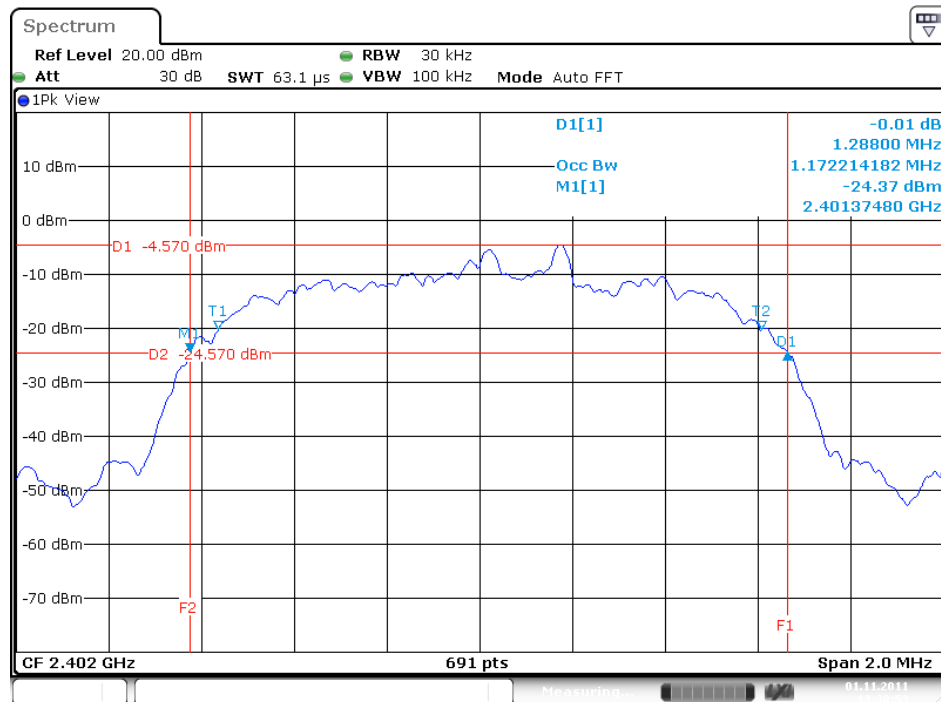


Date: 1.NOV.2011 13:38:54

20 dB Bandwidth Plot on Channel 39 / 2441 MHz / Mode 2

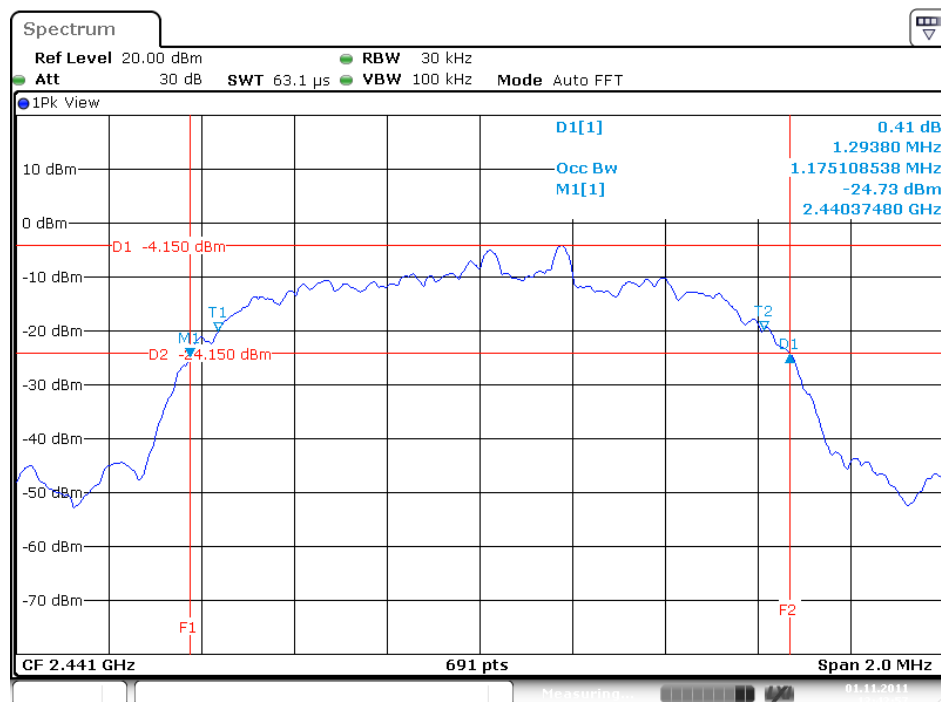


Date: 1.NOV.2011 13:42:57


20 dB Bandwidth Plot on Channel 78 / 2480 MHz / Mode 2

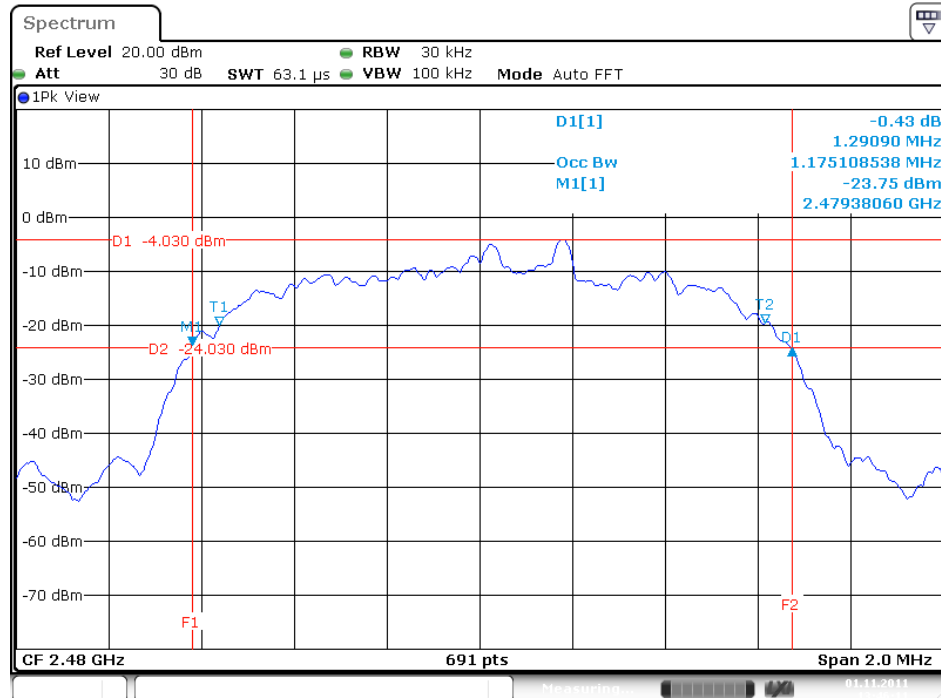

Channel Separation Plot on Channel 0~1 / 2402 MHz ~ 2403 MHz / Mode 2

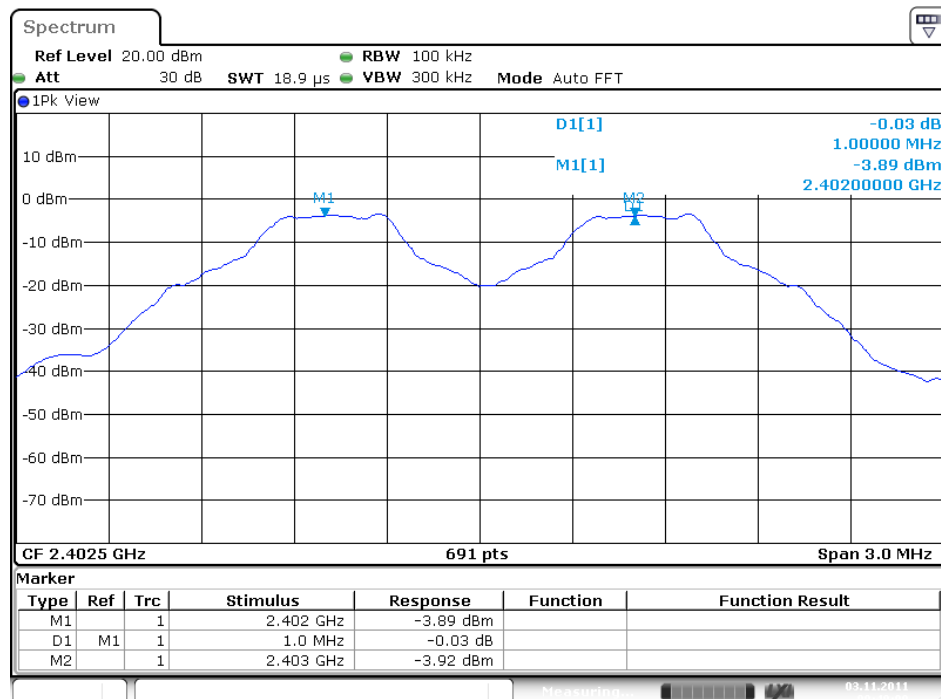


Channel Separation Plot on Channel 39~40 / 2441 MHz ~ 2442 MHz / Mode 2

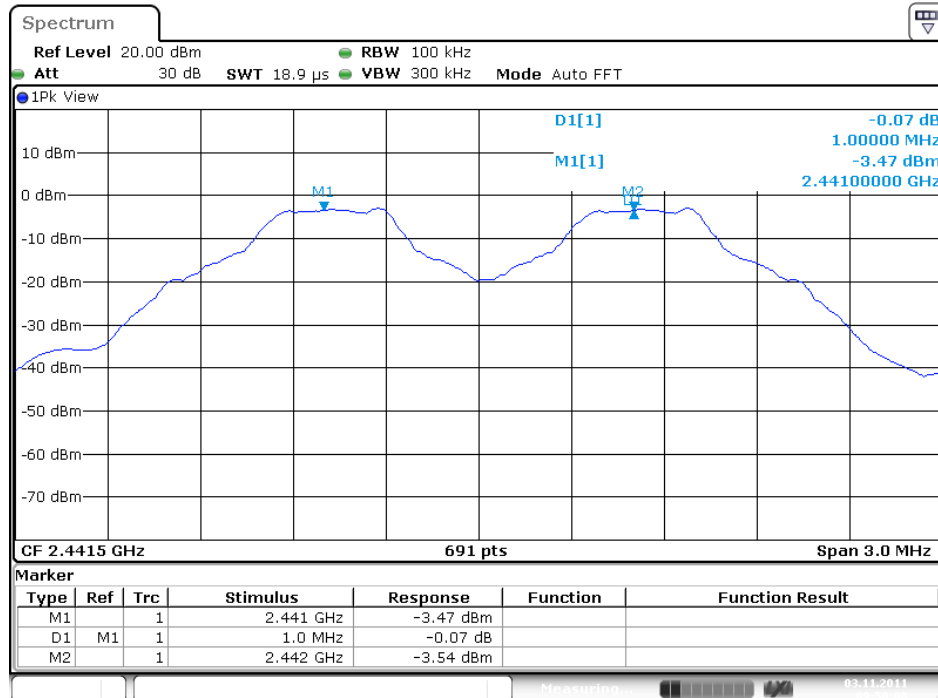

Date: 3.NOV.2011 09:50:08

Channel Separation Plot on Channel 77~78 / 2479 MHz ~ 2480 MHz / Mode 2

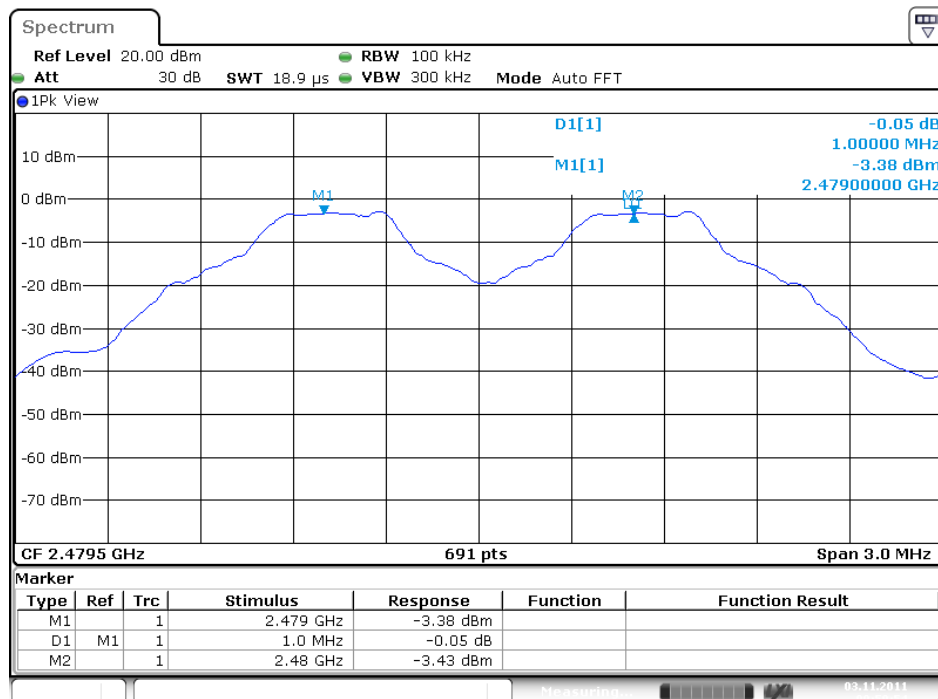

Date: 3.NOV.2011 09:50:54

4.4. Number of Hopping Frequency Measurement

4.4.1. Limit

At least 15 hopping frequencies, and should be equally spaced.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilized.
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

4.4.4. Test Setup Layout

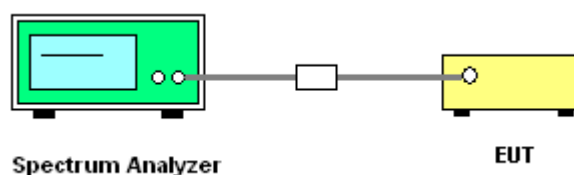

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Number of Hopping Frequency

Temperature	23°C	Humidity	65%
Test Engineer	Serway Li	Configurations	GFSK / Mode 1

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
GFSK	0 ~ 78	2402 ~ 2480	79	75	Complies

Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz

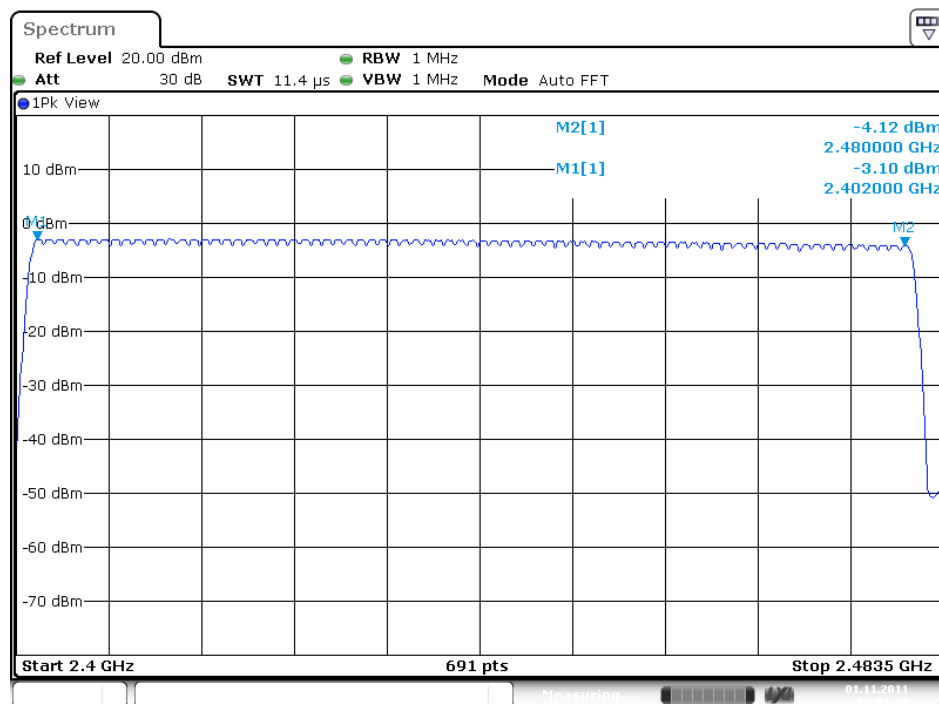


Date: 1.NOV.2011 15:01:38

Temperature	23°C	Humidity	65%
Test Engineer	Serway Li	Configurations	GFSK / Mode 2

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
GFSK	0 ~ 78	2402 ~ 2480	79	75	Complies

Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz

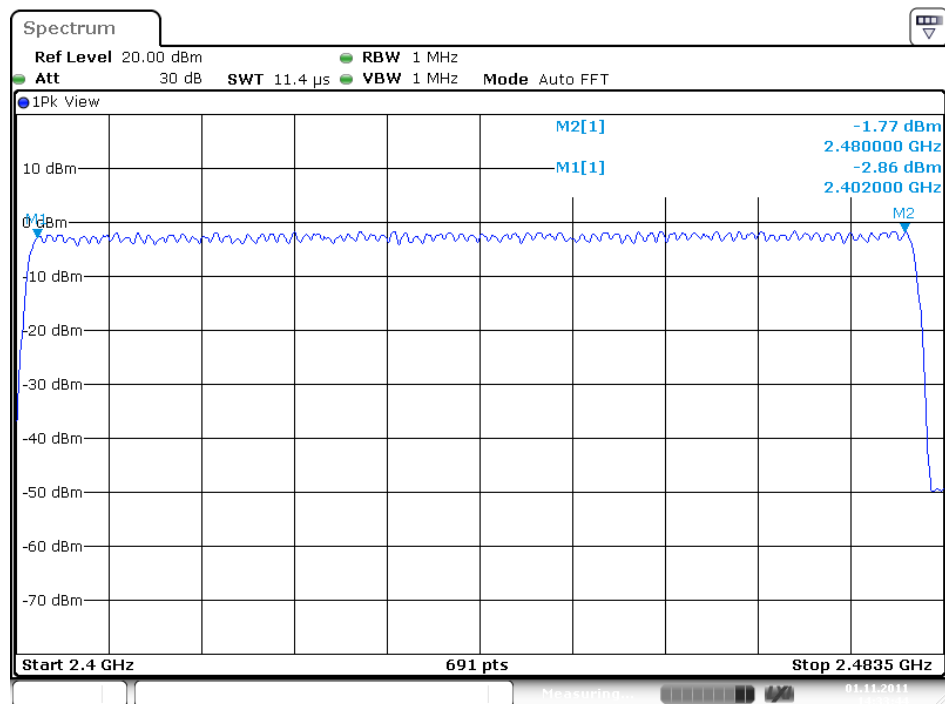

Date: 1.NOV.2011 14:33:44

4.5. Dwell Time Measurement

4.5.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RB	1000 kHz
VB	1000 kHz
Detector	Peak
Trace	Single Trigger

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Set the EUT for 3DH5, 3DH3 and 3DH1 packet transmitting.
8. Measure the maximum time duration of one single pulse.

4.5.4. Test Setup Layout

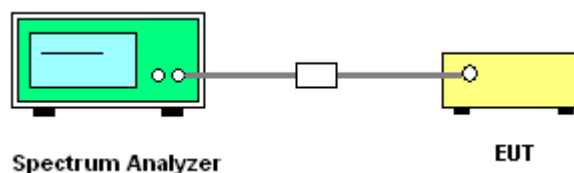

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Dwell Time

Temperature	23°C	Humidity	65%
Test Engineer	Serway Li	Configurations	Bluetooth / Mode 1

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
3DH5	2402 MHz	2.9275	0.3123	0.4000	Complies
3DH3	2402 MHz	1.6957	0.2713	0.4000	Complies
3DH1	2402 MHz	0.4348	0.1391	0.4000	Complies
3DH5	2441 MHz	2.9275	0.3123	0.4000	Complies
3DH3	2441 MHz	1.6957	0.2713	0.4000	Complies
3DH1	2441 MHz	0.4348	0.1391	0.4000	Complies
3DH5	2480 MHz	2.9420	0.3138	0.4000	Complies
3DH3	2480 MHz	1.6812	0.2690	0.4000	Complies
3DH1	2480 MHz	0.4348	0.1391	0.4000	Complies

Temperature	23°C	Humidity	65%
Test Engineer	Serway Li	Configurations	Bluetooth / Mode 2

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
3DH5	2402 MHz	2.8841	0.3076	0.4000	Complies
3DH3	2402 MHz	1.6377	0.2620	0.4000	Complies
3DH1	2402 MHz	0.3913	0.1252	0.4000	Complies
3DH5	2441 MHz	2.8986	0.3092	0.4000	Complies
3DH3	2441 MHz	1.6377	0.2620	0.4000	Complies
3DH1	2441 MHz	0.3913	0.1252	0.4000	Complies
3DH5	2480 MHz	2.8986	0.3092	0.4000	Complies
3DH3	2480 MHz	1.6377	0.2620	0.4000	Complies
3DH1	2480 MHz	0.3913	0.1252	0.4000	Complies

Note: Pulse Duration * Number of Pulses*(Dwell time / measure time)

Remark:


3DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds.

3DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within


31.6 seconds.

3DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.


Dwell Time Plot on Channel 0 / 3DH5 / 2402 MHz / Mode 1

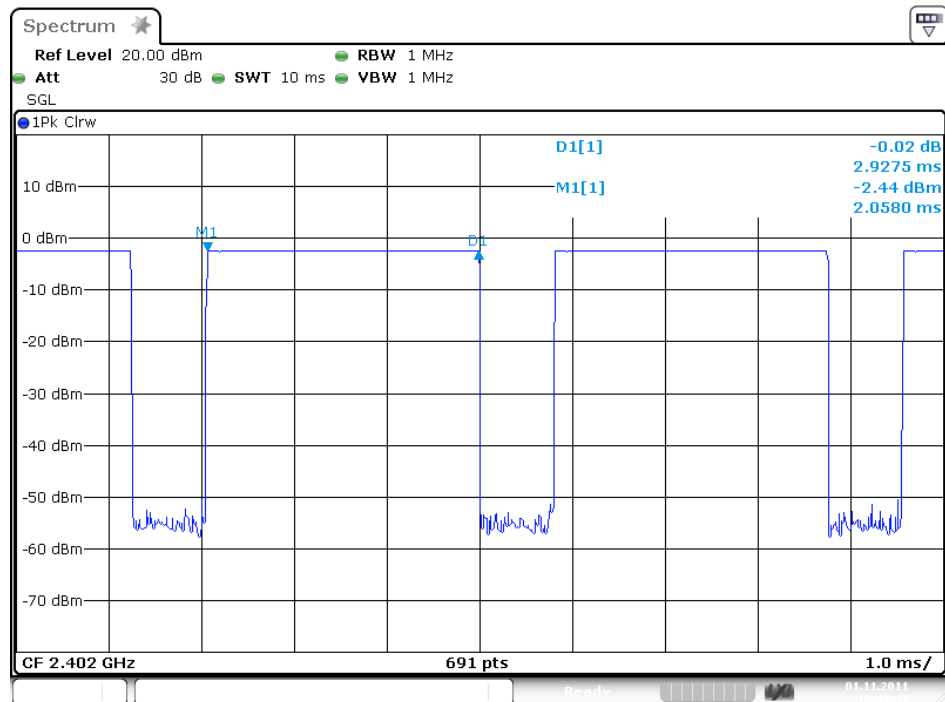


Dwell Time Plot on Channel 0 / 3DH3 / 2402 MHz / Mode 1

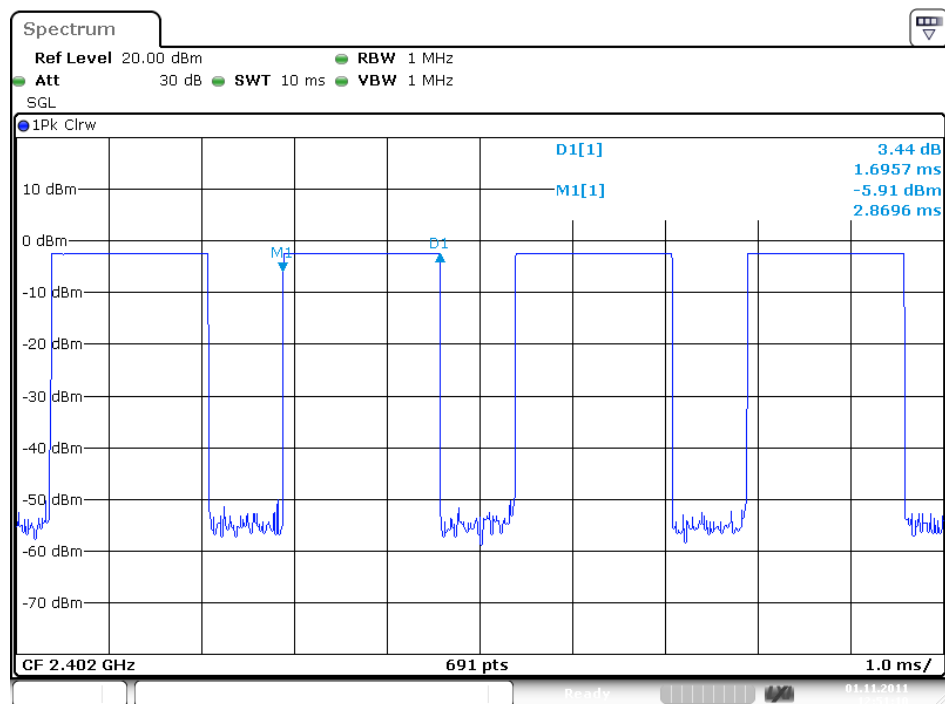


Dwell Time Plot on Channel 0 / 3DH1 / 2402 MHz / Mode 1

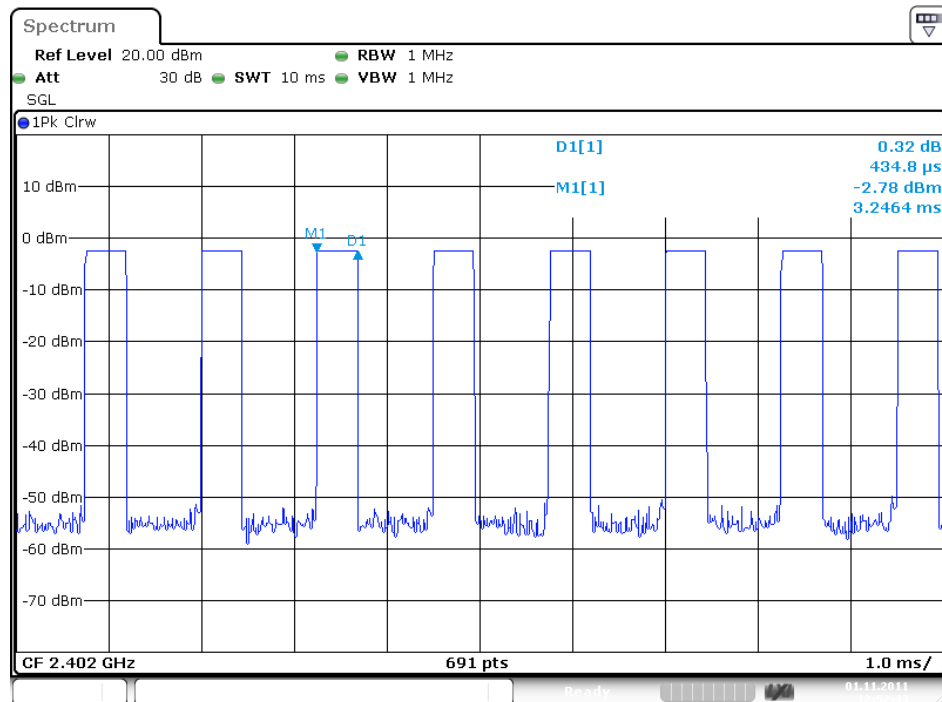


Dwell Time Plot on Channel 39 / 3DH5 / 2441 MHz / Mode 1

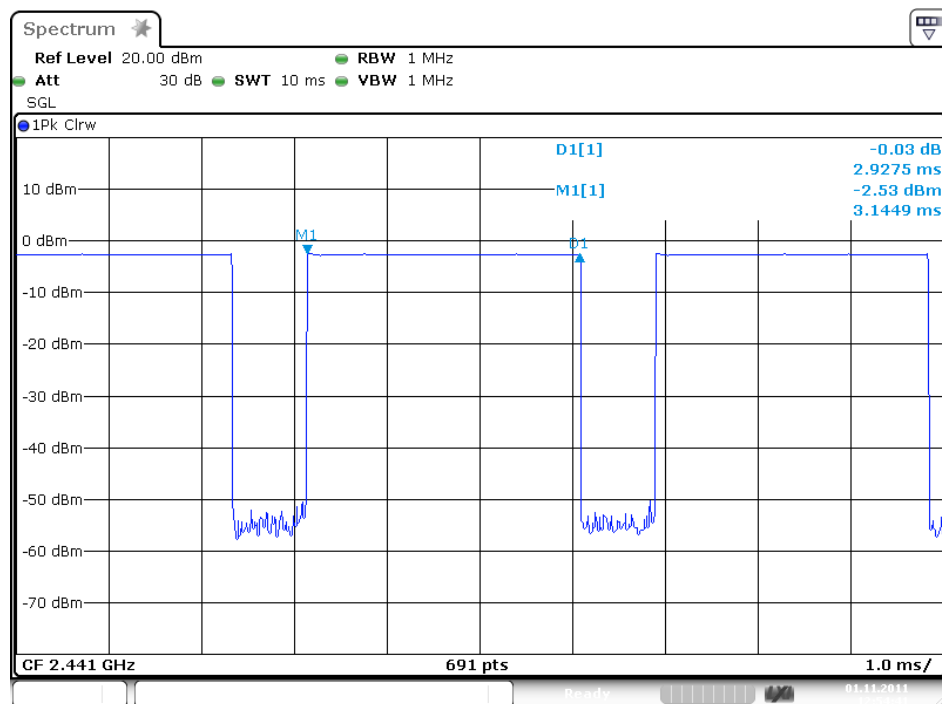


Dwell Time Plot on Channel 39 / 3DH3 / 2441 MHz / Mode 1

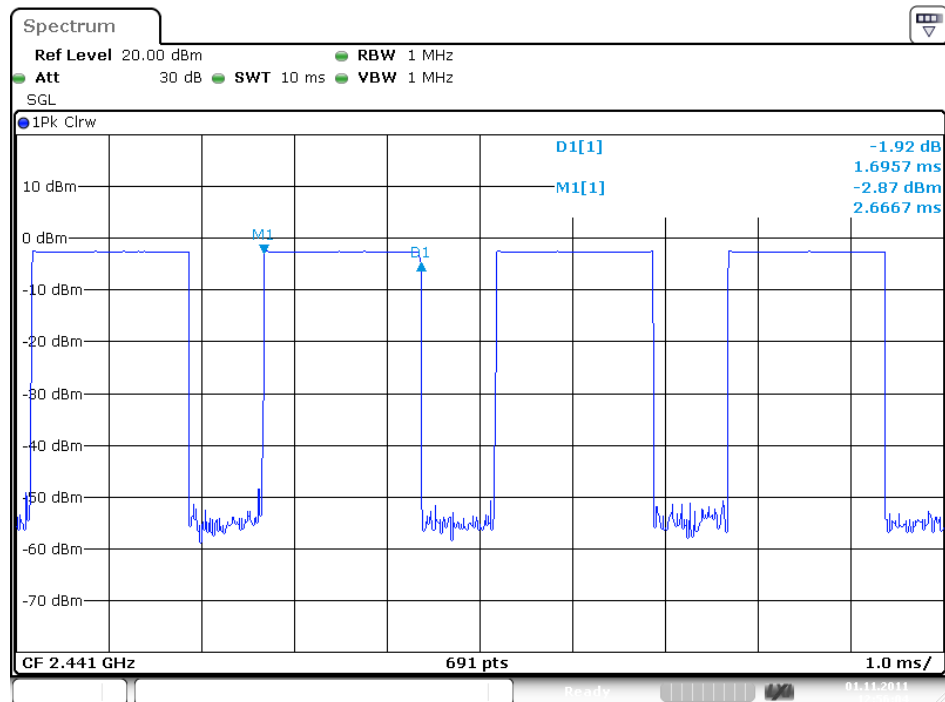


Dwell Time Plot on Channel 39 / 3DH1 / 2441 MHz / Mode 1

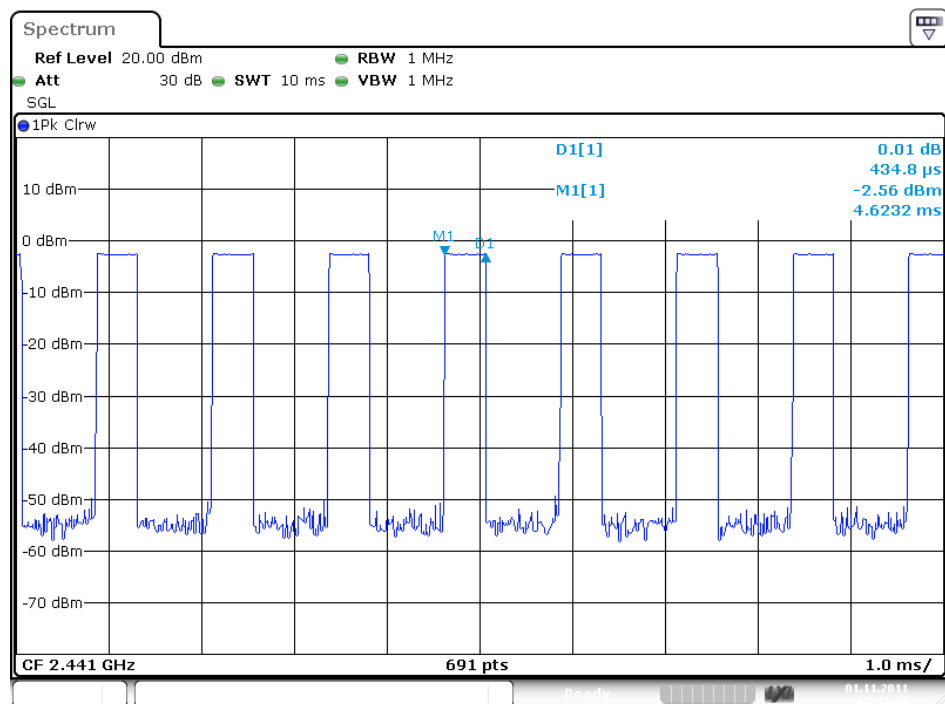


Dwell Time Plot on Channel 78 / 3DH5 / 2480 MHz / Mode 1

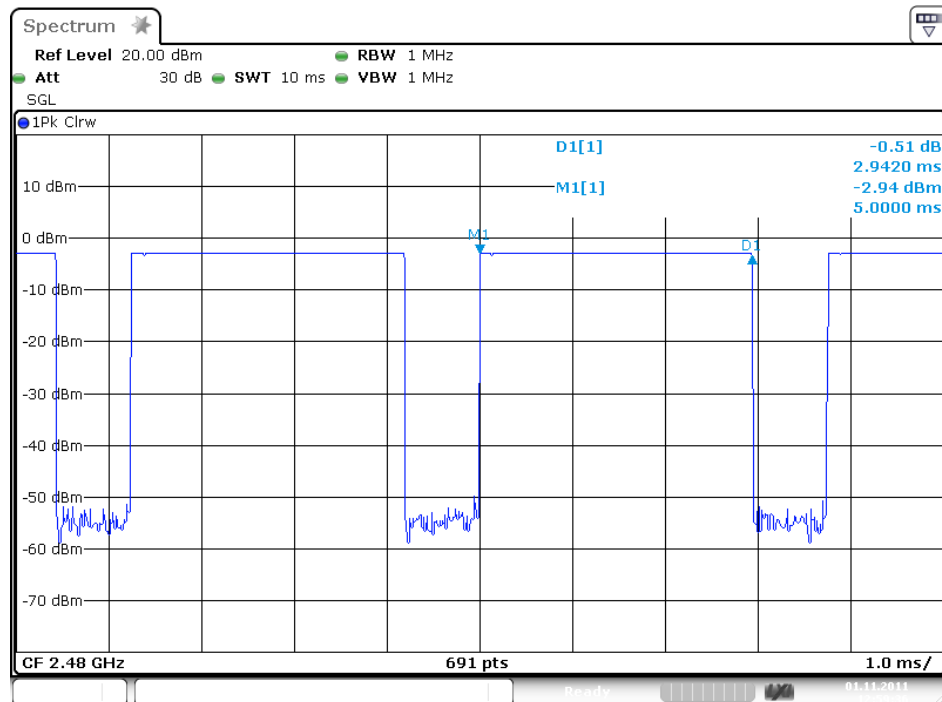

Dwell Time Plot on Channel 78 / 3DH3 / 2480 MHz / Mode 1

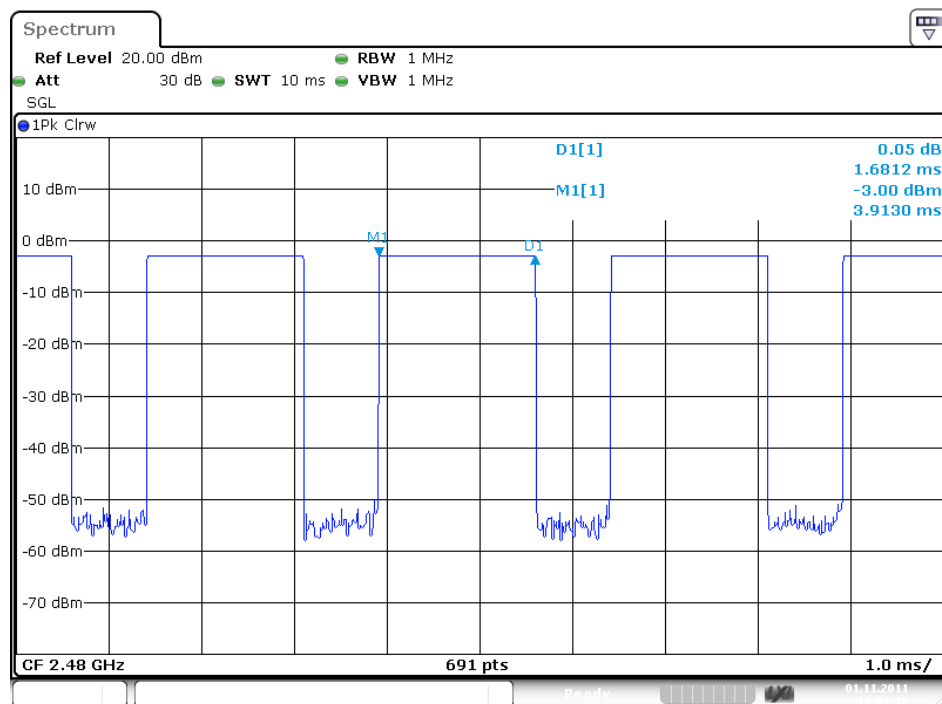


Dwell Time Plot on Channel 78 / 3DH1 / 2480 MHz / Mode 1

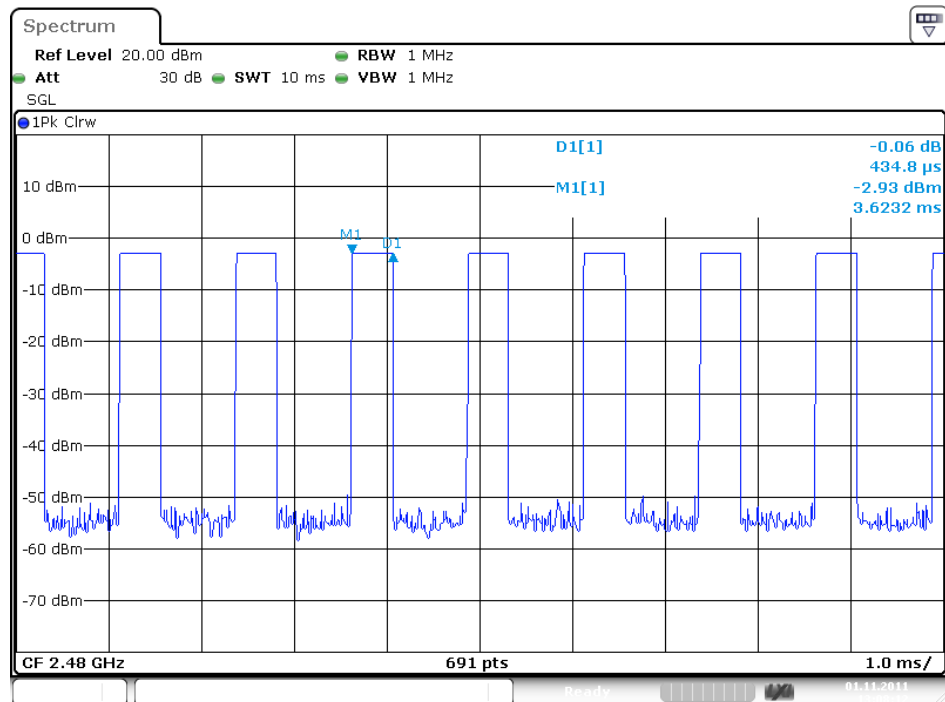


Date: 1.NOV.2011 13:08:13

Dwell Time Plot on Channel 0 / 3DH5 / 2402 MHz / Mode 2

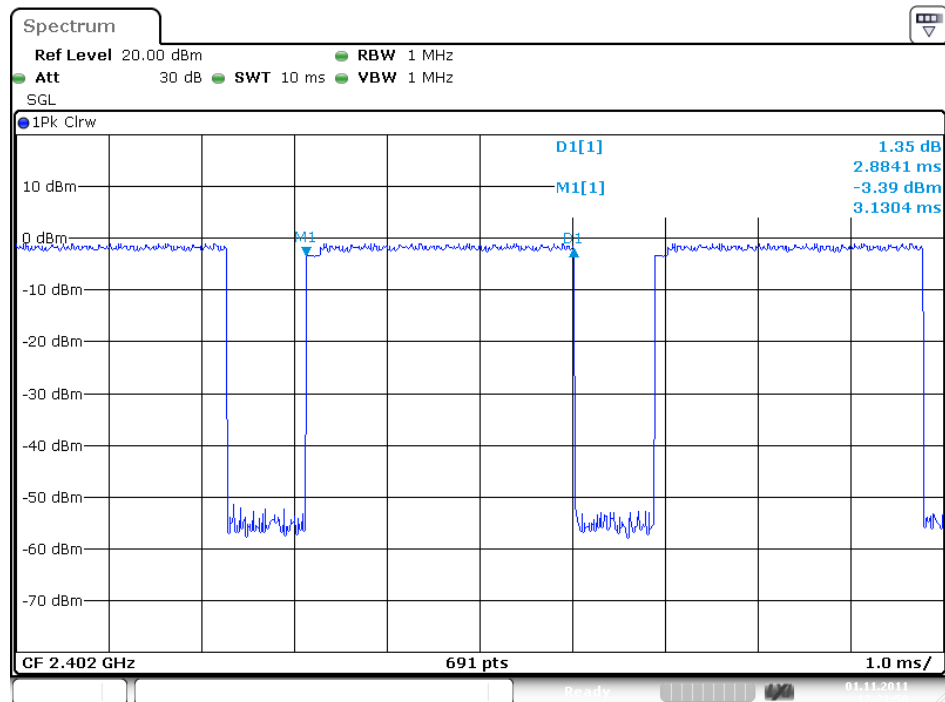


Date: 1.NOV.2011 12:21:50

Dwell Time Plot on Channel 0 / 3DH3 / 2402 MHz / Mode 2

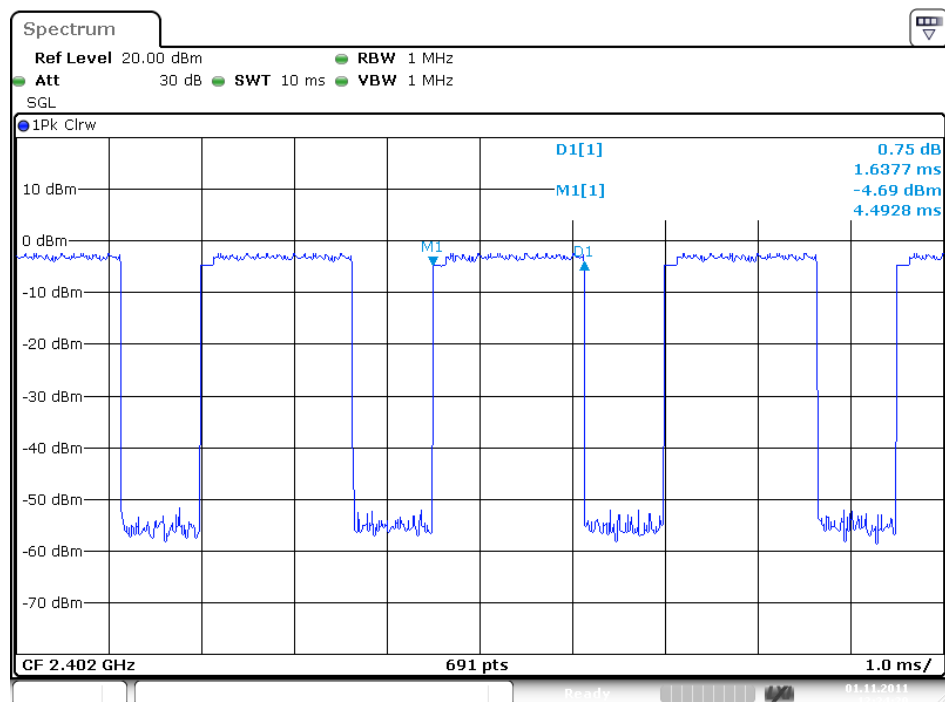

Date: 1.NOV.2011 12:24:20



Spectrum

Ref Level 20.00 dBm RBW 1 MHz
 Att 30 dB SWT 10 ms VBW 1 MHz
 SGL

1Pk Clrw

D1[1] 0.82 μ s
 M1[1] -3.38 dBm
 3.5942 ms

CF 2.402 GHz 691 pts 1.0 ms/

Spectrum

Ref Level 20.00 dBm
 Att 30 dB
 RBW 1 MHz
 SWT 10 ms
 VBW 1 MHz
 SGL

● 1Pk Clr

10 dBm
 0 dBm
 -10 dBm
 -20 dBm
 -30 dBm
 -40 dBm
 -50 dBm
 -60 dBm
 -70 dBm


M1
 M1[1]

0.91 dB
 2.8986 ms
 -2.99 dBm
 3.1449 ms


CF 2.441 GHz 691 pts 1.0 ms/

Issued Date : Nov. 22, 2011


Dwell Time Plot on Channel 39 / 3DH3 / 2441 MHz / Mode 2

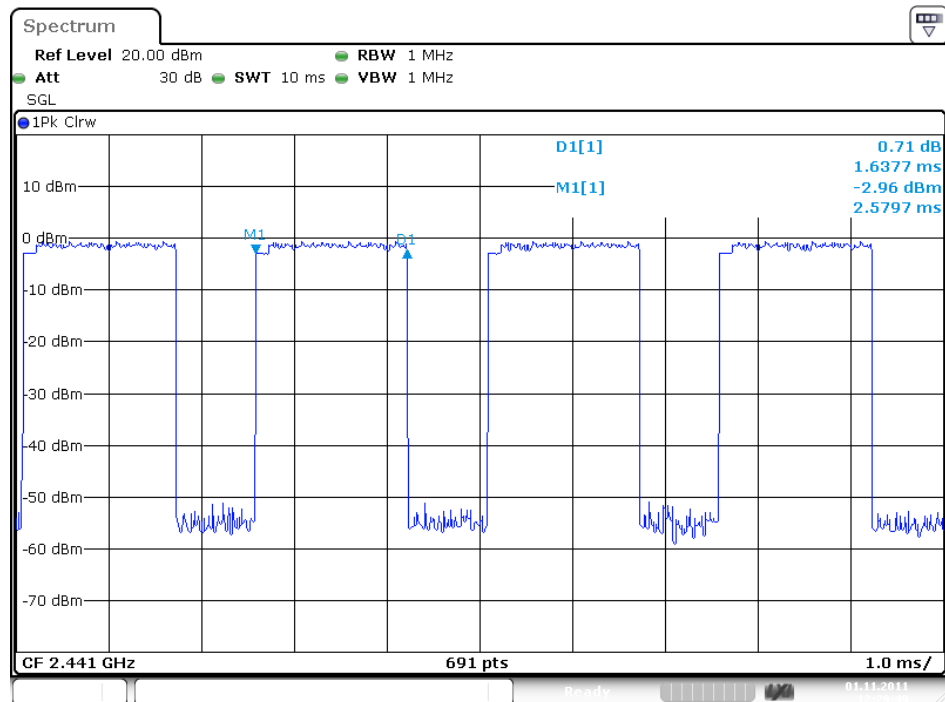

Dwell Time Plot on Channel 39 / 3DH1 / 2441 MHz / Mode 2

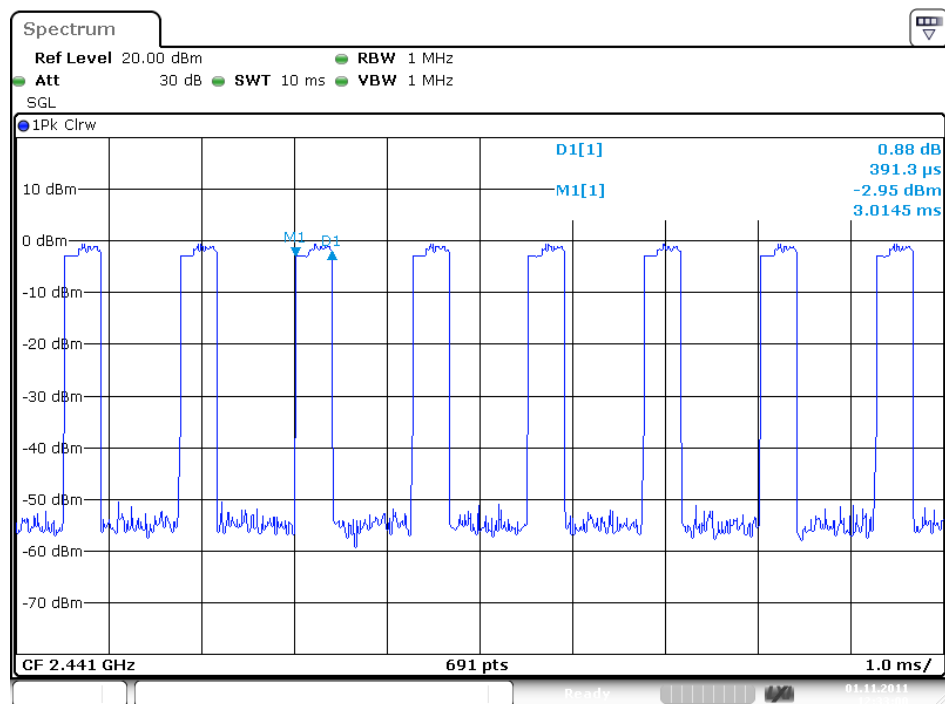


Dwell Time Plot on Channel 78 / 3DH5 / 2480 MHz / Mode 2

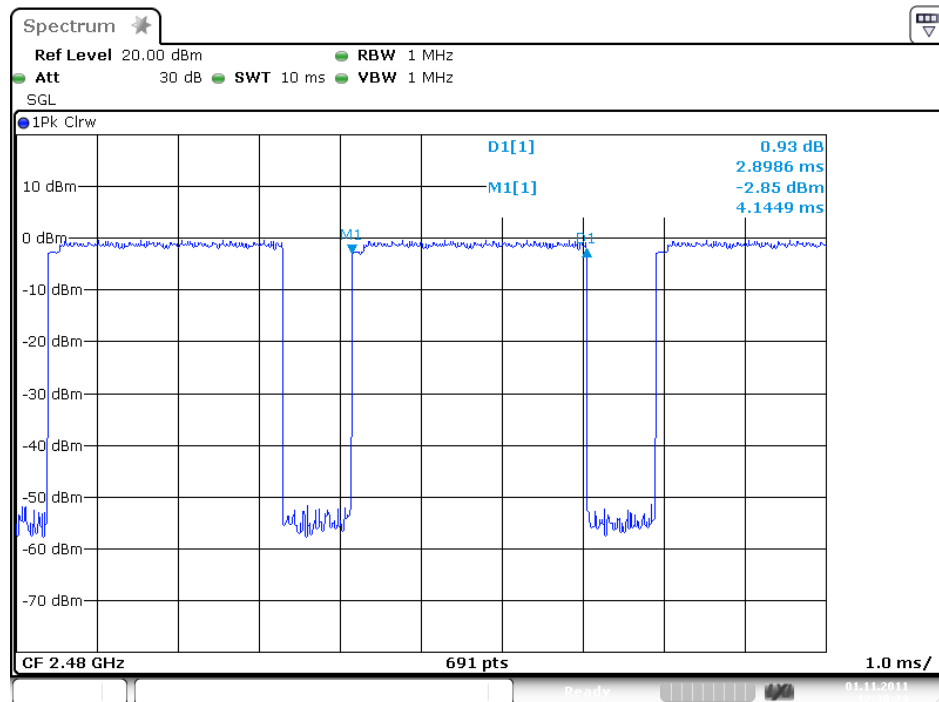


Date: 1.NOV.2011 12:38:23

Dwell Time Plot on Channel 78 / 3DH3 / 2480 MHz / Mode 2

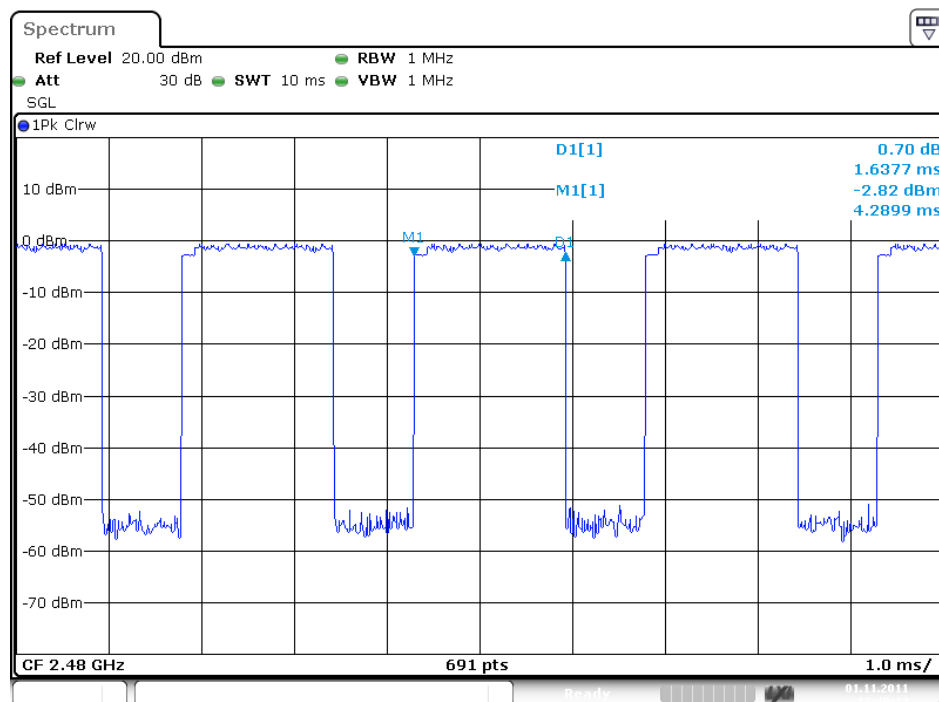

Date: 1.NOV.2011 12:40:13

Dwell Time Plot on Channel 78 / 3DH1 / 2480 MHz / Mode 2

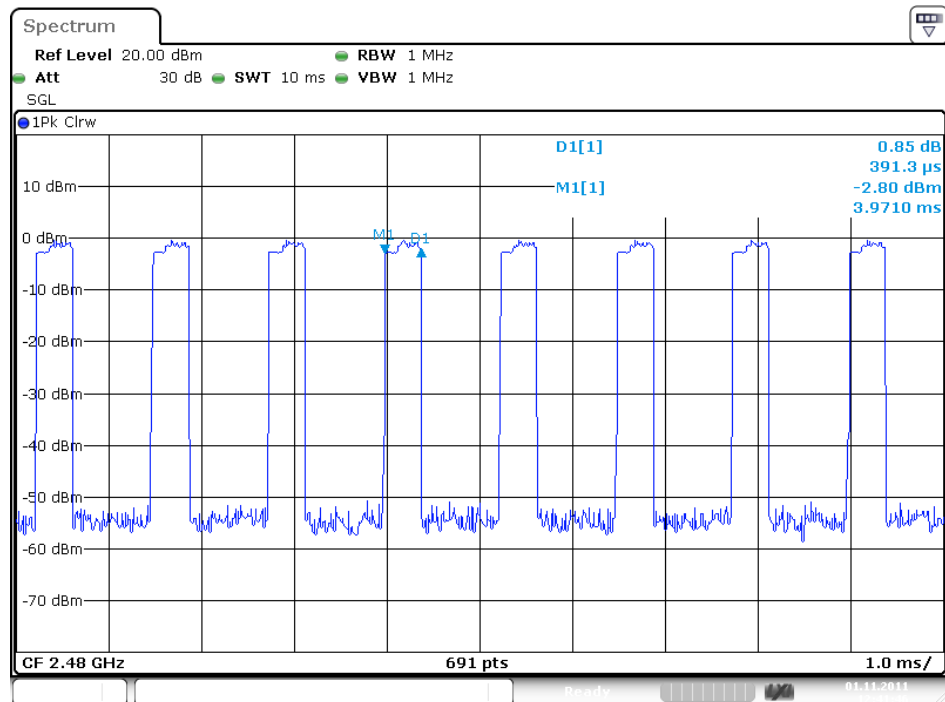

Date: 1.NOV.2011 12:41:47

4.6. Radiated Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 1GHz

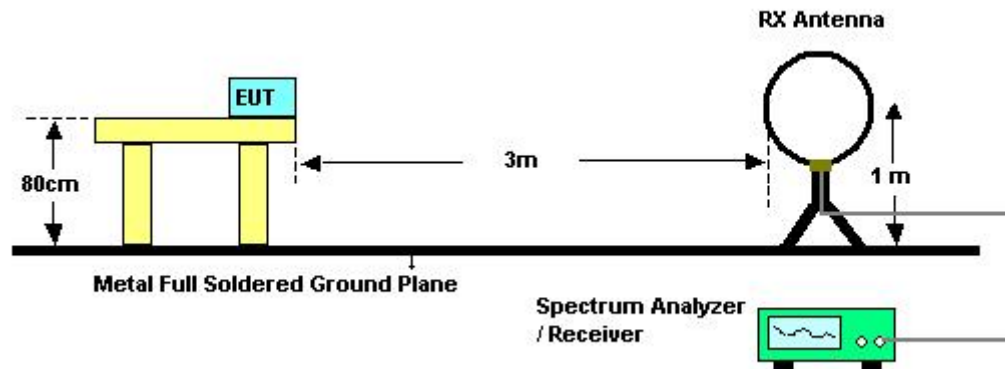

For radiated emissions above 1GHz

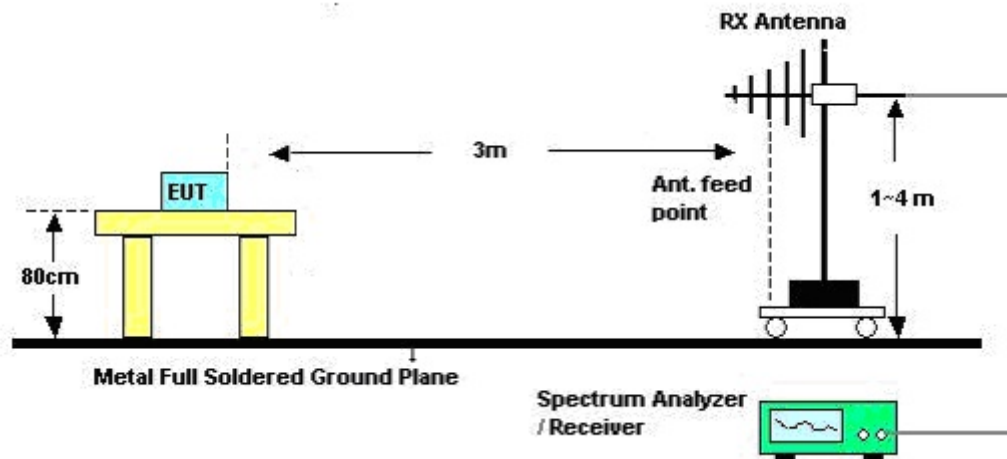

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	21°C	Humidity	61%
Test Engineer	Benson Peng	Test Date	Oct. 29, 2011

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	21°C	Humidity	61%
Test Engineer	Benson Peng	Configurations	Mode 1

Horizontal

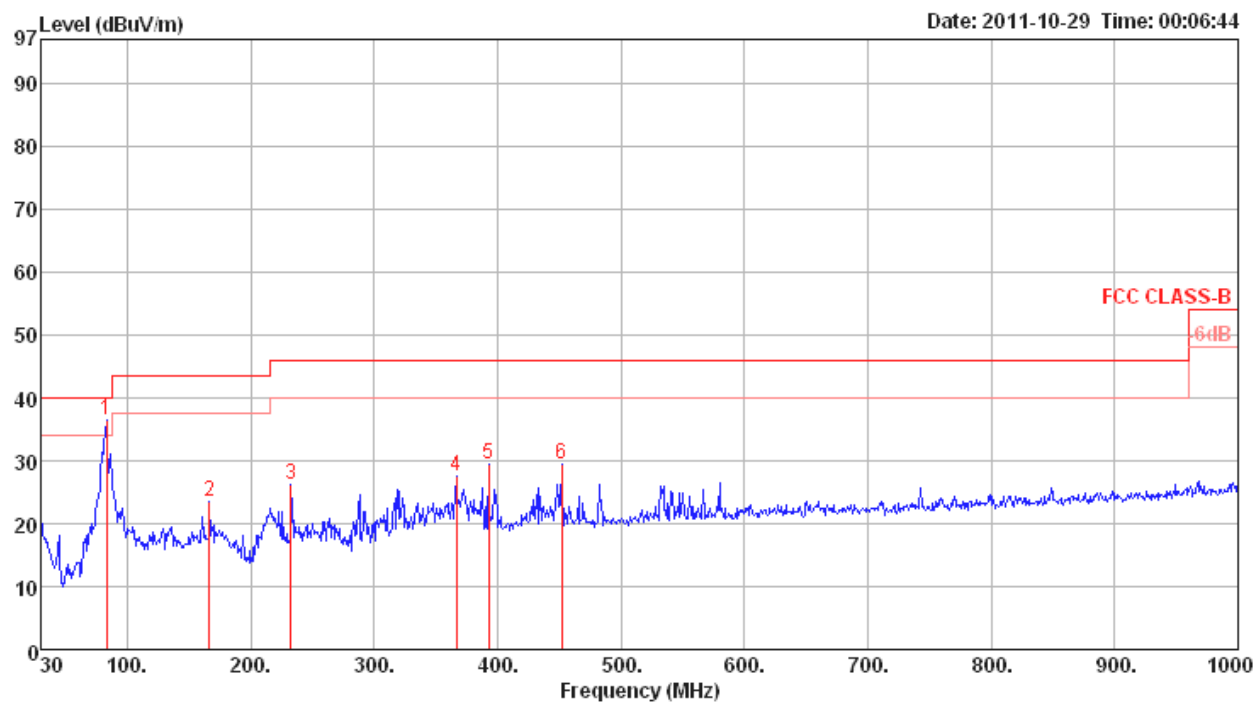

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Aux
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Factor
1	83.35	36.60	40.00	-3.40	55.46	1.10	7.71	27.67	Peak	100	0 HORIZONTAL	0.00
2	166.77	23.46	43.50	-20.04	36.66	1.53	12.54	27.27	Peak	100	0 HORIZONTAL	0.00
3	232.73	26.15	46.00	-19.85	39.87	1.83	11.48	27.03	Peak	100	0 HORIZONTAL	0.00
4	366.59	27.53	46.00	-18.47	37.50	2.23	15.17	27.37	Peak	100	0 HORIZONTAL	0.00
5	392.78	29.57	46.00	-16.43	38.95	2.29	15.88	27.55	Peak	100	0 HORIZONTAL	0.00
6	451.95	29.35	46.00	-16.65	37.73	2.60	16.88	27.86	Peak	100	0 HORIZONTAL	0.00

Vertical

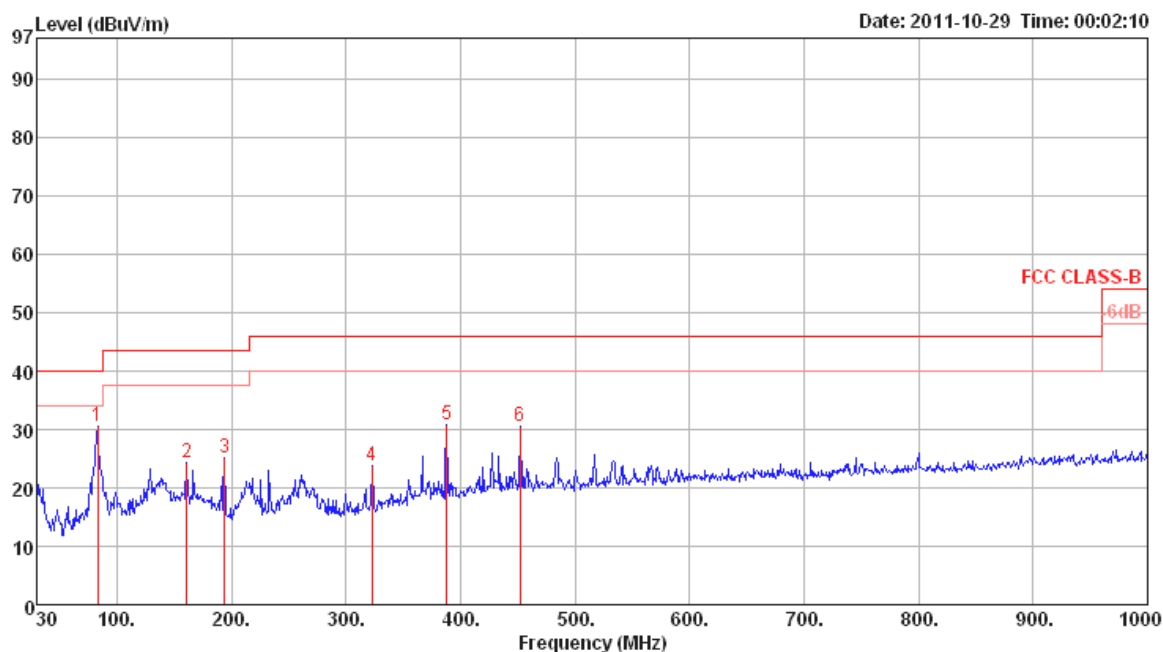

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase	Aux Factor
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg		dB
1	83.35	30.42	40.00	-9.58	49.28	1.10	7.71	27.67	Peak	400	0	VERTICAL	0.00
2	160.95	24.32	43.50	-19.18	38.01	1.50	12.10	27.29	Peak	400	0	VERTICAL	0.00
3	193.93	25.12	43.50	-18.38	40.30	1.67	10.28	27.13	Peak	400	0	VERTICAL	0.00
4	322.94	23.88	46.00	-22.12	34.80	2.15	13.99	27.06	Peak	400	0	VERTICAL	0.00
5	387.93	30.75	46.00	-15.25	40.24	2.28	15.75	27.52	Peak	400	0	VERTICAL	0.00
6	451.95	30.66	46.00	-15.34	39.04	2.60	16.88	27.86	Peak	400	0	VERTICAL	0.00

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	21°C	Humidity	61%
Test Engineer	Benson Peng	Configurations	Mode 2

Horizontal

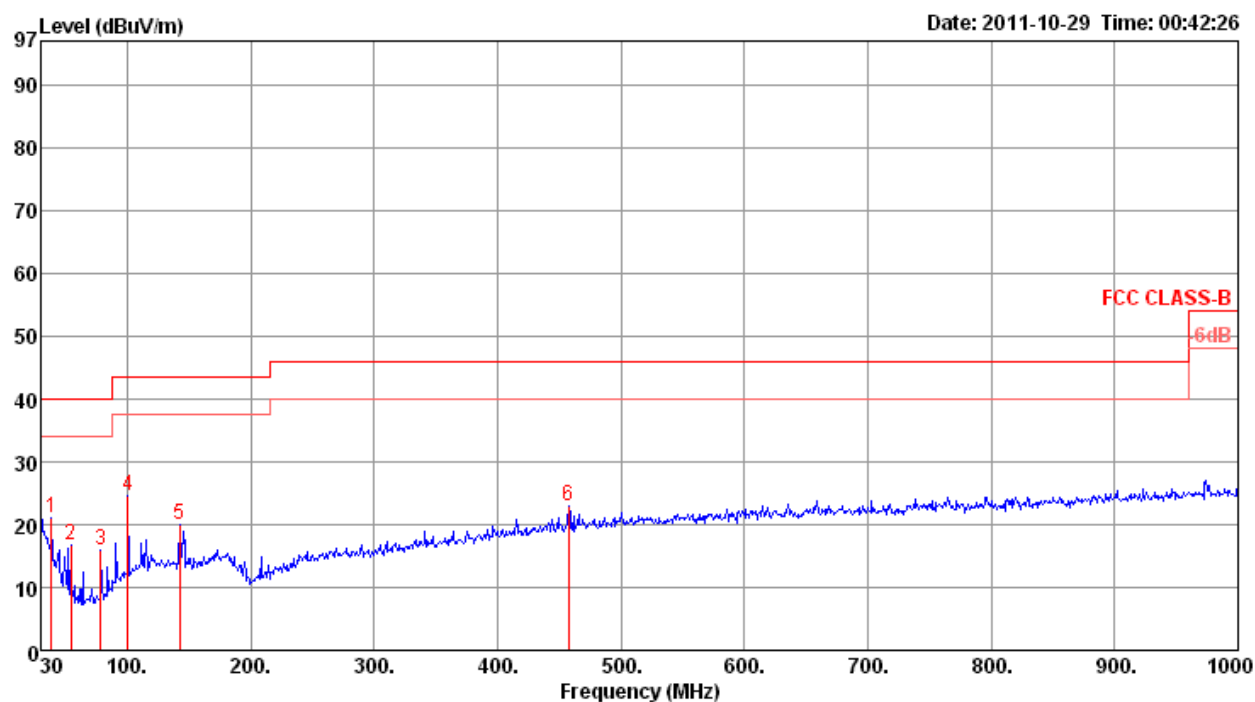

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	Aux
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg		dB
1	38.73	21.12	40.00	-18.88	34.56	0.66	13.70	27.80	Peak	100	0	HORIZONTAL	0.00
2	54.25	16.62	40.00	-23.38	35.79	0.78	7.83	27.78	Peak	100	0	HORIZONTAL	0.00
3	78.50	16.02	40.00	-23.98	35.61	1.03	7.07	27.69	Peak	100	0	HORIZONTAL	0.00
4	100.81	24.60	43.50	-18.90	39.94	1.20	11.06	27.60	Peak	100	0	HORIZONTAL	0.00
5	142.52	19.98	43.50	-23.52	33.75	1.41	12.21	27.39	Peak	100	0	HORIZONTAL	0.00
6	457.77	23.03	46.00	-22.97	31.32	2.62	16.97	27.88	Peak	100	0	HORIZONTAL	0.00

Vertical

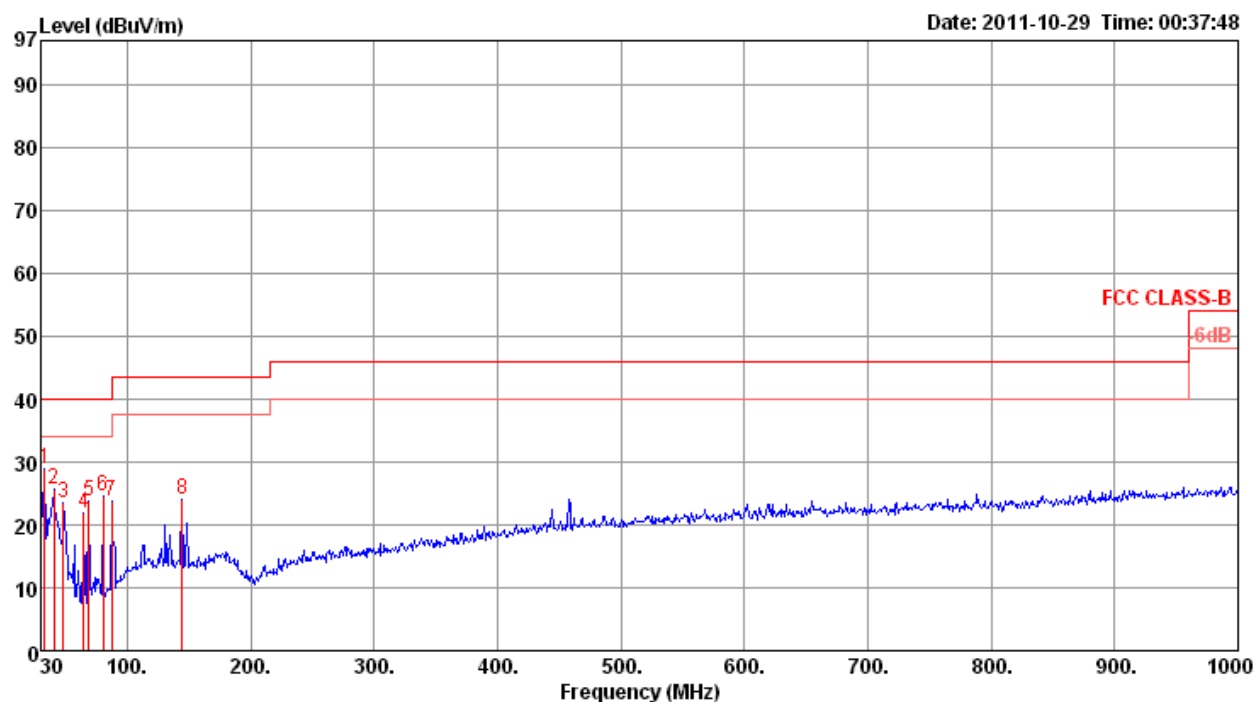

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Aux
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	Factor
1	32.91	28.80	40.00	-11.20	38.95	0.50	17.15	27.80	Peak	400	0 VERTICAL	0.00
2	40.67	25.62	40.00	-14.38	40.17	0.70	12.55	27.80	Peak	400	0 VERTICAL	0.00
3	48.43	23.57	40.00	-16.43	41.54	0.70	9.13	27.80	Peak	400	0 VERTICAL	0.00
4	64.92	21.87	40.00	-18.13	42.01	0.90	6.70	27.74	Peak	400	0 VERTICAL	0.00
5	68.80	23.82	40.00	-16.18	44.08	0.82	6.65	27.73	Peak	400	0 VERTICAL	0.00
6	80.44	24.71	40.00	-15.29	44.12	1.10	7.17	27.68	Peak	400	0 VERTICAL	0.00
7	87.23	23.70	40.00	-16.30	41.81	1.10	8.44	27.65	Peak	400	0 VERTICAL	0.00
8	144.46	24.13	43.50	-19.37	37.97	1.42	12.12	27.38	Peak	400	0 VERTICAL	0.00

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	21°C	Humidity	61%
Test Engineer	Benson Peng	Configurations	Channel 0 / Mode 1
Test Date	Oct. 27, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4803.99	35.44	54.00	-18.56	34.17	3.29	33.02	35.04	Average	186	118	HORIZONTAL
2	4804.07	46.06	74.00	-27.94	44.79	3.29	33.02	35.04	Peak	186	118	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4803.84	47.34	74.00	-26.66	46.07	3.29	33.02	35.04	Peak	100	354	VERTICAL
2	4804.01	35.42	54.00	-18.58	34.15	3.29	33.02	35.04	Average	100	354	VERTICAL

Temperature	21°C	Humidity	61%
Test Engineer	Benson Peng	Configurations	Channel 39 / Mode 1
Test Date	Oct. 27, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4882.03	33.12	54.00	-20.88	31.66	3.33	33.16	35.03	Average	100	192	HORIZONTAL
2	4882.17	44.74	74.00	-29.26	43.28	3.33	33.16	35.03	Peak	100	192	HORIZONTAL
3	7323.01	46.83	54.00	-7.17	42.21	4.06	35.96	35.40	Average	164	165	HORIZONTAL
4	7323.55	57.35	74.00	-16.65	52.73	4.06	35.96	35.40	Peak	164	165	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4882.03	34.67	54.00	-19.33	33.21	3.33	33.16	35.03	Average	100	8	VERTICAL
2	4882.34	45.70	74.00	-28.30	44.24	3.33	33.16	35.03	Peak	100	8	VERTICAL
3	7322.47	49.93	74.00	-24.07	45.31	4.06	35.96	35.40	Peak	99	216	VERTICAL
4	7323.06	39.04	54.00	-14.96	34.42	4.06	35.96	35.40	Average	99	216	VERTICAL

Temperature	21°C	Humidity	61%
Test Engineer	Benson Peng	Configurations	Channel 78 / Mode 1
Test Date	Oct. 27, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4959.73	46.06	74.00	-27.94	44.37	3.37	33.33	35.01	Peak	158	349	HORIZONTAL
2	4960.03	34.34	54.00	-19.66	32.65	3.37	33.33	35.01	Average	158	349	HORIZONTAL
3	7440.03	46.57	54.00	-7.43	41.70	4.07	36.20	35.40	Average	149	163	HORIZONTAL
4	7440.45	56.86	74.00	-17.14	51.99	4.07	36.20	35.40	Peak	149	163	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4960.01	35.66	54.00	-18.34	33.97	3.37	33.33	35.01	Average	100	324	VERTICAL
2	4960.30	46.11	74.00	-27.89	44.42	3.37	33.33	35.01	Peak	100	324	VERTICAL
3	7440.06	39.53	54.00	-14.47	34.66	4.07	36.20	35.40	Average	100	147	VERTICAL
4	7440.48	51.11	74.00	-22.89	46.24	4.07	36.20	35.40	Peak	100	147	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	21°C	Humidity	61%
Test Engineer	Benson Peng	Configurations	Channel 0 / Mode 2
Test Date	Oct. 27, 2011		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4804.01	51.47	74.00	-22.53	49.08	4.23	33.36	35.20	Peak	186	309	HORIZONTAL
2	4804.07	39.79	54.00	-14.21	37.40	4.23	33.36	35.20	Average	186	309	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4803.91	47.90	74.00	-26.10	45.51	4.23	33.36	35.20	Peak	129	285	VERTICAL
2	4804.06	35.81	54.00	-18.19	33.42	4.23	33.36	35.20	Average	129	285	VERTICAL

Temperature	21°C	Humidity	61%
Test Engineer	Benson Peng	Configurations	Channel 39 / Mode 2
Test Date	Oct. 27, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4882.08	39.34	54.00	-14.66	36.73	4.33	33.48	35.20	Average	188	41	HORIZONTAL
2	4882.10	51.19	74.00	-22.81	48.58	4.33	33.48	35.20	Peak	188	41	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	4882.03	48.99	74.00	-25.01	46.38	4.33	33.48	35.20	Peak	112	320	VERTICAL
2	4882.06	36.66	54.00	-17.34	34.05	4.33	33.48	35.20	Average	112	320	VERTICAL

Temperature	21°C	Humidity	61%
Test Engineer	Benson Peng	Configurations	Channel 78 / Mode 2
Test Date	Oct. 27, 2011		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	
1	4959.83	50.66	74.00	-23.34	47.80	4.42	33.64	35.20	Peak	180	322	HORIZONTAL
2	4960.03	39.39	54.00	-14.61	36.53	4.42	33.64	35.20	Average	180	322	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	
1	4959.99	36.92	54.00	-17.08	34.06	4.42	33.64	35.20	Average	108	187	VERTICAL
2	4960.31	48.73	74.00	-25.27	45.87	4.42	33.64	35.20	Peak	108	187	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

4.7.3. Test Procedures

- The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
- In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	21°C	Humidity	61%
Test Engineer	Benson Peng	Configurations	Channel 0, 39, 78
Test Date	Oct. 27, 2011	Test Mode	Mode 1

Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2388.20	53.78	74.00	-20.22	23.40	2.21	28.17	0.00	Peak	101	8	VERTICAL
2	2390.00	42.41	54.00	-11.59	12.02	2.22	28.17	0.00	Average	101	8	VERTICAL
3	2401.80	83.06	74.00			2.22	28.21	0.00	Peak	101	8	VERTICAL
4	2402.00	74.94	54.00			2.22	28.21	0.00	Average	101	8	VERTICAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2387.60	52.94	74.00	-21.06	22.56	2.21	28.17	0.00	Peak	101	132	HORIZONTAL
2	2390.00	42.44	54.00	-11.56	12.05	2.22	28.17	0.00	Average	101	132	HORIZONTAL
3	2441.00	75.11	54.00			2.24	28.29	0.00	Average	101	132	HORIZONTAL
4	2441.40	83.16	74.00			2.24	28.29	0.00	Peak	101	132	HORIZONTAL
5	2483.50	42.85	54.00	-11.15	12.21	2.26	28.38	0.00	Average	101	132	HORIZONTAL
6	2483.50	52.88	74.00	-21.12	22.24	2.26	28.38	0.00	Peak	101	132	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

Channel 78

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2480.00	71.79	54.00			2.26	28.37	0.00	Average	100	327	VERTICAL
2	2480.00	80.74	74.00			2.26	28.37	0.00	Peak	100	327	VERTICAL
3	2483.50	42.79	54.00	-11.21	12.16	2.26	28.37	0.00	Average	100	327	VERTICAL
4	2483.50	52.25	74.00	-21.75	21.62	2.26	28.37	0.00	Peak	100	327	VERTICAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	21°C	Humidity	61%
Test Engineer	Benson Peng	Configurations	Channel 0, 39, 78 / Mode 2
Test Date	Oct. 27, 2011	Test Mode	Mode 2

Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.84	56.79	74.00	-17.21	25.86	2.88	28.05	0.00	Peak	131	331	HORIZONTAL
2	2390.00	45.59	54.00	-8.41	14.66	2.88	28.05	0.00	Average	131	331	HORIZONTAL
3	2401.84	86.24	74.00			2.88	28.09	0.00	Peak	131	331	HORIZONTAL
4	2402.00	74.19	54.00			2.88	28.09	0.00	Average	131	331	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2389.04	57.63	74.00	-16.37	26.72	2.86	28.05	0.00	Peak	115	79	VERTICAL
2	2390.00	45.53	54.00	-8.47	14.60	2.88	28.05	0.00	Average	115	79	VERTICAL
3	2441.00	72.82	54.00			2.91	28.18	0.00	Average	115	79	VERTICAL
4	2441.00	84.52	74.00			2.91	28.18	0.00	Peak	115	79	VERTICAL
5	2483.50	45.97	54.00	-8.03	14.78	2.93	28.26	0.00	Average	115	79	VERTICAL
6	2483.50	54.50	74.00	-19.50	23.31	2.93	28.26	0.00	Peak	115	79	VERTICAL

Item 3, 4 are the fundamental frequency at 2441 MHz.

Channel 78

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2479.84	86.05	74.00			2.93	28.26	0.00	Peak	100	79	VERTICAL
2	2480.16	74.09	54.00			2.93	28.26	0.00	Average	100	79	VERTICAL
3	2483.50	46.00	54.00	-8.00	14.81	2.93	28.26	0.00	Average	100	79	VERTICAL
4	2483.50	56.14	74.00	-17.86	24.95	2.93	28.26	0.00	Peak	100	79	VERTICAL

Item 1, 2 are the fundamental frequency at 2480 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Low Band Edge Plot on Channel 0 / 2402 MHz / Mode 1

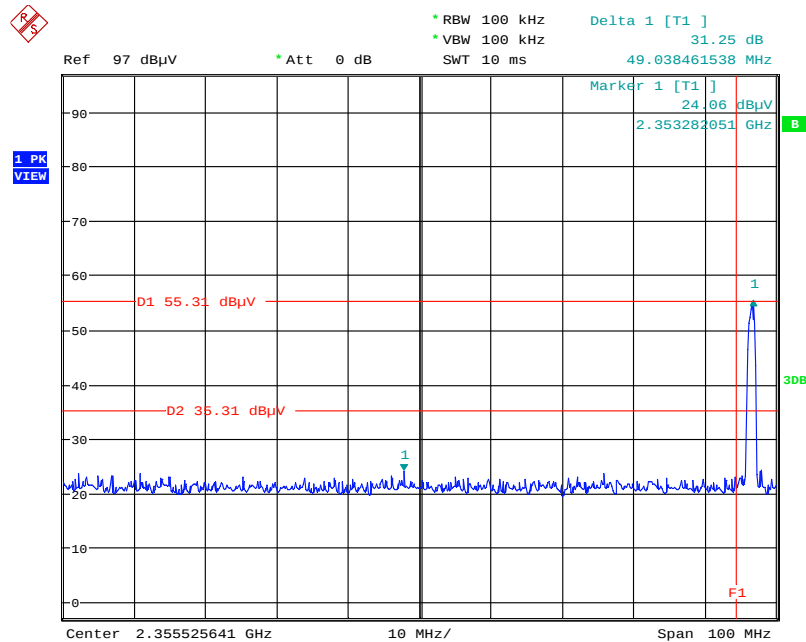

Date: 29.OCT.2011 01:45:18


High Band Edge Plot on Channel 78 / 2480 MHz / Mode 1

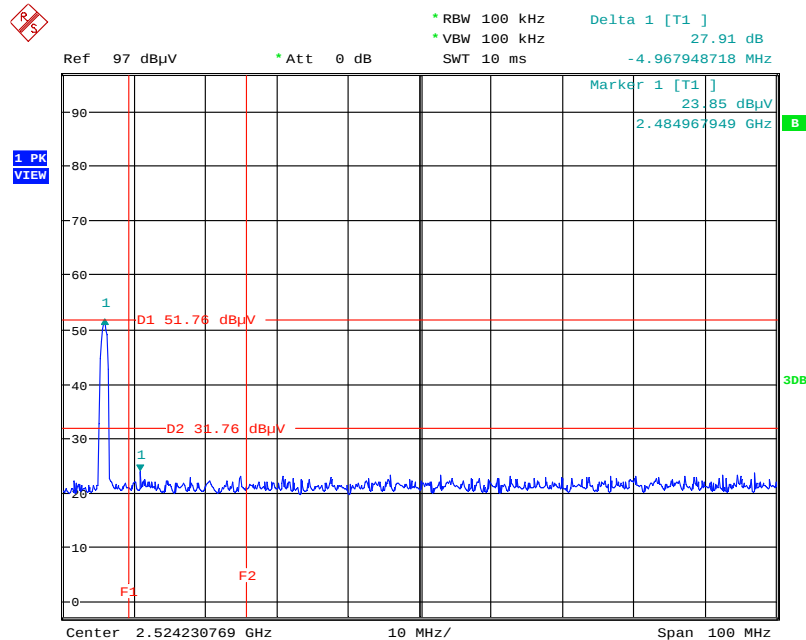

Date: 29.OCT.2011 01:57:19


For Emission not in Restricted Band

Low Band Edge Plot on Channel 0 / 2402 MHz / Mode 2

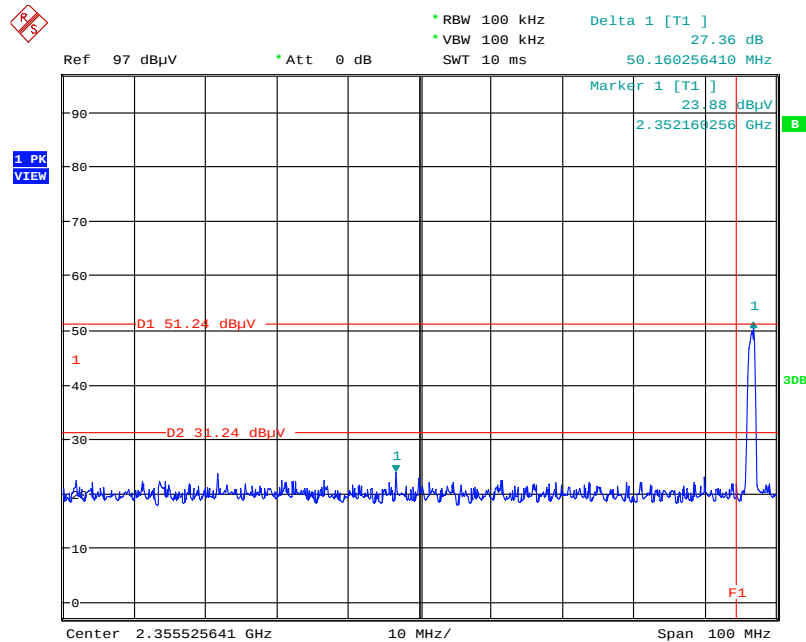

Date: 29.OCT.2011 01:51:30

High Band Edge Plot on Channel 78 / 2480 MHz / Mode 2

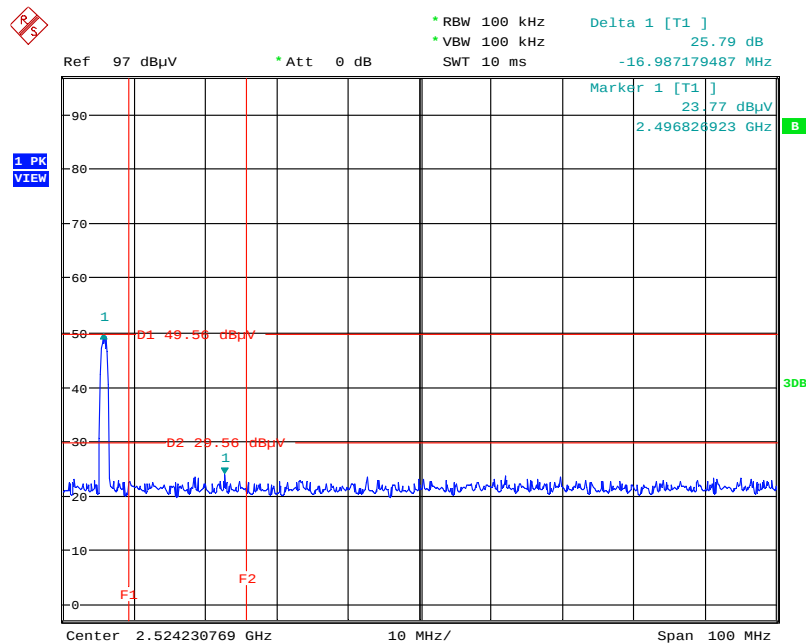

Date: 29.OCT.2011 01:58:59

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Sep. 14, 2011	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Oct. 28, 2011	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9K ~ 30MHz	Nov. 16, 2010	Conduction (CO01-CB)
PULSE LIMITER	R&S	ESH3-Z2	100430	9K~30MHz	Jan. 04, 2011	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Oct. 17, 2011	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 22, 2010	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 08, 2011	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 17, 2010	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2010	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP	100304	9kHz ~ 40GHz	Nov. 22, 2010	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 22, 2011	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Sep. 09, 2010*	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N/A	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N/A	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz ~ 26.5 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz ~ 26.5 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2010	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Sep. 26, 2011	Conducted (TH01-CB)
Thermo-Hygro Meter	N/A	HC 520	#1	15~70 degree	Nov. 02, 2010	Conducted (TH01-CB)
Thermo-Hygro Meter	N/A	HC 520	#1	15~70 degree	Nov. 02, 2011	Conducted (TH01-CB)
RF Power Divider	HP	11636A	00306	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
RF Power Splitter	Anaren	44100	1839	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Power Splitter	Anaren	42100	17930	2GHz ~ 18GHz	N/A	Conducted (TH01-CB)
EPM-P Series Power Meter	Agilent	E4416A	GB41291199	50MHz ~ 18GHz	Sep. 09, 2011	Conducted (TH01-CB)
Peak an Avg Power Sensor	Agilent	E9327A	US40442088	50MHz ~ 18GHz	Sep. 09, 2011	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz ~ 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz ~ 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz ~ 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz ~ 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz ~ 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-12	-	1 GHz ~ 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-13	-	1 GHz ~ 26.5 GHz	Nov. 17, 2010	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 13, 2011	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 08, 2011	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

Note: “*” Calibration Interval of instruments listed above is two years.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110702

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Road, Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : July 02, 2011

P1, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix