

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Rd.
Lenexa, KS 66214
Phone / Fax (913) 660-0666

Unlicensed National Information Infrastructure (U-NII)
and License-Exempt Local Area Network (LE-LAN)

Devices, 47CFR, Part 15E (15.407)

Industry Canada RSS-247 Issue 3

Application For Grant of Certification

Model: A04664

Frequency Range: 5180-5240, and 5745-5825 MHz

License-Exempt U-NII, Local Area Network equipment, U-NII-1, and U-NII-3 operation

FCC ID: IPH-04664

IC: 1792A-04664

Garmin International, Inc.

1200 East 151st Street

Olathe, KS 66062

Dan Irish

Lead Compliance Engineer

Test Report Number: 241104

Test Date: November 4, 2024 – December 5, 2024

Authorized Signatory: 

Patrick Powell

Rogers Labs, a division of The Compatibility Center LLC

FCC Designation: US5305

ISED Registration: 3041A

This report shall not be reproduced except in full, without the written approval of the laboratory.
This report must not be used by the client to claim product certification, approval, or
endorsement by NVLAP, NIST, or any agency of the U.S. Government.

TABLE OF CONTENTS.....	2
REVISIONS.....	6
EXECUTIVE SUMMARY	7
OPINION / INTERPRETATION OF RESULTS	8
EQUIPMENT TESTED.....	9
Equipment Operational Modes.....	10
Equipment Function	11
Equipment Configuration.....	12
APPLICANT COMPANY INFORMATION	13
EQUIPMENT INFORMATION.....	13
Product Details	14
Antenna and Bandwidth.....	14
APPLICABLE STANDARDS & TEST PROCEDURES	15
TESTING PROCEDURES	15
AC Line Conducted Emission Test Procedure	15
Radiated Emission Procedure	15
Antenna Port Conducted Emission Test Procedure.....	16
Diagram 1 Test arrangement for power-line conducted emissions.....	17
Diagram 2 Test arrangement for radiated emissions of tabletop equipment.....	18
Diagram 3 Test arrangement for radiated emissions tested in Semi-Anechoic Chamber (SAC) and Outdoor Area Test Site (OATS).....	19
Diagram 4 Test arrangement for Antenna Port Conducted emissions.....	20
TEST SITE LOCATIONS	20

UNITS OF MEASUREMENTS	21
ENVIRONMENTAL CONDITIONS.....	21
STATEMENT OF MODIFICATIONS AND DEVIATIONS	22
INTENTIONAL RADIATORS	22
Antenna Requirements	22
Restricted Bands of Operation	22
Table 1 Harmonic Radiated Emissions in Restricted Bands Data Mode 6 U-NII-1 (802.11a).....	23
Table 2 Harmonic Radiated Emissions in Restricted Bands Data Mode 7 U-NII-1 (802.11n)	24
Table 3 Harmonic Radiated Emissions in Restricted Bands Data Mode 8 U-NII-1 (802.11n40)	25
Table 4 Harmonic Radiated Emissions in Restricted Bands Data Mode 9 U-NII-1 (802.11ac40).....	25
Table 5 Harmonic Radiated Emissions in Restricted Bands Data Mode 10 U-NII-1 (802.11ac80).....	26
Table 6 Harmonic Radiated Emissions in Restricted Bands Data Mode 11 U-NII-3 (802.11a).....	27
Table 7 Harmonic Radiated Emissions in Restricted Bands Data Mode 12 U-NII-3 (802.11n)	27
Table 8 Harmonic Radiated Emissions in Restricted Bands Data Mode 13 U-NII-3 (802.11n40)	28
Table 9 Harmonic Radiated Emissions in Restricted Bands Data Mode 14 U-NII-3 (802.11ac40).....	28
Table 10 Harmonic Radiated Emissions in Restricted Bands Data Mode 15 U-NII-3 (802.11ac80).....	28
Summary of Results for Radiated Emissions in Restricted Bands	29
AC Line Conducted EMI Procedure	29
Figure 1 AC Line Conducted Emissions Data L1 (#2, EUT – Computer)	31
Figure 2 AC Line Conducted Emissions Data L2 (#2, EUT – Computer)	32
Table 11 AC Line Conducted Emissions Data L1 (#2, EUT – Computer).....	33
Table 12 AC Line Conducted Emissions Data L2 (#2, EUT – Computer).....	33
Summary of Results for AC Line Conducted Emissions.....	33
General Radiated Emissions Procedure	34
Table 13 General Radiated Emissions Data – Worst Case (Horizontal Polarization)	34
Figure 3 Plot of General Radiated Emissions – Horizontal Polarization.....	35
Table 14 General Radiated Emissions Data – Worst Case (Vertical Polarization).....	35
Figure 4 Plot of General Radiated Emissions – Vertical Polarization	36
Summary of Results for General Radiated Emissions.....	36
Operation in the 5150-5250 and 5725-5850 MHz Frequency U-NII-1 and U-NII-3 Bands	37
Figure 5 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 6 U-NII-1 (802.11a)	41

Figure 6 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 7 U-NII-1 (802.11n)	42
Figure 7 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 8 U-NII-1 (802.11n40)	43
Figure 8 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 9 U-NII-1 (802.11ac40).....	44
Figure 9 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 10 U-NII-1 (802.11ac80).....	45
Figure 10 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 11 U-NII-3 (802.11a)	46
Figure 11 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 12 U-NII-3 (802.11n)	47
Figure 12 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 13 U-NII-3 (802.11n40)	48
Figure 13 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 14 U-NII-3 (802.11ac40).....	49
Figure 14 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 15 U-NII-3 (802.11ac80).....	50
Figure 15 Plot of Lower Band Edge Across 5150-5250 MHz Mode 6 U-NII-1 (802.11a)	51
Figure 16 Plot of Lower Band Edge Across 5150-5250 MHz Mode 7 U-NII-1 (802.11n)	52
Figure 17 Plot of Lower Band Edge Across 5150-5250 MHz Mode 8 U-NII-1 (802.11n40)	53
Figure 18 Plot of Lower Band Edge Across 5150-5250 MHz Mode 9 U-NII-1 (802.11ac40)	54
Figure 19 Plot of Lower Band Edge Across 5150-5250 MHz Mode 10 U-NII-1 (802.11ac80)	55
Figure 20 Plot of Lower Band Edge Across 5725-5850 MHz Mode 11 U-NII-3 (802.11a)	56
Figure 21 Plot of Lower Band Edge Across 5725-5850 MHz Mode 12 U-NII-3 (802.11n)	57
Figure 22 Plot of Lower Band Edge Across 5725-5850 MHz Mode 13 U-NII-3 (802.11n40).....	58
Figure 23 Plot of Lower Band Edge Across 5725-5850 MHz Mode 14 U-NII-3 (802.11ac40)	59
Figure 24 Plot of Lower Band Edge Across 5725-5850 MHz Mode 15 U-NII-3 (802.11ac80)	60
Figure 25 Plot of Upper Band Edge Across 5150-5250 MHz Mode 6 U-NII-1 (802.11a).....	61
Figure 26 Plot of Upper Band Edge Across 5150-5250 MHz Mode 7 U-NII-1 (802.11n)	62
Figure 27 Plot of Upper Band Edge Across 5150-5250 MHz Mode 8 U-NII-1 (802.11n40)	63
Figure 28 Plot of Upper Band Edge Across 5150-5250 MHz Mode 9 U-NII-1 (802.11ac40).....	64
Figure 29 Plot of Upper Band Edge Across 5150-5250 MHz Mode 10 U-NII-1 (802.11ac80).....	65
Figure 30 Plot of Upper Band Edge Across 5725-5850 MHz Mode 11 U-NII-3 (802.11a).....	66
Figure 31 Plot of Upper Band Edge Across 5725-5850 MHz Mode 12 U-NII-3 (802.11n)	67
Figure 32 Plot of Upper Band Edge Across 5725-5850 MHz Mode 13 U-NII-3 (802.11n40)	68
Figure 33 Plot of Upper Band Edge Across 5725-5850 MHz Mode 14 U-NII-3 (802.11ac40).....	69
Figure 34 Plot of Upper Band Edge Across 5725-5850 MHz Mode 15 U-NII-3 (802.11ac80).....	70
Figure 35 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 6 U-NII-1 (802.11a).....	71
Figure 36 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 7 U-NII-1 (802.11n)	72
Figure 37 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 8 U-NII-1 (802.11n40)	73
Figure 38 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 9 U-NII-1 (802.11ac40).....	74
Figure 39 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 10 U-NII-1 (802.11ac80).....	75
Figure 40 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 11 U-NII-3 (802.11a).....	76
Figure 41 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 12 U-NII-3 (802.11n)	77
Figure 42 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 13 U-NII-3 (802.11n40)	78

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-04664 IC: 1792A-04664

Lenexa, KS 66214

Test: 241104

Phone/Fax: (913) 660-0666

Test to: 47CFR 15E, RSS-Gen RSS-247

Revision 2

File: A04664 NII TstRpt 241104 r2

Garmin International, Inc.

PMN: A04664

SN's: 8NN000252, 8NN000083

Date: March 17, 2025

Page 4 of 112

Figure 43 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 14 U-NII-3 (802.11ac40).....	79
Figure 44 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 15 U-NII-3 (802.11ac80).....	80
Figure 45 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 6 U-NII-1 (802.11a)	81
Figure 46 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 7 U-NII-1 (802.11n).....	82
Figure 47 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 8 U-NII-1 (802.11n40)	83
Figure 48 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 9 U-NII-1 (802.11ac40)	84
Figure 49 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 10 U-NII-1 (802.11ac80).....	85
Figure 50 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 11 U-NII-3 (802.11a)	86
Figure 51 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 12 U-NII-3 (802.11n)	87
Figure 52 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 13 U-NII-3 (802.11n40)	88
Figure 53 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 14 U-NII-3 (802.11ac40).....	89
Figure 54 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 15 U-NII-3 (802.11ac80).....	90
Figure 55 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 11 U-NII-3 (802.11a).....	91
Figure 56 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 12 U-NII-3 (802.11n)	92
Figure 57 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 13 U-NII-3 (802.11n40)	93
Figure 58 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 14 U-NII-3 (802.11ac40).....	94
Figure 59 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 15 U-NII-3 (802.11ac80).....	95
Transmitter Emissions Data.....	96
Table 15 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 6 U-NII-1 (802.11a)	96
Table 16 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 7 U-NII-1 (802.11n).....	97
Table 17 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 8 U-NII-1 (802.11n40)	98
Table 18 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 9 U-NII-1 (802.11ac40).....	99
Table 19 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 10 U-NII-1 (802.11ac80).....	100
Table 20 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 11 U-NII-3 (802.11a)	101
Table 21 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 12 U-NII-3 (802.11n)	102
Table 22 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 13 U-NII-3 (802.11n40)	103
Table 23 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 14 U-NII-3 (802.11ac40).....	104
Table 24 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 15 U-NII-3 (802.11ac80).....	105
Table 25 Transmitter Antenna Port Data Modes 6-10 (U-NII-1)	106
Table 26 Transmitter Antenna Port Data Modes 11-15 (U-NII-3)	107
Summary of Results for Transmitter Radiated Emissions of Intentional Radiator.....	107
ANNEX.....	108
Annex A Measurement Uncertainty Calculations.....	109
Annex B Test Equipment.....	110

Revisions

Revision 1 Issued March 13, 2025

Revision 2 Issued March 17, 2025 – amended per TCB review.

Executive Summary

The following information is submitted for consideration in obtaining Equipment Grants of Certification for License Exempt, Unlicensed National Information Infrastructure (U-NII) Intentional Radiator operating under 47 CFR Paragraph 15E (15.407), U-NII-1 and U-NII-3 new rules, 5180-5240, and 5745-5825 MHz bands, and Industry Canada RSS-GEN Issue 5, and RSS-247 Issue 3, LE-LAN transmitter.

Name of Applicant: Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062
M/N: A04664 HVIN: A04664
FCC ID: IPH-04664 Industry Canada ID: 1792A-04664

Frequency Range: 5180-5240 MHz and 5745-5825 MHz (U-NII-1 and U-NII-3 under new rules 15.407, 802.11a/n/n40/ac40/ac80) and limited transmitter operations per regulations for operation in Canada

Mode	Channel width	Average Conducted Power (W)	Average e.i.r.p. Power (W)	99% OBW (kHz)
Mode 6, U-NII-1 802.11a	20 MHz	0.051	0.051	17,630.0
Mode 7, U-NII-1 802.11n	20 MHz	0.058	0.059	18,550.0
Mode 8, U-NII-1 802.11n40	40 MHz	0.055	0.056	37,550.0
Mode 9, U-NII-1 802.11ac40	40 MHz	0.054	0.055	37,325.0
Mode 10, U-NII-1 802.11ac80	80 MHz	0.013	0.013	76,000.0
Mode 11, U-NII-3 802.11a	20 MHz	0.056	0.057	17,650.0
Mode 12, U-NII-3 802.11n	20 MHz	0.053	0.054	18,640.0
Mode 13, U-NII-3 802.11n40	40 MHz	0.054	0.054	38,075.0
Mode 14, U-NII-3 802.11ac40	40 MHz	0.054	0.054	37,525.0
Mode 15, U-NII-3 802.11ac80	80 MHz	0.031	0.032	76,500.0

Rogers Labs, a division of The Compatibility Center LLC
7915 Nieman Road FCC ID: IPH-04664 IC: 1792A-04664
Lenexa, KS 66214 Test: 241104
Phone/Fax: (913) 660-0666 Test to: 47CFR 15E, RSS-Gen RSS-247
Revision 2 File: A04664 NII TstRpt 241104 r2

Garmin International, Inc.
PMN: A04664
SN's: 8NN000252, 8NN000083
Date: March 17, 2025
Page 7 of 112

This report addresses EUT Operations as U-NII transmitter using modulations defined above in modes 6 through 15.

Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Restricted Frequency Bands 15.205, RSS-GEN 8.10	-0.2	Complies
AC Line Conducted 15.207, RSS-GEN 7.2.4	-15.11	Complies
Radiated Emissions 15.209, RSS-GEN 7.2.5	-1.8	Complies
Harmonic Emissions per 15.407, RSS-247	-8.6	Complies

Equipment Tested

Model: A04664

Garmin International, Inc.

1200 East 151st Street

Olathe, KS 66062

<u>Equipment</u>	<u>Model / PN</u>	<u>Serial Number</u>
EUT #1 Radiated	A04664	8NN000083
EUT #2 Antenna Port Conducted	A04664	8NN000252
AC/DC Wall mount power supply	362-00118-00	N/A
USB-C to C Cable, USB 2.0 with TCO, 0.5m	320-01643-0A	N/A
Laptop Computer	Latitude 7480	EFSPSN2

Test results in this report relate only to the items tested. Worst-case configuration data recorded in this report.

The design may operate one transmitter chain at a time and is not capable of simultaneous transmission on more than one port.

Software (FVIN): 5.10 or higher; Antennas: ANT PIFA (1.00 dBi), BLE PIFA (1.17 dBi), 2.4 GHz WiFi PIFA (1.17 dBi), 5.1 GHz PIFA (0.05 dBi), 5.7 GHz PIFA (0.05 dBi)

Equipment Operational Modes


Mode	Transmitter Operation
mode 1	ANT (GFSK)
mode 2	BT BLE (GMSK)
mode 3	802.11b
mode 4	802.11g
mode 5	802.11n
mode 6	U-NII-1 802.11a
mode 7	U-NII-1 802.11n
mode 8	U-NII-1 802.11n40
mode 9	U-NII-1 802.11ac40
mode 10	U-NII-1 802.11ac80
mode 11	U-NII-3 802.11a
mode 12	U-NII-3 802.11n
mode 13	U-NII-3 802.11n40
mode 14	U-NII-3 802.11ac40
mode 15	U-NII-3 802.11ac80

Equipment Function


The EUT is a mobile mounted, digital recording device incorporating wireless data transfer. The device incorporates a camera sensor and associated circuitry to record images within the lens view angle. The design incorporates transmitter circuitry operating in the 2402-2480, 5150-5250, and 5725-5850 MHz frequency bands. The product operates from the internal battery or external direct current power provided over the USB-C port. Power is provided through compatible USB interface cable options and power sources. The design provides a Micro SD Card slot and USB-C interface port as presented below and wireless communications with compatible equipment. The EUT was arranged as described by the manufacturer emulating typical user configurations for testing purposes. The EUT offers no other interface connections other than those presented in the configuration options as described by the manufacturer and presented below. During testing, the test system was configured to operate in a manufacturer defined mode. As requested by the manufacturer, the equipment was tested for emissions compliance using the available configurations with the worst-case data presented. Test results in this report relate only to the products described in this report.

Equipment Configuration


- 1) EUT operating off internal battery



- 2) EUT connected to Computer USB port through cable assembly.



- 3) EUT connected to DC Through USB cable connected to AC/DC Wall mount power supply.



Applicant Company information

Applicants Company	Garmin International, Inc.
Applicants Address	1200 East 151st Street, Olathe, KS 66062
FCC Identifier	IPH-04664
Industry Canada Identifier	1792A-04664
Manufacturer Company	Garmin International, Inc.
Manufacturer Address	1200 East 151st Street, Olathe, KS 66062

Equipment information

Hardware Version Identification Number (HVIN): The HVIN identifies hardware specifications of a product version. The HVIN replaces the ISED Model Number in the legacy E-filing System. An HVIN is required for all products for certification applications.	A04664
Host Marketing Name (HMN) (if applicable): The HMN is the name or model number of a final product, which contains a certified radio module.	N/A
Brand Name	
Model Number	A04664
Test Rule Part(s)	47 CFR 15E, 15.407, RSS-247
Test Frequency Range	5.15-5.25 and 5.725-5.85 GHz
Project Number	241104
Submission Type	FCC: Certification, IC: Certification

Product Details

Items	Description
Product Type	Single chain 5 GHz U-NII-1, and U-NII-3
Radio Type	Transceiver
Power Type	Internal Rechargeable Battery or External Direct Current
Frequency Range	5150-5250 MHz / 5725-5850 MHz
Channel Number	Channels 36, 38, 40, 42, 44, 46, 48, 149, 151, 153, 155, 157, 159, 161, 165
Carrier Frequencies	Please refer to 802.11 Standard for Carrier Frequencies
Antenna	Integrated 0.05 dBi antenna PIFA (5.1G and 5.7G)
Communication Mode	Device provides 5 GHz, U-NII 1 and U-NII-3 operation
Beamforming Function	Without beamforming
Operating Mode	5150-5250 MHz (U-NII-1) and 5725-5825 MHz (U-NII-3)

Antenna and Bandwidth

Antenna	Number of TX chains		
Bandwidth Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	Single Chain	N/A	N/A
IEEE 802.11n	Single Chain	Single Chain	N/A
IEEE 802.11ac	N/A	Single Chain	Single Chain

Applicable Standards & Test Procedures

The following information is submitted in accordance with e-CFR dated October 18, 2024: Part 2, Subpart J, Part 15, Subpart 15E, Industry Canada RSS-GEN Issue 5, and RSS-247 Issue 3. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.10-2013, KDB 789033 D02 General UNII Test Procedures New Rules v02r01, KDB 926956 v02, RSS-247 Issue 3, and RSS-GEN Issue 5.

Testing Procedures

AC Line Conducted Emission Test Procedure

Testing for the AC line-conducted emissions were performed as required in CFR47 15B, RSS-GEN, and directed in ANSI C63.4-2014. The test setup, including the EUT, was arranged in the test configurations as presented during testing. The test configuration was placed on a 1 x 1.5-meter bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50- μ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table. Refer to diagram one showing typical test arrangement and photographs in the test setup exhibit for EUT placement used during testing.


Radiated Emission Procedure

Radiated emissions testing was performed as required in 47CFR 15C, RSS-247 Issue 3, RSS-GEN and specified in ANSI C63.10-2013. The EUT was placed on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement permitting orientation in three orthogonal axes, raising, and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken and recorded. The frequency spectrum from 9 kHz to 40,000 MHz was searched for emissions and all significant results reported. All other unreported findings were at least 20 dB below limits. Refer to diagrams two and three showing typical test setup. Refer to photographs in the test setup exhibits for specific EUT placement during testing.

Antenna Port Conducted Emission Test Procedure


The EUT was assembled as required for operation placed on a benchtop. This configuration provided the ability to connect test equipment to the provided test antenna port. Antenna Port conducted emissions testing was performed presented in the regulations and specified in ANSI C63.10-2013. Testing was completed on a laboratory bench in a shielded room. The active antenna port of the device was connected to appropriate attenuation and the spectrum analyzer. Refer to diagram 4 showing typical test arrangement and photographs in the test setup exhibits for specific EUT placement during testing.

Diagram 1 Test arrangement for power-line conducted emissions

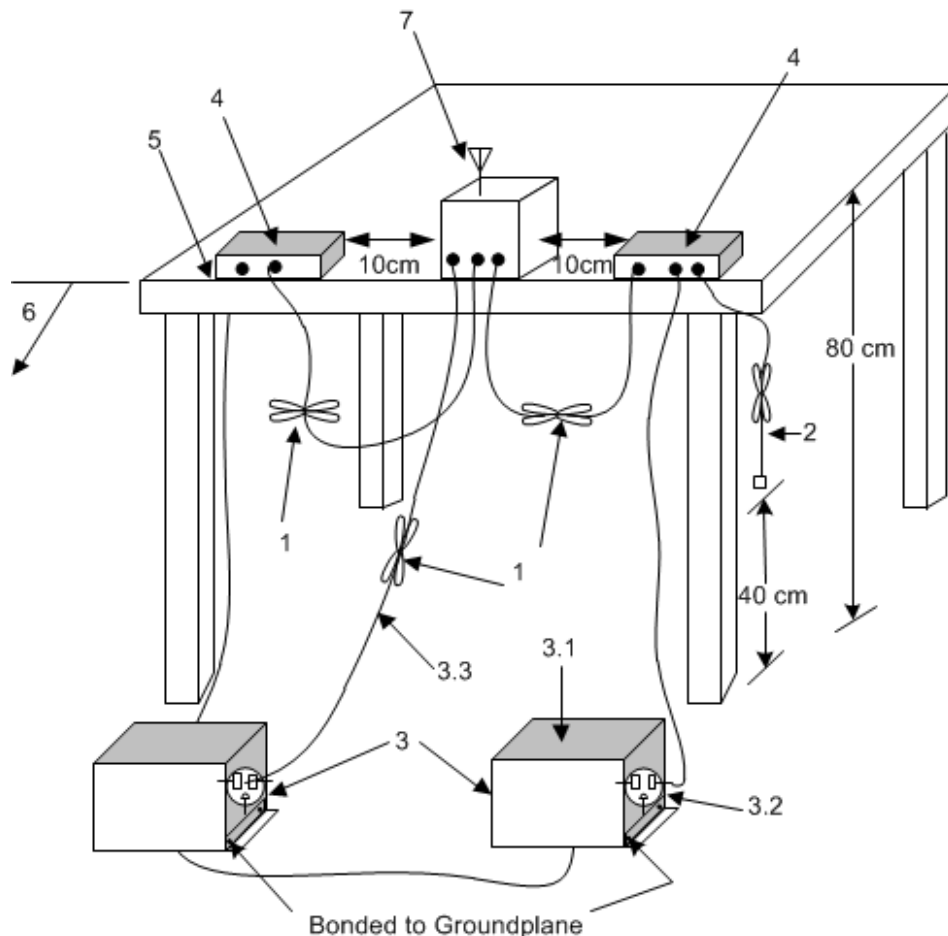

1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long see (see 6.2.3.1).
2. I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see 6.2.2).
3. EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN can be placed on top of, or immediately beneath, reference ground plane (see 6.2.2 and 6.2.3).
 - 3.1 All other equipment powered from additional LISN(s).
 - 3.2 Multiple-outlet strip can be used for multiple power cords of non-EUT equipment.
 - 3.3 LISN at least 80 cm from nearest part of EUT chassis.
4. Non-EUT components of EUT system being tested.
5. Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop (see 6.2.3.1).
6. Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane (see 6.2.2 for options).
7. Antenna may be integral or detachable. If detachable, the antenna shall be attached for this test


Diagram 2 Test arrangement for radiated emissions of tabletop equipment

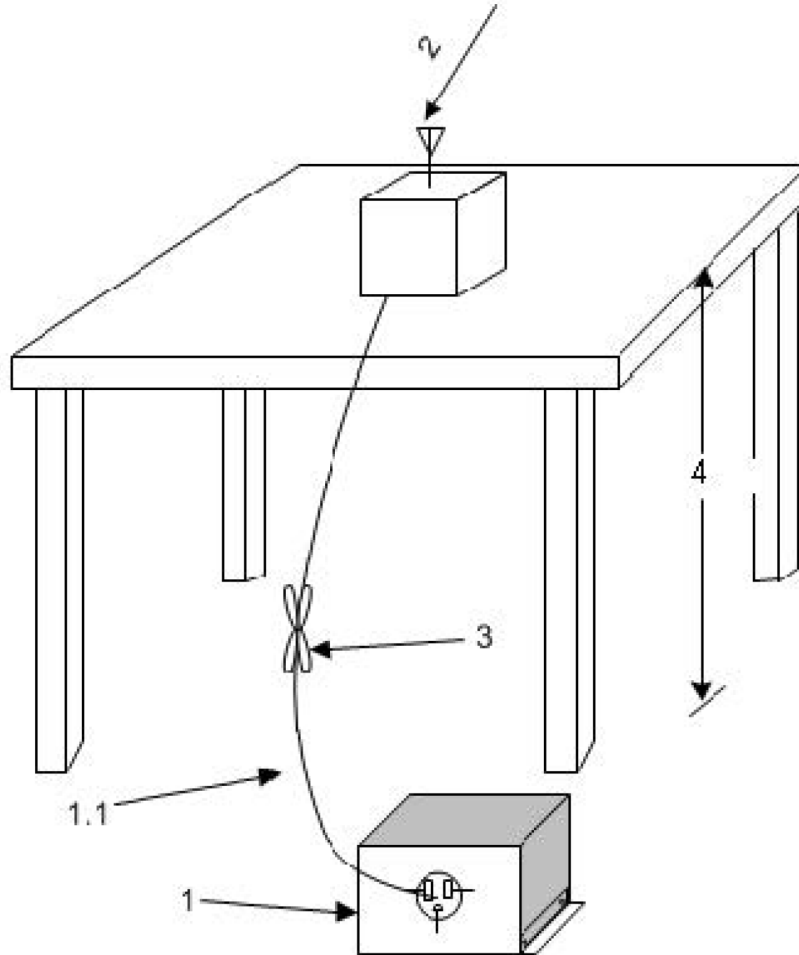

1. A LISN is optional for radiated measurements between 30 MHz and 1000 MHz but not allowed for measurements below 30 MHz and above 1000 MHz (see 6.3.1). If used, then connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. The LISN may be placed on top of, or immediately beneath, the reference ground plane (see 6.2.2 and 6.2.3.2).
 - 1.1. LISN spaced at least 80 cm from the nearest part of the EUT chassis.
2. Antenna can be integral or detachable, depending on the EUT (see 6.3.1).
3. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see 6.3.1).
4. For emission measurements at or below 1 GHz, the table height shall be 80 cm. For emission measurements above 1 GHz, the table height shall be 1.5 m for measurements, except as otherwise specified (see 6.3.1 and 6.6.3.1).

Diagram 3 Test arrangement for radiated emissions tested in Semi-Anechoic Chamber (SAC) and Outdoor Area Test Site (OATS)

Below 1 GHz

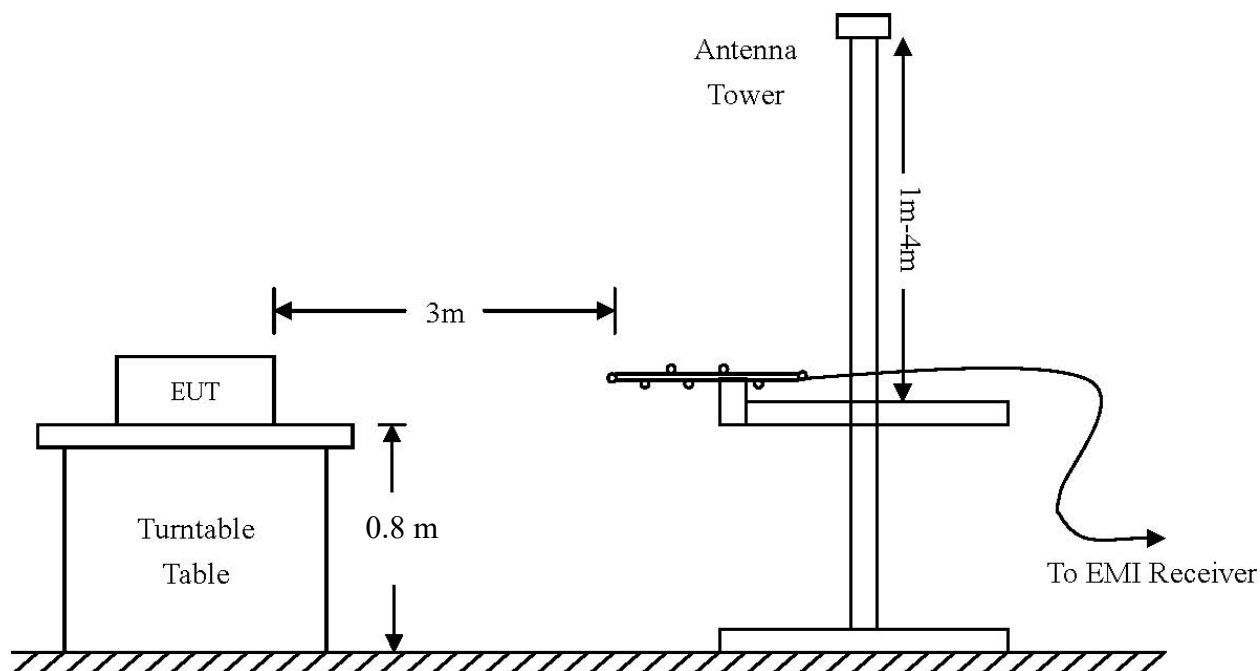

Above 1 GHz:


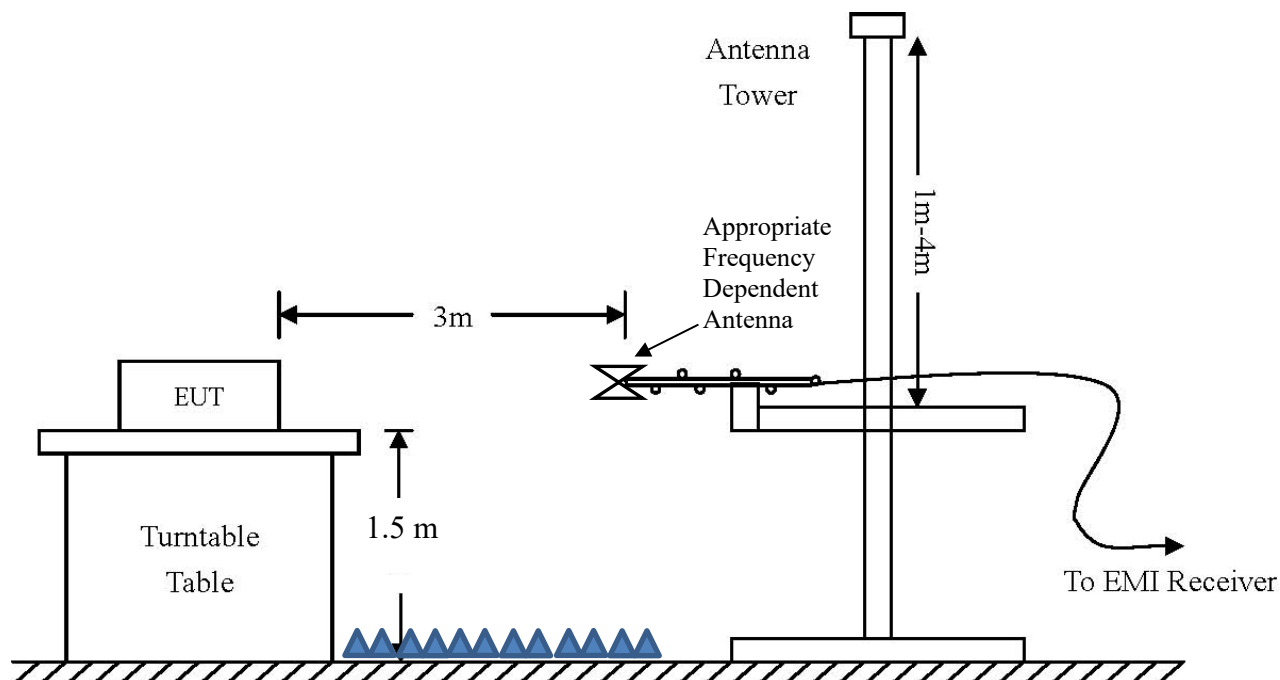


Diagram 4 Test arrangement for Antenna Port Conducted emissions

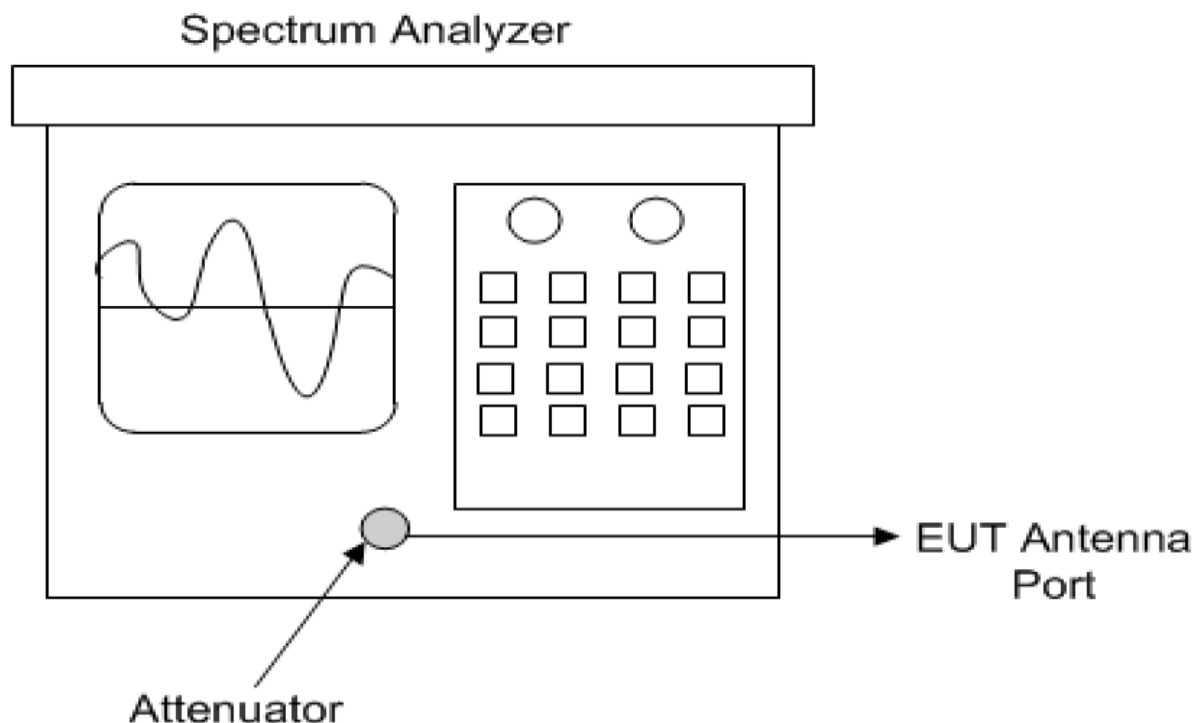

Test Site Locations

Conducted EMI AC line conducted emissions testing performed in a shielded screen room located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS (or satellite location).

Antenna port Antenna port conducted emissions testing was performed in a shielded screen room located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS (or satellite location).

Radiated EMI The radiated emissions tests were performed at the 3 meters Semi-Anechoic Chamber (SAC) located at Rogers Labs, a division of The Compatibility Center LLC, 7915 Nieman Rd., Lenexa, KS or at the 3 meters Outdoor Area Test Site (OATS) in the satellite location.

Registered Site information: FCC Site: US5305, ISED: 3041A, CAB Identifier: US0096

NVLAP Accreditation Lab code 200087-0

Units of Measurements

Conducted EMI Data presented in dBμV; dB referenced to one microvolt

Antenna port Conducted Data is in dBm; dB referenced to one milliwatt

Radiated EMI Data presented in dBμV/m; dB referenced to one microvolt per meter

Note: The limit is expressed for a measurement in dBμV/m when the measurement is taken at a distance of 3 or 10 meters. Data taken for this report was taken at distance of 3 meters. Sample calculation demonstrates corrected field strength reading for Semi-Anechoic Chamber using the measurement reading and correcting for receive antenna factor, cable losses, and amplifier gains.

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Losses = attenuators/cable losses, Gain = amplification gains

$RFS (dB\mu V/m @ 3m) = FSM (dB\mu V) + A.F. (dB/m) + Losses (dB) - Gain (dB)$

Frequency: 9 kHz-30 MHz	Frequency: 30 MHz- 1 GHZ	Frequency: Above 1 GHZ
Loop Antenna	Broadband Biconilog	Horn
RBW = 9 kHz	RBW = 120 kHz	RBW = 1 MHz
VBW = 30 kHz	VBW = 500 kHz	VBW = 3 MHz
Sweep time = Auto	Sweep time = Auto	Sweep time = Auto
Detector = PK, QP	Detector = PK, QP	Detector = PK, AV
Antenna Height 1m	Antenna Height 1-4m	Antenna Height 1-4m

Environmental Conditions

Ambient Temperature 20.0° C

Relative Humidity 49.0 %

Atmospheric Pressure 1018.3 mb

Statement of Modifications and Deviations

No modifications to the EUT were required for the unit to demonstrate compliance with the 47 CFR Part 15E, RSS-Gen, and RSS-247 Issue 3, and RSS-GEN Issue 5 emission requirements. There were no deviations to the specifications.

Intentional Radiators

Antenna Requirements

The EUT incorporates integral antenna system and offers no provision for connection to alternate antenna system. The antenna connection point complies with the unique antenna connection requirements. There are no deviations or exceptions to the specification.

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at the OATS or SAC. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were investigated at the OATS or SAC, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.10-2013 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values consider the received radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Table 1 Harmonic Radiated Emissions in Restricted Bands Data Mode 6 U-NII-1 (802.11a)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
Mode 6 U-NII-1 (802.11a)							
5150.0	65.1	50.1	62.6	48.1	54.0	-3.9	-5.9
5350.0	60.7	47.4	61.1	48.1	54.0	-6.6	-5.9
15540.0	63.0	49.4	62.8	49.4	54.0	-4.6	-4.6
15600.0	62.7	49.1	62.4	49.2	54.0	-4.9	-4.8
15720.0	61.7	48.4	61.8	48.4	54.0	-5.6	-5.6
20720.0	66.4	52.5	66.1	52.5	54.0	-1.5	-1.5
20800.0	66.1	52.8	66.5	52.8	54.0	-1.2	-1.2
20960.0	66.7	53.2	66.7	53.2	54.0	-0.8	-0.8

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 2 Harmonic Radiated Emissions in Restricted Bands Data Mode 7 U-NII-1 (802.11n)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
Mode 7 U-NII-1 (802.11n)							
5150.0	71.0	52.5	69.9	51.1	54.0	-1.5	-2.9
5350.0	61.1	48.0	61.9	48.0	54.0	-6.0	-6.0
15540.0	63.2	49.5	63.1	49.4	54.0	-4.5	-4.6
15600.0	62.8	49.1	62.7	49.1	54.0	-4.9	-4.9
15720.0	62.3	48.4	62.6	48.5	54.0	-5.6	-5.5
20720.0	66.2	52.5	66.6	52.6	54.0	-1.5	-1.4
20800.0	66.7	52.8	66.5	52.8	54.0	-1.2	-1.2
20960.0	67.1	53.2	67.0	53.3	54.0	-0.8	-0.7

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 3 Harmonic Radiated Emissions in Restricted Bands Data Mode 8 U-NII-1 (802.11n40)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
Mode 8 U-NII-1 (802.11n40)							
5150.0	71.4	53.8	71.2	53.2	54.0	-0.2	-0.8
5350.0	61.7	48.0	61.8	47.8	54.0	-6.0	-6.2
15570.0	62.1	48.6	62.6	49.1	54.0	-5.4	-4.9
15690.0	62.3	48.6	62.9	48.6	54.0	-5.4	-5.4
20760.0	66.5	53.0	67.0	52.9	54.0	-1.0	-1.1
20920.0	66.6	52.9	66.9	53.0	54.0	-1.1	-1.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 4 Harmonic Radiated Emissions in Restricted Bands Data Mode 9 U-NII-1 (802.11ac40)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
Mode 9 U-NII-1 (802.11ac40)							
5150.0	71.9	53.7	71.8	53.7	54.0	-0.3	-0.3
5350.0	61.8	47.9	61.4	47.8	54.0	-6.1	-6.2
15570.0	63.3	49.2	63.2	49.1	54.0	-4.8	-4.9
15690.0	61.8	48.6	63.0	48.6	54.0	-5.4	-5.4
20760.0	67.0	53.0	66.4	52.9	54.0	-1.0	-1.1
20920.0	66.7	52.9	66.2	53.0	54.0	-1.1	-1.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 5 Harmonic Radiated Emissions in Restricted Bands Data Mode 10 U-NII-1 (802.11ac80)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
Mode 10 U-NII-1 (802.11ac80)							
5150.0	66.1	51.6	65.5	51.0	54.0	-2.4	-3.0
5350.0	61.9	48.1	61.6	48.0	54.0	-5.9	-6.0
15630.0	62.8	49.6	63.4	49.6	54.0	-4.4	-4.4
20840.0	66.3	52.1	66.0	52.1	54.0	-1.9	-1.9

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 6 Harmonic Radiated Emissions in Restricted Bands Data Mode 11 U-NII-3 (802.11a)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
Mode 11 U-NII-3 (802.11a)							
11490	60.3	46.5	60.4	46.5	54.0	-7.5	-7.5
11570	60.2	46.2	59.8	46.3	54.0	-7.8	-7.7
11650	60.2	46.8	60.4	47.1	54.0	-7.2	-6.9
22980	64.8	53.7	67.6	53.7	54.0	-0.3	-0.3

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 7 Harmonic Radiated Emissions in Restricted Bands Data Mode 12 U-NII-3 (802.11n)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
Mode 12 U-NII-3 (802.11n)							
11490	60.4	46.6	60.6	46.7	54.0	-7.4	-7.3
11570	60.0	46.3	59.9	46.5	54.0	-7.7	-7.5
11650	60.7	46.6	59.8	46.5	54.0	-7.4	-7.5
22980	67.3	53.7	67.5	53.7	54.0	-0.3	-0.3

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 8 Harmonic Radiated Emissions in Restricted Bands Data Mode 13 U-NII-3 (802.11n40)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
Mode 13 U-NII-3 (802.11n40)							
11510	59.9	46.6	60.4	46.5	54.0	-7.4	-7.5
11590	59.7	46.2	59.8	46.4	54.0	-7.8	-7.6
23020	67.2	53.5	67.0	53.5	54.0	-0.5	-0.5

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 9 Harmonic Radiated Emissions in Restricted Bands Data Mode 14 U-NII-3 (802.11ac40)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
Mode 14 U-NII-3 (802.11ac40)							
11510	60.3	46.7	60.4	46.5	54.0	-7.3	-7.5
11590	60.2	46.4	60.7	46.8	54.0	-7.6	-7.2
23020	67.7	53.5	67.3	53.6	54.0	-0.5	-0.4

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 10 Harmonic Radiated Emissions in Restricted Bands Data Mode 15 U-NII-3 (802.11ac80)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
Mode 15 U-NII-3 (802.11ac80)							
11550	58.7	45.1	58.8	45.0	54.0	-8.9	-9.0
23100	66.8	53.0	67.2	53.1	54.0	-1.0	-0.9

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Summary of Results for Radiated Emissions in Restricted Bands

The EUT demonstrated compliance with the emissions requirements of 47 CFR 15.205, RSS-GEN Issue 5, and RSS-247 Issue 3. The EUT provided a worst-case minimum margin of -0.3 dB below the emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.


AC Line Conducted EMI Procedure

The EUT was arranged in typical equipment configurations as offered by manufacturer and presented above in equipment configuration. AC Line Conducted emission testing was performed with the EUT placed on a 1 x 1.5-meter bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room. The LISN was positioned on the floor of the screen room 80-cm from the rear of the EUT. Testing for the AC line-conducted emissions followed the procedures of ANSI C63.10-2013. The EUT was configured as presented in the AC Line conducted configurations as directed by the manufacturer and presented above in equipment configuration. The AC adapter for the EUT was connected to the LISN for AC line-conducted emissions testing. A second LISN was positioned on the floor of the screen room 80-cm from the rear of the supporting equipment of the test configuration. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor, internal to the LISN. Power line conducted emissions testing was carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequencies of each of the emissions, which demonstrated the highest amplitudes. The cables were repositioned to

obtain maximum amplitude of measured EMI level. Once the worst-case configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz and data recorded.


Refer to figure one and two for plots of the Configuration #2 EUT – USB Computer interface AC Line conducted emissions.

Figure 1 AC Line Conducted Emissions Data L1 (#2, EUT – Computer)

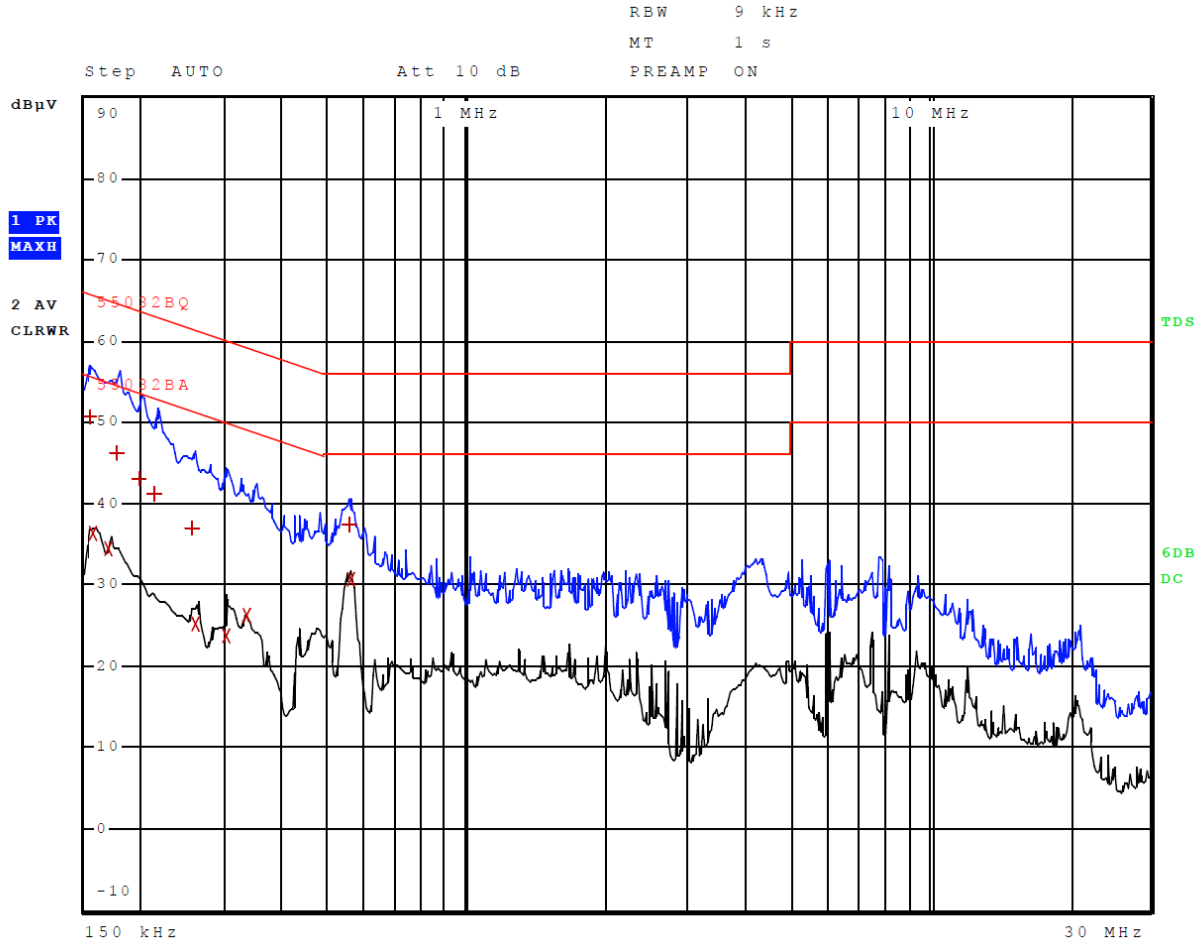

Other emissions present had amplitudes at least 20 dB below the limit.

Figure 2 AC Line Conducted Emissions Data L2 (#2, EUT – Computer)

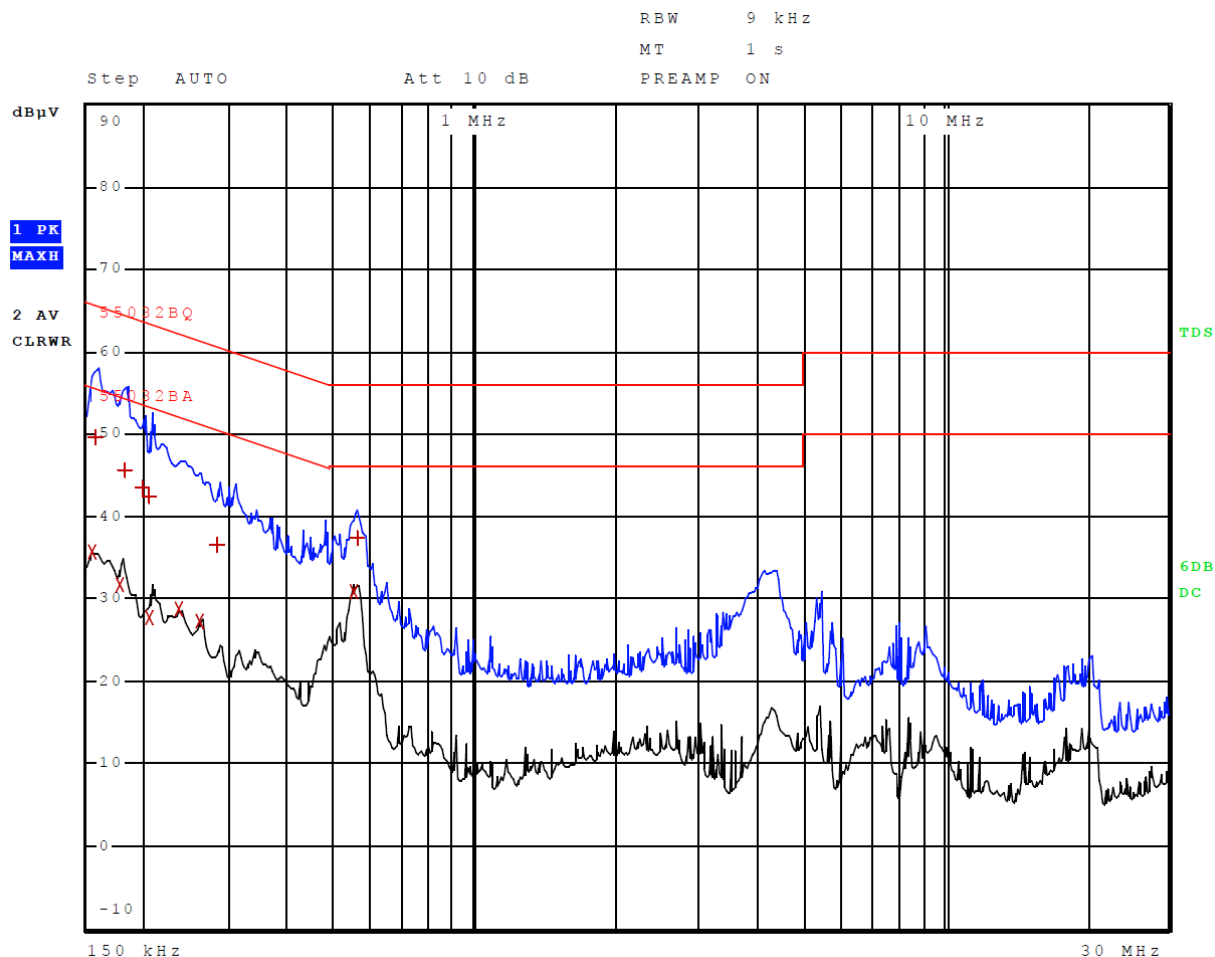

Other emissions present had amplitudes at least 20 dB below the limit.

Table 11 AC Line Conducted Emissions Data L1 (#2, EUT – Computer)

Trace	Frequency	Level (dBμV)	Detector	Delta Limit/dB
1	154.000000000 kHz	50.57	Quasi Peak	-15.21
2	158.000000000 kHz	36.35	Average	-19.22
2	170.000000000 kHz	34.36	Average	-20.60
1	178.000000000 kHz	46.27	Quasi Peak	-18.30
1	198.000000000 kHz	43.06	Quasi Peak	-20.63
1	214.000000000 kHz	41.19	Quasi Peak	-21.86
1	258.000000000 kHz	36.95	Quasi Peak	-24.55
2	262.000000000 kHz	25.23	Average	-26.14
2	302.000000000 kHz	23.81	Average	-26.38
2	334.000000000 kHz	26.15	Average	-23.20
1	554.000000000 kHz	37.33	Quasi Peak	-18.67
2	562.000000000 kHz	30.71	Average	-15.29

Other emissions present had amplitudes at least 20 dB below the limit.

Table 12 AC Line Conducted Emissions Data L2 (#2, EUT – Computer)

Trace	Frequency	Level (dBμV)	Detector	Delta Limit/dB
2	154.000000000 kHz	35.70	Average	-20.08
1	158.000000000 kHz	49.52	Quasi Peak	-16.05
2	178.000000000 kHz	31.63	Average	-22.95
1	182.000000000 kHz	45.64	Quasi Peak	-18.75
1	198.000000000 kHz	43.47	Quasi Peak	-20.22
2	206.000000000 kHz	27.62	Average	-25.74
1	206.000000000 kHz	42.45	Quasi Peak	-20.92
2	238.000000000 kHz	28.74	Average	-23.42
2	262.000000000 kHz	27.27	Average	-24.10
1	286.000000000 kHz	36.56	Quasi Peak	-24.08
2	550.000000000 kHz	30.89	Average	-15.11
1	558.000000000 kHz	37.47	Quasi Peak	-18.53

Other emissions present had amplitudes at least 20 dB below the limit.

Summary of Results for AC Line Conducted Emissions

The EUT demonstrated compliance with the AC Line Conducted Emissions requirements of 47CFR Part 15C, RSS-247 and RSS-Gen. The EUT configuration #2 demonstrated a minimum margin of -15.11 dB below the requirement. Other emissions were present with amplitudes at least 20 dB below the limit and worst-case amplitudes recorded.

General Radiated Emissions Procedure

Testing for the radiated emissions were performed as specified in CFR47 15B, RSS-GEN, and directed in ANSI C63.4-2014. For testing purposes, the EUT was arranged as presented in the applicable configuration diagrams above and operated through all modes as presented.

Exploratory radiated emissions measurements were performed in the SAC chamber or screen room, finding maximized emissions over frequency, EUT orientation, antenna height and polarity. This data is then used to focus the final radiated emissions measurements on these maximized points.

Final radiated emissions data were taken with the EUT located in the OATS or SAC at distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 6,000 MHz was searched for radiated emissions. Measured emission levels were maximized by EUT placement on the table, changing cable location, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Loop, Biconical, Broadband Biconilog, Log Periodic, and Double Ridge or Pyramidal Horns and mixers above 1 GHz.

Table 13 General Radiated Emissions Data – Worst Case (Horizontal Polarization)

Frequency (MHz)	Peak (dBμV/m)	Quasi-Peak (dBμV/m)	Limit @ 3m (dBμV/m)	Margin (dBm)
195.2	33.3	26.6	47	-13.5
240.1	27.0	22.8	47	-24.2
480.0	47.4	45.2	47	-1.8
531.0	34.5	26.9	47	-20.1
719.9	38.0	30.1	47	-16.9
960.0	44.0	35.2	47	-11.9

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Figure 3 Plot of General Radiated Emissions – Horizontal Polarization


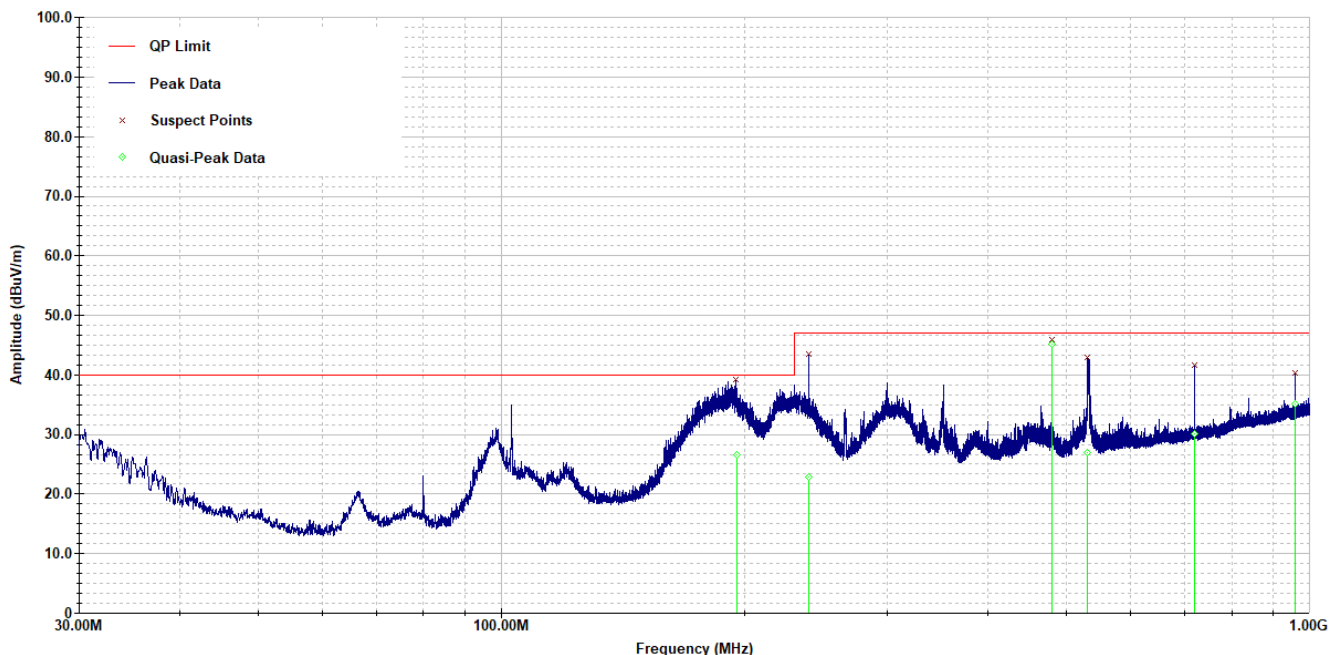


Table 14 General Radiated Emissions Data – Worst Case (Vertical Polarization)

Frequency (MHz)	Peak (dBμV/m)	Quasi-Peak (dBμV/m)	Limit @ 3m (dBμV/m)	Margin (dBm)
112.0	37.7	34.5	40	-5.5
308.5	26.0	18.4	47	-28.6
480.0	24.1	38.3	47	-8.7
532.9	27.3	34.1	47	-12.9
538.1	26.0	18.3	47	-28.7
720.0	27.7	20.0	47	-27.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Figure 4 Plot of General Radiated Emissions – Vertical Polarization

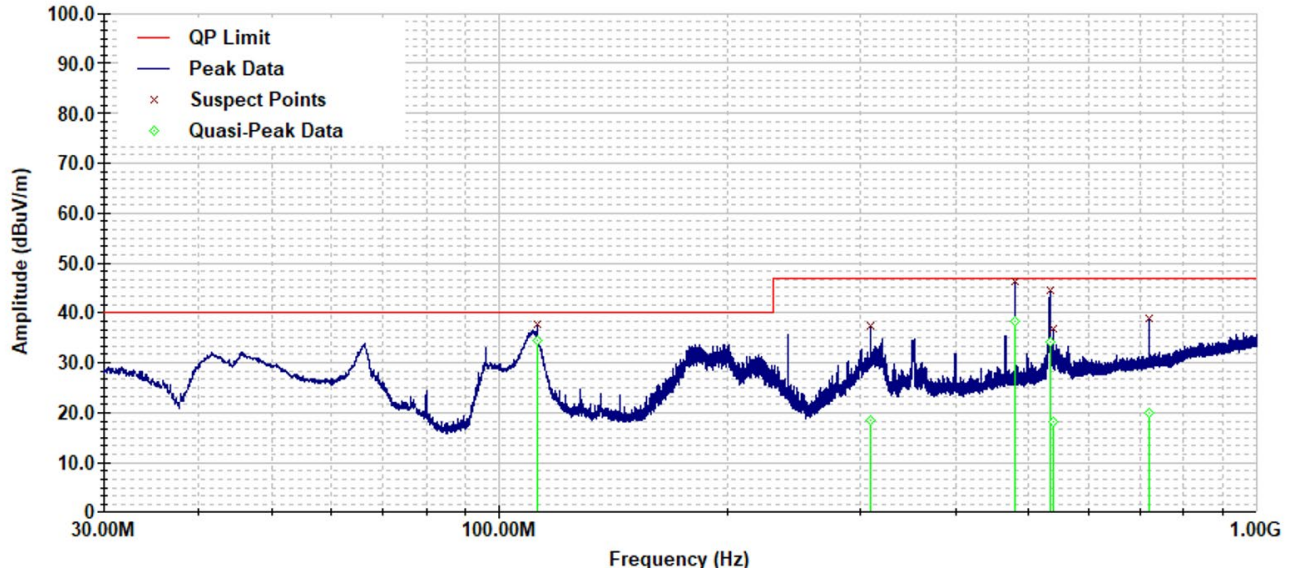

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of 47 CFR part 15 and Industry Canada RSS-247 Issue 3 Intentional Radiators. The EUT demonstrated a minimum margin of -1.8 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

Operation in the 5150-5250 and 5725-5850 MHz Frequency U-NII-1 and U-NII-3 Bands

Testing followed FCC 789033 D02 General U-NII Test Procedures New Rules v02r01.

The manufacturer provided a second test sample which provided direct connection to the antenna port. A power meter was used to measure fundamental transmitter output power. A spectrum analyzer / receiver was used to produce plots and make other antenna port conducted measurements for compliance testing. Test software was provided to operate the transmitter. This software provided the ability to set test channel, operational mode, and modulation scheme. The antenna port was connected to coaxial cable with 50-ohm attenuator and receiver, spectrum analyzer, or power meter during testing. The design was also tested for radiated emissions using sample EUT Tx Radiated #1 representative of production equipment. Radiated emissions testing was performed on the Open Area Test Site (OATS) or Semi Anechoic Chamber (SAC) with the transmitter operating. The test sample was placed on a turntable elevated as required above the ground plane as required at a 3 meters distance from the FSM antenna located on the OATS or SAC for testing radiated emissions. The peak and quasi-peak amplitude of the frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of emissions above 1000 MHz were measured using a spectrum analyzer. Emissions data was recorded from the measurement results. Data presented reflects measurement result corrected to account for measurement system gains and losses. Plots were made of transmitter performance for reference and demonstration of compliance. In addition, all Manufacturers of U-NII devices are responsible for ensuring frequency stability such that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual. The manufacturer has attested the equipment operates within the required frequency spectrum under normal operational conditions. This report documents emissions governed under the U-NII-1 and U-NII-3 bands operating in the 5180-5240 and 5745-5825 MHz frequency bands.

47CFR 15.407 General Technical Requirements

(a) power limitations

(1) For the Band 5.15-5.25 GHz

- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral**

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-04664 IC: 1792A-04664

Lenexa, KS 66214

Test: 241104

Phone/Fax: (913) 660-0666

Test to: 47CFR 15E, RSS-Gen RSS-247

Revision 2

File: A04664 NII TstRpt 241104 r2

Garmin International, Inc.

PMN: A04664

SN's: 8NN000252, 8NN000083

Date: March 17, 2025

Page 37 of 112

density shall not exceed 17 dBm in any 1-megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

- (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

- (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

- (11) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

- (12) Power spectral density measurement. The maximum power spectral density is measured as either a conducted emission by direct connection of a calibrated test instrument to the equipment under test or a radiated measurement. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in all other bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (7) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (8) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (9) The provisions of §15.205 apply to intentional radiators operating under this section.
- (10) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.
- (c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information, or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.
- (e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.
- (f) Radio frequency devices operating under the provisions of this part are subject to the radio frequency radiation exposure requirements specified in §§1.1307(b), 1.1310, 2.1091, and 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a “general population/uncontrolled” environment. Applications for equipment authorization of mobile or portable devices operating under this section must contain a statement confirming compliance with these requirements. Technical information showing the basis for this statement must be submitted to the Commission upon request.
- (g) Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user’s manual.

6. Technical requirements for license-exempt local area network devices and digital transmission systems operating in the 5 GHz band

This section provides standards for License-Exempt Local Area Network (LE-LAN) devices operating in the bands 5150-5250 MHz, 5250-5350 MHz, 5470-5600 MHz, 5650-5725 MHz, and 5725-5850 MHz and for DTS's operating in the band 5725-5850 MHz that employ digital modulation technology but are not designed for LE-LAN operation.

Devices with occupied bandwidths which overlap different bands shall comply with all operational requirements for each band.

6.2.1 Frequency band 5150-5250 MHz

LE-LAN devices are restricted to indoor operation only in the band 5150-5250 MHz. However, original equipment manufacturer (OEM) devices, which are installed in vehicles-by-vehicles manufacturers, are permitted.

Figure 5 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 6 U-NII-1 (802.11a)

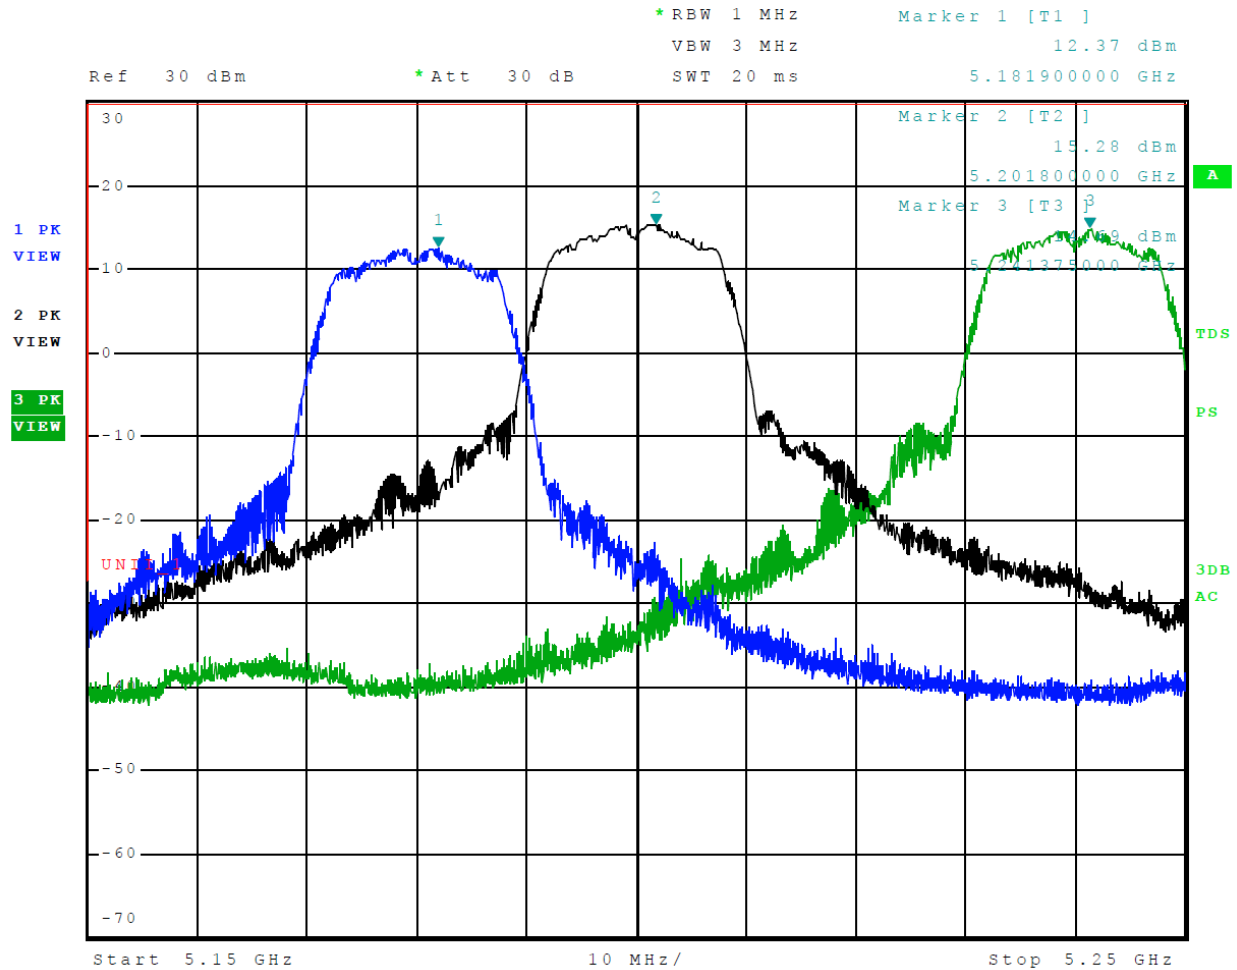


Figure 6 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 7 U-NII-1 (802.11n)

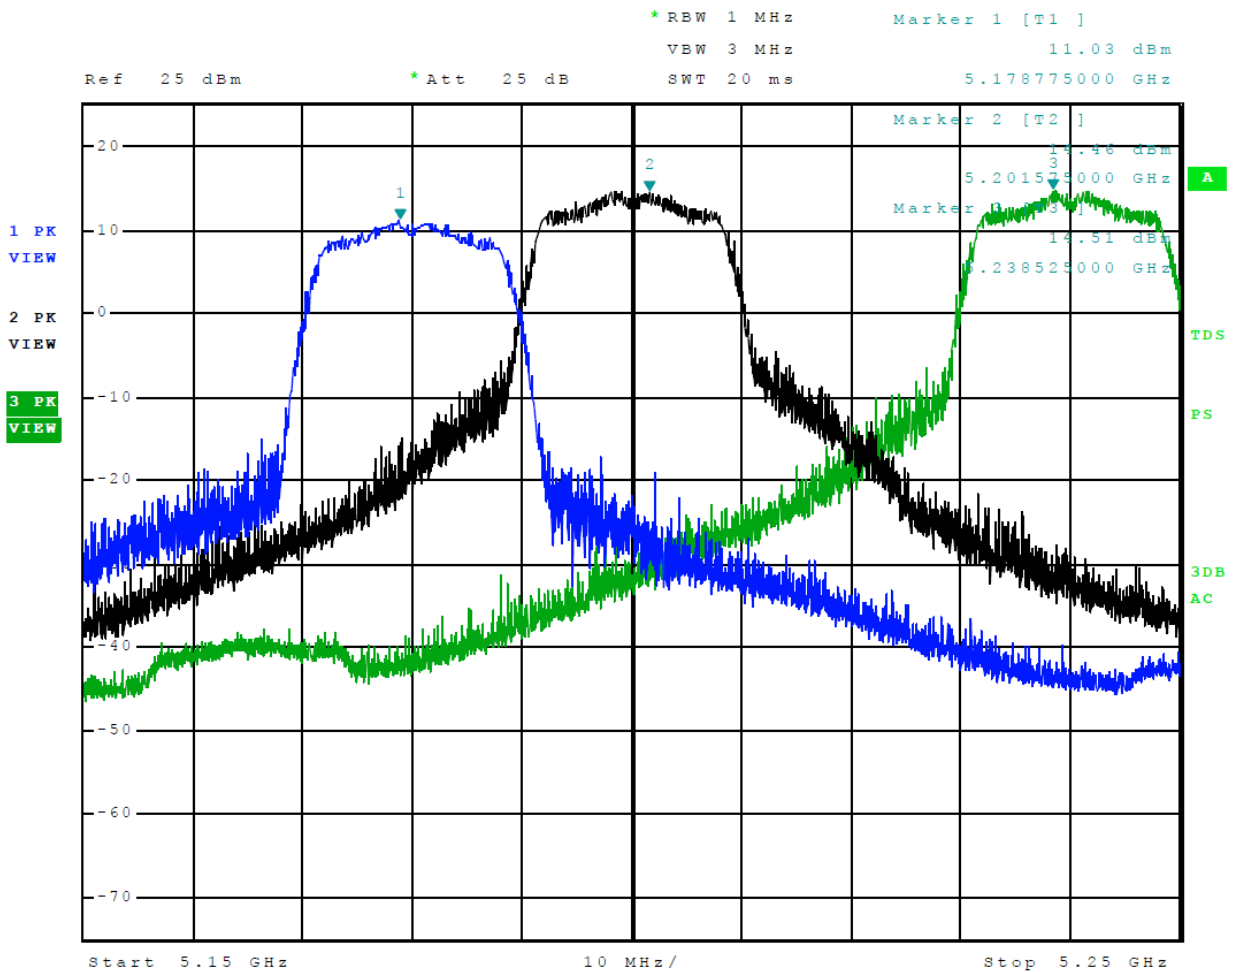


Figure 7 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 8 U-NII-1 (802.11n40)

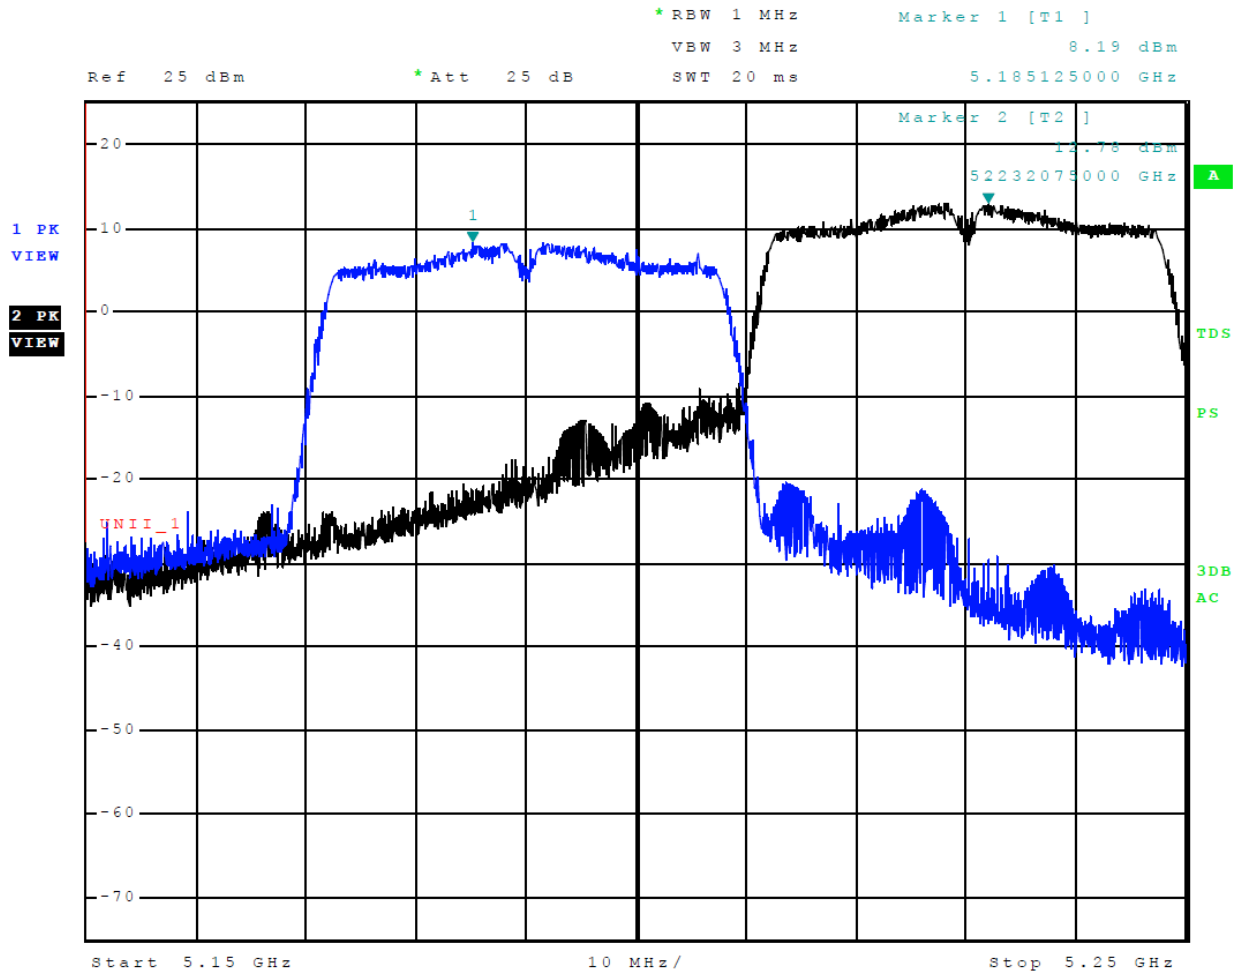


Figure 8 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 9 U-NII-1 (802.11ac40)

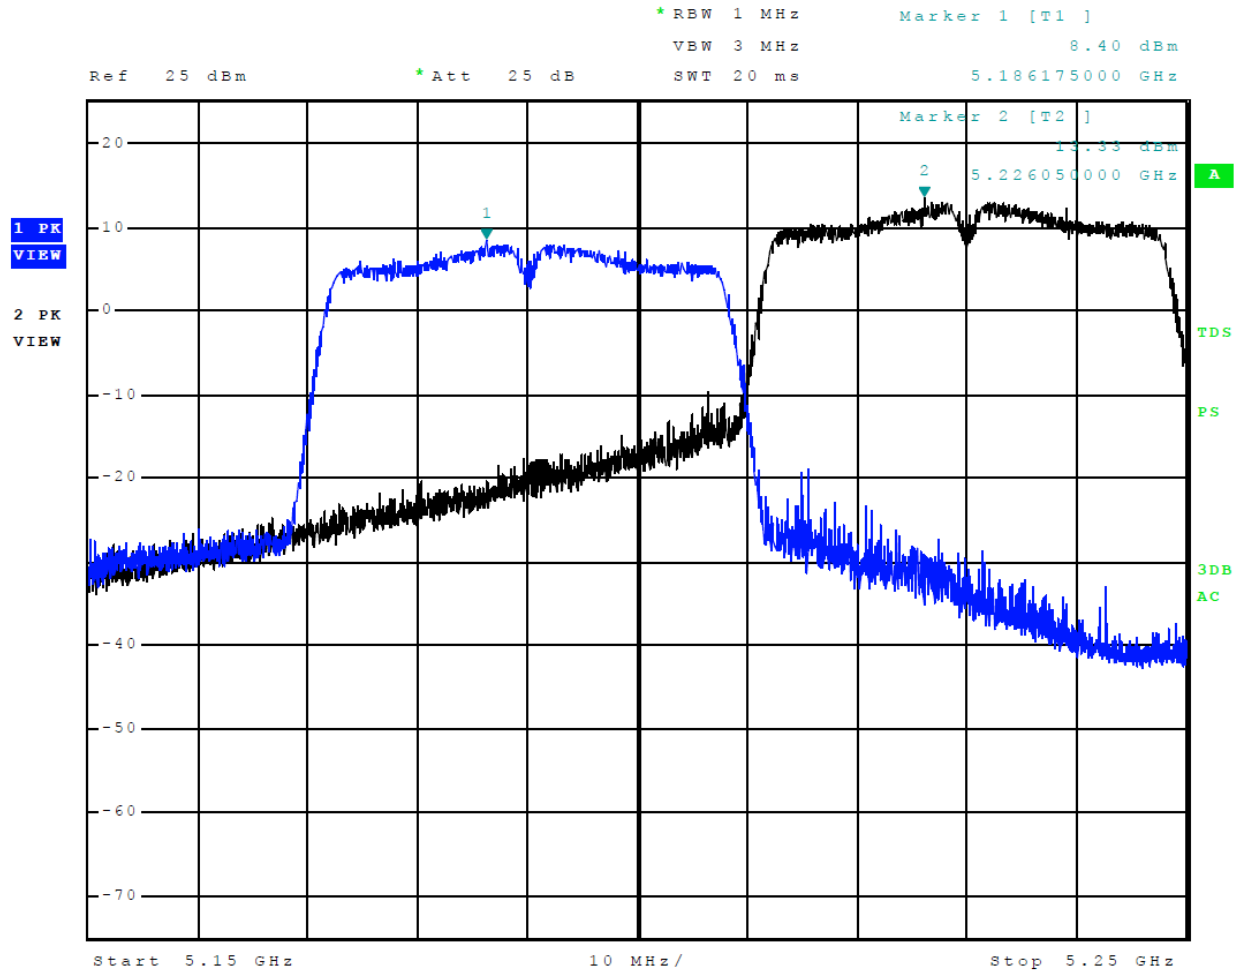


Figure 9 Plot of Transmitter Emissions Across 5150-5250 MHz Mode 10 U-NII-1 (802.11ac80)

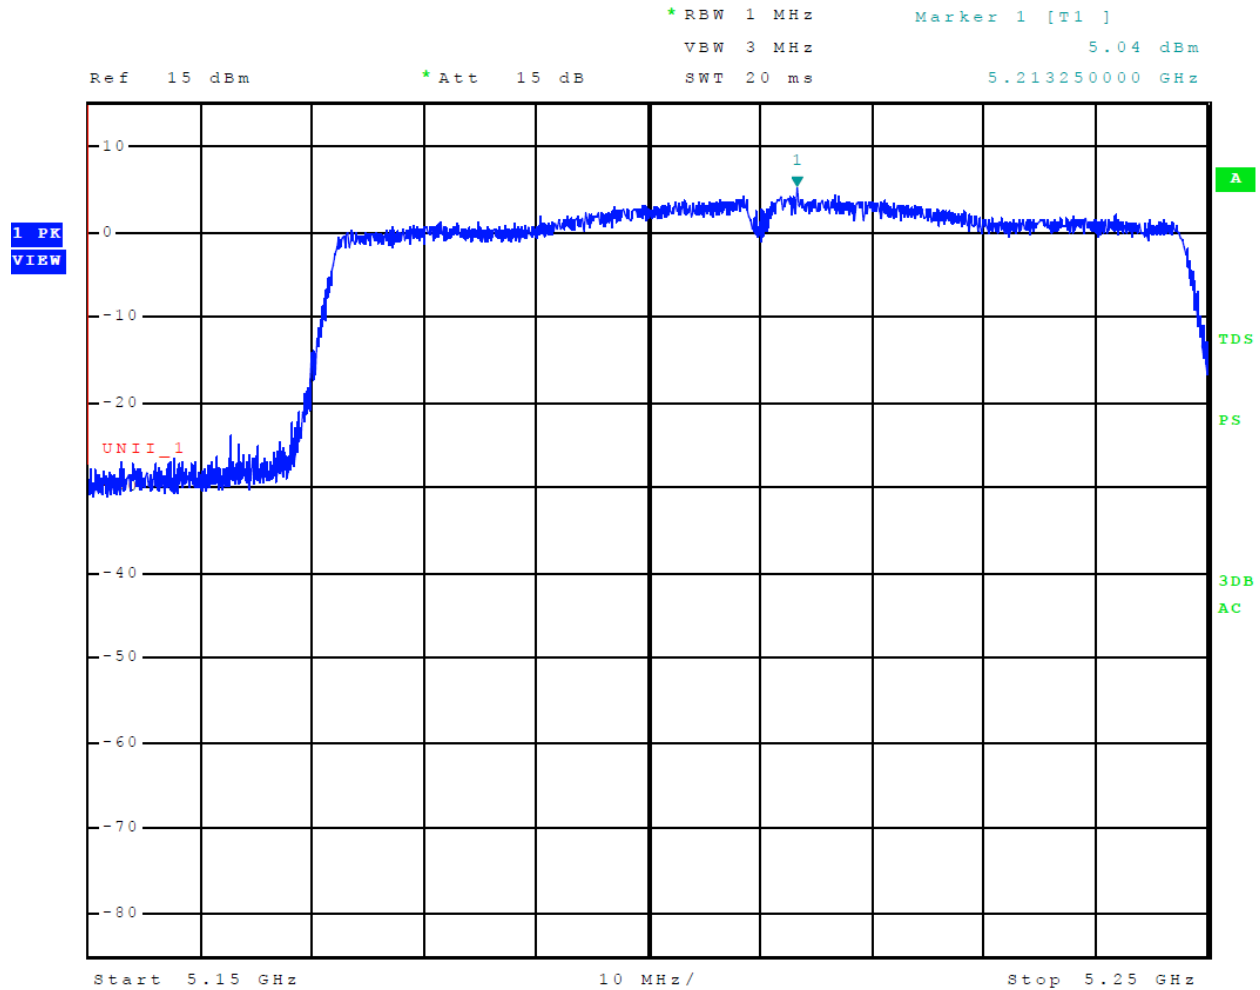


Figure 10 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 11 U-NII-3 (802.11a)

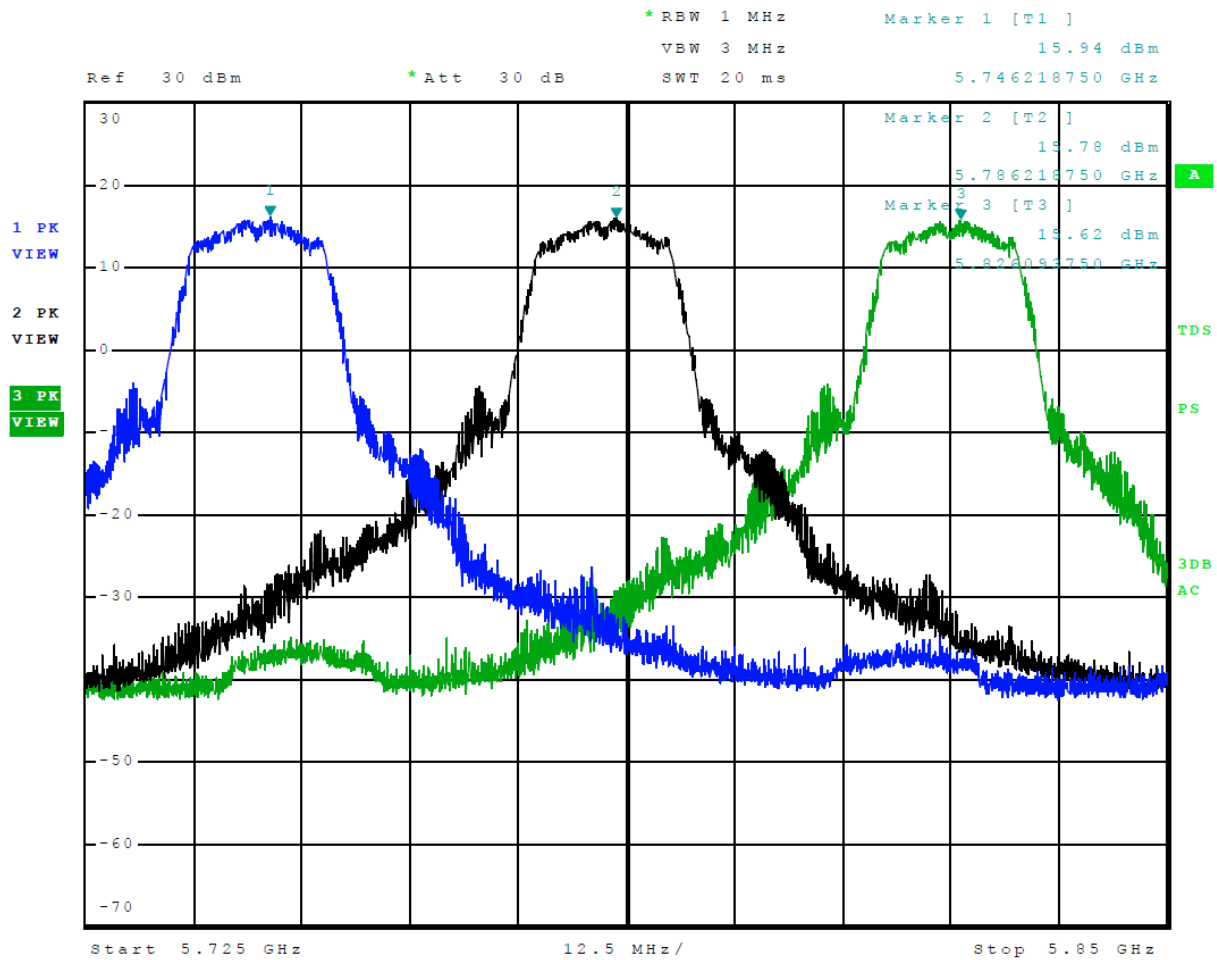


Figure 11 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 12 U-NII-3 (802.11n)

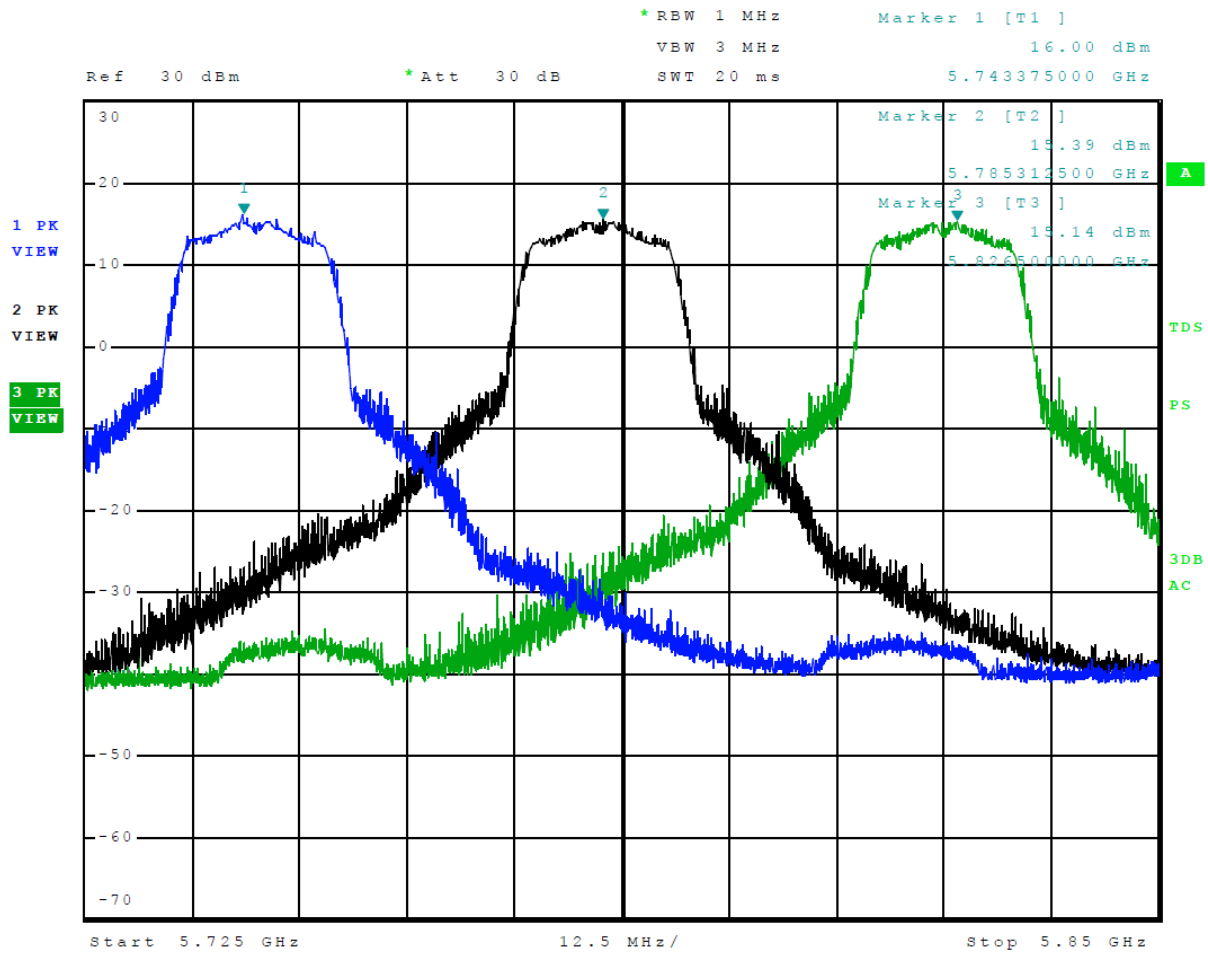


Figure 12 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 13 U-NII-3 (802.11n40)

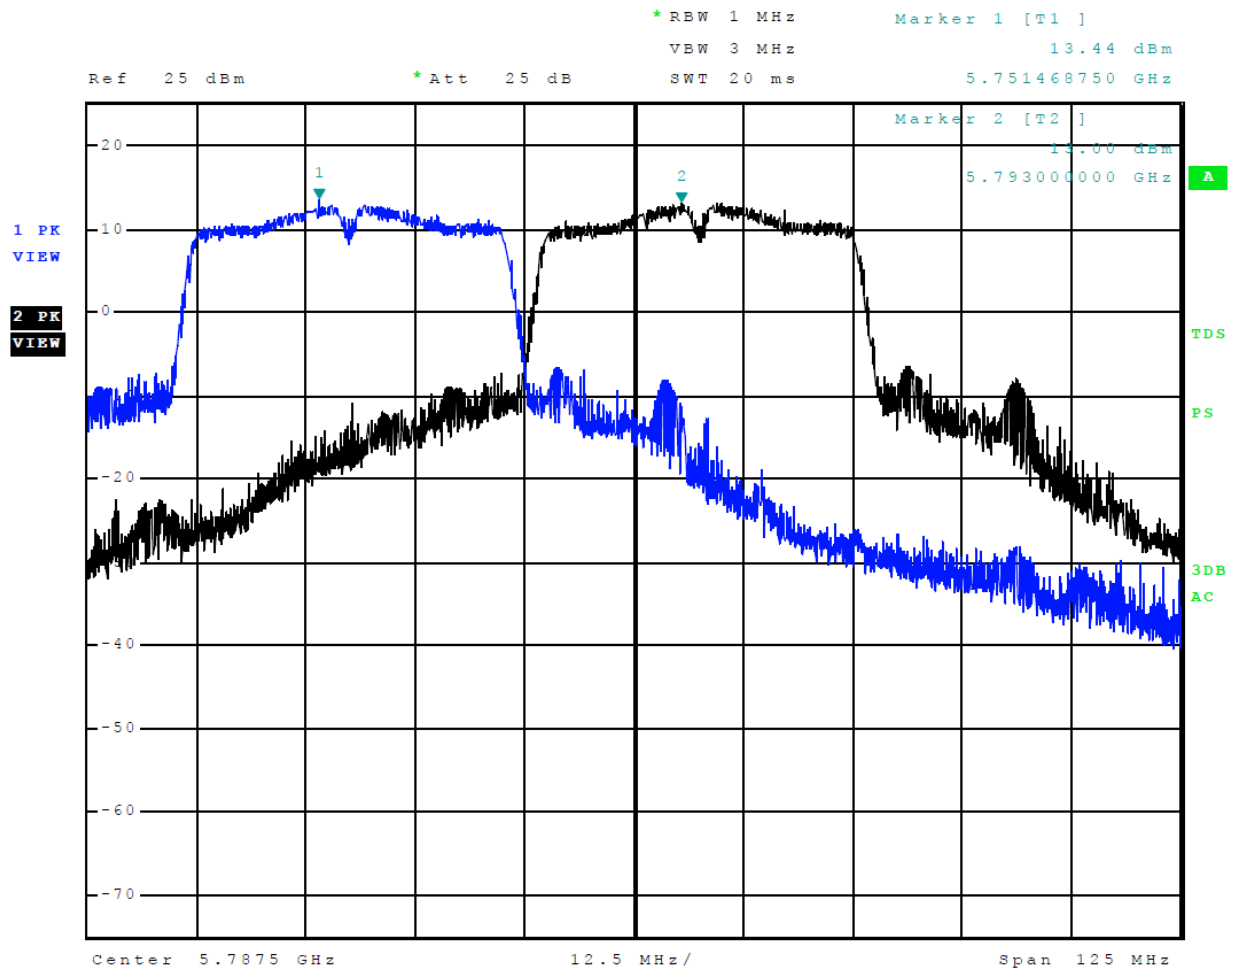


Figure 13 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 14 U-NII-3 (802.11ac40)

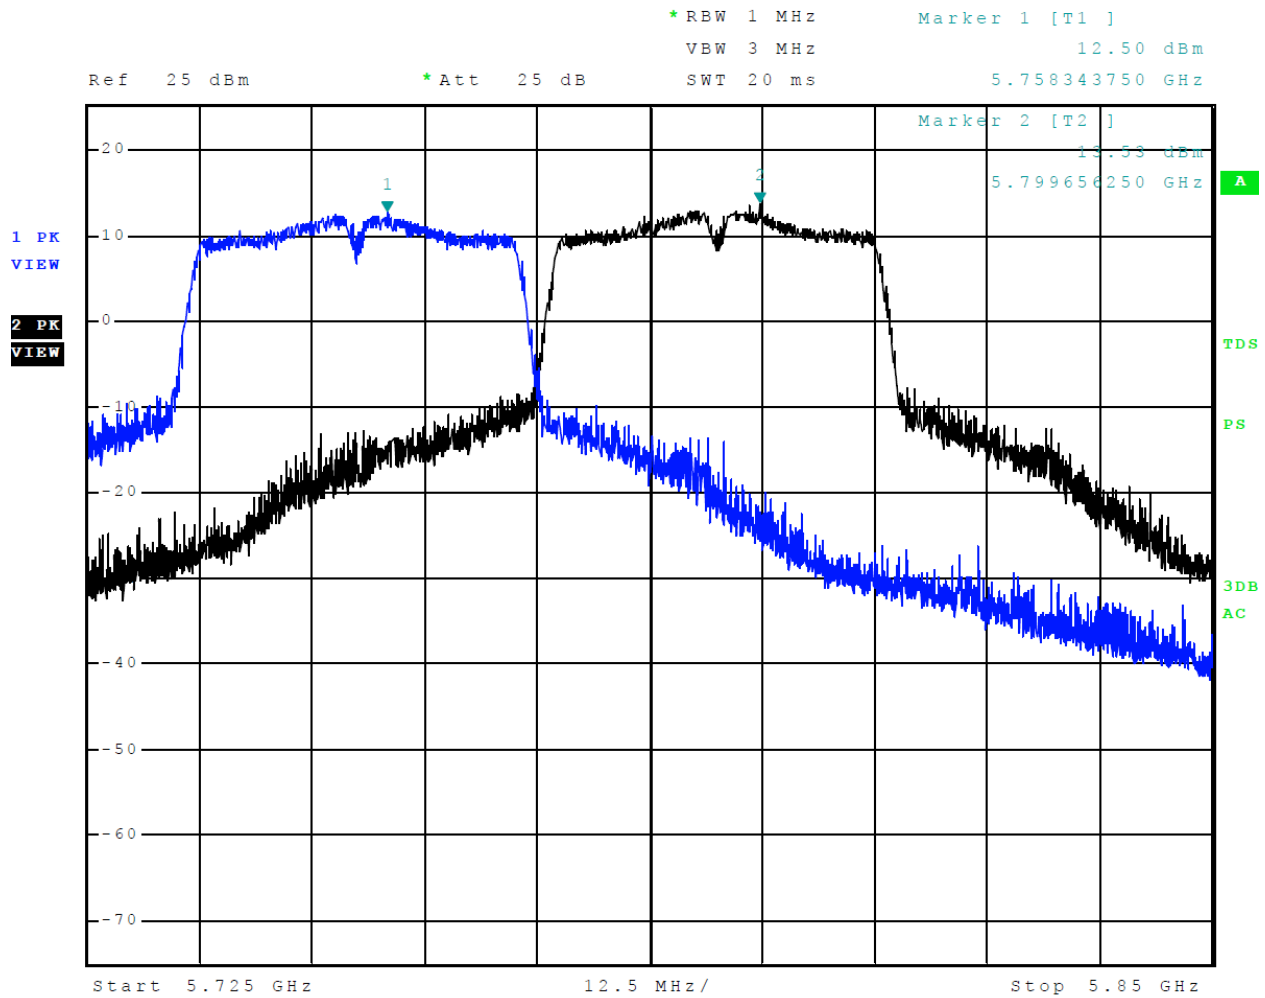


Figure 14 Plot of Transmitter Emissions Across 5725-5850 MHz Mode 15 U-NII-3 (802.11ac80)

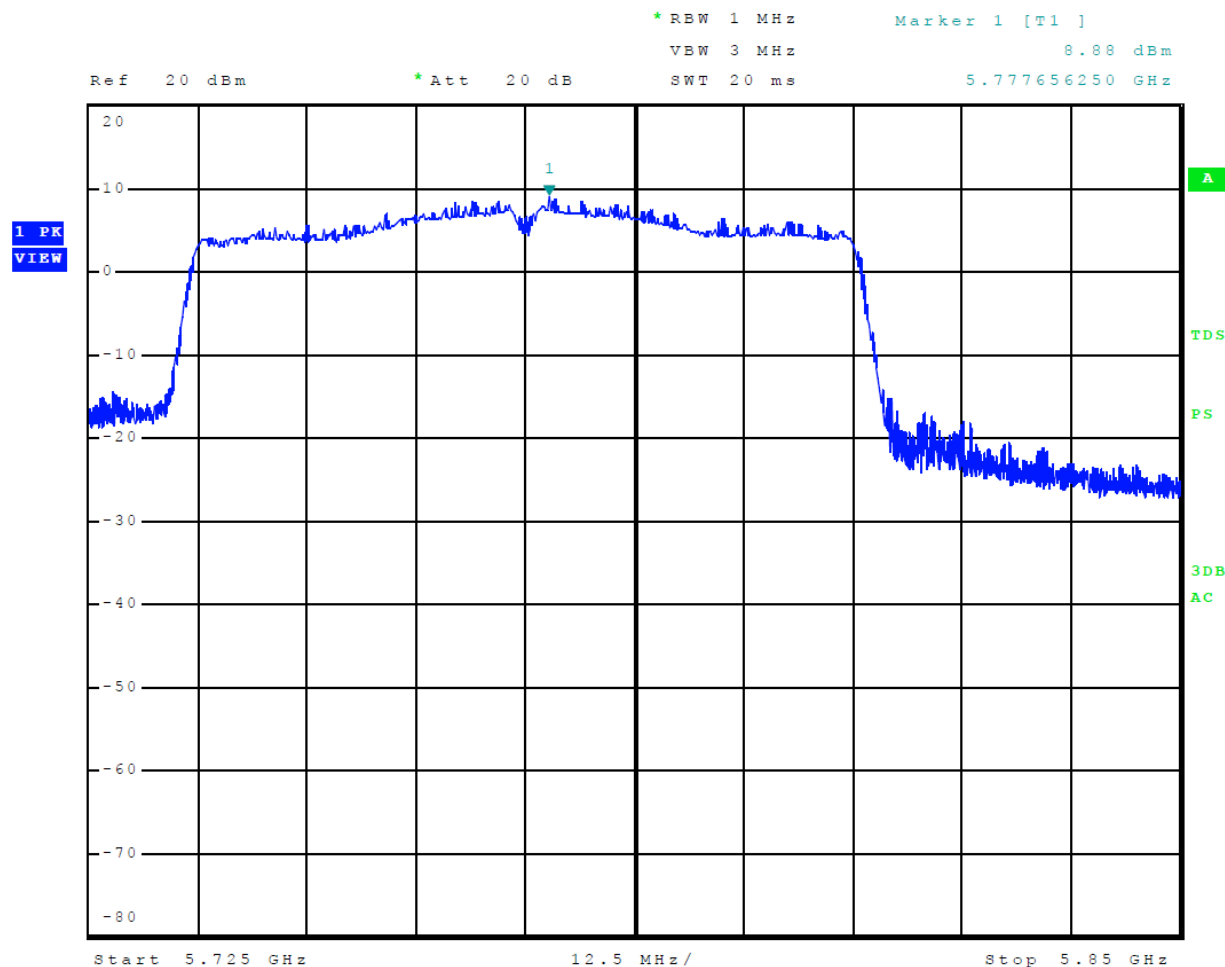


Figure 15 Plot of Lower Band Edge Across 5150-5250 MHz Mode 6 U-NII-1 (802.11a)

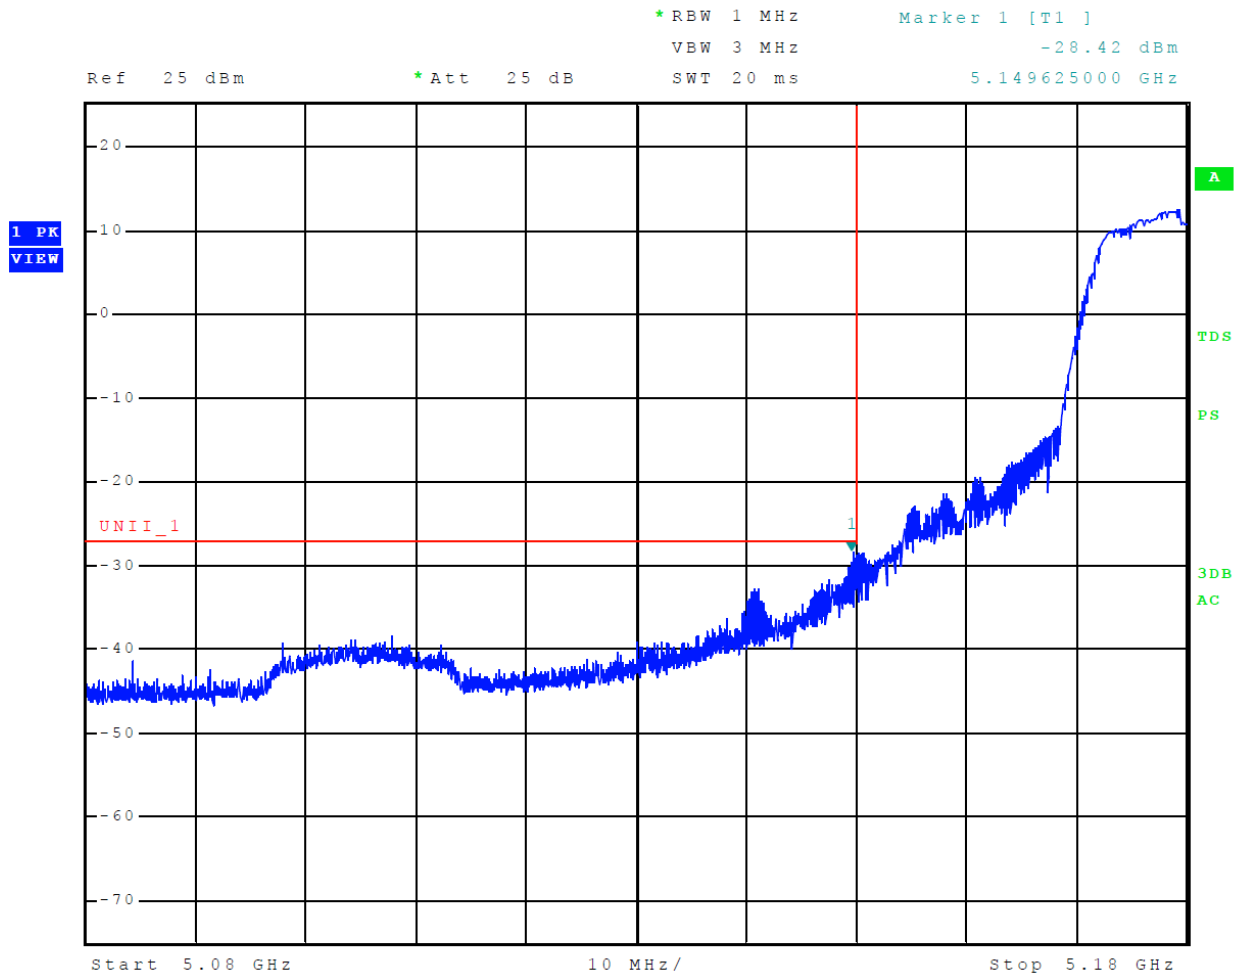


Figure 16 Plot of Lower Band Edge Across 5150-5250 MHz Mode 7 U-NII-1 (802.11n)

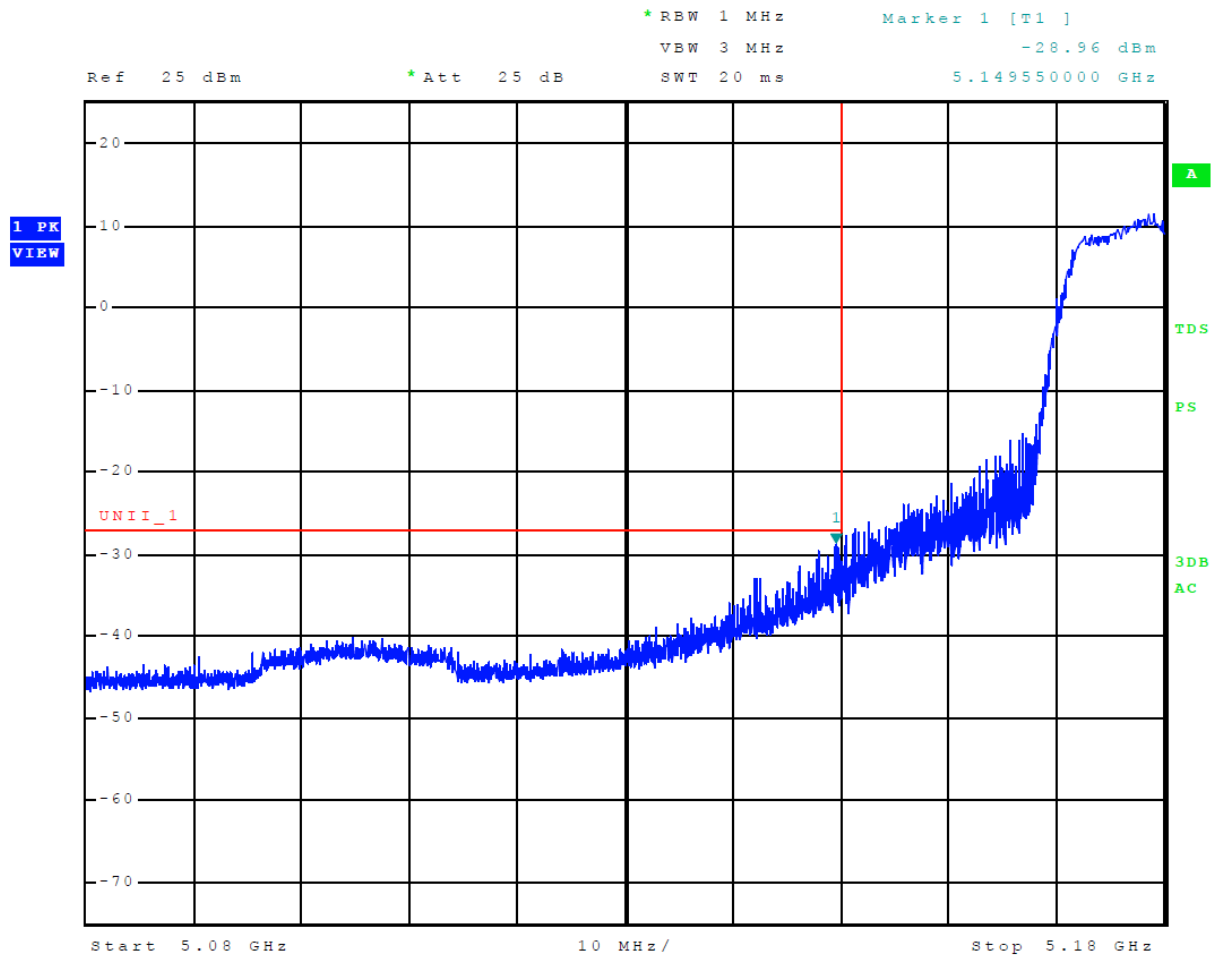


Figure 17 Plot of Lower Band Edge Across 5150-5250 MHz Mode 8 U-NII-1 (802.11n40)

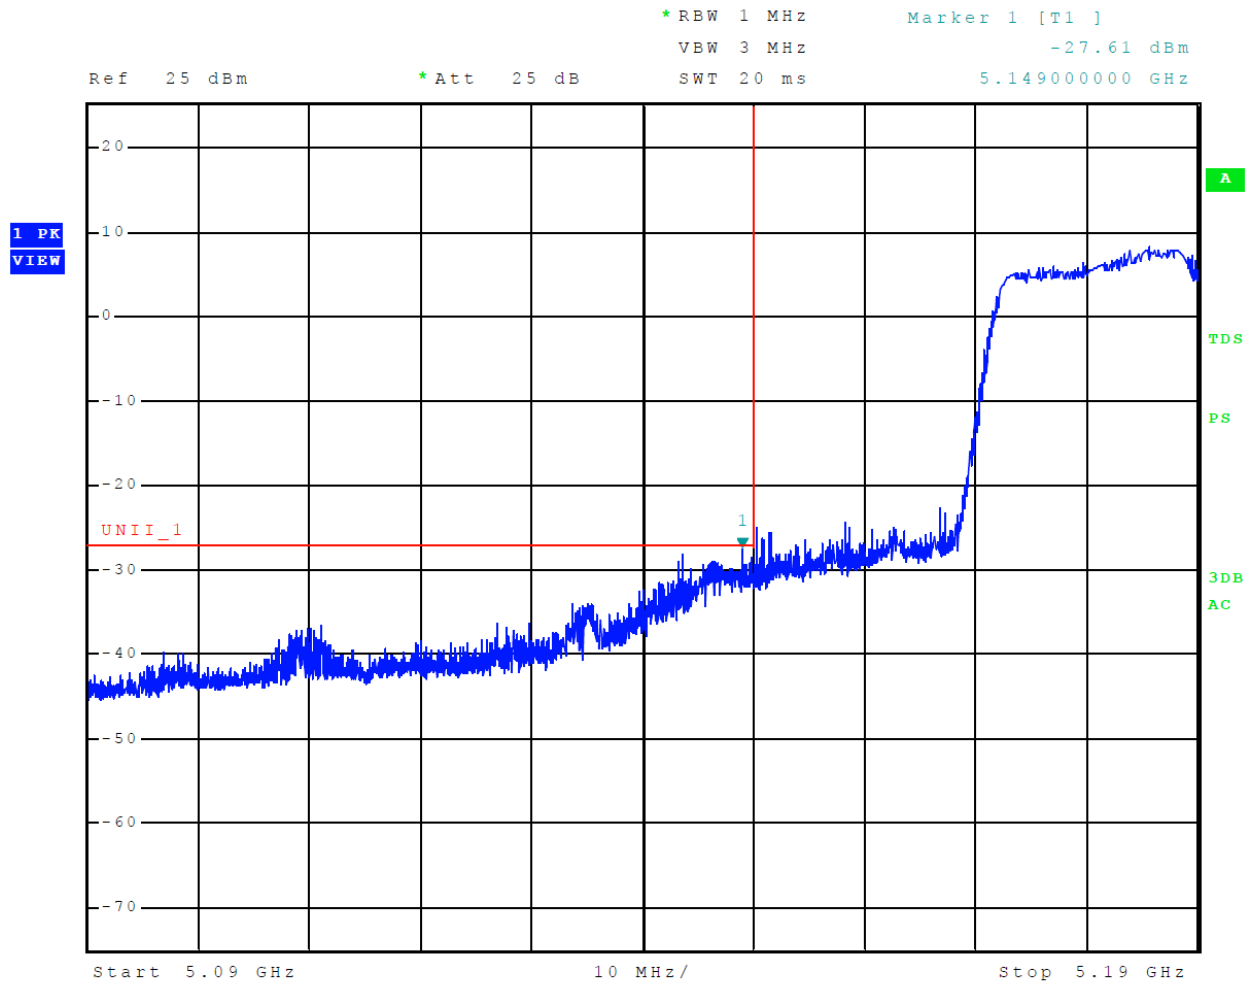


Figure 18 Plot of Lower Band Edge Across 5150-5250 MHz Mode 9 U-NII-1 (802.11ac40)

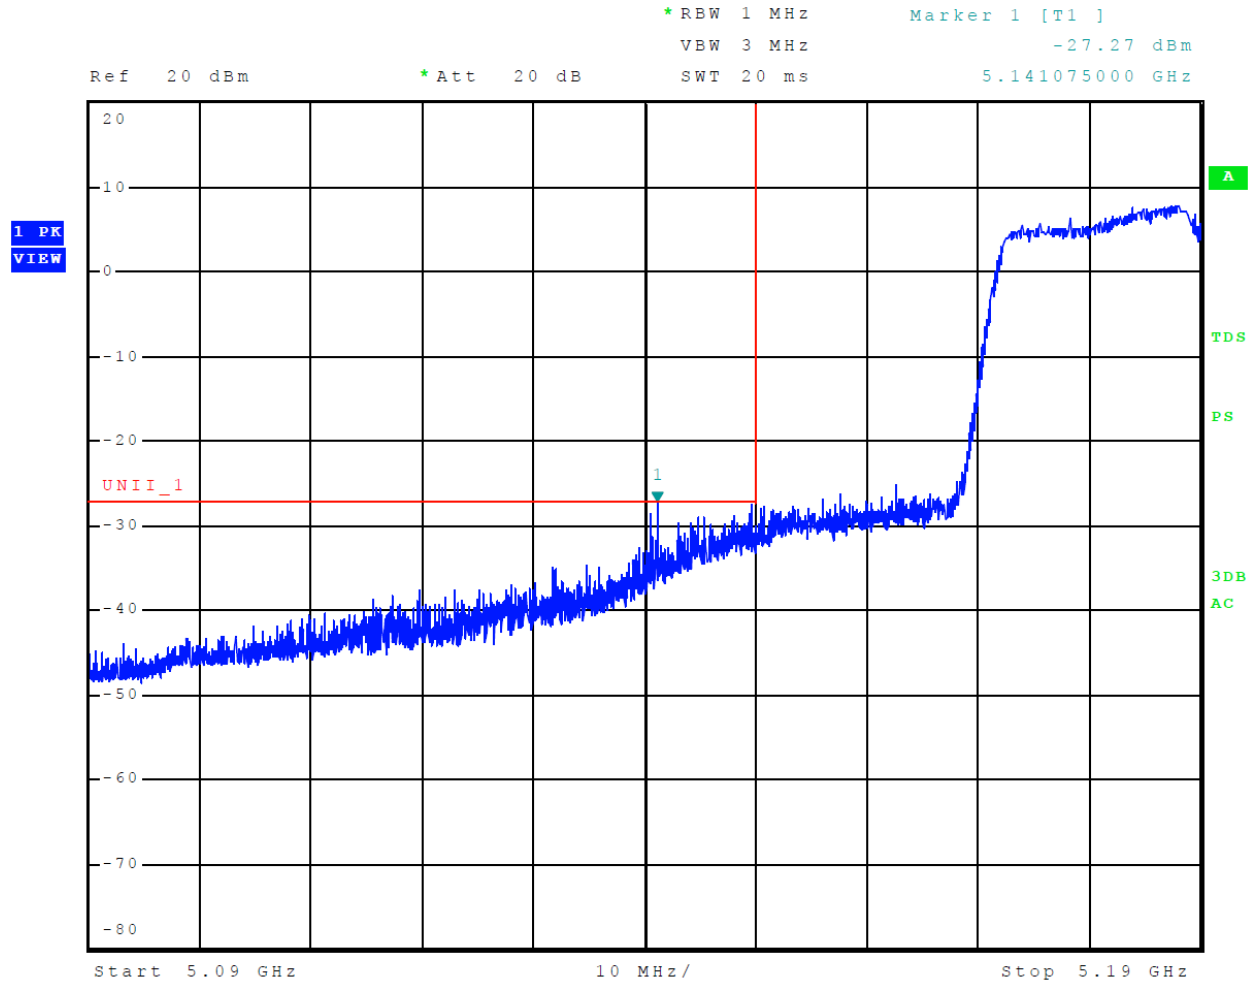


Figure 19 Plot of Lower Band Edge Across 5150-5250 MHz Mode 10 U-NII-1 (802.11ac80)

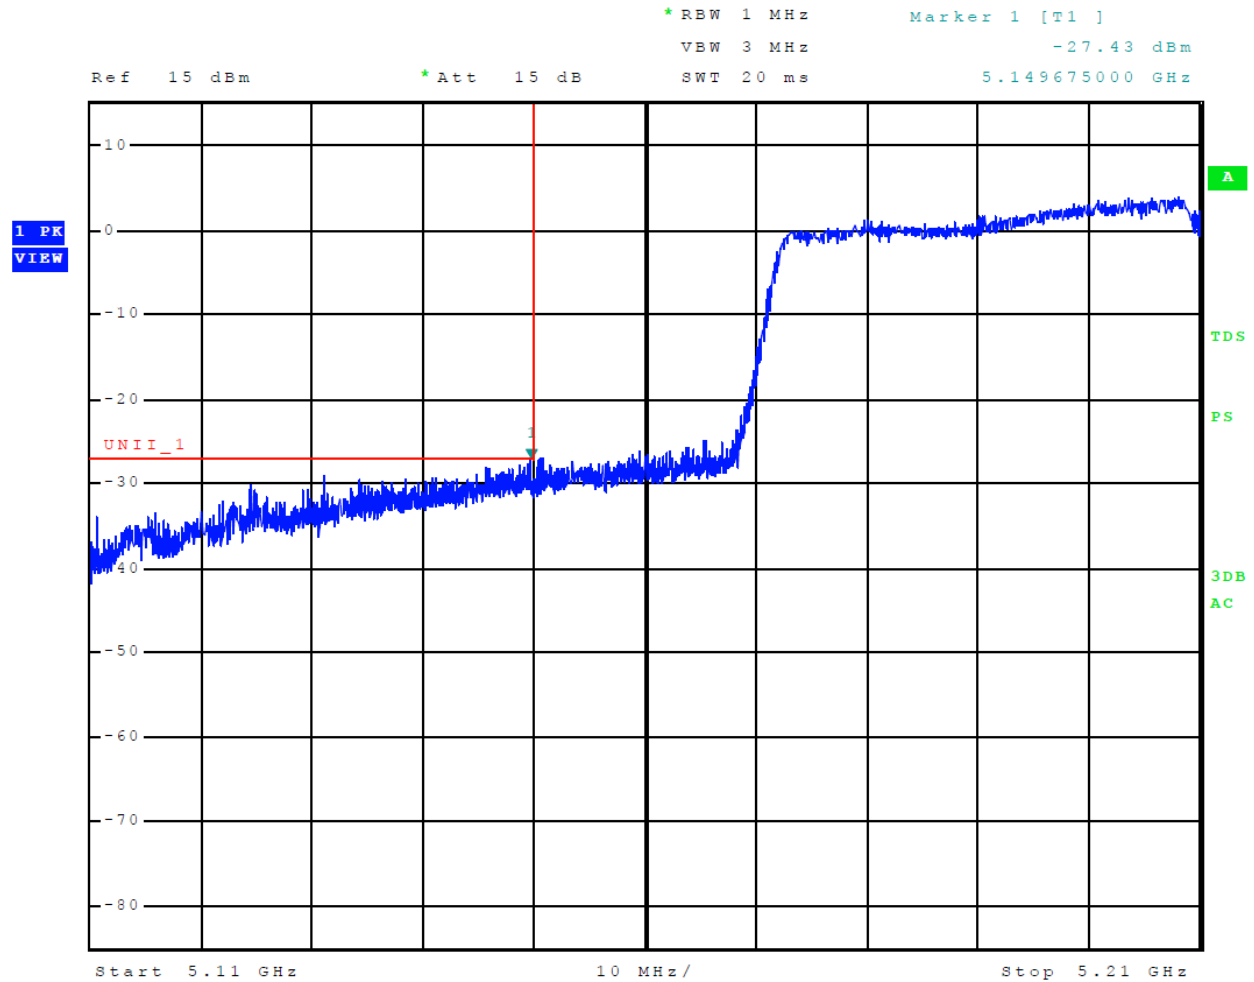


Figure 20 Plot of Lower Band Edge Across 5725-5850 MHz Mode 11 U-NII-3 (802.11a)

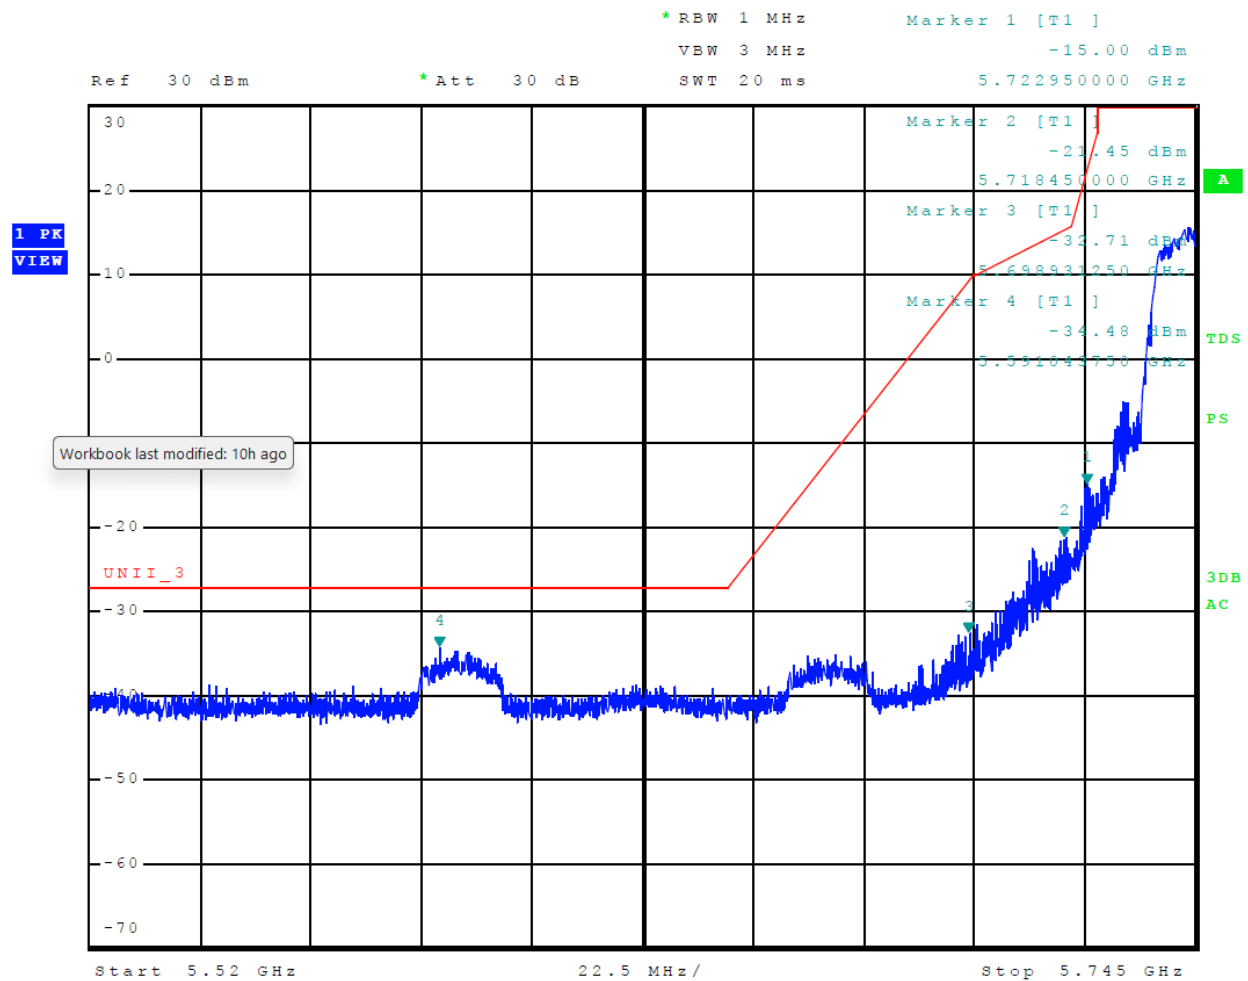


Figure 21 Plot of Lower Band Edge Across 5725-5850 MHz Mode 12 U-NII-3 (802.11n)

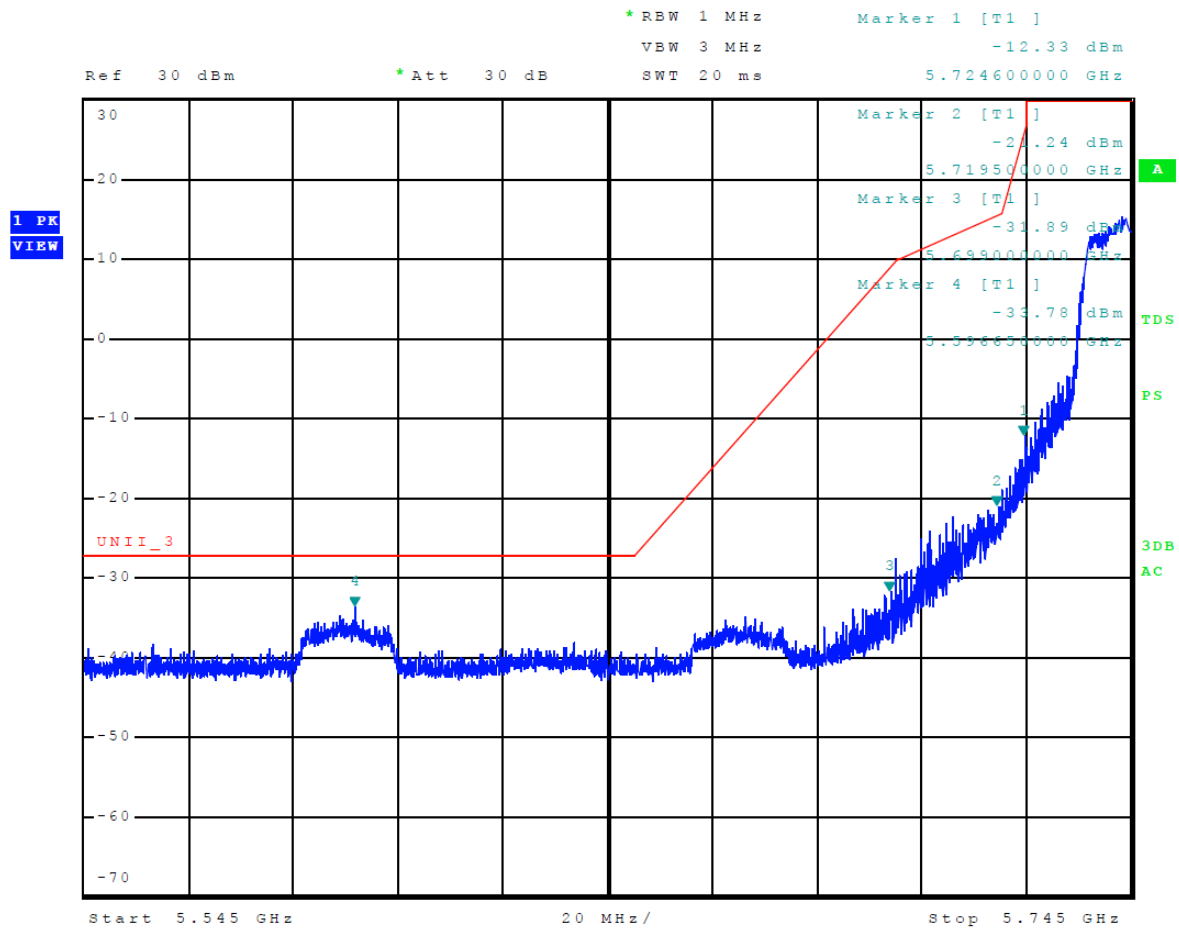


Figure 22 Plot of Lower Band Edge Across 5725-5850 MHz Mode 13 U-NII-3 (802.11n40)

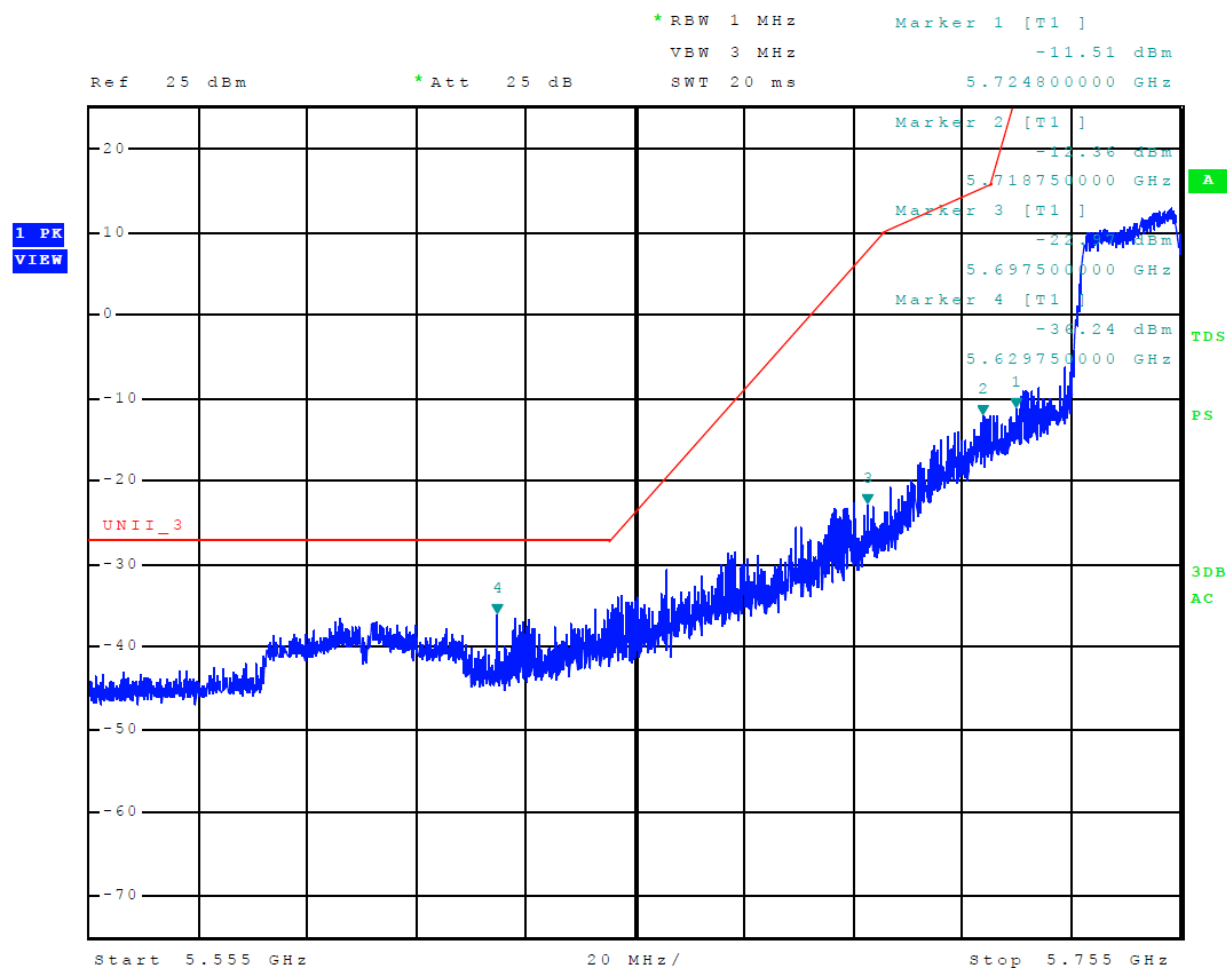


Figure 23 Plot of Lower Band Edge Across 5725-5850 MHz Mode 14 U-NII-3 (802.11ac40)

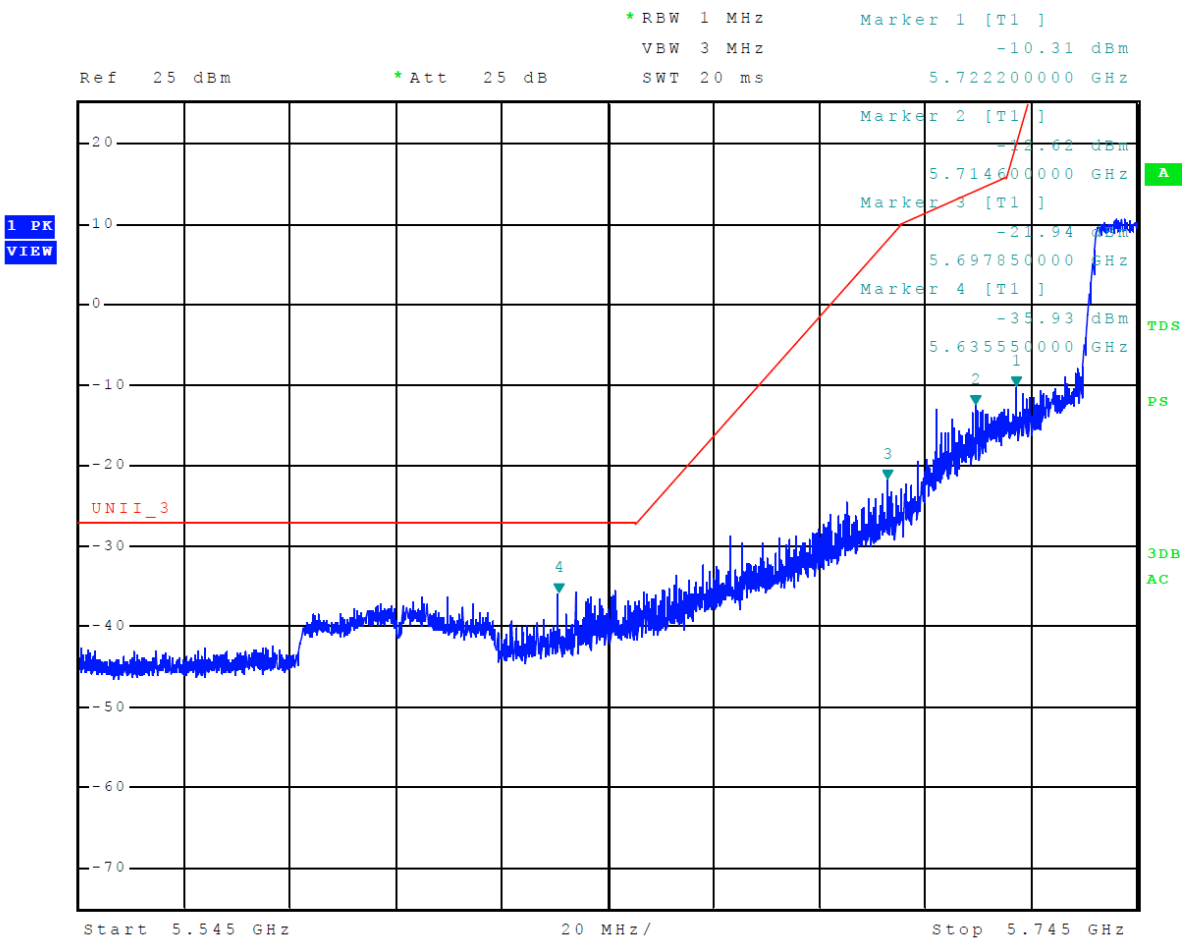


Figure 24 Plot of Lower Band Edge Across 5725-5850 MHz Mode 15 U-NII-3 (802.11ac80)

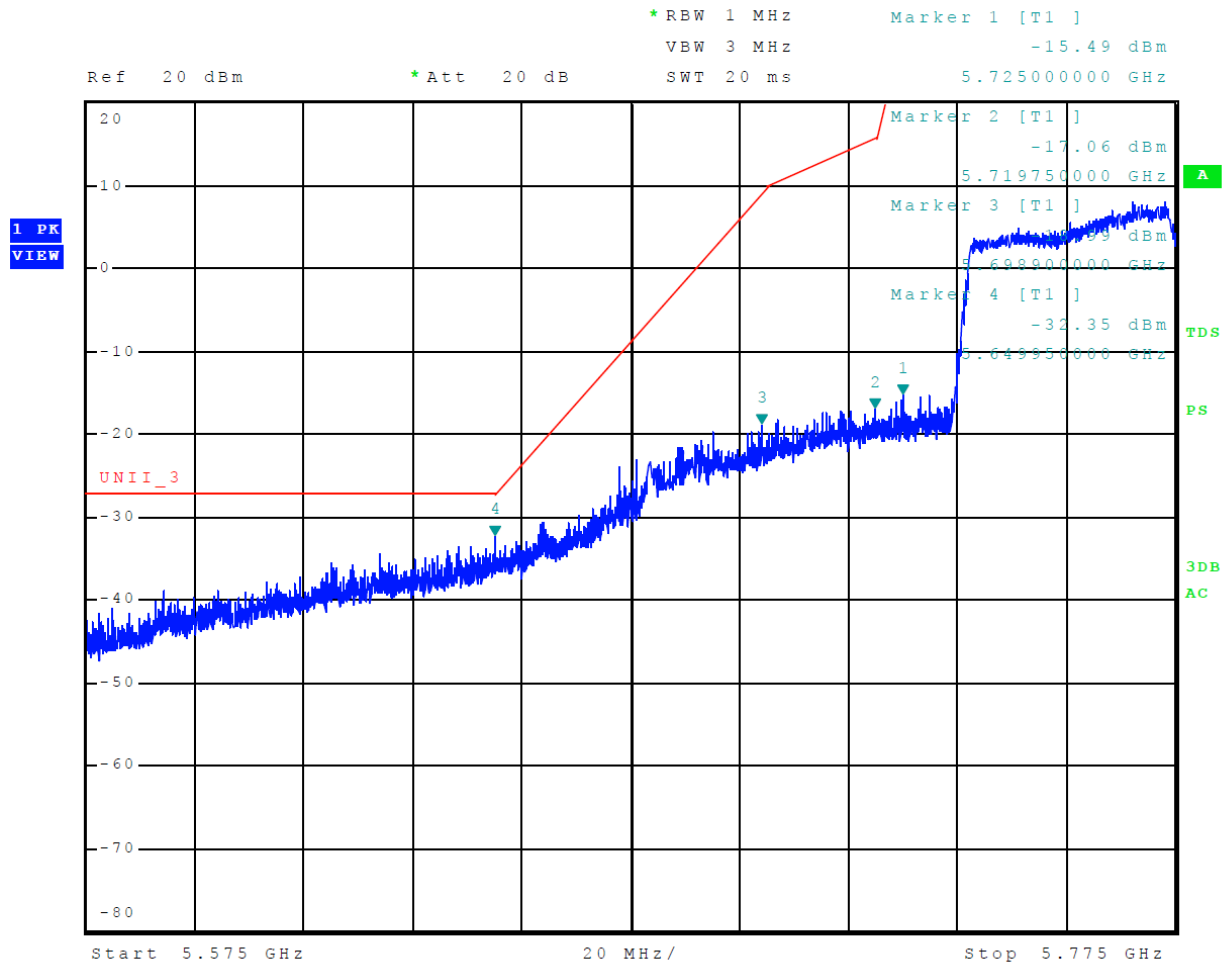


Figure 25 Plot of Upper Band Edge Across 5150-5250 MHz Mode 6 U-NII-1 (802.11a)

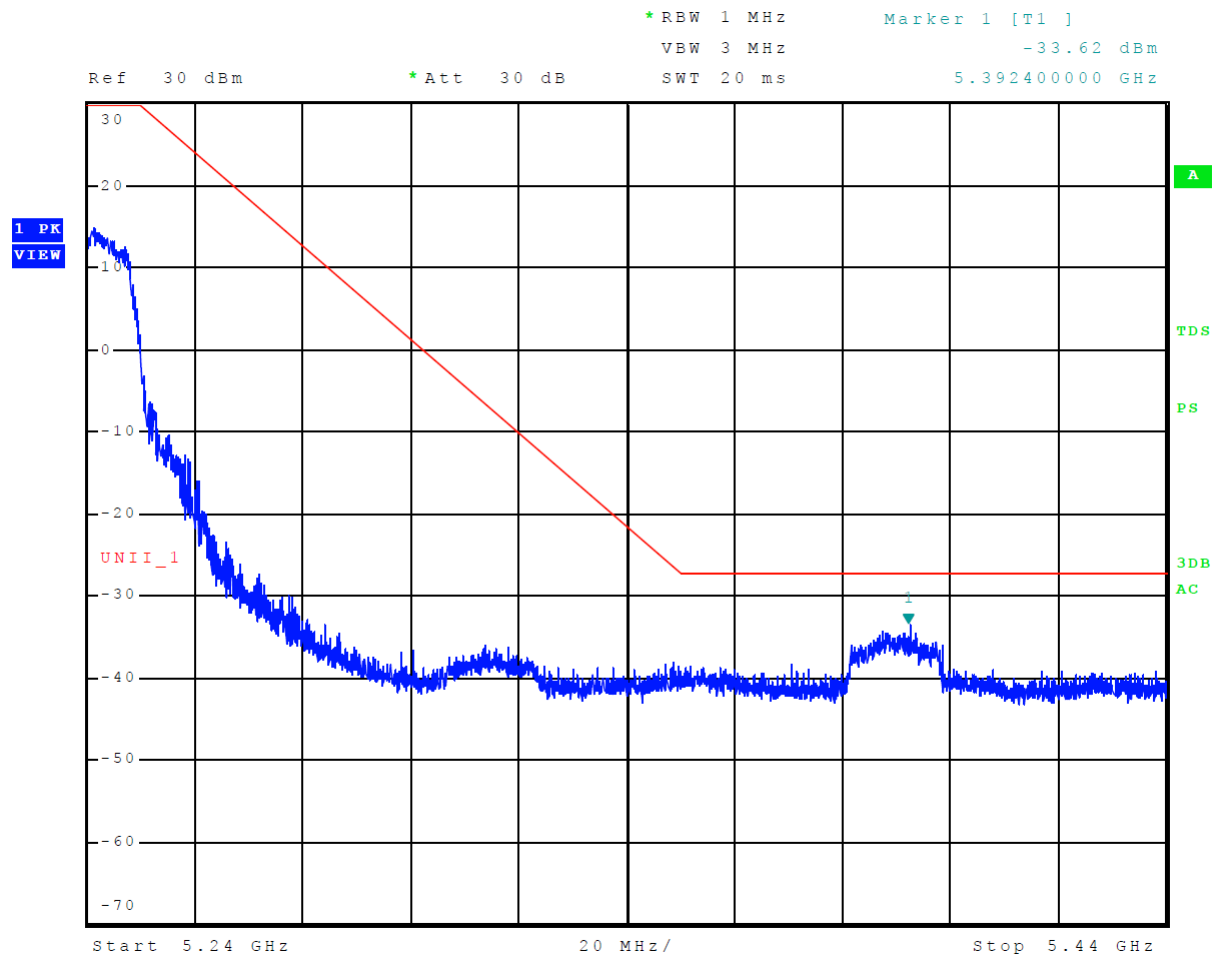


Figure 26 Plot of Upper Band Edge Across 5150-5250 MHz Mode 7 U-NII-1 (802.11n)



Figure 27 Plot of Upper Band Edge Across 5150-5250 MHz Mode 8 U-NII-1 (802.11n40)

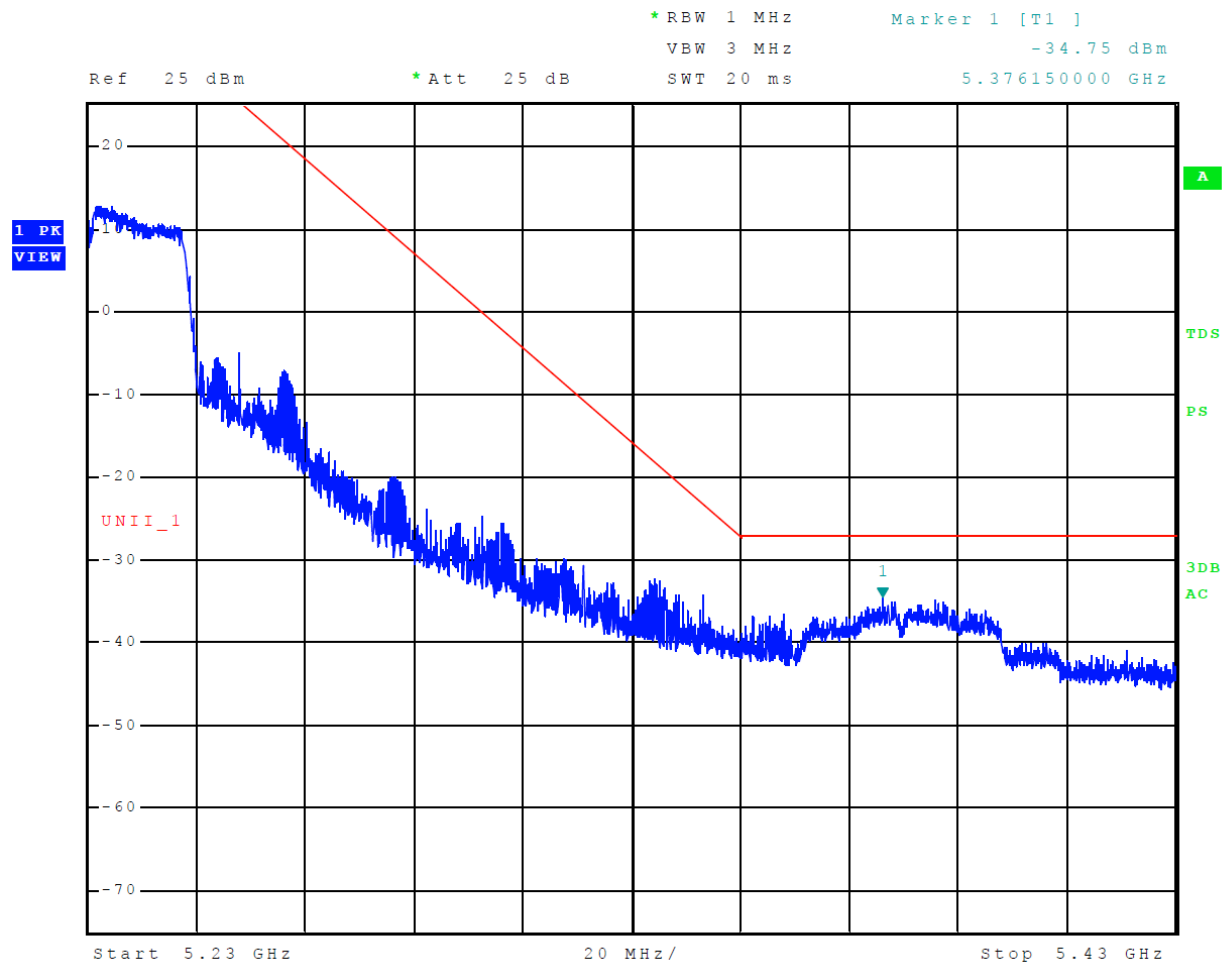


Figure 28 Plot of Upper Band Edge Across 5150-5250 MHz Mode 9 U-NII-1 (802.11ac40)

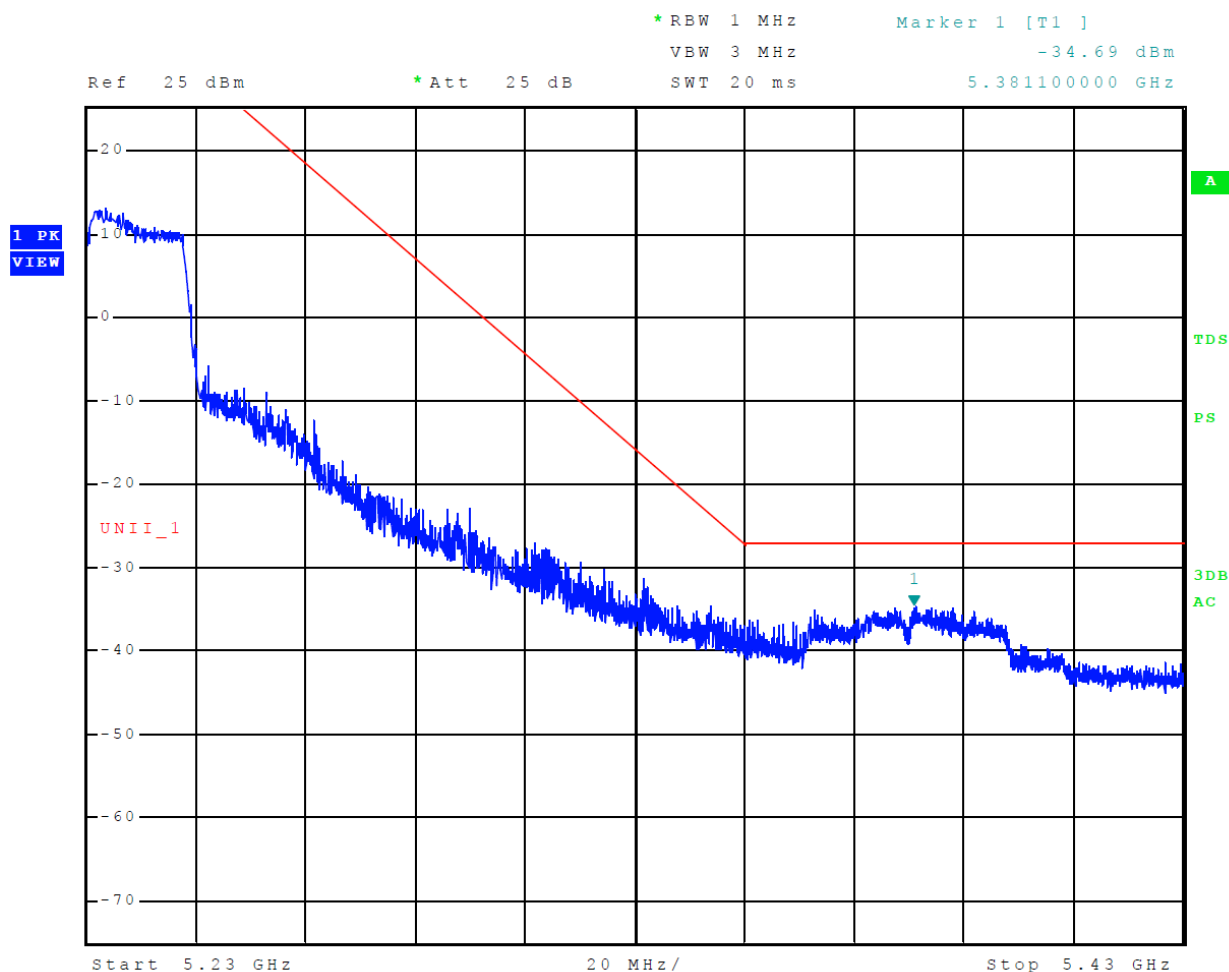


Figure 29 Plot of Upper Band Edge Across 5150-5250 MHz Mode 10 U-NII-1 (802.11ac80)

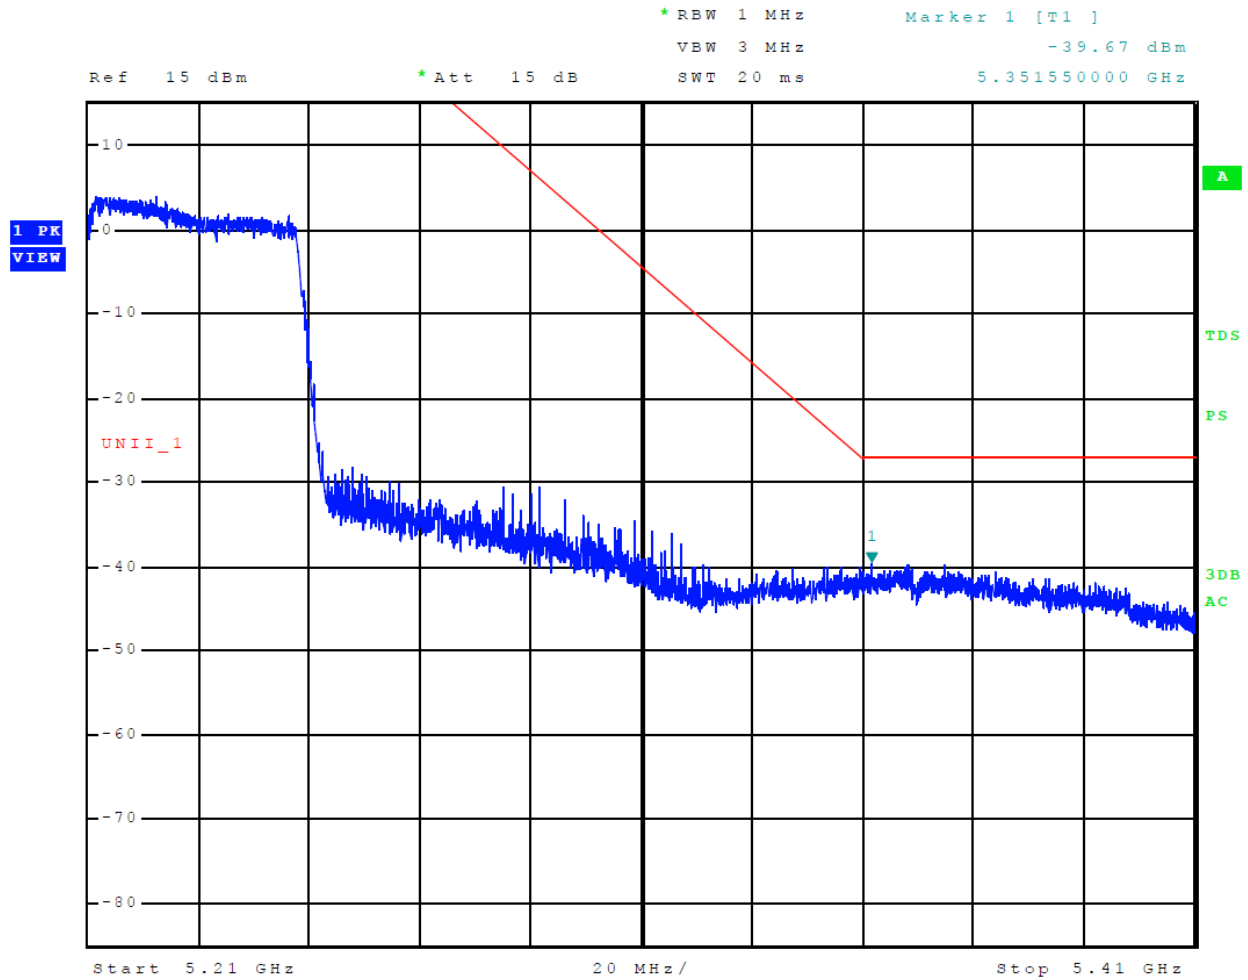


Figure 30 Plot of Upper Band Edge Across 5725-5850 MHz Mode 11 U-NII-3 (802.11a)

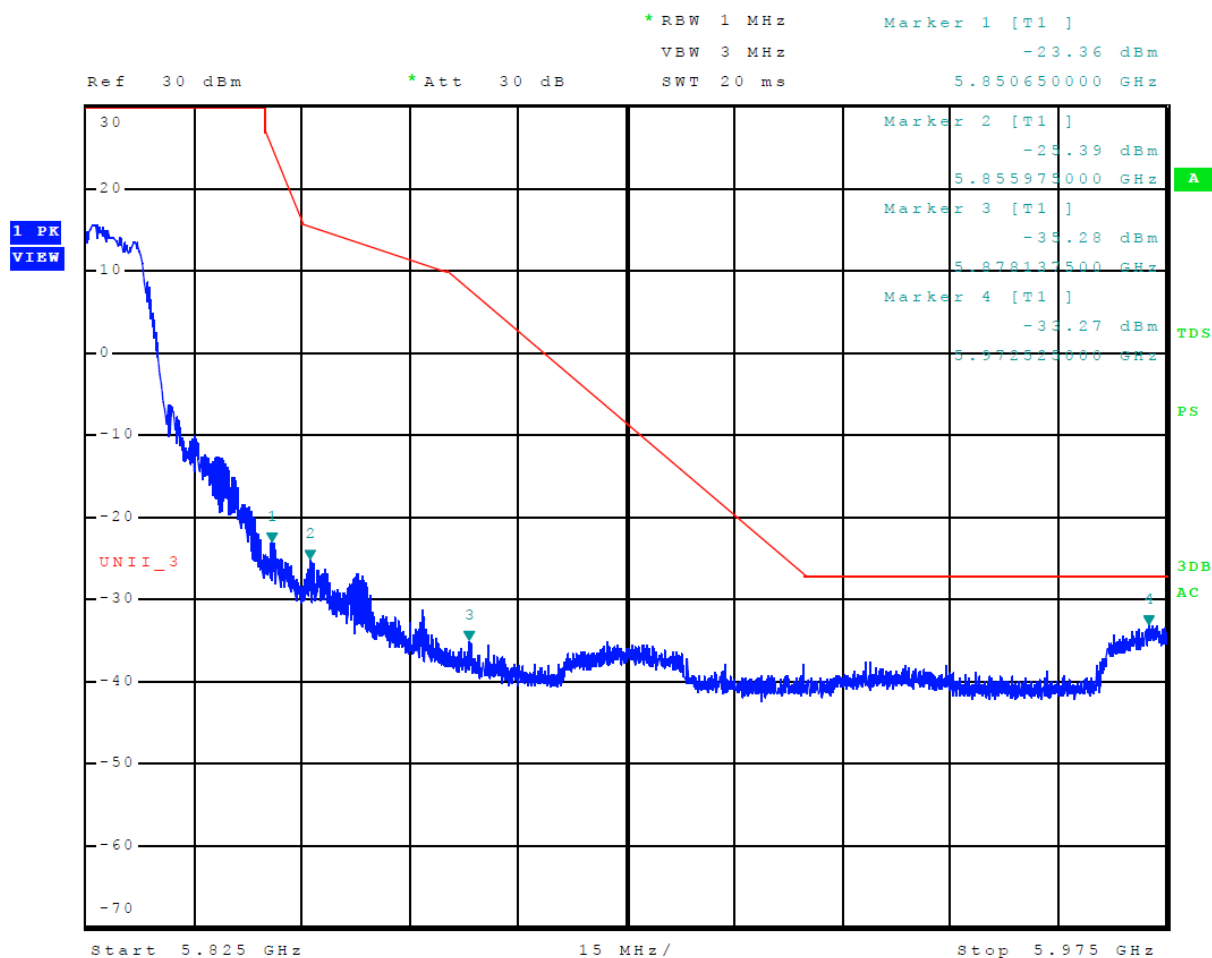


Figure 31 Plot of Upper Band Edge Across 5725-5850 MHz Mode 12 U-NII-3 (802.11n)

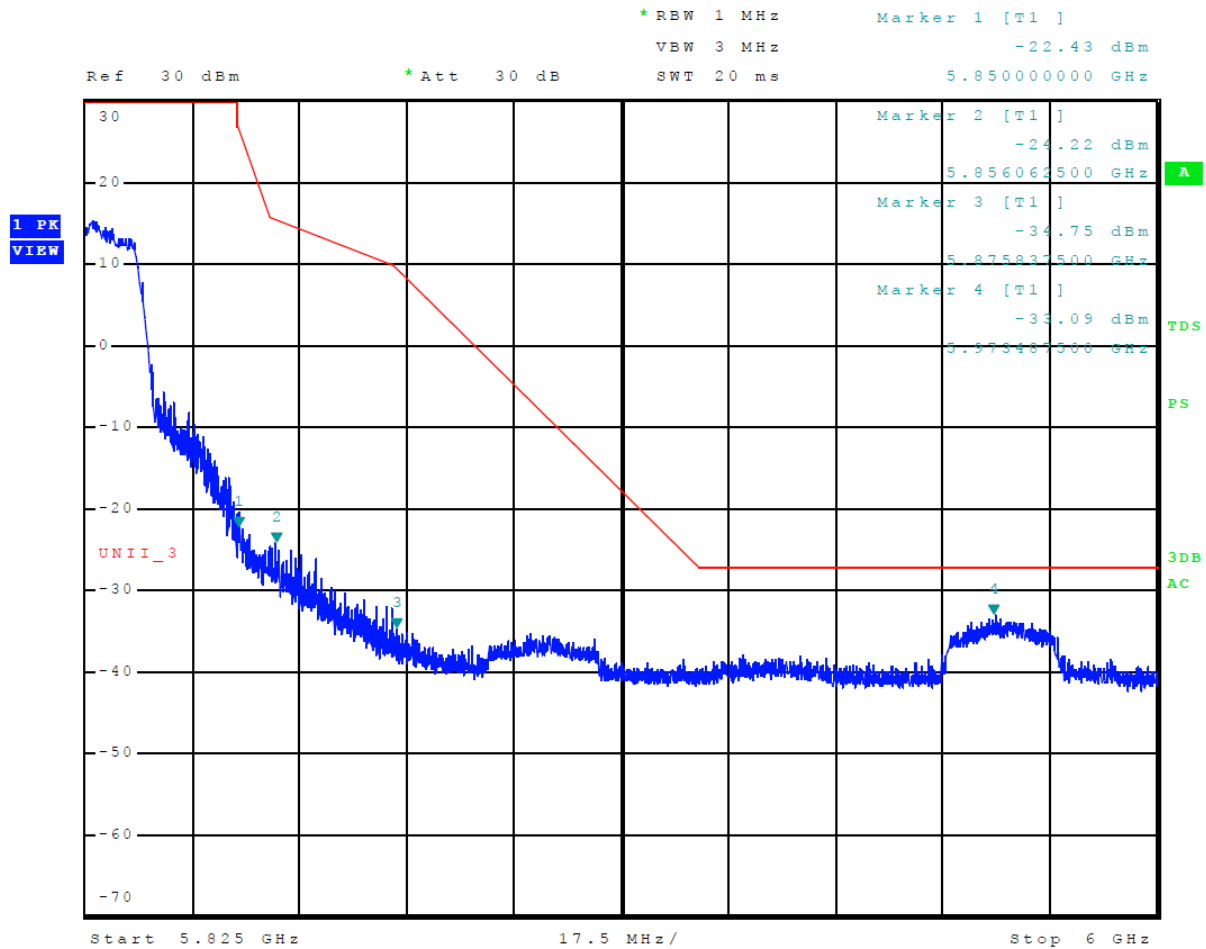


Figure 32 Plot of Upper Band Edge Across 5725-5850 MHz Mode 13 U-NII-3 (802.11n40)

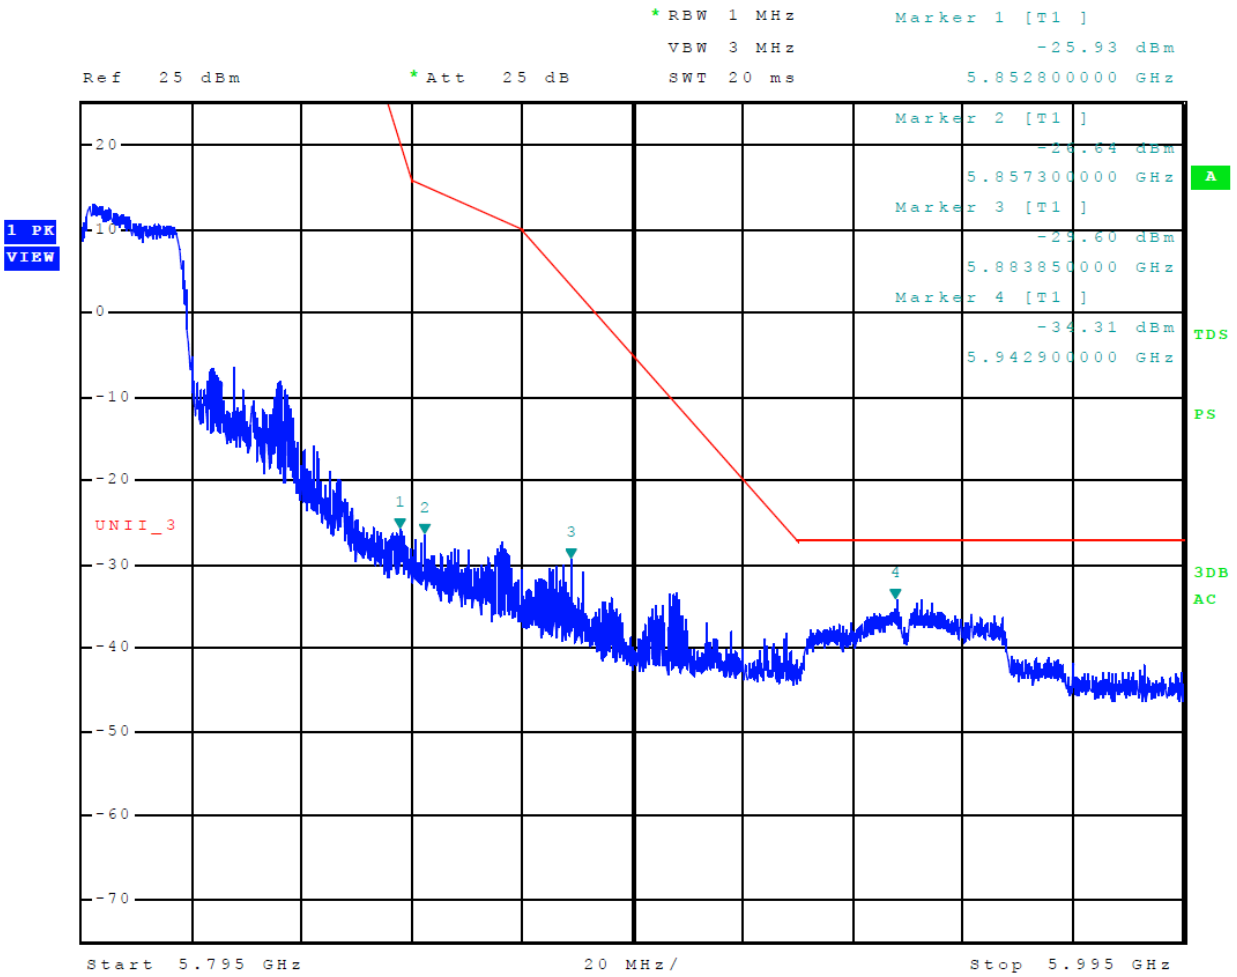


Figure 33 Plot of Upper Band Edge Across 5725-5850 MHz Mode 14 U-NII-3 (802.11ac40)

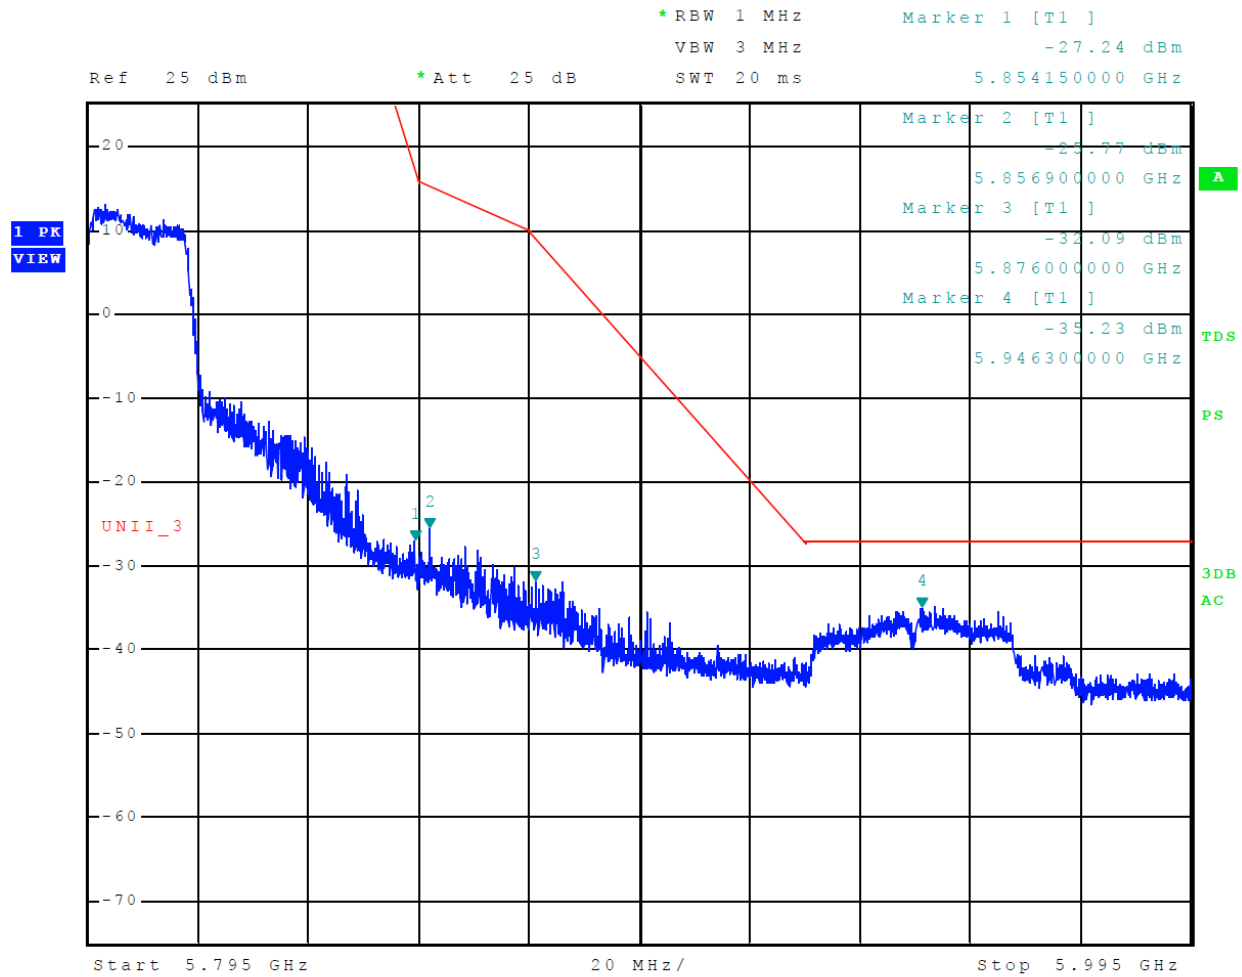


Figure 34 Plot of Upper Band Edge Across 5725-5850 MHz Mode 15 U-NII-3 (802.11ac80)

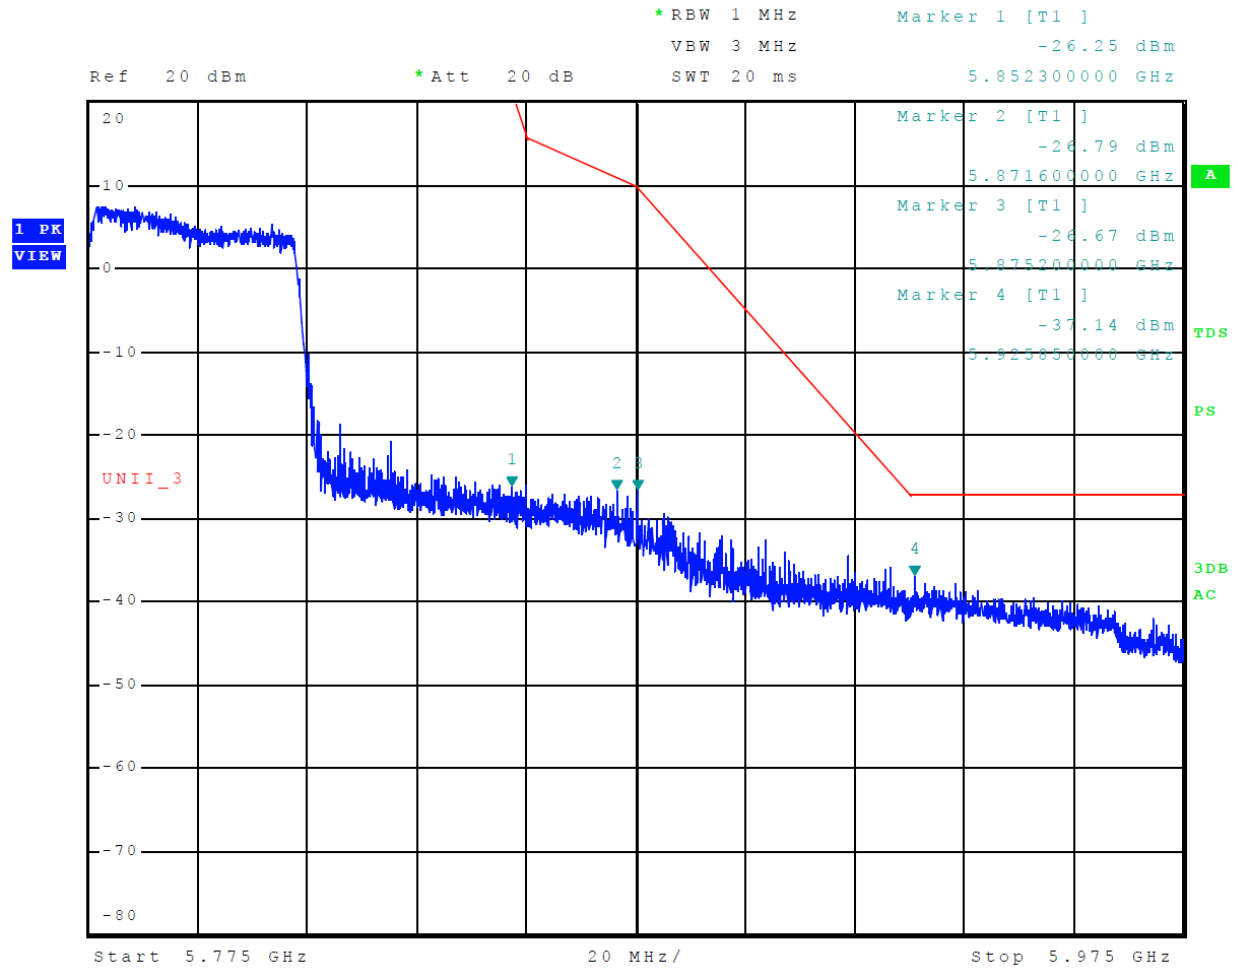


Figure 35 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 6 U-NII-1 (802.11a)

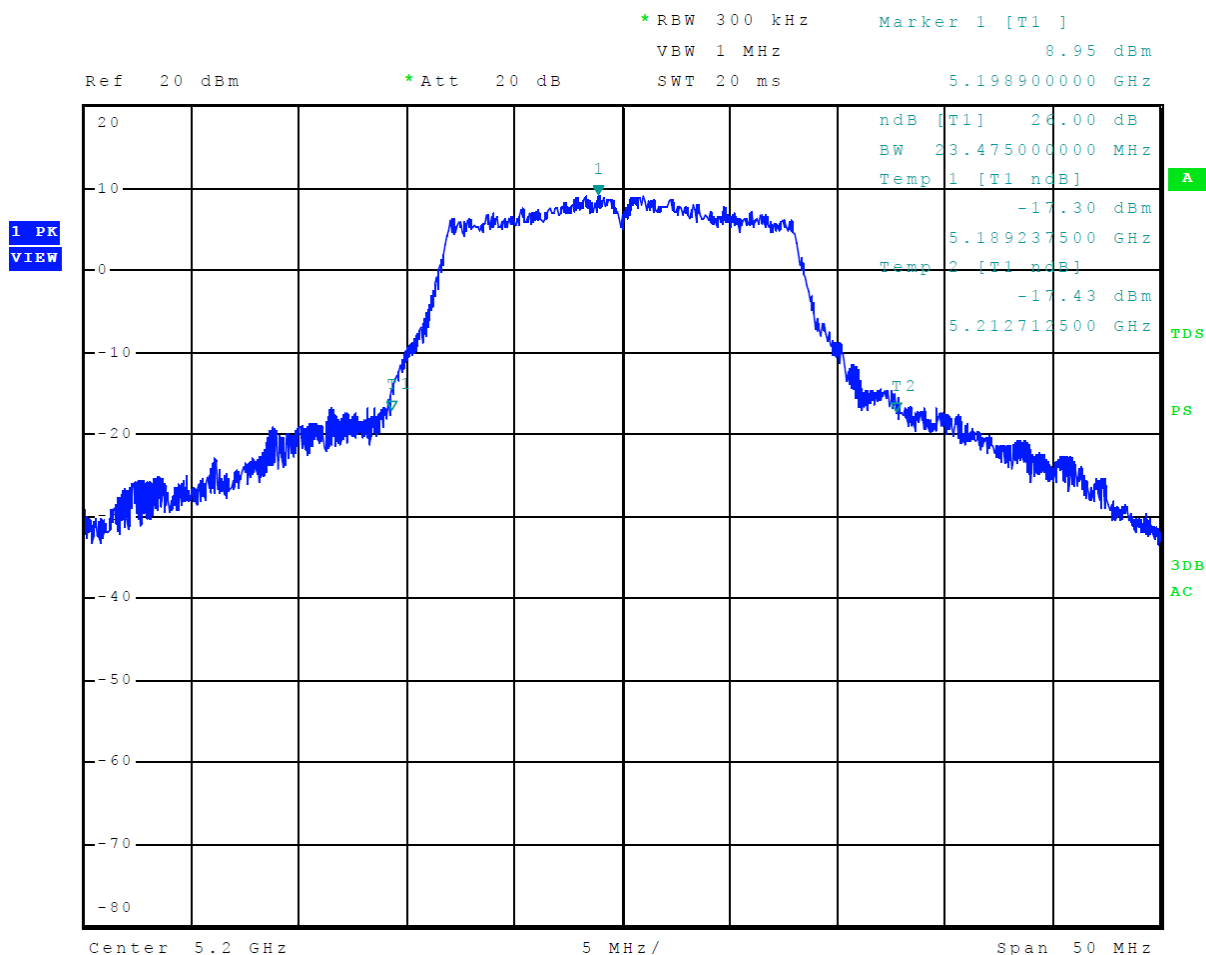


Figure 36 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 7 U-NII-1 (802.11n)

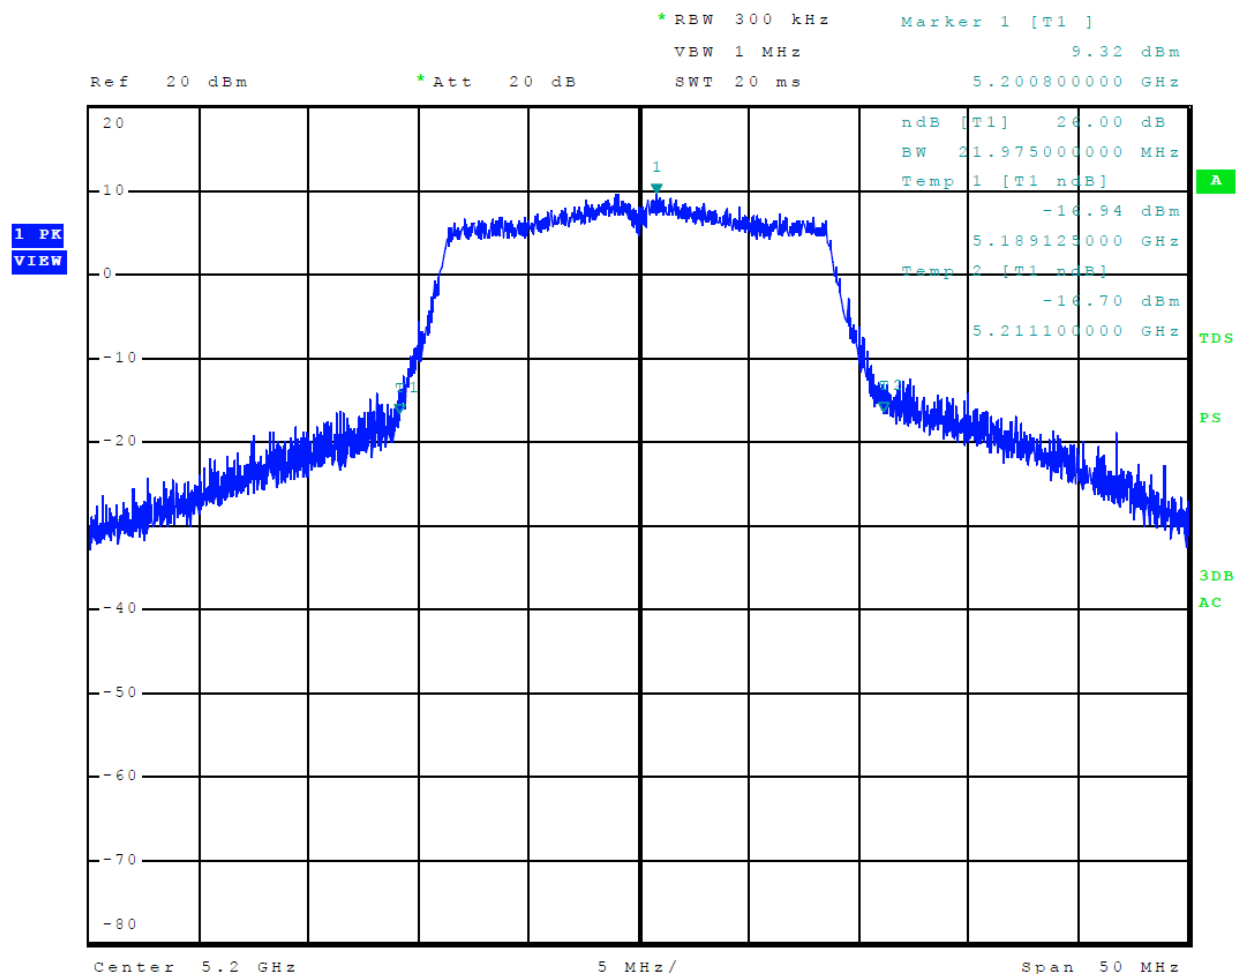


Figure 37 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 8 U-NII-1 (802.11n40)

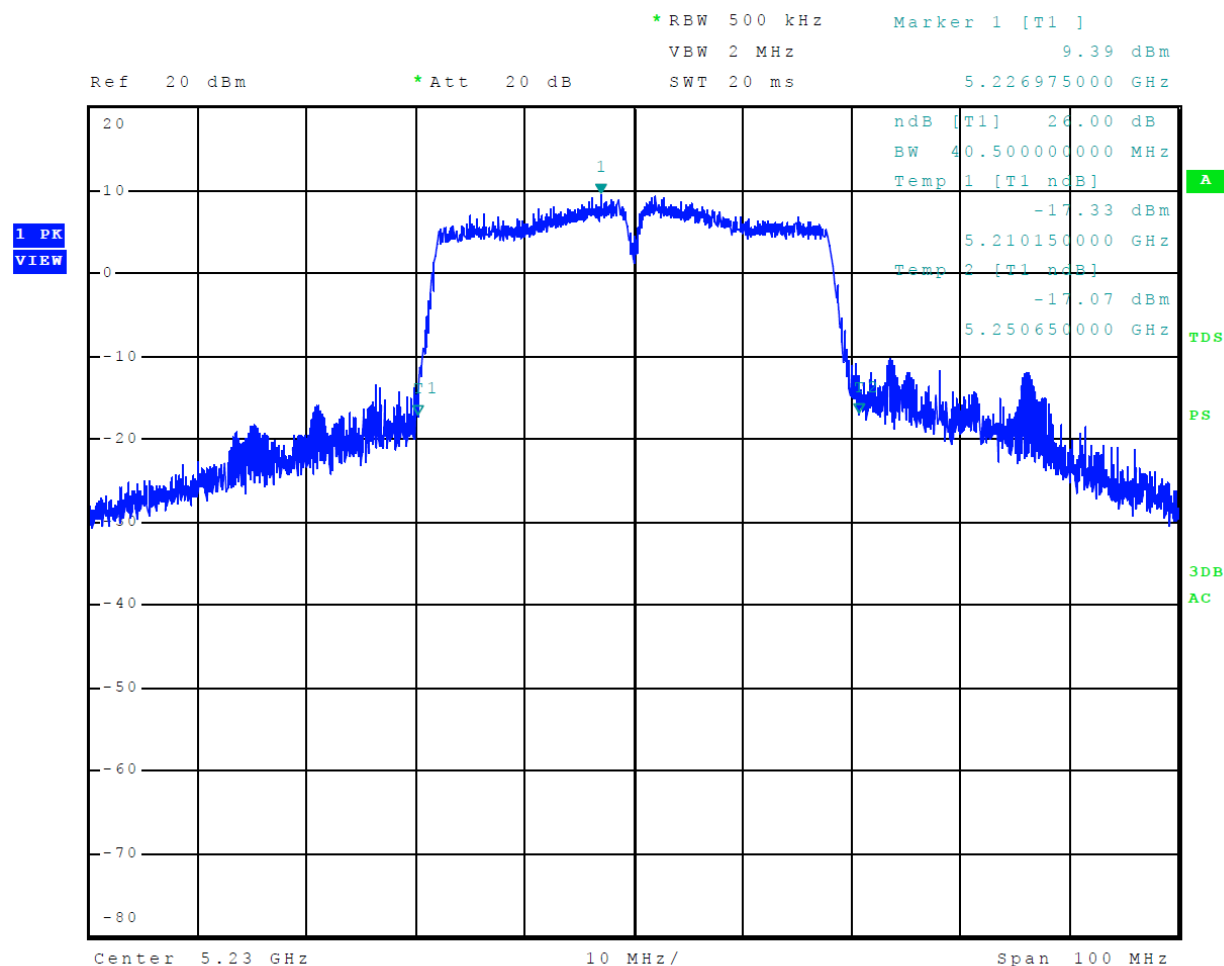


Figure 38 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 9 U-NII-1 (802.11ac40)

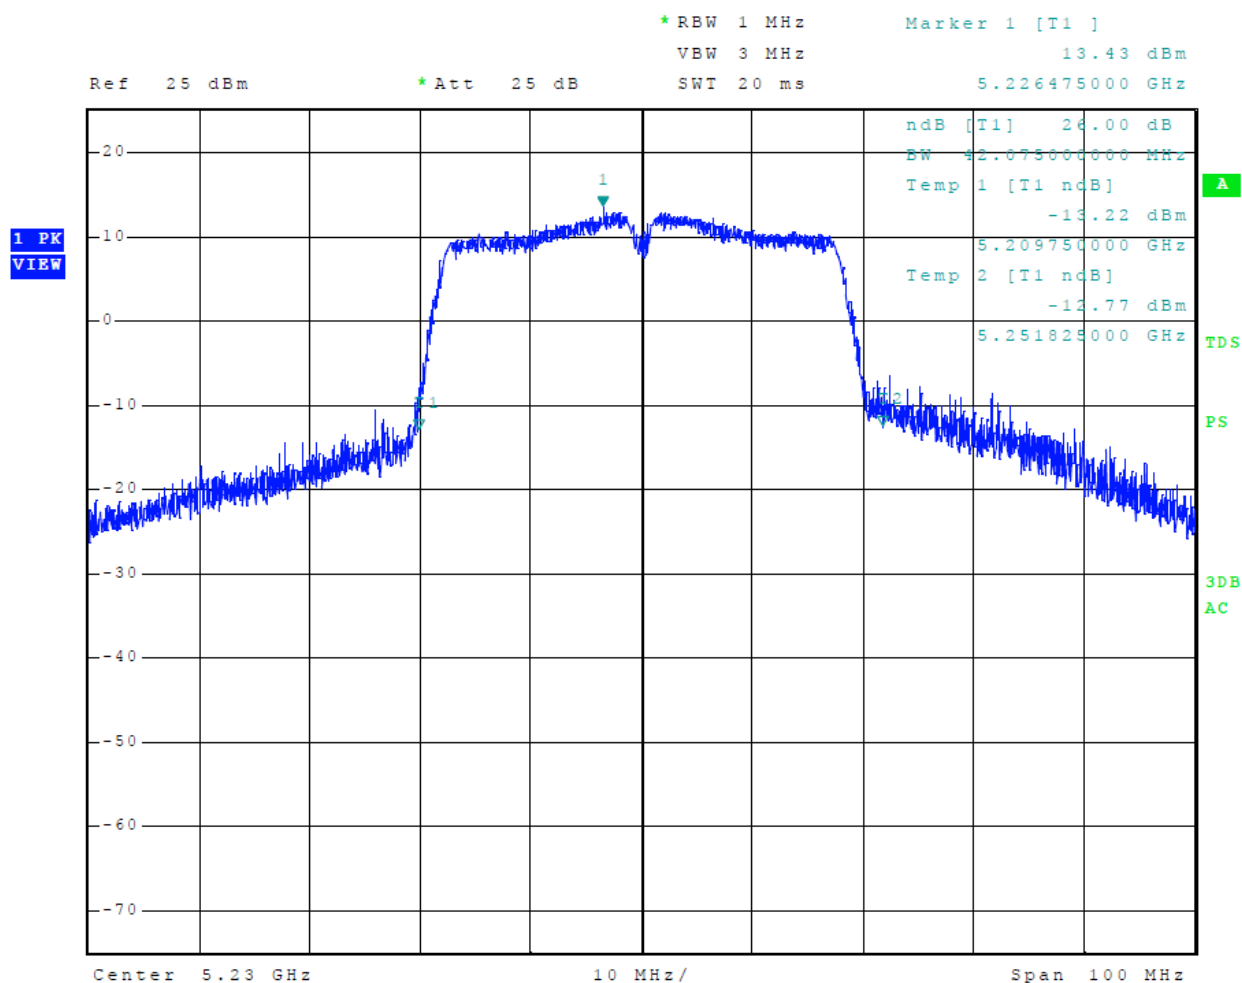


Figure 39 Plot of 26-dB Occupied Bandwidth 5150-5250 MHz Mode 10 U-NII-1 (802.11ac80)

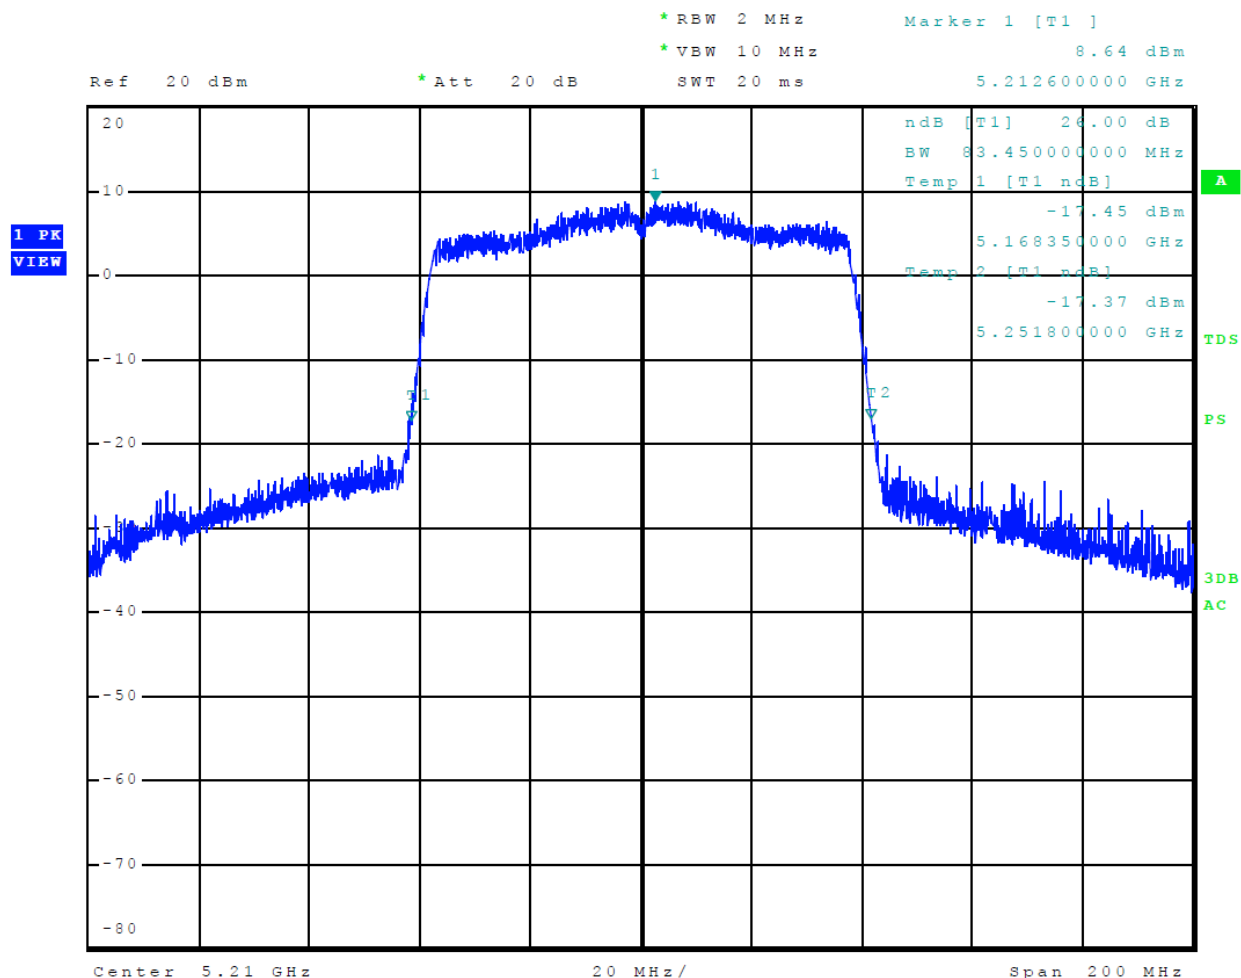


Figure 40 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 11 U-NII-3 (802.11a)

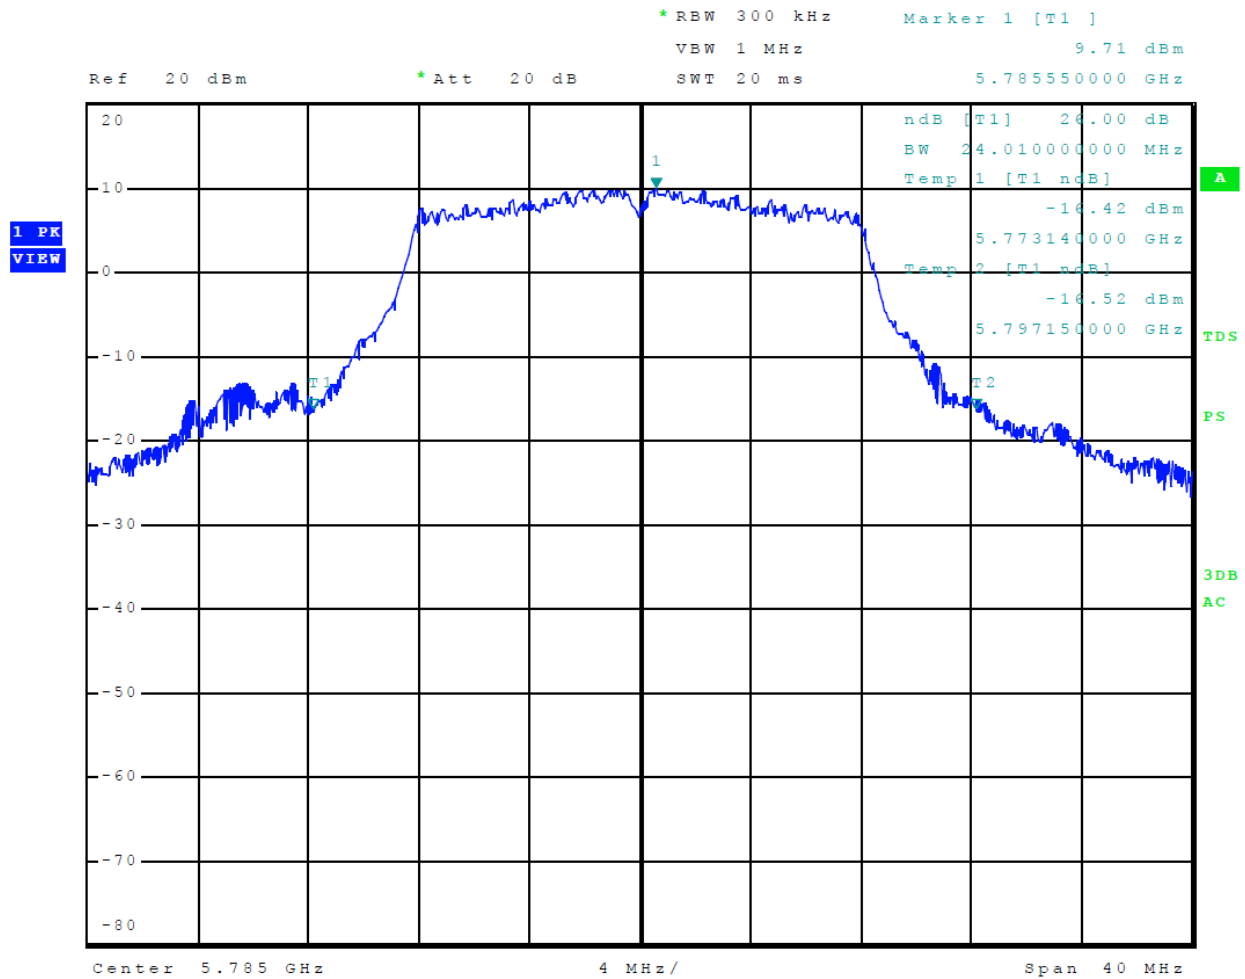
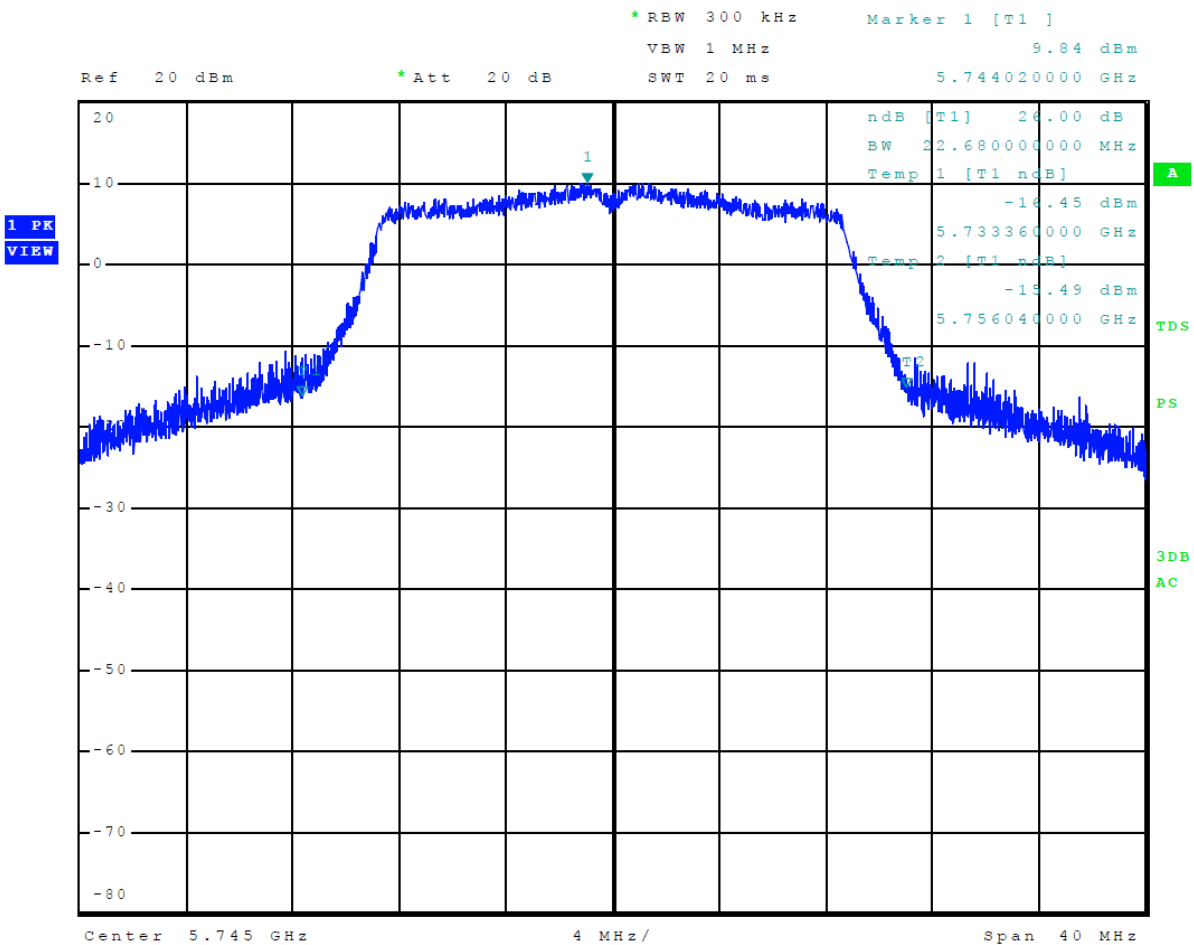


Figure 41 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 12 U-NII-3 (802.11n)



**Figure 42 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 13 U-NII-3
(802.11n40)**

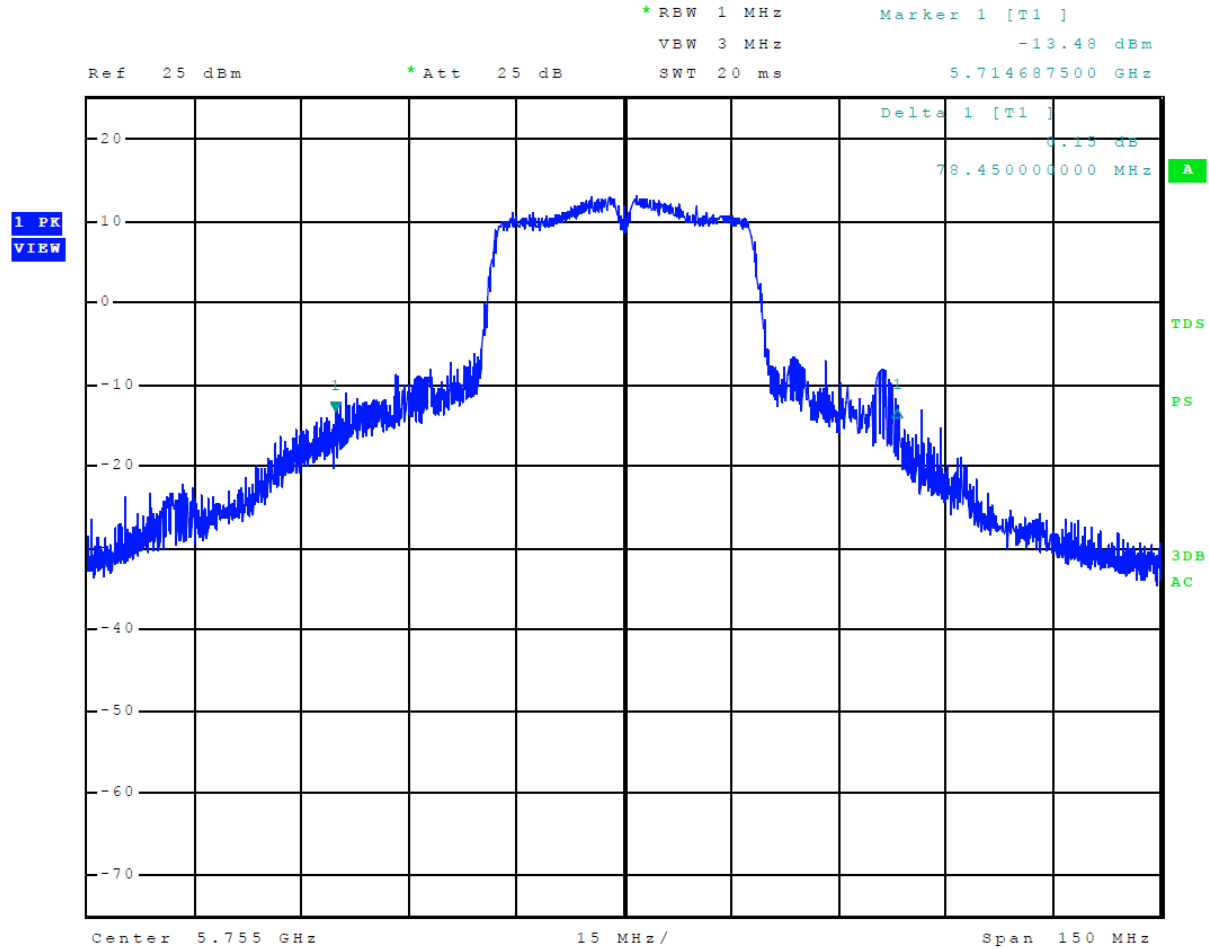
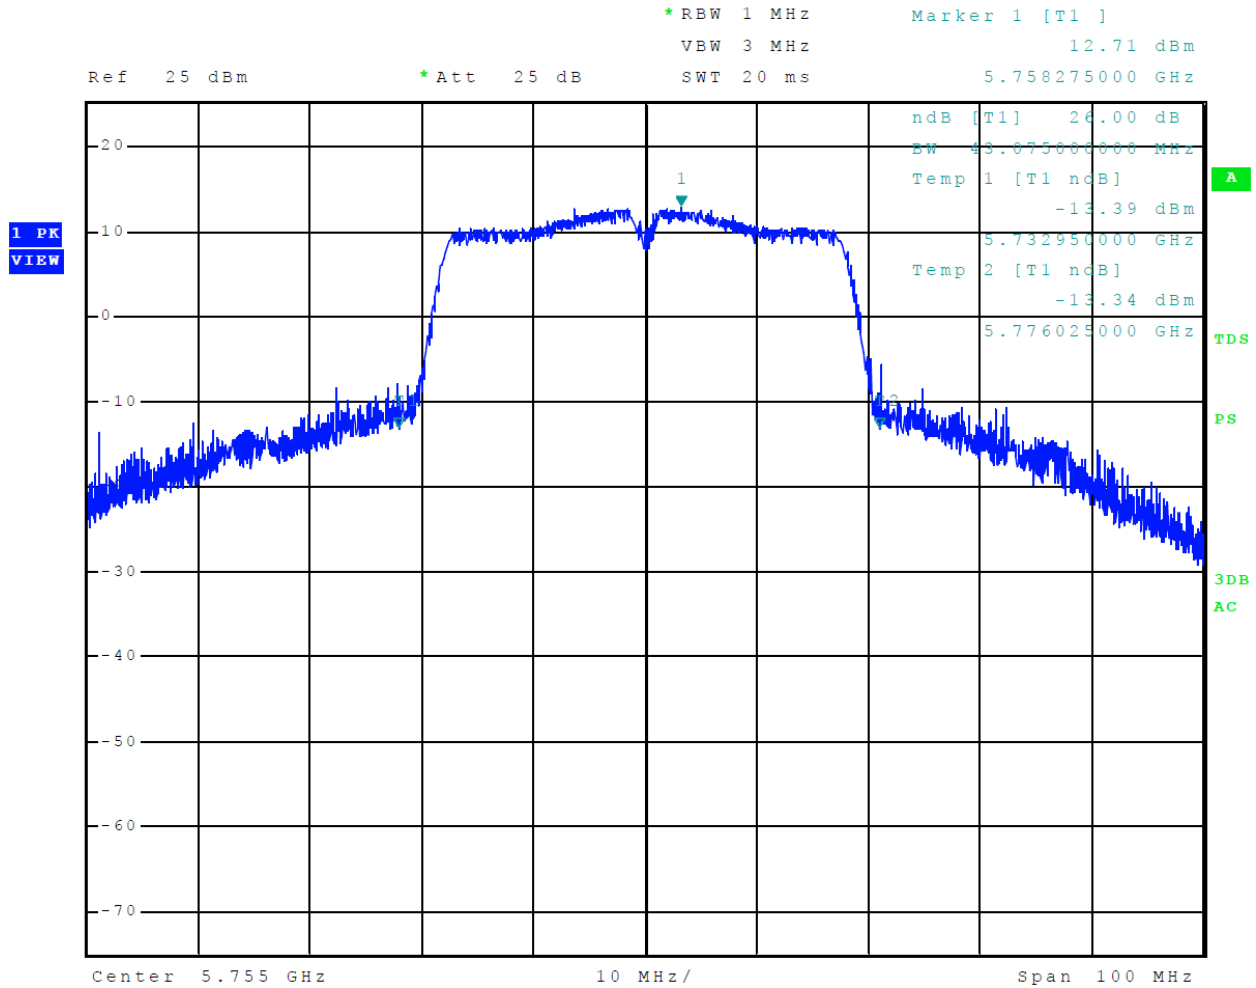


Figure 43 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 14 U-NII-3 (802.11ac40)



**Figure 44 Plot of 26-dB Occupied Bandwidth 5725-5850 MHz Mode 15 U-NII-3
(802.11ac80)**

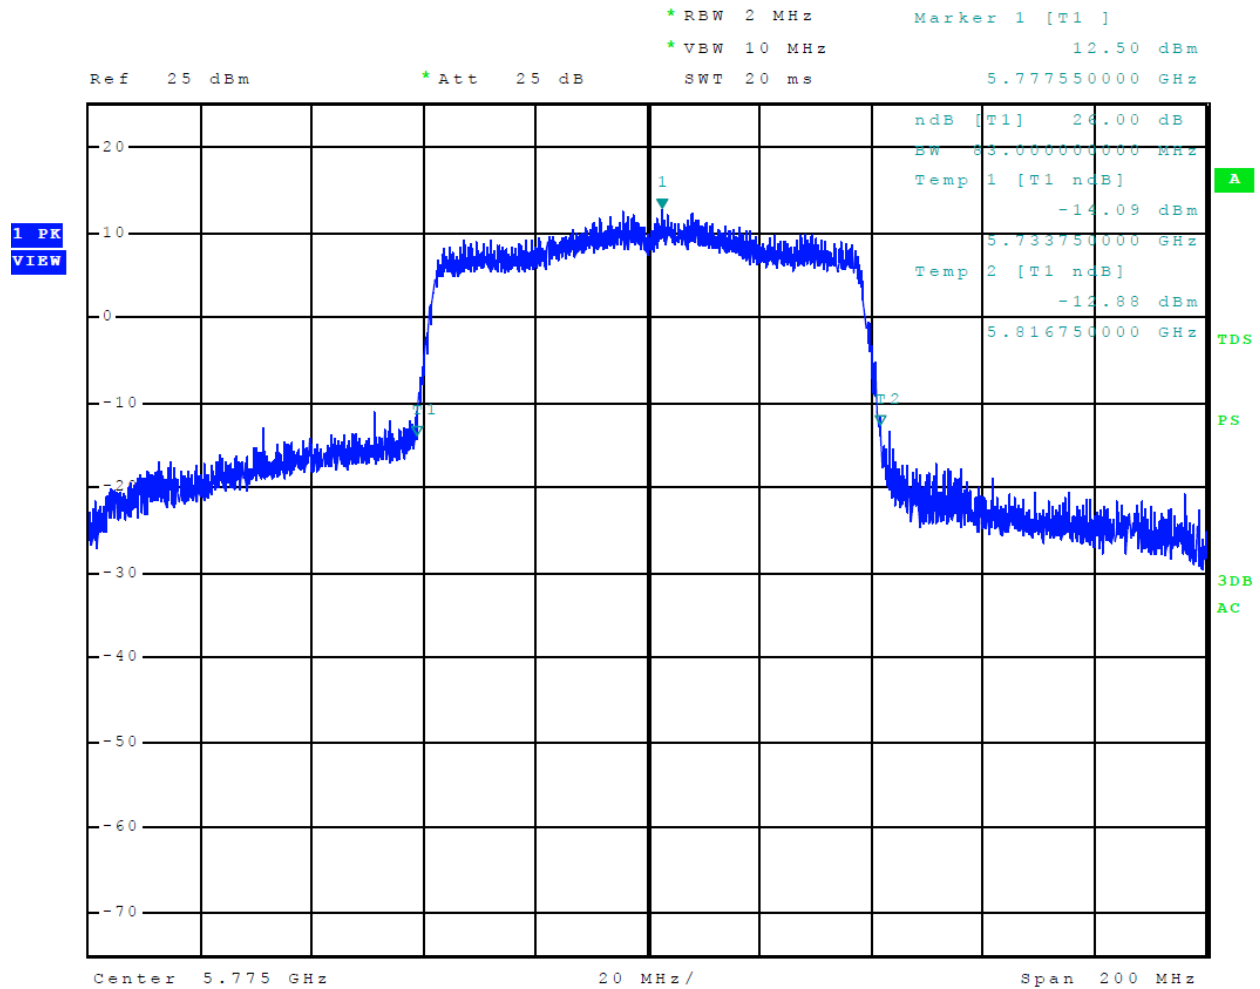


Figure 45 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 6 U-NII-1 (802.11a)

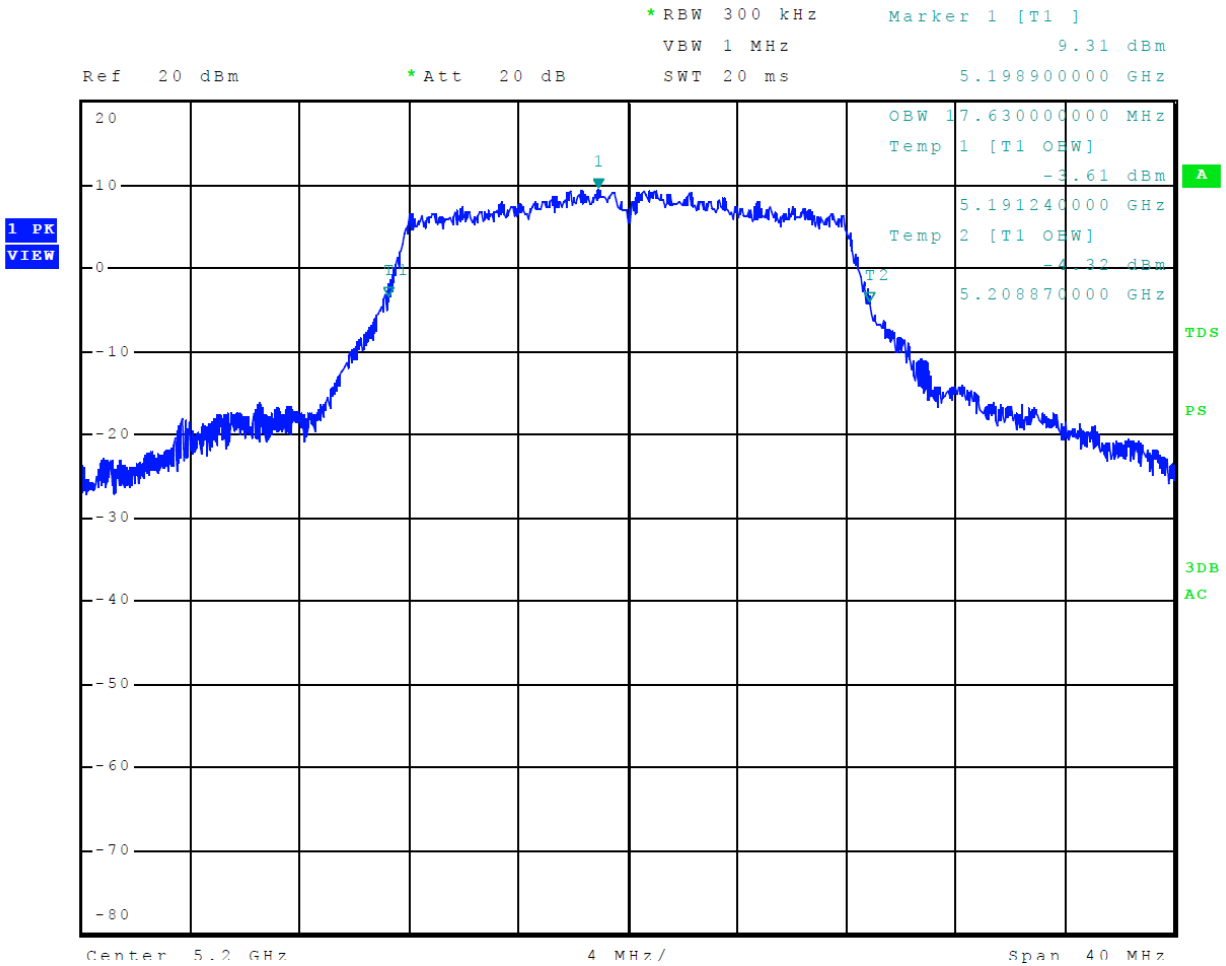


Figure 46 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 7 U-NII-1 (802.11n)

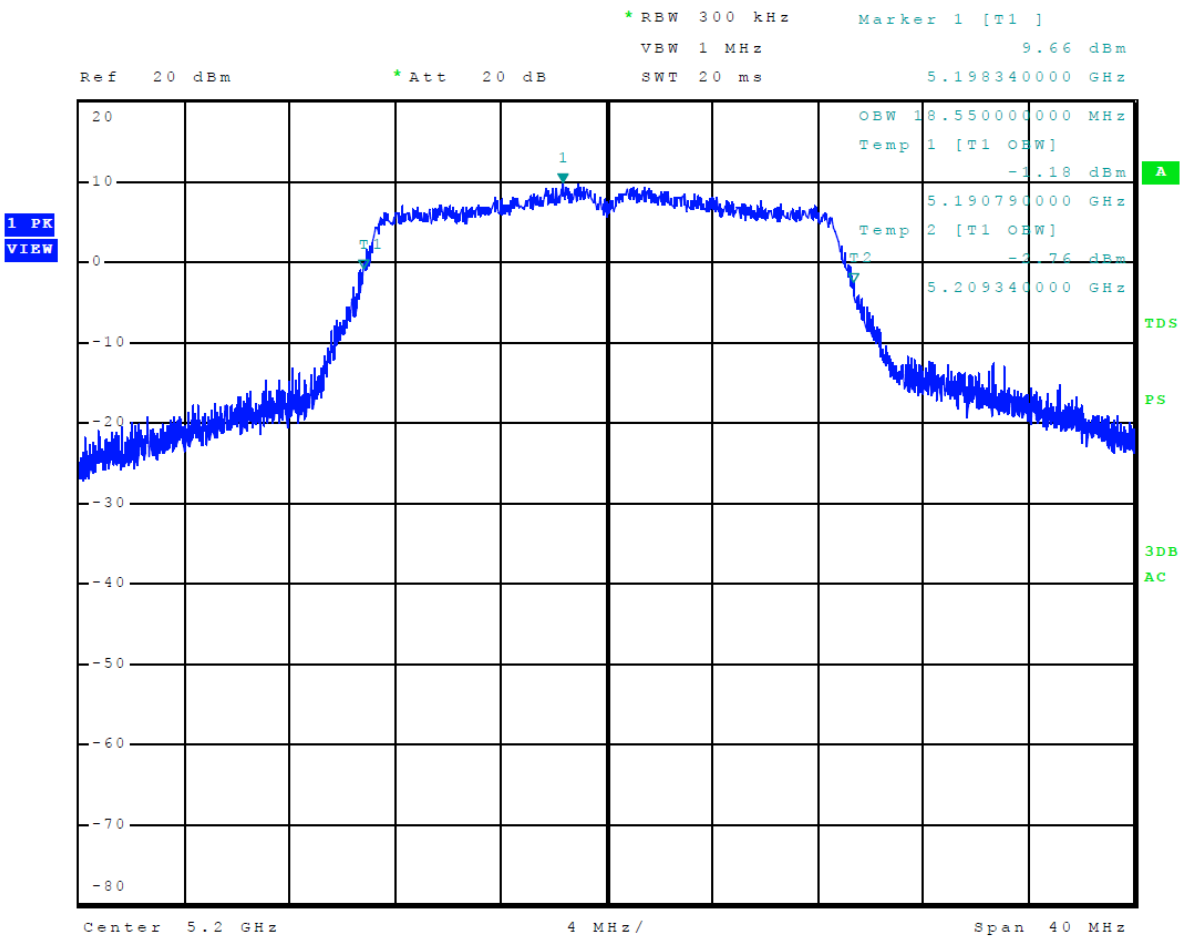


Figure 47 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 8 U-NII-1 (802.11n40)

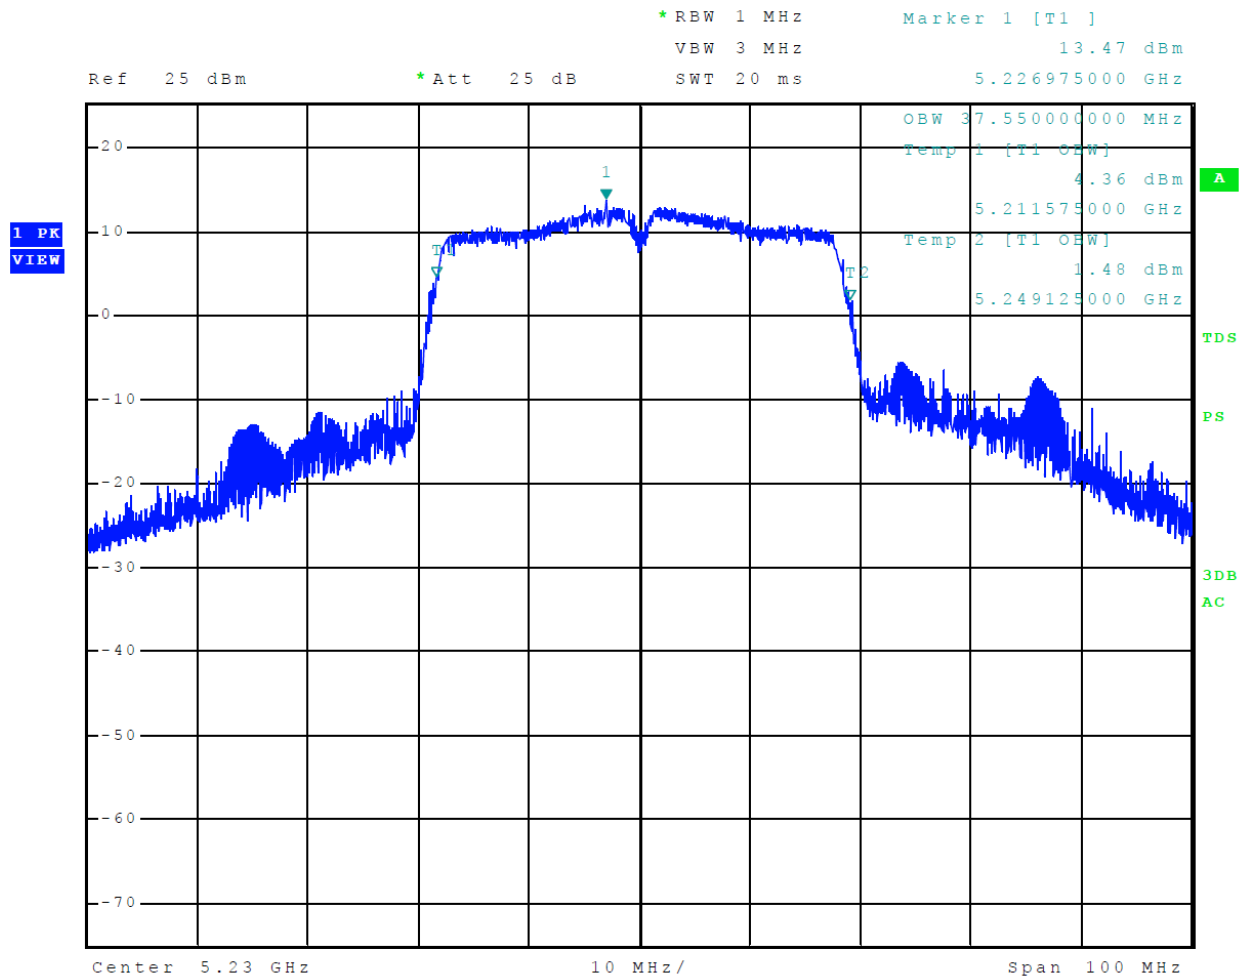


Figure 48 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 9 U-NII-1 (802.11ac40)

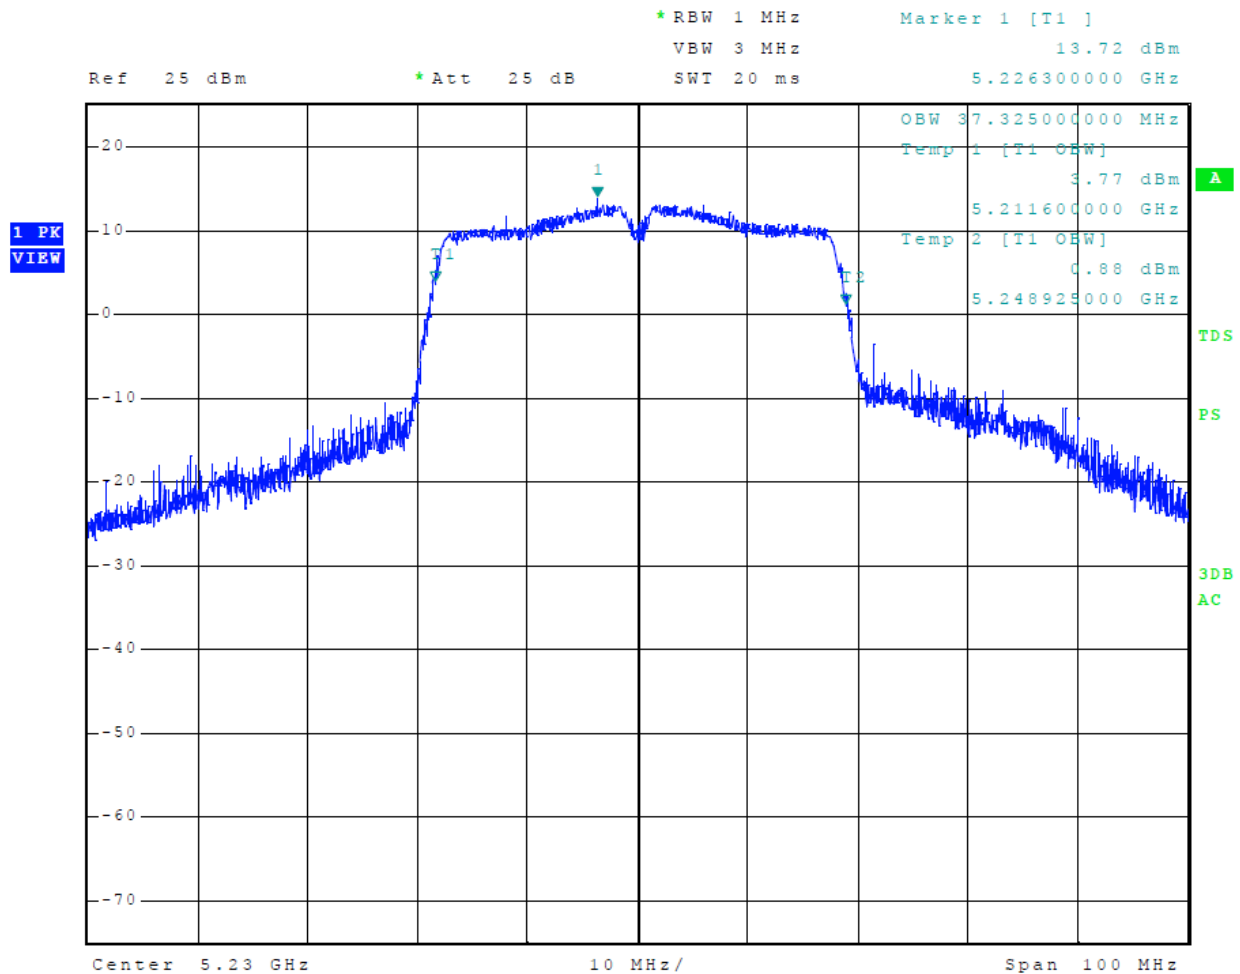


Figure 49 Plot of 99% Occupied Bandwidth 5150-5250 MHz Mode 10 U-NII-1 (802.11ac80)

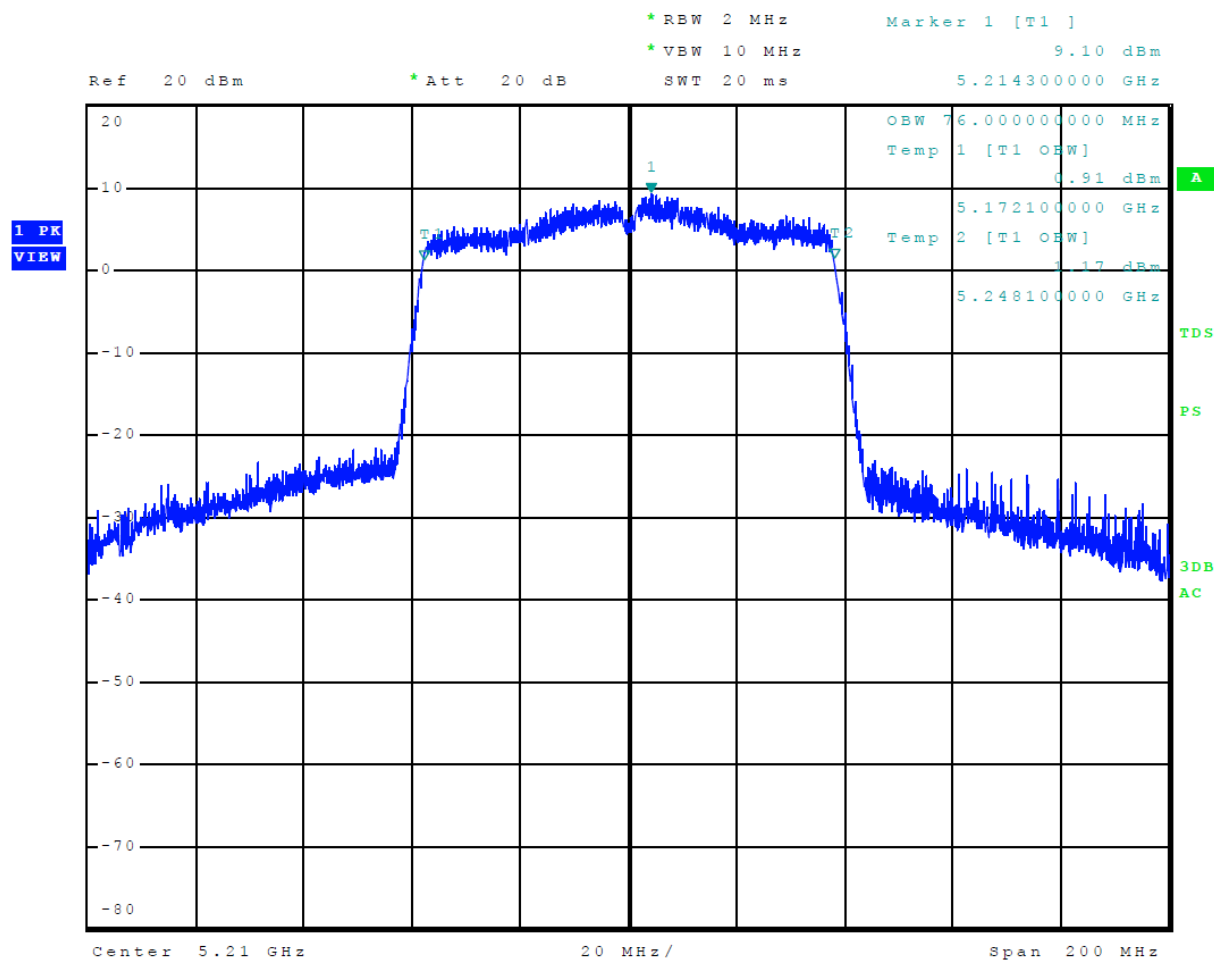


Figure 50 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 11 U-NII-3 (802.11a)

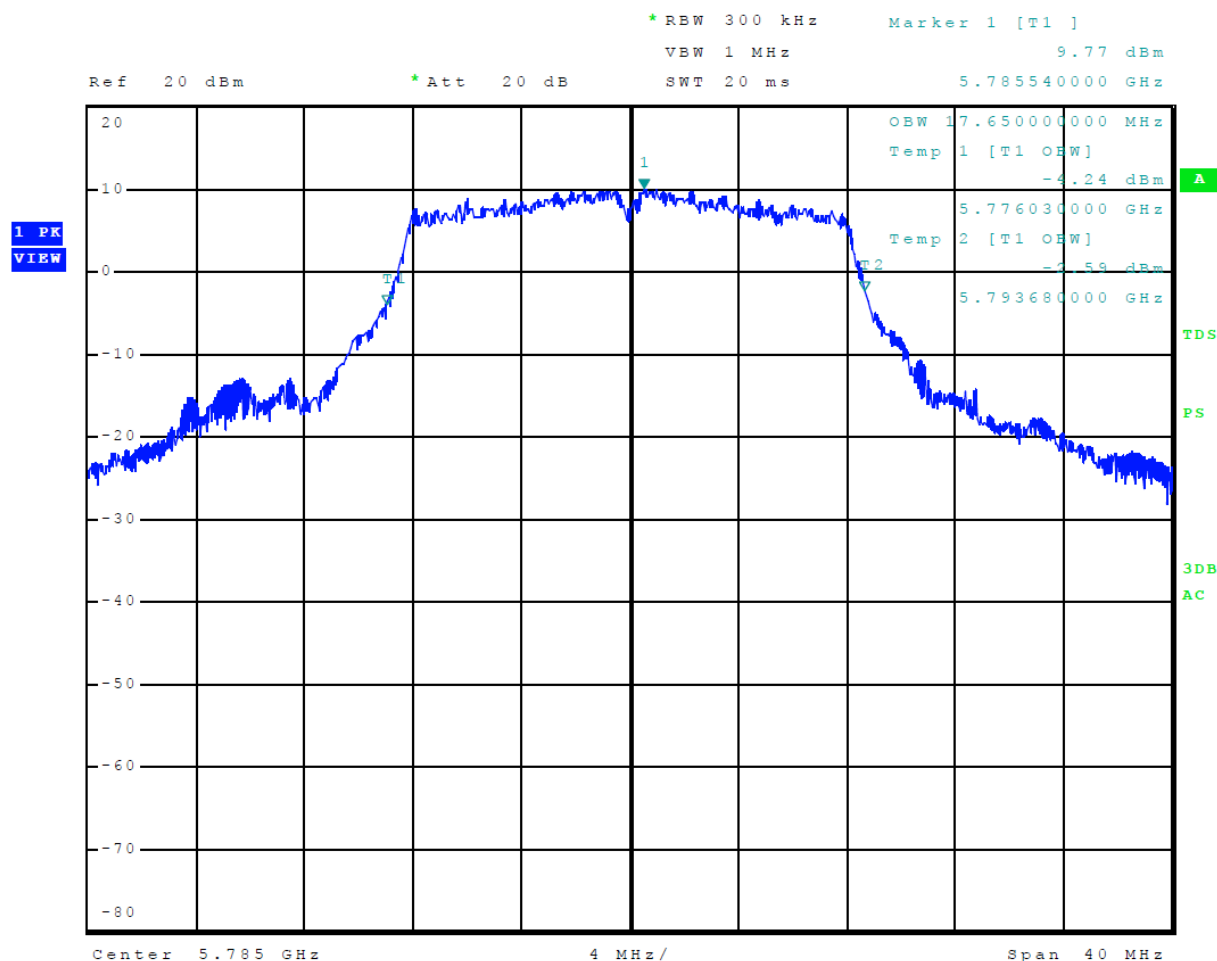


Figure 51 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 12 U-NII-3 (802.11n)

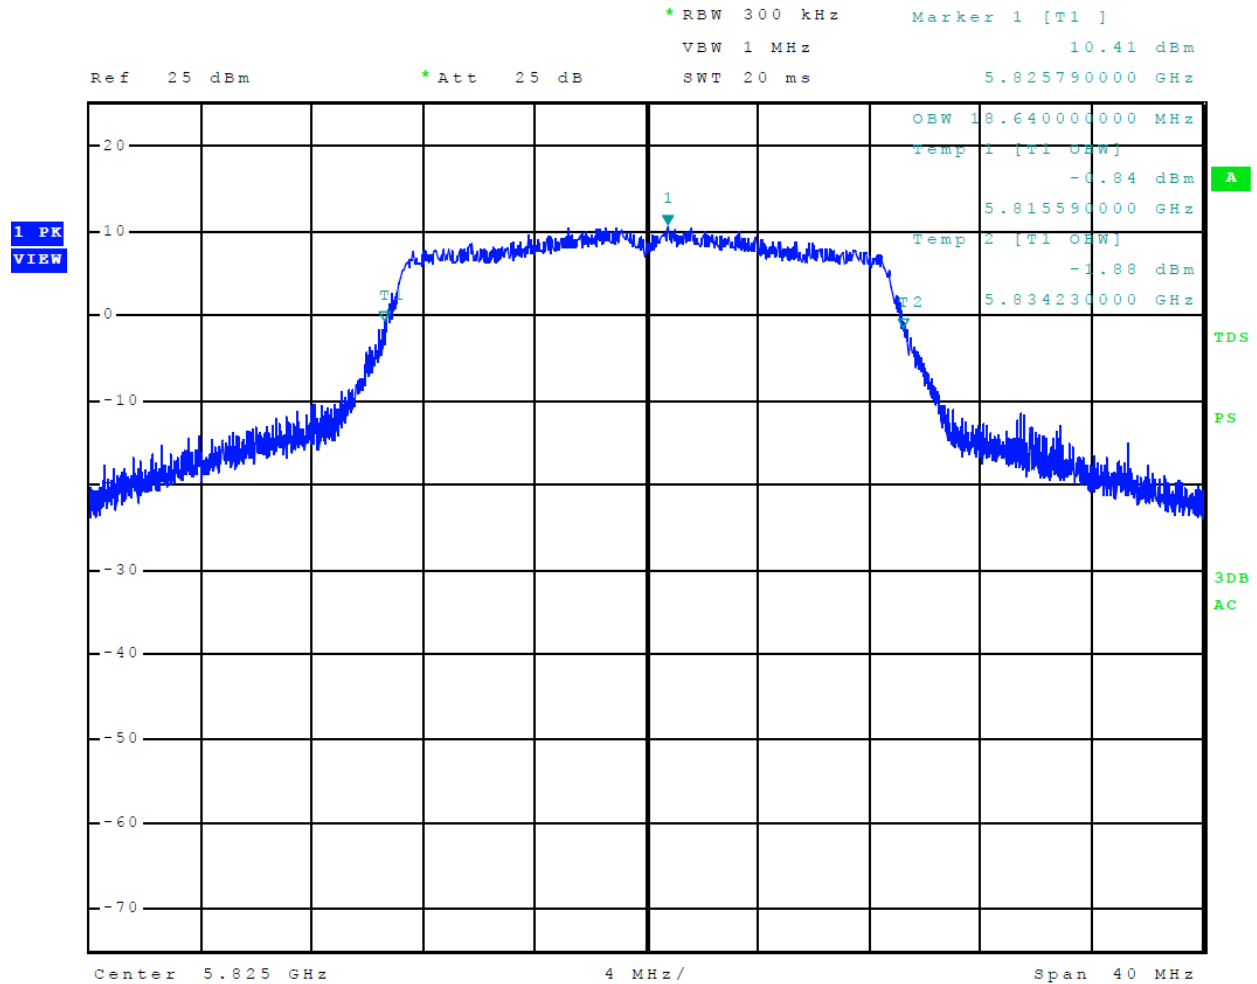


Figure 52 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 13 U-NII-3 (802.11n40)

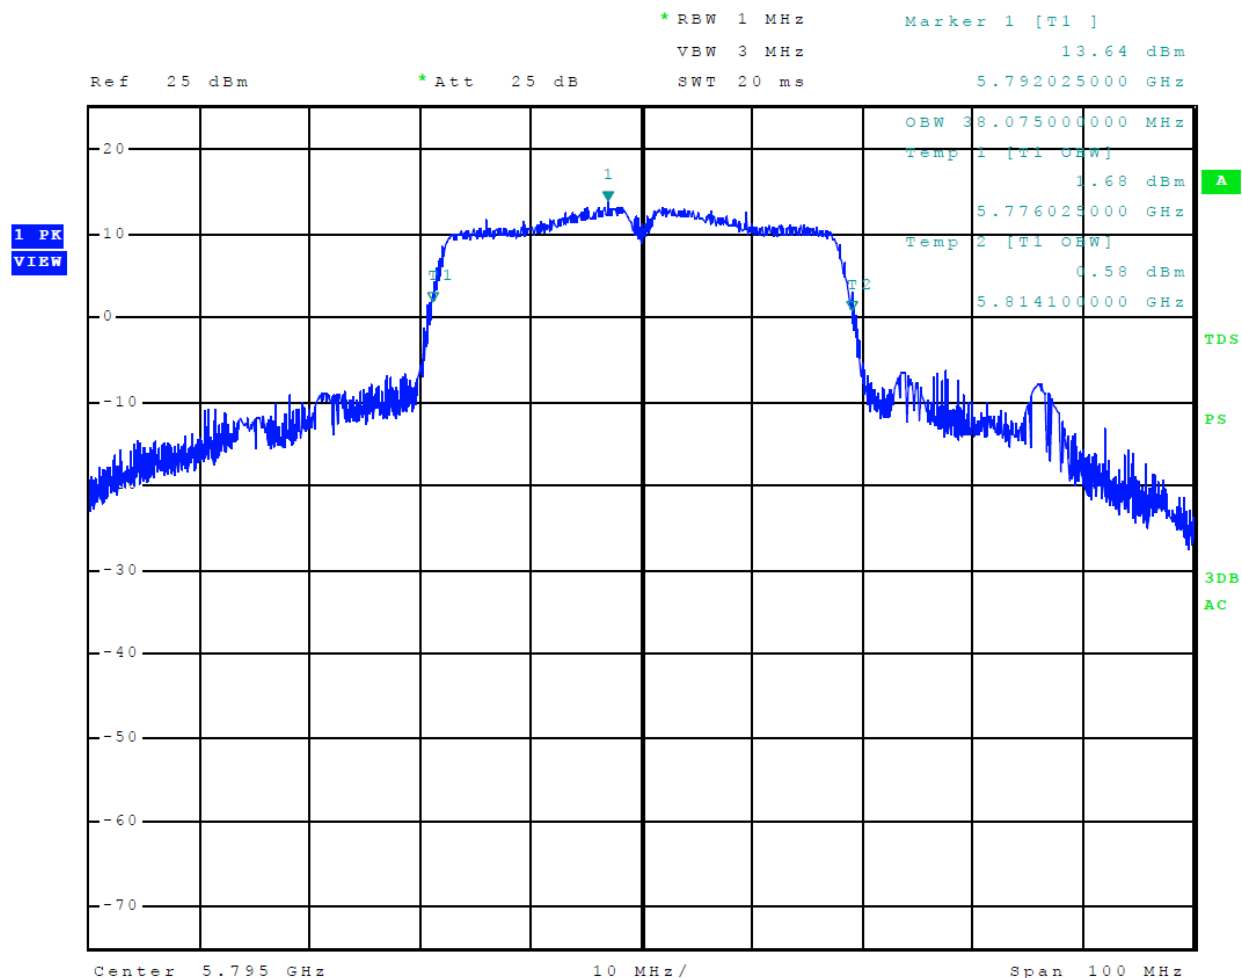


Figure 53 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 14 U-NII-3 (802.11ac40)

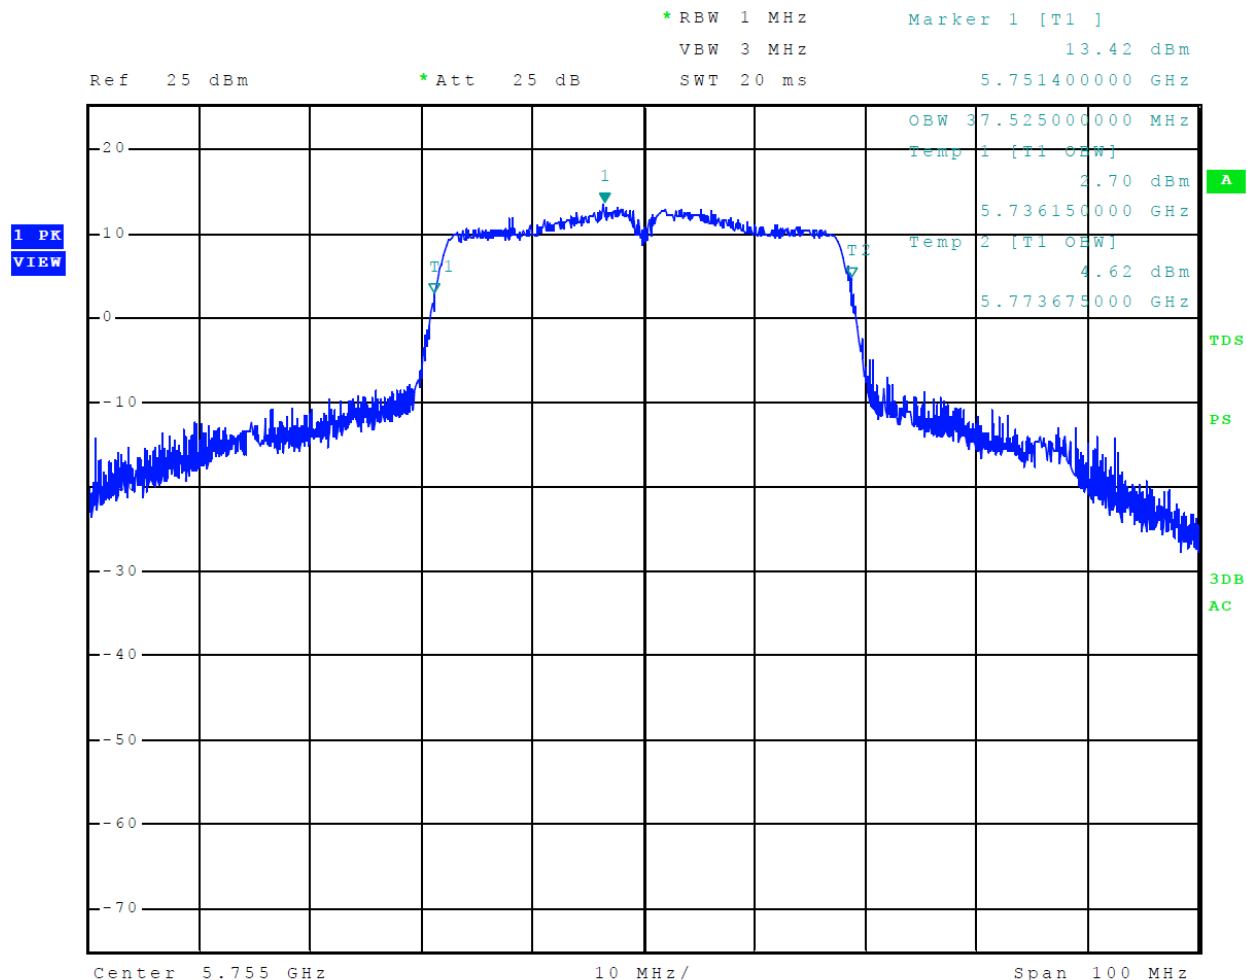


Figure 54 Plot of 99% Occupied Bandwidth 5725-5850 MHz Mode 15 U-NII-3 (802.11ac80)

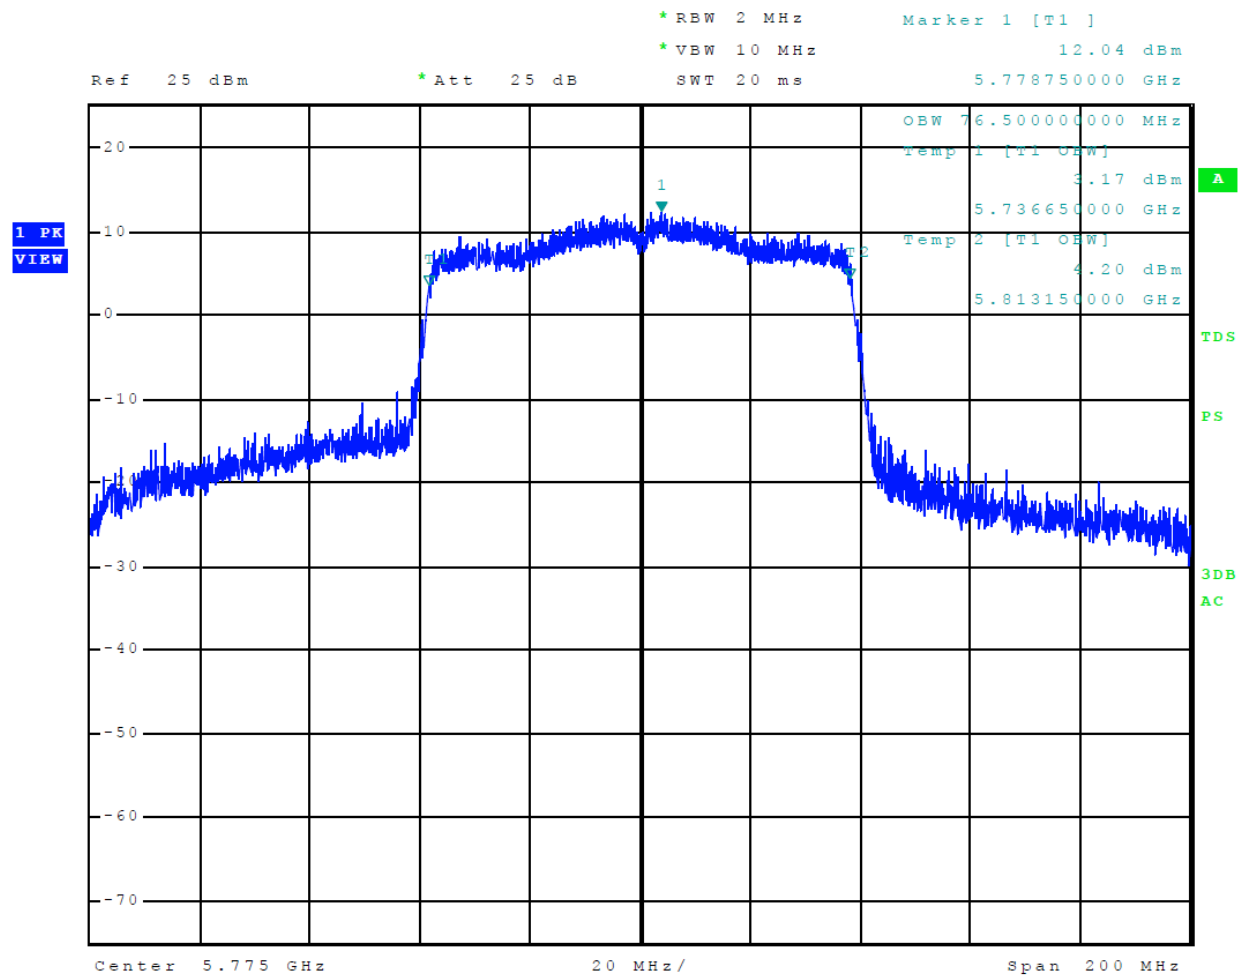


Figure 55 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 11 U-NII-3 (802.11a)

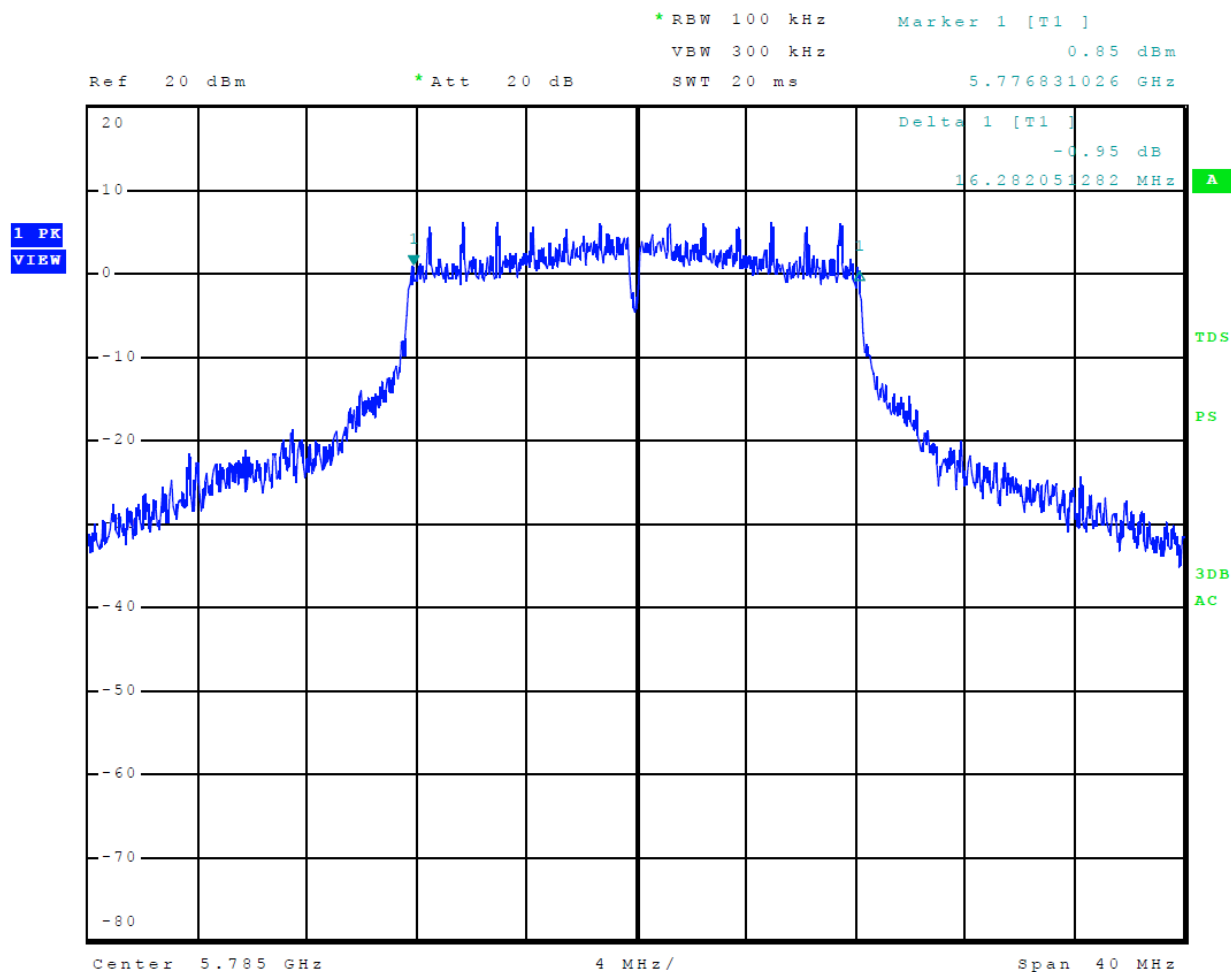


Figure 56 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 12 U-NII-3 (802.11n)

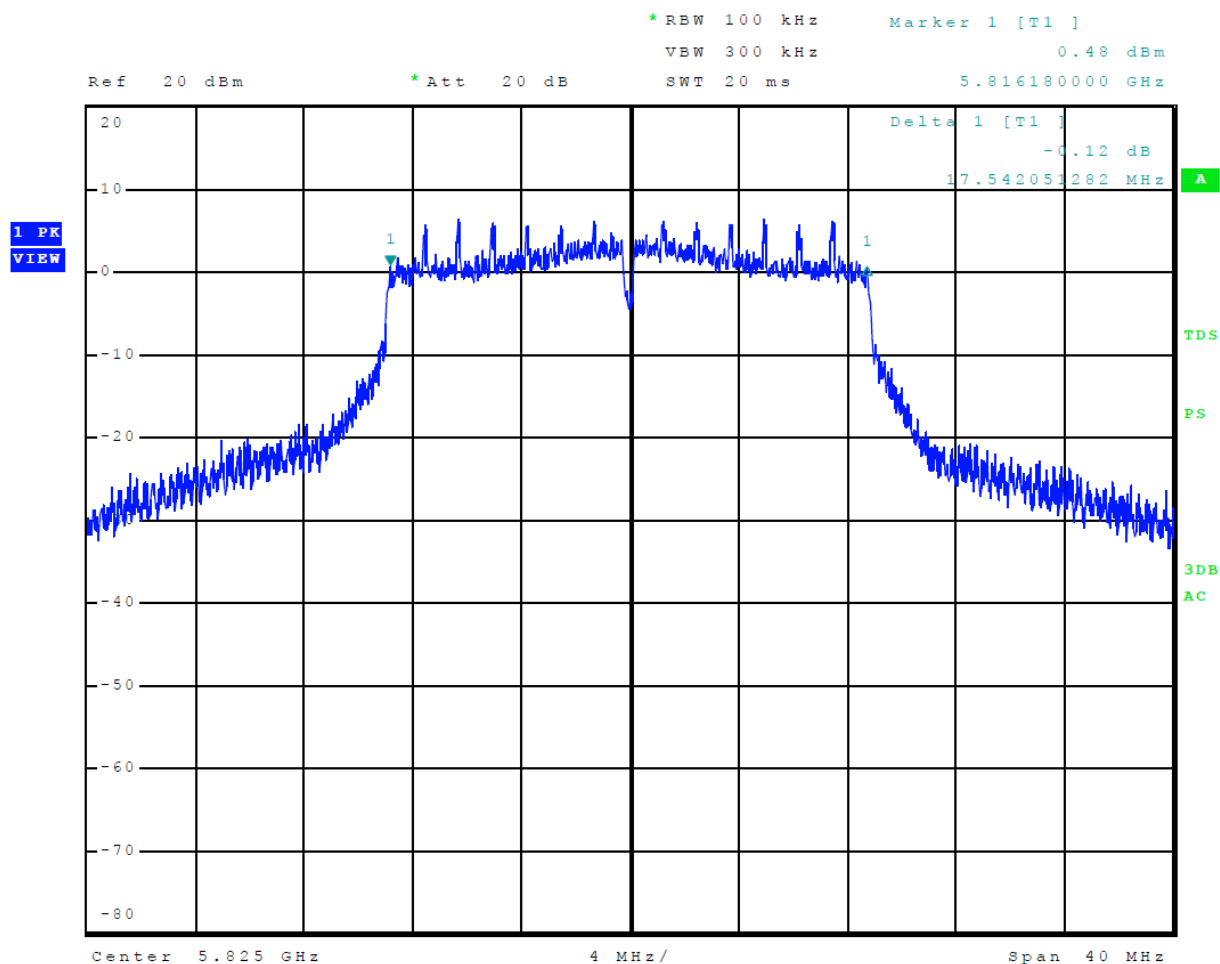


Figure 57 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 13 U-NII-3 (802.11n40)

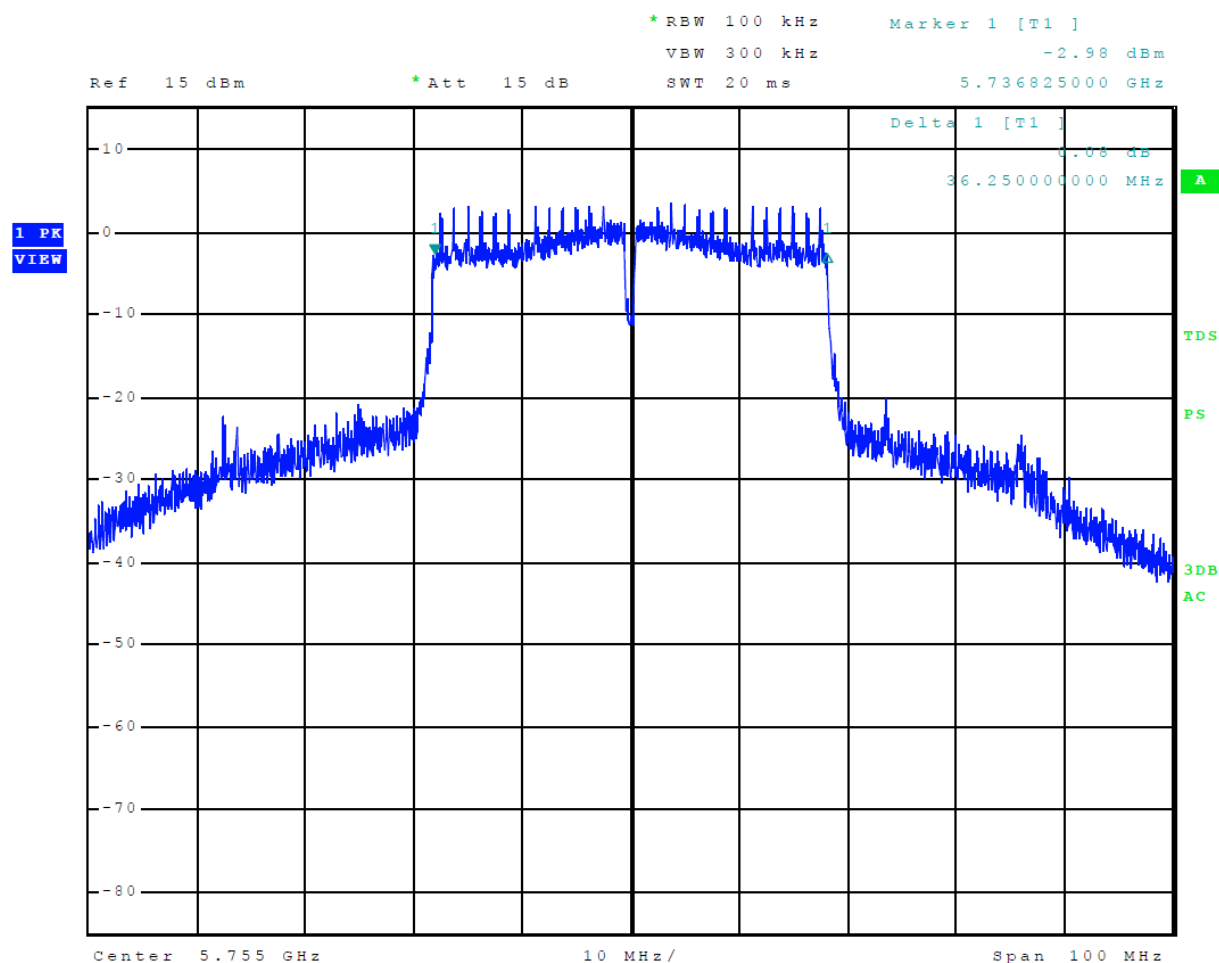


Figure 58 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 14 U-NII-3 (802.11ac40)


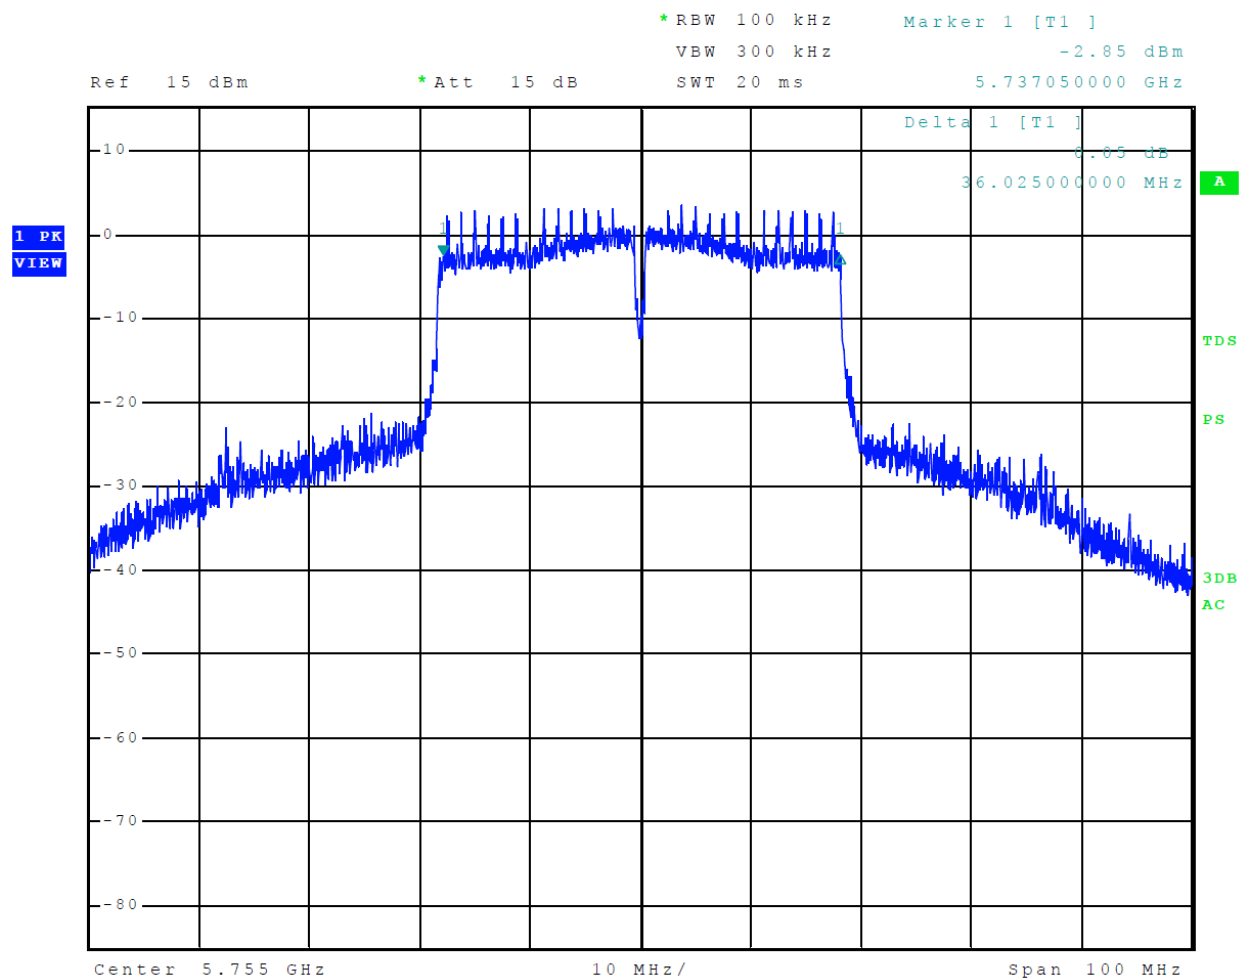


Figure 59 Plot of 6-dB Occupied Bandwidth 5725-5850 MHz Mode 15 U-NII-3 (802.11ac80)

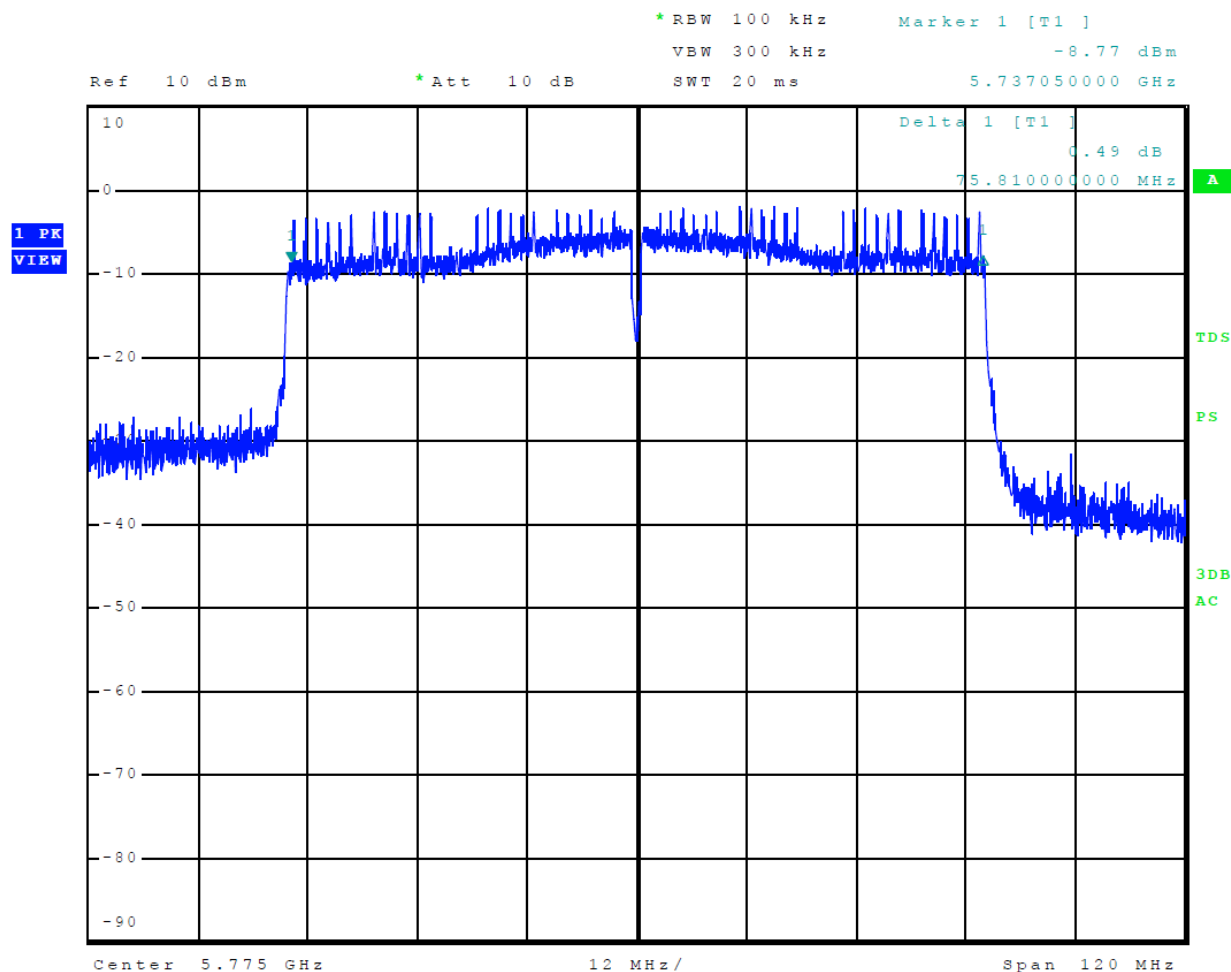

Transmitter Emissions Data

Table 15 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 6 U-NII-1 (802.11a)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5180.0	--	--	--	--	--	--	--
10360.0	58.1	44.3	58.2	44.3	68.3	-24.0	-24.0
15540.0	63.0	49.4	62.8	49.4	68.3	-18.9	-18.9
20720.0	66.4	52.5	66.1	52.5	68.3	-15.8	-15.8
25900.0	66.8	53.2	66.8	53.2	68.3	-15.1	-15.1
5200.0	--	--	--	--	--	--	--
10400.0	58.4	44.1	58.0	44.1	68.3	-24.2	-24.2
15600.0	62.7	49.1	62.4	49.2	68.3	-19.2	-19.1
20800.0	66.1	52.8	66.5	52.8	68.3	-15.5	-15.5
26000.0	67.6	54.1	67.6	54.0	68.3	-14.2	-14.3
5240.0	--	--	--	--	--	--	--
10480.0	57.3	44.0	57.9	44.0	68.3	-24.3	-24.3
15720.0	61.7	48.4	61.8	48.4	68.3	-19.9	-19.9
20960.0	66.7	53.2	66.7	53.2	68.3	-15.1	-15.1
26200.0	67.3	53.5	67.1	53.5	68.3	-14.8	-14.8
Band Edges							
5150.0	65.1	50.1	62.6	48.1	54.0	-3.9	-5.9
5350.0	60.7	47.4	61.1	48.1	54.0	-6.6	-5.9

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 16 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 7 U-NII-1 (802.11n)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5180.0	--	--	--	--	--	--	--
10360.0	57.8	44.4	57.9	44.3	68.3	-23.9	-24.0
15540.0	63.2	49.5	63.1	49.4	68.3	-18.8	-18.9
20720.0	66.2	52.5	66.6	52.6	68.3	-15.8	-15.7
25900.0	66.9	53.2	67.2	53.2	68.3	-15.1	-15.1
5200.0	--	--	--	--	--	--	--
10400.0	57.8	44.1	58.5	44.1	68.3	-24.2	-24.2
15600.0	62.8	49.1	62.7	49.1	68.3	-19.2	-19.2
20800.0	66.7	52.8	66.5	52.8	68.3	-15.5	-15.5
26000.0	67.8	54.0	67.5	54.1	68.3	-14.3	-14.2
5240.0	--	--	--	--	--	--	--
10480.0	57.4	44.0	58.0	44.0	68.3	-24.3	-24.3
15720.0	62.3	48.4	62.6	48.5	68.3	-19.9	-19.8
20960.0	67.1	53.2	67.0	53.3	68.3	-15.1	-15.0
26200.0	67.2	53.6	67.5	53.5	68.3	-14.7	-14.8
Band Edges							
5150.0	71.0	52.5	69.9	51.1	54.0	-1.5	-2.9
5350.0	61.1	48.0	61.9	48.0	54.0	-6.0	-6.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 17 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 8 U-NII-1 (802.11n40)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5190.0	--	--	--	--	--	--	--
10380.0	57.8	44.1	58.3	44.1	68.3	-24.2	-24.2
15570.0	62.1	48.6	62.6	49.1	68.3	-19.7	-19.2
20760.0	66.5	53.0	67.0	52.9	68.3	-15.3	-15.4
25950.0	67.3	53.1	67.0	53.0	68.3	-15.2	-15.3
5230.0	--	--	--	--	--	--	--
10460.0	58.0	44.1	57.8	44.0	68.3	-24.2	-24.3
15690.0	62.3	48.6	62.9	48.6	68.3	-19.7	-19.7
20920.0	66.6	52.9	66.9	53.0	68.3	-15.4	-15.3
26150.0	67.8	54.2	67.7	54.2	68.3	-14.1	-14.1
Band Edges							
5150.0	71.4	53.8	71.2	53.2	54.0	-0.2	-0.8
5350.0	61.7	48.0	61.8	47.8	54.0	-6.0	-6.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 18 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 9 U-NII-1 (802.11ac40)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5190.0	--	--	--	--	--	--	--
10380.0	57.3	44.0	58.2	44.0	68.3	-24.3	-24.3
15570.0	63.3	49.2	63.2	49.1	68.3	-19.1	-19.2
20760.0	67.0	53.0	66.4	52.9	68.3	-15.3	-15.4
25950.0	66.4	53.0	67.0	53.0	68.3	-15.3	-15.3
5230.0	--	--	--	--	--	--	--
10460.0	57.5	44.1	57.7	44.1	68.3	-24.2	-24.2
15690.0	61.8	48.6	63.0	48.6	68.3	-19.7	-19.7
20920.0	66.7	52.9	66.2	53.0	68.3	-15.4	-15.3
26150.0	68.0	54.2	68.4	54.2	68.3	-14.1	-14.1
Band Edges							
5150.0	71.9	53.7	71.8	53.7	54.0	-0.3	-0.3
5350.0	61.8	47.9	61.4	47.8	54.0	-6.1	-6.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 19 Transmitter Radiated Emission 5150-5250 MHz Band, Mode 10 U-NII-1 (802.11ac80)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5210.0	--	--	--	--	--	--	--
10420.0	57.2	43.6	57.3	43.6	68.3	-24.7	-24.7
15630.0	62.8	49.6	63.4	49.6	68.3	-18.7	-18.7
20840.0	66.3	52.1	66.0	52.1	68.3	-16.2	-16.2
26050.0	67.6	53.9	67.8	53.9	68.3	-14.4	-14.4
Band Edges							
5150.0	66.1	51.6	65.5	51.0	54.0	-2.4	-3.0
5350.0	61.9	48.1	61.6	48.0	54.0	-5.9	-6.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 20 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 11 U-NII-3 (802.11a)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5745.0	--	--	--	--	--	--	--
11490.0	60.3	46.5	60.4	46.5	68.3	-21.8	-21.8
17235.0	66.3	52.4	65.4	52.4	68.3	-15.9	-15.9
22980.0	64.8	53.7	67.6	53.7	68.3	-14.6	-14.6
28725.0	69.9	55.8	69.9	59.7	68.3	-12.5	-8.6
5785.0	--	--	--	--	--	--	--
11570.0	60.2	46.2	59.8	46.3	68.3	-22.1	-22.0
17355.0	65.3	52.0	65.8	52.0	68.3	-16.3	-16.3
23140.0	66.5	53.1	67.0	53.2	68.3	-15.2	-15.1
28925.0	70.4	56.9	70.5	56.9	68.3	-11.4	-11.4
5825.0	--	--	--	--	--	--	--
11650.0	60.2	46.8	60.4	47.1	68.3	-21.5	-21.2
17475.0	65.2	51.9	65.8	51.9	68.3	-16.4	-16.4
23300.0	66.9	53.4	66.7	53.4	68.3	-14.9	-14.9
29125.0	69.4	56.1	69.3	56.1	68.3	-12.2	-12.2
Band Edges							
5725.0	69.8	53.1	75.7	57.3	78.2	-25.1	-20.9
5850.0	68.6	53.1	69.0	52.8	78.2	-25.1	-25.4

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 21 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 12 U-NII-3 (802.11n)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5745.0	--	--	--	--	--	--	--
11490.0	60.4	46.6	60.6	46.7	68.3	-21.7	-21.6
17235.0	66.2	52.4	66.3	52.4	68.3	-15.9	-15.9
22980.0	67.3	53.7	67.5	53.7	68.3	-14.6	-14.6
28725.0	69.5	55.7	69.7	55.8	68.3	-12.6	-12.5
5785.0	--	--	--	--	--	--	--
11570.0	60.0	46.3	59.9	46.5	68.3	-22.0	-21.8
17355.0	65.7	52.1	66.1	52.1	68.3	-16.2	-16.2
23140.0	65.7	52.1	66.1	52.1	68.3	-16.2	-16.2
28925.0	66.5	53.1	67.1	53.1	68.3	-15.2	-15.2
5825.0	--	--	--	--	--	--	--
11650.0	60.7	46.6	59.8	46.5	68.3	-21.7	-21.8
17475.0	65.8	51.8	65.6	51.8	68.3	-16.5	-16.5
23300.0	66.8	53.3	66.9	53.4	68.3	-15.0	-14.9
29125.0	69.8	56.0	69.6	56.0	68.3	-12.3	-12.3
Band Edges							
5725.0	71.6	52.8	77.8	57.9	78.2	-25.4	-20.3
5850.0	68.3	51.1	69.3	52.0	78.2	-27.1	-26.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 22 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 13 U-NII-3 (802.11n40)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5755.0	--	--	--	--	--	--	--
11510.0	59.9	46.6	60.4	46.5	68.3	-21.7	-21.8
17265.0	65.4	51.9	65.0	51.9	68.3	-16.4	-16.4
23020.0	67.2	53.5	67.0	53.5	68.3	-14.8	-14.8
28775.0	69.8	56.4	70.1	56.3	68.3	-11.9	-12.0
5795.0	--	--	--	--	--	--	--
11590.0	59.7	46.2	59.8	46.4	68.3	-22.1	-21.9
17385.0	65.3	52.1	65.7	52.1	68.3	-16.2	-16.2
23180.0	66.4	52.9	66.5	53.0	68.3	-15.4	-15.3
28975.0	70.1	56.7	70.8	56.7	68.3	-11.6	-11.6
Band Edges							
5725.0	78.0	61.4	78.1	61.5	78.2	-16.8	-16.7
5850.0	64.4	49.7	66.7	51.5	78.2	-28.5	-26.7

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 23 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 14 U-NII-3 (802.11ac40)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5755.0	--	--	--	--	--	--	--
11510.0	60.3	46.7	60.4	46.5	68.3	-21.6	-21.8
17265.0	65.3	51.9	65.5	51.9	68.3	-16.4	-16.4
23020.0	67.7	53.5	67.3	53.6	68.3	-14.8	-14.7
28775.0	69.8	56.4	70.4	56.4	68.3	-11.9	-11.9
5795.0	--	--	--	--	--	--	--
11590.0	60.2	46.4	60.7	46.8	68.3	-21.9	-21.5
17385.0	65.8	51.8	65.4	51.8	68.3	-16.5	-16.5
23180.0	66.8	53.0	66.3	53.0	68.3	-15.3	-15.3
28975.0	70.1	56.7	70.2	56.7	68.3	-11.6	-11.6
Band Edges							
5725.0	78.2	61.6	78.1	61.3	78.2	-16.6	-16.9
5850.0	63.8	49.5	67.2	51.5	78.2	-28.7	-26.7

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 24 Transmitter Radiated Emission 5725-5850 MHz Band, Mode 15 U-NII-3 (802.11ac80)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)	Horizontal Margin (dB)	Vertical Margin (dB)
5775.0	--	--	--	--	--	--	--
11550.0	58.7	45.1	58.8	45.0	68.3	-23.2	-23.3
17325.0	65.2	51.5	65.1	51.5	68.3	-16.8	-16.8
23100.0	66.8	53.0	67.2	53.1	68.3	-15.3	-15.2
28875.0	68.8	55.5	68.9	55.4	68.3	-12.8	-12.9
Band Edges							
5725.0	72.9	57.3	75.6	60.2	78.2	-20.9	-18.0
5850.0	65.8	51.5	67.6	53.5	78.2	-26.7	-24.7

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

Table 25 Transmitter Antenna Port Data Modes 6-10 (U-NII-1)

Frequency MHz	Antenna Port Conducted Output Power (Watts)	99% Occupied Bandwidth (kHz)	Peak Power Spectral Density (dBm/MHz)
20 MHz Mode 6 U-NII-1 (802.11a)			
5180	0.027	17,180.0	12.8
5200	0.051	17,630.0	15.1
5240	0.047	17,460.0	14.8
20 MHz Mode 7 U-NII-1 (802.11n)			
5180	0.019	18,240.0	12.5
5200	0.058	18,550.0	15.2
5240	0.054	18,540.0	15.6
40 MHz Mode 8 U-NII-1 (802.11n40)			
5190	0.018	36,725.0	8.4
5230	0.055	37,550.0	13.5
40 MHz Mode 9 U-NII-1 (802.11ac40)			
5190	0.018	36,650.0	8.4
5230	0.054	37,325.0	13.3
80 MHz Mode 10 U-NII-1 (802.11ac80)			
5210	0.013	76,000.0	4.8

Table 26 Transmitter Antenna Port Data Modes 11-15 (U-NII-3)

Frequency MHz	Antenna Port Conducted Average Output Power (Watts)	99% Occupied Bandwidth (kHz)	6-dB Occupied Bandwidth (kHz)	26-dB Occupied Bandwidth (kHz)	Peak Power Spectral Density (dBm/500kHz)
20 MHz Mode 11 U-NII-3 (802.11a)					
5745	0.056	17,560.0	16,250.0	22,280.0	12.1
5785	0.054	17,650.0	16,282.1	24,010.0	12.1
5825	0.055	17,620.0	16,240.0	22,630.0	12.3
20 MHz Mode 12 U-NII-3 (802.11n)					
5745	0.053	18,580.0	17,500.0	22,680.0	12.5
5785	0.052	18,500.0	17,532.1	21,910.0	13.0
5825	0.051	18,640.0	17,542.1	22,360.0	12.4
40 MHz Mode 13 (802.11n40) U-NII-3					
5755	0.054	37,975.0	36,250.0	78,450.0	9.9
5795	0.053	38,075.0	36,160.3	77,722.1	9.5
40 MHz Mode 14 (802.11ac40) U-NII-3					
5755	0.054	37,525.0	36,025.0	43,075.0	9.5
5795	0.053	37,425.0	36,000.0	41,300.0	9.9
80 MHz Mode 15 U-NII-3 (802.11ac80)					
5775	0.031	76,500.0	75,810.0	83,000.0	4.7

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated compliance with the radiated emissions requirements of 47 CFR Part 15.407 and Industry Canada RSS-247 Issue 3. The maximum average conducted power delivered to antenna was 0.058-Watts in the U-NII-1 Band and 0.056-Watts in the U-NII-3

Band. The radiated harmonic emissions provided a minimum margin of -8.6 dB below requirements. There were no other significantly measurable emissions in the restricted bands other than those presented in this report. Other emissions were present with amplitudes at least 20 dB below the requirements. There were no other deviations or exceptions to the requirements.

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Additional Test Equipment
- Annex C Rogers Labs Certificate of Accreditation

Annex A Measurement Uncertainty Calculations

The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16–4. Result of measurement uncertainty calculations are recorded below. Component and process variability of production devices similar to those tested may result in additional deviations. The manufacturer has the sole responsibility of continued compliance.

Measurement	Expanded Measurement Uncertainty $U_{(lab)}$
3 Meter Horizontal 0.009-1000 MHz Measurements	4.16
3 Meter Vertical 0.009-1000 MHz Measurements	4.33
3 Meter Measurements 1-18 GHz	5.46
3 Meter Measurements 18-40 GHz	5.16
10 Meter Horizontal Measurements 0.009-1000 MHz	4.15
10 Meter Vertical Measurements 0.009-1000 MHz	4.32
AC Line Conducted	1.75
Antenna Port Conducted power	1.17
Frequency Stability	1.00E-11
Temperature	1.6°C
Humidity	3%

Annex B Test Equipment

Equipment	Manufacturer	Model (SN)	Band	Cal Date(m/d/y)	Due
☒ LISN	FCC	FCC-LISN-50-25-10(1PA) (160611)	.15-30MHz	3/25/2024	3/25/2025
☐ LISN: Fischer Custom Communications Model:		FCC-LISN-50-16-2-08		3/25/2024	3/25/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(303073)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303069)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303070)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	9/16/2024	9/16/2025
☐ Cable	Belden	RG-58 (L2-CAT3-11509)	9kHz-30 MHz	9/16/2024	9/16/2025
☒ Antenna	Com Power	AL-130 (121055)	.001-30 MHz	9/16/2024	9/16/2025
☐ Antenna:	EMCO	6509	.001-30 MHz	9/16/2024	9/16/2026
☒ Antenna	ARA	BCD-235-B (169)	20-350MHz	9/16/2024	9/16/2025
☒ Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	9/16/2024	9/16/2025
☐ Antenna	ETS-Lindgren	3147 (40582)	200-1000MHz	9/16/2024	9/16/2026
☒ Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	3/25/2024	3/25/2026
☒ Antenna	Com Power	AH-118 (10110)	1-18 GHz	9/16/2024	9/16/2026
☒ Antenna	Com Power	AH-1840 (101046)	18-40 GHz	3/27/2023	3/27/2025
☒ Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	7/8/2024	7/8/2025
☒ Analyzer	Rohde & Schwarz	ESW44 (101534)	20Hz-44GHz	1/26/2024	1/26/2025
☐ Analyzer	Rohde & Schwarz	FS-Z60, 90, 140, and 220	40GHz-220GHz	12/22/2017	12/22/2027
☐ Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	9/16/2024	9/16/2025
☐ Amplifier	Com-Power	CPPA-102 (01254)	1-1000 MHz	9/16/2024	9/16/2025
☒ Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	9/16/2024	9/16/2025
☒ Amplifier	Com-Power	PAM-840A (461328)	18-40 GHz	9/16/2024	9/16/2025
☒ Pwr Sensor	Rohde & Schwarz	NRP33T	0.05-33 GHz	9/26/2023	9/26/2025
☒ Power meter	Agilent	N1911A with N1921A	0.05-40 GHz	3/25/2024	3/25/2025
☒ Generator	Rohde & Schwarz	SMB100A6 (100150)	20Hz-6 GHz	3/25/2024	3/25/2025
☒ Generator	Rohde & Schwarz	SMBV100A6 (260771)	20Hz-6 GHz	3/25/2024	3/25/2025
☐ RF Filter	Micro-Tronics	BRC50722 (009).9G notch	30-18000 MHz	3/25/2024	3/25/2025
☐ RF Filter	Micro-Tronics	HPM50114 (017)1.5G HPF	30-18000 MHz	3/25/2024	3/25/2025
☐ RF Filter	Micro-Tronics	HPM50117 (063) 3G HPF	30-18000 MHz	3/25/2024	3/25/2025
☐ RF Filter	Micro-Tronics	HPM50105 (059) 6G HPF	30-18000 MHz	3/25/2024	3/25/2025
☒ RF Filter	Micro-Tronics	BRM50702 (172) 2G notch	30-18000 MHz	3/25/2024	3/25/2025
☒ RF Filter	Micro-Tronics	BRC50703 (G102) 5G notch	30-18000 MHz	3/25/2024	3/25/2025
☒ RF Filter	Micro-Tronics	BRC50705 (024) 5G notch	30-18000 MHz	3/25/2024	3/25/2025
☐ Attenuator	Fairview	SA6NFFNF100W-40 (1625)	30-18000 MHz	3/25/2024	3/25/2025
☒ Attenuator	Mini-Circuits	VAT-3W2+ (1436)	30-6000 MHz	3/25/2024	3/25/2025
☒ Attenuator	Mini-Circuits	VAT-3W2+ (1445)	30-6000 MHz	3/25/2024	3/25/2025
☒ Attenuator	Mini-Circuits	VAT-3W2+ (1735)	30-6000 MHz	3/25/2024	3/25/2025
☒ Attenuator	Mini-Circuits	VAT-6W2+ (1438)	30-6000 MHz	3/25/2024	3/25/2025
☐ Attenuator	Mini-Circuits	VAT-6W2+ (1736)	30-6000 MHz	3/25/2024	3/25/2025

Rogers Labs, a division of The Compatibility Center LLC

7915 Nieman Road FCC ID: IPH-04664 IC: 1792A-04664

Lenexa, KS 66214

Test: 241104

Phone/Fax: (913) 660-0666

Test to: 47CFR 15E, RSS-Gen RSS-247

Revision 2

File: A04664 NII TstRpt 241104 r2

Garmin International, Inc.

PMN: A04664


SN's: 8NN000252, 8NN000083

Date: March 17, 2025

Page 110 of 112

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date(m/d/y)</u>	<u>Due</u>
☐ Frequency Counter: Leader		LDC-825 (8060153)		3/28/2023	3/28/2025
☐ ISN	Com-Power	Model ISN T-8 (600111)		3/25/2024	3/25/2025
☐ LISN	Compliance Design	FCC-LISN-2.Mod.cd,(126)	.15-30MHz	9/16/2024	9/16/2025
☐ LISN:	Com-Power	Model LI-220A		9/16/2024	9/16/2026
☒ LISN:	Com-Power	Model LI-550C		9/16/2024	9/16/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(1.5M)(303072)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(L1M)(281183)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(L4M)(281184)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Huber & Suhner Inc.	Sucoflex102ea(L10M)(317546)	9kHz-40 GHz	9/16/2024	9/16/2025
☒ Cable	Time Microwave	4M-750HF290-750 (L4M)	9kHz-24 GHz	9/16/2024	9/16/2025
☒ Cable	Mini-Circuits	KBL-2M-LOW+ (23090329)	9kHz-40 GHz	3/25/2024	3/25/2025
☐ RF Filter	Micro-Tronics	BRC17663 (001)	9.3-9.5 notch 30-1800 MHz	3/28/2023	3/28/2025
☐ RF Filter	Micro-Tronics	BRC19565 (001)	9.2-9.6 notch 30-1800 MHz	3/28/2023	3/28/2025
☒ Analyzer	HP	8562A (3051A05950)	9kHz-125GHz	3/25/2024	3/25/2025
☐ Wave Form Generator Keysight		33500B (MY57400128)		3/25/2024	3/25/2025
☐ Antenna: Solar		9229-1 & 9230-1		2/10/2024	2/10/2025
☐ CDN:	Com-Power	Model CDN325E		10/11/2022	10/11/2024
☐ Oscilloscope Scope: Tektronix		MDO 4104		2/10/2024	2/10/2025
☐ EMC Transient Generator HVT		TR 3000		2/10/2024	2/10/2025
☐ AC Power Source (Ametech, California Instruments)				2/10/2024	2/10/2025
☒ Field Intensity Meter: EFM-018				2/10/2024	2/10/2025
☒ ESD Simulator: MZ-15				2/10/2024	2/10/2025
☒ Weather station Davis		6152 (A70927D44N)		7/11/2024	7/11/2025
☐ Injection Clamp Luthi Model EM101				not required	
☐ R.F. Power Amp ACS 230-50W				not required	
☐ R.F. Power Amp EIN Model: A301				not required	
☐ R.F. Power Amp A.R. Model: 10W 1010M7				not required	
☐ R.F. Power Amp A.R. Model: 50U1000				not required	
☒ Temperature Chamber				not required	
☒ Shielded Room				not required	

Annex C Laboratory Certificate of Accreditation

United States Department of Commerce National Institute of Standards and Technology	
NVLAP[®] ilac-MRA	
Certificate of Accreditation to ISO/IEC 17025:2017	
NVLAP LAB CODE: 200087-0	
Rogers Labs, a division of The Compatibility Center LLC Lenexa, KS	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
Electromagnetic Compatibility & Telecommunications	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).</i>	
2024-03-18 through 2025-03-31 <i>Effective Dates</i>	  For the National Voluntary Laboratory Accreditation Program

Rogers Labs, a division of The Compatibility Center LLC
7915 Nieman Road FCC ID: IPH-04664 IC: 1792A-04664
Lenexa, KS 66214 Test: 241104
Phone/Fax: (913) 660-0666 Test to: 47CFR 15E, RSS-Gen RSS-247
Revision 2 File: A04664 NII TstRpt 241104 r2

Garmin International, Inc.
PMN: A04664
SN's: 8NN000252, 8NN000083
Date: March 17, 2025
Page 112 of 112