


FCC Co-Location Test Report

FCC ID : IPH-05047
Equipment : Meter/IVI
Model No. : HAWW
Brand Name : GARMIN
Applicant : Garmin International, Inc.
Address : 1200 E. 151st Street Olathe, KS 66062 United States
Standard : 47 CFR FCC Part 15.247
47 CFR FCC Part 15.407
Received Date : Feb. 12, 2025
Tested Date : Oct. 14, 2025

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:


Along Chen / Assistant Manager



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	The Equipment List	6
1.3	Test Standards	7
1.4	Reference Guidance	7
1.5	Deviation from Test Standard and Measurement Procedure.....	7
1.6	Measurement Uncertainty	7
2	TEST CONFIGURATION.....	8
2.1	Testing Facility	8
2.2	The Worst Test Modes and Channel Details	8
3	TRANSMITTER TEST RESULTS	9
3.1	Unwanted Emissions into Restricted Frequency Bands	9
4	TEST LABORATORY INFORMATION	11

Appendix A. Unwanted Emissions Into Restricted Frequency Bands

Release Record

Report No.	Version	Description	Issued Date
FR521201CO	Rev. 01	Initial issue	Nov. 27, 2025

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d) 15.209 15.407(b)	Radiated Emissions	[dBuV/m at 3m]: 60MHz 36.68 (Margin -3.32dB) - PK	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

WLAN	
Operating Frequency	802.11b/g/n/ax: 2412 MHz ~ 2462 MHz 802.11a/n/ac/ax: 5180 MHz ~ 5240 MHz, 5745 MHz ~ 5825 MHz
Modulation Type	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac/ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM and 1024QAM)
BT	
Operating Frequency	2402 MHz ~ 2480 MHz
Modulation Type	Bluetooth LE(1Mbps/2Mbps): GFSK Bluetooth BR(1Mbps): GFSK Bluetooth EDR (2Mbps): $\pi/4$ -DQPSK Bluetooth EDR (3Mbps): 8-DPSK

1.1.2 Antenna Details

For WLAN

Brand	Model	Type	Connector	Gain (dBi)		
				2400~2483.5MHz	5150~5250MHz	5725~5850MHz
INPAQ	700-00228-10	PCB	IPEX	3.96	2.19	1.95

BT

Brand	Model	Type	Connector	Gain (dBi)	Remarks
INPAQ	700-00228-00	PCB	IPEX	4.8	Combo chip
INPAQ	717-00180-00	Chip	NA	4.95	Chip 1
INPAQ	717-00180-00	Chip	NA	1.29	Chip 2

1.1.3 Chip Information

Chip	Model name	Description
Combo chip	AW611	WIFI / BT EDR
Chip 1	AW300	BT EDR + BLE
Chip 2	AW300	BT EDR + BLE

1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	DC 12V
-------------------	--------

1.2 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber3 / (03CH03-WS)				
Tested Date	Oct. 14, 2025				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 25, 2025	Feb. 24, 2026
Spectrum Analyzer	R&S	FSV40	101499	Mar. 27, 2025	Mar. 26, 2026
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 05, 2024	Nov. 04, 2025
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Jul. 04, 2025	Jul. 03, 2026
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Dec. 20, 2024	Dec. 19, 2025
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 18, 2024	Nov. 17, 2025
Preamplifier	EMC	EMC02325	980187	Jun. 24, 2025	Jun. 23, 2026
Preamplifier	EMC	EMC118A45SE	980897	Aug. 08, 2025	Aug. 07, 2026
Preamplifier	EMC	EMC184045SE	980903	Aug. 08, 2025	Aug. 07, 2026
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 01, 2025	Sep. 30, 2026
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Sep. 19, 2025	Sep. 18, 2026
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Sep. 19, 2025	Sep. 18, 2026
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Sep. 19, 2025	Sep. 18, 2026
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 19, 2025	Sep. 18, 2026
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Sep. 19, 2025	Sep. 18, 2026
Attenuator	Pasternack	PE7005-10	10-3	Sep. 19, 2025	Sep. 18, 2026
HIGHPASS FILTER	WI	WHK3.1-18G-10SS	43	Sep. 19, 2025	Sep. 18, 2026
HIGHPASS FILTER	K&L	11SH10-7000/T18000-O/OP	21	Sep. 19, 2025	Sep. 18, 2026
LOWPASS FILTER	WI	WLKS5000-12SS	2	Sep. 19, 2025	Sep. 18, 2026
Measurement Software	Sporton	SENSE-EMI	V5.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.3 Test Standards

47 CFR FCC Part 15.247
47 CFR FCC Part 15.407
ANSI C63.10-2020
ANSI C63.4-2014 + C63.4a-2017

1.4 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

1.5 Deviation from Test Standard and Measurement Procedure

None

1.6 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Unwanted Emission $\leq$ 1GHz	± 3.96 dB
Unwanted Emission $>$ 1GHz	± 4.51 dB

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	03CH03-WS
Address of Test Site	No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISSED#: 10807C
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode
Unwanted Emissions	Mode 1: BT1 : BLE 1M 2402MHz + BT2 : BT EDR DH5 2441MHz + Combo 2.4G : 11ax20 2412MHz
	Mode 2: BT1 : BLE 1M 2402MHz + BT2 : BT EDR DH5 2441MHz + Combo BT : BT EDR 3DH5 2480MHz + Normal Link : 5G U-1 5220MHz
NOTE: The selected channel is the maximum power channel of each radio mode.	

3 Transmitter Test Results

3.1 Unwanted Emissions into Restricted Frequency Bands

3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9~90 kHz, 110~490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.1.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.1.3 Test Setup

Radiated Emissions below 1 GHz

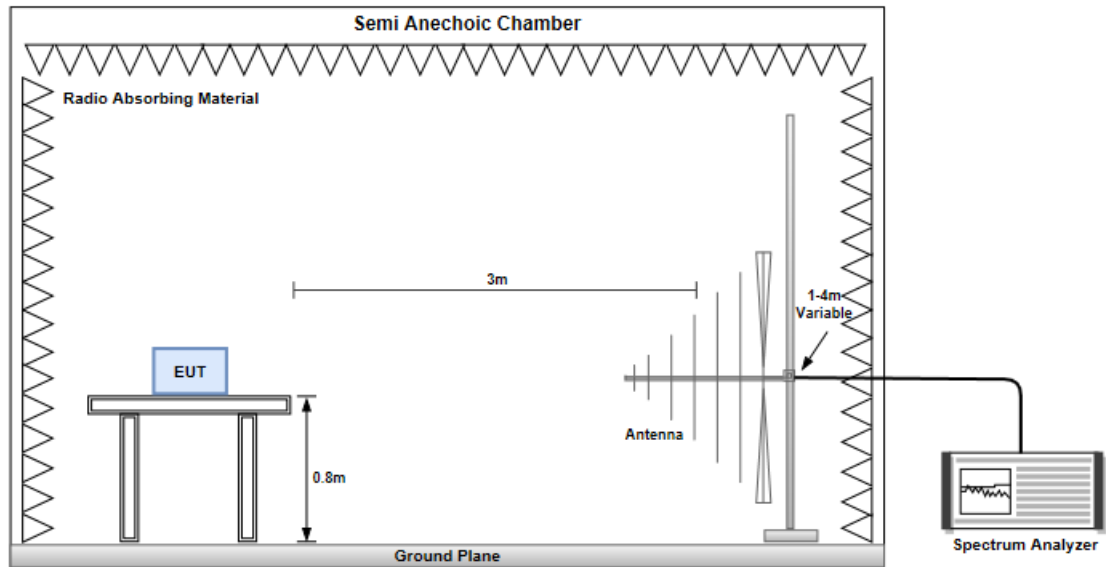

Radiated Emissions above 1 GHz

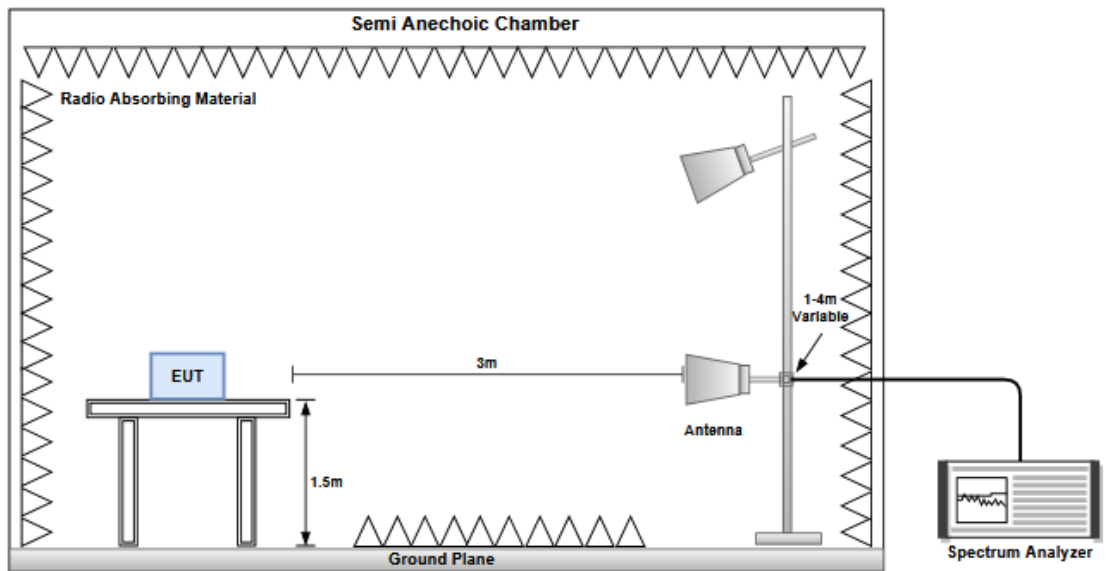

3.1.4 Test Results

Ambient Condition	26°C / 62%	Tested By	Brad Wu
-------------------	------------	-----------	---------

Refer to Appendix A.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <https://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw


==END==



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	60M	36.68	40.00	-3.32	Vertical
Mode 2	Pass	PK	60M	36.59	40.00	-3.41	Vertical


Mode 1

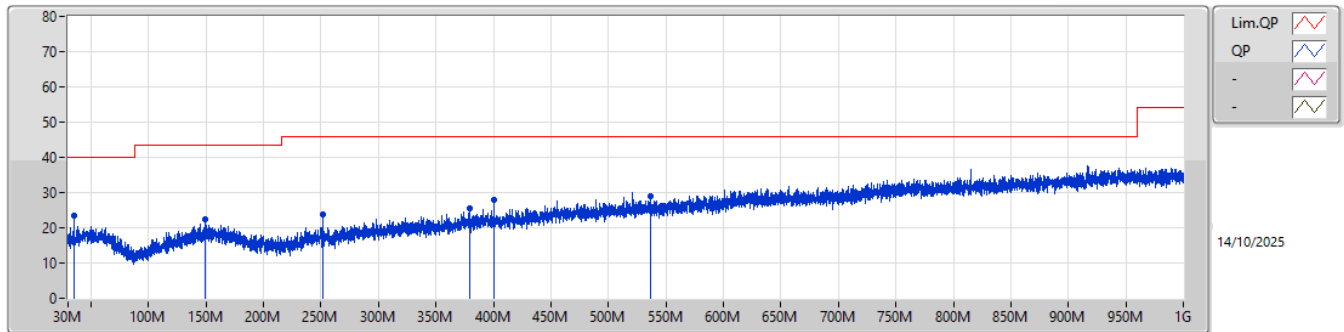

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	34.8M	23.45	40.00	-16.55	-9.68	3	Horizontal	-	-	-	33.13	17.68	0.62	27.98		
PK	148.8M	22.54	43.50	-20.96	-8.48	3	Horizontal	-	-	-	31.02	18.40	1.36	28.24		
PK	251.9M	23.84	46.00	-22.16	-9.46	3	Horizontal	-	-	-	33.30	16.90	1.93	28.29		
PK	378.9M	25.58	46.00	-20.42	-5.19	3	Horizontal	-	-	-	30.77	20.36	2.61	28.16		
PK	400M	27.80	46.00	-18.20	-4.71	3	Horizontal	-	-	-	32.51	20.70	2.72	28.13		
PK	536.7M	29.13	46.00	-16.87	-1.33	3	Horizontal	-	-	-	30.46	23.20	3.44	27.97		




Mode 1

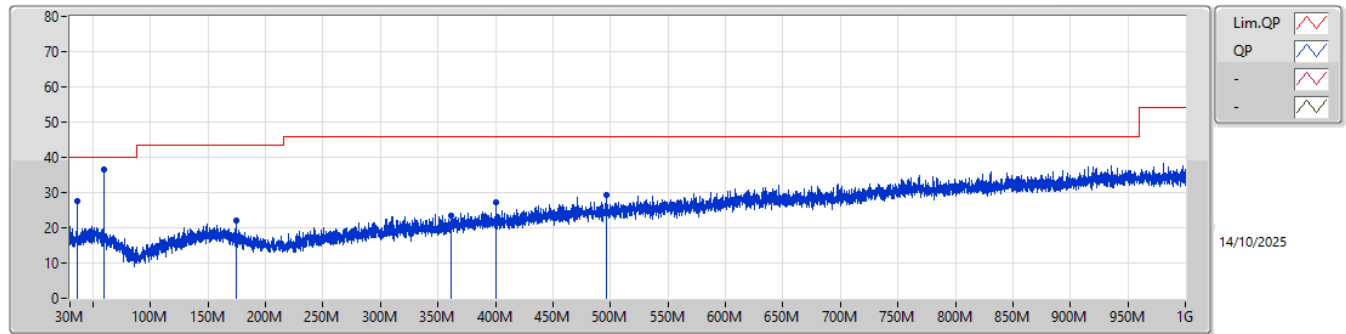


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	36.6M	27.71	40.00	-12.29	-9.78	3	Vertical	-	-	-	37.49	17.56	0.64	27.98		
PK	60M	36.68	40.00	-3.32	-8.95	3	Vertical	-	-	-	45.63	18.20	0.83	27.98		
PK	175.1M	21.98	43.50	-21.52	-9.39	3	Vertical	-	-	-	31.37	17.38	1.50	28.27		
PK	361.1M	23.52	46.00	-22.48	-6.14	3	Vertical	-	-	-	29.66	19.54	2.51	28.19		
PK	400M	27.19	46.00	-18.81	-4.71	3	Vertical	-	-	-	31.90	20.70	2.72	28.13		
PK	496.2M	29.16	46.00	-16.84	-2.25	3	Vertical	-	-	-	31.41	22.52	3.24	28.01		

Mode 2

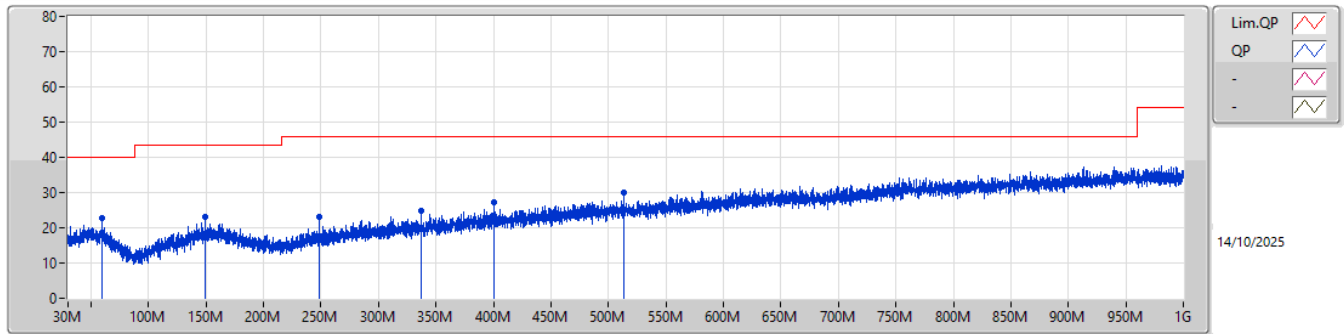

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	60M	22.73	40.00	-17.27	-8.95	3	Horizontal	-	-	-	31.68	18.20	0.83	27.98		
PK	149.3M	23.18	43.50	-20.32	-8.45	3	Horizontal	-	-	-	31.63	18.43	1.36	28.24		
PK	248.1M	23.21	46.00	-22.79	-9.52	3	Horizontal	-	-	-	32.73	16.86	1.91	28.29		
PK	336.9M	24.80	46.00	-21.20	-6.50	3	Horizontal	-	-	-	31.30	19.34	2.38	28.22		
PK	400M	27.18	46.00	-18.82	-4.71	3	Horizontal	-	-	-	31.89	20.70	2.72	28.13		
PK	513.2M	29.92	46.00	-16.08	-1.65	3	Horizontal	-	-	-	31.57	23.03	3.32	28.00		

Mode 2

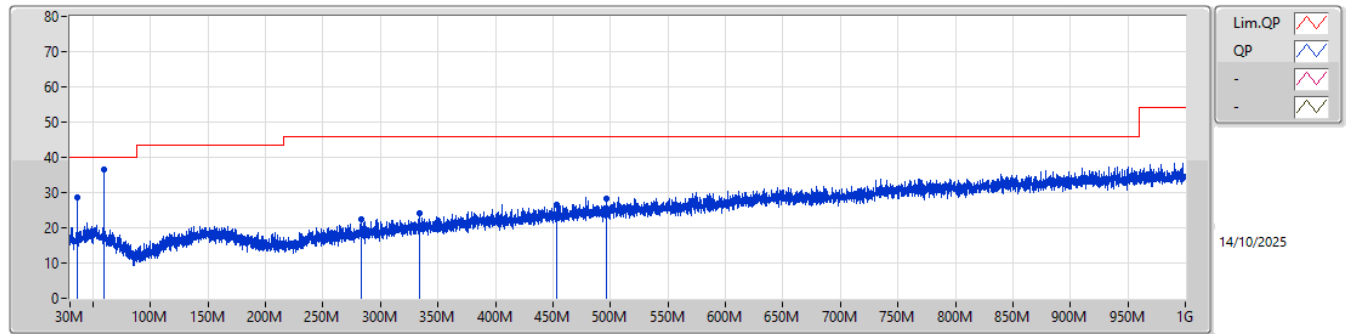

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	36.3M	28.68	40.00	-11.32	-9.82	3	Vertical	-	-	-	38.50	17.53	0.63	27.98		
PK	60M	36.59	40.00	-3.41	-8.95	3	Vertical	-	-	-	45.54	18.20	0.83	27.98		
PK	282.9M	22.39	46.00	-23.61	-8.16	3	Vertical	-	-	-	30.55	18.02	2.10	28.28		
PK	333.7M	23.99	46.00	-22.01	-6.56	3	Vertical	-	-	-	30.55	19.30	2.37	28.23		
PK	453M	26.71	46.00	-19.29	-3.02	3	Vertical	-	-	-	29.73	22.06	2.99	28.07		
PK	496.1M	28.27	46.00	-17.73	-2.25	3	Vertical	-	-	-	30.52	22.52	3.24	28.01		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	7.245G	36.88	54.00	-17.12	Vertical
Mode 2	Pass	AV	2.558G	48.55	54.00	-5.45	Horizontal




Mode 1

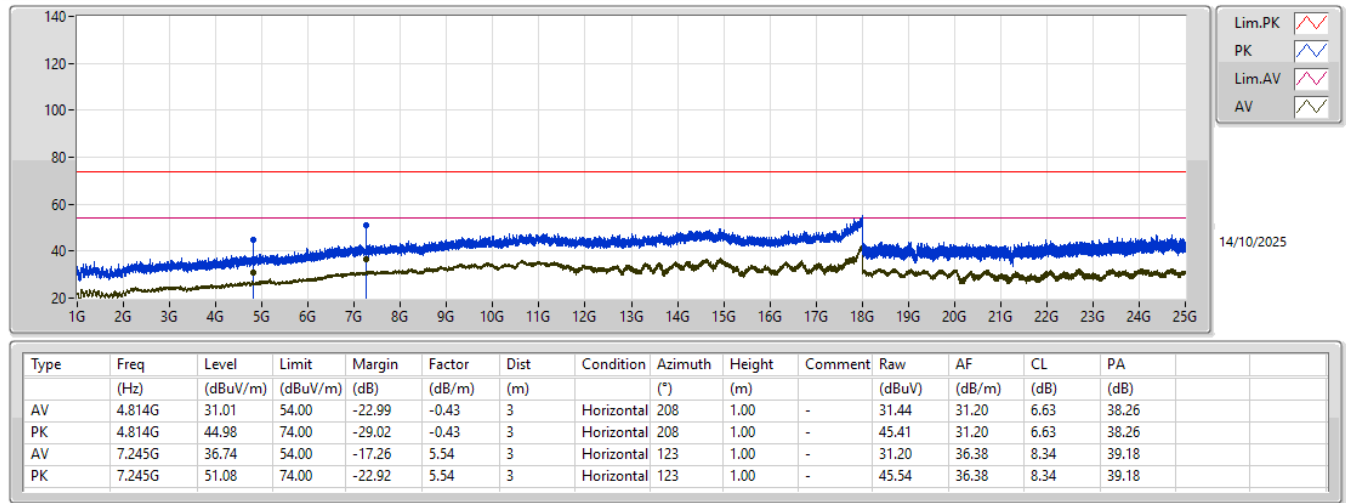




Mode 1

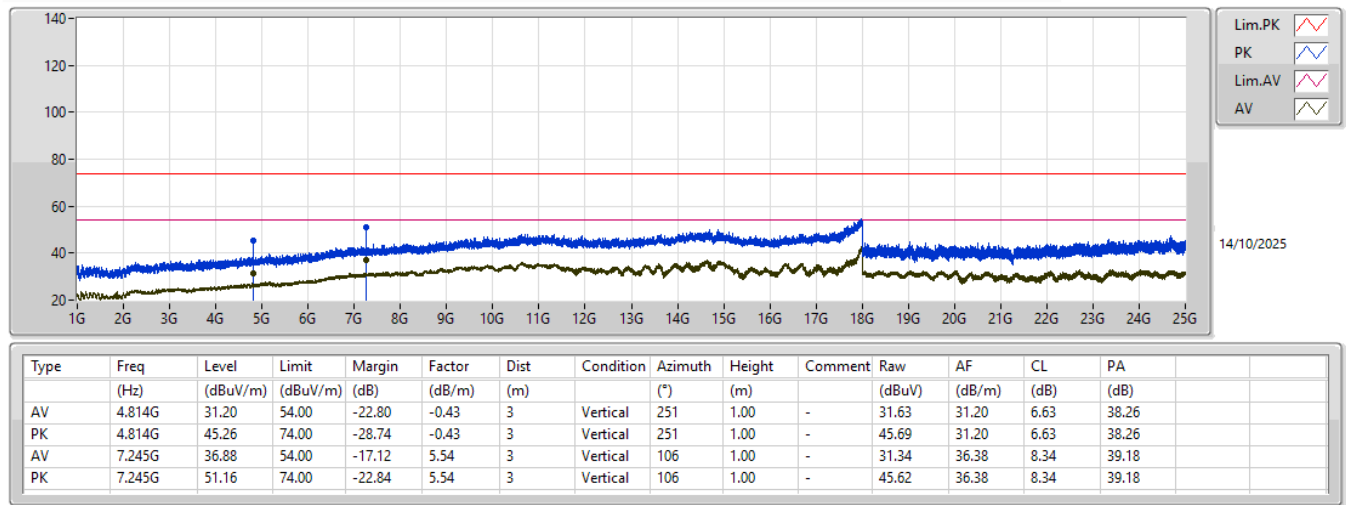

Mode 2

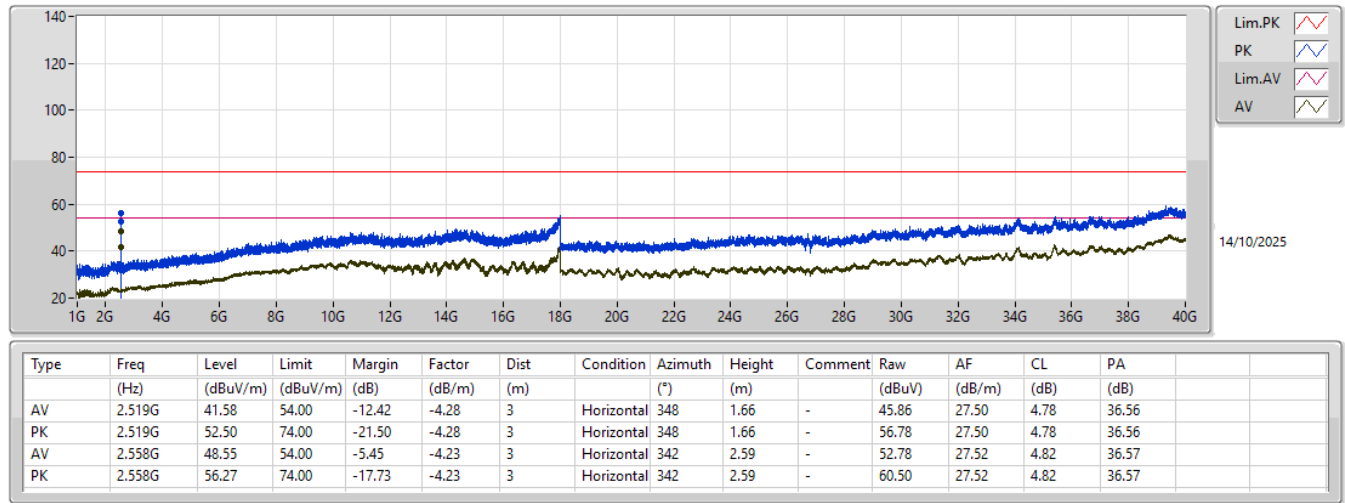

Mode 2

