


FCC Test Report

FCC ID : IPH-B3697
Equipment : Watch and activity monitor
Model No. : AB3697
Brand Name : GARMIN
Applicant : Garmin International, Inc.
Address : 1200 E. 151st Street Olathe, KS 66062 United States
Standard : 47 CFR FCC Part 15.249
Received Date : May 28, 2019
Tested Date : Jul. 22 ~ Jul. 24, 2019

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	9
1.6	Deviation from Test Standard and Measurement Procedure.....	9
1.7	Measurement Uncertainty	9
2	TEST CONFIGURATION.....	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions.....	11
3.2	Radiated Emission	14
3.3	20dB and Occupied Bandwidth.....	28
4	TEST LABORATORY INFORMATION	29

Release Record

Report No.	Version	Description	Issued Date
FR952804	Rev. 01	Initial issue	Aug. 05, 2019

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.779MHz 25.99 (Margin -20.01dB) - AV	Pass
15.249(a)	Field Strength of Fundamental	Meet the requirement of limit	Pass
15.249(a)(d)	Field Strength of Harmonics and Emissions Radiated outside of the Specified Frequency Bands	Meet the requirement of limit	Pass
15.215(c)	20dB bandwidth	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

The EUT comes in three different types of strap materials in the market. One is leather, another is metal, and the other is silicon.

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Modulation	Ch. Freq. (MHz)	Channel Number	Data Rate
2402-2479	GFSK	2402-2479	1-78 [78]	1 Mbps

1.1.2 Antenna Details

Ant. No.	Type	Gain (dBi)	Connector	Remark
1	Slot	-4.07	N/A	---

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc from host 3.8Vdc from battery
-------------------	---------------------------------------

1.1.4 Accessories

No.	Equipment	Description
1	Battery	Brand: Garmin Model: 361-00130-00 Power Rating: 3.8Vdc, 66mAh
2	USB cable	Brand: Garmin Model: 320-01069-10 Power Line: 0.52m shielded without core

1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402	21	2422	41	2442	61	2462
2	2403	22	2423	42	2443	62	2463
3	2404	23	2424	43	2444	63	2464
4	2405	24	2425	44	2445	64	2465
5	2406	25	2426	45	2446	65	2466
6	2407	26	2427	46	2447	66	2467
7	2408	27	2428	47	2448	67	2468
8	2409	28	2429	48	2449	68	2469
9	2410	29	2430	49	2450	69	2470
10	2411	30	2431	50	2451	70	2471
11	2412	31	2432	51	2452	71	2472
12	2413	32	2433	52	2453	72	2473
13	2414	33	2434	53	2454	73	2474
14	2415	34	2435	54	2455	74	2475
15	2416	35	2436	55	2456	75	2476
16	2417	36	2437	56	2457	76	2477
17	2418	37	2438	57	2458	77	2478
18	2419	38	2439	58	2459	78	2479
19	2420	39	2440	59	2460	---	---
20	2421	40	2441	60	2461	---	---

1.1.6 Test Tool and Duty Cycle


Test Tool	Hardware control, Version: 1750-4	
Duty Cycle and Duty Factor	Duty Cycle (%)	Duty Factor (dB)
	4.81	13.17

1.2 Local Support Equipment List


Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Adapter	Apple	A1385	---	---

1.3 Test Setup Chart

Battery Mode

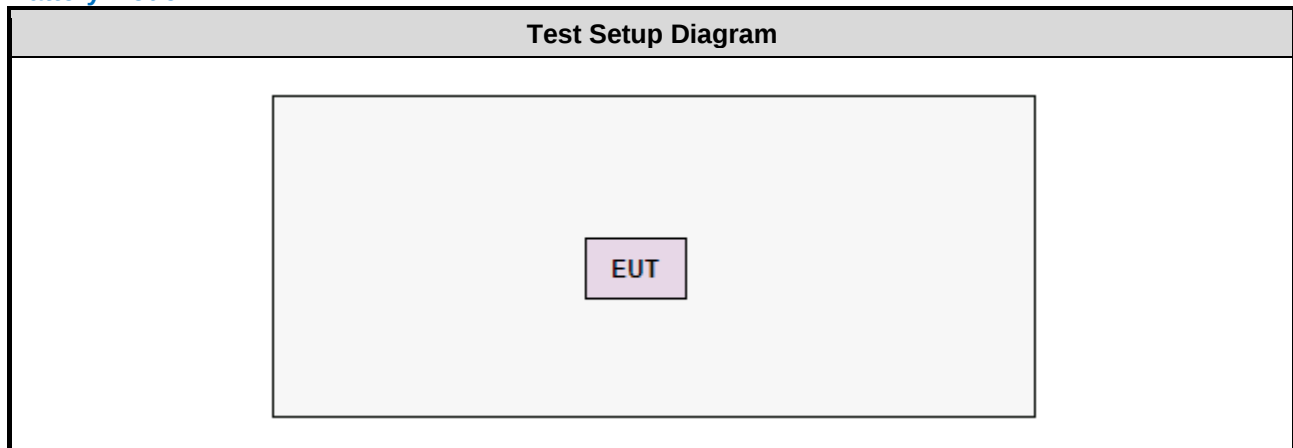

Charging Mode

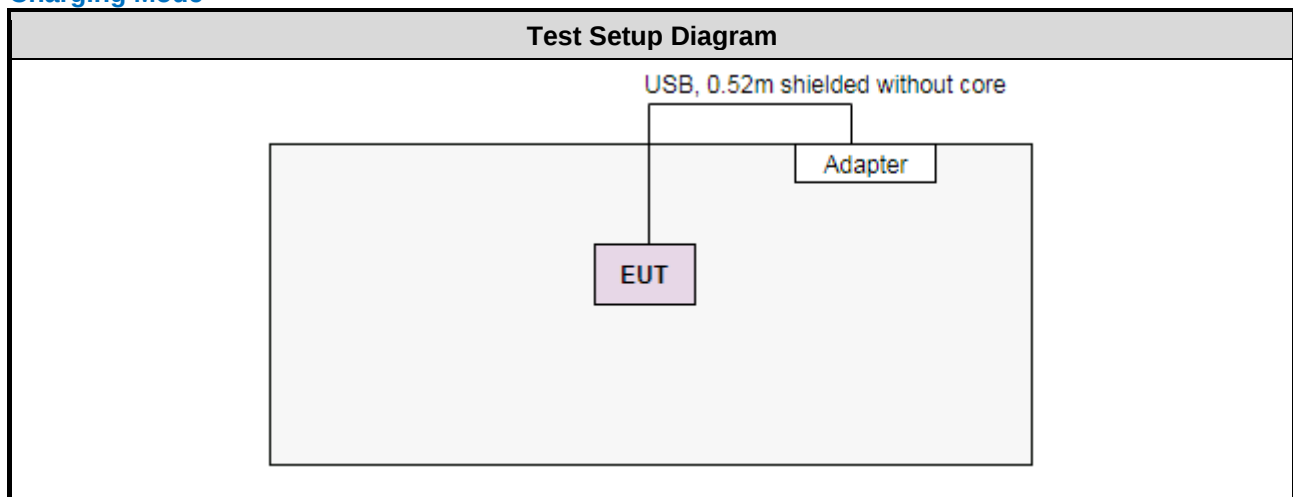

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Jul. 22, 2019				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Jan. 08, 2019	Jan. 07, 2020
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 05, 2018	Nov. 04, 2019
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 23, 2018	Oct. 23, 2019
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber 1 / (03CH01-WS)				
Tested Date	Jul. 24, 2019				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 27, 2018	Dec. 26, 2019
Receiver	R&S	ESR3	101658	Dec. 11, 2018	Dec. 10, 2019
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 12, 2019	Jul. 11, 2020
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 18, 2018	Dec. 17, 2019
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2018	Nov. 14, 2019
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 09, 2018	Nov. 08, 2019
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 08, 2018	Oct. 07, 2019
Preamplifier	EMC	EMC02325	980225	Jul. 09, 2019	Jul. 08, 2020
Preamplifier	Agilent	83017A	MY39501308	Oct. 04, 2018	Oct. 03, 2019
Preamplifier	EMC	EMC184045B	980192	Aug. 09, 2018	Aug. 08, 2019
RF Cable	EMC	EMC104-SM-SM-8000	181106	Oct. 08, 2018	Oct. 07, 2019
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 08, 2018	Oct. 07, 2019
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 08, 2018	Oct. 07, 2019
LF cable 1M	EMC	EMCCFD400-NM-NM-1000	160502	Oct. 08, 2018	Oct. 07, 2019
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 08, 2018	Oct. 07, 2019
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Oct. 08, 2018	Oct. 07, 2019
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.249

ANSI C63.10-2013

1.6 Deviation from Test Standard and Measurement Procedure

None

1.7 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
AC conducted emission	± 2.92 dB
Radiated emission ≤ 1 GHz	± 3.41 dB
Radiated emission > 1 GHz	± 4.59 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	25°C / 59%	Alex Tsai
Radiated Emissions	03CH01-WS	28°C / 63%	Roger Lu Akun Chung

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISSED#: 10807A-1
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions	Charging	---	---	2
Field Strength of Fundamental	GFSK	2402, 2441, 2479	1 Mbps	1
Radiated Emissions ≤ 1GHz	GFSK	2402	1 Mbps	1
	Charging	---	---	2
Radiated Emissions > 1GHz	GFSK	2402, 2441, 2479	1 Mbps	1
20dB bandwidth	GFSK	2402, 2441, 2479	1 Mbps	1

NOTE:

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.
2. The test configurations are listed as follows:
Configuration 1 : Battery mode
Configuration 2 : Charging mode
3. Three different types of strap materials (leather, metal and silicon) had been covered during the pretest and found that silicon strap material was the worst case and was selected for final test.

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.


3.1.3 Test Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

Mode	Charging	Test Freq. (MHz)	---
Power Phase	Line		

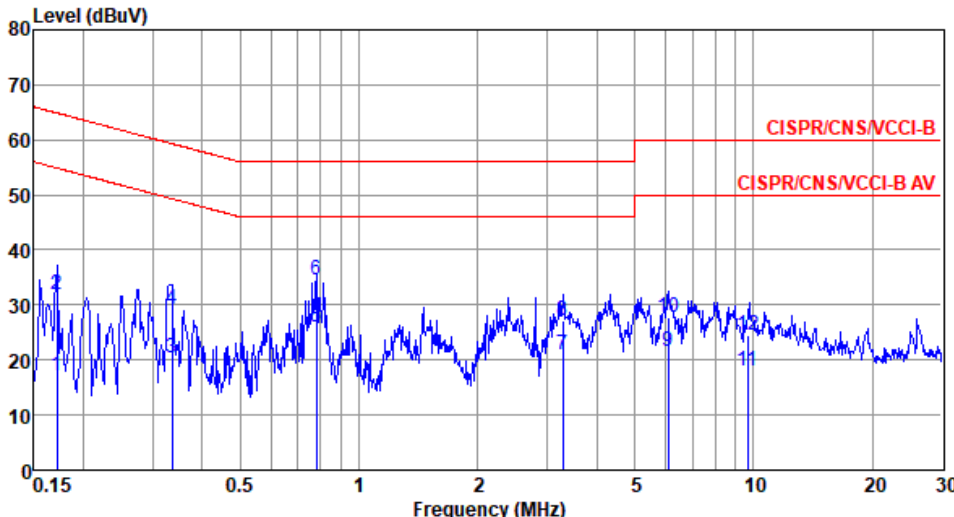

Freq	Level	Limit	Over	Read	LISN	cable		
MHz	dBuV	Line	Limit	Level	factor	loss	Remark	
		dBuV	dB	dBuV	dB	dB		
1	0.171	17.13	54.90	-37.77	7.39	9.53	0.06	Average
2	0.171	31.74	64.90	-33.16	22.00	9.53	0.06	QP
3	0.336	20.39	49.31	-28.92	10.51	9.56	0.08	Average
4	0.336	29.23	59.31	-30.08	19.35	9.56	0.08	QP
5*	0.779	25.99	46.00	-20.01	16.02	9.59	0.09	Average
6	0.779	34.46	56.00	-21.54	24.49	9.59	0.09	QP
7	3.293	20.93	46.00	-25.07	10.70	9.61	0.25	Average
8	3.293	27.12	56.00	-28.88	16.89	9.61	0.25	QP
9	6.089	21.58	50.00	-28.42	11.21	9.63	0.35	Average
10	6.089	27.88	60.00	-32.12	17.51	9.63	0.35	QP
11	9.668	18.10	50.00	-31.90	7.62	9.65	0.43	Average
12	9.668	24.57	60.00	-35.43	14.09	9.65	0.43	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Mode	Charging	Test Freq. (MHz)	---																																																																																																																																							
Power Phase	Neutral																																																																																																																																									
Level (dBuV) Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>LISN</th><th>cable</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>Line</th><th>Limit</th><th>Level</th><th>factor</th><th>loss</th><th>Remark</th></tr><tr><th></th><th></th><th></th><th>dBuV</th><th>dB</th><th>dBuV</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>0.162</td><td>28.23</td><td>55.34</td><td>-27.11</td><td>18.48</td><td>9.57</td><td>0.06</td><td>Average</td></tr><tr><td>2</td><td>0.162</td><td>37.20</td><td>65.34</td><td>-28.14</td><td>27.45</td><td>9.57</td><td>0.06</td><td>QP</td></tr><tr><td>3</td><td>0.243</td><td>17.57</td><td>52.00</td><td>-34.43</td><td>7.78</td><td>9.59</td><td>0.07</td><td>Average</td></tr><tr><td>4</td><td>0.243</td><td>29.30</td><td>62.00</td><td>-32.70</td><td>19.51</td><td>9.59</td><td>0.07</td><td>QP</td></tr><tr><td>5*</td><td>0.771</td><td>25.56</td><td>46.00</td><td>-20.44</td><td>15.64</td><td>9.63</td><td>0.09</td><td>Average</td></tr><tr><td>6</td><td>0.771</td><td>32.99</td><td>56.00</td><td>-23.01</td><td>23.07</td><td>9.63</td><td>0.09</td><td>QP</td></tr><tr><td>7</td><td>1.282</td><td>17.45</td><td>46.00</td><td>-28.55</td><td>7.45</td><td>9.64</td><td>0.12</td><td>Average</td></tr><tr><td>8</td><td>1.282</td><td>24.39</td><td>56.00</td><td>-31.61</td><td>14.39</td><td>9.64</td><td>0.12</td><td>QP</td></tr><tr><td>9</td><td>4.478</td><td>18.40</td><td>46.00</td><td>-27.60</td><td>8.17</td><td>9.67</td><td>0.30</td><td>Average</td></tr><tr><td>10</td><td>4.478</td><td>24.96</td><td>56.00</td><td>-31.04</td><td>14.73</td><td>9.67</td><td>0.30</td><td>QP</td></tr><tr><td>11</td><td>6.089</td><td>19.85</td><td>50.00</td><td>-30.15</td><td>9.54</td><td>9.68</td><td>0.35</td><td>Average</td></tr><tr><td>12</td><td>6.089</td><td>25.94</td><td>60.00</td><td>-34.06</td><td>15.63</td><td>9.68</td><td>0.35</td><td>QP</td></tr></tbody></table>					Freq	Level	Limit	Over	Read	LISN	cable			MHz	dBuV	Line	Limit	Level	factor	loss	Remark				dBuV	dB	dBuV	dB	dB		1	0.162	28.23	55.34	-27.11	18.48	9.57	0.06	Average	2	0.162	37.20	65.34	-28.14	27.45	9.57	0.06	QP	3	0.243	17.57	52.00	-34.43	7.78	9.59	0.07	Average	4	0.243	29.30	62.00	-32.70	19.51	9.59	0.07	QP	5*	0.771	25.56	46.00	-20.44	15.64	9.63	0.09	Average	6	0.771	32.99	56.00	-23.01	23.07	9.63	0.09	QP	7	1.282	17.45	46.00	-28.55	7.45	9.64	0.12	Average	8	1.282	24.39	56.00	-31.61	14.39	9.64	0.12	QP	9	4.478	18.40	46.00	-27.60	8.17	9.67	0.30	Average	10	4.478	24.96	56.00	-31.04	14.73	9.67	0.30	QP	11	6.089	19.85	50.00	-30.15	9.54	9.68	0.35	Average	12	6.089	25.94	60.00	-34.06	15.63	9.68	0.35	QP
	Freq	Level	Limit	Over	Read	LISN	cable																																																																																																																																			
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark																																																																																																																																		
			dBuV	dB	dBuV	dB	dB																																																																																																																																			
1	0.162	28.23	55.34	-27.11	18.48	9.57	0.06	Average																																																																																																																																		
2	0.162	37.20	65.34	-28.14	27.45	9.57	0.06	QP																																																																																																																																		
3	0.243	17.57	52.00	-34.43	7.78	9.59	0.07	Average																																																																																																																																		
4	0.243	29.30	62.00	-32.70	19.51	9.59	0.07	QP																																																																																																																																		
5*	0.771	25.56	46.00	-20.44	15.64	9.63	0.09	Average																																																																																																																																		
6	0.771	32.99	56.00	-23.01	23.07	9.63	0.09	QP																																																																																																																																		
7	1.282	17.45	46.00	-28.55	7.45	9.64	0.12	Average																																																																																																																																		
8	1.282	24.39	56.00	-31.61	14.39	9.64	0.12	QP																																																																																																																																		
9	4.478	18.40	46.00	-27.60	8.17	9.67	0.30	Average																																																																																																																																		
10	4.478	24.96	56.00	-31.04	14.73	9.67	0.30	QP																																																																																																																																		
11	6.089	19.85	50.00	-30.15	9.54	9.68	0.35	Average																																																																																																																																		
12	6.089	25.94	60.00	-34.06	15.63	9.68	0.35	QP																																																																																																																																		
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).																																																																																																																																										
2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																																										

3.2 Radiated Emission

This section includes field strength of fundamental, field strength of harmonics and emissions radiated outside of the operating frequency bands.

3.2.1 Limit of field strength of fundamental and field strength of harmonics

Fundamental Frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
2400–2483.5 MHz	50	500

3.2.2 Limit of Unwanted Emissions

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in below table, whichever is the lesser attenuation.

Radiated emission limits			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009–0.490	2400/F(kHz)	48.5 - 13.8	300
0.490–1.705	24000/F(kHz)	33.8 - 23	30
1.705–30.0	30	29	30
30–88	100	40	3
88–216	150	43.5	3
216–960	200	46	3
Above 960	500	54	3

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.2.3 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

1. Radiated emission below 1GHz
120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission
2. Radiated emission above 1GHz / Peak value except fundamental
RBW=1MHz, VBW=3MHz and Peak detector
3. Radiated emission above 1GHz / Average value for field strength of fundamental and harmonics
The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:


$$20\log (\text{Duty cycle}) = 20\log \frac{0.16957*2 \text{ ms}}{100 \text{ ms}} = -49.39\text{dB}$$

Please see page 27 for plotted duty


4. Radiated emission above 1GHz / Average value for other emissions
RBW=1MHz, VBW=10Hz and Peak detector
5. Radiated emission Peak value for fundamental
RBW=3MHz, VBW=10MHz and Peak detector

3.2.4 Test Setup

Radiated Emissions below 1 GHz

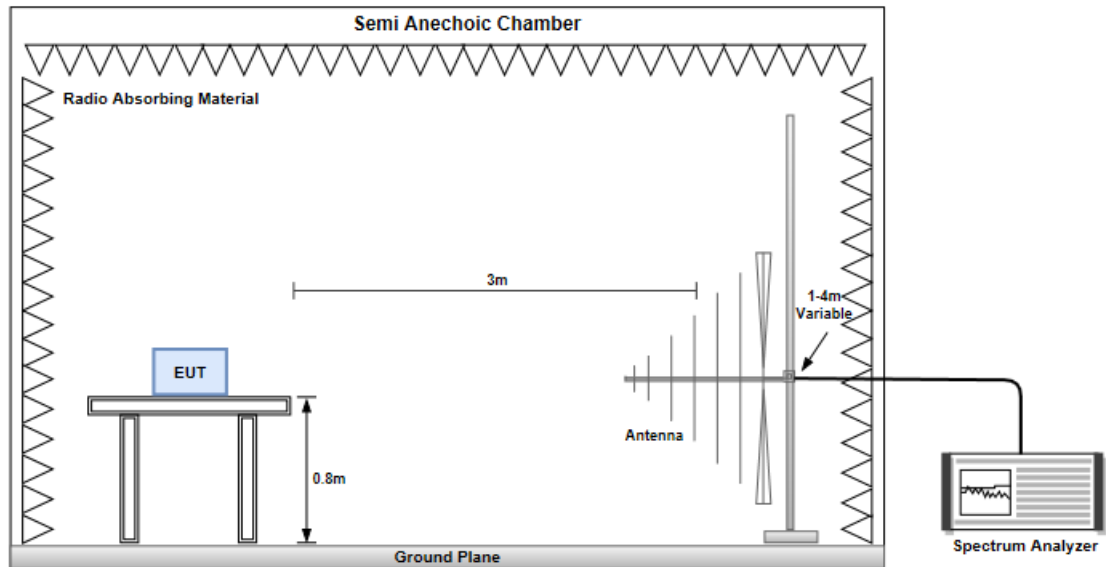


Radiated Emissions above 1 GHz

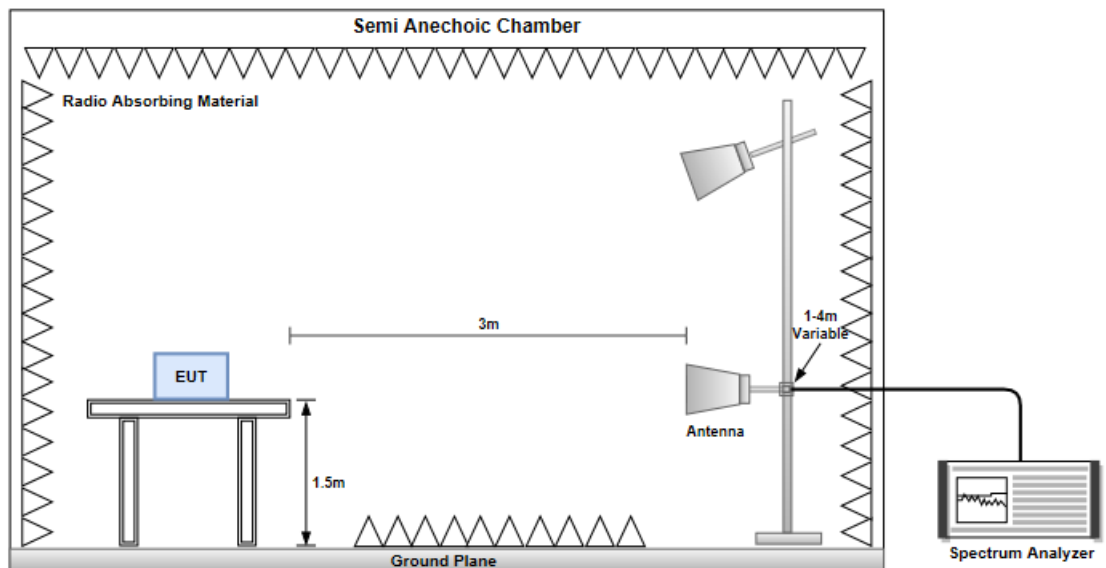

3.2.5 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	1

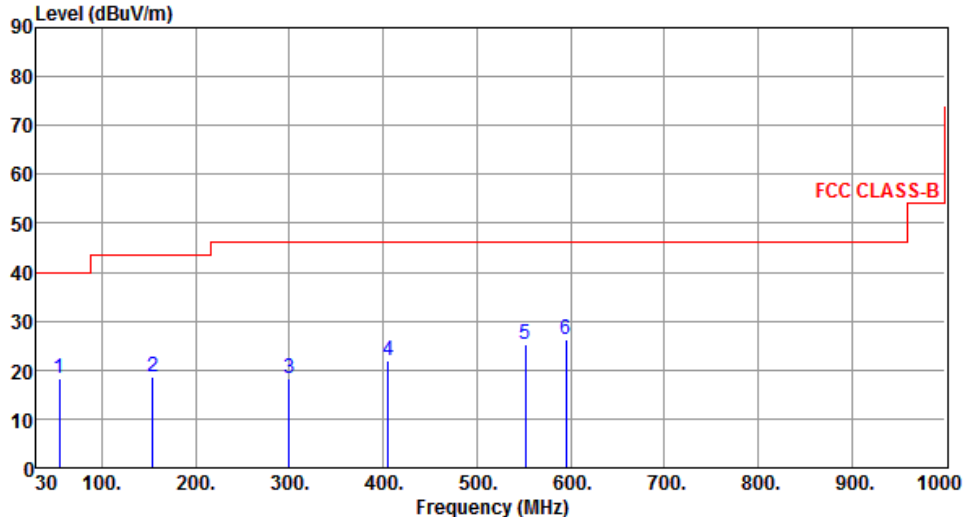


The graph displays the radiated unwanted emissions for FCC CLASS-B. The y-axis represents the Level in dBUV/m, ranging from 0 to 90. The x-axis represents the Frequency in MHz, ranging from 30 to 1000. A red line indicates the FCC CLASS-B limit, which is 40 dBUV/m from 30 to 100 MHz, 45 dBUV/m from 100 to 300 MHz, and 55 dBUV/m from 300 to 1000 MHz. Six measured peaks are labeled with numbers 1 through 6, corresponding to the data in the table below.

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	54.25	18.33	40.00	-21.67	27.01	-8.68	Peak	---	---
2	154.16	18.67	43.50	-24.83	27.11	-8.44	Peak	---	---
3	299.66	18.37	46.00	-27.63	26.48	-8.11	Peak	---	---
4	405.39	21.93	46.00	-24.07	27.37	-5.44	Peak	---	---
5	551.86	25.25	46.00	-20.75	27.71	-2.46	Peak	---	---
6	595.51	26.34	46.00	-19.66	27.48	-1.14	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	1

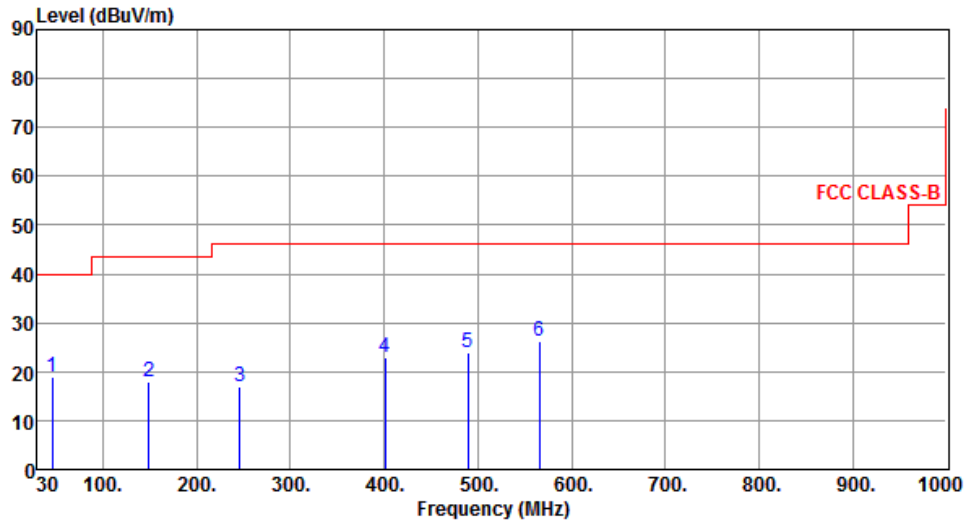

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	45.52	18.83	40.00	-21.17	27.30	-8.47	Peak	---	---
2	149.31	17.87	43.50	-25.63	26.43	-8.56	Peak	---	---
3	246.31	17.08	46.00	-28.92	27.11	-10.03	Peak	---	---
4	401.51	22.88	46.00	-23.12	28.42	-5.54	Peak	---	---
5	489.78	24.04	46.00	-21.96	27.48	-3.44	Peak	---	---
6	565.44	26.24	46.00	-19.76	28.30	-2.06	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.


Mode	Charging	Test Freq. (MHz)	---
Polarization	Horizontal	Test Configuration	2

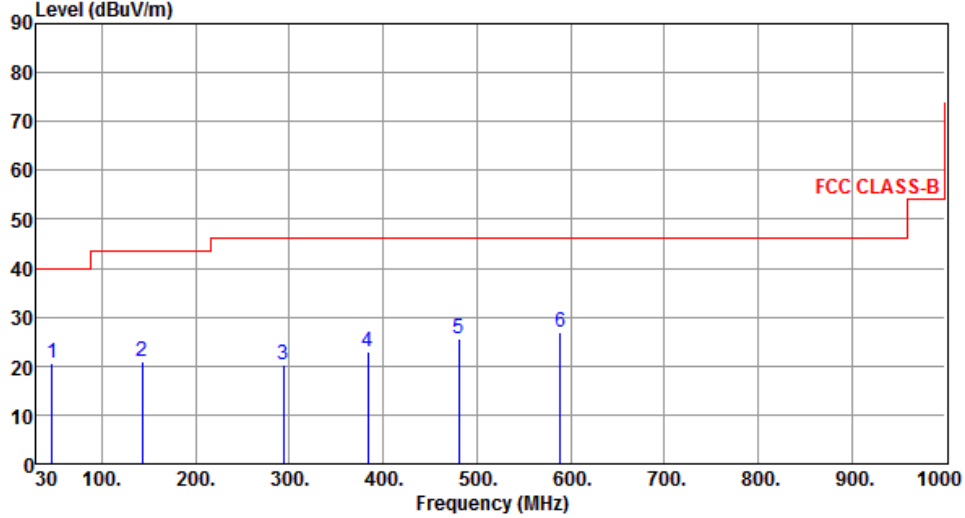

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	46.49	20.45	40.00	-19.55	28.91	-8.46	Peak	---	---
2	142.52	20.93	43.50	-22.57	29.71	-8.78	Peak	---	---
3	293.84	20.11	46.00	-25.89	28.36	-8.25	Peak	---	---
4	384.05	22.98	46.00	-23.02	28.85	-5.87	Peak	---	---
5	481.05	25.60	46.00	-20.40	29.15	-3.55	Peak	---	---
6	588.72	26.91	46.00	-19.09	28.29	-1.38	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
 Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Mode	Charging	Test Freq. (MHz)	---
Polarization	Vertical	Test Configuration	2

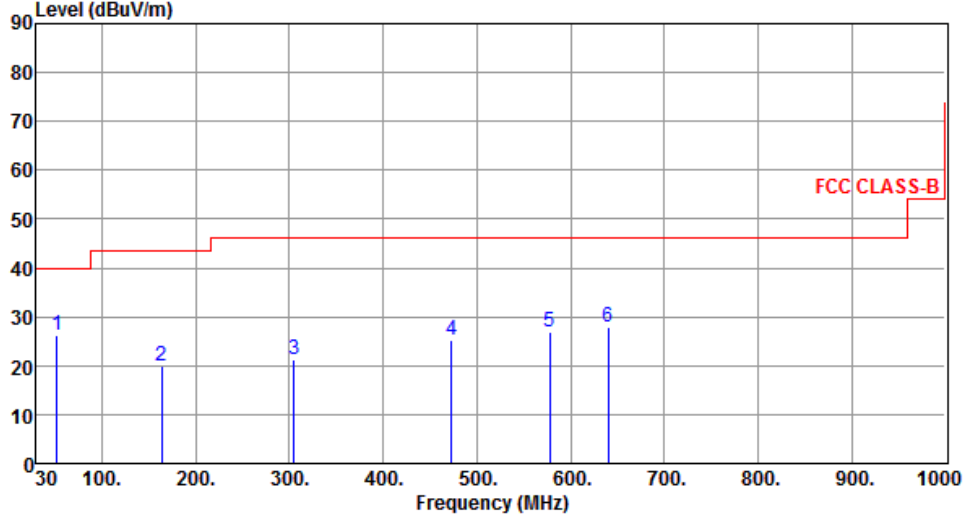


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	52.31	26.26	40.00	-13.74	34.84	-8.58	Peak	---	---
2	163.86	19.95	43.50	-23.55	28.67	-8.72	Peak	---	---
3	304.51	21.34	46.00	-24.66	29.24	-7.90	Peak	---	---
4	473.29	25.30	46.00	-20.70	28.98	-3.68	Peak	---	---
5	578.05	26.94	46.00	-19.06	28.58	-1.64	Peak	---	---
6	640.13	27.75	46.00	-18.25	28.01	-0.26	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
 Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	1

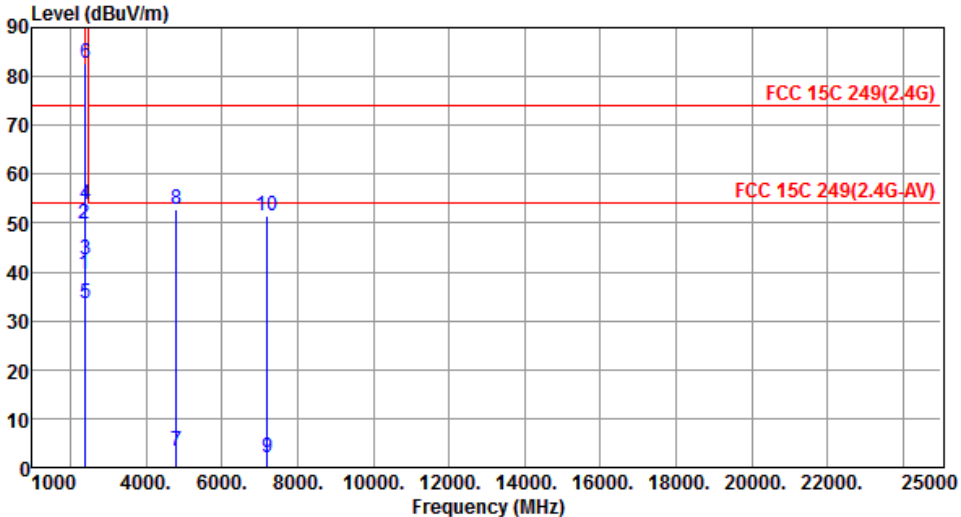

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.44	54.00	-14.56	42.51	-3.07	Average	100	356
2	2390.00	49.79	74.00	-24.21	52.86	-3.07	Peak	100	356
3	2400.00	42.42	54.00	-11.58	45.52	-3.10	Average	100	356
4	2400.00	53.93	74.00	-20.07	57.03	-3.10	Peak	100	356
5	2402.00	33.44	94.00	-60.56	36.53	-3.09	Average	100	356
6	2402.00	82.83	114.00	-31.17	85.92	-3.09	Peak	100	356
7	4804.00	3.30	54.00	-50.70	-0.20	3.50	Average	100	15
8	4804.00	52.69	74.00	-21.31	49.19	3.50	Peak	100	15
9	7206.00	2.11	54.00	-51.89	-6.53	8.64	Average	100	23
10	7206.00	51.50	74.00	-22.50	42.86	8.64	Peak	100	23

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	1

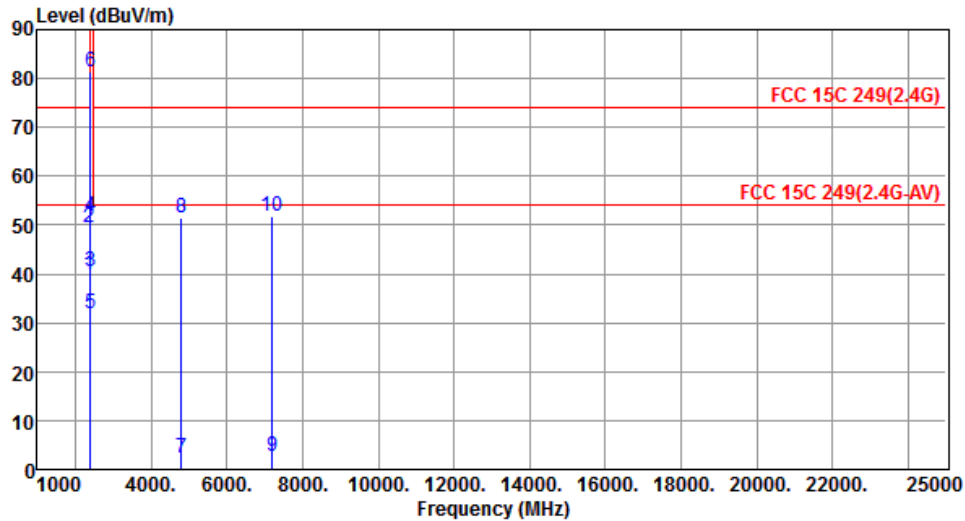


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.79	54.00	-14.21	42.86	-3.07	Average	100	236
2	2390.00	49.47	74.00	-24.53	52.54	-3.07	Peak	100	236
3	2400.00	40.48	54.00	-13.52	43.58	-3.10	Average	100	236
4	2400.00	51.79	74.00	-22.21	54.89	-3.10	Peak	100	236
5	2402.00	31.81	94.00	-62.19	34.90	-3.09	Average	100	236
6	2402.00	81.20	114.00	-32.80	84.29	-3.09	Peak	100	236
7	4804.00	2.19	54.00	-51.81	-1.31	3.50	Average	100	152
8	4804.00	51.58	74.00	-22.42	48.08	3.50	Peak	100	152
9	7206.00	2.50	54.00	-51.50	-6.14	8.64	Average	100	156
10	7206.00	51.89	74.00	-22.11	43.25	8.64	Peak	100	156

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	1

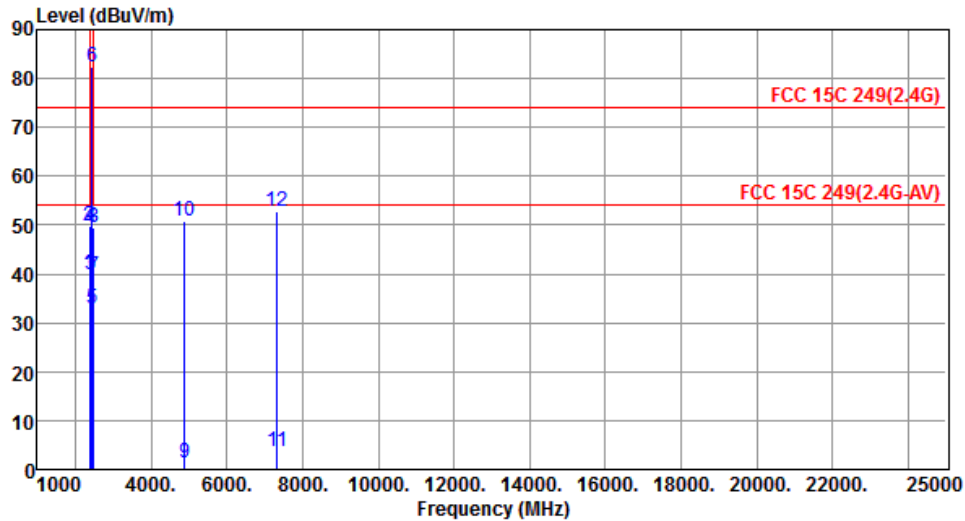


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.79	54.00	-14.21	42.86	-3.07	Average	100	366
2	2390.00	49.82	74.00	-24.18	52.89	-3.07	Peak	100	366
3	2400.00	39.86	54.00	-14.14	42.96	-3.10	Average	100	366
4	2400.00	49.86	74.00	-24.14	52.96	-3.10	Peak	100	366
5	2441.00	32.91	94.00	-61.09	36.04	-3.13	Average	100	366
6	2441.00	82.30	114.00	-31.70	85.43	-3.13	Peak	100	366
7	2483.50	39.56	54.00	-14.44	42.78	-3.22	Average	100	366
8	2483.50	49.56	74.00	-24.44	52.78	-3.22	Peak	100	366
9	4882.00	1.48	54.00	-52.52	-2.13	3.61	Average	100	23
10	4882.00	50.87	74.00	-23.13	47.26	3.61	Peak	100	23
11	7323.00	3.57	54.00	-50.43	-5.22	8.79	Average	100	22
12	7323.00	52.96	74.00	-21.04	44.17	8.79	Peak	100	22

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	1

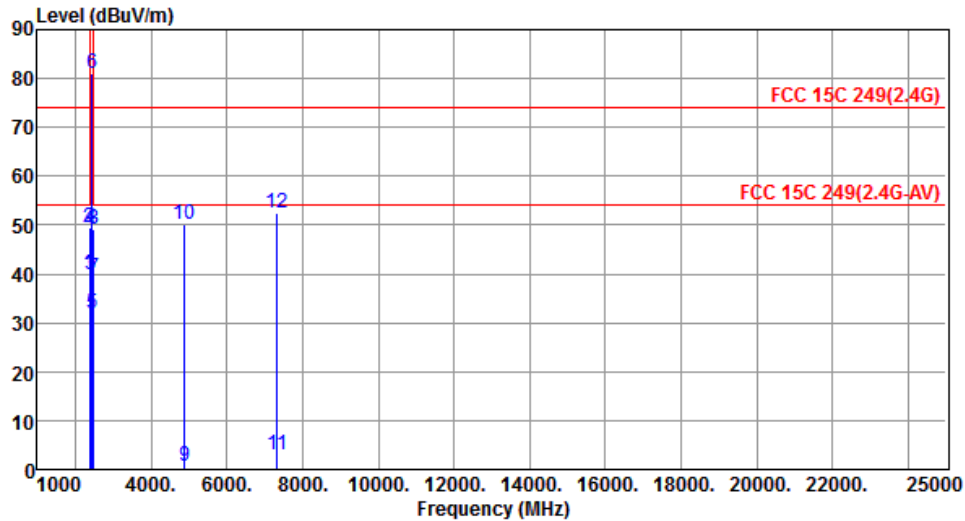


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.78	54.00	-14.22	42.85	-3.07	Average	100	259
2	2390.00	49.34	74.00	-24.66	52.41	-3.07	Peak	100	259
3	2400.00	39.75	54.00	-14.25	42.85	-3.10	Average	100	259
4	2400.00	49.64	74.00	-24.36	52.74	-3.10	Peak	100	259
5	2441.00	31.73	94.00	-62.27	34.86	-3.13	Average	100	259
6	2441.00	81.12	114.00	-32.88	84.25	-3.13	Peak	100	259
7	2483.50	39.25	54.00	-14.75	42.47	-3.22	Average	100	259
8	2483.50	49.23	74.00	-24.77	52.45	-3.22	Peak	100	259
9	4882.00	0.69	54.00	-53.31	-2.92	3.61	Average	100	154
10	4882.00	50.08	74.00	-23.92	46.47	3.61	Peak	100	154
11	7323.00	3.15	54.00	-50.85	-5.64	8.79	Average	100	152
12	7323.00	52.54	74.00	-21.46	43.75	8.79	Peak	100	152

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2479
Polarization	Horizontal	Test Configuration	1

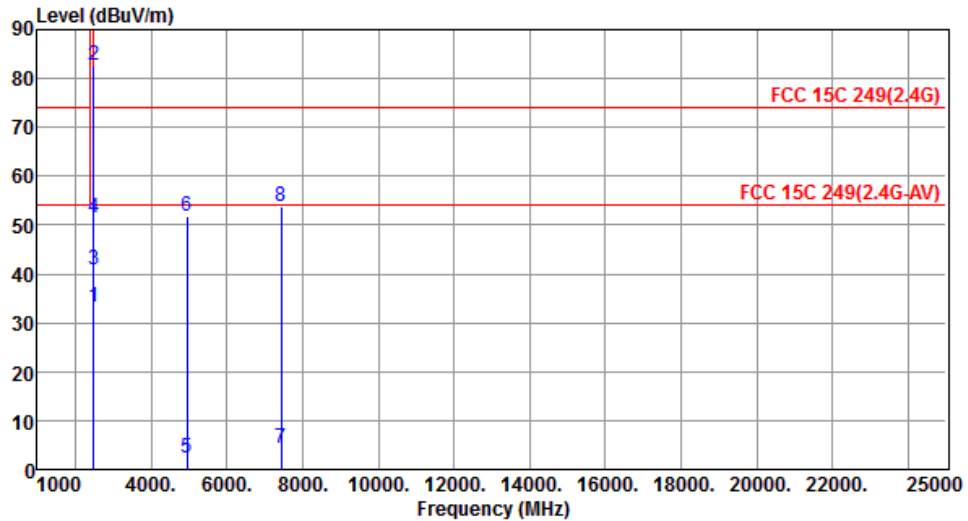


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2479.00	33.17	94.00	-60.83	36.38	-3.21	Average	128	359
2	2479.00	82.56	114.00	-31.44	85.77	-3.21	Peak	128	359
3	2483.50	40.73	54.00	-13.27	43.95	-3.22	Average	128	359
4	2483.50	51.60	74.00	-22.40	54.82	-3.22	Peak	128	359
5	4958.00	2.47	54.00	-51.53	-1.38	3.85	Average	100	27
6	4958.00	51.86	74.00	-22.14	48.01	3.85	Peak	100	27
7	7437.00	4.45	54.00	-49.55	-4.07	8.52	Average	100	26
8	7437.00	53.84	74.00	-20.16	45.32	8.52	Peak	100	26

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2479
Polarization	Vertical	Test Configuration	1


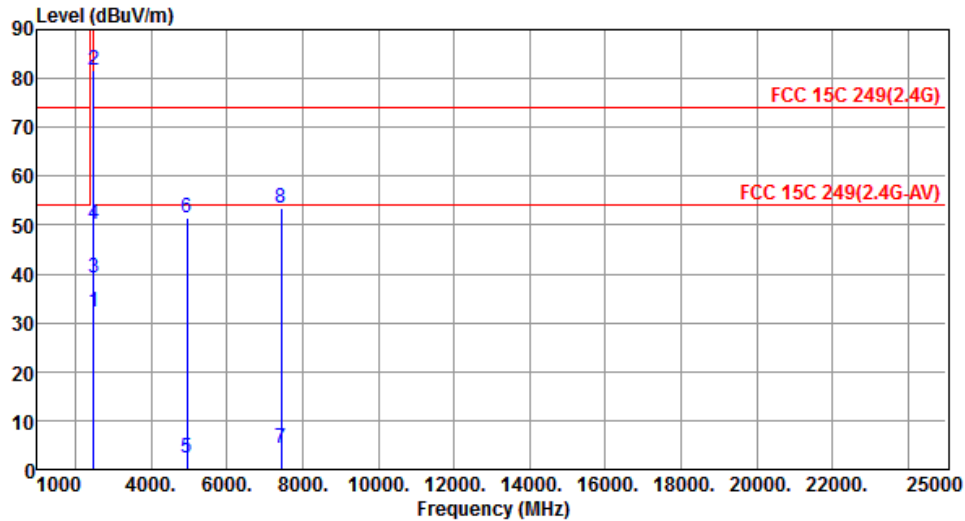


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2479.00	32.25	94.00	-61.75	35.46	-3.21	Average	100	258
2	2479.00	81.64	114.00	-32.36	84.85	-3.21	Peak	100	258
3	2483.50	39.03	54.00	-14.97	42.25	-3.22	Average	100	258
4	2483.50	50.03	74.00	-23.97	53.25	-3.22	Peak	100	258
5	4958.00	2.19	54.00	-51.81	-1.66	3.85	Average	100	147
6	4958.00	51.58	74.00	-22.42	47.73	3.85	Peak	100	147
7	7437.00	4.19	54.00	-49.81	-4.33	8.52	Average	100	150
8	7437.00	53.58	74.00	-20.42	45.06	8.52	Peak	100	150

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

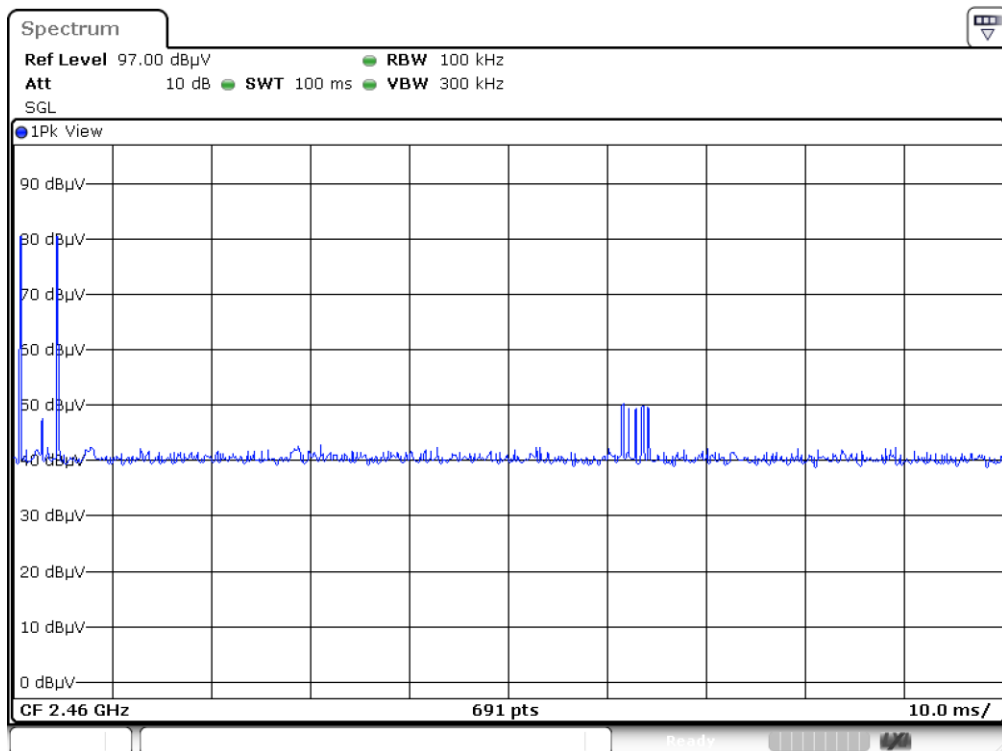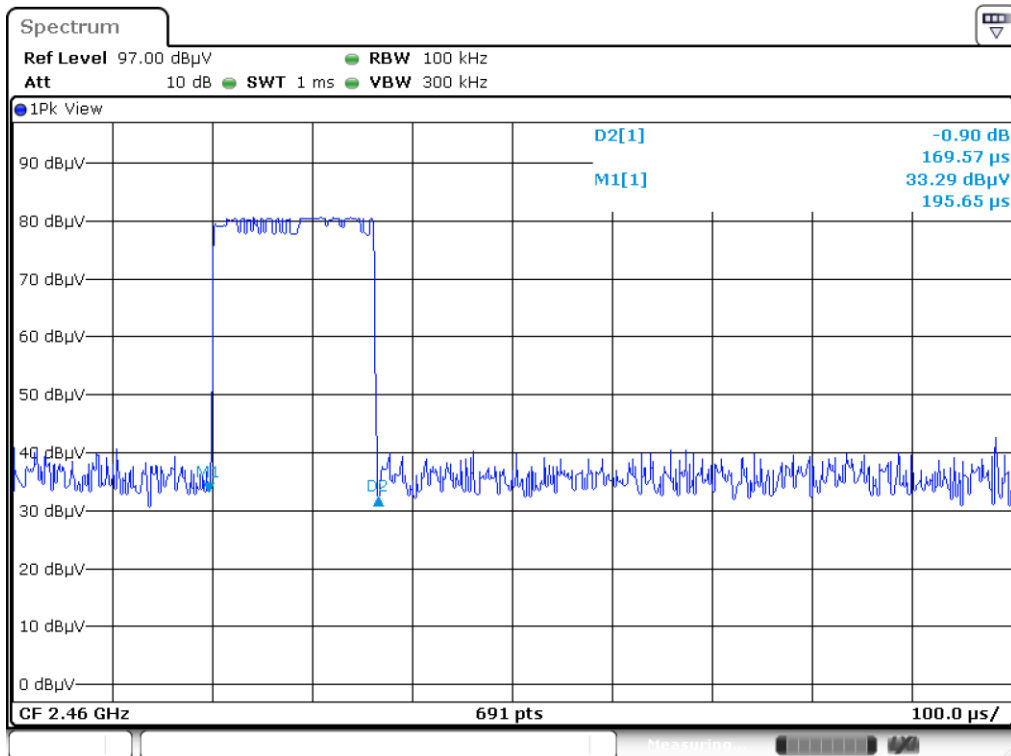


$$20\log (\text{Duty cycle}) = 20\log \frac{0.16957 \times 2 \text{ ms}}{100 \text{ ms}} = -49.39\text{dB}$$

3.3 20dB and Occupied Bandwidth

3.3.1 Test Procedures


1. Set resolution bandwidth (RBW) = 20 kHz, Video bandwidth = 100 kHz.
2. Detector = Peak, Trace mode = max hold
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20dB relative to the maximum level measured in the fundamental emission.
5. Use the occupied measurement function of spectrum analyzer to measure 99% occupied bandwidth.

3.3.2 Test Setup



3.3.3 20dB and Occupied Bandwidth

Freq. (MHz)	20dB Bandwidth (MHz)	Occupied Bandwidth (MHz)
2402	0.530	0.881
2441	0.530	0.899
2479	0.526	0.894

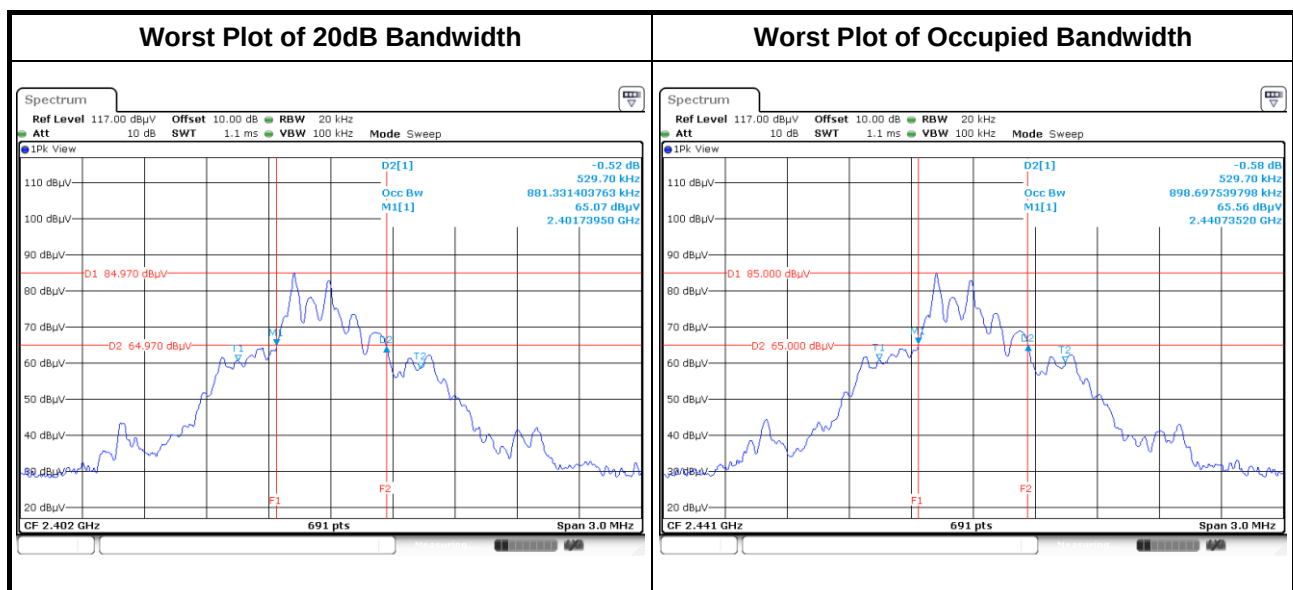

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==