



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	D-Link Corporation
Applicant Address	No.289, Sinhu 3rd Rd., Neihu District, Taipei City 114, Taiwan, R.O.C.
FCC ID	KA2IR879A1

Product Name	AC1900 Wi-Fi Router
Brand Name	D-Link
Model No.	DIR-879
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Nov. 03, 2015
Final Test Date	Dec. 02, 2015
Submission Type	Original Equipment

Statement

Test result included is only for the IEEE 802.11b/g, IEEE 802.11n and IEEE 802.11ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r03, KDB 662911 D01 v02r01, KDB644545 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units	9
3.8. Table for Parameters of Test Software Setting	10
3.9. EUT Operation during Test	10
3.10. Duty Cycle.....	11
3.11. Test Configurations	12
4. TEST RESULT	16
4.1. AC Power Line Conducted Emissions Measurement.....	16
4.2. Maximum Conducted Output Power Measurement.....	20
4.3. Power Spectral Density Measurement	22
4.4. 6dB Spectrum Bandwidth Measurement	31
4.5. Radiated Emissions Measurement	38
4.6. Emissions Measurement	57
4.7. Antenna Requirements	75
5. LIST OF MEASURING EQUIPMENTS	76
6. MEASUREMENT UNCERTAINTY.....	77
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT.....	B1 ~ B3

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR5O2909AA	Rev. 01	Initial issue of report	Dec. 04, 2015
FR5O2909AA	Rev. 02	Updating the information of the adapter	Dec. 07, 2015

1. VERIFICATION OF COMPLIANCE

Product Name : AC1900 Wi-Fi Router
Brand Name : D-Link
Model No. : DIR-879
Applicant : D-Link Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 03, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	7.11 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	0.03 dB
4.3	15.247(e)	Power Spectral Density	Complies	5.65 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	0.04 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.02 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (3TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	<For Non-Beamforming Mode> IEEE 802.11b: 15.02 MHz IEEE 802.11g: 16.76 MHz <For Beamforming Mode> IEEE 802.11ac MCS0/NSS1 (VHT20): 17.89 MHz IEEE 802.11ac MCS0/NSS1 (VHT40): 36.90 MHz
Maximum Conducted Output Power	<For Non-Beamforming Mode> IEEE 802.11b: 29.86 dBm IEEE 802.11g: 29.56 dBm <For Beamforming Mode> IEEE 802.11ac MCS0/NSS1 (VHT20): 28.20 dBm IEEE 802.11ac MCS0/NSS1 (VHT40): 28.15 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Beamforming Function	☒ With beamforming for 802.11n/ac in 2.4GHz and 5GHz.	☐ Without beamforming

Antenna and Band width

Antenna	Three (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V
IEEE 802.11ac	V	V

IEEE 802.11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS0-23
802.11n (HT40)	3	MCS0-23
802.11ac (VHT20)	3	MCS 0-9/Nss1-3
802.11ac (VHT40)	3	MCS 0-9/Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40: IEEE 802.11ac

3.2. Accessories

Power	Brand	Model	Rating
Adapter	LEI	MU24-Y120200-A1	Input:100-240V~50/60Hz, 0.7A Output:12V, 2A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)		TX/RX Function	
					2.4GHz	5GHz	2.4GHz	5GHz
1	Nienyi	NYS1754	PCB Antenna	I-PEX	3	3	TX/RX	RX
2	Nienyi	NYS1751	PCB Antenna	I-PEX	3	3	TX/RX	TX/RX
3	Nienyi	NYS1752	PCB Antenna	I-PEX	3	3	RX	TX/RX
4	Nienyi	NYS1753	PCB Antenna	I-PEX	3	3	TX/RX	TX/RX

Note: The EUT has four Antennas.

For 2.4GHz function:

For IEEE 802.11b/g/n/ac mode (3TX/4RX):

Ant. 1, Ant. 2 and Ant. 4 can be used as transmitting antennas and can transmit simultaneously.


Ant. 1, Ant. 2, Ant. 3 and Ant. 4 can be used as receiving antennas and can receive simultaneously.

For 5GHz function:

For IEEE 802.11a/n/ac mode (3TX/4RX):

Ant. 2, Ant. 3 and Ant. 4 can be used as transmitting antennas and can transmit simultaneously.

Ant. 1, Ant. 2, Ant. 3 and Ant. 4 can be used as receiving antennas and can receive simultaneously.

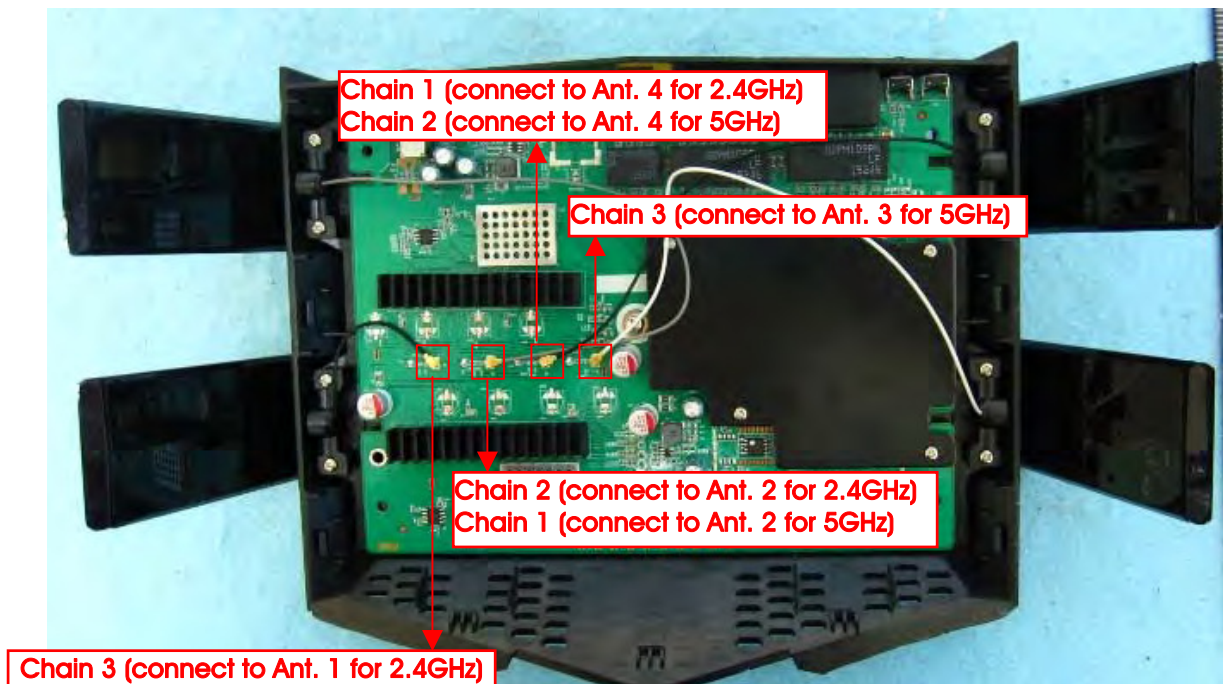

3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	<For Non-Beamforming Mode>			
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	<For Beamforming Mode>			
	11ac VHT20	MCS0/NSS1	1/6/11	1+2+3
	11ac VHT40	MCS0/NSS1	3/6/9	1+2+3
Power Spectral Density	<For Non-Beamforming Mode>			
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	<For Beamforming Mode>			
	11ac VHT20	MCS0/NSS1	1/6/11	1+2+3
	11ac VHT40	MCS0/NSS1	3/6/9	1+2+3
6dB Spectrum Bandwidth	<For Non-Beamforming Mode>			
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	<For Beamforming Mode>			
	11ac VHT20	MCS0/NSS1	1/6/11	1+2+3
	11ac VHT40	MCS0/NSS1	3/6/9	1+2+3
Radiated Emissions Below 1GHz	Normal Link	-	-	-
Radiated Emissions Above 1GHz	<For Non-Beamforming Mode>			
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	<For Beamforming Mode>			
	11ac VHT20	MCS0/NSS1	1/6/11	1+2+3
	11ac VHT40	MCS0/NSS1	3/6/9	1+2+3
Band Edge Emissions	<For Non-Beamforming Mode>			
	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	<For Beamforming Mode>			
	11ac VHT20	MCS0/NSS1	1/6/11	1+2+3
	11ac VHT40	MCS0/NSS1	3/6/9	1+2+3

- Note: 1. All the specification of test configurations and test modes were based on customer's request.
2. VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.
3. There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for 802.11n/ac, after evaluating, beamforming mode has been evaluated to be the worst case, so it was selected to test and record in this test report.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. EUT Normal Link - AP Mode

For Radiated Emission test (Below 1GHz):

Test Mode 1: EUT Normal Link Z axis - AP Mode

For Radiated Emission test (Above 1GHz):

Test Mode 1: EUT CTX Z axis - 2.4GHz WLAN function

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA5O2909) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: 03CH01-CB (Below 1GHz)

Support Unit	Brand	Model	FCC ID
NB*2	DELL	E4300	DoC
NB*2	Apple	Mac Book	DoC

For Test Site No: 03CH01-CB (Above 1GHz)

<For Non-Beamforming Mode>

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC

<For Beamforming Mode>

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
WLAN ac Dongle	Broadcom	Bcm4366	DoC

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E6430	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For Non-Beamforming Mode>

Test Software Version	RTL819x 3.3		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
	2412 MHz	2437 MHz	2462 MHz
802.11b	39/42/39	40/43/41	39/44/41
802.11g	40/44/41	48/50/52	41/45/43

<For Beamforming Mode>

Test Software Version	RTL819x 3.3					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11ac MCS0/NSS1 VHT20	43/46/43	47/50/48	42/46/44	-	-	-
802.11ac MCS0/NSS1 VHT40	-	-	-	43/48/43	46/50/48	43/47/44

3.9. EUT Operation during Test

<For Non-Beamforming Mode>

The EUT was programmed to be in continuously transmitting mode.

<For Beamforming Mode>

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by WLAN ac Dongle and transmit duty cycle no less 98%

3.10. Duty Cycle

<For Non-Beamforming Mode>


Band Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	1.000	1.000	100.00	0.00	0.01
802.11g	1.000	1.000	100.00	0.00	0.01

<For Beamforming Mode>

Band Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ac MCS0/NSS1 VHT20	1.747	1.996	87.53	0.58	0.57
802.11ac MCS0/NSS1 VHT40	1.840	1.990	92.46	0.34	0.54

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions Test Configuration

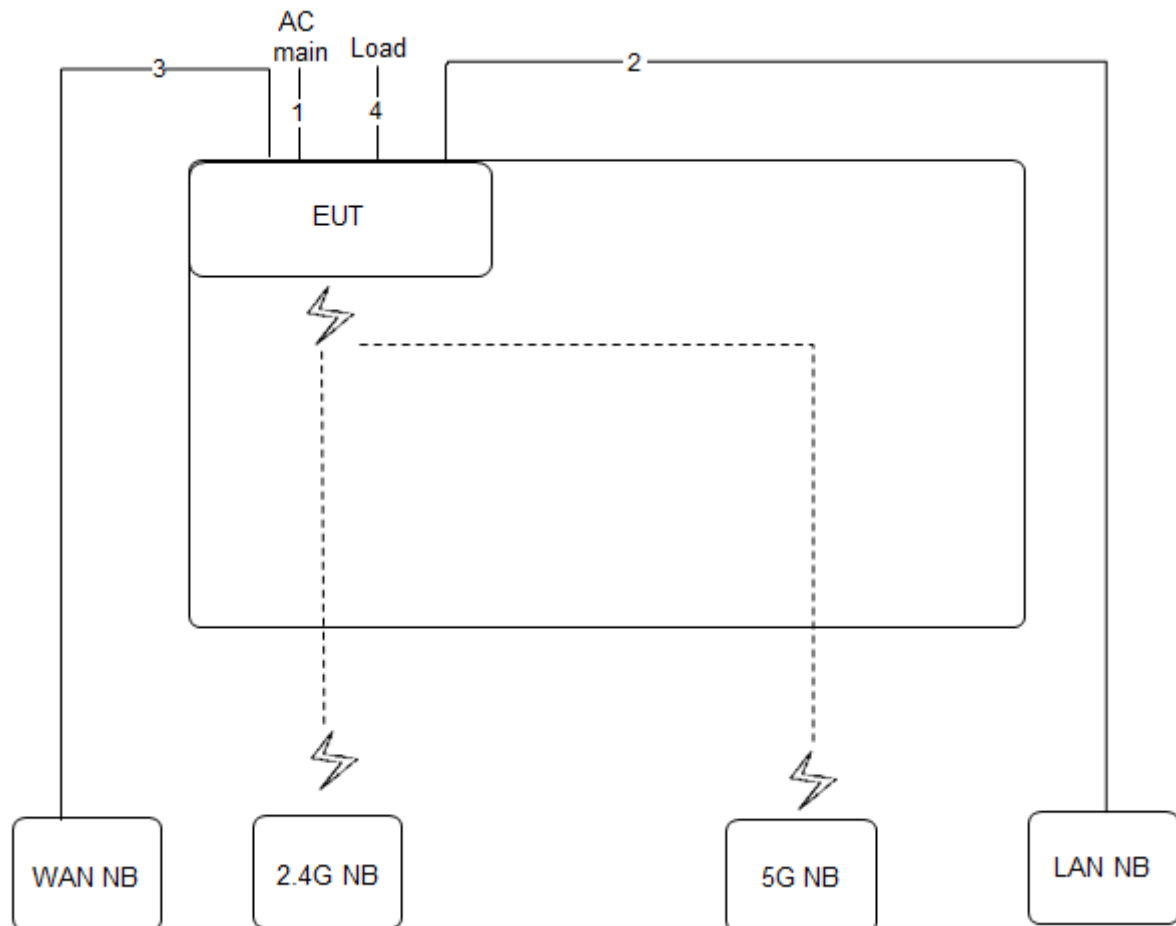

Item	Connection	Shield	Length
1	Power cable	No	1.2m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	RJ-45 cable*3	No	3m

3.11.2. Radiation Emissions Test Configuration


Test Configuration: 30MHz~1GHz

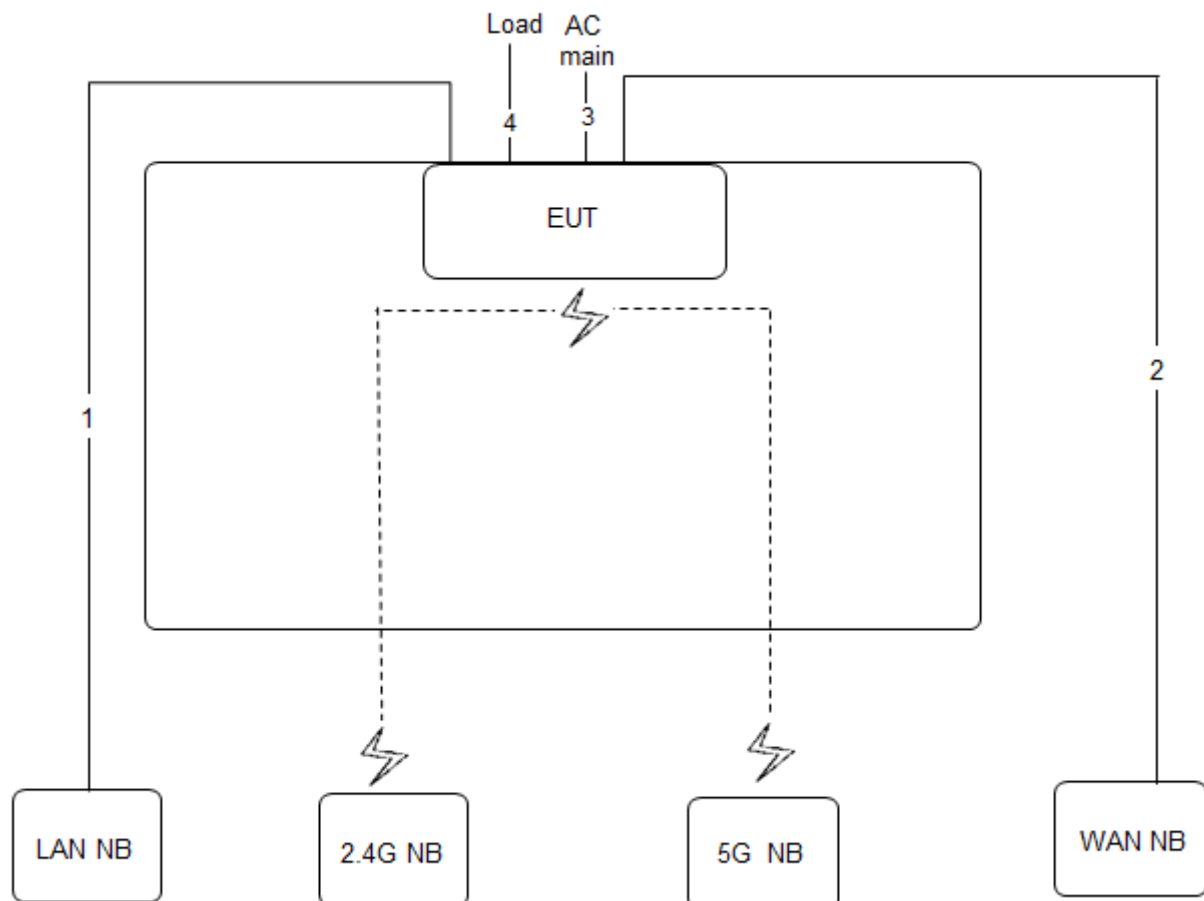

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	10m
3	Power cable	No	1.2m
4	RJ-45 cable *3	No	1.5m

<For Non-Beamforming Mode>


Test Configuration: above 1GHz

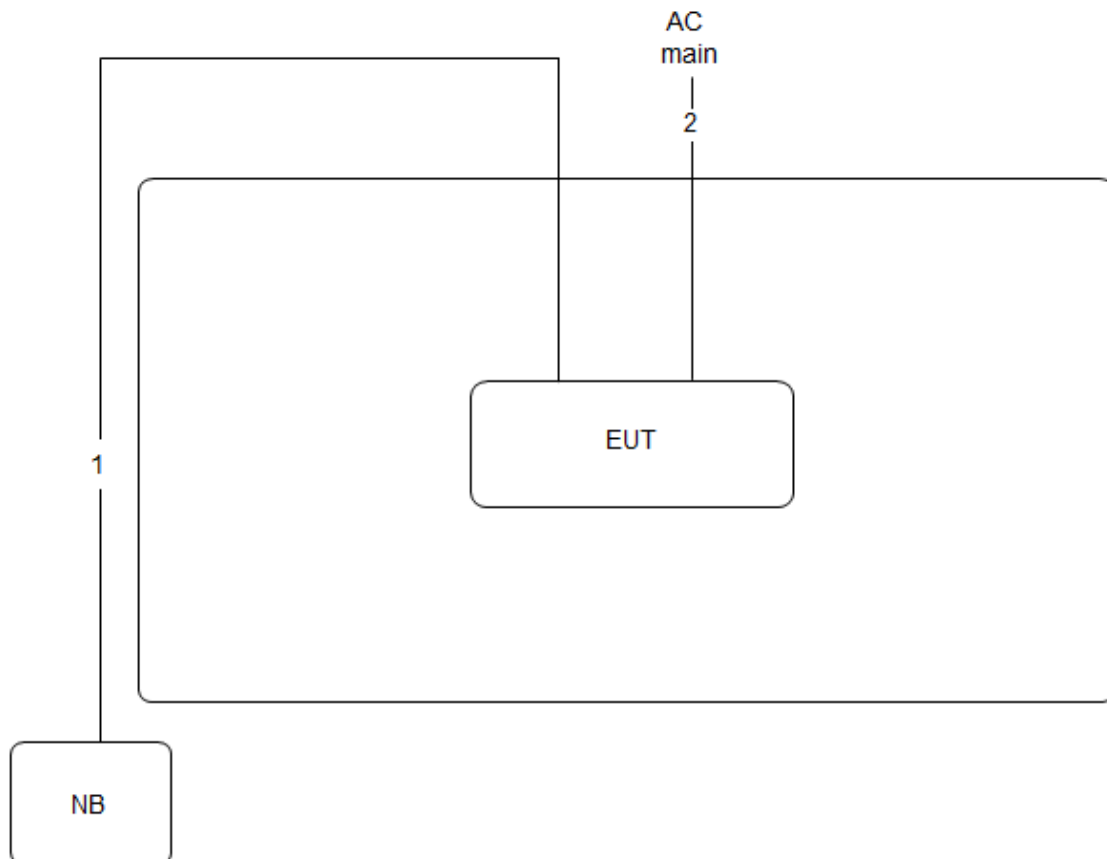

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.2m

<For Beamforming Mode>

Test Configuration: above 1GHz

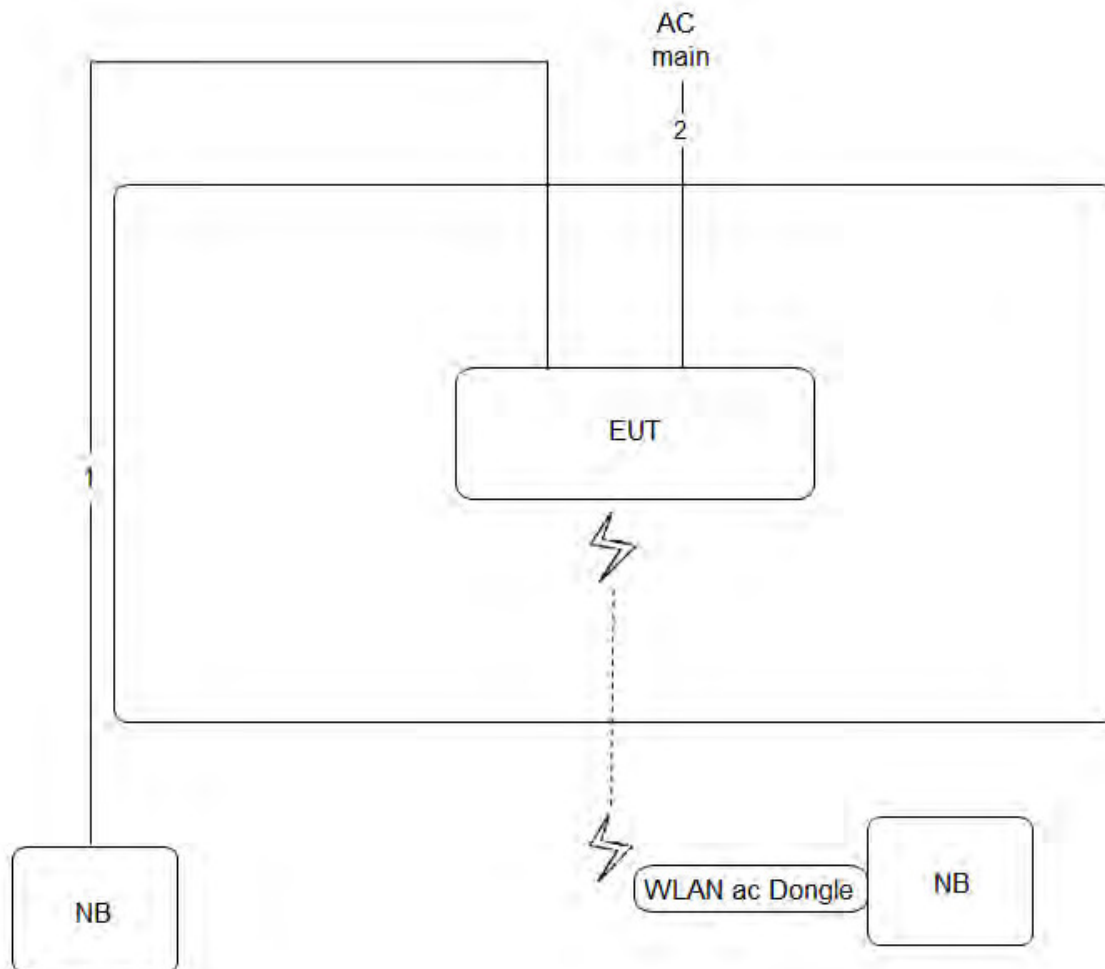

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.2m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

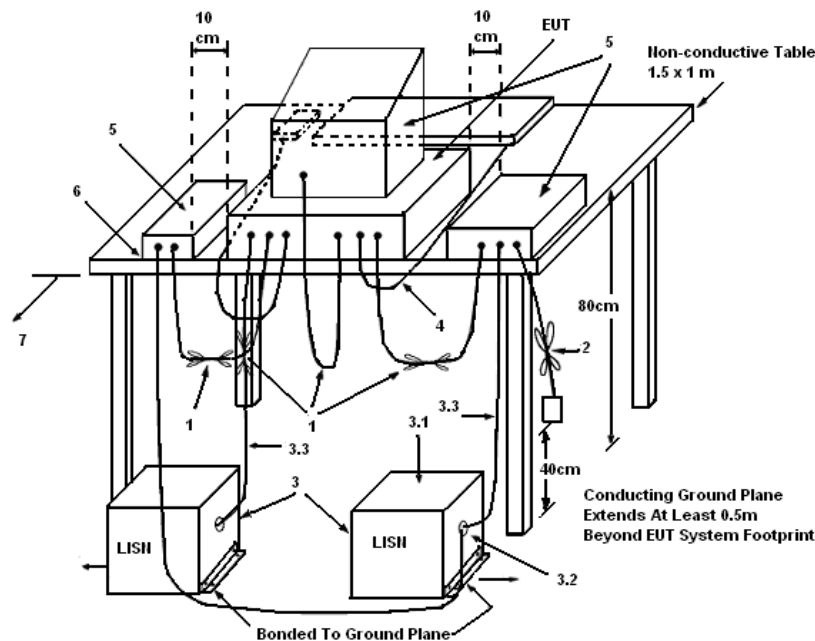

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	58%
Test Engineer	Parody Lin	Phase	Line
Configuration	Normal Link		

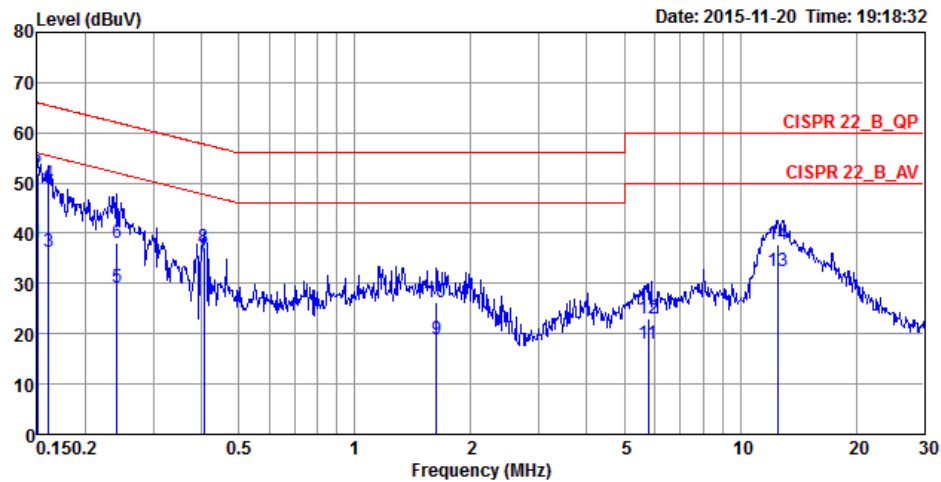

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1500	38.03	-17.97	56.00	28.08	9.93	0.02	LINE	Average
2	0.1500	51.81	-14.19	66.00	41.86	9.93	0.02	LINE	QP
3	0.1607	36.23	-19.20	55.43	26.28	9.93	0.02	LINE	Average
4	0.1607	49.87	-15.56	65.43	39.92	9.93	0.02	LINE	QP
5	0.2416	29.18	-22.86	52.04	19.22	9.93	0.03	LINE	Average
6	0.2416	38.02	-24.02	62.04	28.06	9.93	0.03	LINE	QP
7	0.4061	34.99	-12.74	47.73	25.02	9.93	0.04	LINE	Average
8	0.4061	37.07	-20.66	57.73	27.10	9.93	0.04	LINE	QP
9	1.6276	19.04	-26.96	46.00	9.00	9.98	0.06	LINE	Average
10	1.6276	26.32	-29.68	56.00	16.28	9.98	0.06	LINE	QP
11	5.7743	18.11	-31.89	50.00	7.91	10.08	0.12	LINE	Average
12	5.7743	22.94	-37.06	60.00	12.74	10.08	0.12	LINE	QP
13	12.5156	32.60	-17.40	50.00	22.09	10.26	0.25	LINE	Average
14	12.5156	37.77	-22.23	60.00	27.26	10.26	0.25	LINE	QP

Temperature	25°C	Humidity	58%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	Normal Link		

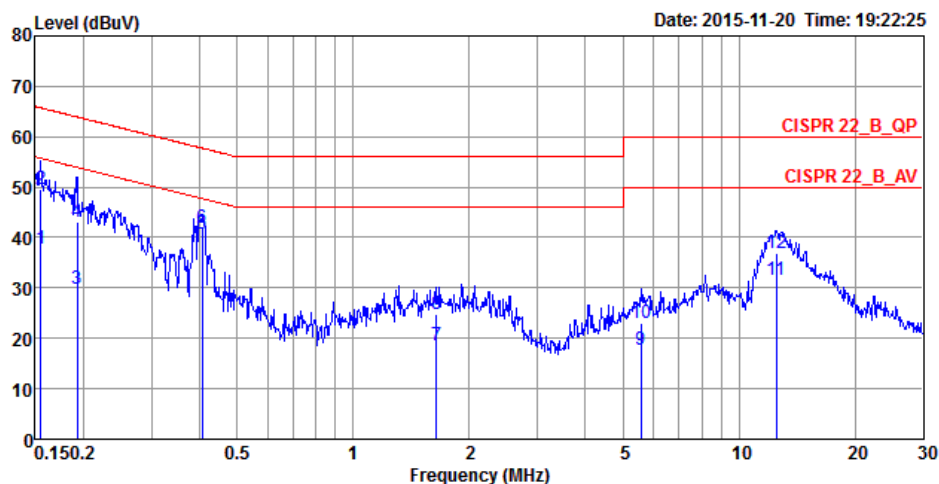

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1548	37.69	-18.05	55.74	27.89	9.78	0.02	NEUTRAL	Average
2	0.1548	49.74	-16.00	65.74	39.94	9.78	0.02	NEUTRAL	QP
3	0.1924	29.83	-24.10	53.93	20.02	9.79	0.02	NEUTRAL	Average
4	0.1924	43.21	-20.72	63.93	33.40	9.79	0.02	NEUTRAL	QP
5	0.4061	40.62	-7.11	47.73	30.79	9.79	0.04	NEUTRAL	Average
6	0.4061	41.92	-15.81	57.73	32.09	9.79	0.04	NEUTRAL	QP
7	1.6450	18.52	-27.48	46.00	8.63	9.83	0.06	NEUTRAL	Average
8	1.6450	24.79	-31.21	56.00	14.90	9.83	0.06	NEUTRAL	QP
9	5.5641	17.72	-32.28	50.00	7.69	9.92	0.11	NEUTRAL	Average
10	5.5641	23.06	-36.94	60.00	13.03	9.92	0.11	NEUTRAL	QP
11	12.5156	31.67	-18.33	50.00	21.36	10.06	0.25	NEUTRAL	Average
12	12.5156	37.03	-22.97	60.00	26.72	10.06	0.25	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

The limit for output power is 30dBm.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r03 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

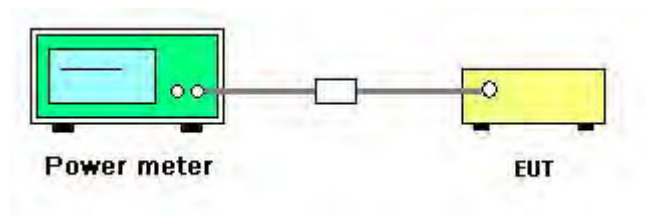

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	24°C	Humidity	60%
Test Engineer	Clemens Fang	Test Date	Nov. 13, 2015~Dec. 02, 2015

<For Non-Beamforming Mode>

Mode	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
802.11b	2412 MHz	24.96	25.16	25.14	29.86	30.00	Complies
	2437 MHz	24.69	24.63	24.61	29.41	30.00	Complies
	2462 MHz	24.71	24.77	24.66	29.48	30.00	Complies
802.11g	2412 MHz	23.13	23.38	23.44	28.09	30.00	Complies
	2437 MHz	24.70	24.72	24.95	29.56	30.00	Complies
	2462 MHz	23.64	23.34	23.56	28.29	30.00	Complies

<For Beamforming Mode>

Mode	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
802.11ac	2412 MHz	22.24	22.35	22.53	27.15	28.23	Complies
MCS0/NSS1	2437 MHz	23.57	23.25	23.45	28.20	28.23	Complies
VHT20	2462 MHz	21.96	22.28	22.47	27.01	28.23	Complies
802.11ac	2422 MHz	22.23	22.10	22.34	27.00	28.23	Complies
MCS0/NSS1	2437 MHz	23.22	23.34	23.56	28.15	28.23	Complies
VHT40	2452 MHz	21.85	21.68	21.97	26.61	28.23	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.77 \text{ dBi}$, so limit=30-(7.77-6)=28.23dBm

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

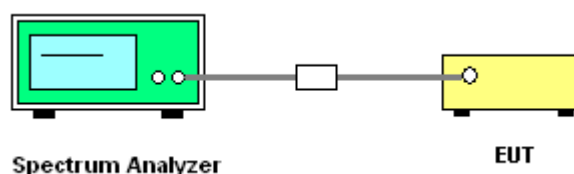

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	24°C	Humidity	60%
Test Engineer	Clemens Fang		

<For Non-Beamforming Mode>

Mode	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
802.11b	2412 MHz	-6.38	-6.06	-6.24	-1.45	6.23	Complies
	2437 MHz	-4.93	-5.62	-5.45	-0.55	6.23	Complies
	2462 MHz	-5.69	-5.42	-6.09	-0.95	6.23	Complies
802.11g	2412 MHz	-8.10	-6.62	-7.36	-2.55	6.23	Complies
	2437 MHz	-4.74	-4.66	-3.33	0.58	6.23	Complies
	2462 MHz	-6.97	-7.10	-6.39	-2.04	6.23	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.77\text{dBi}$, so limit=8-(7.77-6)=6.23dBm/3kHz

<For Beamforming Mode>

Mode	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
802.11ac	2412 MHz	-9.09	-7.84	-8.43	-3.65	6.23	Complies
MCS0/NSS1	2437 MHz	-5.60	-7.27	-7.06	-1.81	6.23	Complies
VHT20	2462 MHz	-8.80	-8.40	-9.66	-4.15	6.23	Complies
802.11ac	2422 MHz	-9.00	-11.67	-9.89	-5.28	6.23	Complies
MCS0/NSS1	2437 MHz	-9.37	-9.65	-9.56	-4.75	6.23	Complies
VHT40	2452 MHz	-11.60	-11.76	-12.10	-7.04	6.23	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.77\text{dBi}$, so limit=8-(7.77-6)=6.23dBm/3kHz

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

<For Non-Beamforming Mode>

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1



Date: 13.NOV.2015 20:32:12

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2




Date: 13.NOV.2015 20:33:43

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3




Date: 13.NOV.2015 20:31:01

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

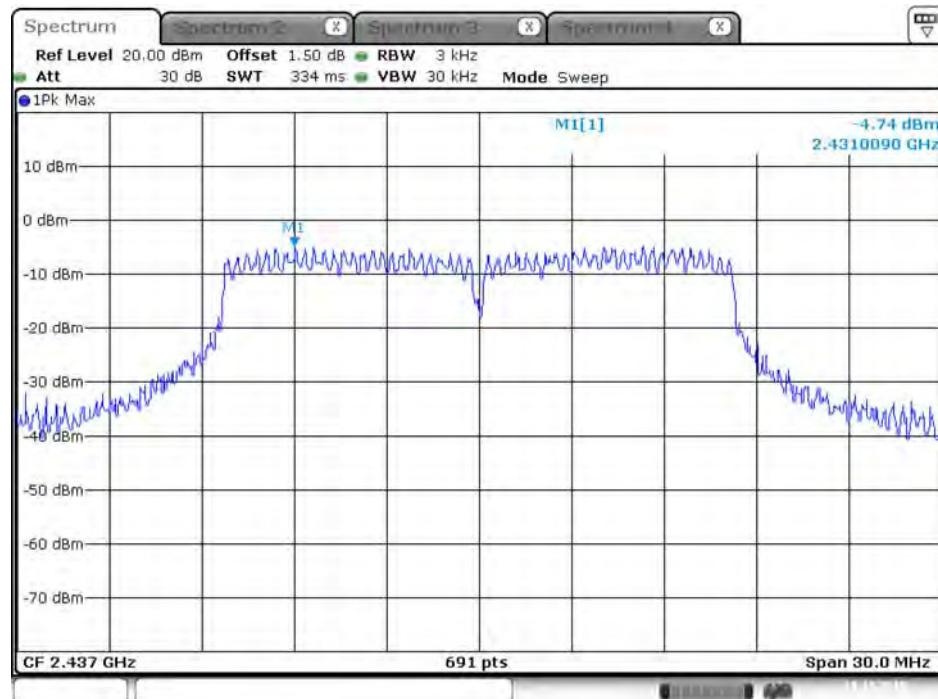


Date: 13.NOV.2015 20:45:25

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2

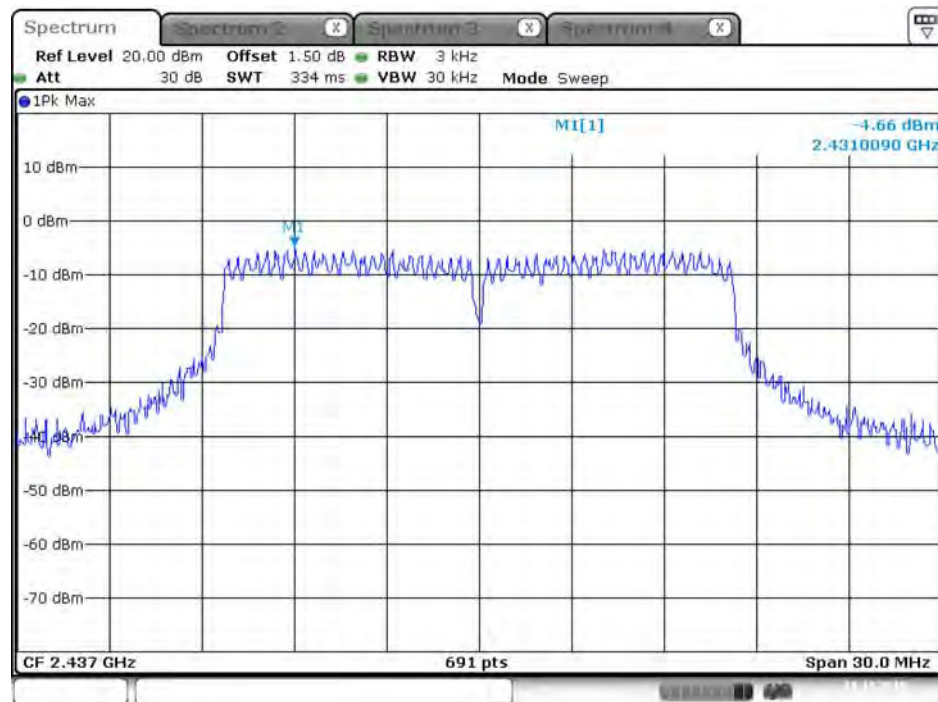

Date: 13.NOV.2015 20:46:09


Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3

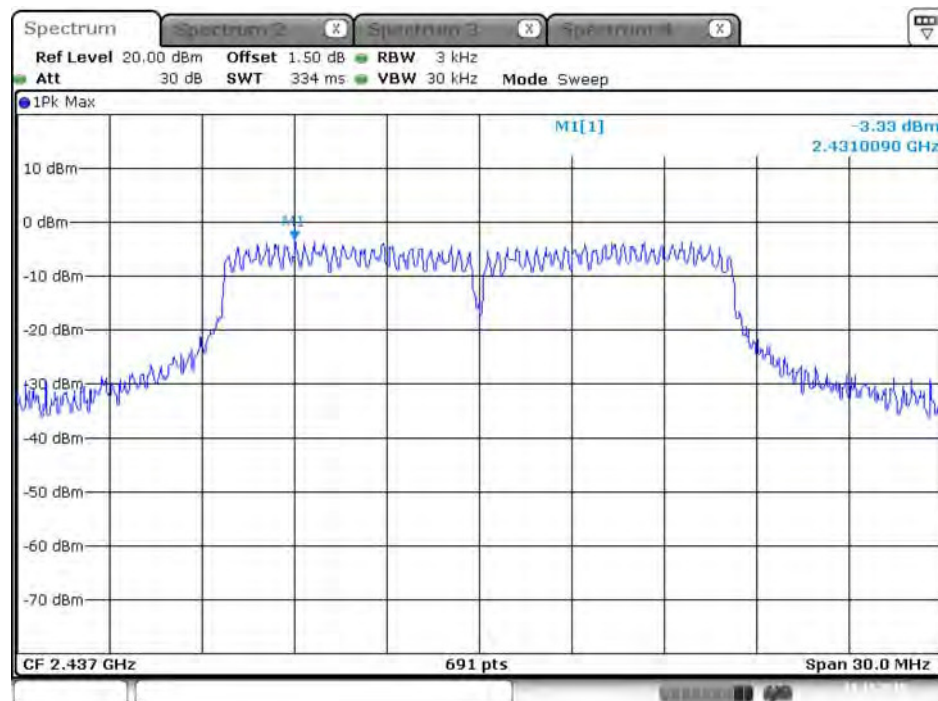

Date: 13.NOV.2015 20:46:49


<For Beamforming Mode>

Power Density Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT20 / 2437 MHz / Chain 1

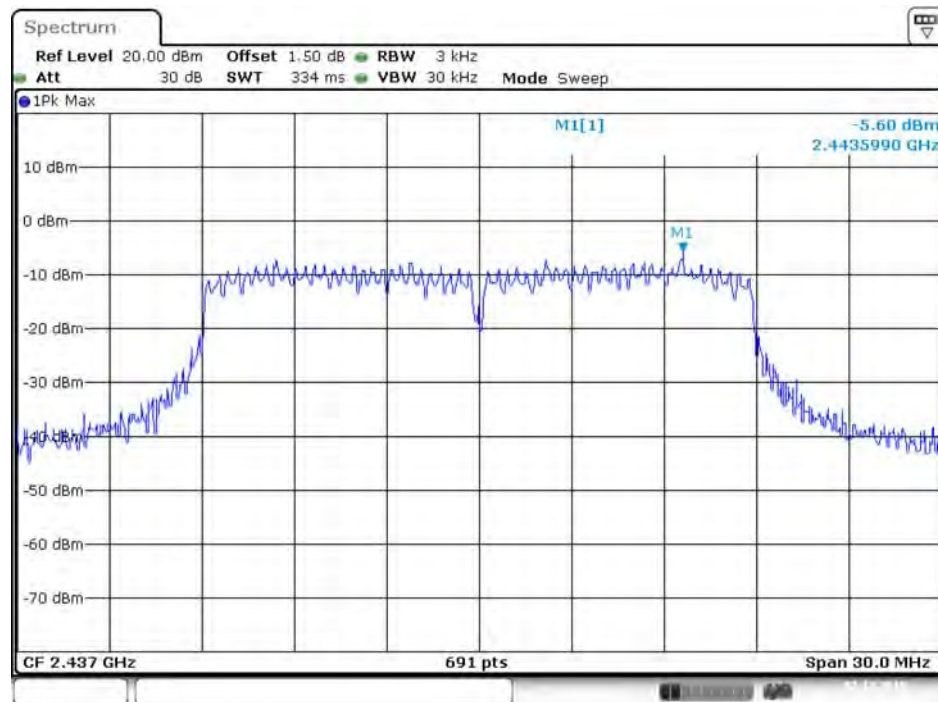


Date: 2 DEC.2015 17:55:46

Power Density Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT20 / 2437 MHz / Chain 2

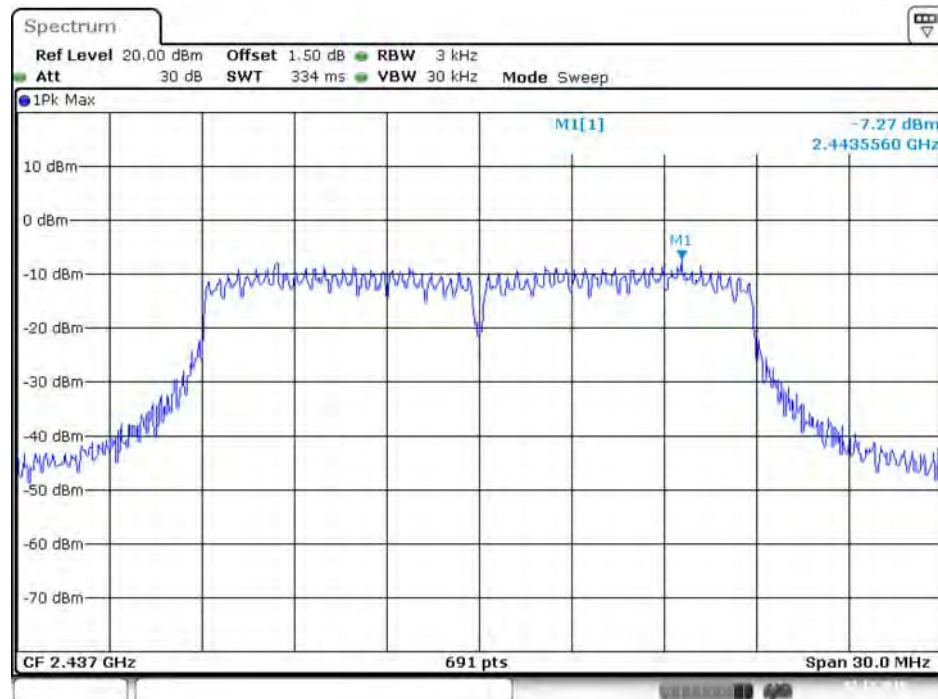


Date: 2 DEC.2015 17:55:27

Power Density Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT20 / 2437 MHz / Chain 3

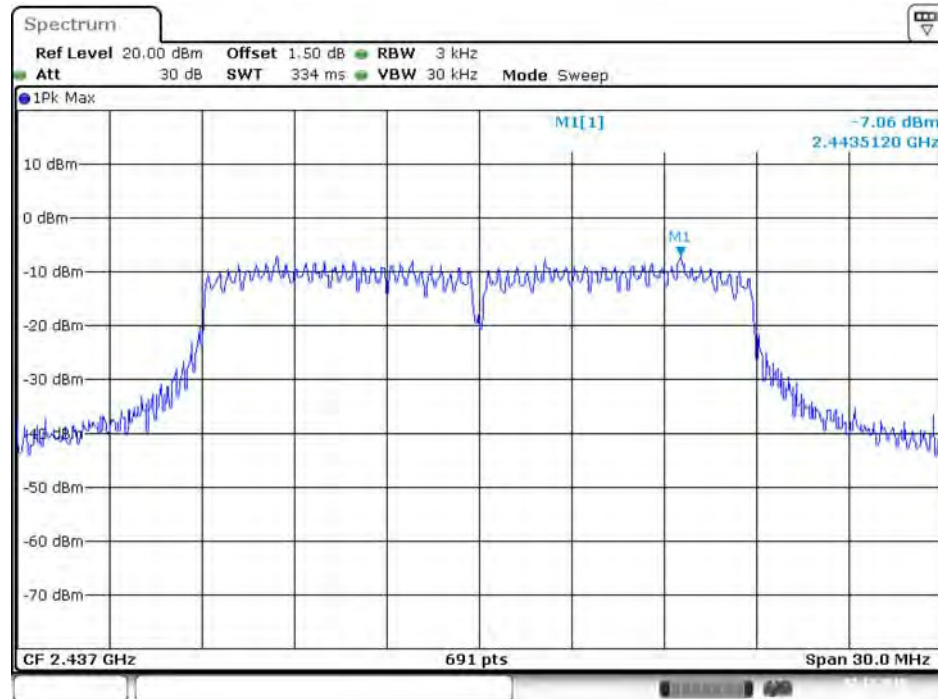


Date: 2.DEC.2015 17:55:08

Power Density Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT40 / 2437 MHz / Chain 1

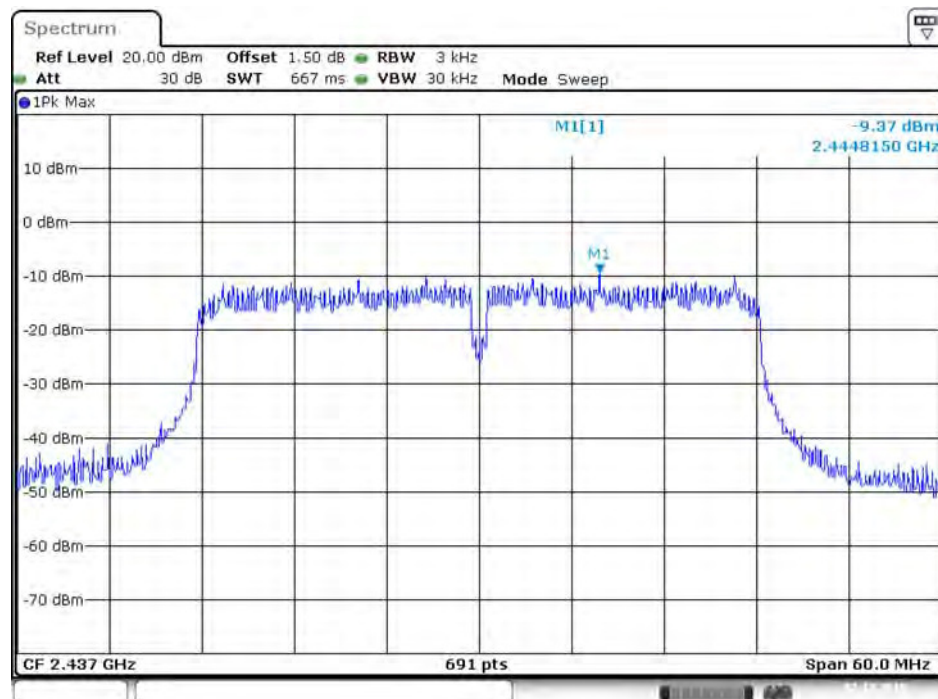


Date: 2.DEC.2015 18:03:07

Power Density Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT40 / 2437 MHz / Chain 2

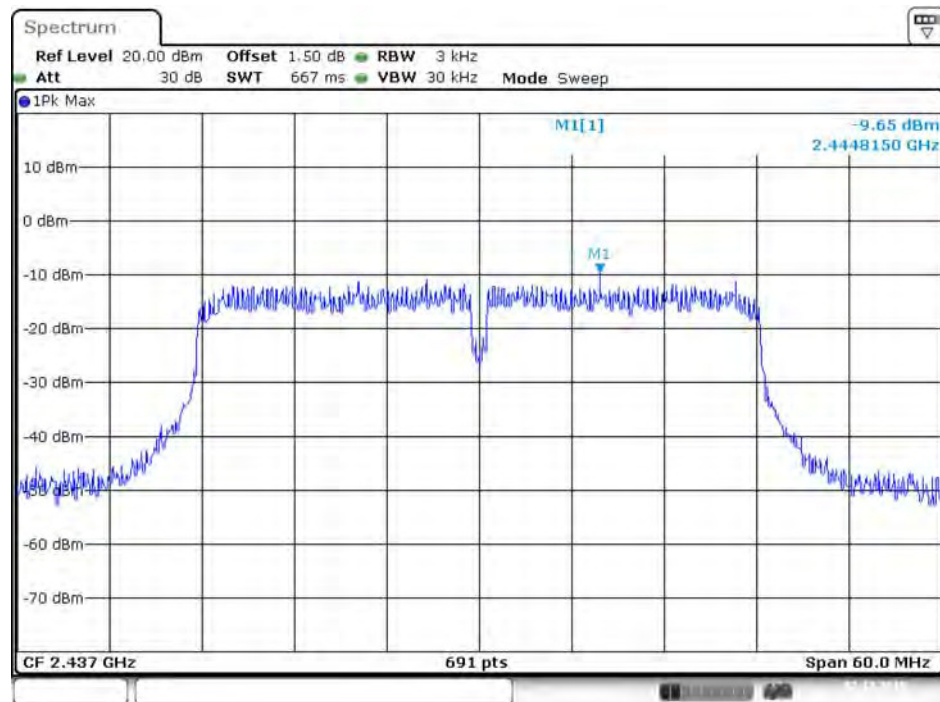

Date: 2.DEC.2015 18:03:44

Power Density Plot on Configuration IEEE 802.11ac MCS0/NSS1 HT40 / 2437 MHz / Chain 3

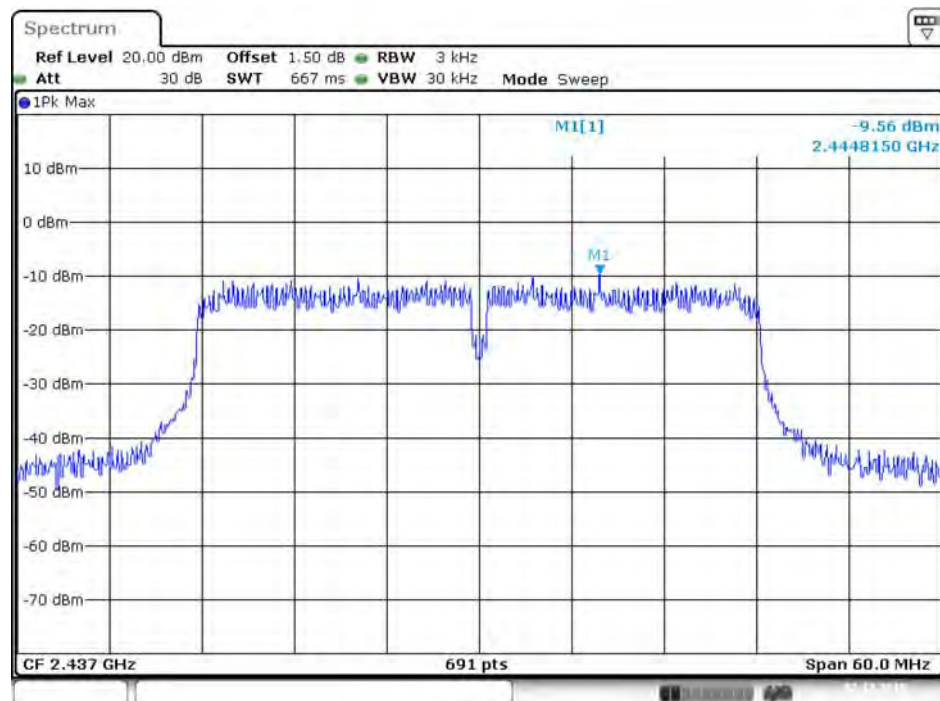

Date: 2.DEC.2015 18:04:12

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth=> 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	24°C	Humidity	60%
Test Engineer	Clemens Fang		

<For Non-Beamforming Mode>

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	10.14	14.93	500	Complies
	2437 MHz	10.14	14.93	500	Complies
	2462 MHz	10.09	15.02	500	Complies
802.11g	2412 MHz	13.97	16.67	500	Complies
	2437 MHz	13.16	16.50	500	Complies
	2462 MHz	14.55	16.76	500	Complies

<For Beamforming Mode>


Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11ac MCS0/NSS1 VHT20	2412 MHz	17.62	17.80	500	Complies
	2437 MHz	17.68	17.89	500	Complies
	2462 MHz	17.68	17.80	500	Complies
802.11ac MCS0/NSS1 VHT40	2422 MHz	36.41	36.61	500	Complies
	2437 MHz	36.41	36.76	500	Complies
	2452 MHz	36.41	36.90	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


<For Non-Beamforming Mode>

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1 + Chain 2 + Chain 3

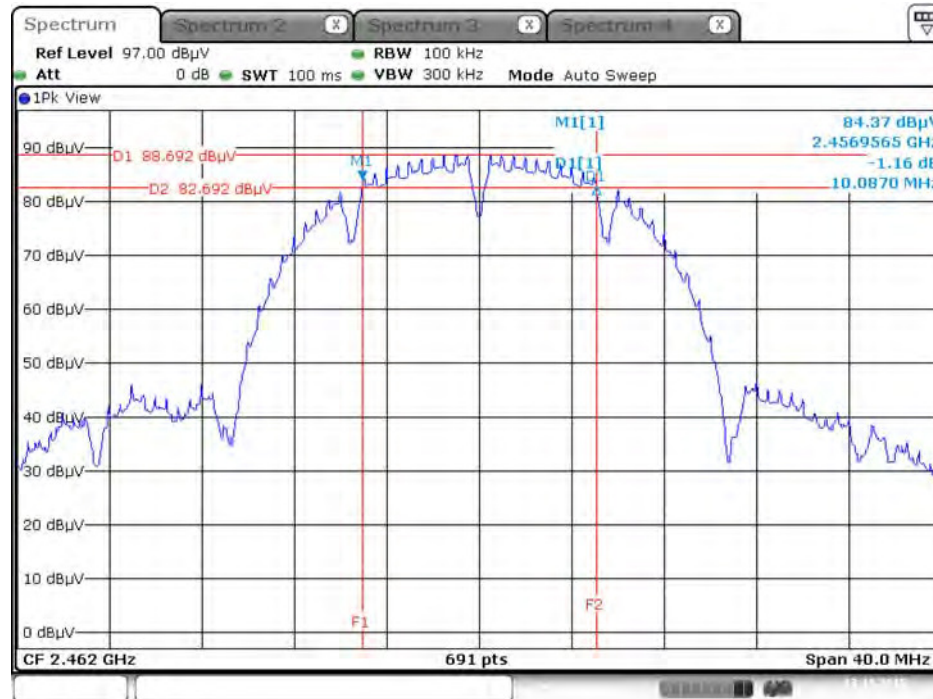


Date: 13.NOV.2015 22:12:45

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1 + Chain 2 + Chain 3

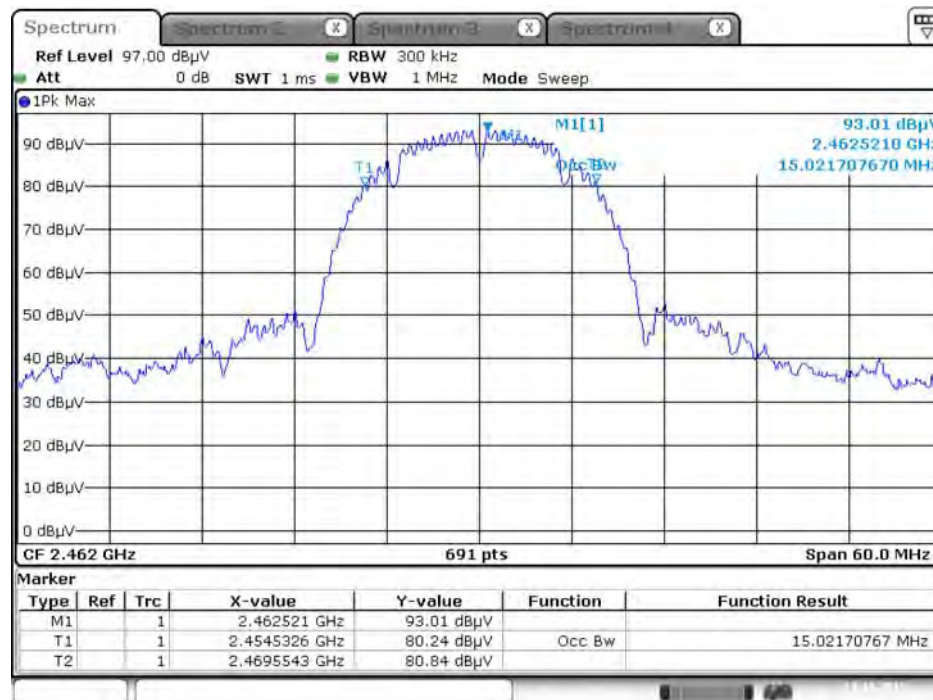

Date: 13.NOV.2015 21:12:06

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3

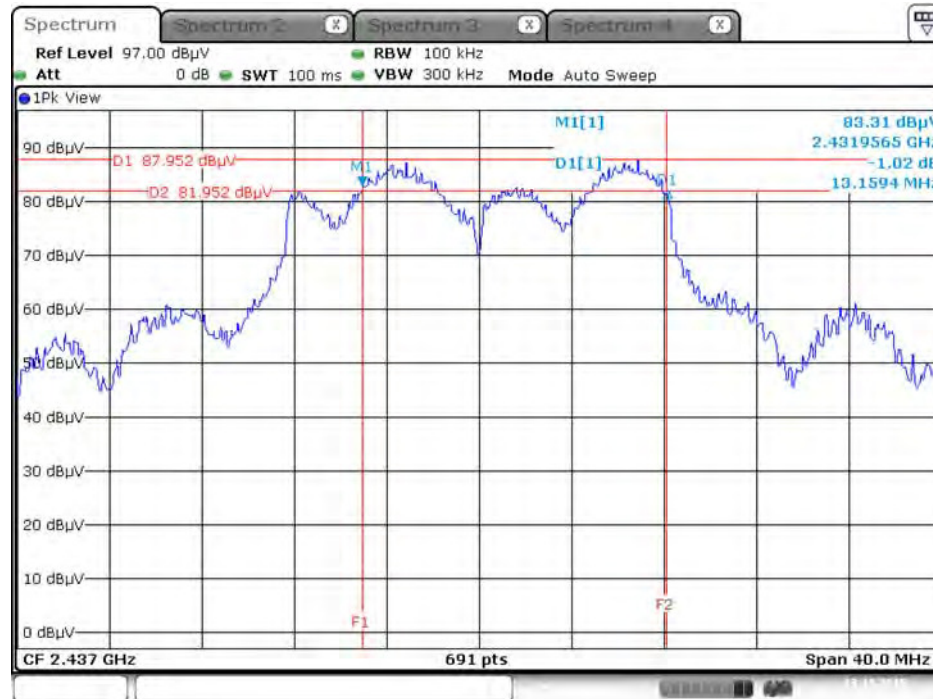

Date: 13.NOV.2015 22:15:09


99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz / Chain 1 + Chain 2 + Chain 3




Date: 13.NOV.2015 21:02:39

<For Non-Beamforming Mode>


6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT20 / 2412 MHz / Chain 1 + Chain 2
+ Chain 3

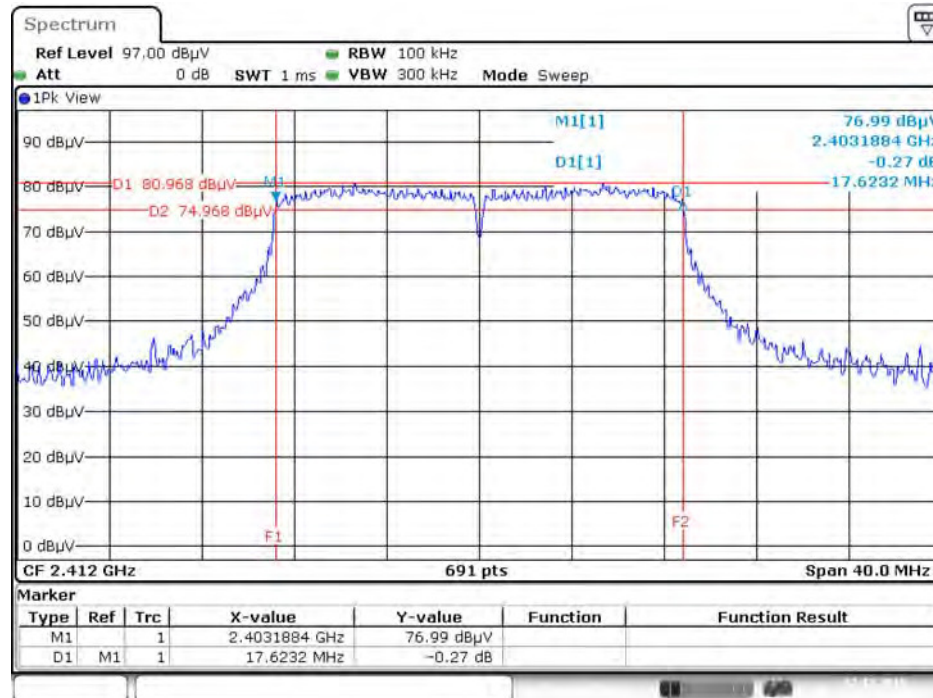


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT20 / 2437 MHz / Chain 1
+ Chain 2 + Chain 3

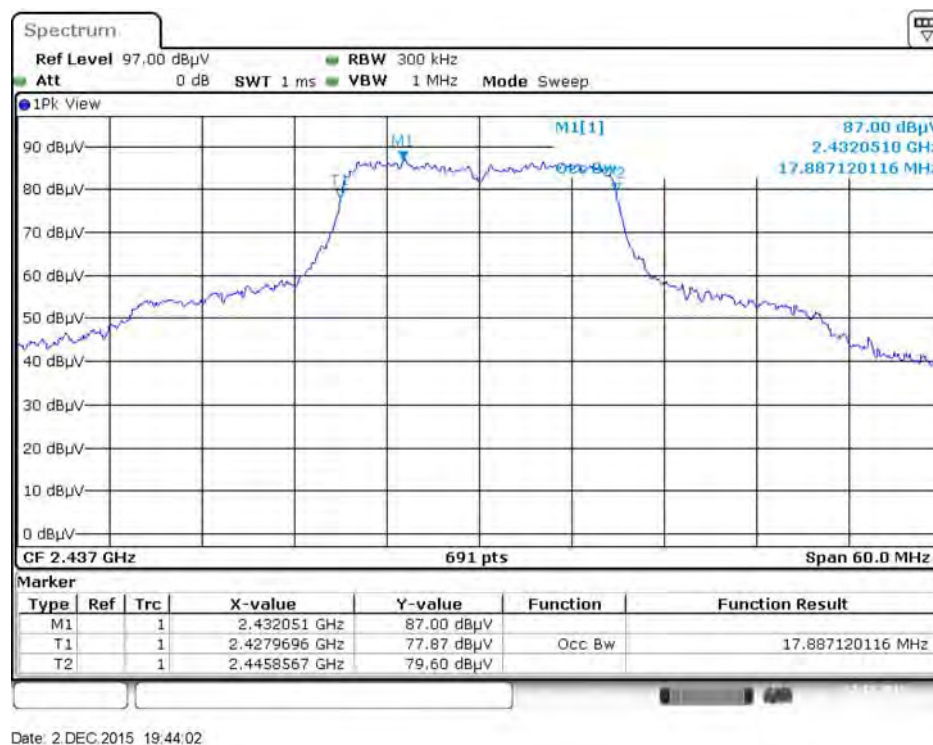

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3

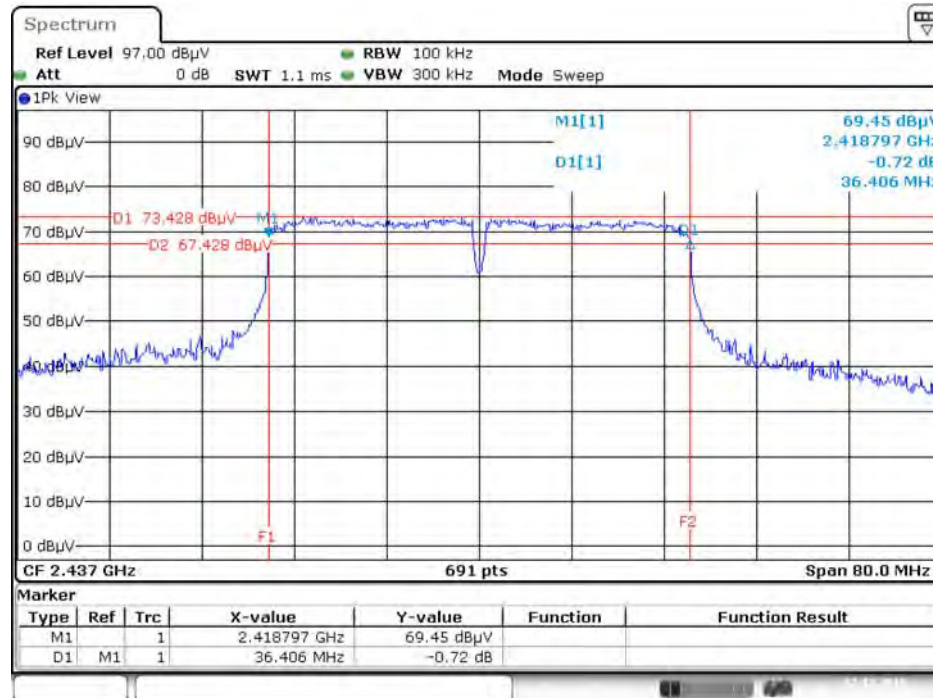

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT40 / 2452 MHz / Chain 1 + Chain 2 + Chain 3

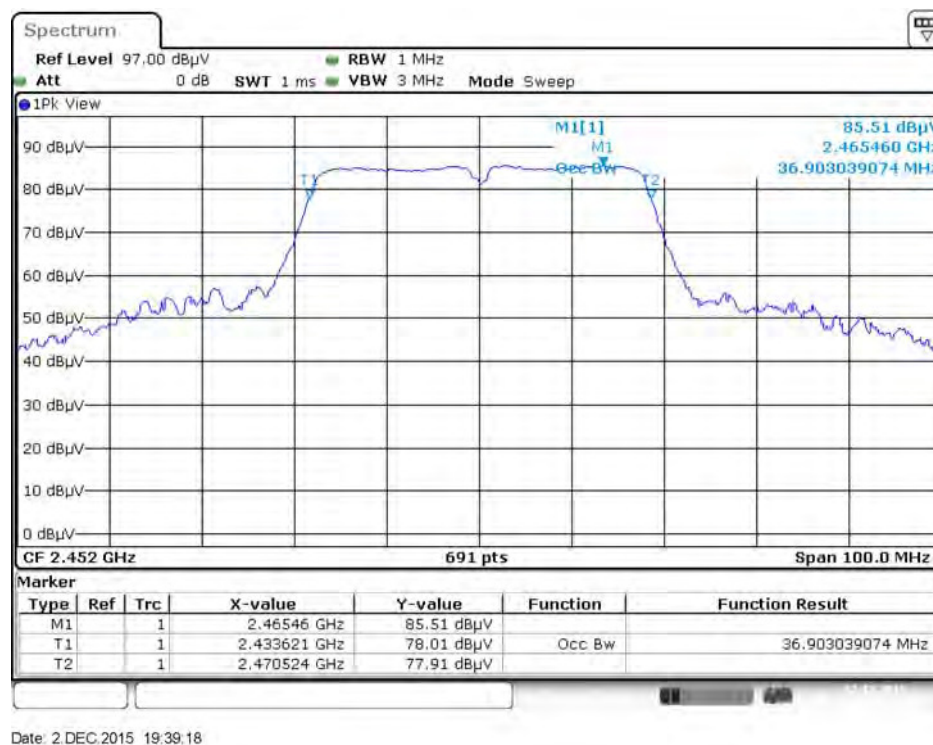

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1GHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

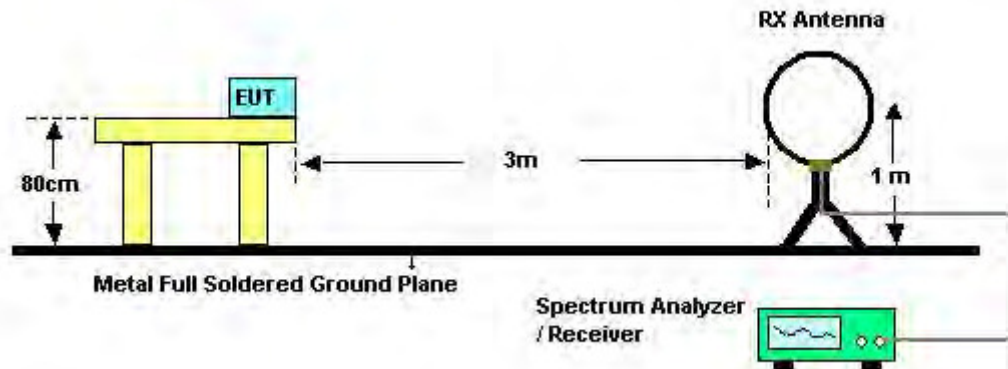

For Radiated Emissions: 30MHz~1GHz

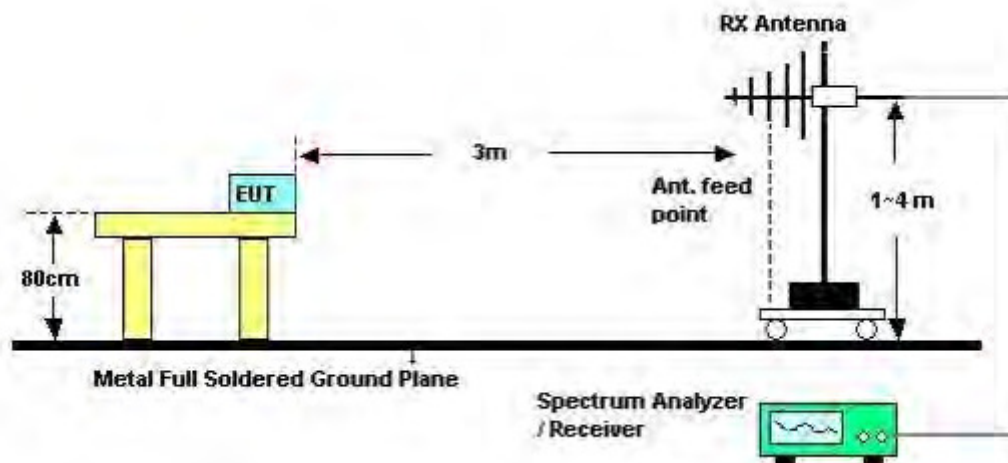

For Radiated Emissions: Above 1GHz

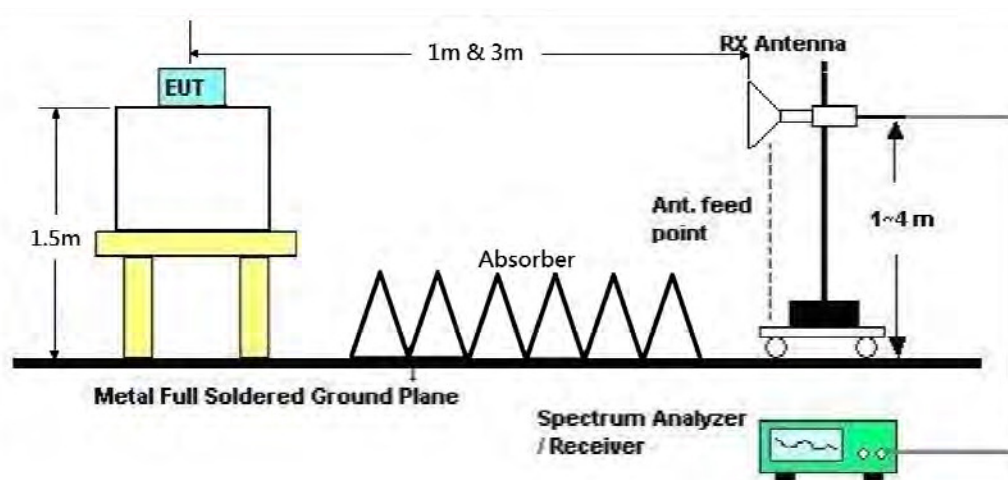

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	55%
Test Engineer	Steven Liang	Configurations	Normal Link
Test Date	Nov. 18, 2015~Nov. 19, 2015		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26°C	Humidity	55%
Test Engineer	Steven Liang	Configurations	Normal Link

Horizontal

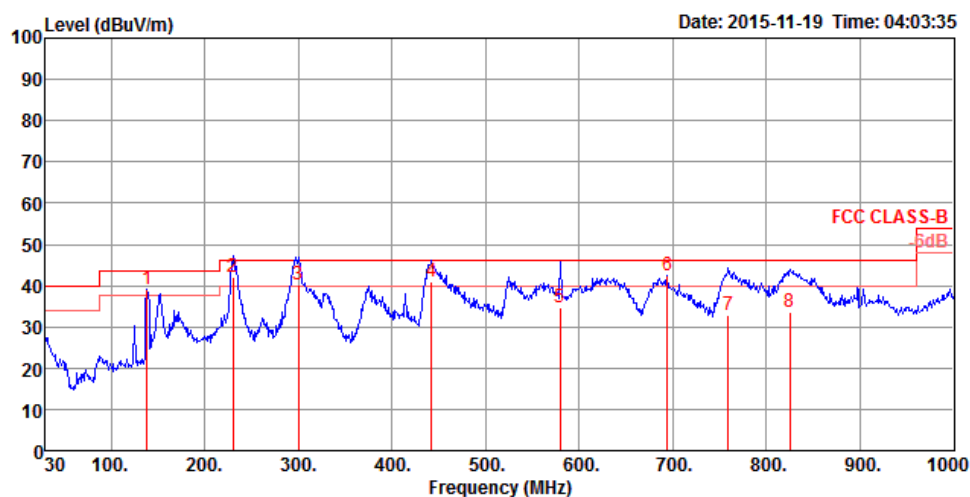

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	138.64	39.28	43.50	-4.22	58.47	1.01	12.16	32.36	125	151	Peak
2	229.82	42.07	46.00	-3.93	61.78	1.30	11.30	32.31	150	158	QP
3	299.66	40.05	46.00	-5.95	56.97	1.48	13.88	32.28	175	239	QP
4	442.25	41.05	46.00	-4.95	54.36	1.82	17.21	32.34	100	4	QP
5	579.99	34.58	46.00	-11.42	45.84	2.09	19.05	32.40	175	164	QP
6	694.45	42.51	46.00	-3.49	52.83	2.26	19.78	32.36	175	221	Peak
7	759.44	32.78	46.00	-13.22	42.19	2.39	20.49	32.29	125	221	QP
8	825.40	33.44	46.00	-12.56	42.02	2.49	21.05	32.12	125	218	QP

Vertical

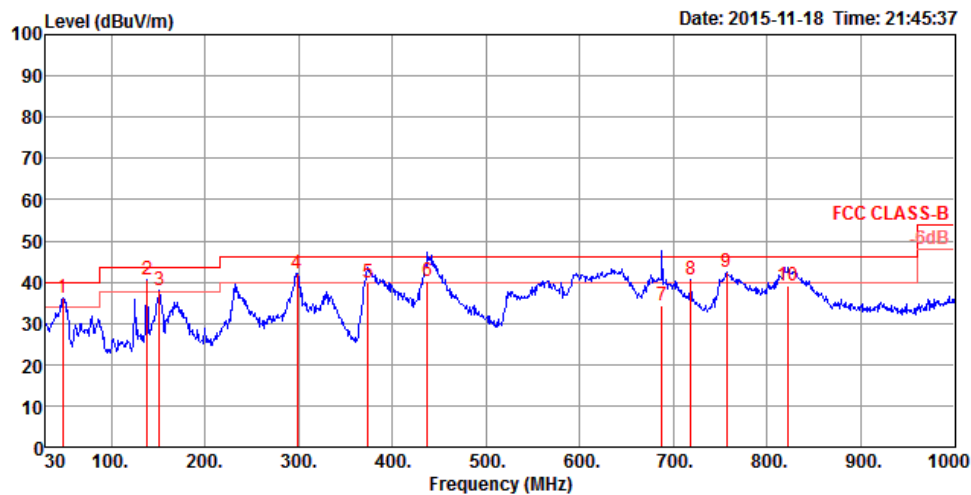

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	48.43	36.15	40.00	-3.85	58.19	0.61	9.76	32.41	125	246 Peak	VERTICAL
2	138.64	40.48	43.50	-3.02	59.67	1.01	12.16	32.36	125	83 Peak	VERTICAL
3	151.25	38.16	43.50	-5.34	58.22	1.05	11.24	32.35	100	71 Peak	VERTICAL
4	298.69	42.15	46.00	-3.85	59.10	1.47	13.86	32.28	175	156 Peak	VERTICAL
5	374.35	39.97	46.00	-6.03	54.62	1.67	16.00	32.32	175	204 QP	VERTICAL
6	437.40	40.19	46.00	-5.81	53.57	1.81	17.15	32.34	125	187 QP	VERTICAL
7	687.66	34.47	46.00	-11.53	44.84	2.25	19.75	32.37	150	321 QP	VERTICAL
8	718.70	40.49	46.00	-5.51	50.48	2.31	20.04	32.34	150	80 Peak	VERTICAL
9	756.53	42.44	46.00	-3.56	51.91	2.38	20.44	32.29	125	335 Peak	VERTICAL
10	822.49	39.03	46.00	-6.97	47.64	2.49	21.02	32.12	125	335 QP	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

<For Non-Beamforming Mode>

Temperature	26°C	Humidity	55%
Test Engineer	Steven Liang	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 06, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			
1	4823.95	38.84	54.00	-15.16	34.14	6.29	33.42	35.01	Average	100	253 HORIZONTAL
2	4823.96	48.28	74.00	-25.72	43.58	6.29	33.42	35.01	Peak	100	253 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			
1	4823.89	40.54	54.00	-13.46	35.84	6.29	33.42	35.01	Average	115	225 VERTICAL
2	4823.90	48.99	74.00	-25.01	44.29	6.29	33.42	35.01	Peak	115	225 VERTICAL

Temperature	26°C	Humidity	55%
Test Engineer	Steven Liang	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 07, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.96	52.75	54.00	-1.25	47.89	6.34	33.53	35.01 Average	100	281	HORIZONTAL
2	4874.00	56.18	74.00	-17.82	51.32	6.34	33.53	35.01 Peak	100	281	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.94	53.96	54.00	-0.04	49.10	6.34	33.53	35.01 Average	100	327	VERTICAL
2	4873.96	56.76	74.00	-17.24	51.90	6.34	33.53	35.01 Peak	100	327	VERTICAL

Temperature	26°C	Humidity	55%
Test Engineer	Steven Liang	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 07, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4923.82	50.91	74.00	-23.09	45.87	6.40	33.65	35.01	100	253	HORIZONTAL
2	4923.92	42.47	54.00	-11.53	37.43	6.40	33.65	35.01	100	253	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4923.90	48.85	74.00	-25.15	43.81	6.40	33.65	35.01	100	221	VERTICAL
2	4923.96	41.38	54.00	-12.62	36.34	6.40	33.65	35.01	100	221	VERTICAL

Temperature	26°C	Humidity	55%
Test Engineer	Steven Liang	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 07, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.78	46.55	74.00	-27.45	41.85	6.29	33.42	35.01	Peak	106	281	HORIZONTAL
2	4823.96	33.46	54.00	-20.54	28.76	6.29	33.42	35.01	Average	106	281	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4823.84	46.80	74.00	-27.20	42.10	6.29	33.42	35.01	Peak	100	142	VERTICAL
2	4824.02	33.67	54.00	-20.33	28.97	6.29	33.42	35.01	Average	100	142	VERTICAL

Temperature	26°C	Humidity	55%
Test Engineer	Steven Liang	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 07, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4874.94	52.17	74.00	-21.83	47.31	6.34	33.53	35.01	100	282	HORIZONTAL
2	4876.14	36.68	54.00	-17.32	31.82	6.34	33.53	35.01	100	282	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.86	54.75	74.00	-19.25	49.89	6.34	33.53	35.01	100	318	VERTICAL
2	4874.40	39.16	54.00	-14.84	34.30	6.34	33.53	35.01	100	318	VERTICAL

Temperature	26°C	Humidity	55%
Test Engineer	Steven Liang	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 07, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			
1	4920.42	32.85	54.00	-21.15	27.81	6.40	33.65	35.01	Average	100	59 HORIZONTAL
2	4922.40	46.18	74.00	-27.82	41.14	6.40	33.65	35.01	Peak	100	59 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			
1	4919.56	33.11	54.00	-20.89	28.07	6.40	33.65	35.01	Average	100	32 VERTICAL
2	4919.78	46.37	74.00	-27.63	41.33	6.40	33.65	35.01	Peak	100	32 VERTICAL

<For Non-Beamforming Mode>

Temperature	26°C	Humidity	55%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/NSS1 VHT20 CH 1 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	deg	cm	Remark
1	4821.94	32.62	54.00	-21.38	27.03	7.50	33.03	31.12	HORIZONTAL	188	162	Average
2	4825.32	45.80	74.00	-28.20	40.17	7.52	33.03	31.14	HORIZONTAL	188	162	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	deg	cm	Remark
1	4821.69	33.43	54.00	-20.57	27.84	7.50	33.03	31.12	VERTICAL	183	153	Average
2	4824.40	45.62	74.00	-28.38	40.03	7.50	33.03	31.12	VERTICAL	183	153	Peak

Temperature	26°C	Humidity	55%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/NSS1 VHT20 CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4873.98	32.86	54.00	-21.14	27.07	7.59	33.01	31.21	HORIZONTAL	211	166	Average
2	4875.65	46.77	74.00	-27.23	40.98	7.59	33.01	31.21	HORIZONTAL	211	166	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4875.14	46.75	74.00	-27.25	40.96	7.59	33.01	31.21	VERTICAL	184	154	Peak
2	4875.15	33.82	54.00	-20.18	28.03	7.59	33.01	31.21	VERTICAL	184	154	Average

Temperature	26°C	Humidity	55%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/NSS1 VHT20 CH 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4923.16	33.88	54.00	-20.12	27.95	7.65	32.99	31.27	HORIZONTAL	161	140	Average
2	4926.05	46.84	74.00	-27.16	40.86	7.67	32.98	31.29	HORIZONTAL	161	140	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4925.29	46.41	74.00	-27.59	40.43	7.67	32.98	31.29	VERTICAL	186	136	Peak
2	4925.81	33.53	54.00	-20.47	27.55	7.67	32.98	31.29	VERTICAL	186	136	Average

Temperature	26°C	Humidity	55%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/NSS1 VHT40 CH 3 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4844.62	45.53	74.00	-28.47	39.85	7.54	33.02	31.16	HORIZONTAL	202	156	Peak
2	4845.08	32.84	54.00	-21.16	27.15	7.54	33.01	31.16	HORIZONTAL	202	156	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4842.09	33.40	54.00	-20.60	27.72	7.54	33.02	31.16	VERTICAL	262	169	Average
2	4843.73	46.48	74.00	-27.52	40.80	7.54	33.02	31.16	VERTICAL	262	169	Peak

Temperature	26°C	Humidity	55%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/NSS1 VHT40 CH 6 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	deg	cm	
1	4874.22	32.81	54.00	-21.19	27.02	7.59	33.01	31.21	HORIZONTAL	286	161	Average
2	4874.56	46.32	74.00	-27.68	40.53	7.59	33.01	31.21	HORIZONTAL	286	161	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	deg	cm	
1	4873.00	33.26	54.00	-20.74	27.47	7.59	33.01	31.21	VERTICAL	318	163	Average
2	4878.90	46.28	74.00	-27.72	40.48	7.59	33.00	31.21	VERTICAL	318	163	Peak

Temperature	26°C	Humidity	55%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/NSS1 VHT40 CH 9 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 30, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4899.02	45.83	74.00	-28.17	39.94	7.63	32.99	31.25	HORIZONTAL	335	168	Peak
2	4904.48	34.31	54.00	-19.69	28.42	7.63	32.99	31.25	HORIZONTAL	335	168	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	4907.92	34.71	54.00	-19.29	28.82	7.63	32.99	31.25	VERTICAL	345	188	Average
2	4908.92	47.73	74.00	-26.27	41.84	7.63	32.99	31.25	VERTICAL	345	188	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

- The test procedure is the same as section 4.5.3.

For Radiated Out of Band Emission Measurement:

- Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

<For Non-Beamforming Mode>

Temperature	26°C	Humidity	55%
Test Engineer	Steven Liang	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 06, 2015~ Nov. 07, 2015		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	2386.20	53.32	54.00	-0.68	20.77	4.34	28.21	0.00	Average	249	298 HORIZONTAL
2	2390.00	61.87	74.00	-12.13	29.31	4.35	28.21	0.00	Peak	249	298 HORIZONTAL
3	2413.00	106.99			74.37	4.38	28.24	0.00	Peak	249	298 HORIZONTAL
4	2413.80	103.02			70.40	4.38	28.24	0.00	Average	249	298 HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	2389.00	52.40	54.00	-1.60	19.84	4.35	28.21	0.00	Average	261	78 VERTICAL
2	2389.40	61.32	74.00	-12.68	28.76	4.35	28.21	0.00	Peak	261	78 VERTICAL
3	2436.20	112.09			79.39	4.42	28.28	0.00	Average	261	78 VERTICAL
4	2438.20	116.02			83.29	4.42	28.31	0.00	Peak	261	78 VERTICAL
5	2485.00	52.68	54.00	-1.32	19.80	4.51	28.37	0.00	Average	261	78 VERTICAL
6	2485.00	62.94	74.00	-11.06	30.06	4.51	28.37	0.00	Peak	261	78 VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	2463.00	114.09			81.28	4.47	28.34	0.00	Peak	171	72 VERTICAL
2	2463.80	110.11			77.30	4.47	28.34	0.00	Average	171	72 VERTICAL
3	2487.20	62.77	74.00	-11.23	29.89	4.51	28.37	0.00	Peak	171	72 VERTICAL
4	2487.80	53.98	54.00	-0.02	21.07	4.51	28.40	0.00	Average	171	72 VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	26°C	Humidity	55%
Test Engineer	Steven Liang	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test Date	Nov. 07, 2015		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2388.80	71.88	74.00	-2.12	39.32	4.35	28.21	0.00	Peak	201	46 VERTICAL
2	2390.00	53.83	54.00	-0.17	21.27	4.35	28.21	0.00	Average	201	46 VERTICAL
3	2418.80	115.27			82.64	4.39	28.24	0.00	Peak	201	46 VERTICAL
4	2419.20	105.86			73.23	4.39	28.24	0.00	Average	201	46 VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2384.20	50.24	54.00	-3.76	17.72	4.34	28.18	0.00	Average	262	89 VERTICAL
2	2384.20	64.40	74.00	-9.60	31.88	4.34	28.18	0.00	Peak	262	89 VERTICAL
3	2443.40	113.43			80.68	4.44	28.31	0.00	Average	262	89 VERTICAL
4	2443.40	122.65			89.90	4.44	28.31	0.00	Peak	262	89 VERTICAL
5	2483.50	53.52	54.00	-0.48	20.64	4.51	28.37	0.00	Average	262	89 VERTICAL
6	2483.80	67.49	74.00	-6.51	34.61	4.51	28.37	0.00	Peak	262	89 VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2455.20	106.58			73.79	4.45	28.34	0.00	Average	238	100 VERTICAL
2	2455.20	116.89			84.10	4.45	28.34	0.00	Peak	238	100 VERTICAL
3	2483.50	53.94	54.00	-0.06	21.06	4.51	28.37	0.00	Average	238	100 VERTICAL
4	2484.00	73.74	74.00	-0.26	40.86	4.51	28.37	0.00	Peak	238	100 VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<For Beamforming Mode>

Temperature	26°C	Humidity	55%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/NSS1 VHT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
Test date	Nov. 30, 2015		

Channel 1

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	deg	cm	Remark
1	2390.00	53.31	54.00	-0.69	21.03	5.23	0.00	27.05	VERTICAL	79	181	Average
2	2390.00	72.63	74.00	-1.37	40.35	5.23	0.00	27.05	VERTICAL	79	181	Peak
3	2418.20	112.64			80.24	5.27	0.00	27.13	VERTICAL	79	181	Peak
4	2419.00	101.27			68.87	5.27	0.00	27.13	VERTICAL	79	181	Average

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	deg	cm	Remark
1	2389.60	60.70	74.00	-13.30	28.42	5.23	0.00	27.05	VERTICAL	67	218	Peak
2	2390.00	47.96	54.00	-6.04	15.68	5.23	0.00	27.05	VERTICAL	67	218	Average
3	2440.60	115.77			83.30	5.29	0.00	27.18	VERTICAL	67	218	Peak
4	2442.60	104.53			72.06	5.29	0.00	27.18	VERTICAL	67	218	Average
5	2483.50	48.40	54.00	-5.60	15.80	5.33	0.00	27.27	VERTICAL	67	218	Average
6	2485.10	61.59	74.00	-12.41	28.99	5.33	0.00	27.27	VERTICAL	67	218	Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	deg	cm	Remark
1	2466.80	111.93			79.40	5.31	0.00	27.22	VERTICAL	307	225	Peak
2	2468.60	99.75			67.19	5.32	0.00	27.24	VERTICAL	307	225	Average
3	2483.50	51.97	54.00	-2.03	19.37	5.33	0.00	27.27	VERTICAL	307	225	Average
4	2484.10	73.89	74.00	-0.11	41.29	5.33	0.00	27.27	VERTICAL	307	225	Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	26°C	Humidity	55%
Test Engineer	Steven Liang	Configurations	IEEE 802.11ac MCS0/NSS1 VHT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3
Test date	Nov. 30, 2015		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2388.80	73.49	74.00	-0.51	41.21	5.23	0.00	27.05	VERTICAL	87	193	Peak
2	2390.00	53.41	54.00	-0.59	21.13	5.23	0.00	27.05	VERTICAL	87	193	Average
3	2418.40	111.36			78.96	5.27	0.00	27.13	VERTICAL	87	193	Peak
4	2435.60	96.84			64.40	5.28	0.00	27.16	VERTICAL	87	193	Average

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2389.00	71.74	74.00	-2.26	39.46	5.23	0.00	27.05	VERTICAL	156	206	Peak
2	2390.00	53.86	54.00	-0.14	21.58	5.23	0.00	27.05	VERTICAL	156	206	Average
3	2423.00	108.52			76.12	5.27	0.00	27.13	VERTICAL	156	206	Peak
4	2435.80	97.90			65.46	5.28	0.00	27.16	VERTICAL	156	206	Average
5	2483.50	73.09	74.00	-0.91	40.49	5.33	0.00	27.27	VERTICAL	156	206	Peak
6	2483.80	53.36	54.00	-0.64	20.76	5.33	0.00	27.27	VERTICAL	156	206	Average

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	2438.40	96.68			64.24	5.28	0.00	27.16	VERTICAL	71	194	Average
2	2456.00	108.80			76.29	5.30	0.00	27.21	VERTICAL	71	194	Peak
3	2483.50	73.43	74.00	-0.57	40.83	5.33	0.00	27.27	VERTICAL	71	194	Peak
4	2484.00	53.70	54.00	-0.30	21.10	5.33	0.00	27.27	VERTICAL	71	194	Average

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band


<For Non-Beamforming Mode>

Plot on Configuration IEEE 802.11b / Reference Level

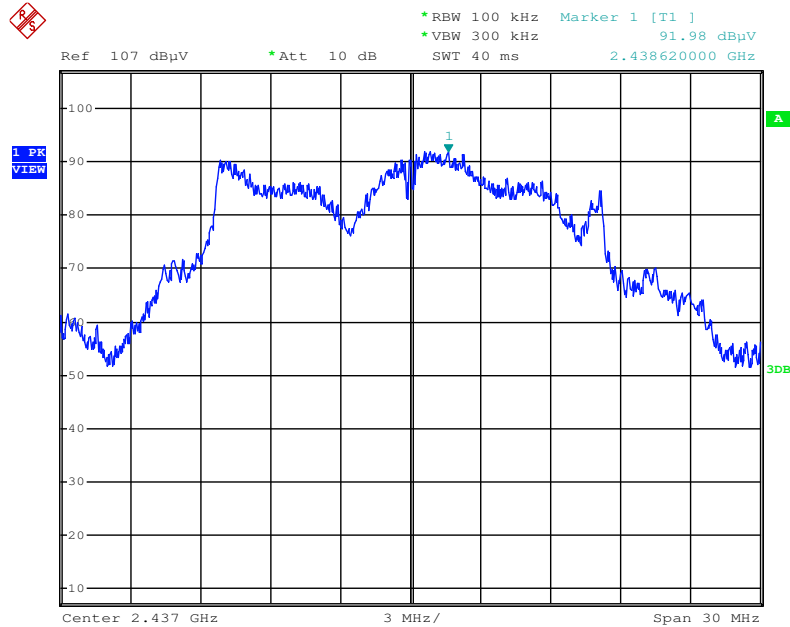


Date: 7.NOV.2015 13:56:14

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

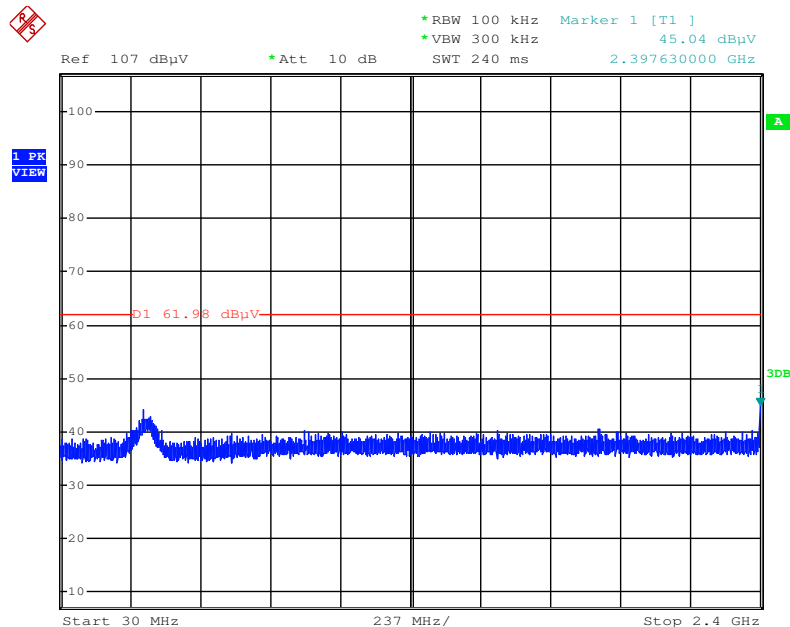


Date: 7.NOV.2015 13:58:17

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

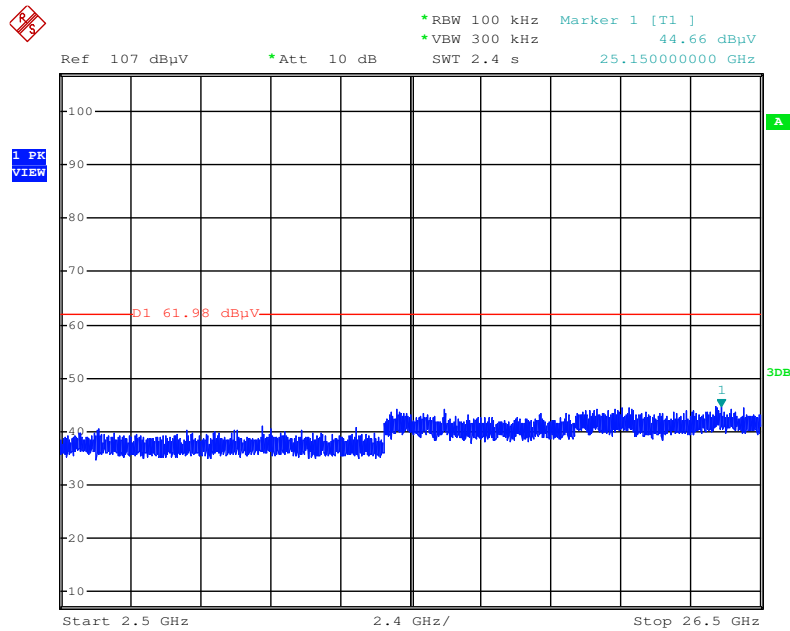


Date: 7.NOV.2015 13:59:01

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

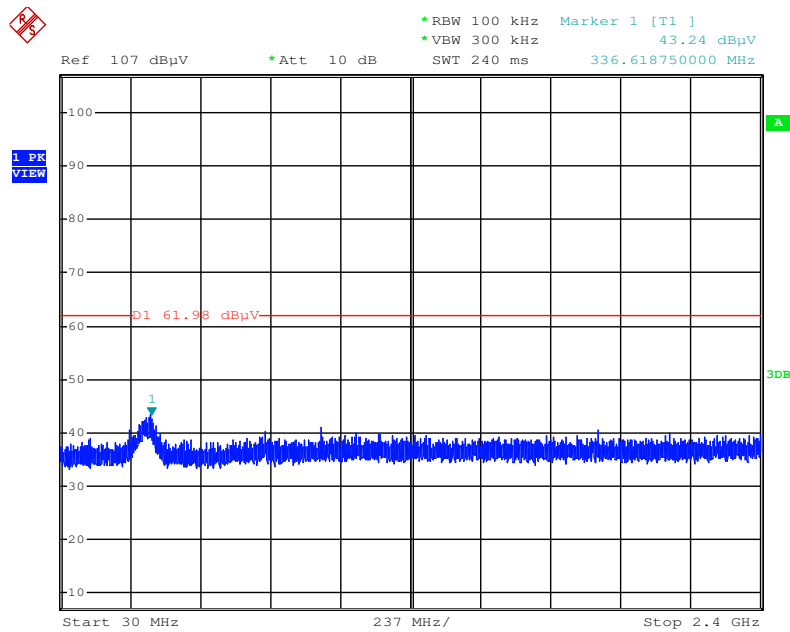


Date: 7.NOV.2015 14:01:07

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

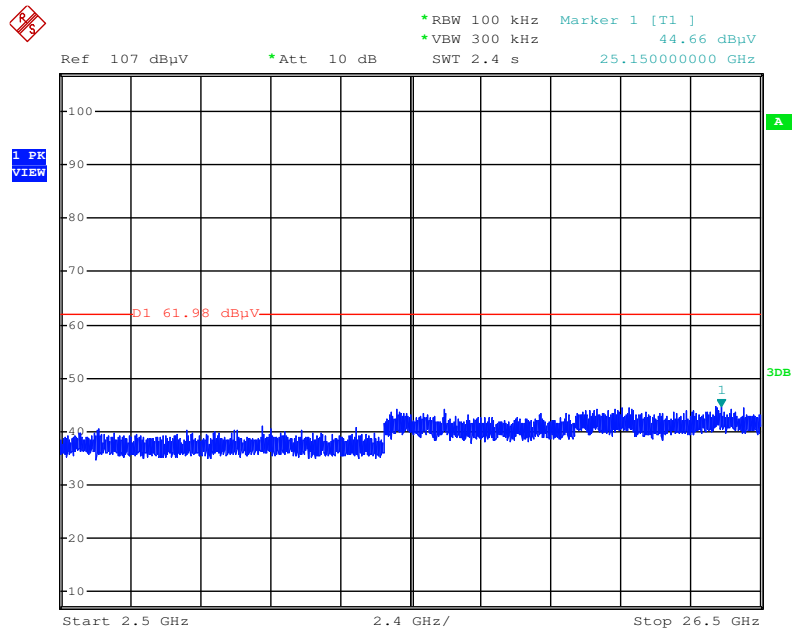


Date: 7.NOV.2015 13:59:01

Plot on Configuration IEEE 802.11g / Reference Level

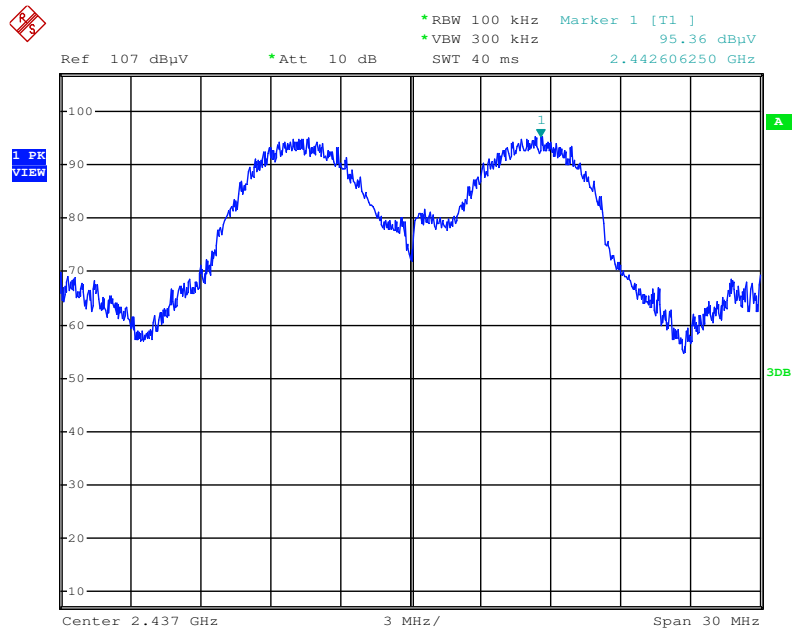


Date: 7.NOV.2015 14:04:44

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

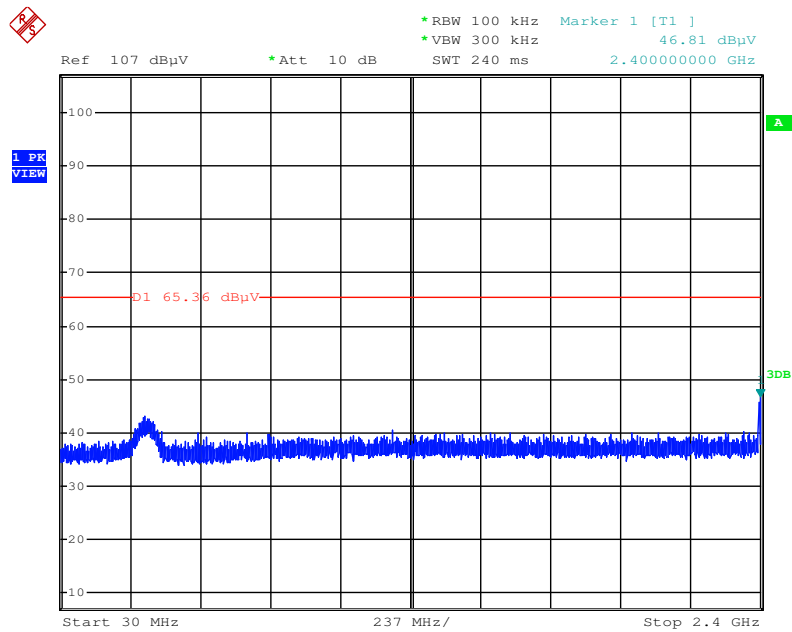


Date: 7.NOV.2015 14:06:02

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

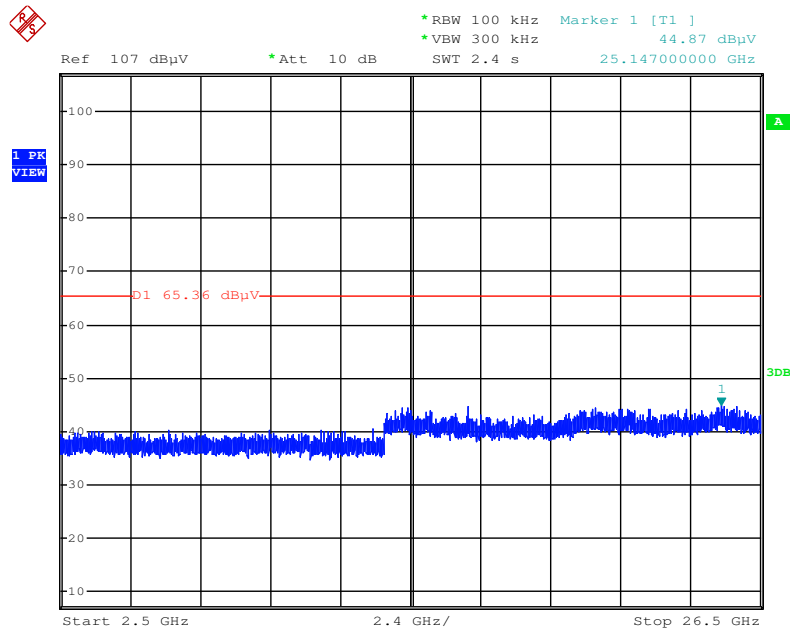


Date: 7.NOV.2015 14:06:41

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

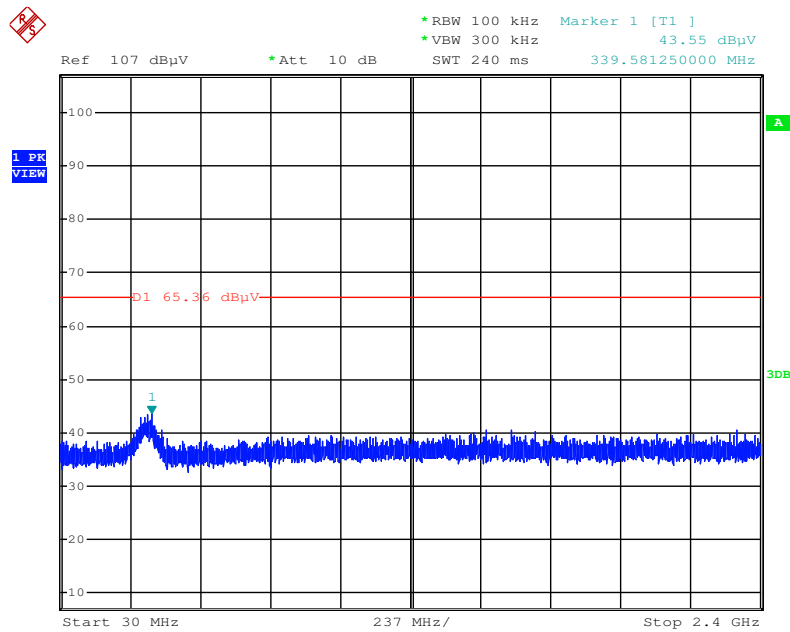

Date: 7.NOV.2015 14:38:56


Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

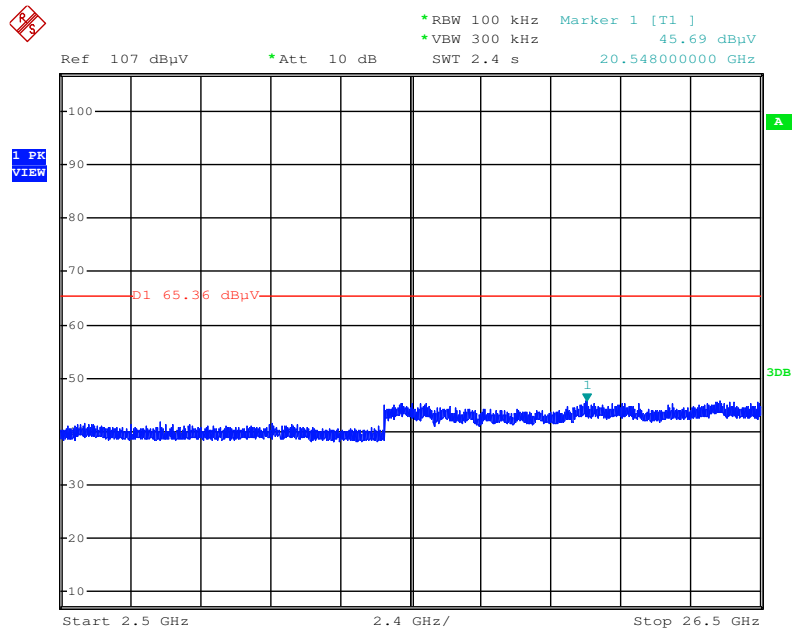

Date: 7.NOV.2015 14:38:19


<For Beamforming Mode>

Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT20 / Reference Level

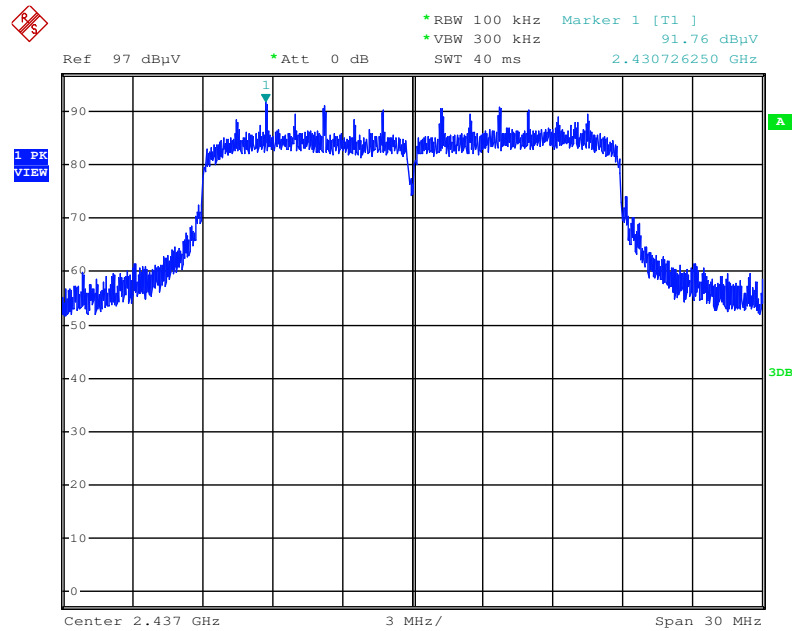


Date: 30.NOV.2015 20:46:16

Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

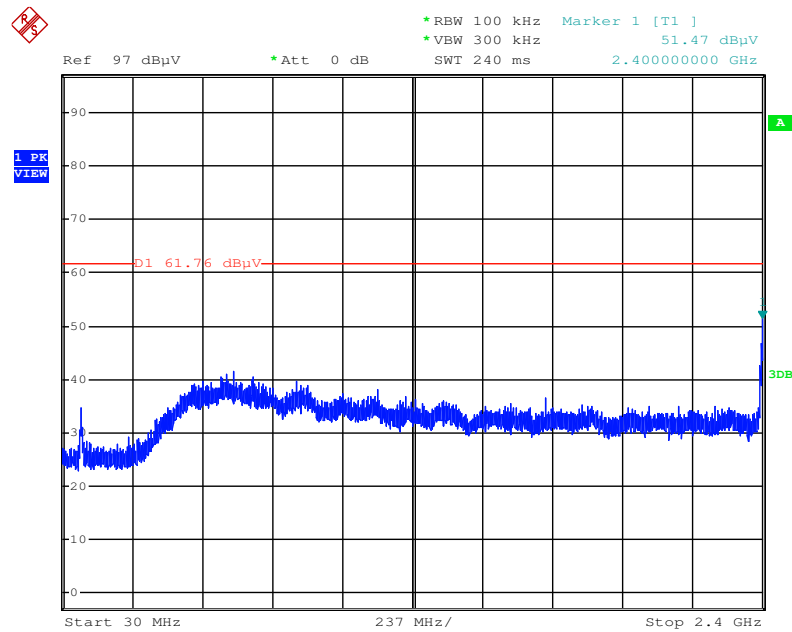


Date: 30.NOV.2015 20:50:32

Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

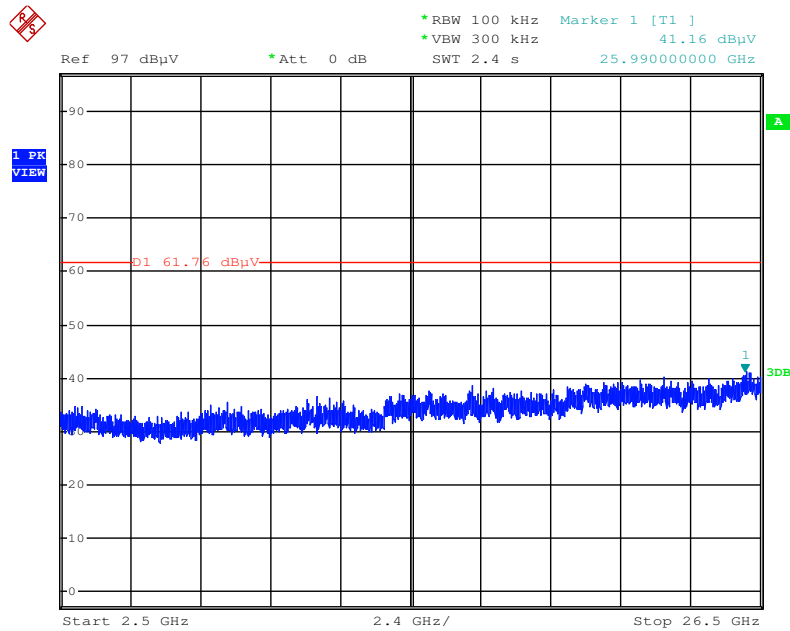


Date: 30.NOV.2015 20:51:13

Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

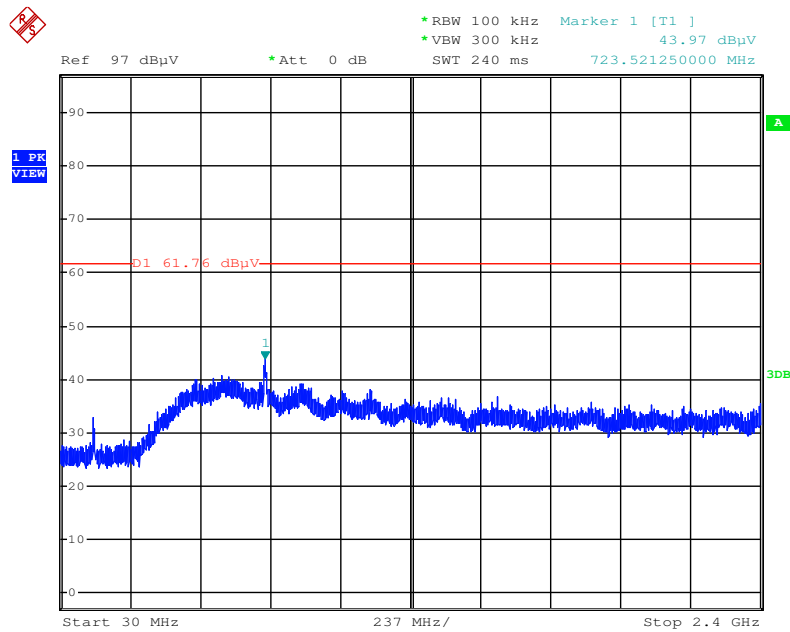


Date: 30.NOV.2015 20:56:05

Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

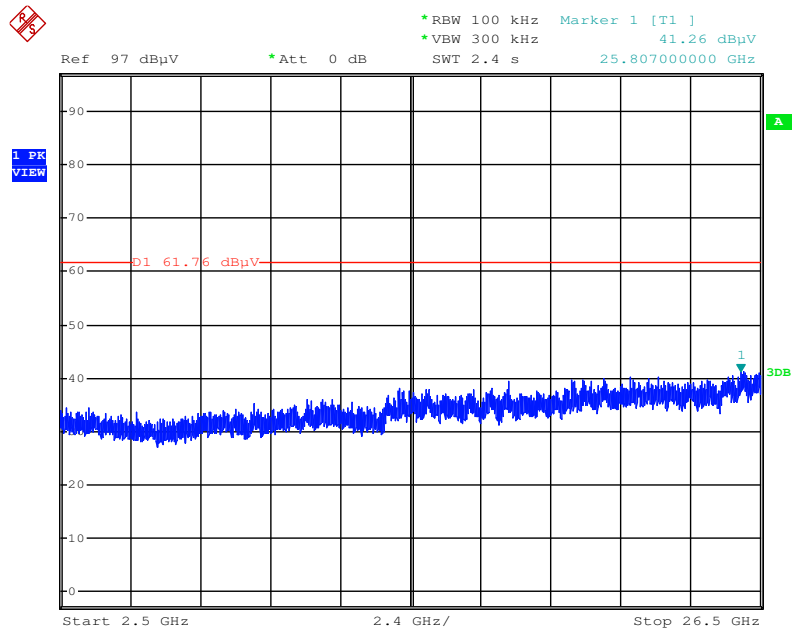


Date: 30.NOV.2015 20:56:31

Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT40 / Reference Level

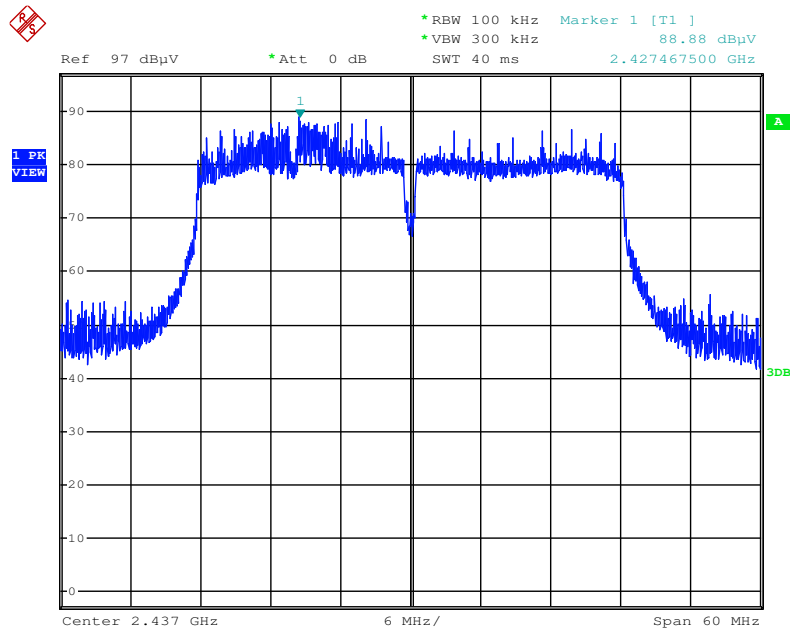


Date: 30.NOV.2015 21:05:59

Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

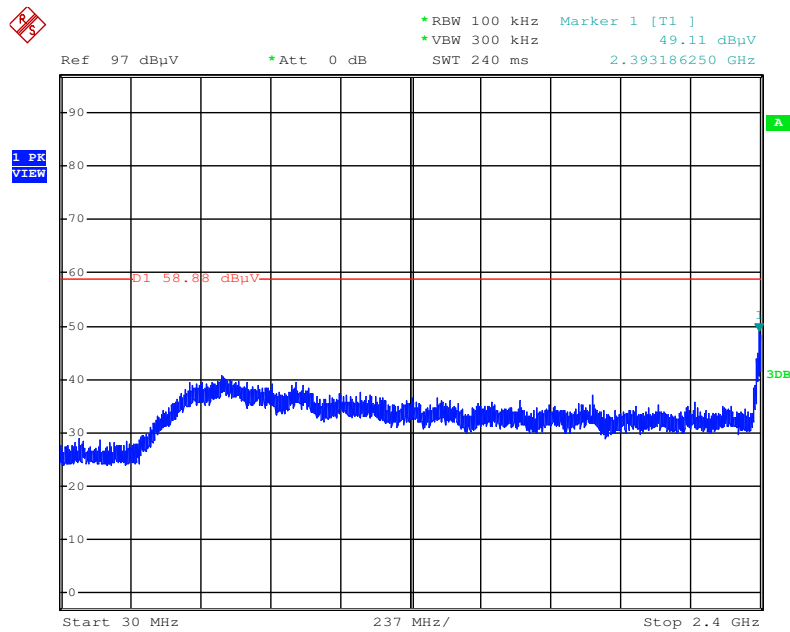


Date: 30.NOV.2015 21:10:33

Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

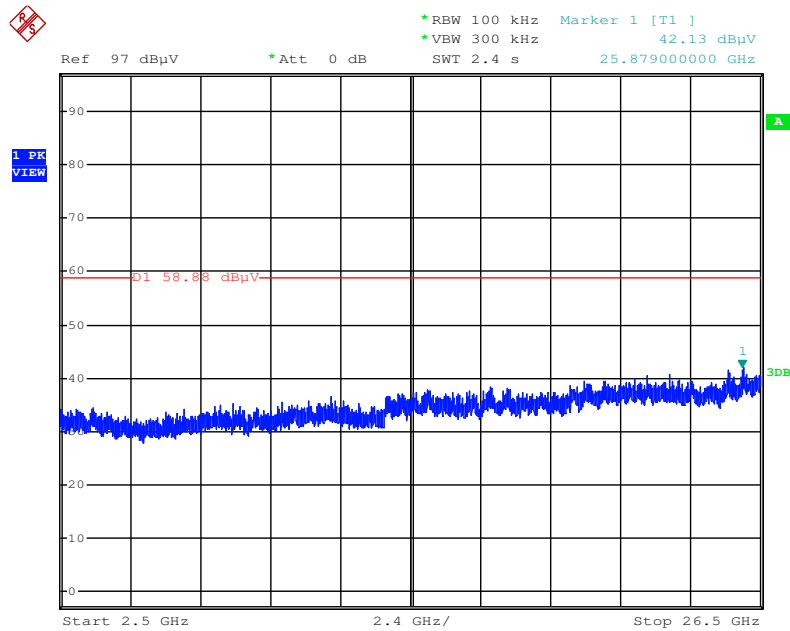


Date: 30.NOV.2015 21:11:19

Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

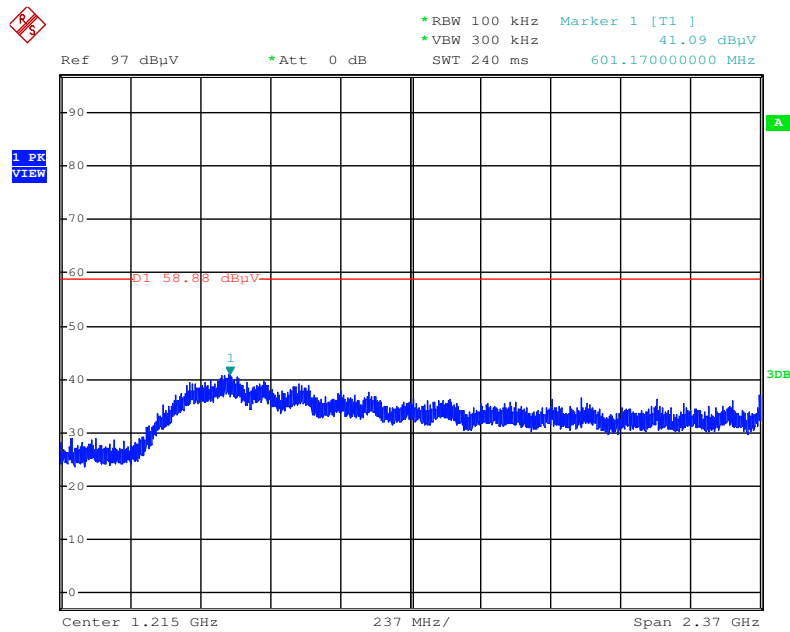

Date: 30.NOV.2015 21:30:25

Plot on Configuration IEEE 802.11ac MCS0/NSS1 VHT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

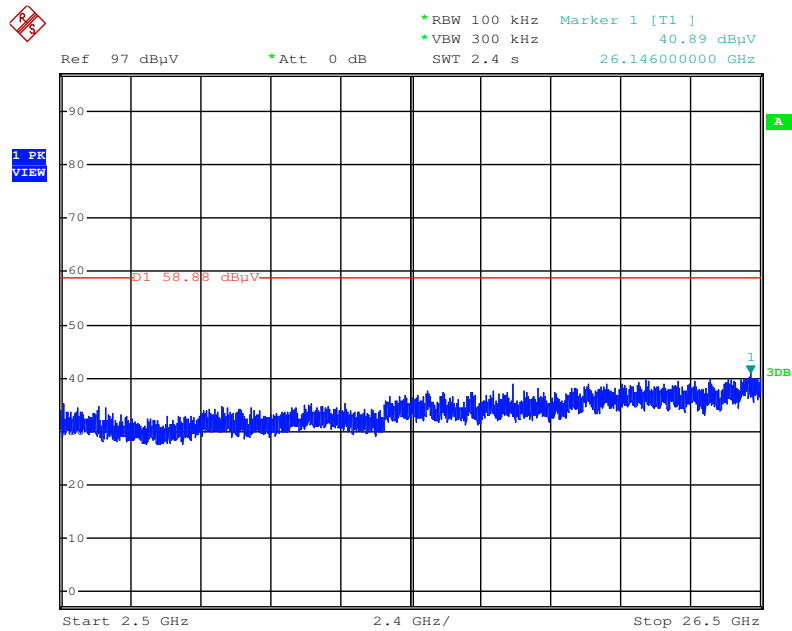

Date: 30.NOV.2015 21:30:59

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 02, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 02, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 03, 2014	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	37880	20MHz ~ 2GHz	Sep 03, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Feb.10, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 21, 2015	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz ~ 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz ~ 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz ~ 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz ~ 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz ~ 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%