

Close the browser and wait for 2 minutes before reopening it. It may also be necessary, to reconfigure your PC IP configuration to match any new settings.


**NOTE:** This entry has the same effect as the **Reset** button. The AR-5313u board hardware and the boot loader support the reset to default. If the **Reset** button is continuously pressed for more than 10 seconds, the boot loader will erase the configuration data saved in flash memory.

## 8.2 System Log


This function allows a system log to be kept and viewed upon request.

Follow the steps below to configure, enable, and view the system log.

**STEP 1:** Click **Configure System Log**, as shown below (circled in **Red**).

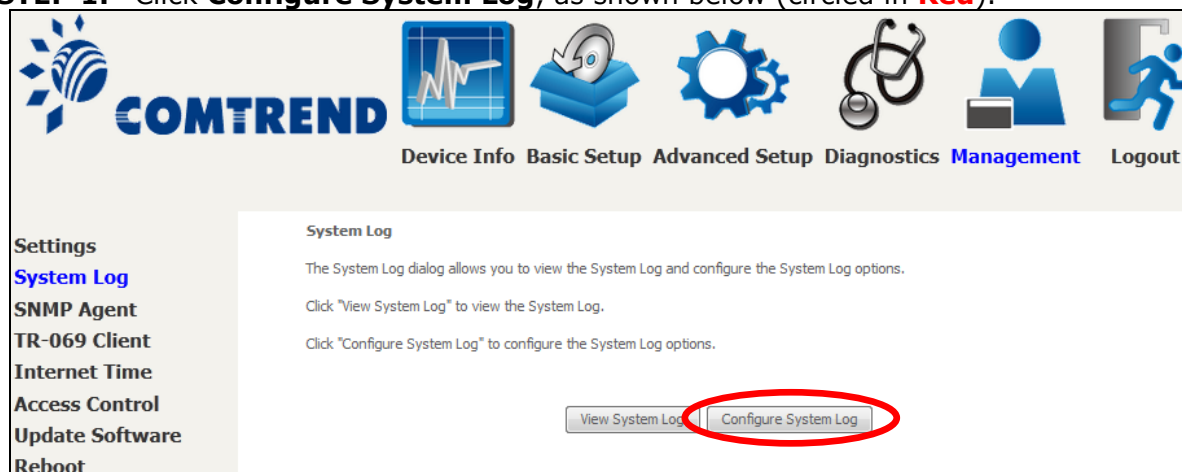

**STEP 2:** Select desired options and click **Apply/Save**.

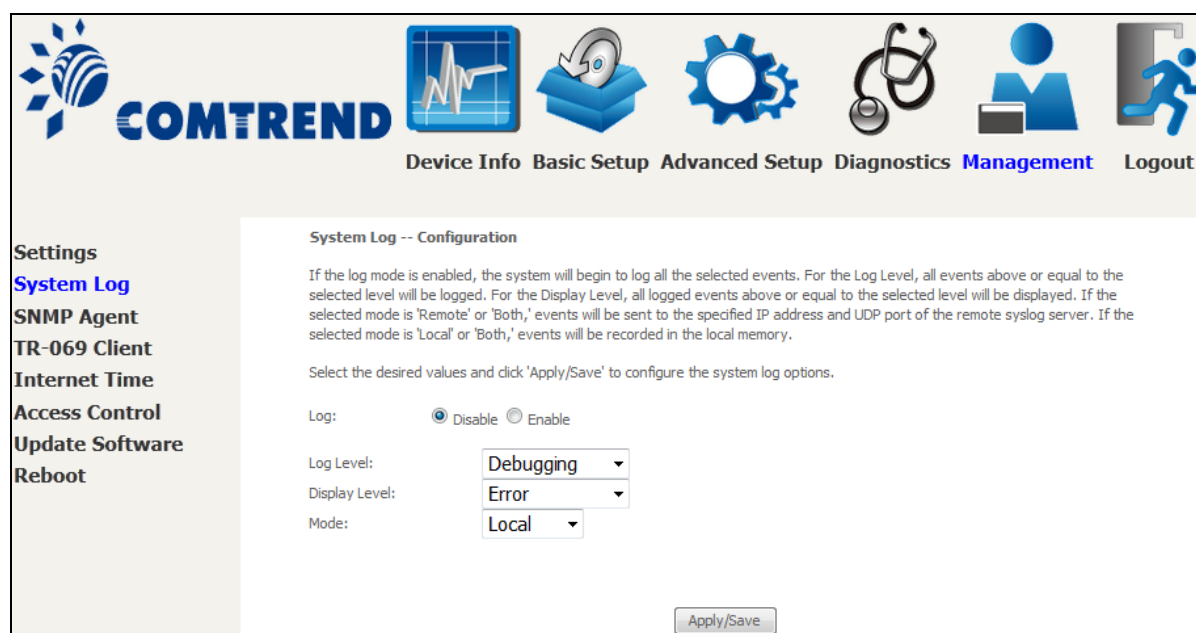

Consult the table below for detailed descriptions of each system log option.

| Option | Description                                                                                                                                                                                                                  |
|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Log    | Indicates whether the system is currently recording events. The user can enable or disable event logging. By default, it is disabled. To enable it, select the <b>Enable</b> radio button and then click <b>Apply/Save</b> . |

| Option        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Log Level     | <p>Allows you to configure the event level and filter out unwanted events below this level. The events ranging from the highest critical level "Emergency" down to this configured level will be recorded to the log buffer on the AR-5313u SDRAM. When the log buffer is full, the newer event will wrap up to the top of the log buffer and overwrite the old event. By default, the log level is "Debugging", which is the lowest critical level.</p> <p>The log levels are defined as follows:</p> <ul style="list-style-type: none"> <li>• Emergency = system is unusable</li> <li>• Alert = action must be taken immediately</li> <li>• Critical = critical conditions</li> <li>• Error = Error conditions</li> <li>• Warning = normal but significant condition</li> <li>• Notice= normal but insignificant condition</li> <li>• Informational= provides information for reference</li> <li>• Debugging = debug-level messages</li> </ul> <p>Emergency is the most serious event level, whereas Debugging is the least important. For instance, if the log level is set to Debugging, all the events from the lowest Debugging level to the most critical level Emergency level will be recorded. If the log level is set to Error, only Error and the level above will be logged.</p> |
| Display Level | Allows the user to select the logged events and displays on the <b>View System Log</b> window for events of this level and above to the highest Emergency level.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Mode          | <p>Allows you to specify whether events should be stored in the local memory, or be sent to a remote system log server, or both simultaneously. If remote mode is selected, view system log will not be able to display events saved in the remote system log server.</p> <p>When either Remote mode or Both mode is configured, the WEB UI will prompt the user to enter the Server IP address and Server UDP port.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

**STEP 3:** Click **View System Log**. The results are displayed as follows.

| System Log     |          |          |                                                           |
|----------------|----------|----------|-----------------------------------------------------------|
| Date/Time      | Facility | Severity | Message                                                   |
| Jan 1 00:00:12 | syslog   | emerg    | BCM96345 started: BusyBox v0.60.4 (2004.09.14-06:30+0000) |
| Jan 1 00:00:17 | user     | crit     | klogd: USB Link UP.                                       |
| Jan 1 00:00:19 | user     | crit     | klogd: eth0 Link UP.                                      |

## 8.3 SNMP Agent

Simple Network Management Protocol (SNMP) allows a management application to retrieve statistics and status from the SNMP agent in this device. Select the **Enable** radio button, configure options, and click **Save/Apply** to activate SNMP.


**COMTREND**








Device Info
Basic Setup
Advanced Setup
Diagnostics
Management
Logout

**Settings**  
**System Log**  
SNMP Agent  
**TR-069 Client**  
**Internet Time**  
**Access Control**  
**Update Software**  
**Reboot**

### SNMP - Configuration

Simple Network Management Protocol (SNMP) allows a management application to retrieve statistics and status from the SNMP agent in this device.


Select the desired values and click "Apply" to configure the SNMP options.

SNMP Agent    ☒ Disable    ☐ Enable

|                  |                                       |
|------------------|---------------------------------------|
| Read Community:  | <input type="text" value="public"/>   |
| Set Community:   | <input type="text" value="private"/>  |
| System Name:     | <input type="text" value="Comtrend"/> |
| System Location: | <input type="text" value="unknown"/>  |
| System Contact:  | <input type="text" value="unknown"/>  |
| Trap Manager IP: | <input type="text" value="0.0.0.0"/>  |

## 8.4 TR-069 Client

WAN Management Protocol (TR-069) allows an Auto-Configuration Server (ACS) to perform auto-configuration, provision, collection, and diagnostics to this device. Select desired values and click **Apply/Save** to configure TR-069 client options.

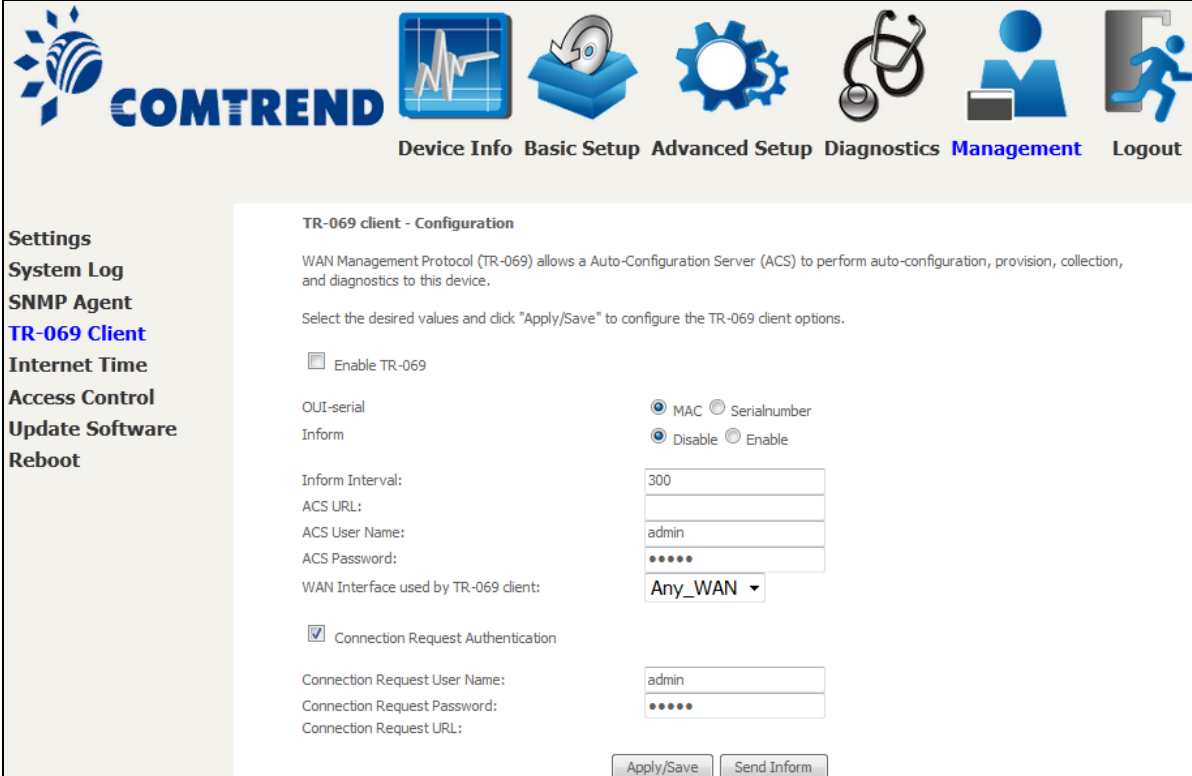

The table below is provided for ease of reference.


| Option          | Description                                                                                                                                                                                                                                                                                                                                |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Enable TR-069   | Tick the checkbox <input checked="" type="checkbox"/> to enable.                                                                                                                                                                                                                                                                           |
| OUI-serial      | The serial number used to identify the CPE when making a connection to the ACS using the CPE WAN Management Protocol. Select MAC to use the router's MAC address as serial number to authenticate with ACS or select serial number to use router's serial number.                                                                          |
| Inform          | Disable/Enable TR-069 client on the CPE.                                                                                                                                                                                                                                                                                                   |
| Inform Interval | The duration in seconds of the interval for which the CPE MUST attempt to connect with the ACS and call the Inform method.                                                                                                                                                                                                                 |
| ACS URL         | URL for the CPE to connect to the ACS using the CPE WAN Management Protocol. This parameter MUST be in the form of a valid HTTP or HTTPS URL. An HTTPS URL indicates that the ACS supports SSL. The "host" portion of this URL is used by the CPE for validating the certificate from the ACS when using certificate-based authentication. |

| Option                              | Description                                                                                                                                                                           |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ACS User Name                       | Username used to authenticate the CPE when making a connection to the ACS using the CPE WAN Management Protocol. This username is used only for HTTP-based authentication of the CPE. |
| ACS Password                        | Password used to authenticate the CPE when making a connection to the ACS using the CPE WAN Management Protocol. This password is used only for HTTP-based authentication of the CPE. |
| WAN Interface used by TR-069 client | Choose Any_WAN, LAN, Loopback or a configured connection.                                                                                                                             |
| <b>Connection Request</b>           |                                                                                                                                                                                       |
| Authentication                      | Tick the checkbox <input checked="" type="checkbox"/> to enable.                                                                                                                      |
| User Name                           | Username used to authenticate an ACS making a Connection Request to the CPE.                                                                                                          |
| Password                            | Password used to authenticate an ACS making a Connection Request to the CPE.                                                                                                          |
| URL                                 | IP address and port the ACS uses to connect to router.                                                                                                                                |

The **Send Inform** button forces the CPE to establish an immediate connection to the ACS.

## 8.5 Internet Time

This option automatically synchronizes the router time with Internet timeservers. To enable time synchronization, tick the corresponding checkbox ☒, choose your preferred time server(s), select the correct time zone offset, and click **Save/Apply**.

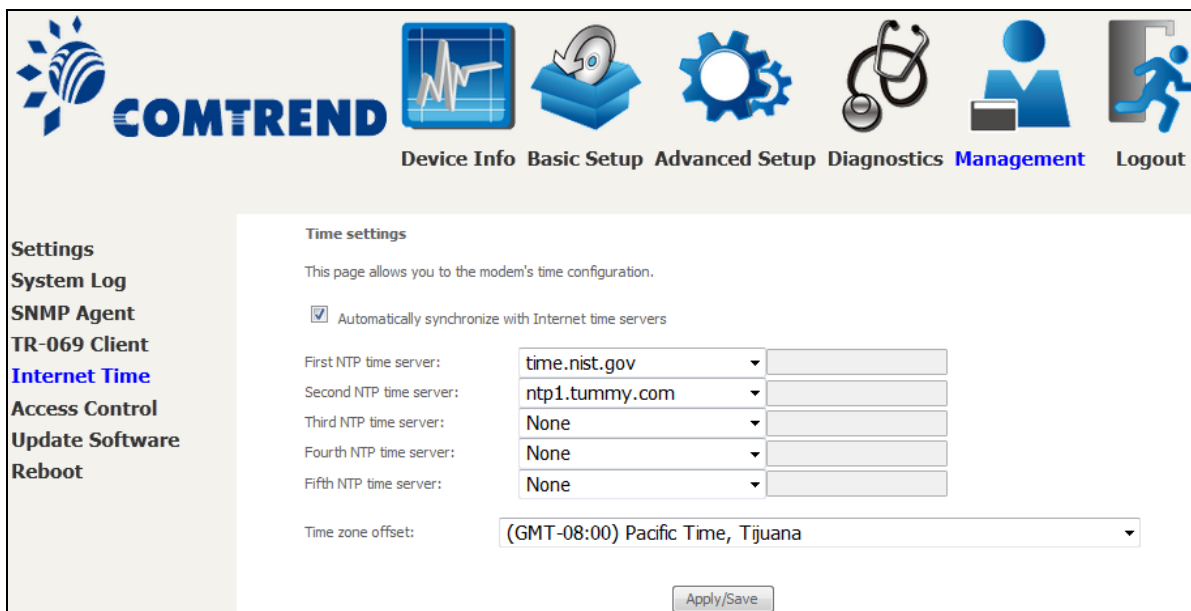

The screenshot shows the COMTREND router web interface. The top navigation bar includes links for Device Info, Basic Setup, Advanced Setup, Diagnostics, **Management**, and Logout. The left sidebar lists various settings options, with **Internet Time** highlighted. The main content area is titled "Time settings" and contains the following configuration options:

- ☒ Automatically synchronize with Internet time servers
- First NTP time server:
- Second NTP time server:
- Third NTP time server:
- Fourth NTP time server:
- Fifth NTP time server:
- Time zone offset:

An "Apply/Save" button is located at the bottom right of the settings area.

**NOTE:** Internet Time must be activated to use [Parental Control](#). In addition, this menu item is not displayed when in Bridge mode since the router would not be able to connect to the NTP timeserver.

## 8.6 Access Control

### 8.6.1 Accounts

This screen is used to configure the user account access passwords for the device. Access to the AR-5313u is controlled through the following user accounts:

- The root account has unrestricted access to view and change the configuration of your Broadband router.
- The support account is typically utilized by Carrier/ISP technicians for maintenance and diagnostics.
- The user account is typically utilized by End-Users to view configuration settings and statistics, with limited ability to configure certain settings.
- The apuser account is typically utilized by End-Users to view configuration settings and statistics, with limited ability to configure wireless settings.

Use the fields to update passwords for the accounts, add/remove accounts (max of 5 accounts) as well as adjust their specific privileges.


**COMTREND**

**Device Info Basic Setup Advanced Setup Diagnostics Management Logout**
**Settings**
**System Log**
**SNMP Agent**
**TR-069 Client**
**Internet Time**
**Access Control**
**Accounts**
**Service Access**
**IP Address**
**Update Software**
**Reboot**
**Access Control -- Accounts/Passwords**

By default, access to your Broadband router is controlled through three user accounts: root,support,and user.

The root account has unrestricted access to view and change the configuration of your Broadband router.

The support account is typically utilized by Carrier/ISP technicians for maintenance and diagnostics.

The user account is typically utilized by End-Users to view configuration settings and statistics, with limited ability to configure certain settings.

Use the fields below to update passwords for the accounts, add/remove accounts (max of 5 accounts). Note: Passwords may be as long as 16 characters but must not contain a space.

☒ Select an account:

☐ Create an account:

Old Password:

New Password:

Confirm Password:

Use the fields below to enable/disable accounts as well as adjust their specific privileges.

| Feature             | root    | support                             | user                                | apuser                              |
|---------------------|---------|-------------------------------------|-------------------------------------|-------------------------------------|
| Account access      | Both    | <input type="text" value="None"/>   | <input type="text" value="None"/>   | <input type="text" value="None"/>   |
| Add/Remove WAN      | Enabled | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            |
| Wireless - Basic    | Enabled | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| Wireless - Advanced | Enabled | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| LAN Settings        | Enabled | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
| LAN Port Mapping    | Enabled | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            |
| NAT Settings        | Enabled | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
| Update Software     | Enabled | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            |
| Security            | Enabled | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
| Quality of Service  | Enabled | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            |
| Management Settings | Enabled | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            |
| Advanced Setup      | Enabled | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            |
| Home Networking     | Enabled | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            |
| Parental Control    | Enabled | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |

Note: Passwords may be as long as 16 characters but must not contain a space. Click **Save/Apply** to continue.

## 8.6.2 Service Access

The Services option limits or opens the access services over the LAN or WAN. These access services available are: HTTP, SSH, TELNET, SNMP, HTTPS, FTP, TFTP and ICMP. Enable a service by selecting its dropdown listbox. Click **APPLY/SAVE** to activate.


**COMTREND**







Device Info Basic Setup Advanced Setup Diagnostics **Management** Logout

Settings  
System Log  
SNMP Agent  
TR-069 Client  
Internet Time  
Access Control  
Accounts  
**Service Access**  
IP Address  
Update Software  
Reboot

### Service Access Control Configuration


Select each listbox and click save/apply to configure your Setting.  
Notice: If you enable firewall , you still need to add incoming filter rule for those service.

| Service | Current | New     |
|---------|---------|---------|
| HTTP    | Lan     | LAN     |
| SSH     | Lan     | LAN     |
| TELNET  | Lan     | LAN     |
| SNMP    | Disable | Disable |
| HTTPS   | Lan     | LAN     |
| FTP     | Lan     | LAN     |
| TFTP    | Lan     | LAN     |
| ICMP    | Lan+Wan | LAN+WAN |

Apply/Save

### 8.6.3 IP Address

The IP Address Access Control mode, if enabled, permits access to local management services from IP addresses contained in the Access Control List. If the Access Control mode is disabled, the system will not validate IP addresses for incoming packets. The services are the system applications listed in the Service Control List **beside ICMP**.

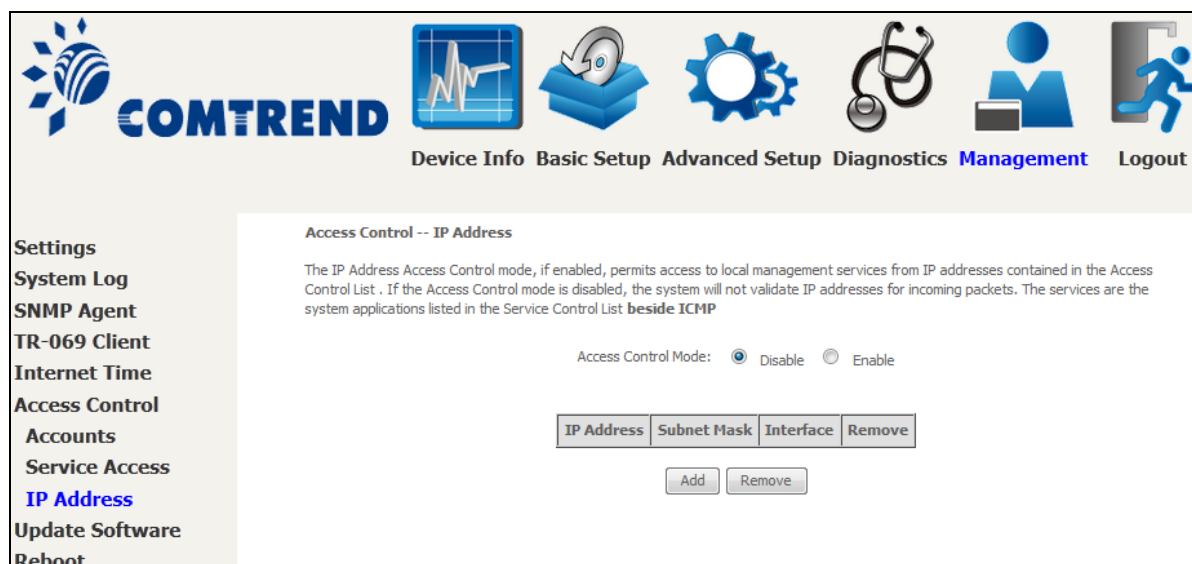


**Access Control -- IP Address**

The IP Address Access Control mode, if enabled, permits access to local management services from IP addresses contained in the Access Control List . If the Access Control mode is disabled, the system will not validate IP addresses for incoming packets. The services are the system applications listed in the Service Control List **beside ICMP**

Access Control Mode: ☒ Disable ☐ Enable

| IP Address | Subnet Mask | Interface | Remove |
|------------|-------------|-----------|--------|
|            |             |           |        |

Click the **Add** button to display the following.

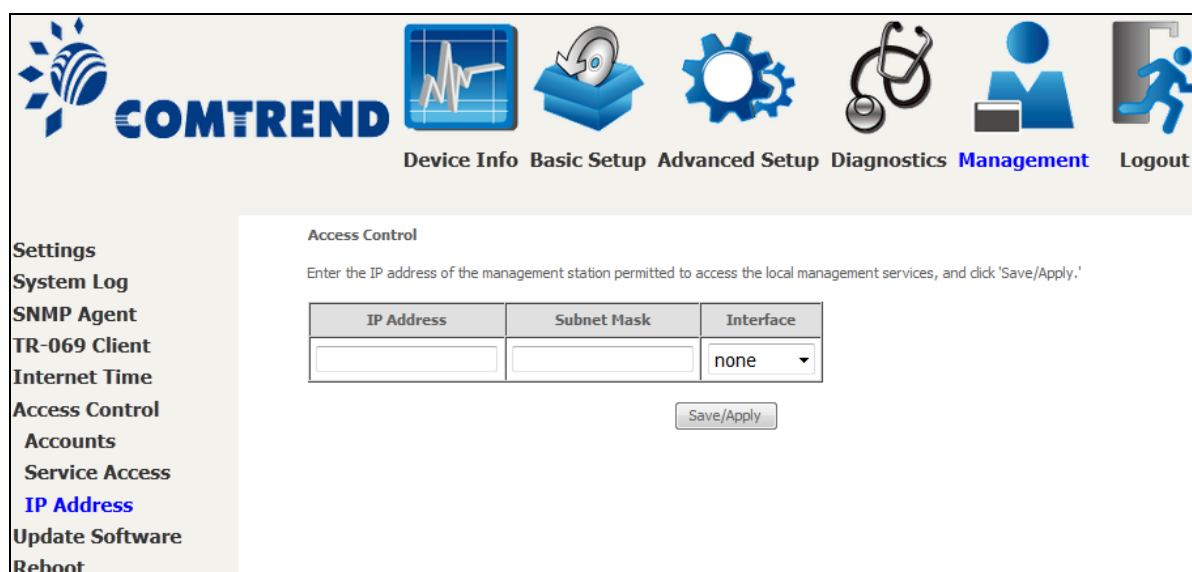

**Access Control**

Enter the IP address of the management station permitted to access the local management services, and click 'Save/Apply.'

| IP Address | Subnet Mask | Interface |
|------------|-------------|-----------|
|            |             | none      |

Configure the address and subnet of the management station permitted to access the local management services, and click **Save/Apply**.


**IP Address** – IP address of the management station.

**Subnet Mask** – Subnet address for the management station.

**Interface** – Access permission for the specified address, allowing the address to access the local management service from none/lan/wan/lan&wan interfaces.

### 8.6.3 IP Address

The IP Address Access Control mode, if enabled, permits access to local management services from IP addresses contained in the Access Control List. If the Access Control mode is disabled, the system will not validate IP addresses for incoming packets. The services are the system applications listed in the Service Control List **beside ICMP**.

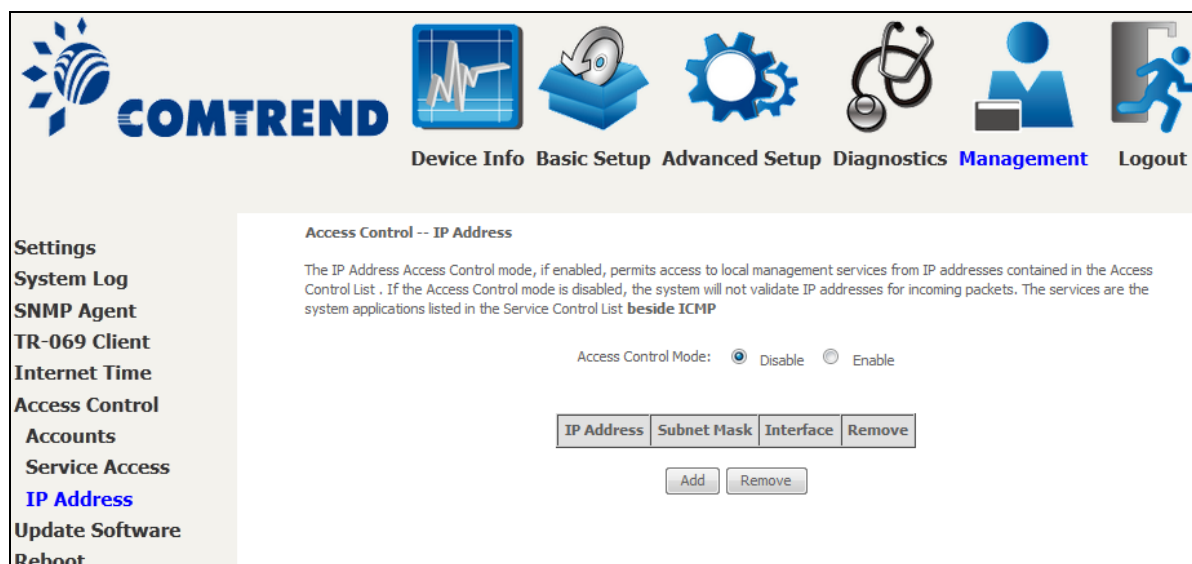


**Access Control -- IP Address**

The IP Address Access Control mode, if enabled, permits access to local management services from IP addresses contained in the Access Control List . If the Access Control mode is disabled, the system will not validate IP addresses for incoming packets. The services are the system applications listed in the Service Control List **beside ICMP**

Access Control Mode: ☒ Disable ☐ Enable

| IP Address | Subnet Mask | Interface | Remove                                                                   |
|------------|-------------|-----------|--------------------------------------------------------------------------|
|            |             |           | <input type="button" value="Add"/> <input type="button" value="Remove"/> |

Click the **Add** button to display the following.

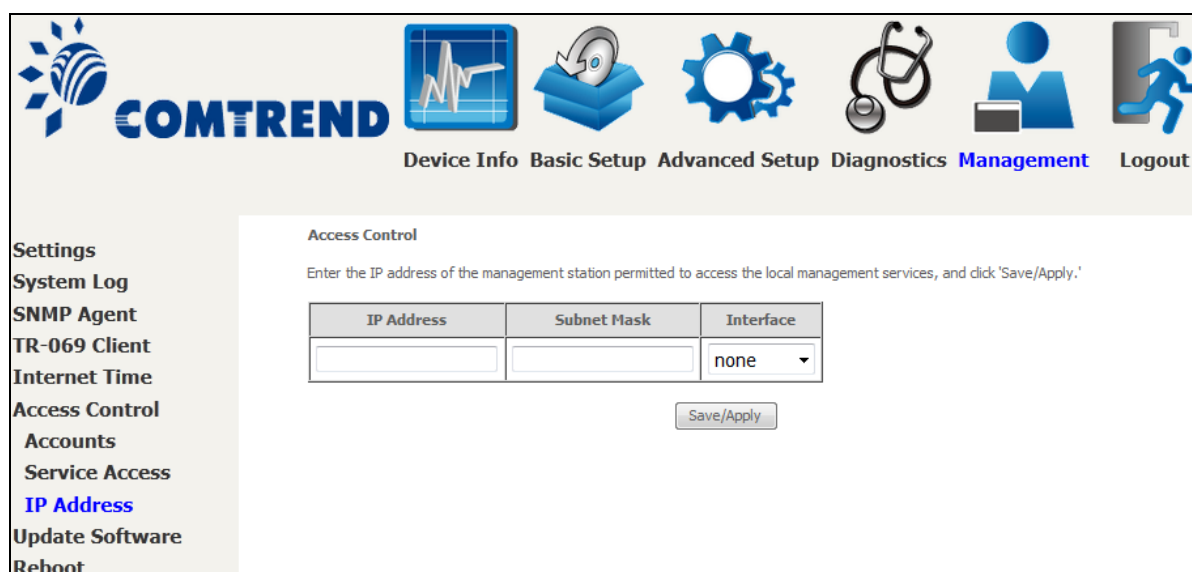

**Access Control**

Enter the IP address of the management station permitted to access the local management services, and click 'Save/Apply.'

| IP Address | Subnet Mask | Interface |
|------------|-------------|-----------|
|            |             | none      |

Configure the address and subnet of the management station permitted to access the local management services, and click **Save/Apply**.

**IP Address** – IP address of the management station.

**Subnet Mask** – Subnet address for the management station.

**Interface** – Access permission for the specified address, allowing the address to access the local management service from none/lan/wan/lan&wan interfaces.

## 8.7 Update Software

This option allows for firmware upgrades from a locally stored file.



**Tools -- Update Software**

**Step 1:** Obtain an updated software image file from your ISP.

**Step 2:** Enter the path to the image file location in the box below or click the "Browse" button to locate the image file.

**Step 3:** Click the "Update Software" button once to upload the new image file.

NOTE: The update process takes about 2 minutes to complete, and your Broadband Router will reboot.

Configuration:

Software File Name:  No file selected.

**STEP 1:** Obtain an updated software image file from your ISP.

**STEP 2:** Select the configuration from the drop-down menu.

### Configuration options:

**No change** – upgrade software directly.

**Erase current config** – If the router has save\_default configuration, this option will erase the current configuration and restore to save\_default configuration after software upgrade.

**Erase All** – Router will be restored to factory default configuration after software upgrade.

**STEP 3:** Enter the path and filename of the firmware image file in the **Software File Name** field or click the **Browse** button to locate the image file.

**STEP 4:** Click the **Update Software** button once to upload and install the file.


**NOTE:** The update process will take about 2 minutes to complete. The device will reboot and the browser window will refresh to the default screen upon successful installation. It is recommended that you compare the **Software Version** on the [Device Information](#) screen with the firmware version installed, to confirm the installation was successful.

## 8.8 Reboot

To save the current configuration and reboot the router, click **Save/Reboot**.



**NOTE:** You may need to close the browser window and wait for 2 minutes before reopening it. It may also be necessary, to reset your PC IP configuration.

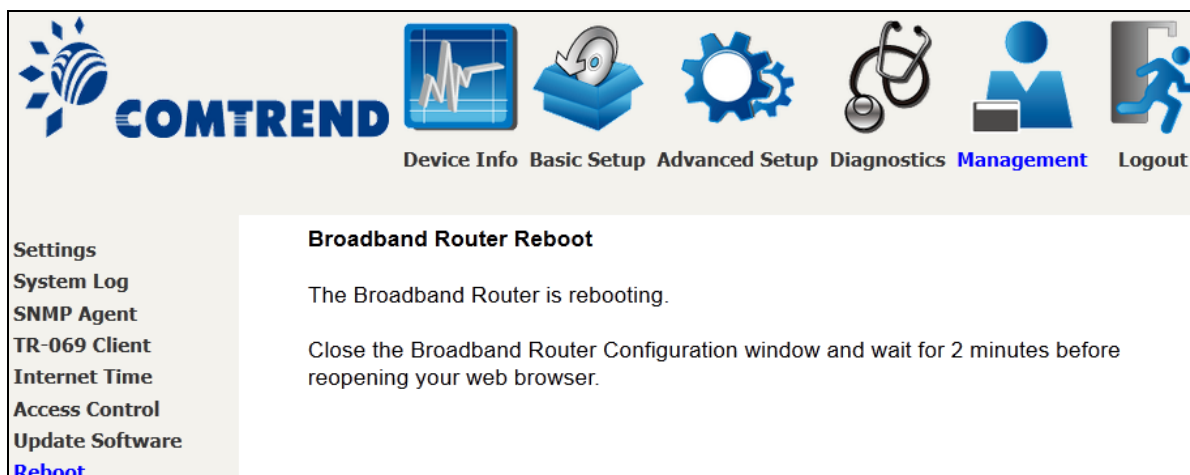


## Chapter 9 Logout


To log out from the device simply click the following icon located at the top of your screen.



When the following window pops up, click the **OK** button to exit the router.

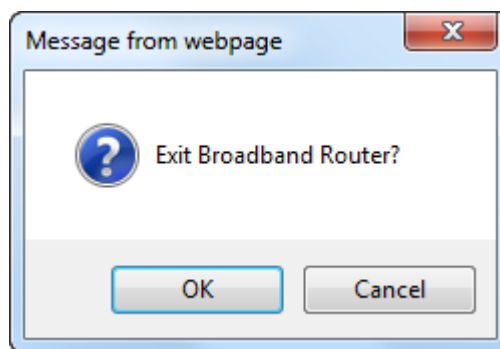

Upon successful exit, the following message will be displayed.

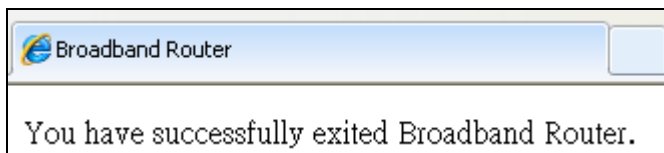

## Appendix A - Firewall

### STATEFUL PACKET INSPECTION

Refers to an architecture, where the firewall keeps track of packets on each connection traversing all its interfaces and makes sure they are valid. This is in contrast to static packet filtering which only examines a packet based on the information in the packet header.

### DENIAL OF SERVICE ATTACK

Is an incident in which a user or organization is deprived of the services of a resource they would normally expect to have. Various DoS attacks the device can withstand are ARP Attack, Ping Attack, Ping of Death, Land, SYN Attack, Smurf Attack, and Tear Drop.

### TCP/IP/PORT/INTERFACE FILTER

These rules help in the filtering of traffic at the Network layer (i.e. Layer 3).

When a Routing interface is created, **Enable Firewall** must be checked.

Navigate to Advanced Setup → Security → IP Filtering.

### OUTGOING IP FILTER

Helps in setting rules to DROP packets from the LAN interface. By default, if the Firewall is Enabled, all IP traffic from the LAN is allowed. By setting up one or more filters, specific packet types coming from the LAN can be dropped.

**Example 1:**

|                    |                 |
|--------------------|-----------------|
| Filter Name        | : Out_Filter1   |
| Protocol           | : TCP           |
| Source IP address  | : 192.168.1.45  |
| Source Subnet Mask | : 255.255.255.0 |
| Source Port        | : 80            |
| Dest. IP Address   | : NA            |
| Dest. Subnet Mask  | : NA            |
| Dest. Port         | : NA            |

This filter will Drop all TCP packets coming from the LAN with IP Address/Subnet Mask of 192.168.1.45/24 having a source port of 80 irrespective of the destination. All other packets will be Accepted.

**Example 2:**

|                    |                 |
|--------------------|-----------------|
| Filter Name        | : Out_Filter2   |
| Protocol           | : UDP           |
| Source IP Address  | : 192.168.1.45  |
| Source Subnet Mask | : 255.255.255.0 |
| Source Port        | : 5060:6060     |
| Dest. IP Address   | : 172.16.13.4   |
| Dest. Subnet Mask  | : 255.255.255.0 |
| Dest. Port         | : 6060:7070     |

This filter will drop all UDP packets coming from the LAN with IP Address / Subnet Mask of 192.168.1.45/24 and a source port range of 5060 to 6060, destined to 172.16.13.4/24 and a destination port range of 6060 to 7070.

## **INCOMING IP FILTER**

Helps in setting rules to Allow or Deny packets from the WAN interface. By default, all incoming IP traffic from the WAN is Blocked, if the Firewall is Enabled. By setting up one or more filters, specific packet types coming from the WAN can be Accepted.

**Example 1:**

|                        |                  |
|------------------------|------------------|
| Filter Name            | : In_Filter1     |
| Protocol               | : TCP            |
| Policy                 | : Allow          |
| Source IP Address      | : 210.168.219.45 |
| Source Subnet Mask     | : 255.255.0.0    |
| Source Port            | : 80             |
| Dest. IP Address       | : NA             |
| Dest. Subnet Mask      | : NA             |
| Dest. Port             | : NA             |
| Selected WAN interface | : br0            |

This filter will ACCEPT all TCP packets coming from WAN interface "br0" with IP Address/Subnet Mask 210.168.219.45/16 with a source port of 80, irrespective of the destination. All other incoming packets on this interface are DROPPED.

**Example 2:**

|                        |                  |
|------------------------|------------------|
| Filter Name            | : In_Filter2     |
| Protocol               | : UDP            |
| Policy                 | : Allow          |
| Source IP Address      | : 210.168.219.45 |
| Source Subnet Mask     | : 255.255.0.0    |
| Source Port            | : 5060:6060      |
| Dest. IP Address       | : 192.168.1.45   |
| Dest. Sub. Mask        | : 255.255.255.0  |
| Dest. Port             | : 6060:7070      |
| Selected WAN interface | : br0            |

This rule will ACCEPT all UDP packets coming from WAN interface "br0" with IP Address/Subnet Mask 210.168.219.45/16 and a source port in the range of 5060 to 6060, destined to 192.168.1.45/24 and a destination port in the range of 6060 to 7070. All other incoming packets on this interface are DROPPED.

## **MAC LAYER FILTER**

These rules help in the filtering of Layer 2 traffic. MAC Filtering is only effective in Bridge mode. After a Bridge mode connection is created, navigate to Advanced Setup → Security → MAC Filtering in the WUI.

**Example 1:**

|                    |                     |
|--------------------|---------------------|
| Global Policy      | : Forwarded         |
| Protocol Type      | : PPPoE             |
| Dest. MAC Address  | : 00:12:34:56:78:90 |
| Source MAC Address | : NA                |
| Src. Interface     | : eth1              |
| Dest. Interface    | : eth2              |

Addition of this rule drops all PPPoE frames going from eth1 to eth2 with a Destination MAC Address of 00:12:34:56:78:90 irrespective of its Source MAC Address. All other frames on this interface are forwarded.

**Example 2:**

|                    |                     |
|--------------------|---------------------|
| Global Policy      | : Blocked           |
| Protocol Type      | : PPPoE             |
| Dest. MAC Address  | : 00:12:34:56:78:90 |
| Source MAC Address | : 00:34:12:78:90:56 |
| Src. Interface     | : eth1              |
| Dest. Interface    | : eth2              |

Addition of this rule forwards all PPPoE frames going from eth1 to eth2 with a Destination MAC Address of 00:12:34:56:78 and Source MAC Address of 00:34:12:78:90:56. All other frames on this interface are dropped.

### **DAYTIME PARENTAL CONTROL**

This feature restricts access of a selected LAN device to an outside Network through the AR-5313u , as per chosen days of the week and the chosen times.

**Example:**

|                       |                     |
|-----------------------|---------------------|
| User Name             | : FilterJohn        |
| Browser's MAC Address | : 00:25:46:78:63:21 |
| Days of the Week      | : Mon, Wed, Fri     |
| Start Blocking Time   | : 14:00             |
| End Blocking Time     | : 18:00             |

With this rule, a LAN device with MAC Address of 00:25:46:78:63:21 will have no access to the WAN on Mondays, Wednesdays, and Fridays, from 2pm to 6pm. On all other days and times, this device will have access to the outside Network.

## Appendix B - Pin Assignments

### ETHERNET Ports (RJ45)

#### ETHERNET LAN Ports (10/100Base-T)

**Table 1**

| Pin | Definition     | Pin | Definition    |
|-----|----------------|-----|---------------|
| 1   | Transmit data+ | 5   | NC            |
| 2   | Transmit data- | 6   | Receive data- |
| 3   | Receive data+  | 7   | NC            |
| 4   | NC             | 8   | NC            |

#### Signals for ETHERNET WAN port (10/1001000Base-T)

**Table 2**

| Pin | Signal name | Signal definition                       |
|-----|-------------|-----------------------------------------|
| 1   | TRD+(0)     | Transmit/Receive data 0 (positive lead) |
| 2   | TRD-(0)     | Transmit/Receive data 0 (negative lead) |
| 3   | TRD+(1)     | Transmit/Receive data 1 (positive lead) |
| 4   | TRD+(2)     | Transmit/Receive data 2 (positive lead) |
| 5   | TRD-(2)     | Transmit/Receive data 2 (negative lead) |
| 6   | TRD-(1)     | Transmit/Receive data 1 (negative lead) |
| 7   | TRD+(3)     | Transmit/Receive data 3 (positive lead) |
| 8   | TRD-(3)     | Transmit/Receive data 3 (negative lead) |

#### DSL Port

**Table 3**

| Pin | Signal definition |
|-----|-------------------|
| 1   | LINE2 TIP         |
| 2   | LINE1 TIP         |
| 3   | LINE1 RING        |
| 4   | LINE2 RING        |

## Appendix C – Specifications

### Hardware Interface

- RJ-11 X 1 for ADSL
- RJ-45 X 4 for LAN (10/100 Base-T auto-sense)
- WPS/Wi-Fi Button X 1
- On/Off Button X 1
- Reset Button X 1
- USB Host X 1
- Wi-Fi Antenna X 2

### WAN Interface

- Downstream up to 12M for ADSL, 24 Mbps for ADSL2+; Upstream up to 1.3 Mbps,
- ITU-T G.992.5, ITU-T G.992.3, ITU-T G.992.1, ANSI T1.413 Issue 2, Annex A/L/M

### LAN Interface

- Standard IEEE 802.3, IEEE 802.3u
- Support MDI/MDX
- 10/100 Base T Auto-sense

### Wireless Interface

- IEEE802.11b/g/n
- 64, 128-bit Wired Equivalent Privacy (WEP) Data Encryption
- 11 Channels (US, Canada)
- WDS/WEP/WPA/WPA2 Yes

### Management

- Remote upgrade
- TFTP/FTP upgrade
- Telnet remote access support
- Support Web based configuration
- Support for backup & restore configuration to/from PC

### Networking Protocols

- RFC 2684 VC-MUX, LLC/SNAP encapsulations for bridged or routed packet
- RFC 2364 PPP over AAL5
- IPoA, PPPoA, PPPoE, Multiple PPPoE sessions on single PVC, PPPoE pass-through
- PPPoE filtering of on-PPPoE packets between WAN and LAN
- Transparent bridging between all LAN and WAN interfaces
- 802.1p/802.1q VLAN support
- Spanning Tree Algorithm
- IGMP Proxy V1/V2/V3, IGMP Snooping V1/V2/V3, Fast leave
- Static route, RIP v1/v2, ARP, RARP, SNTP
- DHCP Server/Client/Relay,
- DNS Proxy/Relay, Dynamic DNS,
- UPnP IGD v1.0
- IPv6 subset

## Security Functions

- PAP, CHAP, Packet and MAC address filtering, SSH
- Three level login including local admin, local user and remote technical support access

## QoS

- Packet level QoS classification rules,
- Priority queuing using ATM/PTM TX queues,
- IP TOS/Precedence,
- 802.1p marking,
- DiffServ DSCP marking
- Src/dest MAC addresses classification

## Firewall/Filtering

- Stateful Inspection Firewall
- Stateless Packet Filter
- Denial of Service (DOS): ARP attacks, Ping attacks, Ping of Death, LAND, SYNC, Smurf, Unreachable, Teardrop
- TCP/IP/Port/interface filtering rules Support both incoming and outgoing filtering

## NAT/NAPT

- Support Port Triggering and Port forwarding
- Symmetric port-overloading NAT, Full-Cone NAT
- Dynamic NAPT (NAPT N-to-1)
- Support DMZ host
- Virtual Server (Port forwarding)
- VPN Passthrough (PPTP, L2TP, IPSec)

## Application Passthrough

PPTP, L2TP, IPSec, Yahoo messenger, ICQ, RealPlayer, NetMeeting, MSN, X-box, etc.

**Power Supply** ..... Input: 100 - 240 Vac  
Output: 12 Vdc / 0.5 A

## Environment Condition

Operating temperature..... 0 ~ 40 degrees Celsius  
Humidity..... 5 ~ 90% (non-condensing, standard operating)

**Dimensions**..... 173 mm (W) x 39 mm (H) x 135.8 mm (D)

**Certifications**..... CE

## Kit Weight

(1\*AR-5313u, 1\*RJ11 cable, 1\*RJ45 cable, 1\*power adapter, 1\*CD-ROM)

|                                                                  |
|------------------------------------------------------------------|
| <b>NOTE:</b> Specifications are subject to change without notice |
|------------------------------------------------------------------|

## Appendix D - SSH Client

Unlike Microsoft Windows, Linux OS has a ssh client included. For Windows users, there is a public domain one called "putty" that can be downloaded from here:

<http://www.chiark.greenend.org.uk/~sgtatham/putty/download.html>

To access the ssh client you must first enable SSH access for the LAN or WAN from the Management → Access Control → Services menu in the web user interface.

To access the router using the Linux ssh client

For LAN access, type: `ssh -l root 192.168.1.1`

For WAN access, type: `ssh -l support WAN IP address`

To access the router using the Windows "putty" ssh client

For LAN access, type: `putty -ssh -l root 192.168.1.1`

For WAN access, type: `putty -ssh -l support WAN IP address`

**NOTE:** The WAN IP address can be found on the Device Info → WAN screen

## Appendix E - Connection Setup

Creating a WAN connection is a two-stage process.

- 1 - Setup a Layer 2 Interface (ATM, PTM or Ethernet).
- 2 - Add a WAN connection to the Layer 2 Interface.

The following sections describe each stage in turn.

### E1 ~ Layer 2 Interfaces

Every layer2 interface operates in Multi-Service Connection (VLAN MUX) mode, which supports multiple connections over a single interface. Note that PPPoA and IPoA connection types are not supported for Ethernet WAN interfaces. After adding WAN connections to an interface, you must also create an Interface Group to connect LAN/WAN interfaces.


#### E1.1 ATM Interfaces

Follow these procedures to configure an ATM interface.

**NOTE:** The AR-5313u supports up to 16 ATM interfaces.



**STEP 1:** Go to Basic Setup → WAN Setup → Select ATM Interface from the drop-down menu.

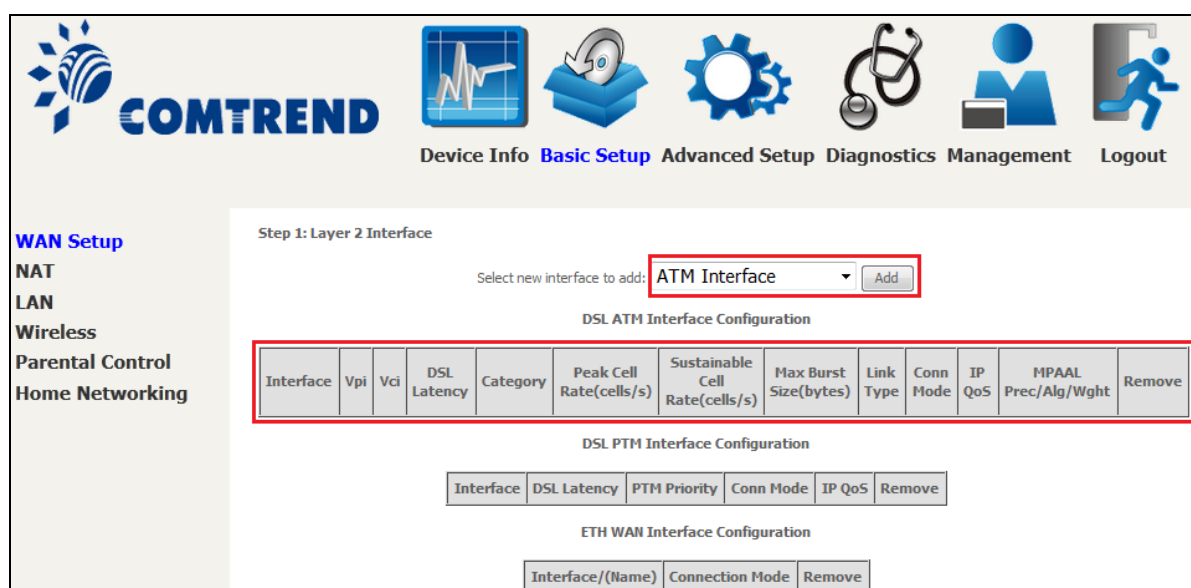

**Step 1: Layer 2 Interface**

Select new interface to add: **ATM Interface**

**DSL ATM Interface Configuration**

| Interface | Vpi | Vci | DSL Latency | Category | Peak Cell Rate(cells/s) | Sustainable Cell Rate(cells/s) | Max Burst Size(bytes) | Link Type | Conn Mode | IP QoS | MPAAL | Remove |
|-----------|-----|-----|-------------|----------|-------------------------|--------------------------------|-----------------------|-----------|-----------|--------|-------|--------|
|-----------|-----|-----|-------------|----------|-------------------------|--------------------------------|-----------------------|-----------|-----------|--------|-------|--------|

**DSL PTM Interface Configuration**

| Interface | DSL Latency | PTM Priority | Conn Mode | IP QoS | Remove |
|-----------|-------------|--------------|-----------|--------|--------|
|-----------|-------------|--------------|-----------|--------|--------|

**ETH WAN Interface Configuration**

| Interface/(Name) | Connection Mode | Remove |
|------------------|-----------------|--------|
|------------------|-----------------|--------|

This table is provided here for ease of reference.

| Heading               | Description                                                                                                    |
|-----------------------|----------------------------------------------------------------------------------------------------------------|
| Interface             | WAN interface name                                                                                             |
| VPI                   | ATM VPI (0-255)                                                                                                |
| VCI                   | ATM VCI (32-65535)                                                                                             |
| DSL Latency           | {Path0} → portID = 0                                                                                           |
| Category              | ATM service category                                                                                           |
| Peak Cell Rate        | Maximum allowed traffic rate for the ATM PCR service connection                                                |
| Sustainable Cell Rate | The average allowable, long-term cell transfer rate on the VBR service connection                              |
| Max Burst Size        | The maximum allowable burst size of cells that can be transmitted contiguously on the VBR service connection   |
| Link Type             | Choose EoA (for PPPoE, IPoE, and Bridge), PPPoA, or IPoA.                                                      |
| Connection Mode       | Default Mode – Single service over one connection<br>Vlan Mux Mode – Multiple Vlan service over one connection |
| IP QoS                | Quality of Service (QoS) status                                                                                |
| MPAAL                 | QoS Scheduler algorithm and queue weight defined for the connection                                            |
| Remove                | Select items for removal                                                                                       |

**STEP 2:** Click **Add** to proceed to the next screen.

**NOTE:** To add WAN connections to one interface type, you must delete existing connections from the other interface type using the **remove** button.

### ATM PVC Configuration

This screen allows you to configure a ATM PVC.

VPI:  [0-255]

VCI:  [32-65535]

Select DSL Link Type (EoA is for PPPoE, IPoE, and Bridge.)

- ☒ EoA
- ☐ PPPoA
- ☐ IPoA

Encapsulation Mode:

Service Category:

Select Scheduler for Queues of Equal Precedence as the Default Queue

- ☒ Weighted Round Robin
- ☐ Weighted Fair Queuing

Default Queue Weight:  [1-63]

Default Queue Precedence:  [1-8] (lower value, higher priority)

VC WRR Weight:  [1-63]

VC Precedence:  [1-8] (lower value, higher priority)

Note: VC scheduling will be SP among unequal precedence VC's and WRR among equal precedence VC's. For single queue VC, the default queue precedence and weight will be used for arbitration. For multi-queue VC, its VC precedence and weight will be used for arbitration.

There are many settings here including: VPI/VCI, DSL Link Type, Encapsulation Mode, Service Category, Connection Mode and Quality of Service.

Here are the available encapsulations for each xDSL Link Type:

- ◆ EoA- LLC/SNAP-BRIDGING, VC/MUX
- ◆ PPPoA- VC/MUX, LLC/ENCAPSULATION
- ◆ IPoA- LLC/SNAP-ROUTING, VC MUX

**STEP 3:** Click **Apply/Save** to confirm your choices.

On the next screen, check that the ATM interface is added to the list. For example, an ATM interface on PVC 0/35 in Default Mode with an EoA Link type is shown below.

**DSL ATM Interface Configuration**

Choose Add, or Remove to configure DSL ATM interfaces.

| Interface | Vpi | Vci | DSL Latency | Category | Peak Cell Rate(cells/s) | Sustainable Cell Rate(cells/s) | Max Burst Size(bytes) | Link Type | Conn Mode   | IP QoS  | MPAAL Prec/Alg/Wght | Remove                   |
|-----------|-----|-----|-------------|----------|-------------------------|--------------------------------|-----------------------|-----------|-------------|---------|---------------------|--------------------------|
| atm0      | 0   | 35  | Path0       | UBR      |                         |                                |                       | EoA       | VlanMuxMode | Support | 8/WRR/1             | <input type="checkbox"/> |

To add a WAN connection go to [E2 ~ WAN Connections](#).


## E1.2 PTM Interfaces

Follow these procedures to configure a PTM interface.

**NOTE:** The AR-5313u supports up to four PTM interfaces.



**STEP 1:** Go to Basic Setup → WAN Setup → Select PTM Interface from the drop-down menu.

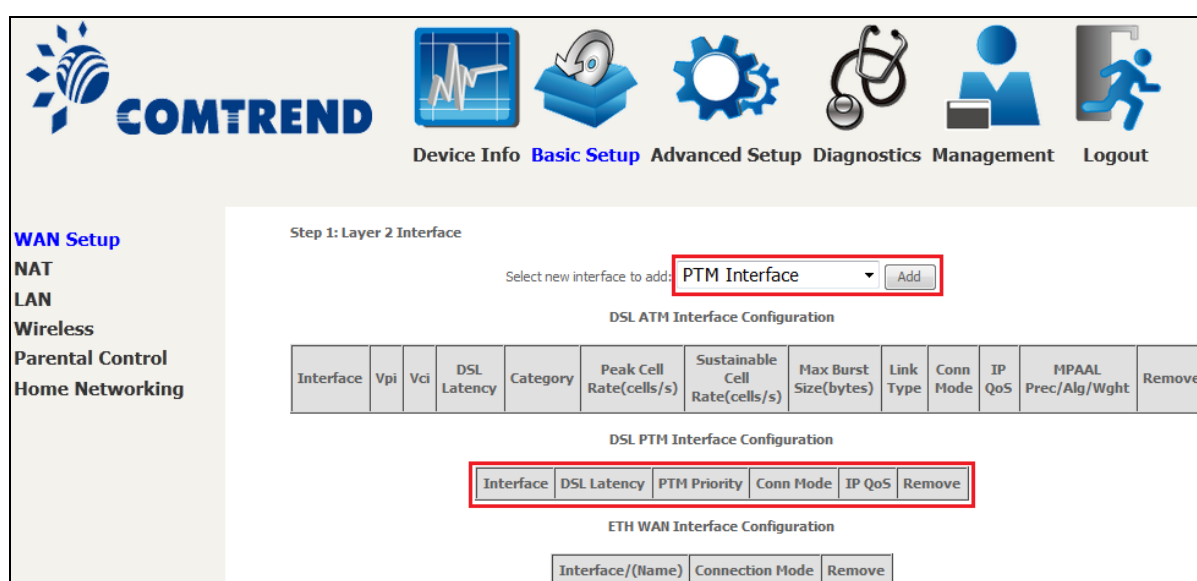

Step 1: Layer 2 Interface

Select new interface to add: **PTM Interface**

DSL ATM Interface Configuration

| Interface | Vpi | Vci | DSL Latency | Category | Peak Cell Rate(cells/s) | Sustainable Cell Rate(cells/s) | Max Burst Size(bytes) | Link Type | Conn Mode | IP QoS | MPAAL Prec/Alg/Wght | Remove |
|-----------|-----|-----|-------------|----------|-------------------------|--------------------------------|-----------------------|-----------|-----------|--------|---------------------|--------|
|-----------|-----|-----|-------------|----------|-------------------------|--------------------------------|-----------------------|-----------|-----------|--------|---------------------|--------|

DSL PTM Interface Configuration

| Interface | DSL Latency | PTM Priority | Conn Mode | IP QoS | Remove |
|-----------|-------------|--------------|-----------|--------|--------|
|-----------|-------------|--------------|-----------|--------|--------|

ETH WAN Interface Configuration

| Interface/(Name) | Connection Mode | Remove |
|------------------|-----------------|--------|
|------------------|-----------------|--------|

This table is provided here for ease of reference.

| Heading         | Description                                                                                                     |
|-----------------|-----------------------------------------------------------------------------------------------------------------|
| Interface       | WAN interface name.                                                                                             |
| DSL Latency     | {Path0} → portID = 0                                                                                            |
| PTM Priority    | Normal or High Priority (Preemption).                                                                           |
| Connection Mode | Default Mode – Single service over one interface.<br>Vlan Mux Mode – Multiple Vlan services over one interface. |
| IP QoS          | Quality of Service (QoS) status.                                                                                |
| Remove          | Select interfaces to remove.                                                                                    |

**STEP 2:** Click **Add** to proceed to the next screen.

**NOTE:** To add WAN connections to one interface type, you must delete existing connections from the other interface type using the **remove** button.

## PTM Configuration

This screen allows you to configure a PTM flow.

Select Scheduler for Queues of Equal Precedence as the Default Queue

- ☒ Weighted Round Robin
- ☐ Weighted Fair Queuing

Default Queue Weight:  [1-63]

Default Queue Precedence:  [1-8] (lower value, higher priority)

Default Queue Shaping Rate:  [Kbits/s] (blank indicates no shaping)

Default Queue Shaping Burst Size:  [bytes] (shall be  $\geq 1600$ )

[Back](#)

[Apply/Save](#)

There are many settings that can be configured here including:  
PTM Priority, Connection Mode and Quality of Service.

**STEP 3:** Click **Apply/Save** to confirm your choices.

On the next screen, check that the PTM interface is added to the list.

For example, an PTM interface in Default Mode is shown below.

| DSL PTM Interface Configuration |             |              |             |         |                        |
|---------------------------------|-------------|--------------|-------------|---------|------------------------|
| Interface                       | DSL Latency | PTM Priority | Conn Mode   | IP QoS  | Remove                 |
| ptm0                            | Path0       | Normal&High  | VlanMuxMode | Support | <a href="#">Remove</a> |


To add a WAN connection go to section [E2 WAN Connections](#).

## E1.3 ETHERNET Interfaces

Follow these procedures to configure a PTM interface.



**STEP 1:** Go to Basic Setup → WAN Setup → Select ETHERNET Interface from the drop-down menu.

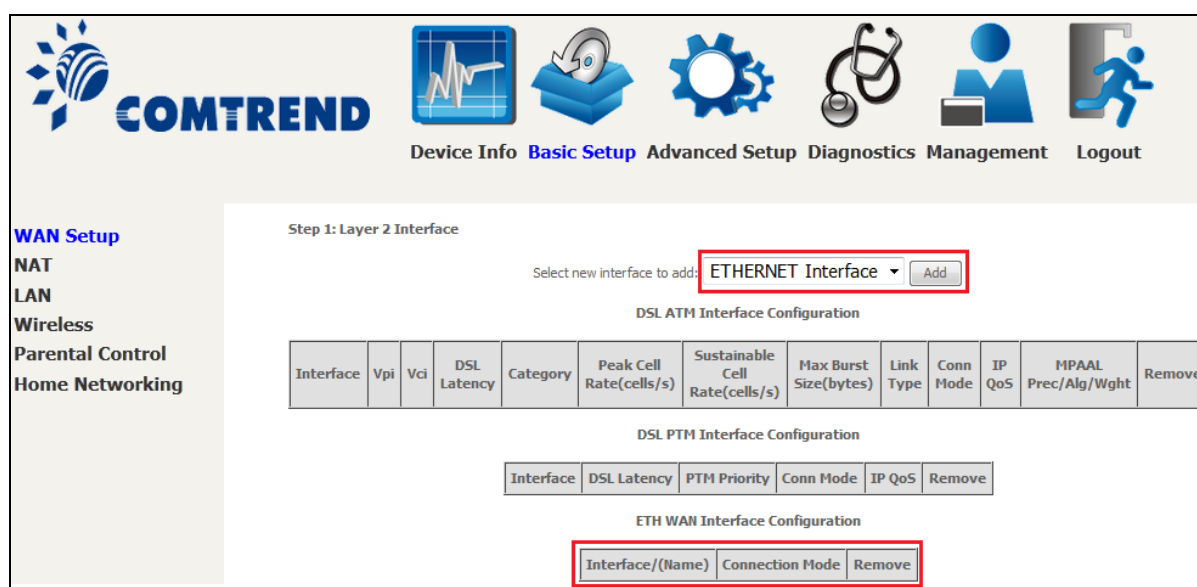

Step 1: Layer 2 Interface

Select new interface to add: **ETHERNET Interface** Add

DSL ATM Interface Configuration

| Interface | Vpi | Vci | DSL Latency | Category | Peak Cell Rate(cells/s) | Sustainable Cell Rate(cells/s) | Max Burst Size(bytes) | Link Type | Conn Mode | IP QoS | MPAAL Prec/Alg/Wght | Remove |
|-----------|-----|-----|-------------|----------|-------------------------|--------------------------------|-----------------------|-----------|-----------|--------|---------------------|--------|
|-----------|-----|-----|-------------|----------|-------------------------|--------------------------------|-----------------------|-----------|-----------|--------|---------------------|--------|

DSL PTM Interface Configuration

| Interface | DSL Latency | PTM Priority | Conn Mode | IP QoS | Remove |
|-----------|-------------|--------------|-----------|--------|--------|
|-----------|-------------|--------------|-----------|--------|--------|


ETH WAN Interface Configuration

| Interface/(Name) | Connection Mode | Remove |
|------------------|-----------------|--------|
|------------------|-----------------|--------|

This table is provided here for ease of reference.

| Heading           | Description                                                                                                     |
|-------------------|-----------------------------------------------------------------------------------------------------------------|
| Interface/ (Name) | WAN interface name.                                                                                             |
| Connection Mode   | Default Mode – Single service over one interface.<br>Vlan Mux Mode – Multiple Vlan services over one interface. |
| Remove            | Select interfaces to remove.                                                                                    |

**STEP 2:** Click **Add** to proceed to the next screen.

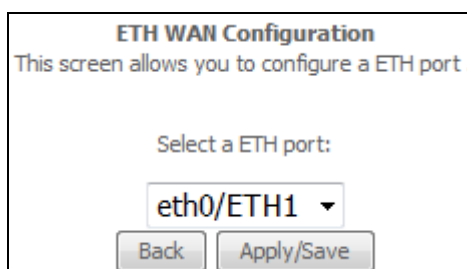

**ETH WAN Configuration**

This screen allows you to configure a ETH port .

Select a ETH port:

eth0/ETH1

Back Apply/Save

**STEP 3:** Select an Ethernet port and Click **Apply/Save** to confirm your choices.


On the next screen, check that the ETHERNET interface is added to the list.

| ETH WAN Interface Configuration |                 |                                       |
|---------------------------------|-----------------|---------------------------------------|
| Interface/(Name)                | Connection Mode | Remove                                |
| eth0/ETH1                       | VlanMuxMode     | <input type="button" value="Remove"/> |

## E2 ~ WAN Connections

The AR-5313u supports one WAN connection for each interface, up to a maximum of 16 connections.

To setup a WAN connection follow these instructions.



**STEP 1:** Go to Basic Setup → WAN Setup.

**Step 2: Wide Area Network (WAN) Service Setup**

PPP Redirect: ☒ Disable ☐ Enable

| Interface             | Description | Type | Vlan8021p | VlanMuxId | Igmp | NAT | Firewall | IPv6 | Mld | Remove | Edit |
|-----------------------|-------------|------|-----------|-----------|------|-----|----------|------|-----|--------|------|
| <div>Add Remove</div> |             |      |           |           |      |     |          |      |     |        |      |

**STEP 2:** Click **Add** to create a WAN connection. The following screen will display.

**WAN Service Interface Configuration**

Select a layer 2 interface for this service

Note: For ATM interface, the descriptor string is (portId\_vpi\_vci)  
 For PTM interface, the descriptor string is (portId\_high\_low)  
 Where portId=0 --> DSL Latency PATH0  
 portId=1 --> DSL Latency PATH1  
 portId=4 --> DSL Latency PATH0&1  
 low =0 --> Low PTM Priority not set  
 low =1 --> Low PTM Priority set  
 high =0 --> High PTM Priority not set  
 high =1 --> High PTM Priority set

atm0/(0\_0\_35) ▼

Back Next

**STEP 3:** Choose a layer 2 interface from the drop-down box and click **Next**. The WAN Service Configuration screen will display as shown below.

**WAN Service Configuration**

Select WAN service type:

☒ PPP over Ethernet (PPPoE)  
☐ IP over Ethernet  
☐ Bridging

Enter Service Description:

For tagged service, enter valid 802.1P Priority and 802.1Q VLAN ID.  
 For untagged service, set -1 to both 802.1P Priority and 802.1Q VLAN ID.

Enter 802.1P Priority [0-7]:

Enter 802.1Q VLAN ID [0-4094]:

Network Protocol Selection:

**NOTE:** The WAN services shown here are those supported by the layer 2 interface you selected in the previous step. If you wish to change your selection click the **Back** button and select a different layer 2 interface.

**STEP 4:** For VLAN Mux Connections only, you must enter Priority & VLAN ID tags.

Enter 802.1P Priority [0-7]:

Enter 802.1Q VLAN ID [0-4094]:

**STEP 5:** You will now follow the instructions specific to the WAN service type you wish to establish. This list should help you locate the correct procedure:

- (1) [E2.1 PPP over ETHERNET \(PPPoE\) – IPv4](#)
- (2) [E2.2 IP over ETHERNET \(IPoE\) – IPv4](#)
- (3) [E2.3 Bridging – IPv4](#)
- (4) [E2.4 PPP over ATM \(PPPoA\) – IPv4](#)
- (5) [E2.5 IP over ATM \(IPoA\) – IPv4](#)
- (6) [E2.6 PPP over ETHERNET \(PPPoE\) – IPv6](#)
- (7) [E2.7 IP over ETHERNET \(IPoE\) – IPv6](#)
- (8) [Bridging – IPv6 \(Not Supported\)](#)
- (9) [E2.8 PPP over ATM \(PPPoA\) – IPv6](#)
- (10) [IPoA – IPv6 \(Not Supported\)](#)

The subsections that follow continue the WAN service setup procedure.

## E2.1 PPP over ETHERNET (PPPoE) – IPv4

**STEP 1:** Select the PPP over Ethernet radio button and click **Next**. You can also enable IPv6 by ticking the checkbox ☒ at the bottom of this screen.

### WAN Service Configuration

Select WAN service type:

☒ PPP over Ethernet (PPPoE)  
☐ IP over Ethernet  
☐ Bridging

Enter Service Description:

For tagged service, enter valid 802.1P Priority and 802.1Q VLAN ID.  
For untagged service, set -1 to both 802.1P Priority and 802.1Q VLAN ID.

Enter 802.1P Priority [0-7]:

Enter 802.1Q VLAN ID [0-4094]:

Network Protocol Selection:  
 ▼

**STEP 2:** On the next screen, enter the PPP settings as provided by your ISP. Click **Next** to continue or click **Back** to return to the previous step.

### PPP Username and Password

PPP usually requires that you have a user name and password to establish your connection. In the boxes below, enter the user name and password that your ISP has provided to you.

PPP Username:

PPP Password:

PPPoE Service Name:

Authentication Method: **AUTO** ▼

☐ Enable Fullcone NAT

☐ Dial on demand (with idle timeout timer)

☐ PPP IP extension

☒ Enable NAT

☐ Enable Firewall

☐ Use Static IPv4 Address

☒ Fixed MTU

MTU:

☐ Enable PPP Debug Mode

☐ Bridge PPPoE Frames Between WAN and Local Ports

### Multicast Proxy

☐ Enable IGMP Multicast Proxy

☐ No Multicast VLAN Filter

### WAN interface with base MAC.

Notice: Only one WAN interface can be cloned to base MAC address.

☐ Enable WAN interface with base MAC

The settings shown above are described below.

## PPP SETTINGS

The PPP Username, PPP password and the PPPoE Service Name entries are dependent on the particular requirements of the ISP. The user name can be a maximum of 256 characters and the password a maximum of 32 characters in length. For Authentication Method, choose from AUTO, PAP, CHAP, and MSCHAP.

### ENABLE FULLCONE NAT

This option becomes available when NAT is enabled. Known as one-to-one NAT, all requests from the same internal IP address and port are mapped to the same external IP address and port. An external host can send a packet to the internal host, by sending a packet to the mapped external address.

### DIAL ON DEMAND

The AR-5313u can be configured to disconnect if there is no activity for a period of time by selecting the **Dial on demand** checkbox ☒. You must also enter an inactivity timeout period in the range of 1 to 4320 minutes.

|                                                                              |
|------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> Dial on demand (with idle timeout timer) |
| Inactivity Timeout (minutes) [1-4320]: <input type="text"/>                  |

### PPP IP EXTENSION

The PPP IP Extension is a special feature deployed by some service providers. Unless your service provider specifically requires this setup, do not select it.

PPP IP Extension does the following:

- Allows only one PC on the LAN.
- Disables NAT and Firewall.
- The device becomes the default gateway and DNS server to the PC through DHCP using the LAN interface IP address.
- The device extends the IP subnet at the remote service provider to the LAN PC. i.e. the PC becomes a host belonging to the same IP subnet.
- The device bridges the IP packets between WAN and LAN ports, unless the packet is addressed to the device's LAN IP address.
- The public IP address assigned by the remote side using the PPP/IPCP protocol is actually not used on the WAN PPP interface. Instead, it is forwarded to the PC LAN interface through DHCP. Only one PC on the LAN can be connected to the remote, since the DHCP server within the device has only a single IP address to assign to a LAN device.

### ENABLE NAT

If the LAN is configured with a private IP address, the user should select this checkbox ☒. The NAT submenu will appear in the Advanced Setup menu after reboot. On the other hand, if a private IP address is not used on the LAN side (i.e. the LAN side is using a public IP), this checkbox ☒ should not be selected to free up system resources for better performance.

### ENABLE FIREWALL

If this checkbox ☒ is selected, the Security submenu will be displayed on the Advanced Setup menu after reboot. If firewall is not necessary, this checkbox ☒ should not be selected to free up system resources for better performance.

### USE STATIC IPv4 ADDRESS

Unless your service provider specially requires it, do not select this checkbox ☒. If selected, enter the static IP address in the **IPv4 Address** field.

Don't forget to adjust the IP configuration to Static IP Mode as described in [section 3.2](#).

**FIXED MTU**

Maximum Transmission Unit. The size (in bytes) of largest protocol data unit which the layer can pass onwards. This value is 1500 for PPPoA.

**ENABLE PPP DEBUG MODE**

When this option is selected, the system will put more PPP connection information into the system log. This is for debugging errors and not for normal usage.

**BRIDGE PPPOE FRAMES BETWEEN WAN AND LOCAL PORTS**

(This option is hidden when PPP IP Extension is enabled)

When Enabled, this creates local PPPoE connections to the WAN side. Enable this option only if all LAN-side devices are running PPPoE clients, otherwise disable it. The AR-5313u supports pass-through PPPoE sessions from the LAN side while simultaneously running a PPPoE client from non-PPPoE LAN devices.

**ENABLE IGMP MULTICAST PROXY**

Tick the checkbox ☒ to enable Internet Group Membership Protocol (IGMP) multicast. This protocol is used by IPv4 hosts to report their multicast group memberships to any neighboring multicast routers.

**NO MULTICAST VLAN FILTER**

Tick the checkbox ☒ to Enable/Disable multicast VLAN filter.

**Enable WAN interface with base MAC**

Enable this option to use the router's base MAC address as the MAC address for this WAN interface.

---

**STEP 3:** Choose an interface to be the default gateway.

**Routing -- Default Gateway**

Default gateway interface list can have multiple WAN interfaces served as system default gateways but only one will be used according to the priority with the first being the highest and the last one the lowest priority if the WAN interface is connected. Priority order can be changed by removing all and adding them back in again.

| Selected Default Gateway Interfaces |                                   | Available Routed WAN Interfaces |
|-------------------------------------|-----------------------------------|---------------------------------|
| <div>ppp0.1</div>                   | <div>-&gt;</div> <div>&lt;-</div> |                                 |
| <div>Back</div>                     |                                   | <div>Next</div>                 |

Click **Next** to continue or click **Back** to return to the previous step.

Select DNS Server Interface from available WAN interfaces OR enter static DNS server IP addresses for the system. In ATM mode, if only a single PVC with IPoA or static IPoE protocol is configured, Static DNS server IP addresses must be entered.

**DNS Server Configuration**

Select DNS Server Interface from available WAN interfaces OR enter static DNS server IP addresses for the system. In ATM mode, if only a single PVC with IPoA or static IPoE protocol is configured, Static DNS server IP addresses must be entered.

**DNS Server Interfaces** can have multiple WAN interfaces served as system dns servers but only one will be used according to the priority with the first being the highest and the last one the lowest priority if the WAN interface is connected. Priority order can be changed by removing all and adding them back in again.

☒ **Select DNS Server Interface from available WAN interfaces:**

Selected DNS Server Interfaces

Available WAN Interfaces

ppp0.1

->

<-

☐ **Use the following Static DNS IP address:**

Primary DNS server:

Secondary DNS server:

Back

Next

Click **Next** to continue or click **Back** to return to the previous step.

**STEP 5:** The WAN Setup - Summary screen shows a preview of the WAN service you have configured. Check these settings and click **Apply/Save** if they are correct, or click **Back** to modify them.

**WAN Setup - Summary**  
Make sure that the settings below match the settings provided by your ISP.

|                     |          |
|---------------------|----------|
| Connection Type:    | PPPoE    |
| NAT:                | Enabled  |
| Full Cone NAT:      | Disabled |
| Firewall:           | Disabled |
| IGMP Multicast:     | Disabled |
| Quality Of Service: | Enabled  |


Click "Apply/Save" to have this interface to be effective. Click "Back" to make any modifications.

BackApply/Save

After clicking **Apply/Save**, the new service should appear on the main screen. To activate it you must reboot. Go to Management → Reboot and click **Reboot**.

## E2.2 IP over ETHERNET (IPoE) – IPv4

**STEP 1:** Select the IP over Ethernet radio button and click **Next**.

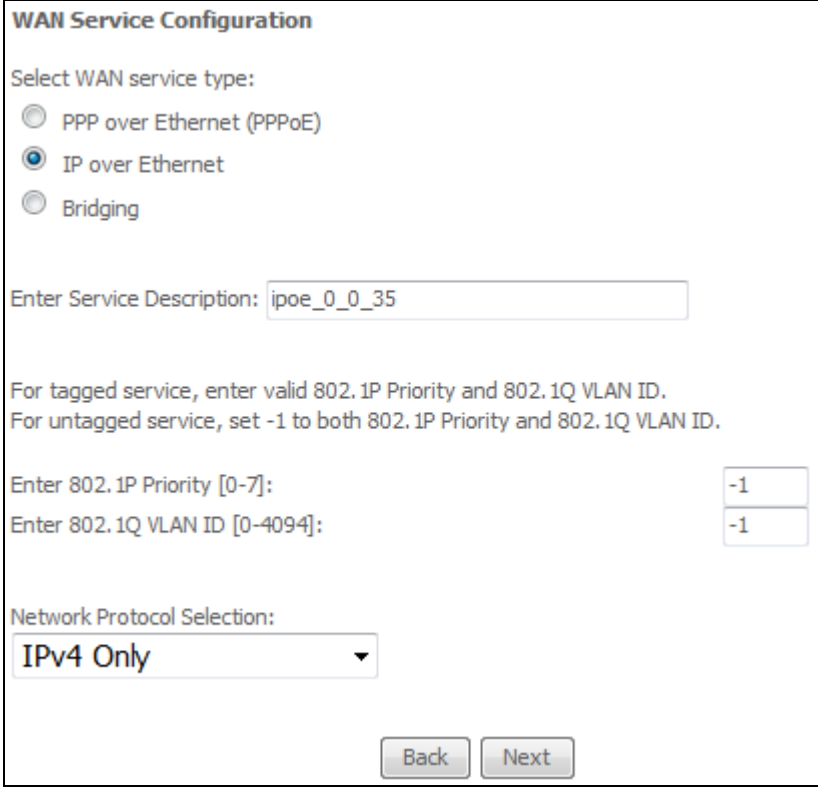

**WAN Service Configuration**

Select WAN service type:

☐ PPP over Ethernet (PPPoE)

☒ IP over Ethernet

☐ Bridging

Enter Service Description:

For tagged service, enter valid 802.1P Priority and 802.1Q VLAN ID.  
For untagged service, set -1 to both 802.1P Priority and 802.1Q VLAN ID.

Enter 802.1P Priority [0-7]:

Enter 802.1Q VLAN ID [0-4094]:

Network Protocol Selection:

For tagged service, enter valid 802.1P Priority and 802.1Q VLAN ID.

For untagged service, set -1 to both 802.1P Priority and 802.1Q VLAN ID.

**STEP 2:** The WAN IP settings screen provides access to the DHCP server settings. You can select the **Obtain an IP address automatically** radio button to enable DHCP (use the DHCP Options only if necessary). However, if you prefer, you can instead use the **Static IP address** method to assign WAN IP address, Subnet Mask and Default Gateway manually.

### WAN IP Settings

Enter information provided to you by your ISP to configure the WAN IP settings.  
 Notice: If "Obtain an IP address automatically" is chosen, DHCP will be enabled for PVC in IPoE mode.  
 If "Use the following Static IP address" is chosen, enter the WAN IP address, subnet mask and interface gateway.

☒ Obtain an IP address automatically

Option 60 Vendor ID:

Option 61 IAID:  (8 hexadecimal digits)

Option 61 DUID:  (hexadecimal digit)

Option 125: ☒ Disable ☐ Enable

☐ Use the following Static IP address:

WAN IP Address:

WAN Subnet Mask:

WAN gateway IP Address:

Click **Next** to continue or click **Back** to return to the previous step.

**STEP 3:** This screen provides access to NAT, Firewall and IGMP Multicast settings. Enable each by selecting the appropriate checkbox ☒. Click **Next** to continue or click **Back** to return to the previous step.

### Network Address Translation Settings

Network Address Translation (NAT) allows you to share one Wide Area Network (WAN) IP address for multiple computers on your Local Area Network (LAN).

☒ Enable NAT

☐ Enable Fullcone NAT

☐ Enable Firewall

### IGMP Multicast

☐ Enable IGMP Multicast

### WAN interface with base MAC.

Notice: Only one WAN interface can be cloned to base MAC address.

☐ Enable WAN interface with base MAC

### ENABLE NAT

If the LAN is configured with a private IP address, the user should select this checkbox ☒. The NAT submenu will appear in the Advanced Setup menu after reboot. On the other hand, if a private IP address is not used on the LAN side (i.e. the LAN side is using a public IP), this checkbox ☒ should not be selected, so as to free up system resources for improved performance.

### ENABLE FULLCONE NAT

This option becomes available when NAT is enabled. Known as one-to-one NAT, all requests from the same internal IP address and port are mapped to the same external IP address and port. An external host can send a packet to the internal host, by sending a packet to the mapped external address.

### ENABLE FIREWALL

If this checkbox ☒ is selected, the Security submenu will be displayed on the Advanced Setup menu after reboot. If firewall is not necessary, this checkbox ☒ should not be selected so as to free up system resources for better performance.


### ENABLE IGMP MULTICAST

Tick the checkbox ☒ to enable Internet Group Membership Protocol (IGMP) multicast. IGMP is a protocol used by IPv4 hosts to report their multicast group memberships to any neighboring multicast routers.

### Enable WAN interface with base MAC

Enable this option to use the router's base MAC address as the MAC address for this WAN interface.

**STEP 4:** To choose an interface to be the default gateway.

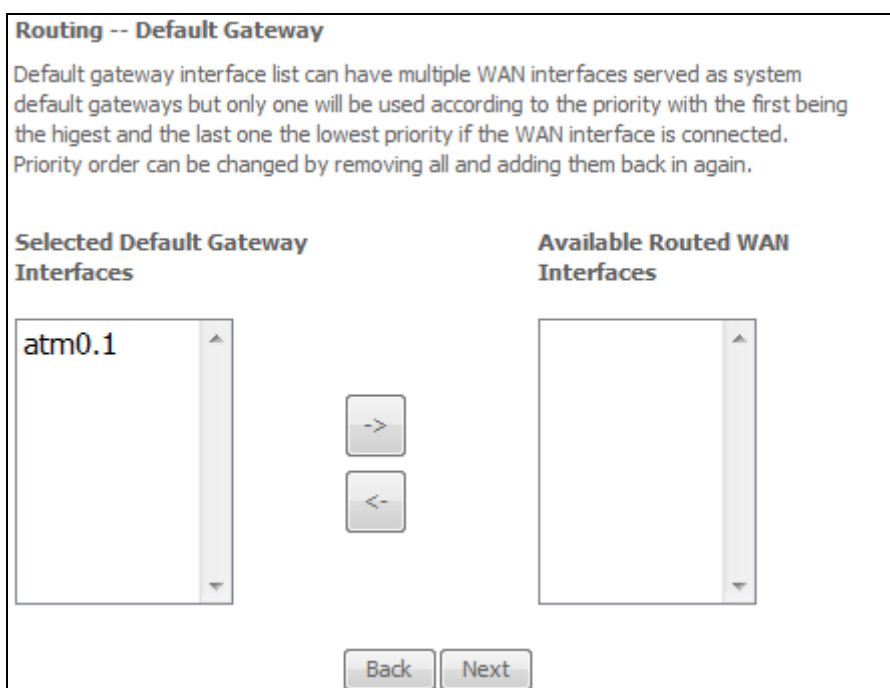

Click **Next** to continue or click **Back** to return to the previous step.

**STEP 5:** Select DNS Server Interface from available WAN interfaces OR enter static DNS server IP addresses for the system. In ATM mode, if only a single PVC with IPoA or static IPoE protocol is configured, Static DNS server IP addresses must be entered.

**DNS Server Configuration**

Select DNS Server Interface from available WAN interfaces OR enter static DNS server IP addresses for the system. In ATM mode, if only a single PVC with IPoA or static IPoE protocol is configured, Static DNS server IP addresses must be entered. **DNS Server Interfaces** can have multiple WAN interfaces served as system dns servers but only one will be used according to the priority with the first being the highest and the last one the lowest priority if the WAN interface is connected. Priority order can be changed by removing all and adding them back in again.

☒ **Select DNS Server Interface from available WAN interfaces:**

Selected DNS Server Interfaces

atm0.1

Available WAN Interfaces

->

<-

☐ **Use the following Static DNS IP address:**

Primary DNS server:

Secondary DNS server:

Back

Next

Click **Next** to continue or click **Back** to return to the previous step.

**STEP 6:** The WAN Setup - Summary screen shows a preview of the WAN service you have configured. Check these settings and click **Apply/Save** if they are correct, or click **Back** to modify them.

**WAN Setup - Summary**  
Make sure that the settings below match the settings provided by your ISP.

|                     |          |
|---------------------|----------|
| Connection Type:    | IPoE     |
| NAT:                | Enabled  |
| Full Cone NAT:      | Disabled |
| Firewall:           | Disabled |
| IGMP Multicast:     | Disabled |
| Quality Of Service: | Enabled  |

Click "Apply/Save" to have this interface to be effective. Click "Back" to make any modifications.

BackApply/Save

After clicking **Apply/Save**, the new service should appear on the main screen. To activate it you must reboot. Go to Management → Reboot and click **Reboot**.

## E2.3 Bridging – IPv4

**NOTE:** This connection type is not available on the Ethernet WAN interface.

**STEP 1:** Select the Bridging radio button and click **Next**.

**WAN Service Configuration**  
 Select WAN service type:  
☐ PPP over Ethernet (PPPoE)  
☐ IP over Ethernet  
☒ Bridging  
  
 Enter Service Description:   
  
 For tagged service, enter valid 802.1P Priority and 802.1Q VLAN ID.  
 For untagged service, set -1 to both 802.1P Priority and 802.1Q VLAN ID.  
  
 Enter 802.1P Priority [0-7]:   
 Enter 802.1Q VLAN ID [0-4094]:

For tagged service, enter valid 802.1P Priority and 802.1Q VLAN ID.

For untagged service, set -1 to both 802.1P Priority and 802.1Q VLAN ID.

**STEP 2:** The WAN Setup - Summary screen shows a preview of the WAN service you have configured. Check these settings and click **Apply/Save** if they are correct, or click **Back** to return to the previous screen.

**WAN Setup - Summary**  
 Make sure that the settings below match the settings provided by your ISP.  

|                            |                |
|----------------------------|----------------|
| <b>Connection Type:</b>    | Bridge         |
| <b>NAT:</b>                | N/A            |
| <b>Full Cone NAT:</b>      | Disabled       |
| <b>Firewall:</b>           | Disabled       |
| <b>IGMP Multicast:</b>     | Not Applicable |
| <b>Quality Of Service:</b> | Enabled        |

  
 Click "Apply/Save" to have this interface to be effective. Click "Back" to make any modifications.

After clicking **Apply/Save**, the new service should appear on the main screen. To activate it you must reboot. Go to Management → Reboot and click **Reboot**.

**NOTE:** If this bridge connection is your only WAN service, the AR-5313u will be inaccessible for remote management or technical support from the WAN.

## E2.4 PPP over ATM (PPPoA) – IPv4

**WAN Service Configuration**

Enter Service Description:

Network Protocol Selection:  

IPv4 Only ▼

Back

Next

**STEP 1:** Click **Next** to continue.

**STEP 2:** On the next screen, enter the PPP settings as provided by your ISP.  
Click **Next** to continue or click **Back** to return to the previous step.

### PPP Username and Password

PPP usually requires that you have a user name and password to establish your connection. In the boxes below, enter the user name and password that your ISP has provided to you.

PPP Username:

PPP Password:

Authentication Method: **AUTO** ▼

☐ Enable Fullcone NAT

☐ Dial on demand (with idle timeout timer)

☐ PPP IP extension

☒ Enable NAT

☐ Enable Firewall

☐ Use Static IPv4 Address

☒ Fixed MTU

MTU:

☐ Enable PPP Debug Mode

### Multicast Proxy

☐ Enable IGMP Multicast Proxy

☐ No Multicast VLAN Filter

### WAN interface with base MAC.

Notice: Only one WAN interface can be cloned to base MAC address.

☐ Enable WAN interface with base MAC

## PPP SETTINGS

The PPP username and password are dependent on the requirements of the ISP. The user name can be a maximum of 256 characters and the password a maximum of 32 characters in length. (Authentication Method: AUTO, PAP, CHAP, or MSCHAP.)

## KEEP ALIVE INTERVAL

This option configures the interval between each PPP LCP request and the amount of time to wait for the PPP server to reply to the LCP request. If the time expired on all requests, the current PPP session would be dropped.

### ENABLE FULLCONE NAT

This option becomes available when NAT is enabled. Known as one-to-one NAT, all requests from the same internal IP address and port are mapped to the same external IP address and port. An external host can send a packet to the internal host, by sending a packet to the mapped external address.

### DIAL ON DEMAND

The AR-5313u can be configured to disconnect if there is no activity for a period of time by selecting the **Dial on demand** checkbox ☒. You must also enter an inactivity timeout period in the range of 1 to 4320 minutes.

|                                                                              |
|------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> Dial on demand (with idle timeout timer) |
| Inactivity Timeout (minutes) [1-4320]: <input type="text"/>                  |

### PPP IP EXTENSION

The PPP IP Extension is a special feature deployed by some service providers. Unless your service provider specifically requires this setup, do not select it.

PPP IP Extension does the following:

- Allows only one PC on the LAN.
- Disables NAT and Firewall.
- The device becomes the default gateway and DNS server to the PC through DHCP using the LAN interface IP address.
- The device extends the IP subnet at the remote service provider to the LAN PC. i.e. the PC becomes a host belonging to the same IP subnet.
- The device bridges the IP packets between WAN and LAN ports, unless the packet is addressed to the device's LAN IP address.
- The public IP address assigned by the remote side using the PPP/IPCPC protocol is actually not used on the WAN PPP interface. Instead, it is forwarded to the PC LAN interface through DHCP. Only one PC on the LAN can be connected to the remote, since the DHCP server within the device has only a single IP address to assign to a LAN device.

### ENABLE NAT

If the LAN is configured with a private IP address, the user should select this checkbox ☒. The NAT submenu will appear in the Advanced Setup menu after reboot. On the other hand, if a private IP address is not used on the LAN side (i.e. the LAN side is using a public IP), this checkbox ☒ should not be selected to free up system resources for better performance.

### ENABLE FIREWALL

If this checkbox ☒ is selected, the Security submenu will be displayed on the Advanced Setup menu after reboot. If firewall is not necessary, this checkbox ☒ should not be selected to free up system resources for better performance.

### USE STATIC IPv4 ADDRESS

Unless your service provider specially requires it, do not select this checkbox ☒. If selected, enter the static IP address in the **IP Address** field. Also, don't forget to adjust the IP configuration to Static IP Mode as described in [section 3.2](#).

**Fixed MTU**

Fixed Maximum Transmission Unit. The size (in bytes) of largest protocol data unit which the layer can pass onwards. This value is 1500 for PPPoA.

**ENABLE PPP DEBUG MODE**

When this option is selected, the system will put more PPP connection information into the system log. This is for debugging errors and not for normal usage.

**ENABLE IGMP MULTICAST PROXY**

Tick the checkbox ☒ to enable Internet Group Membership Protocol (IGMP) multicast. This protocol is used by IPv4 hosts to report their multicast group memberships to any neighboring multicast routers.

**NO MULTICAST VLAN FILTER**

Tick the checkbox ☒ to Enable/Disable multicast VLAN filter.

**Enable WAN interface with base MAC**

Enable this option to use the router's base MAC address as the MAC address for this WAN interface.

**STEP 3:** Choose an interface to be the default gateway.

**Routing -- Default Gateway**  
Default gateway interface list can have multiple WAN interfaces served as system default gateways but only one will be used according to the priority with the first being the highest and the last one the lowest priority if the WAN interface is connected. Priority order can be changed by removing all and adding them back in again.

**Selected Default Gateway Interfaces**  
pppoa0

**Available Routed WAN Interfaces**

->

<-

Back

Next

Click **Next** to continue or click **Back** to return to the previous step.

**STEP 4:** Choose an interface to be the default gateway.

### DNS Server Configuration

Select DNS Server Interface from available WAN interfaces OR enter static DNS server IP addresses for the system. In ATM mode, if only a single PVC with IPoA or static IPoE protocol is configured, Static DNS server IP addresses must be entered.

**DNS Server Interfaces** can have multiple WAN interfaces served as system dns servers but only one will be used according to the priority with the first being the highest and the last one the lowest priority if the WAN interface is connected. Priority order can be changed by removing all and adding them back in again.

☒ **Select DNS Server Interface from available WAN interfaces:**

Selected DNS Server Interfaces

Available WAN Interfaces

pppoa0

->

<-

☐ **Use the following Static DNS IP address:**

Primary DNS server:

Secondary DNS server:

Click **Next** to continue or click **Back** to return to the previous step.

**STEP 5:** The WAN Setup - Summary screen shows a preview of the WAN service you have configured. Check these settings and click **Apply/Save** if they are correct, or click **Back** to modify them.

### WAN Setup - Summary


Make sure that the settings below match the settings provided by your ISP.

|                            |          |
|----------------------------|----------|
| <b>Connection Type:</b>    | PPPoA    |
| <b>NAT:</b>                | Enabled  |
| <b>Full Cone NAT:</b>      | Disabled |
| <b>Firewall:</b>           | Disabled |
| <b>IGMP Multicast:</b>     | Disabled |
| <b>Quality Of Service:</b> | Enabled  |

Click "Apply/Save" to have this interface to be effective. Click "Back" to make any modifications.

After clicking **Apply/Save**, the new service should appear on the main screen. To activate it you must reboot. Go to Management → Reboot and click **Reboot**.

## E2.5 IP over ATM (IPoA) – IPv4

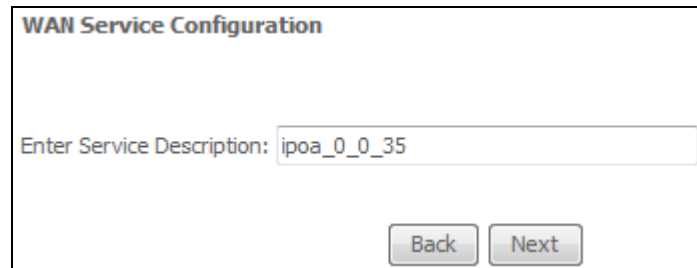


WAN Service Configuration

Enter Service Description: ipoa\_0\_0\_35

Back Next

**STEP 1:** Click **Next** to continue.

**STEP 2:** Enter the WAN IP settings provided by your ISP. Click **Next** to continue.

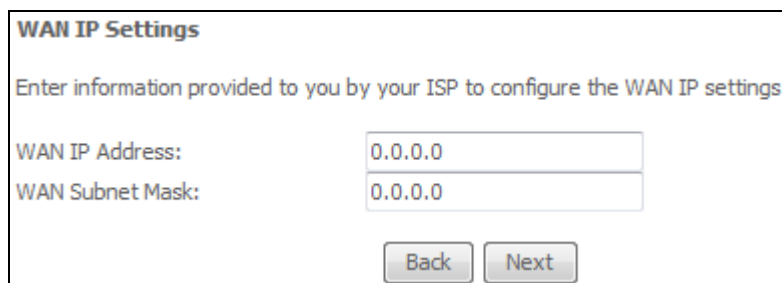

WAN IP Settings

Enter information provided to you by your ISP to configure the WAN IP settings.

WAN IP Address: 0.0.0.0

WAN Subnet Mask: 0.0.0.0

Back Next

**STEP 3:** This screen provides access to NAT, Firewall and IGMP Multicast settings. Enable each by selecting the appropriate checkbox ☒. Click **Next** to continue or click **Back** to return to the previous step.

**Network Address Translation Settings**

Network Address Translation (NAT) allows you to share one Wide Area Network (WAN) IP address for multiple computers on your Local Area Network (LAN).

☒ Enable NAT

☐ Enable Fullcone NAT

☐ Enable Firewall

**IGMP Multicast**

☐ Enable IGMP Multicast

**WAN interface with base MAC.**  
Notice: Only one WAN interface can be cloned to base MAC address.

☐ Enable WAN interface with base MAC

### **ENABLE NAT**

If the LAN is configured with a private IP address, the user should select this checkbox ☒. The NAT submenu will appear in the Advanced Setup menu after reboot. On the other hand, if a private IP address is not used on the LAN side (i.e. the LAN side is using a public IP), this checkbox ☒ should not be selected, so as to free up system resources for improved performance.

### **ENABLE FULLCONE NAT**

This option becomes available when NAT is enabled. Known as one-to-one NAT, all requests from the same internal IP address and port are mapped to the same external IP address and port. An external host can send a packet to the internal host by sending a packet to the mapped external address.

### **ENABLE FIREWALL**

If this checkbox ☒ is selected, the Security submenu will be displayed on the Advanced Setup menu after reboot. If firewall is not necessary, this checkbox ☒ should not be selected so as to free up system resources for better performance.

### **ENABLE IGMP MULTICAST**

Tick the checkbox ☒ to enable Internet Group Membership Protocol (IGMP) multicast. IGMP is a protocol used by IPv4 hosts to report their multicast group memberships to any neighboring multicast routers.

### **Enable WAN interface with base MAC**

Enable this option to use the router's base MAC address as the MAC address for this WAN interface.

**STEP 4:** Choose an interface to be the default gateway.

### Routing -- Default Gateway

Default gateway interface list can have multiple WAN interfaces served as system default gateways but only one will be used according to the priority with the first being the highest and the last one the lowest priority if the WAN interface is connected. Priority order can be changed by removing all and adding them back in again.

#### Selected Default Gateway Interfaces

ipoa0

#### Available Routed WAN Interfaces

->


<-

Back

Next

Click **Next** to continue or click **Back** to return to the previous step.

**NOTE:** If the DHCP server is not enabled on another WAN interface then the following notification will be shown before the next screen.

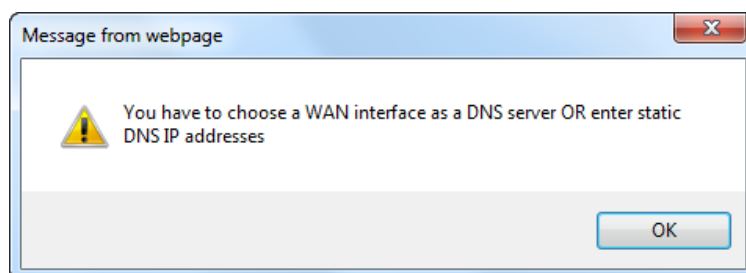

**STEP 5:** Choose an interface to be the default gateway.

### DNS Server Configuration

Select DNS Server Interface from available WAN interfaces OR enter static DNS server IP addresses for the system. In ATM mode, if only a single PVC with IPoA or static IPoE protocol is configured, Static DNS server IP addresses must be entered.

**DNS Server Interfaces** can have multiple WAN interfaces served as system dns servers but only one will be used according to the priority with the first being the highest and the last one the lowest priority if the WAN interface is connected. Priority order can be changed by removing all and adding them back in again.

☒ **Select DNS Server Interface from available WAN interfaces:**

Selected DNS Server Interfaces

Available WAN Interfaces

->

<-

☒ **Use the following Static DNS IP address:**

Primary DNS server:

Secondary DNS server:

Back

Next

Click **Next** to continue or click **Back** to return to the previous step.

**STEP 6:** The WAN Setup - Summary screen shows a preview of the WAN service you have configured. Check these settings and click **Apply/Save** if they are correct, or click **Back** to modify them.

### WAN Setup - Summary

Make sure that the settings below match the settings provided by your ISP.

|                            |          |
|----------------------------|----------|
| <b>Connection Type:</b>    | IPoA     |
| <b>NAT:</b>                | Enabled  |
| <b>Full Cone NAT:</b>      | Disabled |
| <b>Firewall:</b>           | Disabled |
| <b>IGMP Multicast:</b>     | Disabled |
| <b>Quality Of Service:</b> | Enabled  |

Click "Apply/Save" to have this interface to be effective. Click "Back" to make any modifications.


Back

Apply/Save

After clicking **Apply/Save**, the new service should appear on the main screen. To activate it you must reboot. Go to Management → Reboot and click **Reboot**.

## E2.6 PPP over ETHERNET (PPPoE) – IPv6

**STEP 1:** Select the PPP over Ethernet radio button. Then select IPv6 only from the drop-down box at the bottom of the screen and click **Next**.

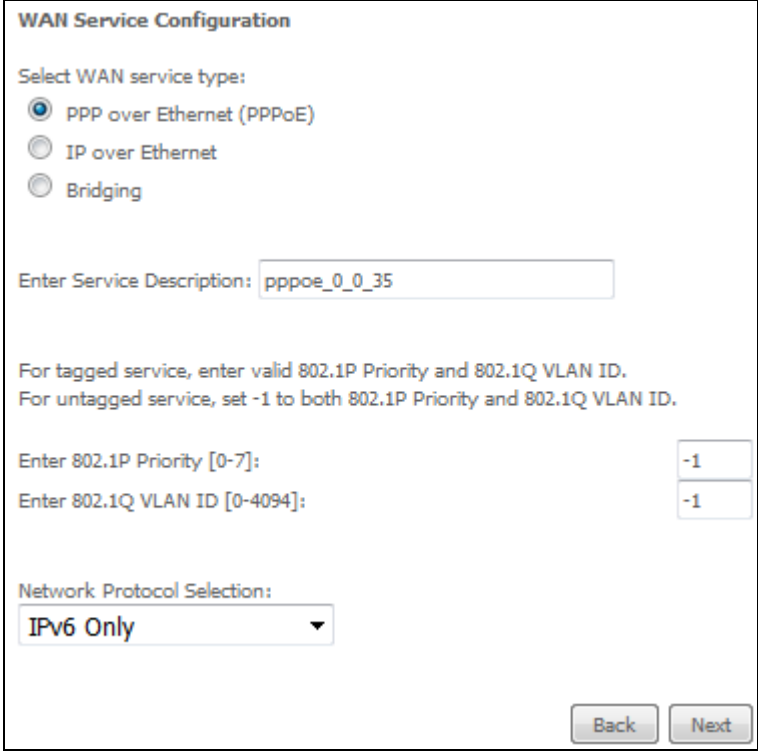

The screenshot shows the 'WAN Service Configuration' window. It has three radio buttons for 'Select WAN service type': 'PPP over Ethernet (PPPoE)' is selected, followed by 'IP over Ethernet' and 'Bridging'. Below is a text field for 'Enter Service Description:' containing 'pppoe\_0\_0\_35'. A note states: 'For tagged service, enter valid 802.1P Priority and 802.1Q VLAN ID. For untagged service, set -1 to both 802.1P Priority and 802.1Q VLAN ID.' There are two input fields: 'Enter 802.1P Priority [0-7]:' with '-1' and 'Enter 802.1Q VLAN ID [0-4094]:' with '-1'. A 'Network Protocol Selection:' dropdown menu is set to 'IPv6 Only'. At the bottom right are 'Back' and 'Next' buttons.

For tagged service, enter valid 802.1P Priority and 802.1Q VLAN ID.

For untagged service, set -1 to both 802.1P Priority and 802.1Q VLAN ID.

**STEP 2:** On the next screen, enter the PPP settings as provided by your ISP.

**PPP Username and Password**

PPP usually requires that you have a user name and password to establish your connection. In the boxes below, enter the user name and password that your ISP has provided to you.  
NOTE: IP extension can not be enabled when you enable 3G backup.

PPP Username:

PPP Password:

PPPoE Service Name:

Authentication Method: **AUTO** ▼

☐ Enable Fullcone NAT

☐ Dial on demand (with idle timeout timer)

☐ PPP IP extension

☐ Enable Firewall

☐ Use Static IPv4 Address

☐ Use Static IPv6 Address

☐ Enable IPv6 Unnumbered Model

☐ Launch Dhcp6c for Address Assignment (IANA)

☒ Launch Dhcp6c for Prefix Delegation (IAPD)

☒ Fixed MTU

MTU:

☐ Enable PPP Debug Mode

☐ Bridge PPPoE Frames Between WAN and Local Ports

**Multicast Proxy**

☐ Enable IGMP Multicast Proxy

☐ No Multicast VLAN Filter

☐ Enable MLD Multicast Proxy

**WAN interface with base MAC.**

Notice: Only one WAN interface can be cloned to base MAC address.

☐ Enable WAN interface with base MAC

Click **Next** to continue or click **Back** to return to the previous step.

The settings shown above are described below.

### PPP SETTINGS

The PPP Username, PPP password and the PPPoE Service Name entries are dependent on the particular requirements of the ISP. The user name can be a maximum of 256 characters and the password a maximum of 32 characters in length. For Authentication Method, choose from AUTO, PAP, CHAP, and MSCHAP.

### ENABLE FULLCONE NAT

This option becomes available when NAT is enabled. Known as one-to-one NAT, all requests from the same internal IP address and port are mapped to the same external IP address and port. An external host can send a packet to the internal host, by sending a packet to the mapped external address.

### DIAL ON DEMAND

The AR-5313u can be configured to disconnect if there is no activity for a period of time by selecting the **Dial on demand** checkbox ☒. You must also enter an inactivity timeout period in the range of 1 to 4320 minutes.

|                                                                              |
|------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> Dial on demand (with idle timeout timer) |
| Inactivity Timeout (minutes) [1-4320]: <input type="text" value="0"/>        |

### PPP IP EXTENSION

The PPP IP Extension is a special feature deployed by some service providers. Unless your service provider specifically requires this setup, do not select it.

PPP IP Extension does the following:

- Allows only one PC on the LAN.
- Disables NAT and Firewall.
- The device becomes the default gateway and DNS server to the PC through DHCP using the LAN interface IP address.
- The device extends the IP subnet at the remote service provider to the LAN PC. i.e. the PC becomes a host belonging to the same IP subnet.
- The device bridges the IP packets between WAN and LAN ports, unless the packet is addressed to the device's LAN IP address.
- The public IP address assigned by the remote side using the PPP/IPCP protocol is actually not used on the WAN PPP interface. Instead, it is forwarded to the PC LAN interface through DHCP. Only one PC on the LAN can be connected to the remote, since the DHCP server within the device has only a single IP address to assign to a LAN device.

### ENABLE FIREWALL

If this checkbox ☒ is selected, the Security submenu will be displayed on the Advanced Setup menu after reboot. If firewall is not necessary, this checkbox ☒ should not be selected to free up system resources for better performance.

### USE STATIC IPv4 ADDRESS

Unless your service provider specially requires it, do not select this checkbox ☒. If selected, enter the static IP address in the **IPv4 Address** field.

Don't forget to adjust the IP configuration to Static IP Mode as described in section [3.2 IP Configuration](#).

### **USE STATIC IPv6 ADDRESS**

Unless your service provider specially requires it, do not select this checkbox ☒. If selected, enter the static IP address in the **IPv6 Address** field.

Don't forget to adjust the IP configuration to Static IP Mode as described in section [3.2 IP Configuration](#).

### **ENABLE IPv6 UNNUMBERED MODEL**

The IP unnumbered configuration command allows you to enable IP processing on a serial interface without assigning it an explicit IP address. The IP unnumbered interface can "borrow" the IP address of another interface already configured on the router, which conserves network and address space.

### **LAUNCH DHCP6C FOR ADDRESS ASSIGNMENT (IANA)**

The Internet Assigned Numbers Authority (IANA) is a department of ICANN responsible for coordinating some of the key elements that keep the Internet running smoothly. Whilst the Internet is renowned for being a worldwide network free from central coordination, there is a technical need for some key parts of the Internet to be globally coordinated, and this coordination role is undertaken by IANA.

Specifically, IANA allocates and maintains unique codes and numbering systems that are used in the technical standards ("protocols") that drive the Internet.

IANA's various activities can be broadly grouped in to three categories:

- Domain Names  
IANA manages the DNS Root, the .int and .arpa domains, and an IDN practices resource.
- Number Resources  
IANA coordinates the global pool of IP and AS numbers, providing them to Regional Internet Registries.
- Protocol Assignments  
Internet protocols' numbering systems are managed by IANA in conjunction with standards bodies.

### **LAUNCH DHCP6C FOR PREFIX DELEGATION (IAPD)**

An Identity Association for Prefix Delegation (IAPD) is a collection of prefixes assigned to a requesting device. A requesting device may have more than one IAPD; for example, one for each of its interfaces.

A prefix-delegating router (DHCPv6 server) selects prefixes to be assigned to a requesting router (DHCPv6 client) upon receiving a request from the client. The server can select prefixes for a requesting client by using static and dynamic assignment mechanisms. Administrators can manually configure a list of prefixes and associated preferred and valid lifetimes for an IAPD of a specific client that is identified by its DUID.

When the delegating router receives a request from a client, it checks if there is a static binding configured for the IAPD in the client's message. If a static binding is present, the prefixes in the binding are returned to the client. If no such binding is found, the server attempts to assign prefixes for the client from other sources.

An IPv6 prefix delegating router can also select prefixes for a requesting router based on an external authority such as a RADIUS server using the Framed-IPv6-Prefix attribute.

### **FIXED MTU**

Maximum Transmission Unit. The size (in bytes) of largest protocol data unit which the layer can pass onwards. This value is 1492 for PPPoE.

### **ENABLE PPP DEBUG MODE**

When this option is selected, the system will put more PPP connection information into the system log. This is for debugging errors and not for normal usage.

## BRIDGE PPPOE FRAMES BETWEEN WAN AND LOCAL PORTS

(This option is hidden when PPP IP Extension is enabled)

When Enabled, this creates local PPPoE connections to the WAN side. Enable this option only if all LAN-side devices are running PPPoE clients, otherwise disable it. The AR-5313u supports pass-through PPPoE sessions from the LAN side while simultaneously running a PPPoE client from non-PPPoE LAN devices.

## Enable IGMP Multicast Proxy

Tick the checkbox ☒ to enable Internet Group Membership Protocol (IGMP) multicast. This protocol is used by IPv6 hosts to report their multicast group memberships to any neighboring multicast routers.

## No Multicast VLAN Filter

Tick the checkbox ☒ to Enable/Disable multicast VLAN filter.

## ENABLE MLD MULTICAST PROXY

Multicast Listener Discovery (MLD) is a component of the Internet Protocol Version 6 (IPv6) suite. MLD is used by IPv6 routers for discovering multicast listeners on a directly attached link, much like IGMP is used in IPv4. The protocol is embedded in ICMPv6 instead of using a separate protocol.

## WAN interface with base MAC

Enable this option to use the router's base MAC address as the MAC address for this WAN interface.

**STEP 3:** Choose an interface to be the default gateway. Also, select a preferred WAN interface as the system default IPv6 gateway (from the drop-down box).

Routing -- Default Gateway

Default gateway interface list can have multiple WAN interfaces served as system default gateways but only one will be used according to the priority with the first being the highest and the last one the lowest priority if the WAN interface is connected. Priority order can be changed by removing all and adding them back in again.

Selected Default Gateway Interfaces

ppp0.1

>

<

Available Routed WAN Interfaces

IPv6: Select a preferred wan interface as the system default IPv6 gateway.

Selected WAN Interface

pppoe\_0\_0\_35/ppp0.1

Back

Next

Click **Next** to continue or click **Back** to return to the previous step.

186

Leading the **Communication Trend**

**STEP 4:** Select DNS Server Interface from available WAN interfaces OR enter static DNS server IP addresses for the system. In ATM mode, if only a single PVC with IPoA or static IPoE protocol is configured, Static DNS server IP addresses must be entered.

Select the configured WAN interface for IPv6 DNS server information OR enter the static IPv6 DNS server Addresses. Note that selecting a WAN interface for IPv6 DNS server will enable DHCPv6 Client on that interface.

### DNS Server Configuration

Select DNS Server Interface from available WAN interfaces OR enter static DNS server IP addresses for the system. In ATM mode, if only a single PVC with IPoA or static IPoE protocol is configured, Static DNS server IP addresses must be entered.

**DNS Server Interfaces** can have multiple WAN interfaces served as system dns servers but only one will be used according to the priority with the first being the highest and the last one the lowest priority if the WAN interface is connected. Priority order can be changed by removing all and adding them back in again.

☒ **Select DNS Server Interface from available WAN interfaces:**

Selected DNS Server Interfaces

Available WAN Interfaces

ppp0.1

->

<-

☐ **Use the following Static DNS IP address:**

Primary DNS server:

Secondary DNS server:

IPv6: Select the configured WAN interface for IPv6 DNS server information OR enter the static IPv6 DNS server Addresses.  
Note that selecting a WAN interface for IPv6 DNS server will enable DHCPv6 Client on that interface.

☒ **Obtain IPv6 DNS info from a WAN interface:**

WAN Interface selected:

pppoe\_0\_0\_35/ppp0.1

☐ **Use the following Static IPv6 DNS address:**

Primary IPv6 DNS server:

Secondary IPv6 DNS server:

Back

Next

Click **Next** to continue or click **Back** to return to the previous step.

**STEP 5:** The WAN Setup - Summary screen shows a preview of the WAN service you have configured. Check these settings and click **Apply/Save** if they are correct, or click **Back** to modify them.

**WAN Setup - Summary**  
Make sure that the settings below match the settings provided by your ISP.

|                     |          |
|---------------------|----------|
| Connection Type:    | PPPoE    |
| NAT:                | Disabled |
| Full Cone NAT:      | Disabled |
| Firewall:           | Disabled |
| IGMP Multicast:     | Disabled |
| Quality Of Service: | Enabled  |


Click "Apply/Save" to have this interface to be effective. Click "Back" to make any modifications.

BackApply/Save

After clicking **Apply/Save**, the new service should appear on the main screen.

## E2.7 IP over ETHERNET (IPoE) – IPv6

**STEP 1:** Select the IP over Ethernet radio button and click **Next**. Then select IPv6 only from the drop-down box at the bottom off the screen and click **Next**.

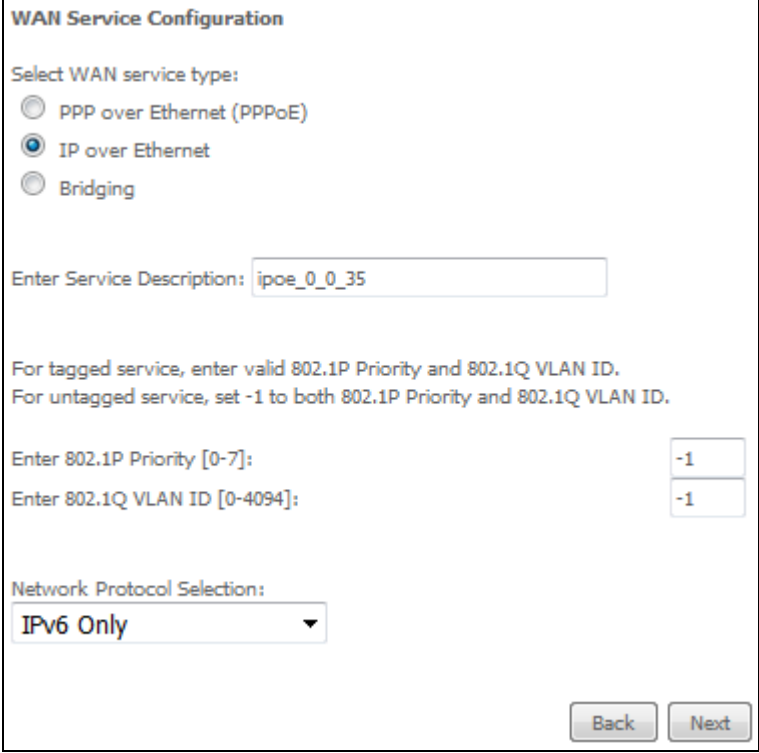

The screenshot shows the 'WAN Service Configuration' window. Under 'Select WAN service type:', the 'IP over Ethernet' radio button is selected. The 'Enter Service Description:' field contains 'ipoe\_0\_0\_35'. Below, instructions state: 'For tagged service, enter valid 802.1P Priority and 802.1Q VLAN ID. For untagged service, set -1 to both 802.1P Priority and 802.1Q VLAN ID.' The 'Enter 802.1P Priority [0-7]:' and 'Enter 802.1Q VLAN ID [0-4094]:' fields both contain '-1'. The 'Network Protocol Selection:' dropdown is set to 'IPv6 Only'. 'Back' and 'Next' buttons are at the bottom right.

**WAN Service Configuration**

Select WAN service type:

☐ PPP over Ethernet (PPPoE)

☒ IP over Ethernet

☐ Bridging

Enter Service Description:

For tagged service, enter valid 802.1P Priority and 802.1Q VLAN ID.  
For untagged service, set -1 to both 802.1P Priority and 802.1Q VLAN ID.

Enter 802.1P Priority [0-7]:

Enter 802.1Q VLAN ID [0-4094]:

Network Protocol Selection:

For tagged service, enter valid 802.1P Priority and 802.1Q VLAN ID.

For untagged service, set -1 to both 802.1P Priority and 802.1Q VLAN ID.

**STEP 2:** The WAN IP settings screen provides access to the DHCP server settings.

You can select the **Obtain an IP address automatically** radio button to enable DHCP (use the DHCP Options only if necessary). However, if you prefer, you can use the **Static IP address** method instead to assign WAN IP address, Subnet Mask and Default Gateway manually.

Enter information provided to you by your ISP to configure the WAN IPv6 settings.

Notice: If "Obtain an IPv6 address automatically" is chosen, DHCP client will be enabled on this WAN interface.

If "Use the following Static IPv6 address" is chosen, enter the static WAN IPv6 address. If the address prefix length is not specified, it will be default to /64.

### WAN IP Settings

Enter information provided to you by your ISP to configure the WAN IP settings.  
 Notice: If "Obtain an IP address automatically" is chosen, DHCP will be enabled for PVC in IPoE mode.  
 If "Use the following Static IP address" is chosen, enter the WAN IP address, subnet mask and interface gateway.

☒ Obtain an IP address automatically  
 Option 60 Vendor ID:   
 Option 61 IAID:  (8 hexadecimal digits)  
 Option 61 DUID:  (hexadecimal digit)  
 Option 125: ☐ Disable ☐ Enable

☐ Use the following Static IP address:  
 WAN IP Address:   
 WAN Subnet Mask:   
 WAN gateway IP Address:

Enter information provided to you by your ISP to configure the WAN IPv6 settings.  
 Notice:  
 If "Obtain an IPv6 address automatically" is chosen, DHCPv6 Client will be enabled on this WAN interface.  
 If "Use the following Static IPv6 address" is chosen, enter the static WAN IPv6 address. If the address prefix length is not specified, it will be default to /64.

☒ Obtain an IPv6 address automatically  
☐ Dhcpv6 Address Assignment (IANA)  
☒ Dhcpv6 Prefix Delegation (IAPD)  
☐ Dhcpv6 Rapid Commit

☐ Use the following Static IPv6 address:  
 WAN IPv6 Address/Prefix Length:

Specify the Next-Hop IPv6 address for this WAN interface.  
 Notice: This address can be either a link local or a global unicast IPv6 address.

WAN Next-Hop IPv6 Address:

Click **Next** to continue or click **Back** to return to the previous step.

### **DHCP6C FOR ADDRESS ASSIGNMENT (IANA)**

The Internet Assigned Numbers Authority (IANA) is a department of ICANN responsible for coordinating some of the key elements that keep the Internet running smoothly. Whilst the Internet is renowned for being a worldwide network free from central coordination, there is a technical need for some key parts of the Internet to be globally coordinated, and this coordination role is undertaken by IANA.

Specifically, IANA allocates and maintains unique codes and numbering systems that are used in the technical standards ("protocols") that drive the Internet.

IANA's various activities can be broadly grouped in to three categories:

- **Domain Names**  
IANA manages the DNS Root, the .int and .arpa domains, and an IDN practices resource.
- **Number Resources**  
IANA coordinates the global pool of IP and AS numbers, providing them to Regional Internet Registries.
- **Protocol Assignments**  
Internet protocols' numbering systems are managed by IANA in conjunction with standards bodies.

### **DHCP6C FOR PREFIX DELEGATION (IAPD)**

An Identity Association for Prefix Delegation (IAPD) is a collection of prefixes assigned to a requesting device. A requesting device may have more than one IAPD; for example, one for each of its interfaces.

A prefix-delegating router (DHCPv6 server) selects prefixes to be assigned to a requesting router (DHCPv6 client) upon receiving a request from the client. The server can select prefixes for a requesting client by using static and dynamic assignment mechanisms. Administrators can manually configure a list of prefixes and associated preferred and valid lifetimes for an IAPD of a specific client that is identified by its DUID.

When the delegating router receives a request from a client, it checks if there is a static binding configured for the IAPD in the client's message. If a static binding is present, the prefixes in the binding are returned to the client. If no such binding is found, the server attempts to assign prefixes for the client from other sources.

An IPv6 prefix delegating router can also select prefixes for a requesting router based on an external authority such as a RADIUS server using the Framed-IPv6-Prefix attribute.

### **DHCP6C FOR RAPID COMMIT**

Rapid-Commit; is the process (option) in which a Requesting Router (DHCP Client) obtains "configurable information" (configurable parameters) from a Delegating Router (DHCP Server) by using a rapid DHCPv6 two-message exchange. The messages that are exchanged between the two routers (RR and DR) are called the DHCPv6 "SOLICIT" message and the DHCPv6 "REPLY" message.

### **WAN NEXT-HOP IPv6 ADDRESS**

Specify the Next-Hop IPv6 address for this WAN interface.

This address can be either a link local or a global unicast IPv6 address.

**STEP 3:** This screen provides access to NAT, Firewall and IGMP Multicast settings. Enable each by selecting the appropriate checkbox ☒.

**Network Address Translation Settings**  
  
Network Address Translation (NAT) allows you to share one Wide Area Network (WAN) IP address for multiple computers on your Local Area Network (LAN).  
  
☐ Enable NAT  
  
☐ Enable Firewall  
  
**IGMP Multicast**  
  
☐ Enable IGMP Multicast  
  
☐ Enable MLD Multicast Proxy  
  
**WAN interface with base MAC.**  
Notice: Only one WAN interface can be cloned to base MAC address.  
  
☐ Enable WAN interface with base MAC  
  

BackNext

Click **Next** to continue or click **Back** to return to the previous step.

### **ENABLE NAT**

If the LAN is configured with a private IP address, the user should select this checkbox ☒. The NAT submenu will appear in the Advanced Setup menu after reboot. On the other hand, if a private IP address is not used on the LAN side (i.e. the LAN side is using a public IP), this checkbox ☒ should not be selected, so as to free up system resources for improved performance.

### **ENABLE FIREWALL**

If this checkbox ☒ is selected, the Security submenu will be displayed on the Advanced Setup menu after reboot. If firewall is not necessary, this checkbox ☒ should not be selected so as to free up system resources for better performance.

### **Enable IGMP Multicast**

Tick the checkbox ☒ to enable Internet Group Membership Protocol (IGMP) multicast. This protocol is used by IPv6 hosts to report their multicast group memberships to any neighboring multicast routers.

### **ENABLE MLD MULTICAST PROXY**

Multicast Listener Discovery (MLD) is a component of the Internet Protocol Version 6 (IPv6) suite. MLD is used by IPv6 routers for discovering multicast listeners on a directly attached link, much like IGMP is used in IPv4. The protocol is embedded in ICMPv6 instead of using a separate protocol.

**WAN interface with base MAC**

Enable this option to use the router's base MAC address as the MAC address for this WAN interface.

**STEP 4:** To choose an interface to be the default gateway. Also, select a preferred WAN interface as the system default IPv6 gateway (from the drop-down box).

**Routing -- Default Gateway**

Default gateway interface list can have multiple WAN interfaces served as system default gateways but only one will be used according to the priority with the first being the highest and the last one the lowest priority if the WAN interface is connected. Priority order can be changed by removing all and adding them back in again.

| Selected Default Gateway Interfaces |                                   | Available Routed WAN Interfaces |
|-------------------------------------|-----------------------------------|---------------------------------|
| atm0.1                              | <div>-&gt;</div> <div>&lt;=</div> |                                 |

IPv6: Select a preferred wan interface as the system default IPv6 gateway.

Selected WAN Interface

Back

Next

Click **Next** to continue or click **Back** to return to the previous step.

**STEP 5:** Select DNS Server Interface from available WAN interfaces OR enter Static DNS server IP addresses for the system. In ATM mode, if only a single PVC with IPoA or static IPoE protocol is configured, Static DNS server IP addresses must be entered.

Select the configured WAN interface for IPv6 DNS server information OR enter the static IPv6 DNS server Addresses. Note that selecting a WAN interface for IPv6 DNS server will enable DHCPv6 Client on that interface.

### DNS Server Configuration

Select DNS Server Interface from available WAN interfaces OR enter static DNS server IP addresses for the system. In ATM mode, if only a single PVC with IPoA or static IPoE protocol is configured, Static DNS server IP addresses must be entered. **DNS Server Interfaces** can have multiple WAN interfaces served as system dns servers but only one will be used according to the priority with the first being the highest and the last one the lowest priority if the WAN interface is connected. Priority order can be changed by removing all and adding them back in again.

☒ **Select DNS Server Interface from available WAN interfaces:**

Selected DNS Server Interfaces

atm0.1

Available WAN Interfaces

->

<~

☐ **Use the following Static DNS IP address:**

Primary DNS server:

Secondary DNS server:

IPv6: Select the configured WAN interface for IPv6 DNS server information OR enter the static IPv6 DNS server Addresses.  
Note that selecting a WAN interface for IPv6 DNS server will enable DHCPv6 Client on that interface.

☒ **Obtain IPv6 DNS info from a WAN interface:**

WAN Interface selected:

☐ **Use the following Static IPv6 DNS address:**

Primary IPv6 DNS server:

Secondary IPv6 DNS server:

Back

Next

Click **Next** to continue or click **Back** to return to the previous step.

**STEP 6:** The WAN Setup - Summary screen shows a preview of the WAN service you have configured. Check these settings and click **Apply/Save** if they are correct, or click **Back** to modify them.

**WAN Setup - Summary**  
Make sure that the settings below match the settings provided by your ISP.

|                     |          |
|---------------------|----------|
| Connection Type:    | IPoE     |
| NAT:                | Disabled |
| Full Cone NAT:      | Disabled |
| Firewall:           | Disabled |
| IGMP Multicast:     | Disabled |
| Quality Of Service: | Enabled  |


Click "Apply/Save" to have this interface to be effective. Click "Back" to make any modifications.

BackApply/Save

After clicking **Apply/Save**, the new service should appear on the main screen.

## E2.8 PPP over ATM (PPPoA) – IPv6

**STEP 1:** Select IPv6 Only from the drop-down box at the bottom of this screen and click **Next**.

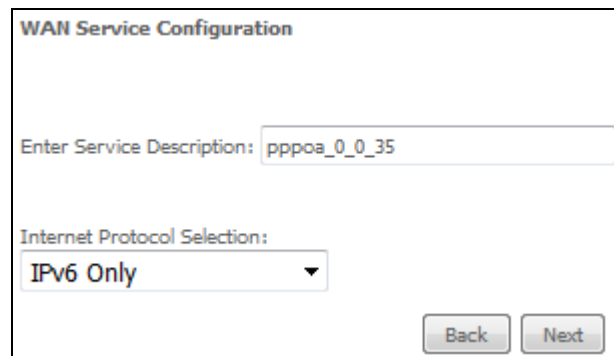

The image shows a 'WAN Service Configuration' window. It contains a text input field for 'Enter Service Description' with the value 'pppoa\_0\_0\_35'. Below it is a dropdown menu for 'Internet Protocol Selection' with 'IPv6 Only' selected. At the bottom right are 'Back' and 'Next' buttons.

WAN Service Configuration

Enter Service Description: pppoa\_0\_0\_35

Internet Protocol Selection:  
IPv6 Only ▼

Back Next

**STEP 2:** On the next screen, enter the PPP settings as provided by your ISP.  
Click **Next** to continue or click **Back** to return to the previous step.

**PPP Username and Password**

PPP usually requires that you have a user name and password to establish your connection.  
In the boxes below, enter the user name and password that your ISP has provided to you.  
NOTE: IP extension can not be enabled when you enable 3G backup.

PPP Username:

PPP Password:

Authentication Method: **AUTO** ▼

☐ Enable Fullcone NAT

☐ Dial on demand (with idle timeout timer)

☐ PPP IP extension

☐ Enable Firewall

☐ Use Static IPv4 Address

☐ Use Static IPv6 Address

☐ Enable IPv6 Unnumbered Model

☐ Launch Dhcp6c for Address Assignment (IANA)

☒ Launch Dhcp6c for Prefix Delegation (IAPD)

☒ Fixed MTU

MTU:

☐ Enable PPP Debug Mode

**Multicast Proxy**

☐ Enable IGMP Multicast Proxy

☐ No Multicast VLAN Filter

☐ Enable MLD Multicast Proxy

**WAN interface with base MAC.**  
Notice: Only one WAN interface can be cloned to base MAC address.

☐ Enable WAN interface with base MAC

## PPP SETTINGS


The PPP username and password are dependent on the requirements of the ISP. The user name can be a maximum of 256 characters and the password a maximum of 32 characters in length. (Authentication Method: AUTO, PAP, CHAP, or MSCHAP.)

## ENABLE FULLCONE NAT

This option becomes available when NAT is enabled. Known as one-to-one NAT, all requests from the same internal IP address and port are mapped to the same external IP address and port. An external host can send a packet to the internal host, by sending a packet to the mapped external address.

## DIAL ON DEMAND

The AR-5313u can be configured to disconnect if there is no activity for a period of time by selecting the **Dial on demand** checkbox ☒. You must also enter an inactivity timeout period in the range of 1 to 4320 minutes.

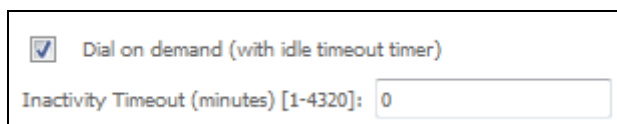

## PPP IP EXTENSION

The PPP IP Extension is a special feature deployed by some service providers. Unless your service provider specifically requires this setup, do not select it.

PPP IP Extension does the following:

- Allows only one PC on the LAN.
- Disables NAT and Firewall.
- The device becomes the default gateway and DNS server to the PC through DHCP using the LAN interface IP address.
- The device extends the IP subnet at the remote service provider to the LAN PC. i.e. the PC becomes a host belonging to the same IP subnet.
- The device bridges the IP packets between WAN and LAN ports, unless the packet is addressed to the device's LAN IP address.
- The public IP address assigned by the remote side using the PPP/IPCP protocol is actually not used on the WAN PPP interface. Instead, it is forwarded to the PC LAN interface through DHCP. Only one PC on the LAN can be connected to the remote, since the DHCP server within the device has only a single IP address to assign to a LAN device.

## ENABLE FIREWALL

If this checkbox ☒ is selected, the Security submenu will be displayed on the Advanced Setup menu after reboot. If firewall is not necessary, this checkbox ☒ should not be selected to free up system resources for better performance.

## USE STATIC IPv4 ADDRESS

Unless your service provider specially requires it, do not select this checkbox ☒. If selected, enter the static IP address in the **IP Address** field. Also, don't forget to adjust the IP configuration to Static IP Mode as described in [3.2 IP Configuration](#).

### **USE STATIC IPv6 ADDRESS**

Unless your service provider specially requires it, do not select this checkbox ☒. If selected, enter the static IP address in the **IPv6 Address** field.

Don't forget to adjust the IP configuration to Static IP Mode as described in section [3.2 IP Configuration](#).

### **ENABLE IPv6 UNNUMBERED MODEL**

The IP unnumbered configuration command allows you to enable IP processing on a serial interface without assigning it an explicit IP address. The IP unnumbered interface can "borrow" the IP address of another interface already configured on the router, which conserves network and address space.

### **LAUNCH DHCP6C FOR ADDRESS ASSIGNMENT (IANA)**

The Internet Assigned Numbers Authority (IANA) is a department of ICANN responsible for coordinating some of the key elements that keep the Internet running smoothly. Whilst the Internet is renowned for being a worldwide network free from central coordination, there is a technical need for some key parts of the Internet to be globally coordinated, and this coordination role is undertaken by IANA.

Specifically, IANA allocates and maintains unique codes and numbering systems that are used in the technical standards ("protocols") that drive the Internet.

IANA's various activities can be broadly grouped in to three categories:

- **Domain Names**  
IANA manages the DNS Root, the .int and .arpa domains, and an IDN practices resource.
- **Number Resources**  
IANA coordinates the global pool of IP and AS numbers, providing them to Regional Internet Registries.
- **Protocol Assignments**  
Internet protocols' numbering systems are managed by IANA in conjunction with standards bodies.

### **LAUNCH DHCP6C FOR PREFIX DELEGATION (IAPD)**

An Identity Association for Prefix Delegation (IAPD) is a collection of prefixes assigned to a requesting device. A requesting device may have more than one IAPD; for example, one for each of its interfaces.

A prefix-delegating router (DHCPv6 server) selects prefixes to be assigned to a requesting router (DHCPv6 client) upon receiving a request from the client. The server can select prefixes for a requesting client by using static and dynamic assignment mechanisms. Administrators can manually configure a list of prefixes and associated preferred and valid lifetimes for an IAPD of a specific client that is identified by its DUID.

When the delegating router receives a request from a client, it checks if there is a static binding configured for the IAPD in the client's message. If a static binding is present, the prefixes in the binding are returned to the client. If no such binding is found, the server attempts to assign prefixes for the client from other sources.

An IPv6 prefix delegating router can also select prefixes for a requesting router based on an external authority such as a RADIUS server using the Framed-IPv6-Prefix attribute.

### **FIXED MTU**

Fixed Maximum Transmission Unit. The size (in bytes) of largest protocol data unit which the layer can pass onwards. This value is 1500 for PPPoA.

### **ENABLE PPP DEBUG MODE**

When this option is selected, the system will put more PPP connection information into the system log. This is for debugging errors and not for normal usage.

**Enable IGMP Multicast Proxy**

Tick the checkbox ☒ to enable Internet Group Membership Protocol (IGMP) multicast. This protocol is used by IPv6 hosts to report their multicast group memberships to any neighboring multicast routers.

**No Multicast VLAN Filter**

Tick the checkbox ☒ to Enable/Disable multicast VLAN filter.

**ENABLE MLD MULTICAST PROXY**

Multicast Listener Discovery (MLD) is a component of the Internet Protocol Version 6 (IPv6) suite. MLD is used by IPv6 routers for discovering multicast listeners on a directly attached link, much like IGMP is used in IPv4. The protocol is embedded in ICMPv6 instead of using a separate protocol.

**WAN interface with base MAC**

Enable this option to use the router's base MAC address as the MAC address for this WAN interface.

**STEP 3:** Choose an interface to be the default gateway.

**Routing -- Default Gateway**  
Default gateway interface list can have multiple WAN interfaces served as system default gateways but only one will be used according to the priority with the first being the highest and the last one the lowest priority if the WAN interface is connected. Priority order can be changed by removing all and adding them back in again.

**Selected Default Gateway Interfaces**  

pppoa0

->

<-

**Available Routed WAN Interfaces**

IPv6: Select a preferred wan interface as the system default IPv6 gateway.

Selected WAN Interface 

pppoa\_0\_0\_35/pppoa0

Back

Next

Click **Next** to continue or click **Back** to return to the previous step.

**STEP 4:** Select DNS Server Interface from available WAN interfaces OR enter Static DNS server IP addresses for the system. In ATM mode, if only a single PVC with IPoA or static IPoE protocol is configured, Static DNS server IP addresses must be entered.

Select the configured WAN interface for IPv6 DNS server information OR enter the static IPv6 DNS server Addresses. Note that selecting a WAN interface for IPv6 DNS server will enable DHCPv6 Client on that interface.

### DNS Server Configuration

Select DNS Server Interface from available WAN interfaces OR enter static DNS server IP addresses for the system. In ATM mode, if only a single PVC with IPoA or static IPoE protocol is configured, Static DNS server IP addresses must be entered. **DNS Server Interfaces** can have multiple WAN interfaces served as system dns servers but only one will be used according to the priority with the first being the highest and the last one the lowest priority if the WAN interface is connected. Priority order can be changed by removing all and adding them back in again.

☒ **Select DNS Server Interface from available WAN interfaces:**

Selected DNS Server Interfaces

Available WAN Interfaces

pppoa0

->

<-

☐ **Use the following Static DNS IP address:**

Primary DNS server:

Secondary DNS server:

IPv6: Select the configured WAN interface for IPv6 DNS server information OR enter the static IPv6 DNS server Addresses.  
Note that selecting a WAN interface for IPv6 DNS server will enable DHCPv6 Client on that interface.

☒ **Obtain IPv6 DNS info from a WAN interface:**

WAN Interface selected:

☐ **Use the following Static IPv6 DNS address:**

Primary IPv6 DNS server:

Secondary IPv6 DNS server:

Back

Next

Click **Next** to continue or click **Back** to return to the previous step.

**STEP 5:** The WAN Setup - Summary screen shows a preview of the WAN service you have configured. Check these settings and click **Apply/Save** if they are correct, or click **Back** to modify them.

**WAN Setup - Summary**

Make sure that the settings below match the settings provided by your ISP.

|                     |          |
|---------------------|----------|
| Connection Type:    | PPPoA    |
| NAT:                | Disabled |
| Full Cone NAT:      | Disabled |
| Firewall:           | Disabled |
| IGMP Multicast:     | Disabled |
| Quality Of Service: | Enabled  |

Click "Apply/Save" to have this interface to be effective. Click "Back" to make any modifications.

After clicking **Apply/Save**, the new service should appear on the main screen.


## Appendix F – Printer Server

These steps explain the procedure for enabling the Printer Server.

**NOTE:** This function only applies to models with a USB host port.

**STEP 1:** Enable Print Server from Web User Interface. Select the Enable on-board print server checkbox ☒ and input Printer name & Make and model. Click the **Apply/Save** button.

**NOTE:** The **Printer name** can be any text string up to 40 characters.  
The **Make and model** can be any text string up to 128 characters.

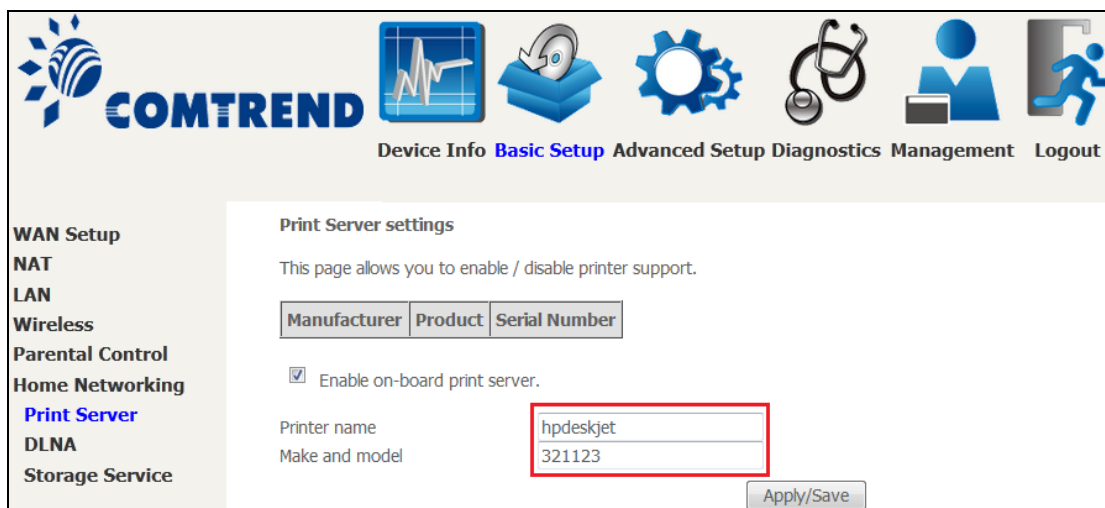

**COMTREND**

Device Info Basic Setup Advanced Setup Diagnostics Management Logout

WAN Setup  
NAT  
LAN  
Wireless  
Parental Control  
Home Networking  
**Print Server**  
DLNA  
Storage Service

**Print Server settings**

This page allows you to enable / disable printer support.

| Manufacturer | Product | Serial Number |
|--------------|---------|---------------|
|              |         |               |


☒ Enable on-board print server.

Printer name: hpdeskjet


Make and model: 321123

Apply/Save


**STEP 2:** Click the Windows start  button. → Then select **Control Panel**.

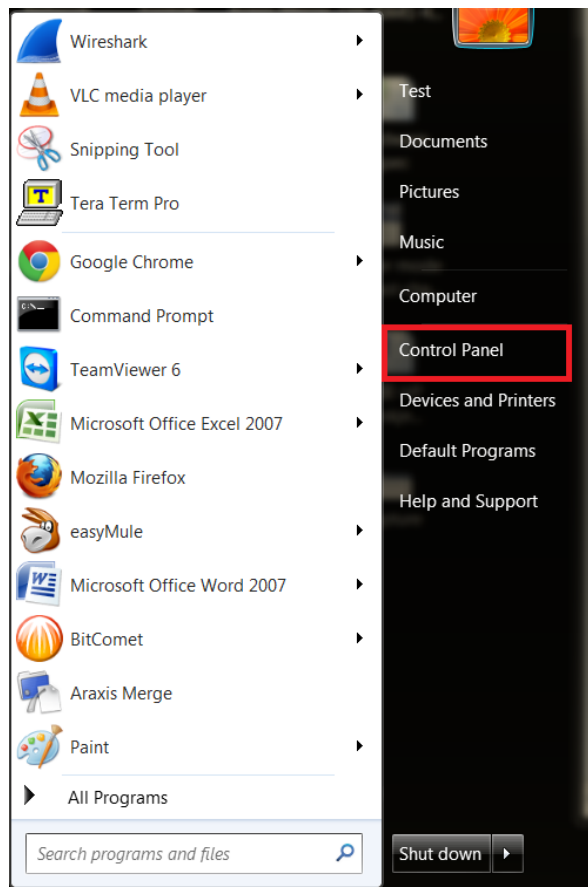


**STEP 3: Select **Devices and Printers**.**

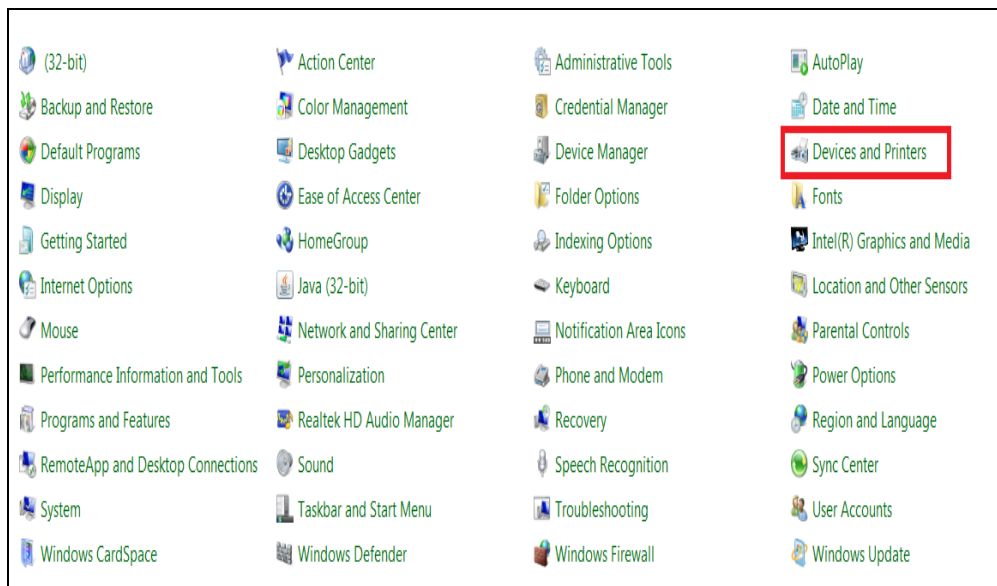


**STEP 4: Select **Add a printer**.**

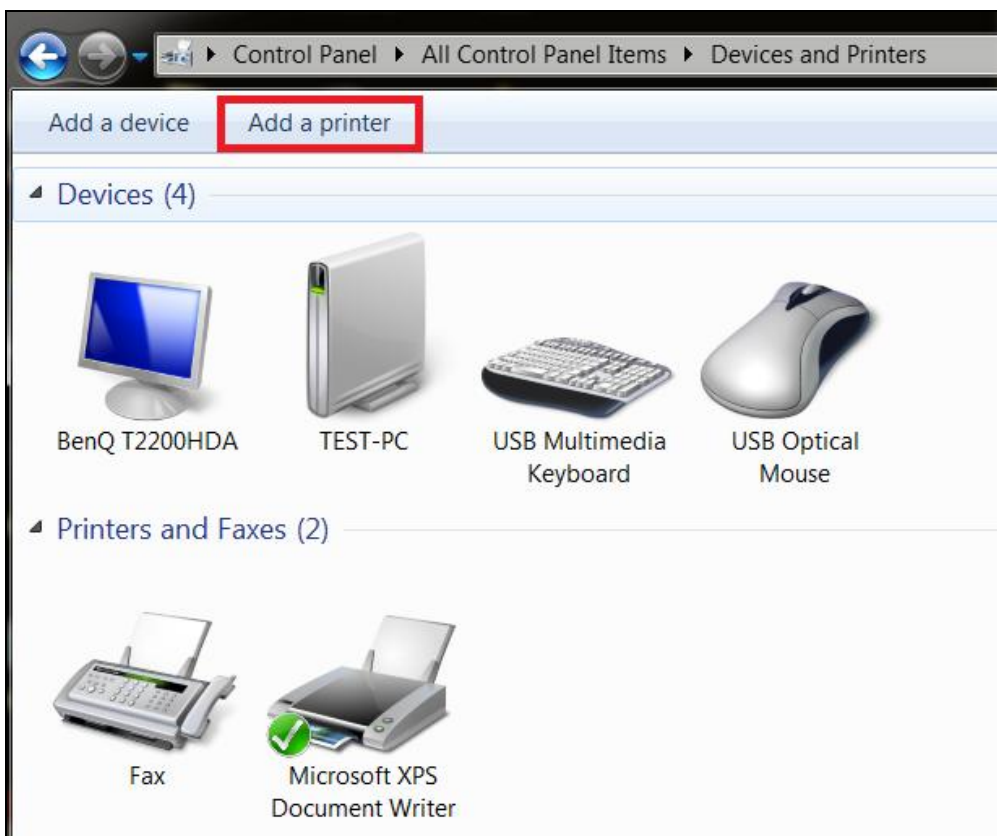

**STEP 5:** Select **Add a network, wireless or Bluetooth printer**.

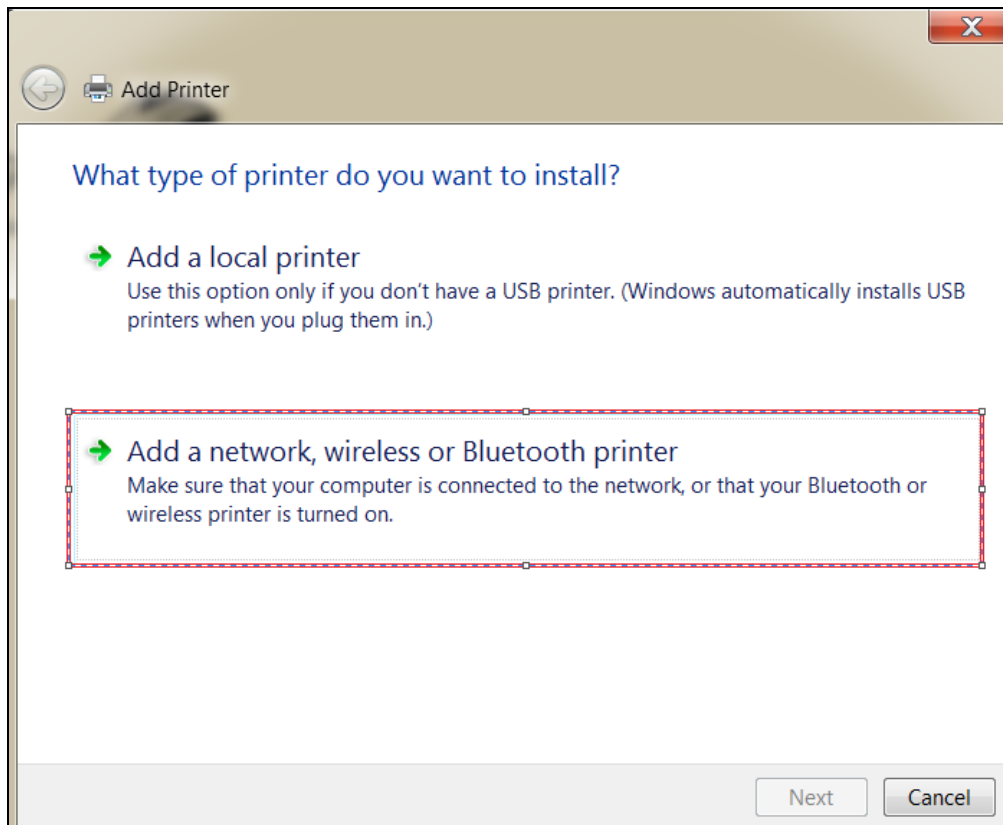


**STEP 6:** Click the **Stop** button. → Select **The printer that I want isn't listed**.

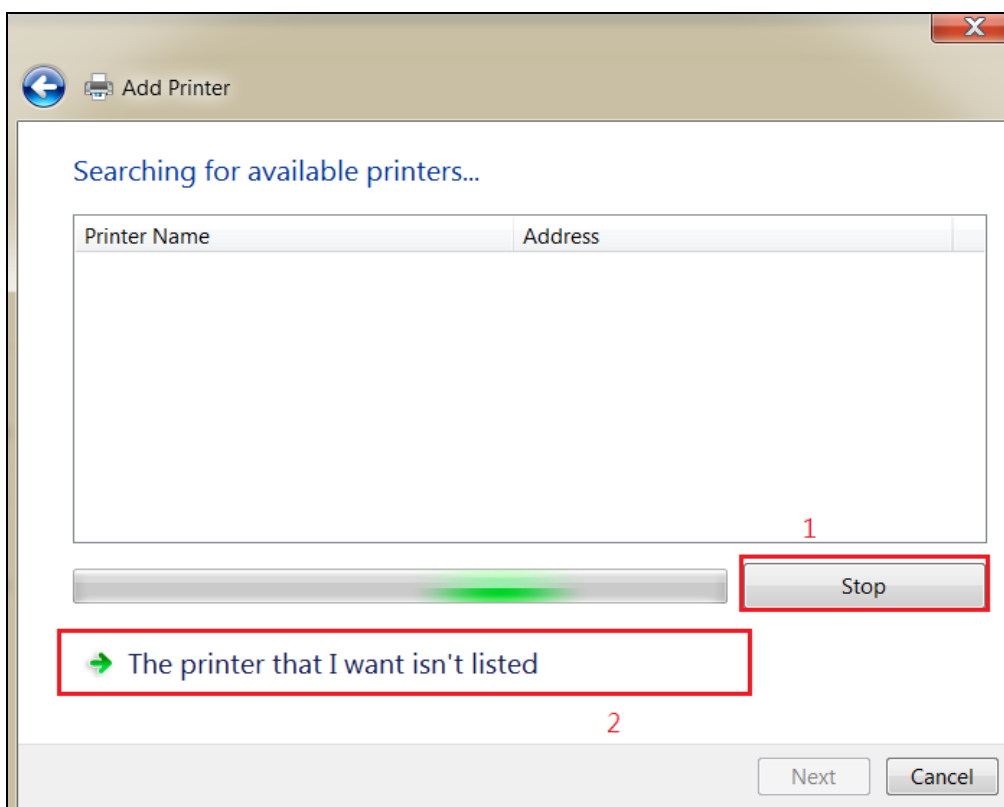


**STEP 7:** Choose **Select a shared printer by name**. Then input the printer link and click **Next**.

<http://LAN IP:631/printers/the name of the printer>


**NOTE:** The printer name must be the same name inputted in the WEB UI "printer server settings" as in step 1.

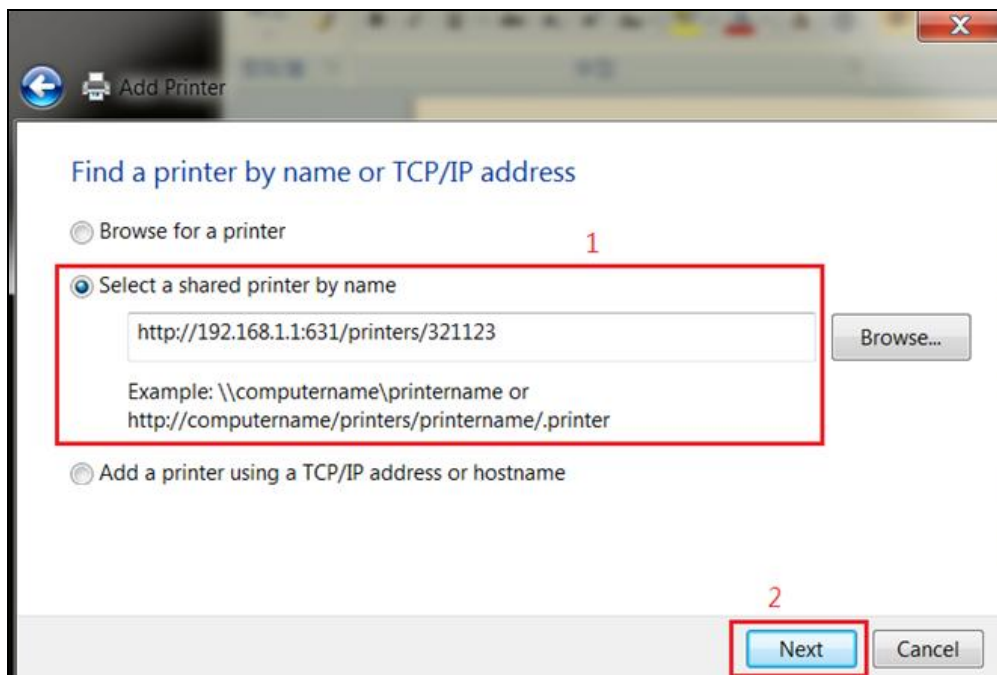


**STEP 8:** Select the **manufacturer** → and **model** of your printer → then, click **OK**.

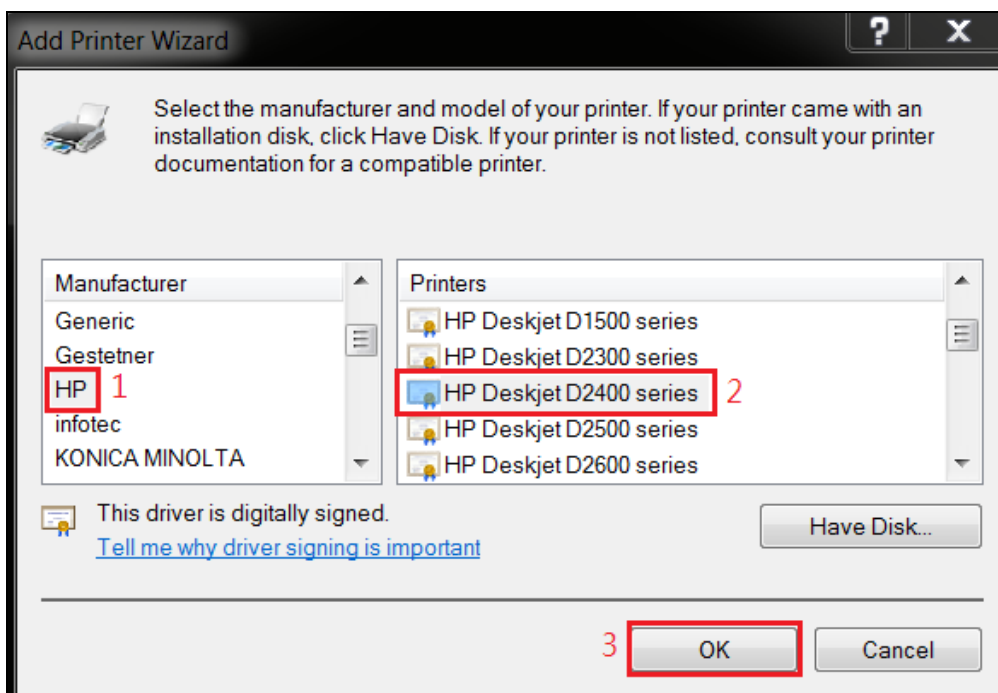

**STEP 9:** The printer has been successfully installed. Click the **Next** button.

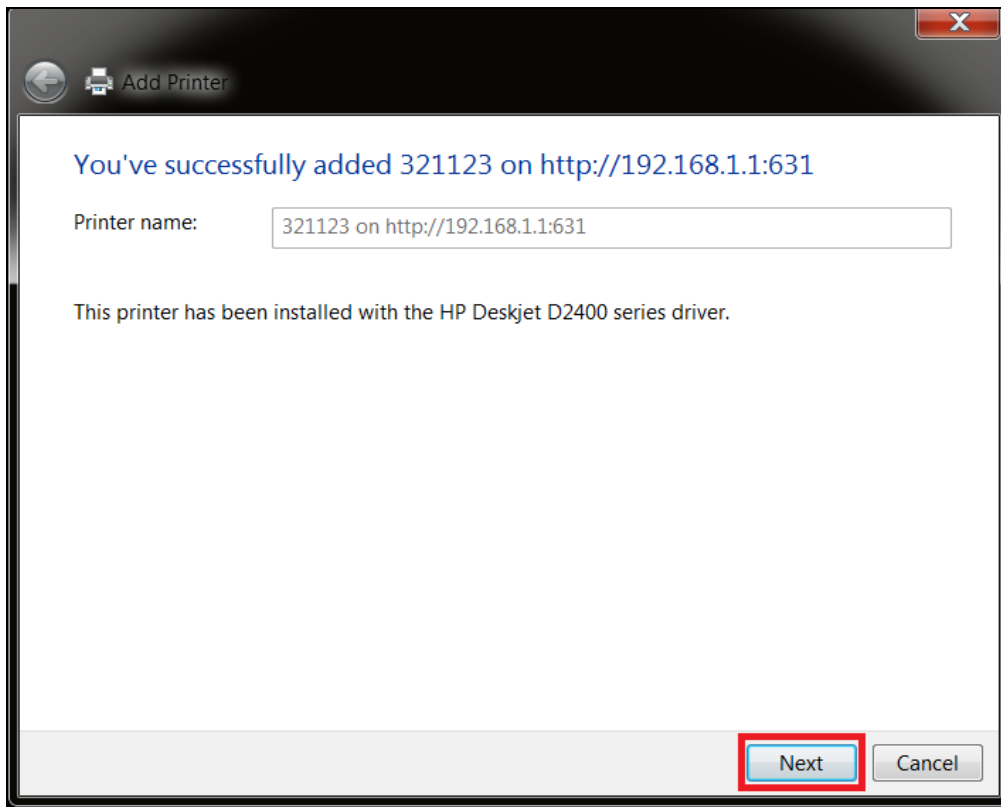

**STEP 10:** Click Finish (or print a test page if required).

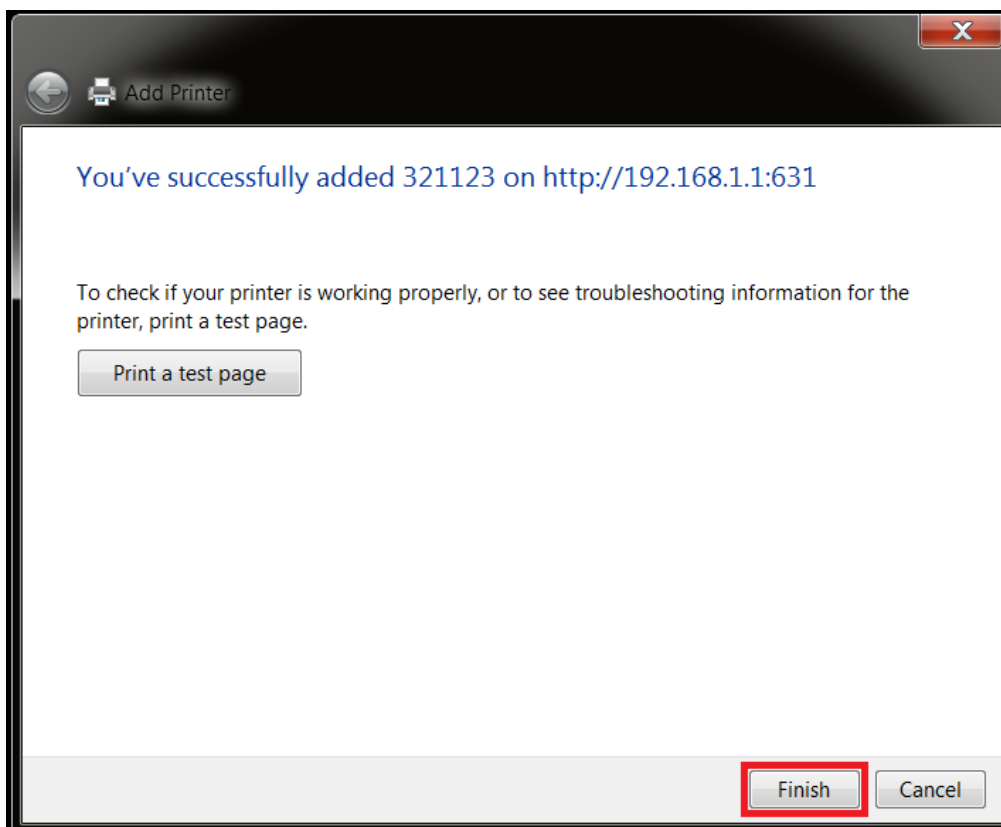

**STEP 11:** Go to → **Control Panel** → **All Control Panel Items** → **Devices and Printers** to confirm that the printer has been configured.

