

Conducted Spurs Average – Antenna gain 8dBi.**Frequency 5745 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	8	-63.0		0.48	-54.5	-41	13.27
Non HT20, 6 to 54 Mbps	2	8	-63.0	-61.6	0.48	-50.8	-41	9.5
Non HT20 Beam Forming, 6 to 54 Mbps	2	11	-63.0	-61.6	0.48	-47.8	-41	6.5
HT/VHT20, M0 to M7	1	8	-63.0		0.36	-54.6	-41	13.39
HT/VHT20, M0 to M7	2	8	-63.0	-61.8	0.36	-51.0	-41	9.74
HT/VHT20, M8 to M15	2	8	-63.0	-61.8	0.36	-51.0	-41	9.74
HT/VHT20 Beam Forming, M0 to M7	2	11	-63.0	-61.8	0.36	-48.0	-41	6.74
HT/VHT20 Beam Forming, M8 to M15	2	8	-63.0	-61.8	0.36	-51.0	-41	9.74
HT/VHT20 STBC, M8 to M15	2	8	-63.0	-61.8	0.36	-51.0	-41	9.74
HE20, M0 to M11 1ss	1	8	-62.7		0.3	-54.4	-41	13.15
HE20, M0 to M11 1ss	2	8	-62.7	-61.5	0.3	-50.8	-41	9.5
HE20, M0 to M11 2ss	2	8	-62.7	-61.5	0.3	-50.8	-41	9.5
HE20 Beam Forming, M0 to M11 1ss	2	11	-62.7	-61.5	0.3	-47.8	-41	6.5
HE20 Beam Forming, M0 to M11 2ss	2	8	-62.7	-61.5	0.3	-50.8	-41	9.5
HE20 STBC, M0 to M11 2ss	2	8	-62.7	-61.5	0.3	-50.8	-41	9.5

Frequency 5755 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	8	-63.0		0.41	-54.6	-41	13.34
Non HT40, 6 to 54 Mbps	2	8	-63.0	-61.8	0.41	-50.9	-41	9.69
HT/VHT40, M0 to M7	1	8	-64.2		0.58	-55.6	-41	14.37
HT/VHT40, M0 to M7	2	8	-64.2	-61.4	0.58	-51.0	-41	9.73
HT/VHT40, M8 to M15	2	8	-64.2	-61.4	0.58	-51.0	-41	9.73
HT/VHT40 Beam Forming, M0 to M7	2	11	-64.2	-61.4	0.58	-48.0	-41	6.73
HT/VHT40 Beam Forming, M8 to M15	2	8	-64.2	-61.4	0.58	-51.0	-41	9.73
HT/VHT40 STBC, M8 to M15	2	8	-64.2	-61.4	0.58	-51.0	-41	9.73
HE40, M0 to M11 1ss	1	8	-62.7		0.33	-54.4	-41	13.12
HE40, M0 to M11 1ss	2	8	-62.7	-61.5	0.33	-50.7	-41	9.47
HE40, M0 to M11 2ss	2	8	-62.7	-61.5	0.33	-50.7	-41	9.47
HE40 Beam Forming, M0 to M11 1ss	2	11	-62.7	-61.5	0.33	-47.7	-41	6.47
HE40 Beam Forming, M0 to M11 2ss	2	8	-62.7	-61.5	0.33	-50.7	-41	9.47
HE40 STBC, M0 to M11 2ss	2	8	-62.7	-61.5	0.33	-50.7	-41	9.47

Frequency 5775 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	8	-64.3		0.38	-55.9	-41	14.67
Non HT80, 6 to 54 Mbps	2	8	-64.3	-64.9	0.38	-53.2	-41	11.95
VHT80, M0 to M11 1ss	1	8	-65.0		0.44	-56.6	-41	15.31
VHT80, M0 to M11 1ss	2	8	-65.0	-65.2	0.44	-53.6	-41	12.39
VHT80, M0 to M11 2ss	2	8	-65.0	-65.2	0.44	-53.6	-41	12.39
VHT80 Beam Forming, M0 to M11 1ss	2	11	-65.0	-65.2	0.44	-50.6	-41	9.39
VHT80 Beam Forming, M0 to M11 2ss	2	8	-65.0	-65.2	0.44	-53.6	-41	12.39
VHT80 STBC, M0 to M11 2ss	2	8	-65.0	-65.2	0.44	-53.6	-41	12.39
HE80, M0 to M11 1ss	1	8	-64.4		0.33	-56.1	-41	14.82
HE80, M0 to M11 1ss	2	8	-64.4	-64.9	0.33	-53.3	-41	12.05
HE80, M0 to M11 2ss	2	8	-64.4	-64.9	0.33	-53.3	-41	12.05
HE80 Beam Forming, M0 to M11 1ss	2	11	-64.4	-64.9	0.33	-50.3	-41	9.05
HE80 Beam Forming, M0 to M11 2ss	2	8	-64.4	-64.9	0.33	-53.3	-41	12.05
HE80 STBC, M0 to M11 2ss	2	8	-64.4	-64.9	0.33	-53.3	-41	12.05

Frequency 5785 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	8	-63.2		0.48	-54.7	-41	13.47
Non HT20, 6 to 54 Mbps	2	8	-63.2	-62.0	0.48	-51.1	-41	9.82
Non HT20 Beam Forming, 6 to 54 Mbps	2	11	-63.2	-62.0	0.48	-48.1	-41	6.82
HT/VHT20, M0 to M7	1	8	-63.3		0.36	-54.9	-41	13.69
HT/VHT20, M0 to M7	2	8	-63.3	-61.7	0.36	-51.1	-41	9.81
HT/VHT20, M8 to M15	2	8	-63.3	-61.7	0.36	-51.1	-41	9.81
HT/VHT20 Beam Forming, M0 to M7	2	11	-63.3	-61.7	0.36	-48.1	-41	6.81
HT/VHT20 Beam Forming, M8 to M15	2	8	-63.3	-61.7	0.36	-51.1	-41	9.81
HT/VHT20 STBC, M8 to M15	2	8	-63.3	-61.7	0.36	-51.1	-41	9.81
HE20, M0 to M11 1ss	1	8	-64.5		0.3	-56.2	-41	14.95
HE20, M0 to M11 1ss	2	8	-64.5	-62.9	0.3	-52.3	-41	11.07
HE20, M0 to M11 2ss	2	8	-64.5	-62.9	0.3	-52.3	-41	11.07
HE20 Beam Forming, M0 to M11 1ss	2	11	-64.5	-62.9	0.3	-49.3	-41	8.07
HE20 Beam Forming, M0 to M11 2ss	2	8	-64.5	-62.9	0.3	-52.3	-41	11.07
HE20 STBC, M0 to M11 2ss	2	8	-64.5	-62.9	0.3	-52.3	-41	11.07

Frequency 5795 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	8	-63.4		0.41	-55.0	-41	13.74
Non HT40, 6 to 54 Mbps	2	8	-63.4	-62.2	0.41	-51.3	-41	10.09
HT/VHT40, M0 to M7	1	8	-63.6		0.58	-55.0	-41	13.77
HT/VHT40, M0 to M7	2	8	-63.6	-62.3	0.58	-51.3	-41	10.06
HT/VHT40, M8 to M15	2	8	-63.6	-62.3	0.58	-51.3	-41	10.06
HT/VHT40 Beam Forming, M0 to M7	2	11	-63.6	-62.3	0.58	-48.3	-41	7.06
HT/VHT40 Beam Forming, M8 to M15	2	8	-63.6	-62.3	0.58	-51.3	-41	10.06
HT/VHT40 STBC, M8 to M15	2	8	-63.6	-62.3	0.58	-51.3	-41	10.06
HE40, M0 to M11 1ss	1	8	-63.4		0.33	-55.1	-41	13.82
HE40, M0 to M11 1ss	2	8	-63.4	-62.6	0.33	-51.6	-41	10.39
HE40, M0 to M11 2ss	2	8	-63.4	-62.6	0.33	-51.6	-41	10.39
HE40 Beam Forming, M0 to M11 1ss	2	11	-63.4	-62.6	0.33	-48.6	-41	7.39
HE40 Beam Forming, M0 to M11 2ss	2	8	-63.4	-62.6	0.33	-51.6	-41	10.39
HE40 STBC, M0 to M11 2ss	2	8	-63.4	-62.6	0.33	-51.6	-41	10.39

Frequency 5825 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	8	-63.6		0.48	-55.1	-41	13.87
Non HT20, 6 to 54 Mbps	2	8	-63.6	-62.7	0.48	-51.6	-41	10.39
Non HT20 Beam Forming, 6 to 54 Mbps	2	11	-63.6	-62.7	0.48	-48.6	-41	7.39
HT/VHT20, M0 to M7	1	8	-64.5		0.36	-56.1	-41	14.89
HT/VHT20, M0 to M7	2	8	-64.5	-62.8	0.36	-52.2	-41	10.95
HT/VHT20, M8 to M15	2	8	-64.5	-62.8	0.36	-52.2	-41	10.95
HT/VHT20 Beam Forming, M0 to M7	2	11	-64.5	-62.8	0.36	-49.2	-41	7.95
HT/VHT20 Beam Forming, M8 to M15	2	8	-64.5	-62.8	0.36	-52.2	-41	10.95
HT/VHT20 STBC, M8 to M15	2	8	-64.5	-62.8	0.36	-52.2	-41	10.95
HE20, M0 to M11 1ss	1	8	-64.1		0.3	-55.8	-41	14.55
HE20, M0 to M11 1ss	2	8	-64.1	-63.2	0.3	-52.3	-41	11.07
HE20, M0 to M11 2ss	2	8	-64.1	-63.2	0.3	-52.3	-41	11.07
HE20 Beam Forming, M0 to M11 1ss	2	11	-64.1	-63.2	0.3	-49.3	-41	8.07
HE20 Beam Forming, M0 to M11 2ss	2	8	-64.1	-63.2	0.3	-52.3	-41	11.07
HE20 STBC, M0 to M11 2ss	2	8	-64.1	-63.2	0.3	-52.3	-41	11.07

Conducted Spurs Peak – Antenna gain 8dBi.**Frequency 5745 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	8	-53.9		0.48	-45.4	-27	18.42
Non HT20, 6 to 54 Mbps	2	8	-53.9	-55.4	0.48	-43.1	-27	16.09
Non HT20 Beam Forming, 6 to 54 Mbps	2	11	-53.9	-55.4	0.48	-40.1	-27	13.09
HT/VHT20, M0 to M7	1	8	-55.3		0.36	-46.9	-27	19.94
HT/VHT20, M0 to M7	2	8	-55.3	-55.5	0.36	-44.0	-27	17.03
HT/VHT20, M8 to M15	2	8	-55.3	-55.5	0.36	-44.0	-27	17.03
HT/VHT20 Beam Forming, M0 to M7	2	11	-55.3	-55.5	0.36	-41.0	-27	14.03
HT/VHT20 Beam Forming, M8 to M15	2	8	-55.3	-55.5	0.36	-44.0	-27	17.03
HT/VHT20 STBC, M8 to M15	2	8	-55.3	-55.5	0.36	-44.0	-27	17.03
HE20, M0 to M11 1ss	1	8	-54.1		0.3	-45.8	-27	18.8
HE20, M0 to M11 1ss	2	8	-54.1	-56.2	0.3	-43.7	-27	16.72
HE20, M0 to M11 2ss	2	8	-54.1	-56.2	0.3	-43.7	-27	16.72
HE20 Beam Forming, M0 to M11 1ss	2	11	-54.1	-56.2	0.3	-40.7	-27	13.72
HE20 Beam Forming, M0 to M11 2ss	2	8	-54.1	-56.2	0.3	-43.7	-27	16.72
HE20 STBC, M0 to M11 2ss	2	8	-54.1	-56.2	0.3	-43.7	-27	16.72

Frequency 5755 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	8	-54.4		0.41	-46.0	-27	18.99
Non HT40, 6 to 54 Mbps	2	8	-54.4	-56.1	0.41	-43.7	-27	16.75
HT/VHT40, M0 to M7	1	8	-56.7		0.58	-48.1	-27	21.12
HT/VHT40, M0 to M7	2	8	-56.7	-56.3	0.58	-44.9	-27	17.9
HT/VHT40, M8 to M15	2	8	-56.7	-56.3	0.58	-44.9	-27	17.9
HT/VHT40 Beam Forming, M0 to M7	2	11	-56.7	-56.3	0.58	-41.9	-27	14.9
HT/VHT40 Beam Forming, M8 to M15	2	8	-56.7	-56.3	0.58	-44.9	-27	17.9
HT/VHT40 STBC, M8 to M15	2	8	-56.7	-56.3	0.58	-44.9	-27	17.9
HE40, M0 to M11 1ss	1	8	-56.2		0.33	-47.9	-27	20.87
HE40, M0 to M11 1ss	2	8	-56.2	-56.9	0.33	-45.2	-27	18.2
HE40, M0 to M11 2ss	2	8	-56.2	-56.9	0.33	-45.2	-27	18.2
HE40 Beam Forming, M0 to M11 1ss	2	11	-56.2	-56.9	0.33	-42.2	-27	15.2
HE40 Beam Forming, M0 to M11 2ss	2	8	-56.2	-56.9	0.33	-45.2	-27	18.2
HE40 STBC, M0 to M11 2ss	2	8	-56.2	-56.9	0.33	-45.2	-27	18.2

Frequency 5775 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	8	-55.6		0.38	-47.2	-27	20.22
Non HT80, 6 to 54 Mbps	2	8	-55.6	-55.7	0.38	-44.3	-27	17.26
VHT80, M0 to M11 1ss	1	8	-57.1		0.44	-48.7	-27	21.66
VHT80, M0 to M11 1ss	2	8	-57.1	-56.3	0.44	-45.2	-27	18.23
VHT80, M0 to M11 2ss	2	8	-57.1	-56.3	0.44	-45.2	-27	18.23
VHT80 Beam Forming, M0 to M11 1ss	2	11	-57.1	-56.3	0.44	-42.2	-27	15.23
VHT80 Beam Forming, M0 to M11 2ss	2	8	-57.1	-56.3	0.44	-45.2	-27	18.23
VHT80 STBC, M0 to M11 2ss	2	8	-57.1	-56.3	0.44	-45.2	-27	18.23
HE80, M0 to M11 1ss	1	8	-57.9		0.33	-49.6	-27	22.57
HE80, M0 to M11 1ss	2	8	-57.9	-56.2	0.33	-45.6	-27	18.63
HE80, M0 to M11 2ss	2	8	-57.9	-56.2	0.33	-45.6	-27	18.63
HE80 Beam Forming, M0 to M11 1ss	2	11	-57.9	-56.2	0.33	-42.6	-27	15.63
HE80 Beam Forming, M0 to M11 2ss	2	8	-57.9	-56.2	0.33	-45.6	-27	18.63
HE80 STBC, M0 to M11 2ss	2	8	-57.9	-56.2	0.33	-45.6	-27	18.63

Frequency 5785 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	8	-54.0		0.48	-45.5	-27	18.52
Non HT20, 6 to 54 Mbps	2	8	-54.0	-55.8	0.48	-43.3	-27	16.32
Non HT20 Beam Forming, 6 to 54 Mbps	2	11	-54.0	-55.8	0.48	-40.3	-27	13.32
HT/VHT20, M0 to M7	1	8	-55.3		0.36	-46.9	-27	19.94
HT/VHT20, M0 to M7	2	8	-55.3	-56.5	0.36	-44.5	-27	17.49
HT/VHT20, M8 to M15	2	8	-55.3	-56.5	0.36	-44.5	-27	17.49
HT/VHT20 Beam Forming, M0 to M7	2	11	-55.3	-56.5	0.36	-41.5	-27	14.49
HT/VHT20 Beam Forming, M8 to M15	2	8	-55.3	-56.5	0.36	-44.5	-27	17.49
HT/VHT20 STBC, M8 to M15	2	8	-55.3	-56.5	0.36	-44.5	-27	17.49
HE20, M0 to M11 1ss	1	8	-54.7		0.3	-46.4	-27	19.4
HE20, M0 to M11 1ss	2	8	-54.7	-55.2	0.3	-43.6	-27	16.64
HE20, M0 to M11 2ss	2	8	-54.7	-55.2	0.3	-43.6	-27	16.64
HE20 Beam Forming, M0 to M11 1ss	2	11	-54.7	-55.2	0.3	-40.6	-27	13.64
HE20 Beam Forming, M0 to M11 2ss	2	8	-54.7	-55.2	0.3	-43.6	-27	16.64
HE20 STBC, M0 to M11 2ss	2	8	-54.7	-55.2	0.3	-43.6	-27	16.64

Frequency 5795 MHz


Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	8	-55.7		0.41	-47.3	-27	20.29
Non HT40, 6 to 54 Mbps	2	8	-55.7	-55.4	0.41	-44.1	-27	17.13
HT/VHT40, M0 to M7	1	8	-56.4		0.58	-47.8	-27	20.82
HT/VHT40, M0 to M7	2	8	-56.4	-56.9	0.58	-45.0	-27	18.05
HT/VHT40, M8 to M15	2	8	-56.4	-56.9	0.58	-45.0	-27	18.05
HT/VHT40 Beam Forming, M0 to M7	2	11	-56.4	-56.9	0.58	-42.0	-27	15.05
HT/VHT40 Beam Forming, M8 to M15	2	8	-56.4	-56.9	0.58	-45.0	-27	18.05
HT/VHT40 STBC, M8 to M15	2	8	-56.4	-56.9	0.58	-45.0	-27	18.05
HE40, M0 to M11 1ss	1	8	-56.9		0.33	-48.6	-27	21.57
HE40, M0 to M11 1ss	2	8	-56.9	-55.7	0.33	-44.9	-27	17.92
HE40, M0 to M11 2ss	2	8	-56.9	-55.7	0.33	-44.9	-27	17.92
HE40 Beam Forming, M0 to M11 1ss	2	11	-56.9	-55.7	0.33	-41.9	-27	14.92
HE40 Beam Forming, M0 to M11 2ss	2	8	-56.9	-55.7	0.33	-44.9	-27	17.92
HE40 STBC, M0 to M11 2ss	2	8	-56.9	-55.7	0.33	-44.9	-27	17.92

Frequency 5825 MHz


Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	8	-56.3		0.48	-47.8	-27	20.82
Non HT20, 6 to 54 Mbps	2	8	-56.3	-55.4	0.48	-44.3	-27	17.34
Non HT20 Beam Forming, 6 to 54 Mbps	2	11	-56.3	-55.4	0.48	-41.3	-27	14.34
HT/VHT20, M0 to M7	1	8	-55.9		0.36	-47.5	-27	20.54
HT/VHT20, M0 to M7	2	8	-55.9	-55.2	0.36	-44.2	-27	17.16
HT/VHT20, M8 to M15	2	8	-55.9	-55.2	0.36	-44.2	-27	17.16
HT/VHT20 Beam Forming, M0 to M7	2	11	-55.9	-55.2	0.36	-41.2	-27	14.16
HT/VHT20 Beam Forming, M8 to M15	2	8	-55.9	-55.2	0.36	-44.2	-27	17.16
HT/VHT20 STBC, M8 to M15	2	8	-55.9	-55.2	0.36	-44.2	-27	17.16
HE20, M0 to M11 1ss	1	8	-55.6		0.3	-47.3	-27	20.3
HE20, M0 to M11 1ss	2	8	-55.6	-55.5	0.3	-44.2	-27	17.24
HE20, M0 to M11 2ss	2	8	-55.6	-55.5	0.3	-44.2	-27	17.24
HE20 Beam Forming, M0 to M11 1ss	2	11	-55.6	-55.5	0.3	-41.2	-27	14.24
HE20 Beam Forming, M0 to M11 2ss	2	8	-55.6	-55.5	0.3	-44.2	-27	17.24
HE20 STBC, M0 to M11 2ss	2	8	-55.6	-55.5	0.3	-44.2	-27	17.24

Data Screenshots – Antenna gain 8dBi Peak.

5745 MHz: HT/VHT20 Beam Forming, M0 to M7

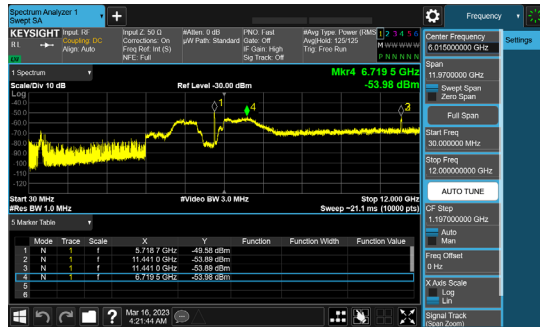


Antenna A

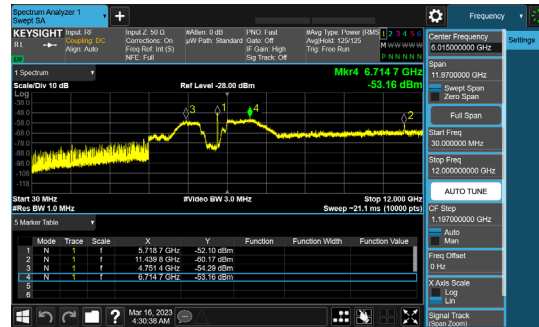


Antenna B

5745 MHz: HE20 Beam Forming, M0 to M11 1ss

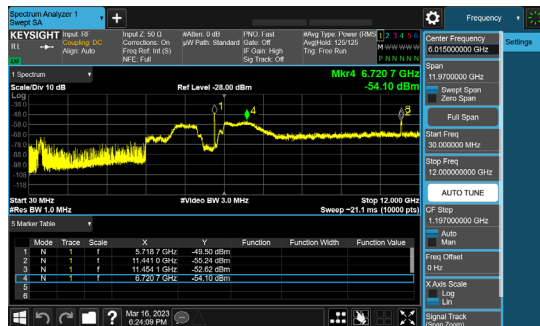


Antenna A

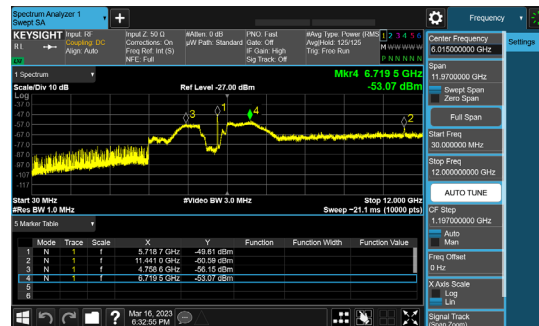


Antenna B

5745 MHz: Non HT20 Beam Forming, 6 to 54 Mbps

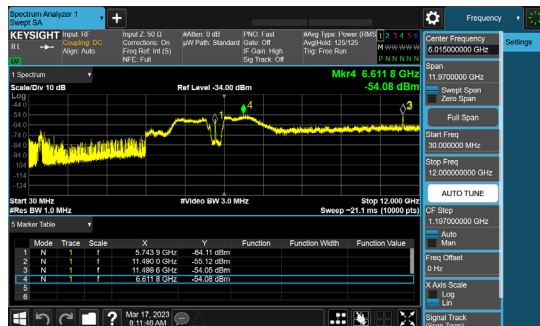

Antenna A

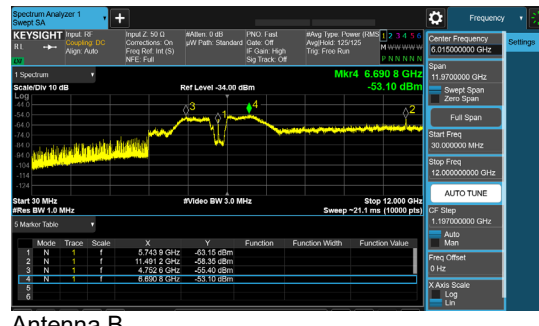

Antenna B

Conducted Spurs Average – Antenna gain 8dBi.**Frequency 5745 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	10	-63.0		0.48	-52.5	-41	11.27
Non HT20, 6 to 54 Mbps	2	10	-63.0	-61.6	0.48	-48.8	-41	7.5
Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-63.0	-61.6	0.48	-48.8	-41	7.5
HT/VHT20, M0 to M7	1	10	-63.0		0.36	-52.6	-41	11.39
HT/VHT20, M0 to M7	2	10	-63.0	-61.8	0.36	-49.0	-41	7.74
HT/VHT20, M8 to M15	2	10	-63.0	-61.8	0.36	-49.0	-41	7.74
HT/VHT20 Beam Forming, M0 to M7	2	10	-63.0	-61.8	0.36	-49.0	-41	7.74
HT/VHT20 Beam Forming, M8 to M15	2	10	-63.0	-61.8	0.36	-49.0	-41	7.74
HT/VHT20 STBC, M8 to M15	2	10	-63.0	-61.8	0.36	-49.0	-41	7.74
HE20, M0 to M11 1ss	1	10	-62.7		0.3	-52.4	-41	11.15
HE20, M0 to M11 1ss	2	10	-62.7	-61.5	0.3	-48.8	-41	7.5
HE20, M0 to M11 2ss	2	10	-62.7	-61.5	0.3	-48.8	-41	7.5
HE20 Beam Forming, M0 to M11 1ss	2	10	-62.7	-61.5	0.3	-48.8	-41	7.5
HE20 Beam Forming, M0 to M11 2ss	2	10	-62.7	-61.5	0.3	-48.8	-41	7.5
HE20 STBC, M0 to M11 2ss	2	10	-62.7	-61.5	0.3	-48.8	-41	7.5

Frequency 5755 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	10	-63.0		0.41	-52.6	-41	11.34
Non HT40, 6 to 54 Mbps	2	10	-63.0	-61.8	0.41	-48.9	-41	7.69
HT/VHT40, M0 to M7	1	10	-64.2		0.58	-53.6	-41	12.37
HT/VHT40, M0 to M7	2	10	-64.2	-61.4	0.58	-49.0	-41	7.73
HT/VHT40, M8 to M15	2	10	-64.2	-61.4	0.58	-49.0	-41	7.73
HT/VHT40 Beam Forming, M0 to M7	2	10	-64.2	-61.4	0.58	-49.0	-41	7.73
HT/VHT40 Beam Forming, M8 to M15	2	10	-64.2	-61.4	0.58	-49.0	-41	7.73
HT/VHT40 STBC, M8 to M15	2	10	-64.2	-61.4	0.58	-49.0	-41	7.73
HE40, M0 to M11 1ss	1	10	-62.7		0.33	-52.4	-41	11.12
HE40, M0 to M11 1ss	2	10	-62.7	-61.5	0.33	-48.7	-41	7.47
HE40, M0 to M11 2ss	2	10	-62.7	-61.5	0.33	-48.7	-41	7.47
HE40 Beam Forming, M0 to M11 1ss	2	10	-62.7	-61.5	0.33	-48.7	-41	7.47
HE40 Beam Forming, M0 to M11 2ss	2	10	-62.7	-61.5	0.33	-48.7	-41	7.47
HE40 STBC, M0 to M11 2ss	2	10	-62.7	-61.5	0.33	-48.7	-41	7.47

Frequency 5775 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	10	-64.3		0.38	-53.9	-41	12.67
Non HT80, 6 to 54 Mbps	2	10	-64.3	-64.9	0.38	-51.2	-41	9.95
VHT80, M0 to M11 1ss	1	10	-65.0		0.44	-54.6	-41	13.31
VHT80, M0 to M11 1ss	2	10	-65.0	-65.2	0.44	-51.6	-41	10.39
VHT80, M0 to M11 2ss	2	10	-65.0	-65.2	0.44	-51.6	-41	10.39
VHT80 Beam Forming, M0 to M11 1ss	2	10	-65.0	-65.2	0.44	-51.6	-41	10.39
VHT80 Beam Forming, M0 to M11 2ss	2	10	-65.0	-65.2	0.44	-51.6	-41	10.39
VHT80 STBC, M0 to M11 2ss	2	10	-65.0	-65.2	0.44	-51.6	-41	10.39
HE80, M0 to M11 1ss	1	10	-64.4		0.33	-54.1	-41	12.82
HE80, M0 to M11 1ss	2	10	-64.4	-64.9	0.33	-51.3	-41	10.05
HE80, M0 to M11 2ss	2	10	-64.4	-64.9	0.33	-51.3	-41	10.05
HE80 Beam Forming, M0 to M11 1ss	2	10	-64.4	-64.9	0.33	-51.3	-41	10.05
HE80 Beam Forming, M0 to M11 2ss	2	10	-64.4	-64.9	0.33	-51.3	-41	10.05
HE80 STBC, M0 to M11 2ss	2	10	-64.4	-64.9	0.33	-51.3	-41	10.05

Frequency 5785 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	10	-63.2		0.48	-52.7	-41	11.47
Non HT20, 6 to 54 Mbps	2	10	-63.2	-62.0	0.48	-49.1	-41	7.82
Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-63.2	-62.0	0.48	-49.1	-41	7.82
HT/VHT20, M0 to M7	1	10	-63.3		0.36	-52.9	-41	11.69
HT/VHT20, M0 to M7	2	10	-63.3	-61.7	0.36	-49.1	-41	7.81
HT/VHT20, M8 to M15	2	10	-63.3	-61.7	0.36	-49.1	-41	7.81
HT/VHT20 Beam Forming, M0 to M7	2	10	-63.3	-61.7	0.36	-49.1	-41	7.81
HT/VHT20 Beam Forming, M8 to M15	2	10	-63.3	-61.7	0.36	-49.1	-41	7.81
HT/VHT20 STBC, M8 to M15	2	10	-63.3	-61.7	0.36	-49.1	-41	7.81
HE20, M0 to M11 1ss	1	10	-64.5		0.3	-54.2	-41	12.95
HE20, M0 to M11 1ss	2	10	-64.5	-62.9	0.3	-50.3	-41	9.07
HE20, M0 to M11 2ss	2	10	-64.5	-62.9	0.3	-50.3	-41	9.07
HE20 Beam Forming, M0 to M11 1ss	2	10	-64.5	-62.9	0.3	-50.3	-41	9.07
HE20 Beam Forming, M0 to M11 2ss	2	10	-64.5	-62.9	0.3	-50.3	-41	9.07
HE20 STBC, M0 to M11 2ss	2	10	-64.5	-62.9	0.3	-50.3	-41	9.07

Frequency 5795 MHz


Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	10	-63.4		0.41	-53.0	-41	11.74
Non HT40, 6 to 54 Mbps	2	10	-63.4	-62.2	0.41	-49.3	-41	8.09
HT/VHT40, M0 to M7	1	10	-63.6		0.58	-53.0	-41	11.77
HT/VHT40, M0 to M7	2	10	-63.6	-62.3	0.58	-49.3	-41	8.06
HT/VHT40, M8 to M15	2	10	-63.6	-62.3	0.58	-49.3	-41	8.06
HT/VHT40 Beam Forming, M0 to M7	2	10	-63.6	-62.3	0.58	-49.3	-41	8.06
HT/VHT40 Beam Forming, M8 to M15	2	10	-63.6	-62.3	0.58	-49.3	-41	8.06
HT/VHT40 STBC, M8 to M15	2	10	-63.6	-62.3	0.58	-49.3	-41	8.06
HE40, M0 to M11 1ss	1	10	-63.4		0.33	-53.1	-41	11.82
HE40, M0 to M11 1ss	2	10	-63.4	-62.6	0.33	-49.6	-41	8.39
HE40, M0 to M11 2ss	2	10	-63.4	-62.6	0.33	-49.6	-41	8.39
HE40 Beam Forming, M0 to M11 1ss	2	10	-63.4	-62.6	0.33	-49.6	-41	8.39
HE40 Beam Forming, M0 to M11 2ss	2	10	-63.4	-62.6	0.33	-49.6	-41	8.39
HE40 STBC, M0 to M11 2ss	2	10	-63.4	-62.6	0.33	-49.6	-41	8.39

Frequency 5825 MHz


Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	10	-63.6		0.48	-53.1	-41	11.87
Non HT20, 6 to 54 Mbps	2	10	-63.6	-62.7	0.48	-49.6	-41	8.39
Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-63.6	-62.7	0.48	-49.6	-41	8.39
HT/VHT20, M0 to M7	1	10	-64.5		0.36	-54.1	-41	12.89
HT/VHT20, M0 to M7	2	10	-64.5	-62.8	0.36	-50.2	-41	8.95
HT/VHT20, M8 to M15	2	10	-64.5	-62.8	0.36	-50.2	-41	8.95
HT/VHT20 Beam Forming, M0 to M7	2	10	-64.5	-62.8	0.36	-50.2	-41	8.95
HT/VHT20 Beam Forming, M8 to M15	2	10	-64.5	-62.8	0.36	-50.2	-41	8.95
HT/VHT20 STBC, M8 to M15	2	10	-64.5	-62.8	0.36	-50.2	-41	8.95
HE20, M0 to M11 1ss	1	10	-64.1		0.3	-53.8	-41	12.55
HE20, M0 to M11 1ss	2	10	-64.1	-63.2	0.3	-50.3	-41	9.07
HE20, M0 to M11 2ss	2	10	-64.1	-63.2	0.3	-50.3	-41	9.07
HE20 Beam Forming, M0 to M11 1ss	2	10	-64.1	-63.2	0.3	-50.3	-41	9.07
HE20 Beam Forming, M0 to M11 2ss	2	10	-64.1	-63.2	0.3	-50.3	-41	9.07
HE20 STBC, M0 to M11 2ss	2	10	-64.1	-63.2	0.3	-50.3	-41	9.07

Data Screenshots – Antenna gain 10dBi Average

5745 MHz: HT/VHT40, M0 to M7

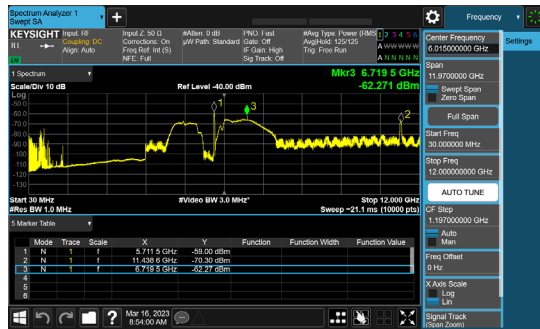


Antenna A

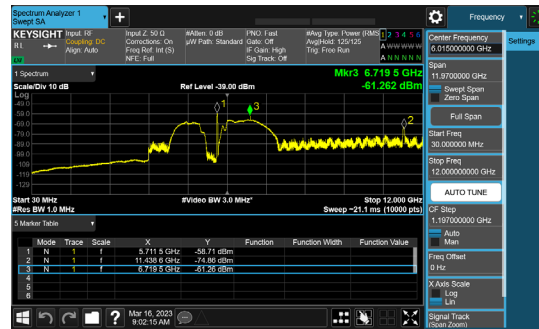


Antenna B

5745 MHz: HT/VHT40, M8 to M15

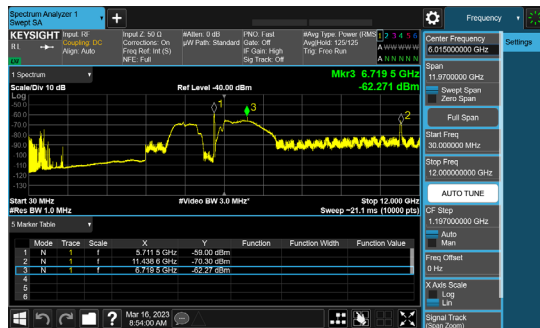


Antenna A

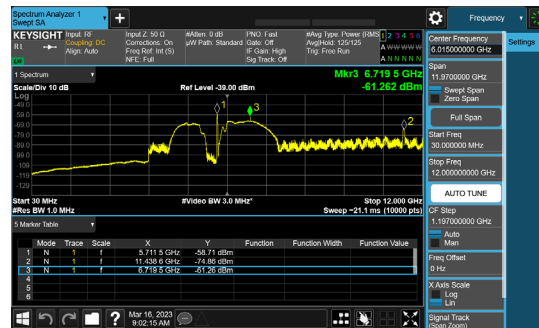


Antenna B

5745 MHz: HT/VHT40 Beam Forming, M0 to M7

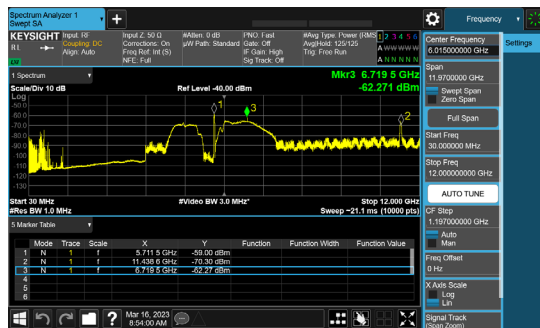

Antenna A

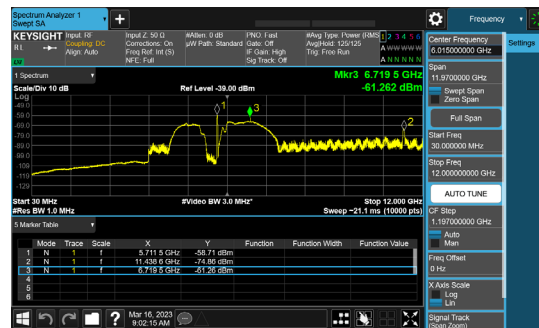

Antenna B

Conducted Spurs Peak – Antenna gain 10dBi.**Frequency 5745 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	10	-53.9		0.48	-43.4	-27	16.42
Non HT20, 6 to 54 Mbps	2	10	-53.9	-55.4	0.48	-41.1	-27	14.09
Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-53.9	-55.4	0.48	-41.1	-27	14.09
HT/VHT20, M0 to M7	1	10	-55.3		0.36	-44.9	-27	17.94
HT/VHT20, M0 to M7	2	10	-55.3	-55.5	0.36	-42.0	-27	15.03
HT/VHT20, M8 to M15	2	10	-55.3	-55.5	0.36	-42.0	-27	15.03
HT/VHT20 Beam Forming, M0 to M7	2	10	-55.3	-55.5	0.36	-42.0	-27	15.03
HT/VHT20 Beam Forming, M8 to M15	2	10	-55.3	-55.5	0.36	-42.0	-27	15.03
HT/VHT20 STBC, M8 to M15	2	10	-55.3	-55.5	0.36	-42.0	-27	15.03
HE20, M0 to M11 1ss	1	10	-54.1		0.3	-43.8	-27	16.8
HE20, M0 to M11 1ss	2	10	-54.1	-56.2	0.3	-41.7	-27	14.72
HE20, M0 to M11 2ss	2	10	-54.1	-56.2	0.3	-41.7	-27	14.72
HE20 Beam Forming, M0 to M11 1ss	2	10	-54.1	-56.2	0.3	-41.7	-27	14.72
HE20 Beam Forming, M0 to M11 2ss	2	10	-54.1	-56.2	0.3	-41.7	-27	14.72
HE20 STBC, M0 to M11 2ss	2	10	-54.1	-56.2	0.3	-41.7	-27	14.72

Frequency 5755 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	10	-54.4		0.41	-44.0	-27	16.99
Non HT40, 6 to 54 Mbps	2	10	-54.4	-56.1	0.41	-41.7	-27	14.75
HT/VHT40, M0 to M7	1	10	-56.7		0.58	-46.1	-27	19.12
HT/VHT40, M0 to M7	2	10	-56.7	-56.3	0.58	-42.9	-27	15.9
HT/VHT40, M8 to M15	2	10	-56.7	-56.3	0.58	-42.9	-27	15.9
HT/VHT40 Beam Forming, M0 to M7	2	10	-56.7	-56.3	0.58	-42.9	-27	15.9
HT/VHT40 Beam Forming, M8 to M15	2	10	-56.7	-56.3	0.58	-42.9	-27	15.9
HT/VHT40 STBC, M8 to M15	2	10	-56.7	-56.3	0.58	-42.9	-27	15.9
HE40, M0 to M11 1ss	1	10	-56.2		0.33	-45.9	-27	18.87
HE40, M0 to M11 1ss	2	10	-56.2	-56.9	0.33	-43.2	-27	16.2
HE40, M0 to M11 2ss	2	10	-56.2	-56.9	0.33	-43.2	-27	16.2
HE40 Beam Forming, M0 to M11 1ss	2	10	-56.2	-56.9	0.33	-43.2	-27	16.2
HE40 Beam Forming, M0 to M11 2ss	2	10	-56.2	-56.9	0.33	-43.2	-27	16.2
HE40 STBC, M0 to M11 2ss	2	10	-56.2	-56.9	0.33	-43.2	-27	16.2

Frequency 5775 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	10	-55.6		0.38	-45.2	-27	18.22
Non HT80, 6 to 54 Mbps	2	10	-55.6	-55.7	0.38	-42.3	-27	15.26
VHT80, M0 to M11 1ss	1	10	-57.1		0.44	-46.7	-27	19.66
VHT80, M0 to M11 1ss	2	10	-57.1	-56.3	0.44	-43.2	-27	16.23
VHT80, M0 to M11 2ss	2	10	-57.1	-56.3	0.44	-43.2	-27	16.23
VHT80 Beam Forming, M0 to M11 1ss	2	10	-57.1	-56.3	0.44	-43.2	-27	16.23
VHT80 Beam Forming, M0 to M11 2ss	2	10	-57.1	-56.3	0.44	-43.2	-27	16.23
VHT80 STBC, M0 to M11 2ss	2	10	-57.1	-56.3	0.44	-43.2	-27	16.23
HE80, M0 to M11 1ss	1	10	-57.9		0.33	-47.6	-27	20.57
HE80, M0 to M11 1ss	2	10	-57.9	-56.2	0.33	-43.6	-27	16.63
HE80, M0 to M11 2ss	2	10	-57.9	-56.2	0.33	-43.6	-27	16.63
HE80 Beam Forming, M0 to M11 1ss	2	10	-57.9	-56.2	0.33	-43.6	-27	16.63
HE80 Beam Forming, M0 to M11 2ss	2	10	-57.9	-56.2	0.33	-43.6	-27	16.63
HE80 STBC, M0 to M11 2ss	2	10	-57.9	-56.2	0.33	-43.6	-27	16.63

Frequency 5785 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	10	-54.0		0.48	-43.5	-27	16.52
Non HT20, 6 to 54 Mbps	2	10	-54.0	-55.8	0.48	-41.3	-27	14.32
Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-54.0	-55.8	0.48	-41.3	-27	14.32
HT/VHT20, M0 to M7	1	10	-55.3		0.36	-44.9	-27	17.94
HT/VHT20, M0 to M7	2	10	-55.3	-56.5	0.36	-42.5	-27	15.49
HT/VHT20, M8 to M15	2	10	-55.3	-56.5	0.36	-42.5	-27	15.49
HT/VHT20 Beam Forming, M0 to M7	2	10	-55.3	-56.5	0.36	-42.5	-27	15.49
HT/VHT20 Beam Forming, M8 to M15	2	10	-55.3	-56.5	0.36	-42.5	-27	15.49
HT/VHT20 STBC, M8 to M15	2	10	-55.3	-56.5	0.36	-42.5	-27	15.49
HE20, M0 to M11 1ss	1	10	-54.7		0.3	-44.4	-27	17.4
HE20, M0 to M11 1ss	2	10	-54.7	-55.2	0.3	-41.6	-27	14.64
HE20, M0 to M11 2ss	2	10	-54.7	-55.2	0.3	-41.6	-27	14.64
HE20 Beam Forming, M0 to M11 1ss	2	10	-54.7	-55.2	0.3	-41.6	-27	14.64
HE20 Beam Forming, M0 to M11 2ss	2	10	-54.7	-55.2	0.3	-41.6	-27	14.64
HE20 STBC, M0 to M11 2ss	2	10	-54.7	-55.2	0.3	-41.6	-27	14.64

Frequency 5795 MHz



Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	10	-55.7		0.41	-45.3	-27	18.29
Non HT40, 6 to 54 Mbps	2	10	-55.7	-55.4	0.41	-42.1	-27	15.13
HT/VHT40, M0 to M7	1	10	-56.4		0.58	-45.8	-27	18.82
HT/VHT40, M0 to M7	2	10	-56.4	-56.9	0.58	-43.0	-27	16.05
HT/VHT40, M8 to M15	2	10	-56.4	-56.9	0.58	-43.0	-27	16.05
HT/VHT40 Beam Forming, M0 to M7	2	10	-56.4	-56.9	0.58	-43.0	-27	16.05
HT/VHT40 Beam Forming, M8 to M15	2	10	-56.4	-56.9	0.58	-43.0	-27	16.05
HT/VHT40 STBC, M8 to M15	2	10	-56.4	-56.9	0.58	-43.0	-27	16.05
HE40, M0 to M11 1ss	1	10	-56.9		0.33	-46.6	-27	19.57
HE40, M0 to M11 1ss	2	10	-56.9	-55.7	0.33	-42.9	-27	15.92
HE40, M0 to M11 2ss	2	10	-56.9	-55.7	0.33	-42.9	-27	15.92
HE40 Beam Forming, M0 to M11 1ss	2	10	-56.9	-55.7	0.33	-42.9	-27	15.92
HE40 Beam Forming, M0 to M11 2ss	2	10	-56.9	-55.7	0.33	-42.9	-27	15.92
HE40 STBC, M0 to M11 2ss	2	10	-56.9	-55.7	0.33	-42.9	-27	15.92

Frequency 5825 MHz



Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	10	-56.3		0.48	-45.8	-27	18.82
Non HT20, 6 to 54 Mbps	2	10	-56.3	-55.4	0.48	-42.3	-27	15.34
Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-56.3	-55.4	0.48	-42.3	-27	15.34
HT/VHT20, M0 to M7	1	10	-55.9		0.36	-45.5	-27	18.54
HT/VHT20, M0 to M7	2	10	-55.9	-55.2	0.36	-42.2	-27	15.16
HT/VHT20, M8 to M15	2	10	-55.9	-55.2	0.36	-42.2	-27	15.16
HT/VHT20 Beam Forming, M0 to M7	2	10	-55.9	-55.2	0.36	-42.2	-27	15.16
HT/VHT20 Beam Forming, M8 to M15	2	10	-55.9	-55.2	0.36	-42.2	-27	15.16
HT/VHT20 STBC, M8 to M15	2	10	-55.9	-55.2	0.36	-42.2	-27	15.16
HE20, M0 to M11 1ss	1	10	-55.6		0.3	-45.3	-27	18.3
HE20, M0 to M11 1ss	2	10	-55.6	-55.5	0.3	-42.2	-27	15.24
HE20, M0 to M11 2ss	2	10	-55.6	-55.5	0.3	-42.2	-27	15.24
HE20 Beam Forming, M0 to M11 1ss	2	10	-55.6	-55.5	0.3	-42.2	-27	15.24
HE20 Beam Forming, M0 to M11 2ss	2	10	-55.6	-55.5	0.3	-42.2	-27	15.24
HE20 STBC, M0 to M11 2ss	2	10	-55.6	-55.5	0.3	-42.2	-27	15.24

Data Screenshots – Antenna gain 10dBi Peak



5745 MHz: HT/VHT20, M0 to M7

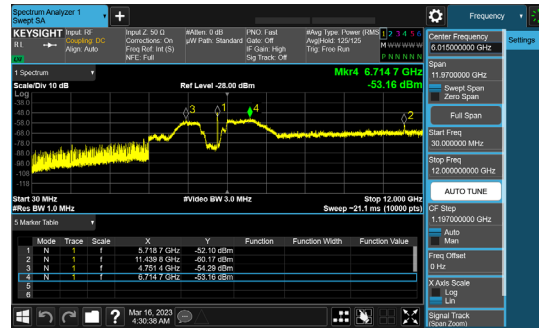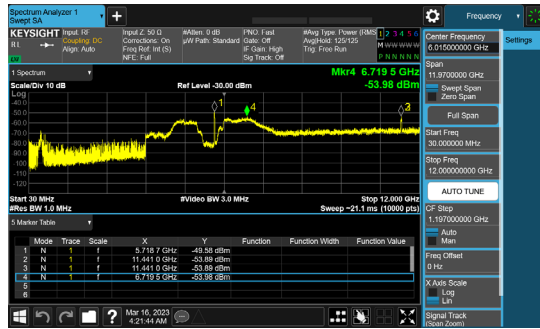

5745 MHz: HT/VHT20, M8 to M15

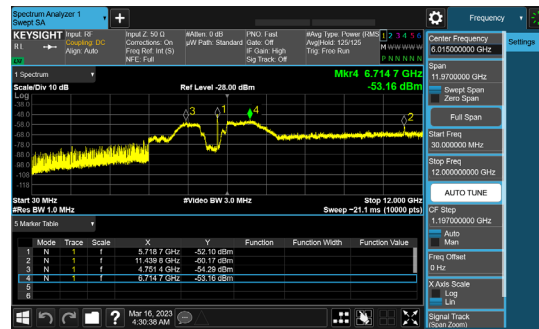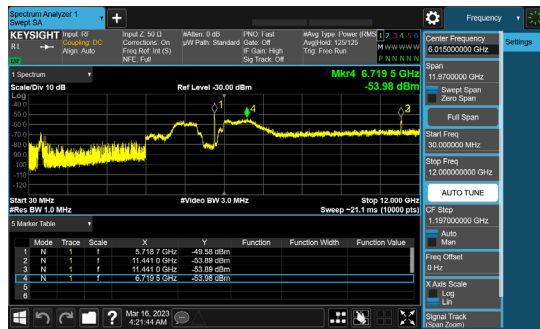

5745 MHz: HT/VHT20 Beam Forming, M0 to M7

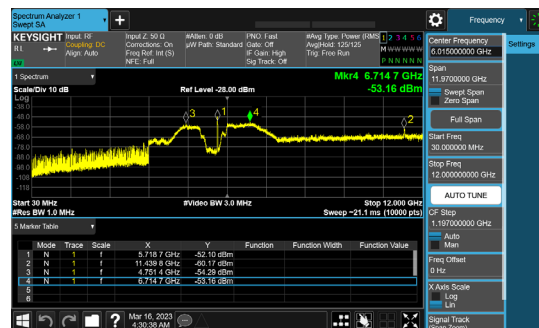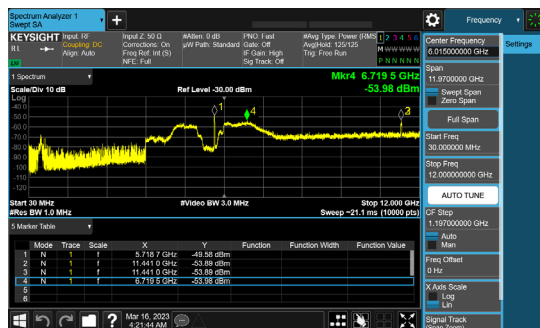

Conducted Spurs Average – Antenna gain 13dBi,**Frequency 5745 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-63.0		0.48	-49.5	-41	8.27
Non HT20, 6 to 54 Mbps	2	13	-63.0	-61.6	0.48	-45.8	-41	4.5
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-63.0	-61.6	0.48	-45.8	-41	4.5
HT/VHT20, M0 to M7	1	13	-63.0		0.36	-49.6	-41	8.39
HT/VHT20, M0 to M7	2	13	-63.0	-61.8	0.36	-46.0	-41	4.74
HT/VHT20, M8 to M15	2	13	-63.0	-61.8	0.36	-46.0	-41	4.74
HT/VHT20 Beam Forming, M0 to M7	2	13	-63.0	-61.8	0.36	-46.0	-41	4.74
HT/VHT20 Beam Forming, M8 to M15	2	13	-63.0	-61.8	0.36	-46.0	-41	4.74
HT/VHT20 STBC, M8 to M15	2	13	-63.0	-61.8	0.36	-46.0	-41	4.74
HE20, M0 to M11 1ss	1	13	-62.7		0.3	-49.4	-41	8.15
HE20, M0 to M11 1ss	2	13	-62.7	-61.5	0.3	-45.8	-41	4.5
HE20, M0 to M11 2ss	2	13	-62.7	-61.5	0.3	-45.8	-41	4.5
HE20 Beam Forming, M0 to M11 1ss	2	13	-62.7	-61.5	0.3	-45.8	-41	4.5
HE20 Beam Forming, M0 to M11 2ss	2	13	-62.7	-61.5	0.3	-45.8	-41	4.5
HE20 STBC, M0 to M11 2ss	2	13	-62.7	-61.5	0.3	-45.8	-41	4.5

Frequency 5755 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	13	-63.0		0.41	-49.6	-41	8.34
Non HT40, 6 to 54 Mbps	2	13	-63.0	-61.8	0.41	-45.9	-41	4.69
HT/VHT40, M0 to M7	1	13	-64.2		0.58	-50.6	-41	9.37
HT/VHT40, M0 to M7	2	13	-64.2	-61.4	0.58	-46.0	-41	4.73
HT/VHT40, M8 to M15	2	13	-64.2	-61.4	0.58	-46.0	-41	4.73
HT/VHT40 Beam Forming, M0 to M7	2	13	-64.2	-61.4	0.58	-46.0	-41	4.73
HT/VHT40 Beam Forming, M8 to M15	2	13	-64.2	-61.4	0.58	-46.0	-41	4.73
HT/VHT40 STBC, M8 to M15	2	13	-64.2	-61.4	0.58	-46.0	-41	4.73
HE40, M0 to M11 1ss	1	13	-62.7		0.33	-49.4	-41	8.12
HE40, M0 to M11 1ss	2	13	-62.7	-61.5	0.33	-45.7	-41	4.47
HE40, M0 to M11 2ss	2	13	-62.7	-61.5	0.33	-45.7	-41	4.47
HE40 Beam Forming, M0 to M11 1ss	2	13	-62.7	-61.5	0.33	-45.7	-41	4.47
HE40 Beam Forming, M0 to M11 2ss	2	13	-62.7	-61.5	0.33	-45.7	-41	4.47
HE40 STBC, M0 to M11 2ss	2	13	-62.7	-61.5	0.33	-45.7	-41	4.47

Frequency 5775 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	13	-64.3		0.38	-50.9	-41	9.67
Non HT80, 6 to 54 Mbps	2	13	-64.3	-64.9	0.38	-48.2	-41	6.95
VHT80, M0 to M11 1ss	1	13	-65.0		0.44	-51.6	-41	10.31
VHT80, M0 to M11 1ss	2	13	-65.0	-65.2	0.44	-48.6	-41	7.39
VHT80, M0 to M11 2ss	2	13	-65.0	-65.2	0.44	-48.6	-41	7.39
VHT80 Beam Forming, M0 to M11 1ss	2	13	-65.0	-65.2	0.44	-48.6	-41	7.39
VHT80 Beam Forming, M0 to M11 2ss	2	13	-65.0	-65.2	0.44	-48.6	-41	7.39
VHT80 STBC, M0 to M11 2ss	2	13	-65.0	-65.2	0.44	-48.6	-41	7.39
HE80, M0 to M11 1ss	1	13	-64.4		0.33	-51.1	-41	9.82
HE80, M0 to M11 1ss	2	13	-64.4	-64.9	0.33	-48.3	-41	7.05
HE80, M0 to M11 2ss	2	13	-64.4	-64.9	0.33	-48.3	-41	7.05
HE80 Beam Forming, M0 to M11 1ss	2	13	-64.4	-64.9	0.33	-48.3	-41	7.05
HE80 Beam Forming, M0 to M11 2ss	2	13	-64.4	-64.9	0.33	-48.3	-41	7.05
HE80 STBC, M0 to M11 2ss	2	13	-64.4	-64.9	0.33	-48.3	-41	7.05

Frequency 5785 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-63.2		0.48	-49.7	-41	8.47
Non HT20, 6 to 54 Mbps	2	13	-63.2	-62.0	0.48	-46.1	-41	4.82
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-63.2	-62.0	0.48	-46.1	-41	4.82
HT/VHT20, M0 to M7	1	13	-63.3		0.36	-49.9	-41	8.69
HT/VHT20, M0 to M7	2	13	-63.3	-61.7	0.36	-46.1	-41	4.81
HT/VHT20, M8 to M15	2	13	-63.3	-61.7	0.36	-46.1	-41	4.81
HT/VHT20 Beam Forming, M0 to M7	2	13	-63.3	-61.7	0.36	-46.1	-41	4.81
HT/VHT20 Beam Forming, M8 to M15	2	13	-63.3	-61.7	0.36	-46.1	-41	4.81
HT/VHT20 STBC, M8 to M15	2	13	-63.3	-61.7	0.36	-46.1	-41	4.81
HE20, M0 to M11 1ss	1	13	-64.5		0.3	-51.2	-41	9.95
HE20, M0 to M11 1ss	2	13	-64.5	-62.9	0.3	-47.3	-41	6.07
HE20, M0 to M11 2ss	2	13	-64.5	-62.9	0.3	-47.3	-41	6.07
HE20 Beam Forming, M0 to M11 1ss	2	13	-64.5	-62.9	0.3	-47.3	-41	6.07
HE20 Beam Forming, M0 to M11 2ss	2	13	-64.5	-62.9	0.3	-47.3	-41	6.07
HE20 STBC, M0 to M11 2ss	2	13	-64.5	-62.9	0.3	-47.3	-41	6.07

Frequency 5795 MHz



Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	13	-63.4		0.41	-50.0	-41	8.74
Non HT40, 6 to 54 Mbps	2	13	-63.4	-62.2	0.41	-46.3	-41	5.09
HT/VHT40, M0 to M7	1	13	-63.6		0.58	-50.0	-41	8.77
HT/VHT40, M0 to M7	2	13	-63.6	-62.3	0.58	-46.3	-41	5.06
HT/VHT40, M8 to M15	2	13	-63.6	-62.3	0.58	-46.3	-41	5.06
HT/VHT40 Beam Forming, M0 to M7	2	13	-63.6	-62.3	0.58	-46.3	-41	5.06
HT/VHT40 Beam Forming, M8 to M15	2	13	-63.6	-62.3	0.58	-46.3	-41	5.06
HT/VHT40 STBC, M8 to M15	2	13	-63.6	-62.3	0.58	-46.3	-41	5.06
HE40, M0 to M11 1ss	1	13	-63.4		0.33	-50.1	-41	8.82
HE40, M0 to M11 1ss	2	13	-63.4	-62.6	0.33	-46.6	-41	5.39
HE40, M0 to M11 2ss	2	13	-63.4	-62.6	0.33	-46.6	-41	5.39
HE40 Beam Forming, M0 to M11 1ss	2	13	-63.4	-62.6	0.33	-46.6	-41	5.39
HE40 Beam Forming, M0 to M11 2ss	2	13	-63.4	-62.6	0.33	-46.6	-41	5.39
HE40 STBC, M0 to M11 2ss	2	13	-63.4	-62.6	0.33	-46.6	-41	5.39

Frequency 5825 MHz



Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-63.6		0.48	-50.1	-41	8.87
Non HT20, 6 to 54 Mbps	2	13	-63.6	-62.7	0.48	-46.6	-41	5.39
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-63.6	-62.7	0.48	-46.6	-41	5.39
HT/VHT20, M0 to M7	1	13	-64.5		0.36	-51.1	-41	9.89
HT/VHT20, M0 to M7	2	13	-64.5	-62.8	0.36	-47.2	-41	5.95
HT/VHT20, M8 to M15	2	13	-64.5	-62.8	0.36	-47.2	-41	5.95
HT/VHT20 Beam Forming, M0 to M7	2	13	-64.5	-62.8	0.36	-47.2	-41	5.95
HT/VHT20 Beam Forming, M8 to M15	2	13	-64.5	-62.8	0.36	-47.2	-41	5.95
HT/VHT20 STBC, M8 to M15	2	13	-64.5	-62.8	0.36	-47.2	-41	5.95
HE20, M0 to M11 1ss	1	13	-64.1		0.3	-50.8	-41	9.55
HE20, M0 to M11 1ss	2	13	-64.1	-63.2	0.3	-47.3	-41	6.07
HE20, M0 to M11 2ss	2	13	-64.1	-63.2	0.3	-47.3	-41	6.07
HE20 Beam Forming, M0 to M11 1ss	2	13	-64.1	-63.2	0.3	-47.3	-41	6.07
HE20 Beam Forming, M0 to M11 2ss	2	13	-64.1	-63.2	0.3	-47.3	-41	6.07
HE20 STBC, M0 to M11 2ss	2	13	-64.1	-63.2	0.3	-47.3	-41	6.07

Data Screenshots – Antenna gain 13dBi Average



5825 MHz: HT/VHT40, M0 to M7

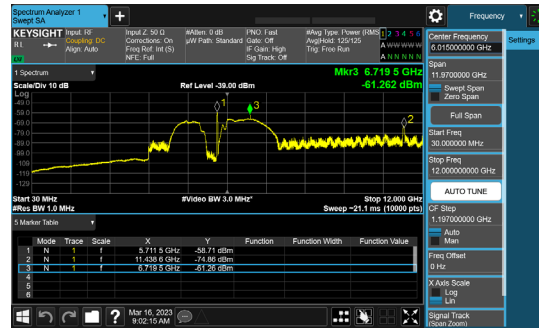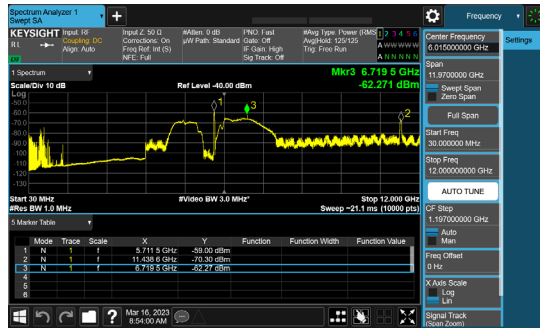

5745 MHz: HT/VHT40, M8 to M15

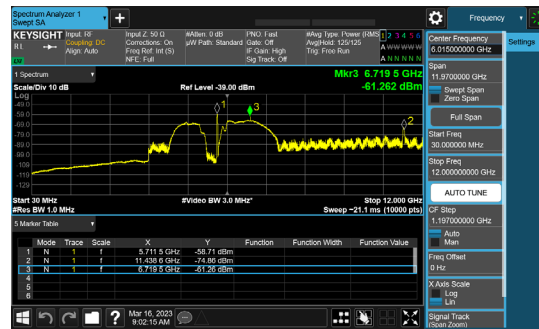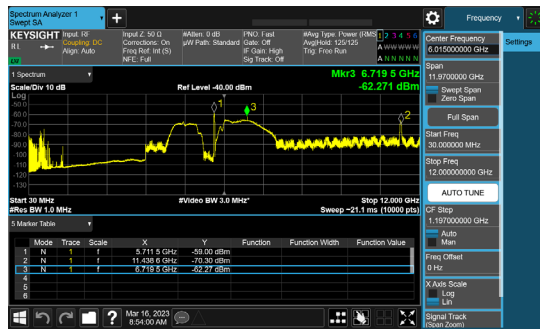

5745 MHz: HT/VHT40 Beam Forming, M0 to M7

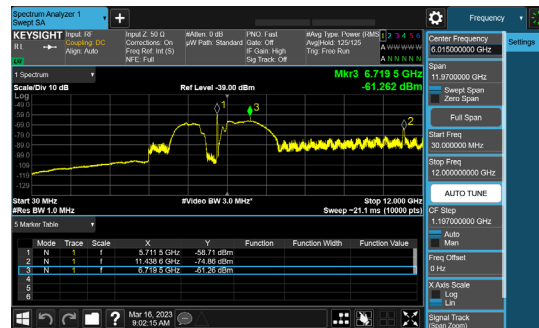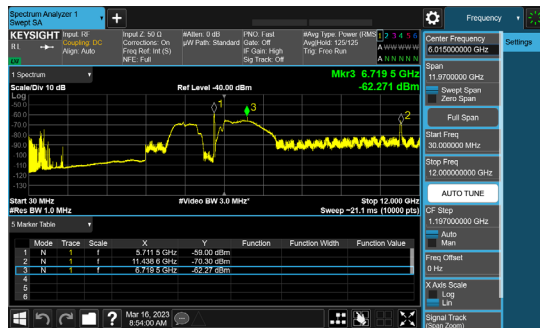

Conducted Spurs Peak – Antenna gain 13dBi .**Frequency 5745 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-53.9		0.48	-40.4	-27	13.42
Non HT20, 6 to 54 Mbps	2	13	-53.9	-55.4	0.48	-38.1	-27	11.09
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-53.9	-55.4	0.48	-38.1	-27	11.09
HT/VHT20, M0 to M7	1	13	-55.3		0.36	-41.9	-27	14.94
HT/VHT20, M0 to M7	2	13	-55.3	-55.5	0.36	-39.0	-27	12.03
HT/VHT20, M8 to M15	2	13	-55.3	-55.5	0.36	-39.0	-27	12.03
HT/VHT20 Beam Forming, M0 to M7	2	13	-55.3	-55.5	0.36	-39.0	-27	12.03
HT/VHT20 Beam Forming, M8 to M15	2	13	-55.3	-55.5	0.36	-39.0	-27	12.03
HT/VHT20 STBC, M8 to M15	2	13	-55.3	-55.5	0.36	-39.0	-27	12.03
HE20, M0 to M11 1ss	1	13	-54.1		0.3	-40.8	-27	13.8
HE20, M0 to M11 1ss	2	13	-54.1	-56.2	0.3	-38.7	-27	11.72
HE20, M0 to M11 2ss	2	13	-54.1	-56.2	0.3	-38.7	-27	11.72
HE20 Beam Forming, M0 to M11 1ss	2	13	-54.1	-56.2	0.3	-38.7	-27	11.72
HE20 Beam Forming, M0 to M11 2ss	2	13	-54.1	-56.2	0.3	-38.7	-27	11.72
HE20 STBC, M0 to M11 2ss	2	13	-54.1	-56.2	0.3	-38.7	-27	11.72

Frequency 5755 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	13	-54.4		0.41	-41.0	-27	13.99
Non HT40, 6 to 54 Mbps	2	13	-54.4	-56.1	0.41	-38.7	-27	11.75
HT/VHT40, M0 to M7	1	13	-56.7		0.58	-43.1	-27	16.12
HT/VHT40, M0 to M7	2	13	-56.7	-56.3	0.58	-39.9	-27	12.9
HT/VHT40, M8 to M15	2	13	-56.7	-56.3	0.58	-39.9	-27	12.9
HT/VHT40 Beam Forming, M0 to M7	2	13	-56.7	-56.3	0.58	-39.9	-27	12.9
HT/VHT40 Beam Forming, M8 to M15	2	13	-56.7	-56.3	0.58	-39.9	-27	12.9
HT/VHT40 STBC, M8 to M15	2	13	-56.7	-56.3	0.58	-39.9	-27	12.9
HE40, M0 to M11 1ss	1	13	-56.2		0.33	-42.9	-27	15.87
HE40, M0 to M11 1ss	2	13	-56.2	-56.9	0.33	-40.2	-27	13.2
HE40, M0 to M11 2ss	2	13	-56.2	-56.9	0.33	-40.2	-27	13.2
HE40 Beam Forming, M0 to M11 1ss	2	13	-56.2	-56.9	0.33	-40.2	-27	13.2
HE40 Beam Forming, M0 to M11 2ss	2	13	-56.2	-56.9	0.33	-40.2	-27	13.2
HE40 STBC, M0 to M11 2ss	2	13	-56.2	-56.9	0.33	-40.2	-27	13.2

Frequency 5775 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	13	-55.6		0.38	-42.2	-27	15.22
Non HT80, 6 to 54 Mbps	2	13	-55.6	-55.7	0.38	-39.3	-27	12.26
VHT80, M0 to M11 1ss	1	13	-57.1		0.44	-43.7	-27	16.66
VHT80, M0 to M11 1ss	2	13	-57.1	-56.3	0.44	-40.2	-27	13.23
VHT80, M0 to M11 2ss	2	13	-57.1	-56.3	0.44	-40.2	-27	13.23
VHT80 Beam Forming, M0 to M11 1ss	2	13	-57.1	-56.3	0.44	-40.2	-27	13.23
VHT80 Beam Forming, M0 to M11 2ss	2	13	-57.1	-56.3	0.44	-40.2	-27	13.23
VHT80 STBC, M0 to M11 2ss	2	13	-57.1	-56.3	0.44	-40.2	-27	13.23
HE80, M0 to M11 1ss	1	13	-57.9		0.33	-44.6	-27	17.57
HE80, M0 to M11 1ss	2	13	-57.9	-56.2	0.33	-40.6	-27	13.63
HE80, M0 to M11 2ss	2	13	-57.9	-56.2	0.33	-40.6	-27	13.63
HE80 Beam Forming, M0 to M11 1ss	2	13	-57.9	-56.2	0.33	-40.6	-27	13.63
HE80 Beam Forming, M0 to M11 2ss	2	13	-57.9	-56.2	0.33	-40.6	-27	13.63
HE80 STBC, M0 to M11 2ss	2	13	-57.9	-56.2	0.33	-40.6	-27	13.63

Frequency 5785 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-54.0		0.48	-40.5	-27	13.52
Non HT20, 6 to 54 Mbps	2	13	-54.0	-55.8	0.48	-38.3	-27	11.32
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-54.0	-55.8	0.48	-38.3	-27	11.32
HT/VHT20, M0 to M7	1	13	-55.3		0.36	-41.9	-27	14.94
HT/VHT20, M0 to M7	2	13	-55.3	-56.5	0.36	-39.5	-27	12.49
HT/VHT20, M8 to M15	2	13	-55.3	-56.5	0.36	-39.5	-27	12.49
HT/VHT20 Beam Forming, M0 to M7	2	13	-55.3	-56.5	0.36	-39.5	-27	12.49
HT/VHT20 Beam Forming, M8 to M15	2	13	-55.3	-56.5	0.36	-39.5	-27	12.49
HT/VHT20 STBC, M8 to M15	2	13	-55.3	-56.5	0.36	-39.5	-27	12.49
HE20, M0 to M11 1ss	1	13	-54.7		0.3	-41.4	-27	14.4
HE20, M0 to M11 1ss	2	13	-54.7	-55.2	0.3	-38.6	-27	11.64
HE20, M0 to M11 2ss	2	13	-54.7	-55.2	0.3	-38.6	-27	11.64
HE20 Beam Forming, M0 to M11 1ss	2	13	-54.7	-55.2	0.3	-38.6	-27	11.64
HE20 Beam Forming, M0 to M11 2ss	2	13	-54.7	-55.2	0.3	-38.6	-27	11.64
HE20 STBC, M0 to M11 2ss	2	13	-54.7	-55.2	0.3	-38.6	-27	11.64

Frequency 5795 MHz


Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	13	-55.7		0.41	-42.3	-27	15.29
Non HT40, 6 to 54 Mbps	2	13	-55.7	-55.4	0.41	-39.1	-27	12.13
HT/VHT40, M0 to M7	1	13	-56.4		0.58	-42.8	-27	15.82
HT/VHT40, M0 to M7	2	13	-56.4	-56.9	0.58	-40.0	-27	13.05
HT/VHT40, M8 to M15	2	13	-56.4	-56.9	0.58	-40.0	-27	13.05
HT/VHT40 Beam Forming, M0 to M7	2	13	-56.4	-56.9	0.58	-40.0	-27	13.05
HT/VHT40 Beam Forming, M8 to M15	2	13	-56.4	-56.9	0.58	-40.0	-27	13.05
HT/VHT40 STBC, M8 to M15	2	13	-56.4	-56.9	0.58	-40.0	-27	13.05
HE40, M0 to M11 1ss	1	13	-56.9		0.33	-43.6	-27	16.57
HE40, M0 to M11 1ss	2	13	-56.9	-55.7	0.33	-39.9	-27	12.92
HE40, M0 to M11 2ss	2	13	-56.9	-55.7	0.33	-39.9	-27	12.92
HE40 Beam Forming, M0 to M11 1ss	2	13	-56.9	-55.7	0.33	-39.9	-27	12.92
HE40 Beam Forming, M0 to M11 2ss	2	13	-56.9	-55.7	0.33	-39.9	-27	12.92
HE40 STBC, M0 to M11 2ss	2	13	-56.9	-55.7	0.33	-39.9	-27	12.92

Frequency 5825 MHz


Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-56.3		0.48	-42.8	-27	15.82
Non HT20, 6 to 54 Mbps	2	13	-56.3	-55.4	0.48	-39.3	-27	12.34
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-56.3	-55.4	0.48	-39.3	-27	12.34
HT/VHT20, M0 to M7	1	13	-55.9		0.36	-42.5	-27	15.54
HT/VHT20, M0 to M7	2	13	-55.9	-55.2	0.36	-39.2	-27	12.16
HT/VHT20, M8 to M15	2	13	-55.9	-55.2	0.36	-39.2	-27	12.16
HT/VHT20 Beam Forming, M0 to M7	2	13	-55.9	-55.2	0.36	-39.2	-27	12.16
HT/VHT20 Beam Forming, M8 to M15	2	13	-55.9	-55.2	0.36	-39.2	-27	12.16
HT/VHT20 STBC, M8 to M15	2	13	-55.9	-55.2	0.36	-39.2	-27	12.16
HE20, M0 to M11 1ss	1	13	-55.6		0.3	-42.3	-27	15.3
HE20, M0 to M11 1ss	2	13	-55.6	-55.5	0.3	-39.2	-27	12.24
HE20, M0 to M11 2ss	2	13	-55.6	-55.5	0.3	-39.2	-27	12.24
HE20 Beam Forming, M0 to M11 1ss	2	13	-55.6	-55.5	0.3	-39.2	-27	12.24
HE20 Beam Forming, M0 to M11 2ss	2	13	-55.6	-55.5	0.3	-39.2	-27	12.24
HE20 STBC, M0 to M11 2ss	2	13	-55.6	-55.5	0.3	-39.2	-27	12.24

Data Screenshots – Antenna gain 13dBi

5745 MHz: HT/VHT20, M0 to M7

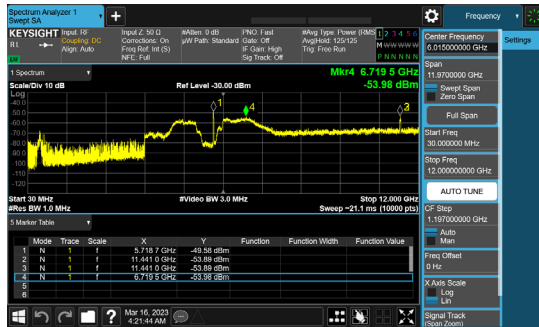


Antenna A

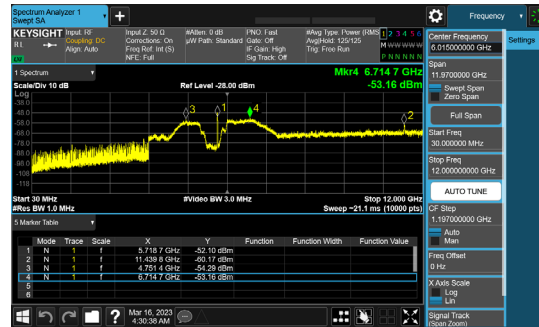


Antenna B

5745 MHz: HT/VHT20, M8 to M15

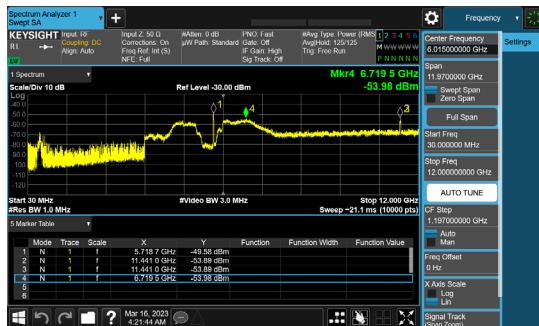


Antenna A

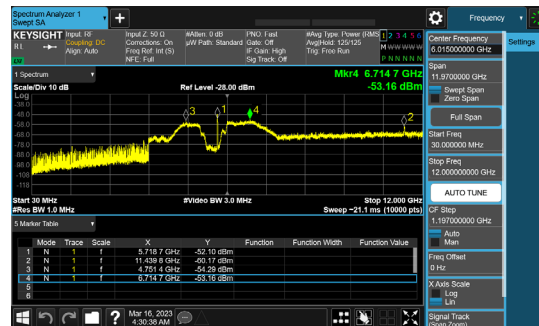


Antenna B

5745 MHz: HT/VHT20 Beam Forming, M0 to M7

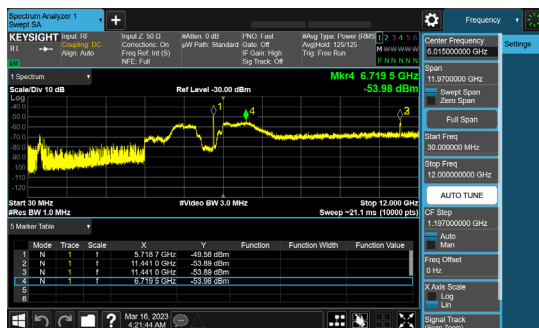

Antenna A

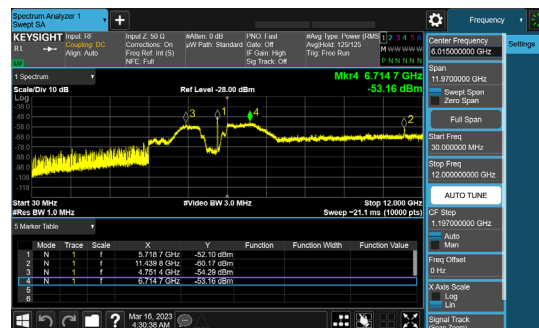

Antenna B

Conducted Spurs Average – Antenna gain 15dBi.**Frequency 5745 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	15	-63.0		0.48	-47.5	-41	6.27
Non HT20, 6 to 54 Mbps	2	15	-62.7	-62.0	0.48	-43.8	-41	2.59
Non HT20 Beam Forming, 6 to 54 Mbps	2	15	-62.7	-62.0	0.48	-43.8	-41	2.59
HT/VHT20, M0 to M7	1	15	-63.0		0.36	-47.6	-41	6.39
HT/VHT20, M0 to M7	2	15	-63.0	-61.8	0.36	-44.0	-41	2.74
HT/VHT20, M8 to M15	2	15	-63.0	-61.8	0.36	-44.0	-41	2.74
HT/VHT20 Beam Forming, M0 to M7	2	15	-63.0	-61.8	0.36	-44.0	-41	2.74
HT/VHT20 Beam Forming, M8 to M15	2	15	-63.0	-61.8	0.36	-44.0	-41	2.74
HT/VHT20 STBC, M8 to M15	2	15	-63.0	-61.8	0.36	-44.0	-41	2.74
HE20, M0 to M11 1ss	1	15	-62.7		0.3	-47.4	-41	6.15
HE20, M0 to M11 1ss	2	15	-62.8	-61.7	0.3	-43.9	-41	2.66
HE20, M0 to M11 2ss	2	15	-62.8	-61.7	0.3	-43.9	-41	2.66
HE20 Beam Forming, M0 to M11 1ss	2	15	-62.8	-61.7	0.3	-43.9	-41	2.66
HE20 Beam Forming, M0 to M11 2ss	2	15	-62.8	-61.7	0.3	-43.9	-41	2.66
HE20 STBC, M0 to M11 2ss	2	15	-62.8	-61.7	0.3	-43.9	-41	2.66

Frequency 5755 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	15	-63.0		0.41	-47.6	-41	6.34
Non HT40, 6 to 54 Mbps	2	15	-63.5	-62.0	0.41	-44.3	-41	3.02
HT/VHT40, M0 to M7	1	15	-64.2		0.58	-48.6	-41	7.37
HT/VHT40, M0 to M7	2	15	-63.0	-61.4	0.58	-43.5	-41	2.28
HT/VHT40, M8 to M15	2	15	-63.0	-61.4	0.58	-43.5	-41	2.28
HT/VHT40 Beam Forming, M0 to M7	2	15	-63.0	-61.4	0.58	-43.5	-41	2.28
HT/VHT40 Beam Forming, M8 to M15	2	15	-63.0	-61.4	0.58	-43.5	-41	2.28
HT/VHT40 STBC, M8 to M15	2	15	-63.0	-61.4	0.58	-43.5	-41	2.28
HE40, M0 to M11 1ss	1	15	-62.7		0.33	-47.4	-41	6.12
HE40, M0 to M11 1ss	2	15	-63.5	-61.8	0.33	-44.2	-41	2.98
HE40, M0 to M11 2ss	2	15	-63.5	-61.8	0.33	-44.2	-41	2.98
HE40 Beam Forming, M0 to M11 1ss	2	15	-63.5	-61.8	0.33	-44.2	-41	2.98
HE40 Beam Forming, M0 to M11 2ss	2	15	-63.5	-61.8	0.33	-44.2	-41	2.98
HE40 STBC, M0 to M11 2ss	2	15	-63.5	-61.8	0.33	-44.2	-41	2.98

Frequency 5775 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	15	-64.7		0.38	-49.3	-41	8.07
Non HT80, 6 to 54 Mbps	2	15	-64.7	-65.2	0.38	-46.5	-41	5.3
VHT80, M0 to M11 1ss	1	15	-65.0		0.44	-49.6	-41	8.31
VHT80, M0 to M11 1ss	2	15	-64.4	-65.4	0.44	-46.4	-41	5.17
VHT80, M0 to M11 2ss	2	15	-64.4	-65.4	0.44	-46.4	-41	5.17
VHT80 Beam Forming, M0 to M11 1ss	2	15	-64.4	-65.4	0.44	-46.4	-41	5.17
VHT80 Beam Forming, M0 to M11 2ss	2	15	-64.4	-65.4	0.44	-46.4	-41	5.17
VHT80 STBC, M0 to M11 2ss	2	15	-64.4	-65.4	0.44	-46.4	-41	5.17
HE80, M0 to M11 1ss	1	15	-64.4		0.33	-49.1	-41	7.82
HE80, M0 to M11 1ss	2	15	-64.5	-65.4	0.33	-46.6	-41	5.34
HE80, M0 to M11 2ss	2	15	-64.5	-65.4	0.33	-46.6	-41	5.34
HE80 Beam Forming, M0 to M11 1ss	2	15	-64.5	-65.4	0.33	-46.6	-41	5.34
HE80 Beam Forming, M0 to M11 2ss	2	15	-64.5	-65.4	0.33	-46.6	-41	5.34
HE80 STBC, M0 to M11 2ss	2	15	-64.5	-65.4	0.33	-46.6	-41	5.34

Frequency 5785 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	15	-63.2		0.48	-47.7	-41	6.47
Non HT20, 6 to 54 Mbps	2	15	-63.2	-62.0	0.48	-44.1	-41	2.82
Non HT20 Beam Forming, 6 to 54 Mbps	2	15	-63.2	-62.0	0.48	-44.1	-41	2.82
HT/VHT20, M0 to M7	1	15	-63.3		0.36	-47.9	-41	6.69
HT/VHT20, M0 to M7	2	15	-63.3	-61.7	0.36	-44.1	-41	2.81
HT/VHT20, M8 to M15	2	15	-63.3	-61.7	0.36	-44.1	-41	2.81
HT/VHT20 Beam Forming, M0 to M7	2	15	-63.3	-61.7	0.36	-44.1	-41	2.81
HT/VHT20 Beam Forming, M8 to M15	2	15	-63.3	-61.7	0.36	-44.1	-41	2.81
HT/VHT20 STBC, M8 to M15	2	15	-63.3	-61.7	0.36	-44.1	-41	2.81
HE20, M0 to M11 1ss	1	15	-64.5		0.3	-49.2	-41	7.95
HE20, M0 to M11 1ss	2	15	-64.5	-62.9	0.3	-45.3	-41	4.07
HE20, M0 to M11 2ss	2	15	-64.5	-62.9	0.3	-45.3	-41	4.07
HE20 Beam Forming, M0 to M11 1ss	2	15	-64.5	-62.9	0.3	-45.3	-41	4.07
HE20 Beam Forming, M0 to M11 2ss	2	15	-64.5	-62.9	0.3	-45.3	-41	4.07
HE20 STBC, M0 to M11 2ss	2	15	-64.5	-62.9	0.3	-45.3	-41	4.07

Frequency 5795 MHz


Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	15	-63.4		0.41	-48.0	-41	6.74
Non HT40, 6 to 54 Mbps	2	15	-63.4	-62.2	0.41	-44.3	-41	3.09
HT/VHT40, M0 to M7	1	15	-63.6		0.58	-48.0	-41	6.77
HT/VHT40, M0 to M7	2	15	-63.4	-61.8	0.58	-43.9	-41	2.68
HT/VHT40, M8 to M15	2	15	-63.4	-61.8	0.58	-43.9	-41	2.68
HT/VHT40 Beam Forming, M0 to M7	2	15	-63.4	-61.8	0.58	-43.9	-41	2.68
HT/VHT40 Beam Forming, M8 to M15	2	15	-63.4	-61.8	0.58	-43.9	-41	2.68
HT/VHT40 STBC, M8 to M15	2	15	-63.4	-61.8	0.58	-43.9	-41	2.68
HE40, M0 to M11 1ss	1	15	-63.4		0.33	-48.1	-41	6.82
HE40, M0 to M11 1ss	2	15	-63.4	-62.6	0.33	-44.6	-41	3.39
HE40, M0 to M11 2ss	2	15	-63.4	-62.6	0.33	-44.6	-41	3.39
HE40 Beam Forming, M0 to M11 1ss	2	15	-63.4	-62.6	0.33	-44.6	-41	3.39
HE40 Beam Forming, M0 to M11 2ss	2	15	-63.4	-62.6	0.33	-44.6	-41	3.39
HE40 STBC, M0 to M11 2ss	2	15	-63.4	-62.6	0.33	-44.6	-41	3.39

Frequency 5825 MHz


Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	15	-63.6		0.48	-48.1	-41	6.87
Non HT20, 6 to 54 Mbps	2	15	-63.6	-62.7	0.48	-44.6	-41	3.39
Non HT20 Beam Forming, 6 to 54 Mbps	2	15	-63.6	-62.7	0.48	-44.6	-41	3.39
HT/VHT20, M0 to M7	1	15	-64.5		0.36	-49.1	-41	7.89
HT/VHT20, M0 to M7	2	15	-64.5	-62.8	0.36	-45.2	-41	3.95
HT/VHT20, M8 to M15	2	15	-64.5	-62.8	0.36	-45.2	-41	3.95
HT/VHT20 Beam Forming, M0 to M7	2	15	-64.5	-62.8	0.36	-45.2	-41	3.95
HT/VHT20 Beam Forming, M8 to M15	2	15	-64.5	-62.8	0.36	-45.2	-41	3.95
HT/VHT20 STBC, M8 to M15	2	15	-64.5	-62.8	0.36	-45.2	-41	3.95
HE20, M0 to M11 1ss	1	15	-64.1		0.3	-48.8	-41	7.55
HE20, M0 to M11 1ss	2	15	-64.5	-62.6	0.3	-45.1	-41	3.89
HE20, M0 to M11 2ss	2	15	-64.5	-62.6	0.3	-45.1	-41	3.89
HE20 Beam Forming, M0 to M11 1ss	2	15	-64.5	-62.6	0.3	-45.1	-41	3.89
HE20 Beam Forming, M0 to M11 2ss	2	15	-64.5	-62.6	0.3	-45.1	-41	3.89
HE20 STBC, M0 to M11 2ss	2	15	-64.5	-62.6	0.3	-45.1	-41	3.89

Data Screenshots

5745 MHz: HT/VHT40, M0 to M7

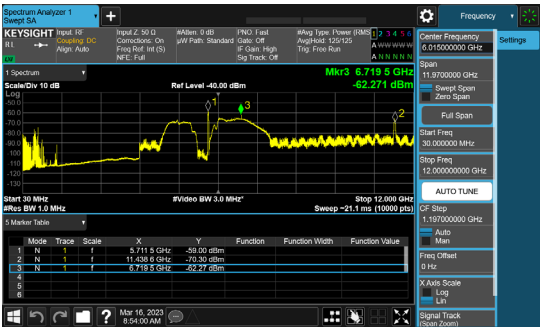


Antenna A

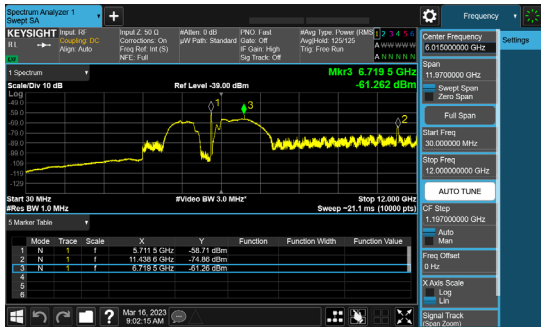


Antenna B

5745 MHz: HT/VHT40, M8 to M15

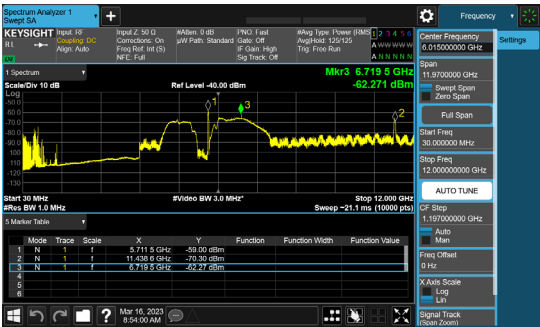


Antenna A

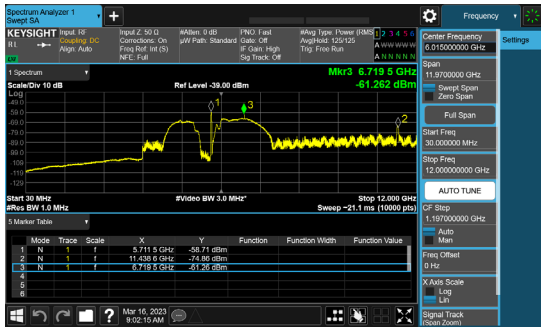


Antenna B

5745 MHz: HT/VHT40 Beam Forming, M0 to M7

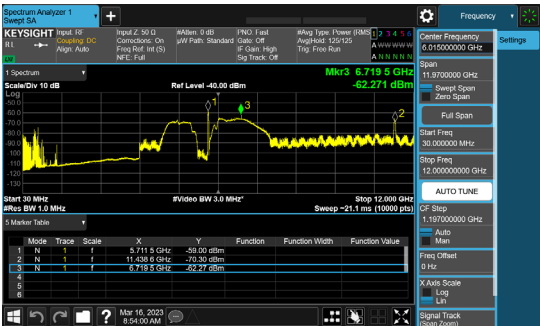

Antenna A

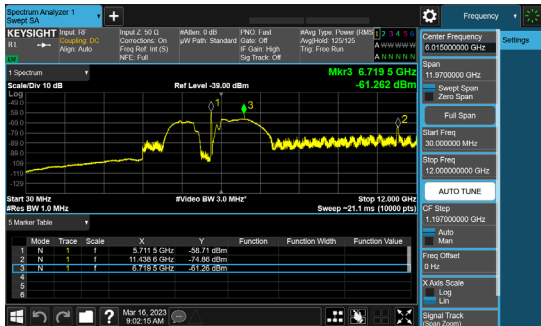

Antenna B

Conducted Spurs Peak – Antenna gain 15dBi.**Frequency 5745 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	15	-53.9		0.48	-38.4	-27	11.42
Non HT20, 6 to 54 Mbps	2	15	-54.4	-55.1	0.48	-36.2	-27	9.24
Non HT20 Beam Forming, 6 to 54 Mbps	2	15	-54.4	-55.1	0.48	-36.2	-27	9.24
HT/VHT20, M0 to M7	1	15	-55.3		0.36	-39.9	-27	12.94
HT/VHT20, M0 to M7	2	15	-55.3	-55.5	0.36	-37.0	-27	10.03
HT/VHT20, M8 to M15	2	15	-55.3	-55.5	0.36	-37.0	-27	10.03
HT/VHT20 Beam Forming, M0 to M7	2	15	-55.3	-55.5	0.36	-37.0	-27	10.03
HT/VHT20 Beam Forming, M8 to M15	2	15	-55.3	-55.5	0.36	-37.0	-27	10.03
HT/VHT20 STBC, M8 to M15	2	15	-55.3	-55.5	0.36	-37.0	-27	10.03
HE20, M0 to M11 1ss	1	15	-54.1		0.3	-38.8	-27	11.8
HE20, M0 to M11 1ss	2	15	-55.8	-55.7	0.3	-37.4	-27	10.44
HE20, M0 to M11 2ss	2	15	-55.8	-55.7	0.3	-37.4	-27	10.44
HE20 Beam Forming, M0 to M11 1ss	2	15	-55.8	-55.7	0.3	-37.4	-27	10.44
HE20 Beam Forming, M0 to M11 2ss	2	15	-55.8	-55.7	0.3	-37.4	-27	10.44
HE20 STBC, M0 to M11 2ss	2	15	-55.8	-55.7	0.3	-37.4	-27	10.44

Frequency 5755 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	15	-54.4		0.41	-39.0	-27	11.99
Non HT40, 6 to 54 Mbps	2	15	-55.4	-56.1	0.41	-37.3	-27	10.32
HT/VHT40, M0 to M7	1	15	-56.7		0.58	-41.1	-27	14.12
HT/VHT40, M0 to M7	2	15	-56.9	-55.4	0.58	-37.5	-27	10.49
HT/VHT40, M8 to M15	2	15	-56.9	-55.4	0.58	-37.5	-27	10.49
HT/VHT40 Beam Forming, M0 to M7	2	15	-56.9	-55.4	0.58	-37.5	-27	10.49
HT/VHT40 Beam Forming, M8 to M15	2	15	-56.9	-55.4	0.58	-37.5	-27	10.49
HT/VHT40 STBC, M8 to M15	2	15	-56.9	-55.4	0.58	-37.5	-27	10.49
HE40, M0 to M11 1ss	1	15	-56.2		0.33	-40.9	-27	13.87
HE40, M0 to M11 1ss	2	15	-56.5	-56.0	0.33	-37.9	-27	10.9
HE40, M0 to M11 2ss	2	15	-56.5	-56.0	0.33	-37.9	-27	10.9
HE40 Beam Forming, M0 to M11 1ss	2	15	-56.5	-56.0	0.33	-37.9	-27	10.9
HE40 Beam Forming, M0 to M11 2ss	2	15	-56.5	-56.0	0.33	-37.9	-27	10.9
HE40 STBC, M0 to M11 2ss	2	15	-56.5	-56.0	0.33	-37.9	-27	10.9

Frequency 5775 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	15	-57.4		0.38	-42.0	-27	15.02
Non HT80, 6 to 54 Mbps	2	15	-57.4	-56.3	0.38	-38.4	-27	11.42
VHT80, M0 to M11 1ss	1	15	-57.1		0.44	-41.7	-27	14.66
VHT80, M0 to M11 1ss	2	15	-56.7	-55.3	0.44	-37.5	-27	10.49
VHT80, M0 to M11 2ss	2	15	-56.7	-55.3	0.44	-37.5	-27	10.49
VHT80 Beam Forming, M0 to M11 1ss	2	15	-56.7	-55.3	0.44	-37.5	-27	10.49
VHT80 Beam Forming, M0 to M11 2ss	2	15	-56.7	-55.3	0.44	-37.5	-27	10.49
VHT80 STBC, M0 to M11 2ss	2	15	-56.7	-55.3	0.44	-37.5	-27	10.49
HE80, M0 to M11 1ss	1	15	-57.9		0.33	-42.6	-27	15.57
HE80, M0 to M11 1ss	2	15	-57.4	-55.9	0.33	-38.2	-27	11.25
HE80, M0 to M11 2ss	2	15	-57.4	-55.9	0.33	-38.2	-27	11.25
HE80 Beam Forming, M0 to M11 1ss	2	15	-57.4	-55.9	0.33	-38.2	-27	11.25
HE80 Beam Forming, M0 to M11 2ss	2	15	-57.4	-55.9	0.33	-38.2	-27	11.25
HE80 STBC, M0 to M11 2ss	2	15	-57.4	-55.9	0.33	-38.2	-27	11.25

Frequency 5785 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	15	-54.0		0.48	-38.5	-27	11.52
Non HT20, 6 to 54 Mbps	2	15	-54.0	-55.8	0.48	-36.3	-27	9.32
Non HT20 Beam Forming, 6 to 54 Mbps	2	15	-54.0	-55.8	0.48	-36.3	-27	9.32
HT/VHT20, M0 to M7	1	15	-55.3		0.36	-39.9	-27	12.94
HT/VHT20, M0 to M7	2	15	-55.3	-56.5	0.36	-37.5	-27	10.49
HT/VHT20, M8 to M15	2	15	-55.3	-56.5	0.36	-37.5	-27	10.49
HT/VHT20 Beam Forming, M0 to M7	2	15	-55.3	-56.5	0.36	-37.5	-27	10.49
HT/VHT20 Beam Forming, M8 to M15	2	15	-55.3	-56.5	0.36	-37.5	-27	10.49
HT/VHT20 STBC, M8 to M15	2	15	-55.3	-56.5	0.36	-37.5	-27	10.49
HE20, M0 to M11 1ss	1	15	-54.7		0.3	-39.4	-27	12.4
HE20, M0 to M11 1ss	2	15	-54.7	-55.2	0.3	-36.6	-27	9.64
HE20, M0 to M11 2ss	2	15	-54.7	-55.2	0.3	-36.6	-27	9.64
HE20 Beam Forming, M0 to M11 1ss	2	15	-54.7	-55.2	0.3	-36.6	-27	9.64
HE20 Beam Forming, M0 to M11 2ss	2	15	-54.7	-55.2	0.3	-36.6	-27	9.64
HE20 STBC, M0 to M11 2ss	2	15	-54.7	-55.2	0.3	-36.6	-27	9.64

Frequency 5795 MHz


Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	15	-55.7		0.41	-40.3	-27	13.29
Non HT40, 6 to 54 Mbps	2	15	-55.7	-55.4	0.41	-37.1	-27	10.13
HT/VHT40, M0 to M7	1	15	-56.4		0.58	-40.8	-27	13.82
HT/VHT40, M0 to M7	2	15	-57.1	-55.2	0.58	-37.5	-27	10.45
HT/VHT40, M8 to M15	2	15	-57.1	-55.2	0.58	-37.5	-27	10.45
HT/VHT40 Beam Forming, M0 to M7	2	15	-57.1	-55.2	0.58	-37.5	-27	10.45
HT/VHT40 Beam Forming, M8 to M15	2	15	-57.1	-55.2	0.58	-37.5	-27	10.45
HT/VHT40 STBC, M8 to M15	2	15	-57.1	-55.2	0.58	-37.5	-27	10.45
HE40, M0 to M11 1ss	1	15	-56.9		0.33	-41.6	-27	14.57
HE40, M0 to M11 1ss	2	15	-56.9	-55.7	0.33	-37.9	-27	10.92
HE40, M0 to M11 2ss	2	15	-56.9	-55.7	0.33	-37.9	-27	10.92
HE40 Beam Forming, M0 to M11 1ss	2	15	-56.9	-55.7	0.33	-37.9	-27	10.92
HE40 Beam Forming, M0 to M11 2ss	2	15	-56.9	-55.7	0.33	-37.9	-27	10.92
HE40 STBC, M0 to M11 2ss	2	15	-56.9	-55.7	0.33	-37.9	-27	10.92

Frequency 5825 MHz


Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle (dB)	Total Conducted Spur (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	15	-56.3		0.48	-40.8	-27	13.82
Non HT20, 6 to 54 Mbps	2	15	-56.3	-55.4	0.48	-37.3	-27	10.34
Non HT20 Beam Forming, 6 to 54 Mbps	2	15	-56.3	-55.4	0.48	-37.3	-27	10.34
HT/VHT20, M0 to M7	1	15	-55.9		0.36	-40.5	-27	13.54
HT/VHT20, M0 to M7	2	15	-55.9	-55.2	0.36	-37.2	-27	10.16
HT/VHT20, M8 to M15	2	15	-55.9	-55.2	0.36	-37.2	-27	10.16
HT/VHT20 Beam Forming, M0 to M7	2	15	-55.9	-55.2	0.36	-37.2	-27	10.16
HT/VHT20 Beam Forming, M8 to M15	2	15	-55.9	-55.2	0.36	-37.2	-27	10.16
HT/VHT20 STBC, M8 to M15	2	15	-55.9	-55.2	0.36	-37.2	-27	10.16
HE20, M0 to M11 1ss	1	15	-55.6		0.3	-40.3	-27	13.3
HE20, M0 to M11 1ss	2	15	-55.3	-55.3	0.3	-37.0	-27	9.99
HE20, M0 to M11 2ss	2	15	-55.3	-55.3	0.3	-37.0	-27	9.99
HE20 Beam Forming, M0 to M11 1ss	2	15	-55.3	-55.3	0.3	-37.0	-27	9.99
HE20 Beam Forming, M0 to M11 2ss	2	15	-55.3	-55.3	0.3	-37.0	-27	9.99
HE20 STBC, M0 to M11 2ss	2	15	-55.3	-55.3	0.3	-37.0	-27	9.99

Data Screenshots – Antenna gain 15dBi.

5745 MHz: HT/VHT20, M0 to M7

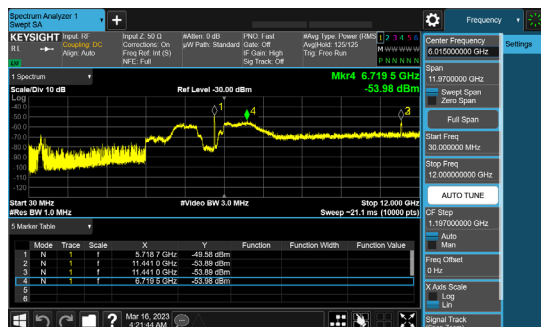


Antenna A

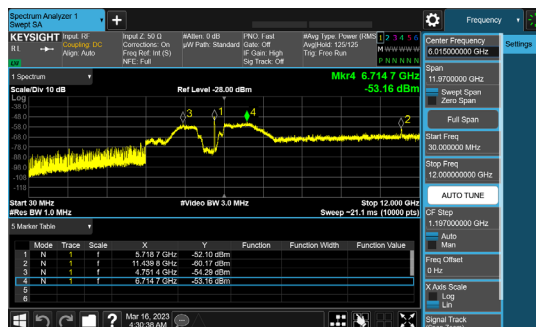


Antenna B

5745 MHz: HT/VHT20, M8 to M15

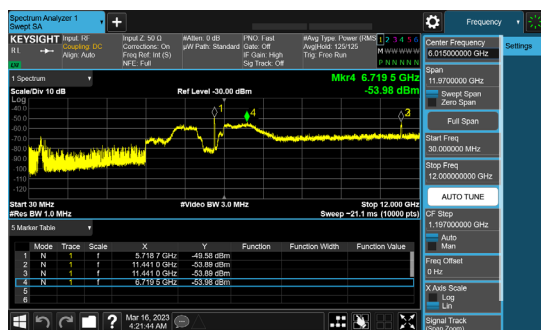


Antenna A

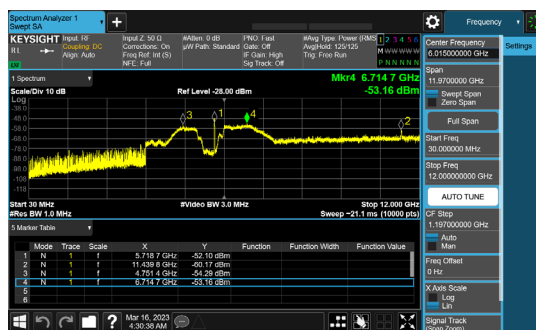


Antenna B

5745 MHz: HT/VHT20 Beam Forming, M0 to M7

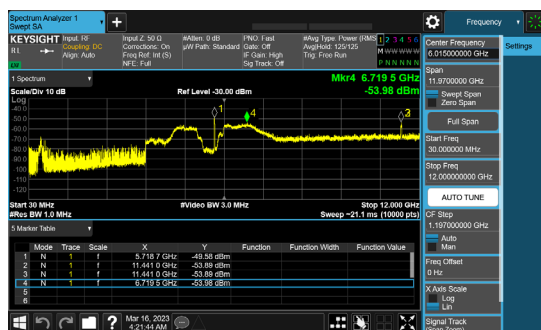

Antenna A

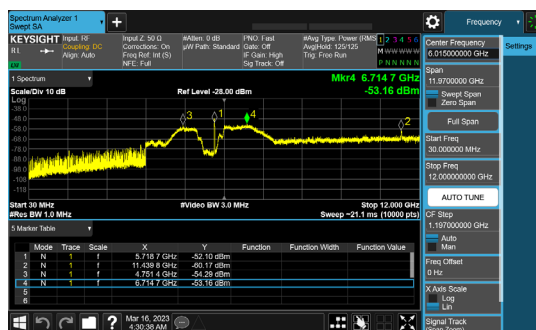

Antenna B

A.7: Conducted Band edge.

Conducted Band Edge Test Requirement

15.407:

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits

KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

2. Unwanted Emissions that fall Outside of the Restricted Bands

a) For all measurements, follow the requirements in II.G.3. "General Requirements for Unwanted Emissions Measurements."

b) At frequencies below 1000 MHz, use the procedure described in II.G.4. "Procedure for Unwanted Emissions Measurements Below 1000 MHz."

c) At frequencies above 1000 MHz, use the procedure for maximum emissions described in II.G.5., "Procedure for Unwanted Emissions Measurements Above 1000 MHz."

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

Conducted Band Edge Test Procedure

Ref. 789033 D02 General UNII Test Procedures New Rules v02r01

ANSI C63.10: 2013

Conducted Band Edge Test Procedure

- | |
|---|
| <ol style="list-style-type: none">1. Connect the antenna port(s) to the spectrum analyzer input.2. Place the radio in continuous transmit mode. Use the procedures in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 to substitute conducted measurements in place of radiated measurements.3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).4. Record the marker. Also measure any emissions in the restricted bands.5. The "measure-and-sum technique" is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst-case output is recorded.6. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands7. Capture graphs and record pertinent measurement data. |
|---|

Ref. 789033 D02 General UNII Test Procedures New Rules v02r01

ANSI C63.10: 2013 Section 12.7.6 (Peak), Section 12.7.7.2 (Method AD)

Conducted Spurious Emissions Test parameters	
Peak Span = 30MHz to 26.5GHz / 26.5GHz to 40GHz RBW = 1 MHz VBW $\geq$ 3 MHz Sweep = Auto couple Detector = Peak Trace = Max Hold.	Average Span = 30MHz to 26.5GHz / 26.5GHz to 40GHz RBW = 1 MHz VBW $\geq$ 3 MHz Sweep = Auto couple Detector = RMS Power Averaging
Tested By: Ronak Patel	Date of testing: 3/22/2023 - 6/2/2023
Test Result: PASS	

Test Equipment

See Appendix C for list of tests equipment

Conducted Band edge Peak 15407L – Antenna gain 7dBi.**Frequency 5745 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	7	-63.4		-55.9	-27	28.92
Non HT20, 6 to 54 Mbps	2	7	-63.4	-62.1	-52.2	-27	25.21
Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-63.4	-62.1	-49.2	-27	22.21
HT/VHT20, M0 to M7	1	7	-63.5		-56.1	-27	29.14
HT/VHT20, M0 to M7	2	7	-63.5	-62.2	-52.4	-27	25.43
HT/VHT20, M8 to M15	2	7	-63.5	-62.2	-52.4	-27	25.43
HT/VHT20 Beam Forming, M0 to M7	2	10	-63.5	-62.2	-49.4	-27	22.43
HT/VHT20 Beam Forming, M8 to M15	2	7	-63.5	-62.2	-52.4	-27	25.43
HT/VHT20 STBC, M8 to M15	2	7	-63.5	-62.2	-52.4	-27	25.43
HE20, M0 to M11 1ss	1	7	-66.7		-59.4	-27	32.4
HE20, M0 to M11 1ss	2	7	-66.7	-64.4	-55.1	-27	28.09
HE20, M0 to M11 2ss	2	7	-66.7	-64.4	-55.1	-27	28.09
HE20 Beam Forming, M0 to M11 1ss	2	10	-66.7	-64.4	-52.1	-27	25.09
HE20 Beam Forming, M0 to M11 2ss	2	7	-66.7	-64.4	-55.1	-27	28.09
HE20 STBC, M0 to M11 2ss	2	7	-66.7	-64.4	-55.1	-27	28.09

Frequency 5755 MHz



Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	7	-54.4		-47.0	-27	19.99
Non HT40, 6 to 54 Mbps	2	7	-54.4	-56.3	-44.8	-27	17.83
HT/VHT40, M0 to M7	1	7	-61.1		-53.5	-27	26.52
HT/VHT40, M0 to M7	2	7	-61.1	-61.6	-50.7	-27	23.75
HT/VHT40, M8 to M15	2	7	-61.1	-61.6	-50.7	-27	23.75
HT/VHT40 Beam Forming, M0 to M7	2	10	-61.1	-61.6	-47.7	-27	20.75
HT/VHT40 Beam Forming, M8 to M15	2	7	-61.1	-61.6	-50.7	-27	23.75
HT/VHT40 STBC, M8 to M15	2	7	-61.1	-61.6	-50.7	-27	23.75
HE40, M0 to M11 1ss	1	7	-60.5		-53.2	-27	26.17
HE40, M0 to M11 1ss	2	7	-60.5	-61.6	-50.7	-27	23.68
HE40, M0 to M11 2ss	2	7	-60.5	-61.6	-50.7	-27	23.68
HE40 Beam Forming, M0 to M11 1ss	2	10	-60.5	-61.6	-47.7	-27	20.68
HE40 Beam Forming, M0 to M11 2ss	2	7	-60.5	-61.6	-50.7	-27	23.68
HE40 STBC, M0 to M11 2ss	2	7	-60.5	-61.6	-50.7	-27	23.68

Frequency 5775 MHz


Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	7	-41.9		-34.5	-27	7.52
Non HT80, 6 to 54 Mbps	2	7	-41.9	-48.9	-33.7	-27	6.73
VHT80, M0 to M11 1ss	1	7	-48.5		-41.1	-27	14.06
VHT80, M0 to M11 1ss	2	7	-48.5	-52.0	-39.5	-27	12.45
VHT80, M0 to M11 2ss	2	7	-48.5	-52.0	-39.5	-27	12.45
VHT80 Beam Forming, M0 to M11 1ss	2	10	-48.5	-52.0	-36.5	-27	9.45
VHT80 Beam Forming, M0 to M11 2ss	2	7	-48.5	-52.0	-39.5	-27	12.45
VHT80 STBC, M0 to M11 2ss	2	7	-48.5	-52.0	-39.5	-27	12.45
HE80, M0 to M11 1ss	1	7	-47.5		-40.2	-27	13.17
HE80, M0 to M11 1ss	2	7	-47.5	-49.3	-38.0	-27	10.97
HE80, M0 to M11 2ss	2	7	-47.5	-49.3	-38.0	-27	10.97
HE80 Beam Forming, M0 to M11 1ss	2	10	-47.5	-49.3	-35.0	-27	7.97
HE80 Beam Forming, M0 to M11 2ss	2	7	-47.5	-49.3	-38.0	-27	10.97
HE80 STBC, M0 to M11 2ss	2	7	-47.5	-49.3	-38.0	-27	10.97

Data Screenshots – Antenna gain 7dBi Peak



5775 MHz: Non HT80, 6 to 54 Mbps

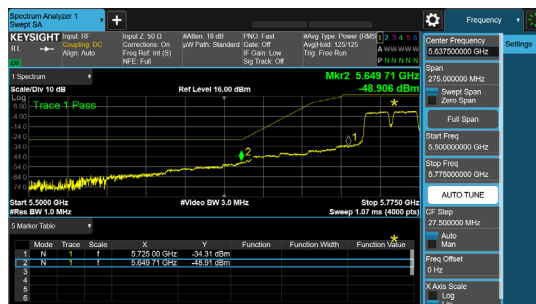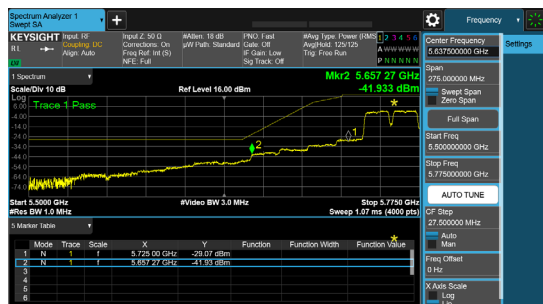

5775 MHz: Non HT80, 6 to 54 Mbps

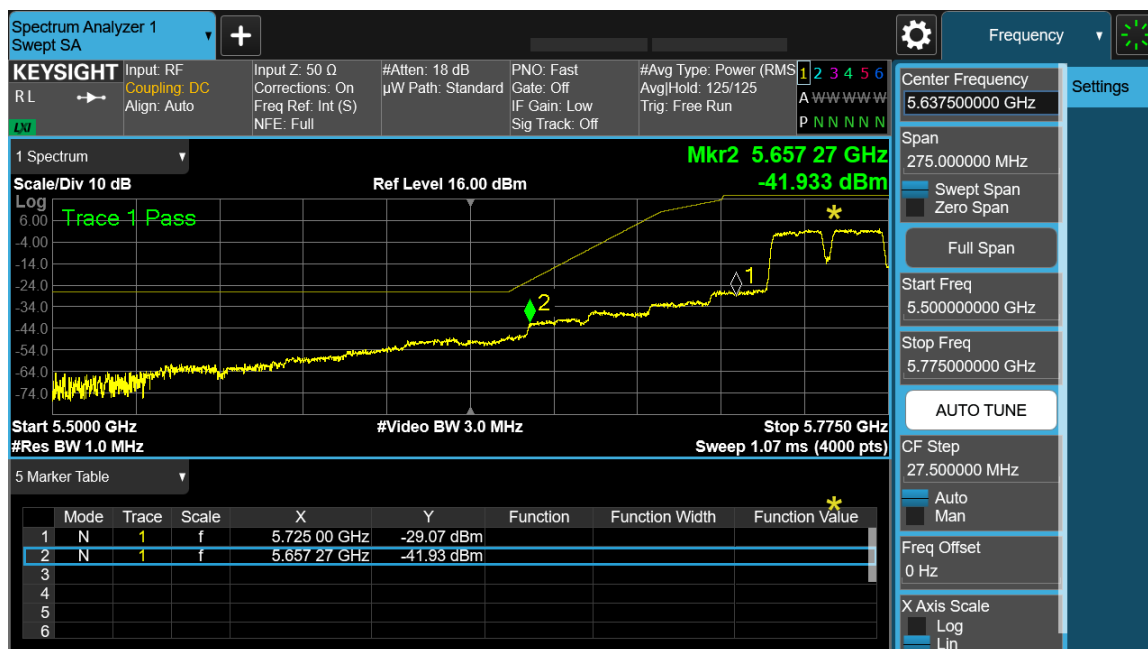

5775 MHz: HE80 Beam Forming, M0 to M11 1ss

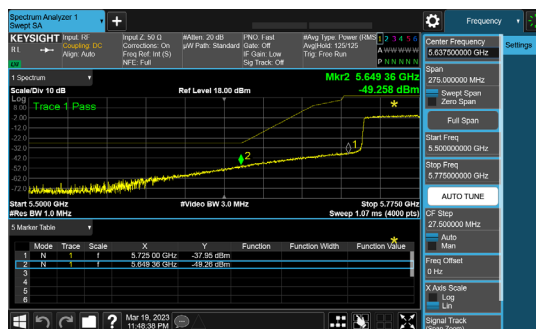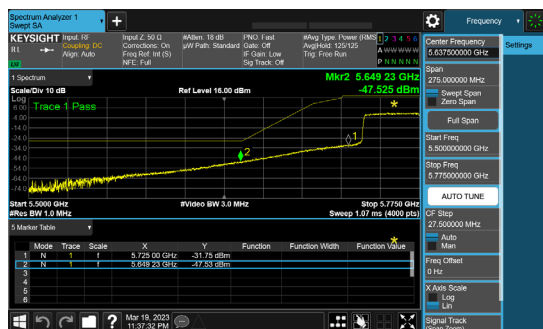

Conducted Band edge Peak 15407R - Antenna gain 7dBi.**Frequency 5785 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	7	-63.1		-55.6	-27	28.62
Non HT20, 6 to 54 Mbps	2	7	-63.1	-62.9	-52.5	-27	25.51
Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-63.1	-62.9	-49.5	-27	22.51
HT/VHT20, M0 to M7	1	7	-60.6		-53.2	-27	26.24
HT/VHT20, M0 to M7	2	7	-60.6	-60.4	-50.1	-27	23.13
HT/VHT20, M8 to M15	2	7	-60.6	-60.4	-50.1	-27	23.13
HT/VHT20 Beam Forming, M0 to M7	2	10	-60.6	-60.4	-47.1	-27	20.13
HT/VHT20 Beam Forming, M8 to M15	2	7	-60.6	-60.4	-50.1	-27	23.13
HT/VHT20 STBC, M8 to M15	2	7	-60.6	-60.4	-50.1	-27	23.13
HE20, M0 to M11 1ss	1	7	-60.8		-53.5	-27	26.5
HE20, M0 to M11 1ss	2	7	-60.8	-60.4	-50.3	-27	23.29
HE20, M0 to M11 2ss	2	7	-60.8	-60.4	-50.3	-27	23.29
HE20 Beam Forming, M0 to M11 1ss	2	10	-60.8	-60.4	-47.3	-27	20.29
HE20 Beam Forming, M0 to M11 2ss	2	7	-60.8	-60.4	-50.3	-27	23.29
HE20 STBC, M0 to M11 2ss	2	7	-60.8	-60.4	-50.3	-27	23.29

Frequency 5795 MHz


Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	7	-59.0		-51.6	-27	24.59
Non HT40, 6 to 54 Mbps	2	7	-59.0	-59.1	-48.6	-27	21.63
HT/VHT40, M0 to M7	1	7	-60.5		-52.9	-27	25.92
HT/VHT40, M0 to M7	2	7	-60.5	-58.2	-48.6	-27	21.61
HT/VHT40, M8 to M15	2	7	-60.5	-58.2	-48.6	-27	21.61
HT/VHT40 Beam Forming, M0 to M7	2	10	-60.5	-58.2	-45.6	-27	18.61
HT/VHT40 Beam Forming, M8 to M15	2	7	-60.5	-58.2	-48.6	-27	21.61
HT/VHT40 STBC, M8 to M15	2	7	-60.5	-58.2	-48.6	-27	21.61
HE40, M0 to M11 1ss	1	7	-59.3		-52.0	-27	24.97
HE40, M0 to M11 1ss	2	7	-59.3	-58.9	-48.8	-27	21.76
HE40, M0 to M11 2ss	2	7	-59.3	-58.9	-48.8	-27	21.76
HE40 Beam Forming, M0 to M11 1ss	2	10	-59.3	-58.9	-45.8	-27	18.76
HE40 Beam Forming, M0 to M11 2ss	2	7	-59.3	-58.9	-48.8	-27	21.76
HE40 STBC, M0 to M11 2ss	2	7	-59.3	-58.9	-48.8	-27	21.76

Frequency 5825 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	7	-62.1		-54.6	-27	27.62
Non HT20, 6 to 54 Mbps	2	7	-62.1	-61.8	-51.5	-27	24.46
Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-62.1	-61.8	-48.5	-27	21.46
HT/VHT20, M0 to M7	1	7	-62.8		-55.4	-27	28.44
HT/VHT20, M0 to M7	2	7	-62.8	-61.5	-51.7	-27	24.73
HT/VHT20, M8 to M15	2	7	-62.8	-61.5	-51.7	-27	24.73
HT/VHT20 Beam Forming, M0 to M7	2	10	-62.8	-61.5	-48.7	-27	21.73
HT/VHT20 Beam Forming, M8 to M15	2	7	-62.8	-61.5	-51.7	-27	24.73
HT/VHT20 STBC, M8 to M15	2	7	-62.8	-61.5	-51.7	-27	24.73
HE20, M0 to M11 1ss	1	7	-61.5		-54.2	-27	27.2
HE20, M0 to M11 1ss	2	7	-61.5	-62.1	-51.5	-27	24.48
HE20, M0 to M11 2ss	2	7	-61.5	-62.1	-51.5	-27	24.48
HE20 Beam Forming, M0 to M11 1ss	2	10	-61.5	-62.1	-48.5	-27	21.48
HE20 Beam Forming, M0 to M11 2ss	2	7	-61.5	-62.1	-51.5	-27	24.48
HE20 STBC, M0 to M11 2ss	2	7	-61.5	-62.1	-51.5	-27	24.48

Data Screenshots – Antenna gain 7dBi.



5795 MHz: HT/VHT40 Beam Forming, M0 to M7

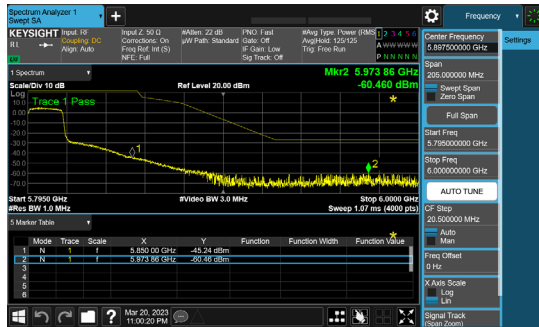

5795 MHz: HE40 Beam Forming, M0 to M11 1ss



5785 MHz: HT/VHT20 Beam Forming, M0 to M7

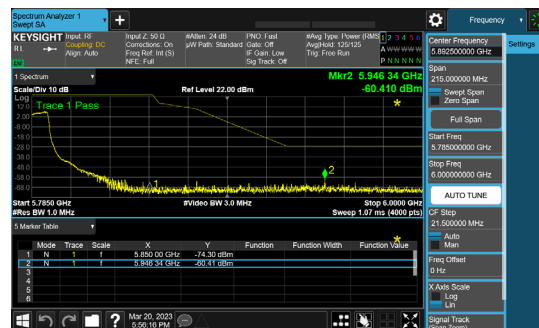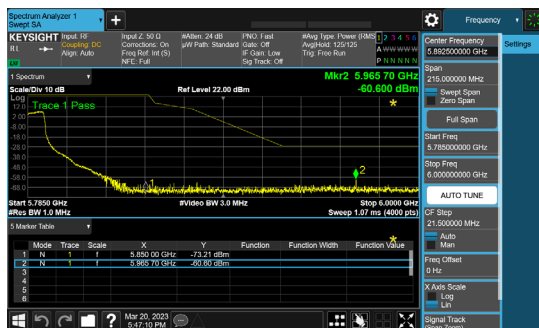

Conducted Band edge Peak 15407L. - Antenna gain 8dBi.**Frequency 5745 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	8	-63.4		-54.9	-27	27.92
Non HT20, 6 to 54 Mbps	2	8	-63.4	-62.1	-51.2	-27	24.21
Non HT20 Beam Forming, 6 to 54 Mbps	2	11	-63.4	-62.1	-48.2	-27	21.21
HT/VHT20, M0 to M7	1	8	-63.5		-55.1	-27	28.14
HT/VHT20, M0 to M7	2	8	-63.5	-62.2	-51.4	-27	24.43
HT/VHT20, M8 to M15	2	8	-63.5	-62.2	-51.4	-27	24.43
HT/VHT20 Beam Forming, M0 to M7	2	11	-63.5	-62.2	-48.4	-27	21.43
HT/VHT20 Beam Forming, M8 to M15	2	8	-63.5	-62.2	-51.4	-27	24.43
HT/VHT20 STBC, M8 to M15	2	8	-63.5	-62.2	-51.4	-27	24.43
HE20, M0 to M11 1ss	1	8	-66.7		-58.4	-27	31.4
HE20, M0 to M11 1ss	2	8	-66.7	-64.4	-54.1	-27	27.09
HE20, M0 to M11 2ss	2	8	-66.7	-64.4	-54.1	-27	27.09
HE20 Beam Forming, M0 to M11 1ss	2	11	-66.7	-64.4	-51.1	-27	24.09
HE20 Beam Forming, M0 to M11 2ss	2	8	-66.7	-64.4	-54.1	-27	27.09
HE20 STBC, M0 to M11 2ss	2	8	-66.7	-64.4	-54.1	-27	27.09

Frequency 5755 MHz



Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	8	-54.4		-46.0	-27	18.99
Non HT40, 6 to 54 Mbps	2	8	-54.4	-56.3	-43.8	-27	16.83
HT/VHT40, M0 to M7	1	8	-61.1		-52.5	-27	25.52
HT/VHT40, M0 to M7	2	8	-61.1	-61.6	-49.7	-27	22.75
HT/VHT40, M8 to M15	2	8	-61.1	-61.6	-49.7	-27	22.75
HT/VHT40 Beam Forming, M0 to M7	2	11	-61.1	-61.6	-46.7	-27	19.75
HT/VHT40 Beam Forming, M8 to M15	2	8	-61.1	-61.6	-49.7	-27	22.75
HT/VHT40 STBC, M8 to M15	2	8	-61.1	-61.6	-49.7	-27	22.75
HE40, M0 to M11 1ss	1	8	-60.5		-52.2	-27	25.17
HE40, M0 to M11 1ss	2	8	-60.5	-61.6	-49.7	-27	22.68
HE40, M0 to M11 2ss	2	8	-60.5	-61.6	-49.7	-27	22.68
HE40 Beam Forming, M0 to M11 1ss	2	11	-60.5	-61.6	-46.7	-27	19.68
HE40 Beam Forming, M0 to M11 2ss	2	8	-60.5	-61.6	-49.7	-27	22.68
HE40 STBC, M0 to M11 2ss	2	8	-60.5	-61.6	-49.7	-27	22.68

Frequency 5775 MHz


Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	8	-41.9		-33.5	-27	6.52
Non HT80, 6 to 54 Mbps	2	8	-41.9	-48.9	-32.7	-27	5.73
VHT80, M0 to M11 1ss	1	8	-48.5		-40.1	-27	13.06
VHT80, M0 to M11 1ss	2	8	-48.5	-52.0	-38.5	-27	11.45
VHT80, M0 to M11 2ss	2	8	-48.5	-52.0	-38.5	-27	11.45
VHT80 Beam Forming, M0 to M11 1ss	2	11	-48.5	-52.0	-35.5	-27	8.45
VHT80 Beam Forming, M0 to M11 2ss	2	8	-48.5	-52.0	-38.5	-27	11.45
VHT80 STBC, M0 to M11 2ss	2	8	-48.5	-52.0	-38.5	-27	11.45
HE80, M0 to M11 1ss	1	8	-47.5		-39.2	-27	12.17
HE80, M0 to M11 1ss	2	8	-47.5	-49.3	-37.0	-27	9.97
HE80, M0 to M11 2ss	2	8	-47.5	-49.3	-37.0	-27	9.97
HE80 Beam Forming, M0 to M11 1ss	2	11	-47.5	-49.3	-34.0	-27	6.97
HE80 Beam Forming, M0 to M11 2ss	2	8	-47.5	-49.3	-37.0	-27	9.97
HE80 STBC, M0 to M11 2ss	2	8	-47.5	-49.3	-37.0	-27	9.97

Data Screenshots – Antenna gain 8dBi.



5775 MHz: Non HT80, 6 to 54 Mbps

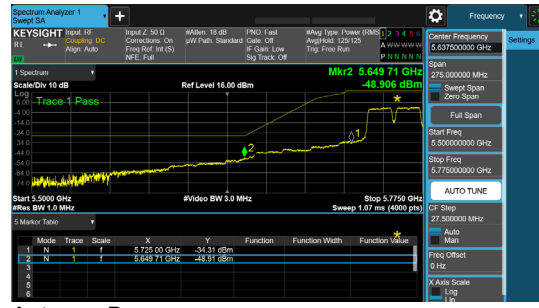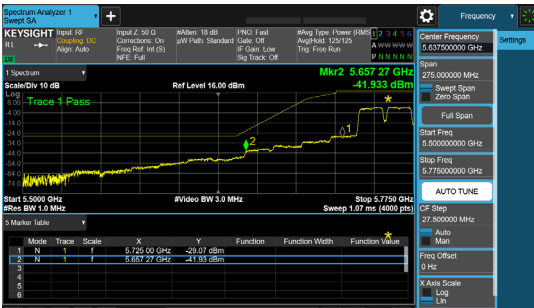

5775 MHz: Non HT80, 6 to 54 Mbps

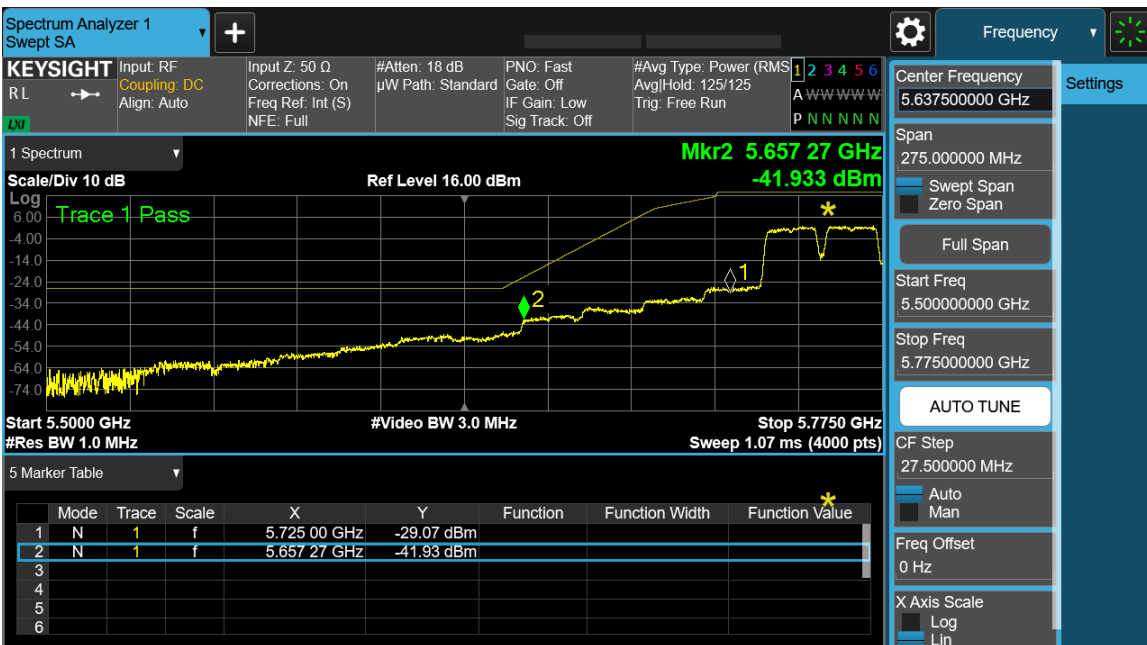

5775 MHz: HE80 Beam Forming, M0 to M11 1ss

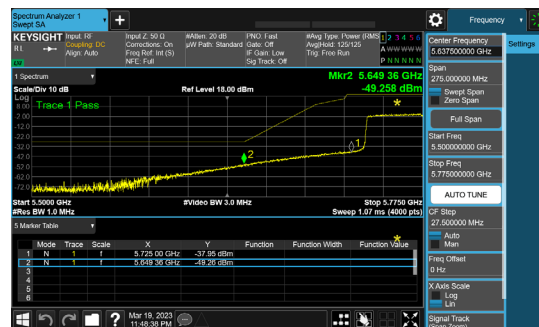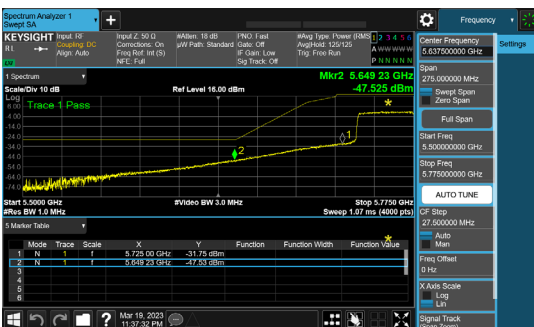

Conducted Band edge Peak 15407R. - Antenna gain 8dBi.**Frequency 5785 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	8	-63.1		-54.6	-27	27.62
Non HT20, 6 to 54 Mbps	2	8	-63.1	-62.9	-51.5	-27	24.51
Non HT20 Beam Forming, 6 to 54 Mbps	2	11	-63.1	-62.9	-48.5	-27	21.51
HT/VHT20, M0 to M7	1	8	-60.6		-52.2	-27	25.24
HT/VHT20, M0 to M7	2	8	-60.6	-60.4	-49.1	-27	22.13
HT/VHT20, M8 to M15	2	8	-60.6	-60.4	-49.1	-27	22.13
HT/VHT20 Beam Forming, M0 to M7	2	11	-60.6	-60.4	-46.1	-27	19.13
HT/VHT20 Beam Forming, M8 to M15	2	8	-60.6	-60.4	-49.1	-27	22.13
HT/VHT20 STBC, M8 to M15	2	8	-60.6	-60.4	-49.1	-27	22.13
HE20, M0 to M11 1ss	1	8	-60.8		-52.5	-27	25.5
HE20, M0 to M11 1ss	2	8	-60.8	-60.4	-49.3	-27	22.29
HE20, M0 to M11 2ss	2	8	-60.8	-60.4	-49.3	-27	22.29
HE20 Beam Forming, M0 to M11 1ss	2	11	-60.8	-60.4	-46.3	-27	19.29
HE20 Beam Forming, M0 to M11 2ss	2	8	-60.8	-60.4	-49.3	-27	22.29
HE20 STBC, M0 to M11 2ss	2	8	-60.8	-60.4	-49.3	-27	22.29

Frequency 5795 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	8	-59.0		-50.6	-27	23.59
Non HT40, 6 to 54 Mbps	2	8	-59.0	-59.1	-47.6	-27	20.63
HT/VHT40, M0 to M7	1	8	-60.5		-51.9	-27	24.92
HT/VHT40, M0 to M7	2	8	-60.5	-58.2	-47.6	-27	20.61
HT/VHT40, M8 to M15	2	8	-60.5	-58.2	-47.6	-27	20.61
HT/VHT40 Beam Forming, M0 to M7	2	11	-60.5	-58.2	-44.6	-27	17.61
HT/VHT40 Beam Forming, M8 to M15	2	8	-60.5	-58.2	-47.6	-27	20.61
HT/VHT40 STBC, M8 to M15	2	8	-60.5	-58.2	-47.6	-27	20.61
HE40, M0 to M11 1ss	1	8	-59.3		-51.0	-27	23.97
HE40, M0 to M11 1ss	2	8	-59.3	-58.9	-47.8	-27	20.76
HE40, M0 to M11 2ss	2	8	-59.3	-58.9	-47.8	-27	20.76
HE40 Beam Forming, M0 to M11 1ss	2	11	-59.3	-58.9	-44.8	-27	17.76
HE40 Beam Forming, M0 to M11 2ss	2	8	-59.3	-58.9	-47.8	-27	20.76
HE40 STBC, M0 to M11 2ss	2	8	-59.3	-58.9	-47.8	-27	20.76

Frequency 5825 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	8	-62.1		-53.6	-27	26.62
Non HT20, 6 to 54 Mbps	2	8	-62.1	-61.8	-50.5	-27	23.46
Non HT20 Beam Forming, 6 to 54 Mbps	2	11	-62.1	-61.8	-47.5	-27	20.46
HT/VHT20, M0 to M7	1	8	-62.8		-54.4	-27	27.44
HT/VHT20, M0 to M7	2	8	-62.8	-61.5	-50.7	-27	23.73
HT/VHT20, M8 to M15	2	8	-62.8	-61.5	-50.7	-27	23.73
HT/VHT20 Beam Forming, M0 to M7	2	11	-62.8	-61.5	-47.7	-27	20.73
HT/VHT20 Beam Forming, M8 to M15	2	8	-62.8	-61.5	-50.7	-27	23.73
HT/VHT20 STBC, M8 to M15	2	8	-62.8	-61.5	-50.7	-27	23.73
HE20, M0 to M11 1ss	1	8	-61.5		-53.2	-27	26.2
HE20, M0 to M11 1ss	2	8	-61.5	-62.1	-50.5	-27	23.48
HE20, M0 to M11 2ss	2	8	-61.5	-62.1	-50.5	-27	23.48
HE20 Beam Forming, M0 to M11 1ss	2	11	-61.5	-62.1	-47.5	-27	20.48
HE20 Beam Forming, M0 to M11 2ss	2	8	-61.5	-62.1	-50.5	-27	23.48
HE20 STBC, M0 to M11 2ss	2	8	-61.5	-62.1	-50.5	-27	23.48

Data Screenshots - Antenna gain 8dBi.

5795 MHz: HT/VHT40 Beam Forming, M0 to M7



Antenna A



Antenna B

5795 MHz: HE40 Beam Forming, M0 to M11 1ss




Antenna A




Antenna B

5785 MHz: HT/VHT20 Beam Forming, M0 to M7

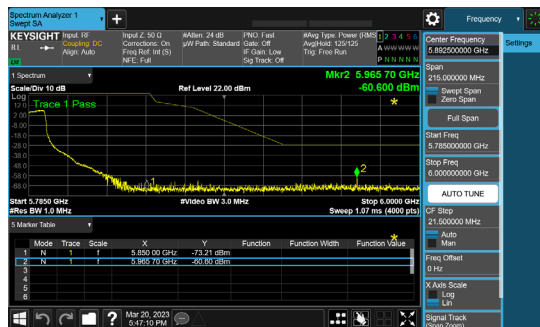

Antenna A

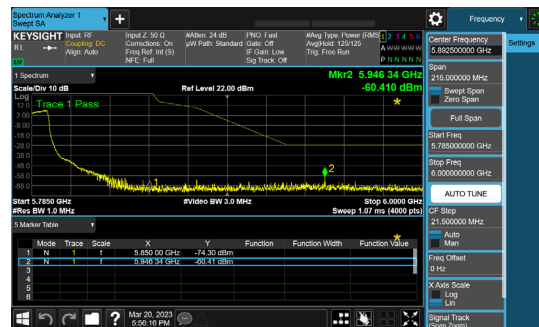

Antenna B

Conducted Band edge Peak 15407L – Antenna gain 10dBi.**Frequency 5745 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	10	-63.4		-52.9	-27	25.92
Non HT20, 6 to 54 Mbps	2	10	-63.4	-62.1	-49.2	-27	22.21
Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-63.4	-62.1	-49.2	-27	22.21
HT/VHT20, M0 to M7	1	10	-63.5		-53.1	-27	26.14
HT/VHT20, M0 to M7	2	10	-63.5	-62.2	-49.4	-27	22.43
HT/VHT20, M8 to M15	2	10	-63.5	-62.2	-49.4	-27	22.43
HT/VHT20 Beam Forming, M0 to M7	2	10	-63.5	-62.2	-49.4	-27	22.43
HT/VHT20 Beam Forming, M8 to M15	2	10	-63.5	-62.2	-49.4	-27	22.43
HT/VHT20 STBC, M8 to M15	2	10	-63.5	-62.2	-49.4	-27	22.43
HE20, M0 to M11 1ss	1	10	-66.7		-56.4	-27	29.4
HE20, M0 to M11 1ss	2	10	-66.7	-64.4	-52.1	-27	25.09
HE20, M0 to M11 2ss	2	10	-66.7	-64.4	-52.1	-27	25.09
HE20 Beam Forming, M0 to M11 1ss	2	10	-66.7	-64.4	-52.1	-27	25.09
HE20 Beam Forming, M0 to M11 2ss	2	10	-66.7	-64.4	-52.1	-27	25.09
HE20 STBC, M0 to M11 2ss	2	10	-66.7	-64.4	-52.1	-27	25.09

Frequency 5755 MHz



Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	10	-54.4		-44.0	-27	16.99
Non HT40, 6 to 54 Mbps	2	10	-54.4	-56.3	-41.8	-27	14.83
HT/VHT40, M0 to M7	1	10	-61.1		-50.5	-27	23.52
HT/VHT40, M0 to M7	2	10	-61.1	-61.6	-47.7	-27	20.75
HT/VHT40, M8 to M15	2	10	-61.1	-61.6	-47.7	-27	20.75
HT/VHT40 Beam Forming, M0 to M7	2	10	-61.1	-61.6	-47.7	-27	20.75
HT/VHT40 Beam Forming, M8 to M15	2	10	-61.1	-61.6	-47.7	-27	20.75
HT/VHT40 STBC, M8 to M15	2	10	-61.1	-61.6	-47.7	-27	20.75
HE40, M0 to M11 1ss	1	10	-60.5		-50.2	-27	23.17
HE40, M0 to M11 1ss	2	10	-60.5	-61.6	-47.7	-27	20.68
HE40, M0 to M11 2ss	2	10	-60.5	-61.6	-47.7	-27	20.68
HE40 Beam Forming, M0 to M11 1ss	2	10	-60.5	-61.6	-47.7	-27	20.68
HE40 Beam Forming, M0 to M11 2ss	2	10	-60.5	-61.6	-47.7	-27	20.68
HE40 STBC, M0 to M11 2ss	2	10	-60.5	-61.6	-47.7	-27	20.68

Frequency 5775 MHz


Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	10	-41.9		-31.5	-27	4.52
Non HT80, 6 to 54 Mbps	2	10	-41.9	-48.9	-30.7	-27	3.73
VHT80, M0 to M11 1ss	1	10	-48.5		-38.1	-27	11.06
VHT80, M0 to M11 1ss	2	10	-48.5	-52.0	-36.5	-27	9.45
VHT80, M0 to M11 2ss	2	10	-48.5	-52.0	-36.5	-27	9.45
VHT80 Beam Forming, M0 to M11 1ss	2	10	-48.5	-52.0	-36.5	-27	9.45
VHT80 Beam Forming, M0 to M11 2ss	2	10	-48.5	-52.0	-36.5	-27	9.45
VHT80 STBC, M0 to M11 2ss	2	10	-48.5	-52.0	-36.5	-27	9.45
HE80, M0 to M11 1ss	1	10	-47.5		-37.2	-27	10.17
HE80, M0 to M11 1ss	2	10	-47.5	-49.3	-35.0	-27	7.97
HE80, M0 to M11 2ss	2	10	-47.5	-49.3	-35.0	-27	7.97
HE80 Beam Forming, M0 to M11 1ss	2	10	-47.5	-49.3	-35.0	-27	7.97
HE80 Beam Forming, M0 to M11 2ss	2	10	-47.5	-49.3	-35.0	-27	7.97
HE80 STBC, M0 to M11 2ss	2	10	-47.5	-49.3	-35.0	-27	7.97

Data Screenshots – Antenna gain 10dBi.



5775 MHz: Non HT80, 6 to 54 Mbps

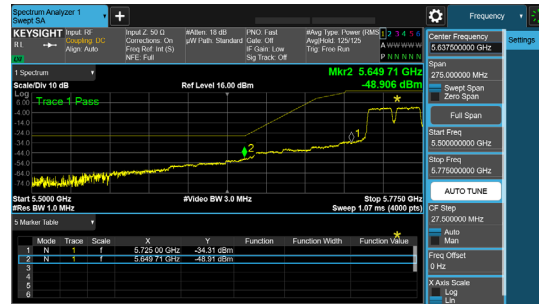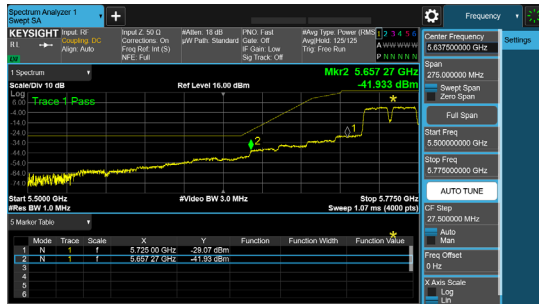

5775 MHz: Non HT80, 6 to 54 Mbps

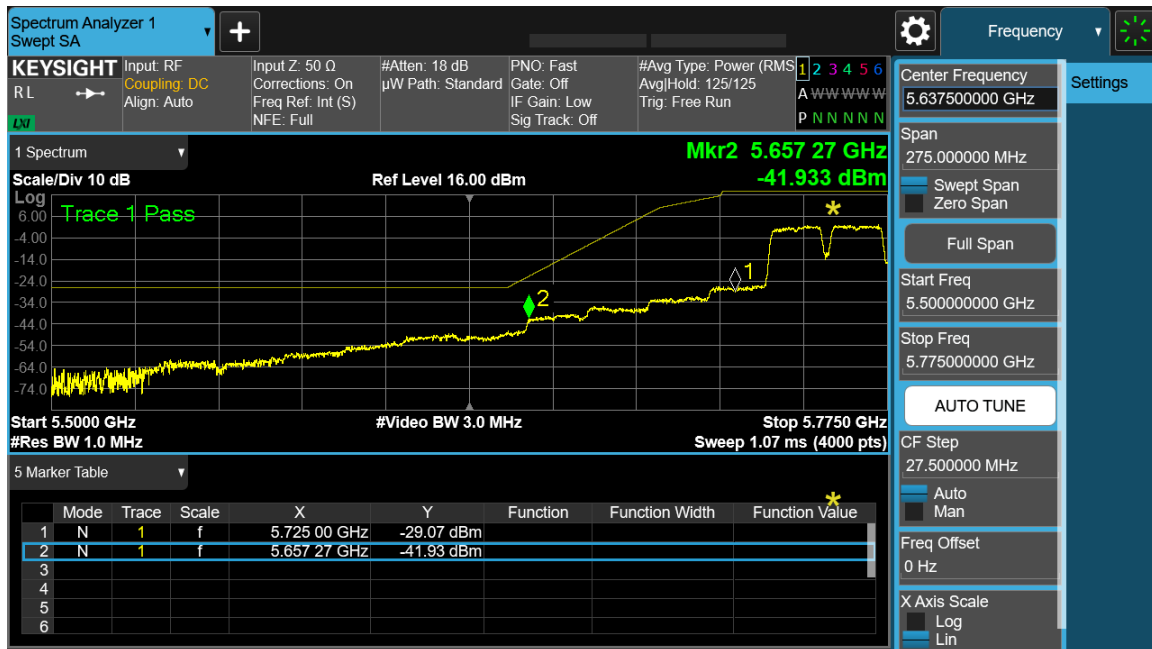

5775 MHz: HE80, M0 to M11 1ss

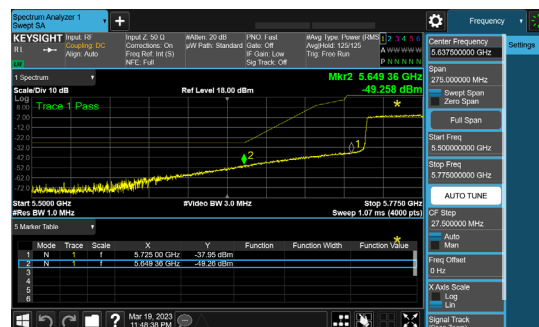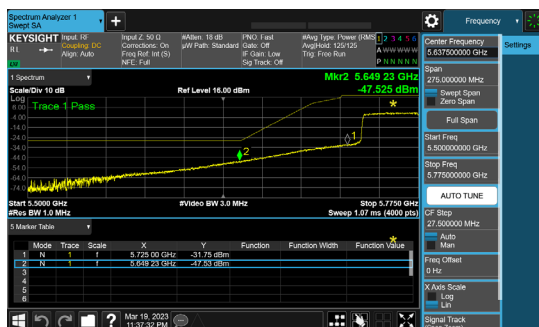

Conducted Band edge Peak 15407R. – Antenna gain 10dBi.**Frequency 5785 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	10	-63.1		-52.6	-27	25.62
Non HT20, 6 to 54 Mbps	2	10	-63.1	-62.9	-49.5	-27	22.51
Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-63.1	-62.9	-49.5	-27	22.51
HT/VHT20, M0 to M7	1	10	-60.6		-50.2	-27	23.24
HT/VHT20, M0 to M7	2	10	-60.6	-60.4	-47.1	-27	20.13
HT/VHT20, M8 to M15	2	10	-60.6	-60.4	-47.1	-27	20.13
HT/VHT20 Beam Forming, M0 to M7	2	10	-60.6	-60.4	-47.1	-27	20.13
HT/VHT20 Beam Forming, M8 to M15	2	10	-60.6	-60.4	-47.1	-27	20.13
HT/VHT20 STBC, M8 to M15	2	10	-60.6	-60.4	-47.1	-27	20.13
HE20, M0 to M11 1ss	1	10	-60.8		-50.5	-27	23.5
HE20, M0 to M11 1ss	2	10	-60.8	-60.4	-47.3	-27	20.29
HE20, M0 to M11 2ss	2	10	-60.8	-60.4	-47.3	-27	20.29
HE20 Beam Forming, M0 to M11 1ss	2	10	-60.8	-60.4	-47.3	-27	20.29
HE20 Beam Forming, M0 to M11 2ss	2	10	-60.8	-60.4	-47.3	-27	20.29
HE20 STBC, M0 to M11 2ss	2	10	-60.8	-60.4	-47.3	-27	20.29

Frequency 5795 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	10	-59.0		-48.6	-27	21.59
Non HT40, 6 to 54 Mbps	2	10	-59.0	-59.1	-45.6	-27	18.63
HT/VHT40, M0 to M7	1	10	-60.5		-49.9	-27	22.92
HT/VHT40, M0 to M7	2	10	-60.5	-58.2	-45.6	-27	18.61
HT/VHT40, M8 to M15	2	10	-60.5	-58.2	-45.6	-27	18.61
HT/VHT40 Beam Forming, M0 to M7	2	10	-60.5	-58.2	-45.6	-27	18.61
HT/VHT40 Beam Forming, M8 to M15	2	10	-60.5	-58.2	-45.6	-27	18.61
HT/VHT40 STBC, M8 to M15	2	10	-60.5	-58.2	-45.6	-27	18.61
HE40, M0 to M11 1ss	1	10	-59.3		-49.0	-27	21.97
HE40, M0 to M11 1ss	2	10	-59.3	-58.9	-45.8	-27	18.76
HE40, M0 to M11 2ss	2	10	-59.3	-58.9	-45.8	-27	18.76
HE40 Beam Forming, M0 to M11 1ss	2	10	-59.3	-58.9	-45.8	-27	18.76
HE40 Beam Forming, M0 to M11 2ss	2	10	-59.3	-58.9	-45.8	-27	18.76
HE40 STBC, M0 to M11 2ss	2	10	-59.3	-58.9	-45.8	-27	18.76

Frequency 5825 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	10	-62.1		-51.6	-27	24.62
Non HT20, 6 to 54 Mbps	2	10	-62.1	-61.8	-48.5	-27	21.46
Non HT20 Beam Forming, 6 to 54 Mbps	2	10	-62.1	-61.8	-48.5	-27	21.46
HT/VHT20, M0 to M7	1	10	-62.8		-52.4	-27	25.44
HT/VHT20, M0 to M7	2	10	-62.8	-61.5	-48.7	-27	21.73
HT/VHT20, M8 to M15	2	10	-62.8	-61.5	-48.7	-27	21.73
HT/VHT20 Beam Forming, M0 to M7	2	10	-62.8	-61.5	-48.7	-27	21.73
HT/VHT20 Beam Forming, M8 to M15	2	10	-62.8	-61.5	-48.7	-27	21.73
HT/VHT20 STBC, M8 to M15	2	10	-62.8	-61.5	-48.7	-27	21.73
HE20, M0 to M11 1ss	1	10	-61.5		-51.2	-27	24.2
HE20, M0 to M11 1ss	2	10	-61.5	-62.1	-48.5	-27	21.48
HE20, M0 to M11 2ss	2	10	-61.5	-62.1	-48.5	-27	21.48
HE20 Beam Forming, M0 to M11 1ss	2	10	-61.5	-62.1	-48.5	-27	21.48
HE20 Beam Forming, M0 to M11 2ss	2	10	-61.5	-62.1	-48.5	-27	21.48
HE20 STBC, M0 to M11 2ss	2	10	-61.5	-62.1	-48.5	-27	21.48

Data Screenshots – Antenna gain 10dBi.

5795 MHz: HT/VHT40, M0 to M7



5795 MHz: HT/VHT40, M8 to M15



5795 MHz: HT/VHT40 Beam Forming, M0 to M7



Conducted Band edge Peak 15407L. – Antenna gain 13dBi.**Frequency 5745 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-63.4		-49.9	-27	22.92
Non HT20, 6 to 54 Mbps	2	13	-63.4	-62.1	-46.2	-27	19.21
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-63.4	-62.1	-46.2	-27	19.21
HT/VHT20, M0 to M7	1	13	-63.5		-50.1	-27	23.14
HT/VHT20, M0 to M7	2	13	-63.5	-62.2	-46.4	-27	19.43
HT/VHT20, M8 to M15	2	13	-63.5	-62.2	-46.4	-27	19.43
HT/VHT20 Beam Forming, M0 to M7	2	13	-63.5	-62.2	-46.4	-27	19.43
HT/VHT20 Beam Forming, M8 to M15	2	13	-63.5	-62.2	-46.4	-27	19.43
HT/VHT20 STBC, M8 to M15	2	13	-63.5	-62.2	-46.4	-27	19.43
HE20, M0 to M11 1ss	1	13	-66.7		-53.4	-27	26.4
HE20, M0 to M11 1ss	2	13	-66.7	-64.4	-49.1	-27	22.09
HE20, M0 to M11 2ss	2	13	-66.7	-64.4	-49.1	-27	22.09
HE20 Beam Forming, M0 to M11 1ss	2	13	-66.7	-64.4	-49.1	-27	22.09
HE20 Beam Forming, M0 to M11 2ss	2	13	-66.7	-64.4	-49.1	-27	22.09
HE20 STBC, M0 to M11 2ss	2	13	-66.7	-64.4	-49.1	-27	22.09

Frequency 5755 MHz



Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band Edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	13	-54.4		-41.0	-27	13.99
Non HT40, 6 to 54 Mbps	2	13	-54.4	-56.3	-38.8	-27	11.83
HT/VHT40, M0 to M7	1	13	-61.1		-47.5	-27	20.52
HT/VHT40, M0 to M7	2	13	-61.1	-61.6	-44.7	-27	17.75
HT/VHT40, M8 to M15	2	13	-61.1	-61.6	-44.7	-27	17.75
HT/VHT40 Beam Forming, M0 to M7	2	13	-61.1	-61.6	-44.7	-27	17.75
HT/VHT40 Beam Forming, M8 to M15	2	13	-61.1	-61.6	-44.7	-27	17.75
HT/VHT40 STBC, M8 to M15	2	13	-61.1	-61.6	-44.7	-27	17.75
HE40, M0 to M11 1ss	1	13	-60.5		-47.2	-27	20.17
HE40, M0 to M11 1ss	2	13	-60.5	-61.6	-44.7	-27	17.68
HE40, M0 to M11 2ss	2	13	-60.5	-61.6	-44.7	-27	17.68
HE40 Beam Forming, M0 to M11 1ss	2	13	-60.5	-61.6	-44.7	-27	17.68
HE40 Beam Forming, M0 to M11 2ss	2	13	-60.5	-61.6	-44.7	-27	17.68
HE40 STBC, M0 to M11 2ss	2	13	-60.5	-61.6	-44.7	-27	17.68

Frequency 5775 MHz


Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	13	-41.9		-28.5	-27	1.52
Non HT80, 6 to 54 Mbps	2	13	-41.9	-48.9	-27.7	-27	0.73
VHT80, M0 to M11 1ss	1	13	-48.5		-35.1	-27	8.06
VHT80, M0 to M11 1ss	2	13	-48.5	-52.0	-33.5	-27	6.45
VHT80, M0 to M11 2ss	2	13	-48.5	-52.0	-33.5	-27	6.45
VHT80 Beam Forming, M0 to M11 1ss	2	13	-48.5	-52.0	-33.5	-27	6.45
VHT80 Beam Forming, M0 to M11 2ss	2	13	-48.5	-52.0	-33.5	-27	6.45
VHT80 STBC, M0 to M11 2ss	2	13	-48.5	-52.0	-33.5	-27	6.45
HE80, M0 to M11 1ss	1	13	-47.5		-34.2	-27	7.17
HE80, M0 to M11 1ss	2	13	-47.5	-49.3	-32.0	-27	4.97
HE80, M0 to M11 2ss	2	13	-47.5	-49.3	-32.0	-27	4.97
HE80 Beam Forming, M0 to M11 1ss	2	13	-47.5	-49.3	-32.0	-27	4.97
HE80 Beam Forming, M0 to M11 2ss	2	13	-47.5	-49.3	-32.0	-27	4.97
HE80 STBC, M0 to M11 2ss	2	13	-47.5	-49.3	-32.0	-27	4.97

Data Screenshots – Antenna gain 13dBi.


5775 MHz: Non HT80, 6 to 54 Mbps

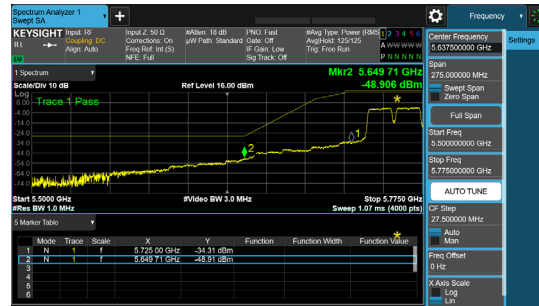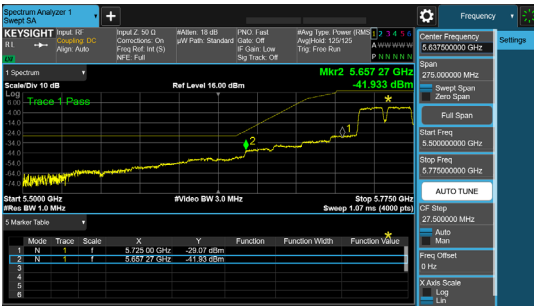

5775 MHz: Non HT80, 6 to 54 Mbps

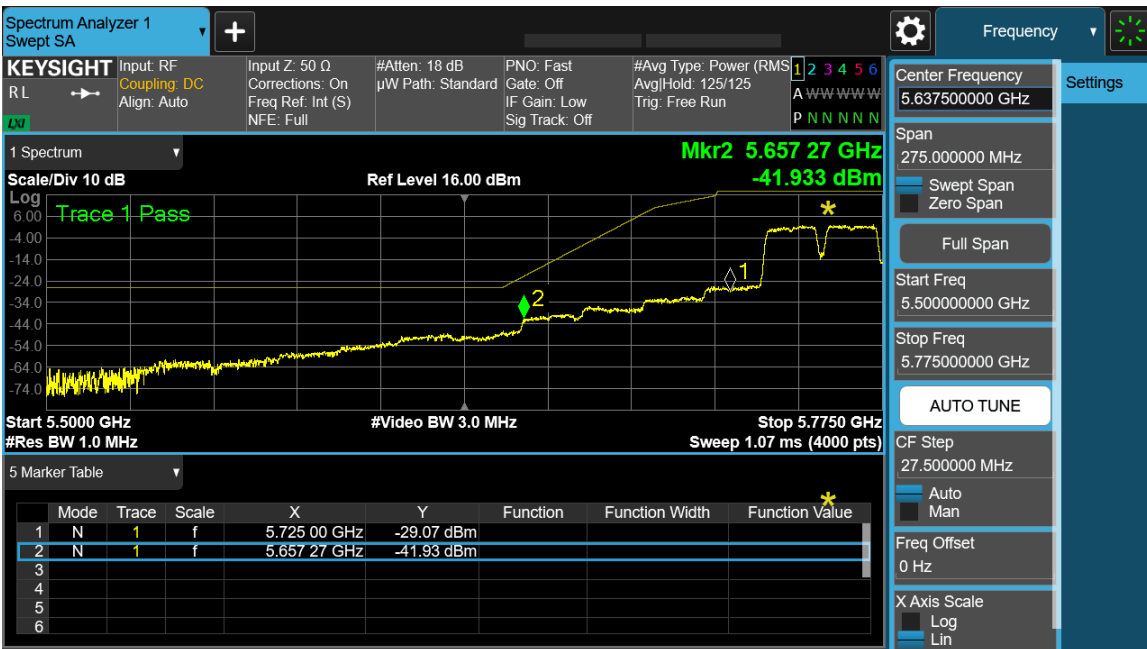

5775 MHz: HE80, M0 to M11 1ss

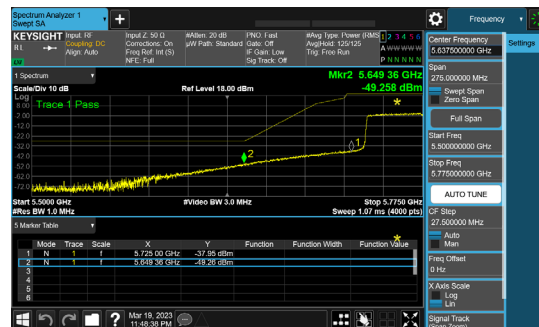

Conducted Band edge Peak 15407R. – Antenna gain 13dBi.**Frequency 5785 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-63.1		-49.6	-27	22.62
Non HT20, 6 to 54 Mbps	2	13	-63.1	-62.9	-46.5	-27	19.51
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-63.1	-62.9	-46.5	-27	19.51
HT/VHT20, M0 to M7	1	13	-60.6		-47.2	-27	20.24
HT/VHT20, M0 to M7	2	13	-60.6	-60.4	-44.1	-27	17.13
HT/VHT20, M8 to M15	2	13	-60.6	-60.4	-44.1	-27	17.13
HT/VHT20 Beam Forming, M0 to M7	2	13	-60.6	-60.4	-44.1	-27	17.13
HT/VHT20 Beam Forming, M8 to M15	2	13	-60.6	-60.4	-44.1	-27	17.13
HT/VHT20 STBC, M8 to M15	2	13	-60.6	-60.4	-44.1	-27	17.13
HE20, M0 to M11 1ss	1	13	-60.8		-47.5	-27	20.5
HE20, M0 to M11 1ss	2	13	-60.8	-60.4	-44.3	-27	17.29
HE20, M0 to M11 2ss	2	13	-60.8	-60.4	-44.3	-27	17.29
HE20 Beam Forming, M0 to M11 1ss	2	13	-60.8	-60.4	-44.3	-27	17.29
HE20 Beam Forming, M0 to M11 2ss	2	13	-60.8	-60.4	-44.3	-27	17.29
HE20 STBC, M0 to M11 2ss	2	13	-60.8	-60.4	-44.3	-27	17.29

Frequency 5795 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	13	-59.0		-45.6	-27	18.59
Non HT40, 6 to 54 Mbps	2	13	-59.0	-59.1	-42.6	-27	15.63
HT/VHT40, M0 to M7	1	13	-60.5		-46.9	-27	19.92
HT/VHT40, M0 to M7	2	13	-60.5	-58.2	-42.6	-27	15.61
HT/VHT40, M8 to M15	2	13	-60.5	-58.2	-42.6	-27	15.61
HT/VHT40 Beam Forming, M0 to M7	2	13	-60.5	-58.2	-42.6	-27	15.61
HT/VHT40 Beam Forming, M8 to M15	2	13	-60.5	-58.2	-42.6	-27	15.61
HT/VHT40 STBC, M8 to M15	2	13	-60.5	-58.2	-42.6	-27	15.61
HE40, M0 to M11 1ss	1	13	-59.3		-46.0	-27	18.97
HE40, M0 to M11 1ss	2	13	-59.3	-58.9	-42.8	-27	15.76
HE40, M0 to M11 2ss	2	13	-59.3	-58.9	-42.8	-27	15.76
HE40 Beam Forming, M0 to M11 1ss	2	13	-59.3	-58.9	-42.8	-27	15.76
HE40 Beam Forming, M0 to M11 2ss	2	13	-59.3	-58.9	-42.8	-27	15.76
HE40 STBC, M0 to M11 2ss	2	13	-59.3	-58.9	-42.8	-27	15.76

Frequency 5825 MHz

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	13	-62.1		-48.6	-27	21.62
Non HT20, 6 to 54 Mbps	2	13	-62.1	-61.8	-45.5	-27	18.46
Non HT20 Beam Forming, 6 to 54 Mbps	2	13	-62.1	-61.8	-45.5	-27	18.46
HT/VHT20, M0 to M7	1	13	-62.8		-49.4	-27	22.44
HT/VHT20, M0 to M7	2	13	-62.8	-61.5	-45.7	-27	18.73
HT/VHT20, M8 to M15	2	13	-62.8	-61.5	-45.7	-27	18.73
HT/VHT20 Beam Forming, M0 to M7	2	13	-62.8	-61.5	-45.7	-27	18.73
HT/VHT20 Beam Forming, M8 to M15	2	13	-62.8	-61.5	-45.7	-27	18.73
HT/VHT20 STBC, M8 to M15	2	13	-62.8	-61.5	-45.7	-27	18.73
HE20, M0 to M11 1ss	1	13	-61.5		-48.2	-27	21.2
HE20, M0 to M11 1ss	2	13	-61.5	-62.1	-45.5	-27	18.48
HE20, M0 to M11 2ss	2	13	-61.5	-62.1	-45.5	-27	18.48
HE20 Beam Forming, M0 to M11 1ss	2	13	-61.5	-62.1	-45.5	-27	18.48
HE20 Beam Forming, M0 to M11 2ss	2	13	-61.5	-62.1	-45.5	-27	18.48
HE20 STBC, M0 to M11 2ss	2	13	-61.5	-62.1	-45.5	-27	18.48

Data Screenshots – Antenna gain 13dBi.

5795 MHz: HT/VHT40, M0 to M7



5795 MHz: HT/VHT40, M8 to M15



5795 MHz: HT/VHT40 Beam Forming, M0 to M7



Conducted Band edge Peak 15407L. – Antenna gain 15dBi.**Frequency 5745 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	15	-63.4		-47.9	-27	20.92
Non HT20, 6 to 54 Mbps	2	15	-64.1	-63.0	-45.0	-27	18.02
Non HT20 Beam Forming, 6 to 54 Mbps	2	15	-64.1	-63.0	-45.0	-27	18.02
HT/VHT20, M0 to M7	1	15	-63.5		-48.1	-27	21.14
HT/VHT20, M0 to M7	2	15	-63.5	-62.2	-44.4	-27	17.43
HT/VHT20, M8 to M15	2	15	-63.5	-62.2	-44.4	-27	17.43
HT/VHT20 Beam Forming, M0 to M7	2	15	-63.5	-62.2	-44.4	-27	17.43
HT/VHT20 Beam Forming, M8 to M15	2	15	-63.5	-62.2	-44.4	-27	17.43
HT/VHT20 STBC, M8 to M15	2	15	-63.5	-62.2	-44.4	-27	17.43
HE20, M0 to M11 1ss	1	15	-66.7		-51.4	-27	24.4
HE20, M0 to M11 1ss	2	15	-64.3	-63.7	-45.7	-27	18.68
HE20, M0 to M11 2ss	2	15	-64.3	-63.7	-45.7	-27	18.68
HE20 Beam Forming, M0 to M11 1ss	2	15	-64.3	-63.7	-45.7	-27	18.68
HE20 Beam Forming, M0 to M11 2ss	2	15	-64.3	-63.7	-45.7	-27	18.68
HE20 STBC, M0 to M11 2ss	2	15	-64.3	-63.7	-45.7	-27	18.68

Frequency 5755 MHz


Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	15	-54.4		-39.0	-27	11.99
Non HT40, 6 to 54 Mbps	2	15	-58.3	-58.8	-40.1	-27	13.13
HT/VHT40, M0 to M7	1	15	-61.1		-45.5	-27	18.52
HT/VHT40, M0 to M7	2	15	-61.4	-61.7	-43.0	-27	15.95
HT/VHT40, M8 to M15	2	15	-61.4	-61.7	-43.0	-27	15.95
HT/VHT40 Beam Forming, M0 to M7	2	15	-61.4	-61.7	-43.0	-27	15.95
HT/VHT40 Beam Forming, M8 to M15	2	15	-61.4	-61.7	-43.0	-27	15.95
HT/VHT40 STBC, M8 to M15	2	15	-61.4	-61.7	-43.0	-27	15.95
HE40, M0 to M11 1ss	1	15	-60.5		-45.2	-27	18.17
HE40, M0 to M11 1ss	2	15	-62.9	-63.2	-44.7	-27	17.71
HE40, M0 to M11 2ss	2	15	-62.9	-63.2	-44.7	-27	17.71
HE40 Beam Forming, M0 to M11 1ss	2	15	-62.9	-63.2	-44.7	-27	17.71
HE40 Beam Forming, M0 to M11 2ss	2	15	-62.9	-63.2	-44.7	-27	17.71
HE40 STBC, M0 to M11 2ss	2	15	-62.9	-63.2	-44.7	-27	17.71

Frequency 5775 MHz


Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT80, 6 to 54 Mbps	1	15	-44.9		-29.5	-27	2.52
Non HT80, 6 to 54 Mbps	2	15	-44.9	-52.0	-28.7	-27	1.74
VHT80, M0 to M11 1ss	1	15	-48.5		-33.1	-27	6.06
VHT80, M0 to M11 1ss	2	15	-52.9	-56.3	-35.8	-27	8.82
VHT80, M0 to M11 2ss	2	15	-52.9	-56.3	-35.8	-27	8.82
VHT80 Beam Forming, M0 to M11 1ss	2	15	-52.9	-56.3	-35.8	-27	8.82
VHT80 Beam Forming, M0 to M11 2ss	2	15	-52.9	-56.3	-35.8	-27	8.82
VHT80 STBC, M0 to M11 2ss	2	15	-52.9	-56.3	-35.8	-27	8.82
HE80, M0 to M11 1ss	1	15	-47.5		-32.2	-27	5.17
HE80, M0 to M11 1ss	2	15	-51.0	-54.1	-33.9	-27	6.94
HE80, M0 to M11 2ss	2	15	-51.0	-54.1	-33.9	-27	6.94
HE80 Beam Forming, M0 to M11 1ss	2	15	-51.0	-54.1	-33.9	-27	6.94
HE80 Beam Forming, M0 to M11 2ss	2	15	-51.0	-54.1	-33.9	-27	6.94
HE80 STBC, M0 to M11 2ss	2	15	-51.0	-54.1	-33.9	-27	6.94

Data Screenshots – Antenna gain 15dBi.

5775 MHz: Non HT80, 6 to 54 Mbps

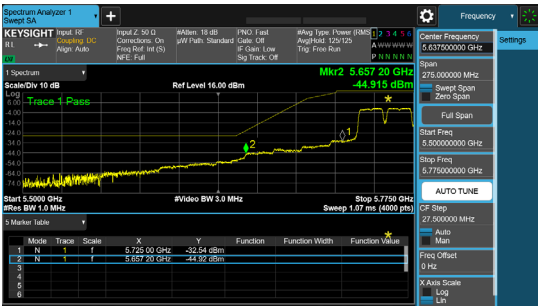


Antenna A

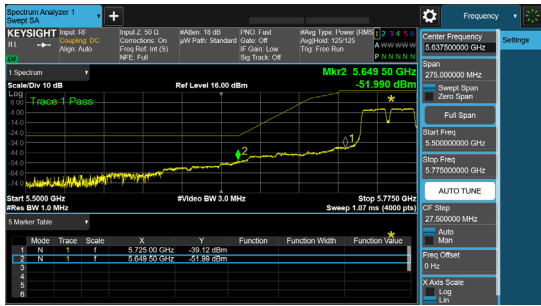


Antenna B

5775 MHz: Non HT80, 6 to 54 Mbps

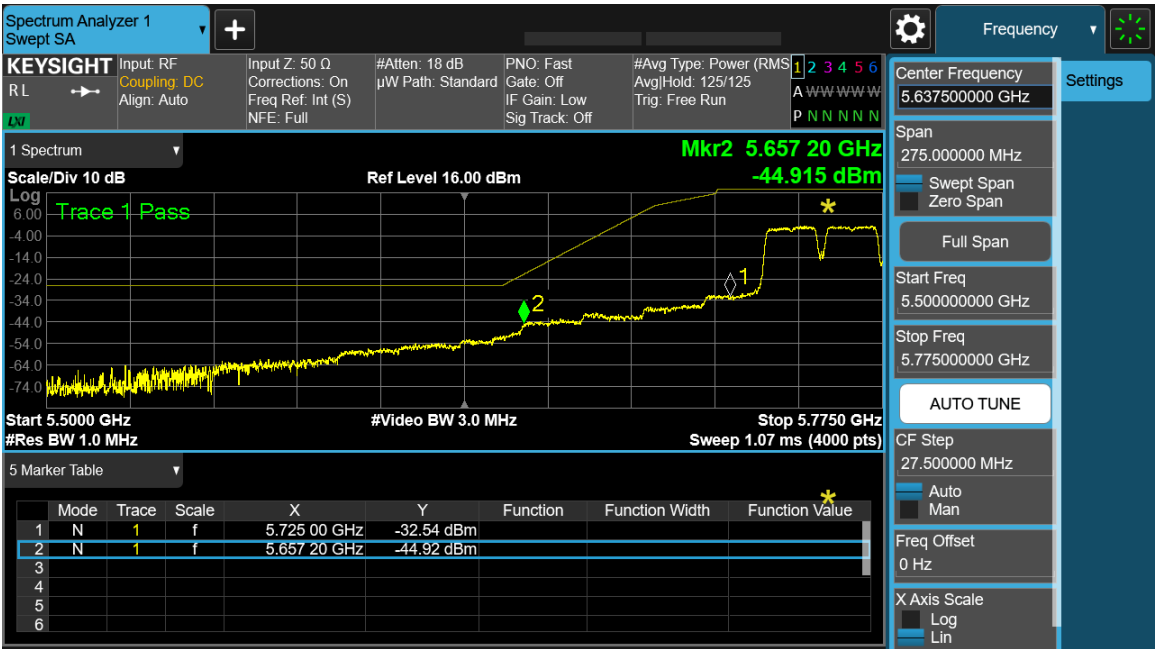

Antenna A

5775 MHz: HE80, M0 to M11 1ss

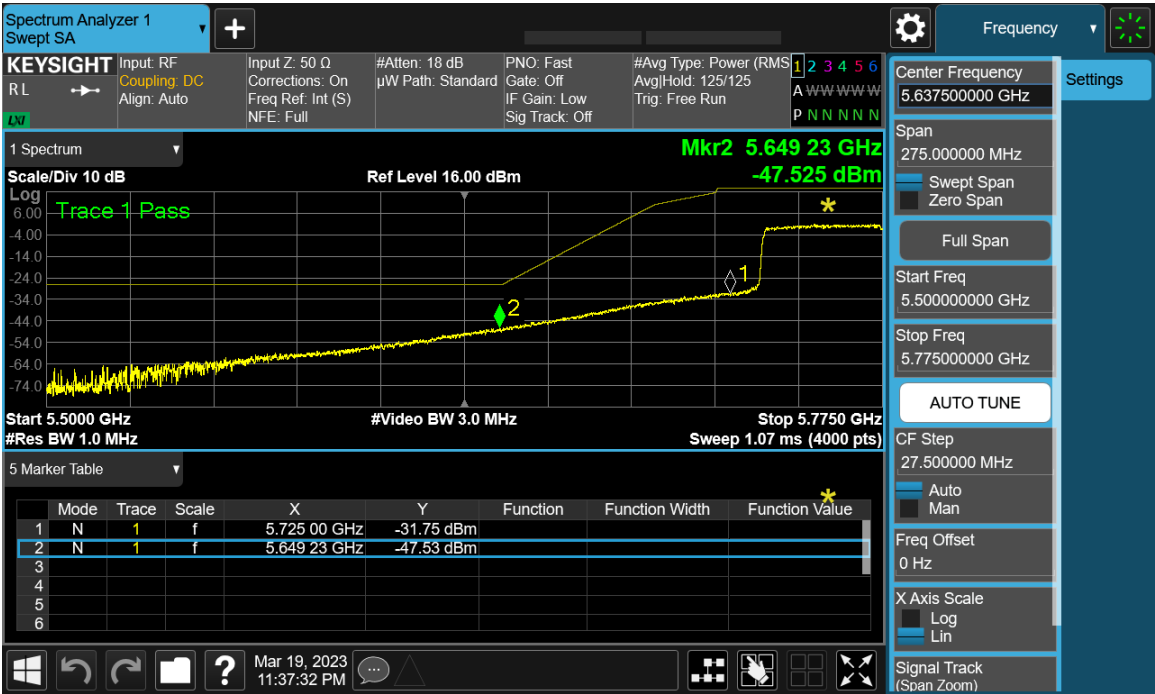

Antenna A

Conducted Band edge Peak 15407R. – Antenna gain 15dBi.**Frequency 5785 MHz**

Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	15	-63.1		-47.6	-27	20.62
Non HT20, 6 to 54 Mbps	2	15	-63.1	-62.9	-44.5	-27	17.51
Non HT20 Beam Forming, 6 to 54 Mbps	2	15	-63.1	-62.9	-44.5	-27	17.51
HT/VHT20, M0 to M7	1	15	-60.6		-45.2	-27	18.24
HT/VHT20, M0 to M7	2	15	-60.6	-60.4	-42.1	-27	15.13
HT/VHT20, M8 to M15	2	15	-60.6	-60.4	-42.1	-27	15.13
HT/VHT20 Beam Forming, M0 to M7	2	15	-60.6	-60.4	-42.1	-27	15.13
HT/VHT20 Beam Forming, M8 to M15	2	15	-60.6	-60.4	-42.1	-27	15.13
HT/VHT20 STBC, M8 to M15	2	15	-60.6	-60.4	-42.1	-27	15.13
HE20, M0 to M11 1ss	1	15	-60.8		-45.5	-27	18.5
HE20, M0 to M11 1ss	2	15	-60.8	-60.4	-42.3	-27	15.29
HE20, M0 to M11 2ss	2	15	-60.8	-60.4	-42.3	-27	15.29
HE20 Beam Forming, M0 to M11 1ss	2	15	-60.8	-60.4	-42.3	-27	15.29
HE20 Beam Forming, M0 to M11 2ss	2	15	-60.8	-60.4	-42.3	-27	15.29
HE20 STBC, M0 to M11 2ss	2	15	-60.8	-60.4	-42.3	-27	15.29

Frequency 5795 MHz


Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT40, 6 to 54 Mbps	1	15	-59.0		-43.6	-27	16.59
Non HT40, 6 to 54 Mbps	2	15	-59.0	-59.1	-40.6	-27	13.63
HT/VHT40, M0 to M7	1	15	-60.5		-44.9	-27	17.92
HT/VHT40, M0 to M7	2	15	-60.4	-58.4	-40.7	-27	13.69
HT/VHT40, M8 to M15	2	15	-60.4	-58.4	-40.7	-27	13.69
HT/VHT40 Beam Forming, M0 to M7	2	15	-60.4	-58.4	-40.7	-27	13.69
HT/VHT40 Beam Forming, M8 to M15	2	15	-60.4	-58.4	-40.7	-27	13.69
HT/VHT40 STBC, M8 to M15	2	15	-60.4	-58.4	-40.7	-27	13.69
HE40, M0 to M11 1ss	1	15	-59.3		-44.0	-27	16.97
HE40, M0 to M11 1ss	2	15	-59.3	-58.9	-40.8	-27	13.76
HE40, M0 to M11 2ss	2	15	-59.3	-58.9	-40.8	-27	13.76
HE40 Beam Forming, M0 to M11 1ss	2	15	-59.3	-58.9	-40.8	-27	13.76
HE40 Beam Forming, M0 to M11 2ss	2	15	-59.3	-58.9	-40.8	-27	13.76
HE40 STBC, M0 to M11 2ss	2	15	-59.3	-58.9	-40.8	-27	13.76

Frequency 5825 MHz



Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Band edge Level (dBm)	Tx 2 Band edge Level (dBm)	Total Tx Band edge Level (dBm)	Limit (dB)	Margin (dB)
Non HT20, 6 to 54 Mbps	1	15	-62.1		-46.6	-27	19.62
Non HT20, 6 to 54 Mbps	2	15	-62.1	-61.8	-43.5	-27	16.46
Non HT20 Beam Forming, 6 to 54 Mbps	2	15	-62.1	-61.8	-43.5	-27	16.46
HT/VHT20, M0 to M7	1	15	-62.8		-47.4	-27	20.44
HT/VHT20, M0 to M7	2	15	-62.8	-61.5	-43.7	-27	16.73
HT/VHT20, M8 to M15	2	15	-62.8	-61.5	-43.7	-27	16.73
HT/VHT20 Beam Forming, M0 to M7	2	15	-62.8	-61.5	-43.7	-27	16.73
HT/VHT20 Beam Forming, M8 to M15	2	15	-62.8	-61.5	-43.7	-27	16.73
HT/VHT20 STBC, M8 to M15	2	15	-62.8	-61.5	-43.7	-27	16.73
HE20, M0 to M11 1ss	1	15	-61.5		-46.2	-27	19.2
HE20, M0 to M11 1ss	2	15	-62.6	-60.3	-43.0	-27	15.99
HE20, M0 to M11 2ss	2	15	-62.6	-60.3	-43.0	-27	15.99
HE20 Beam Forming, M0 to M11 1ss	2	15	-62.6	-60.3	-43.0	-27	15.99
HE20 Beam Forming, M0 to M11 2ss	2	15	-62.6	-60.3	-43.0	-27	15.99
HE20 STBC, M0 to M11 2ss	2	15	-62.6	-60.3	-43.0	-27	15.99

Data Screenshots – Antenna gain 15dBi.


5795 MHz: Non HT40, 6 to 54 Mbps

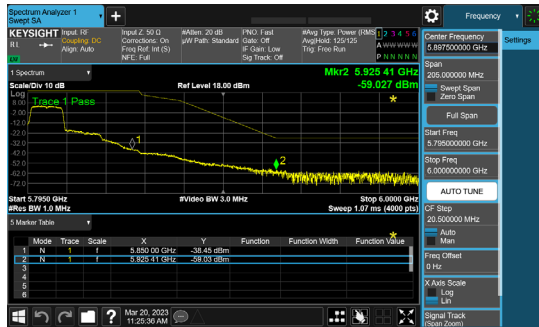

5795 MHz: HT/VHT40, M0 to M7

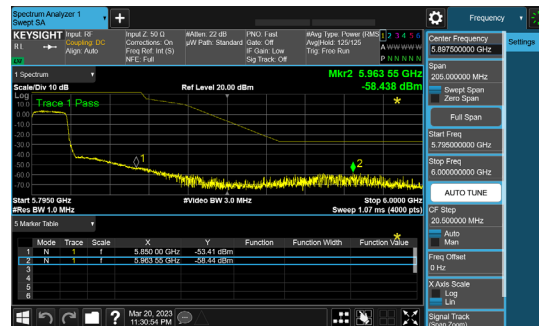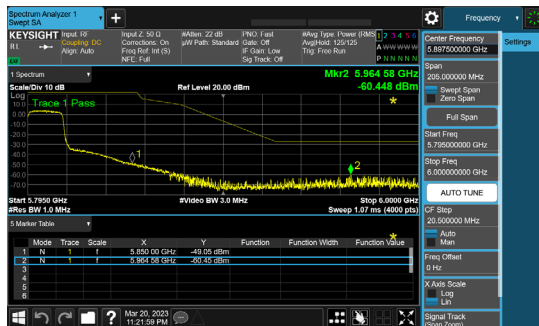


5795 MHz: HT/VHT40, M8 to M15

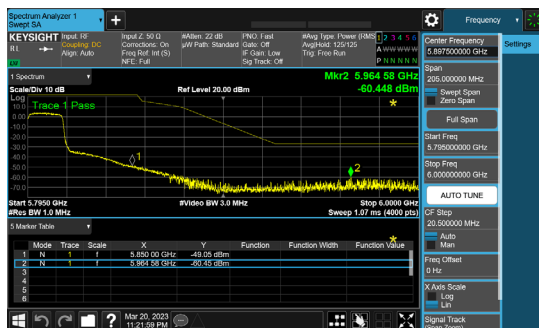


Appendix B: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 125 West Tasman Drive, San Jose, CA 95134, USA

Radiated Emission Setup Diagram-Below 1G

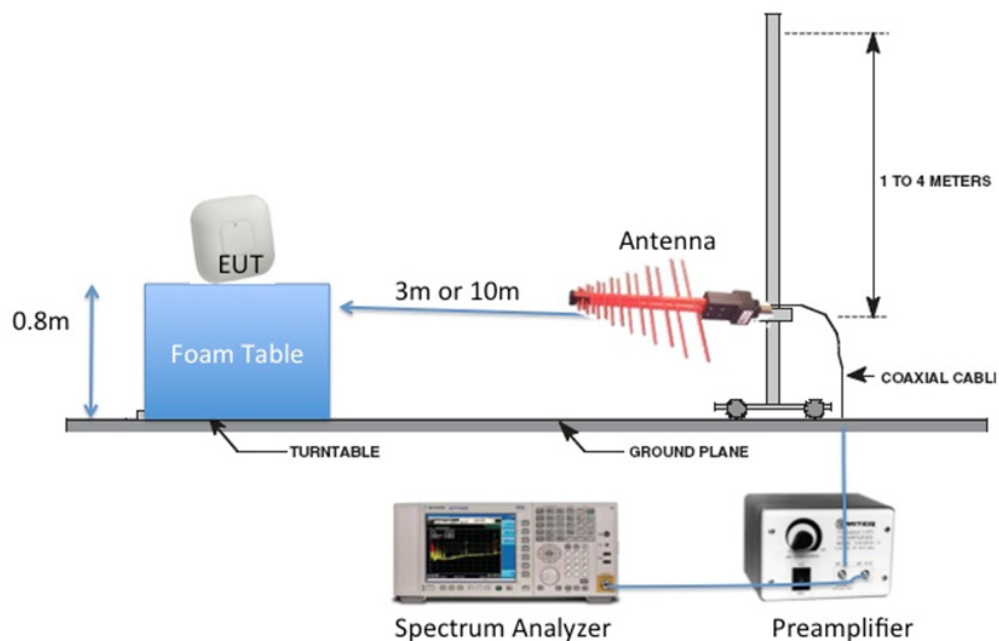

Radiated Emission Setup Diagram-Above 1G

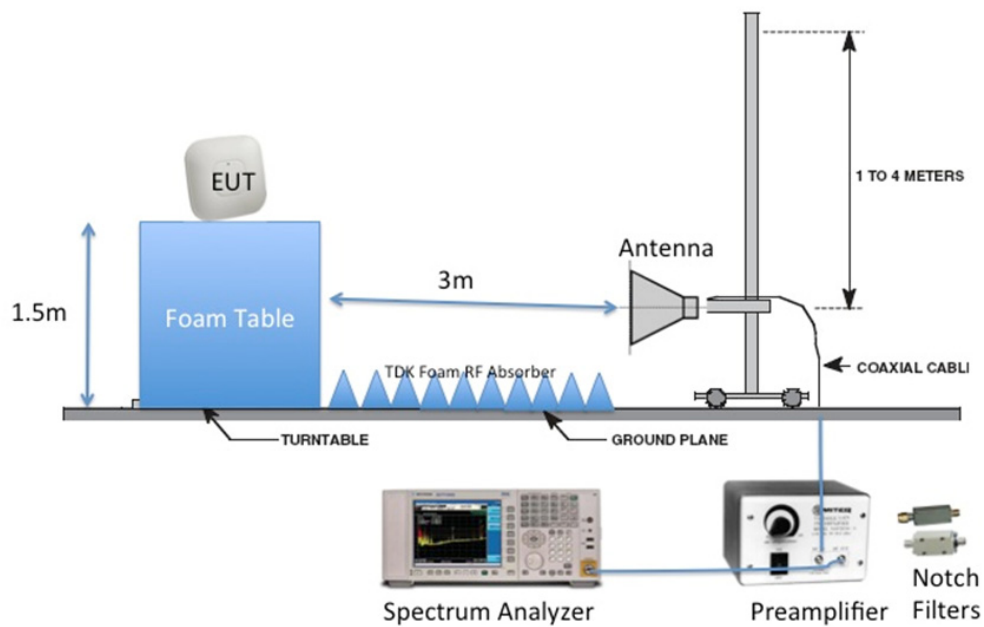

B.1: Radiated Spurious Emissions

FCC 15.205 | 15.407 | LP0002 (2018-01-10) (3.6)

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Radiated Spurious emissions results are covered in **EDCS # 23771103**

B.2: Radiated Emissions 30MHz to 1GHz

FCC 15.209 | 15.205 | 15.407

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)) and RSS-Gen §8.9.

Ref. ANSI C63.10: 2013 section 6.5

Radiated Spurious emissions results are covered in **EDCS # 23771103**

B.3: AC Conducted Emissions

FCC 15.207 | LP0002 (2020-07-01) (3.3)

Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.

Measurement Procedure

Accordance with ANSI C63.10:2013 section 6.2

Section 1 : Test Case Details

Test Case ID: 5088		Test Type: Conducted Emissions		
Product Standard	Port Type	Test Details		Comments
15.207	DC (Indoor)	Start Freq: 0.15MHz - Stop Freq: 30MHz Power: DC Range : 150KHz to 30MHz. Class: N/A Measure: Voltage(dBuV) Detector(s): Quasi-Peak and Average 150kHz - 500kHz - 89dBuV (QP) 76(AV) 500kHz - 30MHz - 83dBuV (QP) 70(AV)		ANSI C63.4.
Overall Result		Pass		
Deviation		NA		

Section 2:**Subtest Details**

Subtest Number: 5088-1 Subtest Date : 5/31/2023		
Engineer	Evelyn Preza	
Lab Information	Bldg. P - Shield Room 1	
Subtest Results		
Subtest Title	5088-1	
Port Reference	[J] DC Input	
Measured Voltage	48.1VDC	
Transducer	LISN	
Subtest Result	Pass	
Comments on the above Test Results	EUT powered by 48VDC. DC Input unit is under test. Test results verified by Jose Huamani.	
Environmental Conditions		
Temperature: (59 to 95)°F	70.6	
Humidity: (10 to 75)%	60	
Test Result File	Start Freq[MHz]	Stop Freq[MHz]
plce_48vdc_return [26-5-2023 10.23]	.15	30
plce_48vdc_supply [26-5-2023 10.23]	.15	30

Section 3:**Operation Mode**


Mode#	Title	Description
1	Formal Test	EUT is set to auto-boot with Linux version 4.4.60 (root@137067b22dab) (gcc version 5.2.0 (OpenWrt GCC 5.2.0 c17576669+r49254)) #41 SMP PREEMPT Tue Oct 25 15:03:29 UTC 2022

Section 4:**Hardware Configuration**


Config#	Title	Description
1	Mode-1 (DC Generator without M12)	Configuration 1: M22D powered up through DC Generator, without M12

Section 5:
Systems Details

System Number	Description	Samples	System under Test
5	IXIA Traffic Generator (Support)	1, 3, 2	No
3	Support: 2.4GHz & 5GHz Clients, Switch, and Laptop	4, 5, 8, 9	No
1	EUT - Configuration 1: M22D powered up through DC Generator, without M12	2	Yes

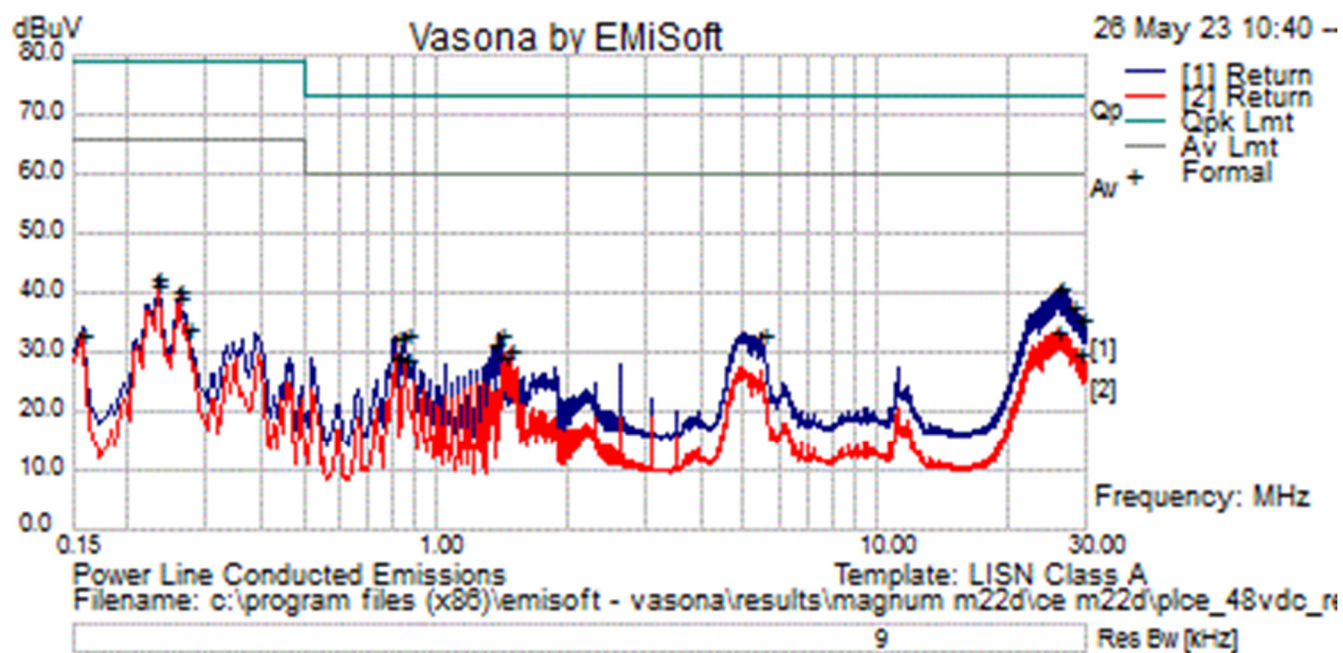Section 6: Test Results Details

Formal Data											
No	Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
1	.233	21.3	19.9	.0	41.2	Average	Return	66.0	-24.8	Pass	
2	25.865	12.6	20.5	.3	33.5	Average	Return	60.0	-26.5	Pass	
3	.260	19.4	19.9	.0	39.3	Average	Return	66.0	-26.7	Pass	
4	1.478	10.4	19.9	.0	30.3	Average	Return	60.0	-29.7	Pass	
5	28.646	8.6	20.6	.4	29.6	Average	Return	60.0	-30.4	Pass	
6	1.433	9.4	19.9	.0	29.3	Average	Return	60.0	-30.7	Pass	
7	.814	9.4	19.9	.0	29.3	Average	Return	60.0	-30.7	Pass	
8	.852	9.1	19.9	.0	29.0	Average	Return	60.0	-31.0	Pass	
9	.272	14.4	19.8	.0	34.3	Average	Return	66.0	-31.7	Pass	
10	26.140	20.2	20.5	.3	41.1	Quasi Peak	Return	73.0	-31.9	Pass	
11	.157	12.3	20.9	.1	33.3	Average	Return	66.0	-32.7	Pass	
12	27.825	17.0	20.6	.4	37.9	Quasi Peak	Return	73.0	-35.1	Pass	
13	.233	22.6	19.9	.0	42.5	Quasi Peak	Return	79.0	-36.5	Pass	
14	29.528	14.5	20.6	.4	35.5	Quasi Peak	Return	73.0	-37.5	Pass	
15	.260	20.6	19.9	.0	40.5	Quasi Peak	Return	79.0	-38.5	Pass	
16	1.392	13.3	19.9	.0	33.2	Quasi Peak	Return	73.0	-39.8	Pass	
17	.852	13.3	19.9	.0	33.2	Quasi Peak	Return	73.0	-39.8	Pass	
18	5.498	13.1	20.0	.1	33.1	Quasi Peak	Return	73.0	-39.9	Pass	
19	.814	12.7	19.9	.0	32.6	Quasi Peak	Return	73.0	-40.4	Pass	
20	1.352	11.3	19.9	.0	31.2	Quasi Peak	Return	73.0	-41.8	Pass	

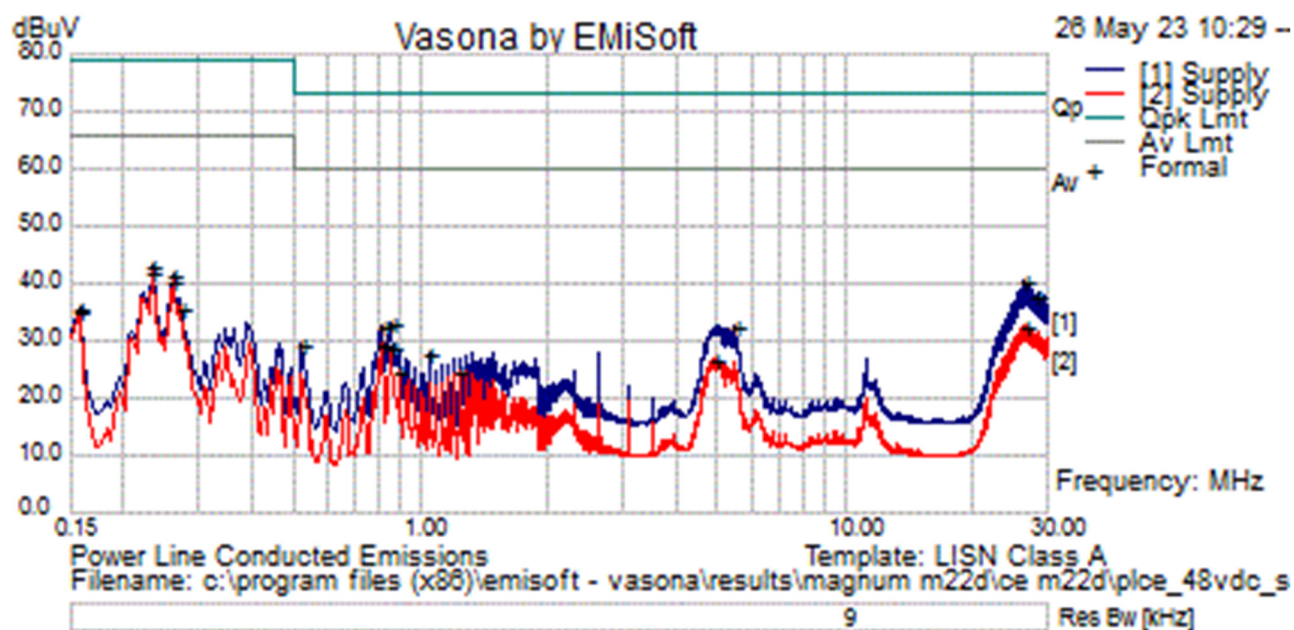

Formal Data											
No	Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
1	.233	22.2	19.9	.0	42.1	Average	Supply	66.0	-23.9	Pass	
2	.260	20.6	19.9	.0	40.4	Average	Supply	66.0	-25.6	Pass	
3	26.529	11.6	20.5	.3	32.5	Average	Supply	60.0	-27.5	Pass	
4	.272	16.0	19.8	.0	35.9	Average	Supply	66.0	-30.1	Pass	
5	.157	14.3	20.9	.1	35.2	Average	Supply	66.0	-30.8	Pass	
6	.814	9.2	19.9	.0	29.1	Average	Supply	60.0	-30.9	Pass	
7	.852	9.1	19.9	.0	29.0	Average	Supply	60.0	-31.0	Pass	
8	26.507	19.5	20.5	.3	40.4	Quasi Peak	Supply	73.0	-32.6	Pass	
9	4.954	6.8	20.0	.1	26.9	Average	Supply	60.0	-33.1	Pass	
10	28.460	16.9	20.6	.4	37.9	Quasi Peak	Supply	73.0	-35.1	Pass	
11	.890	4.7	19.9	.0	24.6	Average	Supply	60.0	-35.4	Pass	
12	1.239	4.5	19.9	.0	24.4	Average	Supply	60.0	-35.6	Pass	
13	.233	23.1	19.9	.0	43.0	Quasi Peak	Supply	79.0	-36.0	Pass	
14	.260	21.4	19.9	.0	41.3	Quasi Peak	Supply	79.0	-37.7	Pass	

15	.852	13.3	19.9	.0	33.2	Quasi Peak	Supply	73.0	-39.8	Pass	
16	5.498	12.7	20.0	.1	32.8	Quasi Peak	Supply	73.0	-40.2	Pass	
17	.814	12.7	19.9	.0	32.6	Quasi Peak	Supply	73.0	-40.4	Pass	
18	.157	14.9	20.9	.1	35.9	Quasi Peak	Supply	79.0	-43.1	Pass	
19	.524	9.6	19.9	.0	29.5	Quasi Peak	Supply	73.0	-43.5	Pass	
20	1.048	7.9	19.9	.0	27.8	Quasi Peak	Supply	73.0	-45.2	Pass	

Section 7: Questions & Answers

The category of cable simulated by the AAN, where emissions from wired network ports are measured using an AAN. See Table EN55032 C.2	N/A
---	-----

Appendix C: List of Test Equipment Used to perform the test.

Equipment #	Manufacturer/ Model	Description	Last Cal	Next Due	Test Item
Test Equipment used for conducted tests – Rack 11					
58721	Cisco/Automation Test Insertion Loss	Rack 11	Verify Before Use	Verify Before Use	A.1-A.6
58785	Keysight (Agilent/HP)/ N9030B-550 OPT LNP EP0	PXA Signal Analyzer, 2Hz-50GHz with Options LNP and EP0	20 th July 2022	20 th July 2023	A.1-A.6
58803	NATIONAL INSTRUMENTS / PXIe-1085	CHASSIS	Cal Required Not	Cal Required Not	A.1-A.6
58787	NATIONAL INSTRUMENTS / PXIe-8840	Up to 2.6 GHz Quad-Core PXI Express Controller	Cal Required Not	Cal Required Not	A.1-A.6
58788	NATIONAL INSTRUMENTS / PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	Verify Before Use	Verify Before Use	A.1-A.6
58789	NATIONAL INSTRUMENTS / PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	Verify Before Use	Verify Before Use	A.1-A.6
58786	NATIONAL INSTRUMENTS / PXI-2799	Switch 1x1	Verify Before Use	Verify Before Use	A.1-A.6
54235	PASTERNAK/ PE5019-1	Torque Wrench	23 rd March 2023	23 rd March 2024	A.1-A.6
58256	COMET/ T7611-4	WEB SENSOR FOR REMOTE THERMOMETER HYGROMETER	2 nd Feb 2023	2 nd Feb 2024	A.1-A.6
56122	PASTERNAK/PE6072	SMA 50 Ohm Termination	1 st Sep 2022	1 st Sep 2023	A.1-A.6
56127	PASTERNAK/PE6072	SMA 50 Ohm Termination	1 st Sep 2022	1 st Sep 2023	A.1-A.6

Test Equipment used for AC line Conducted emissions.

Cis-Id	Manufacturer	Model	Description	Calibrated Date	Calibration Due Date
004003	Fischer Custom Communications	FCC-801-M2-32A	CDN, 2-LINE, 32A	11/30/2022	11/30/2023
008496	Fischer Custom Communications	FCC-450B-2.4-N	Instrumentation Limiter	2/14/2023	2/14/2024
018960	York	CNE V	Comparison Noise Emitter, 30 - 1000MHz	NA	NA
045435	Hefley	PAT 50A	EFT Attenuator	7/22/2022	7/22/2023
046002	Fischer Custom Communications	F-090527-1009-1	Line Impedance Stabilization Network	12/20/2022	12/20/2023
046003	Fischer Custom Communications	F-090527-1009-2	LISN Adapter	12/19/2022	12/19/2023
049534	TTE	H785-150K-50-21378	150kHz HI Pass Filter	2/13/2023	2/13/2024
058276	ROHDE & SCHWARZ	ESR3	EMI Receiver	7/29/2022	7/29/2023
058758	Coleman	RG-223	RF Coaxial Cable to 1GHz, 7.6m	8/2/2022	8/2/2023

Appendix D: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz (1x10 ³)
EN	European Norm	MHz	MegaHertz (1x10 ⁶)
IEC	International Electro technical Commission	GHz	Gigahertz (1x10 ⁹)
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt (1x10 ³)
L1	Line 1	μV	Microvolt (1x10 ⁻⁶)
L2	Line2	A	Amp
L3	Line 3	μA	Micro Amp (1x10 ⁻⁶)
DC	Direct Current	mS	Milli Second (1x10 ⁻³)
RAW	Uncorrected measurement value, as indicated by the measuring device	μS	Micro Second (1x10 ⁻⁶)
RF	Radio Frequency	μS	Micro Second (1x10 ⁻⁶)
SLCE	Signal Line Conducted Emissions	m	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current

Appendix E: Photographs of Test Setups

EUT Photos have been omitted from this test report. Photos can be found in the supplementary exhibit included in the submission and EDCS# 24259624.

Appendix F: Software Used to Perform Testing

Cisco Internal LabView Radio Test Automation Software:

RF Automation Main versions: 208, 218
RF Domain Report Generation - version 3

Appendix G: Test Procedures

Measurements were made in accordance with:

- LP0002 (2020-07-01)
- KDB Publication No. 789033 - D02 General UNII Test Procedures New Rules v02r01
- KDB Publication No. 662911 - MIMO
- ANSI C63.4 2014 Unintentional Radiators
- ANSI C63.10 2013 Intentional Radiators

Test procedures are summarized below:

FCC 5GHz Test Procedures	EDCS # 1445048
FCC 5GHz RSE Test Procedures	EDCS # 1511600

Appendix H: Scope of Accreditation (A2LA certificate number 1178-01)

The scope of accreditation of Cisco Systems, Inc. can be found on the A2LA web page at:

<http://www.a2la.org/scopepdf/1178-01.pdf>

Appendix I: Test Assessment Plan

Compliance Test Plan (Excel) EDCS# 24259622
Target Power Tables EDCS# 23074232

Appendix J: Worst Case Justification

N/A

End