

**Lionel L.L.C.**

**Application For Certification  
(FCC ID: LIV-LCPRX2G4)**

**Lionchief Plus Rio Grande RS-3 Powered Unit**

**Additional Names: Frosty Snowman Remote Set, Amtrak FT Remote Set, Batman Remote M7 Set, Pennsylvania Railroad Keystone Classic Diesel Set, Hallmark Set, 2015 Brass Pro Shop Set, Santa Fe LionChief Plus Mikado, AT&SF LionChief Plus GP-7, LionChief Plus Santa Fe FT AA POWERED, LionChief Plus Santa Fe FT AA NON-POWERED**

**Model: LC&LC+RX**

**Additional Models: 6-81284, 6-81266, 6-81475, 6-82436, 6-11699, 6-82941, 6-81295, 6-38821, 6-82290**

**2.4GHz Transceiver**

**Report No.: SZHH00934025-002**

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-14]

Prepared and Checked by:

Approved by:

Sign on file

Jimmy Wen  
Senior Engineer

---

Andy Yan  
Senior Project Engineer  
Date: September 30, 2015

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

TRF No.: FCC 15C\_TX\_b

**Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch**

6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751 Website: [www.china.intertek-etlsemko.com](http://www.china.intertek-etlsemko.com)

---

# INTERTEK TESTING SERVICES

---

## LIST OF EXHIBITS

### *INTRODUCTION*

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labelling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Miscellaneous Information
<i>EXHIBIT 9:</i>	Confidentiality Request
<i>EXHIBIT 10:</i>	Test Equipment List

# INTERTEK TESTING SERVICES

## MEASUREMENT/TECHNICAL REPORT

Lionel L.L.C.

Model: LC&LC+RX

Additional Models: 6-81284, 6-81266, 6-81475, 6-82436, 6-11699, 6-82941, 6-81295, 6-38821, 6-82290

FCC ID: LIV-LCPRX2G4

This report concerns (check one:) Original Grant  Class II Change

Equipment Type: DXX - Part 15 Low Power Communication Device Transceiver

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes  No

If yes, defer until: \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes  No

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-14 Edition] provision.

Report prepared by:

Jimmy Wen  
Intertek Testing Services Shenzhen Ltd.  
Kejiyuan Branch  
6F, Block D, Huahan Building, Langshan Road,  
Nanshan District, Shenzhen, P. R. China  
Phone: (86 755) 8614 0713  
Fax: (86 755) 8601 6751

TRF No.: FCC 15C\_TX\_b  
FCC ID: LIV-LCPRX2G4  
Report No.: SZHH00934025-002

---

# INTERTEK TESTING SERVICES

---

## Table of Contents

1.0 <b>General Description</b> .....	2
1.1 Product Description .....	2
1.2 Related Submittal(s) Grants .....	2
1.3 Test Methodology .....	2
1.4 Test Facility .....	3
2.0 <b>System Test Configuration</b> .....	5
2.1 Justification .....	5
2.2 EUT Exercising Software .....	5
2.3 Special Accessories .....	5
2.4 Equipment Modification .....	5
2.5 Measurement Uncertainty .....	6
2.6 Support Equipment List and Description .....	6
3.0 <b>Emission Results</b> .....	8
3.1 Radiated Test Results .....	9
3.1.1 Field Strength Calculation .....	9
3.1.2 Radiated Emission Configuration Photograph .....	10
3.1.3 Radiated Emissions .....	10
3.1.4 Transmitter Spurious Emissions (Radiated) .....	13
3.2 Conducted Emission at Mains Terminal .....	20
3.2.1 Conducted Emissions Configuration Photograph .....	20
3.2.2 Conducted Emissions .....	20
4.0 <b>Equipment Photographs</b> .....	26
5.0 <b>Product Labelling</b> .....	28
6.0 <b>Technical Specifications</b> .....	30
7.0 <b>Instruction Manual</b> .....	32
8.0 <b>Miscellaneous Information</b> .....	34
8.1 Bandedge Plot .....	35
8.2 Discussion of Pulse Desensitization .....	37
8.3 Calculation of Average Factor .....	38
8.4 Emissions Test Procedures .....	39
9.0 <b>Confidentiality Request</b> .....	42
10.0 <b>Test Equipment List</b> .....	44

## INTERTEK TESTING SERVICES

---

### List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
Test Report	Bandedge Plot	bandedge.pdf
Test Report	20dB BW Plot	bw.pdf
Test Report	Timing Plot	af.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

# INTERTEK TESTING SERVICES

---

## EXHIBIT 1

### GENERAL DESCRIPTION

# INTERTEK TESTING SERVICES

---

## 1.0 General Description

### 1.1 Product Description

The Equipment under Test (EUT) is a car unit for Lionchief Plus Rio Grande RS-3 Powered Unit model: LC&LC+RX operating at 2.4GHz band. It is powered by a AC/DC adapter (Model: HKYF36-180175T-US, INPUT: 100-120VAC 60Hz, OUTPUT: 18VDC 1750mA)

The model: LC&LC+RX has the same RF module with model: 6-81295, The difference is that digital function about simulation smoke and light. Two test result have been recorded on report. The models: 6-81284, 6-81266, 6-81475, 6-82436, 6-11699, 6-82941 are the same as the model: LC&LC+RX in hardware aspect, and the models: 6-38821, 6-82290 are the same as the model: 6-81295, The different in appearance and model number for marketing purpose.

Antenna Type: Integral antenna

Type of modulation: GFSK modulation

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

### 1.2 Related Submittal(s) Grants

This is an application for certification of a car unit, and corresponding remote controller (Lionchief Plus Rio Grande RS-3 Remote Controller) which associated with this EUT, has FCC ID: LIV-LCPTX2G4 and was filed at the same time.

### 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

## INTERTEK TESTING SERVICES

---

### 1.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch** and located at 6F, Block D, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: 242492).

# **INTERTEK TESTING SERVICES**

---

## **EXHIBIT 2**

### **SYSTEM TEST CONFIGURATION**

## **INTERTEK TESTING SERVICES**

---

### **2.0 System Test Configuration**

#### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by a AC/DC adapter (INPUT: 100-120VAC 60Hz OUTPUT: 18VDC 1750mA). Only the worst case data was reported.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emission at and above 30 MHz, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data report in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT and all cables were insulated, if required, from the ground plane by up to 12 mm of insulating material. which enabled the Testing Engineer to maximize emissions through its placement in the three orthogonal axes.

#### 2.2 EUT Exercising Software

There was no special software to exercise the device.

#### 2.3 Special Accessories

No special accessories used.

#### 2.4 Equipment Modification

Any modifications installed previous to testing by Lionel L.L.C. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch.

## INTERTEK TESTING SERVICES

---

### 2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

### 2.6 Support Equipment List and Description

Description	Manufacturer	Model No.
AC/DC adapter	YEE FU	Model: HKYF36-180175T-US INPUT: 100-120VAC 60Hz OUTPUT: 18VDC 1750mA
Remote Controller	Lionel	LC & LC + TX

# INTERTEK TESTING SERVICES

---

## EXHIBIT 3 EMISSION RESULTS

## INTERTEK TESTING SERVICES

---

### 3.0 Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

---

## INTERTEK TESTING SERVICES

---

### 3.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

#### 3.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where

- FS = Field Strength in dB $\mu$ V/m
- RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$\begin{aligned} RA &= 62.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB} \\ CF &= 1.6 \text{ dB} \\ AG &= 29.0 \text{ dB} \\ PD &= 0 \text{ dB} \\ AV &= -10 \text{ dB} \\ FS &= 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

## INTERTEK TESTING SERVICES

---

### 3.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

### 3.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission  
at  
147.468 MHz

Judgement: Passed by 3.1 dB

#### **TEST PERSONNEL:**

*Sign on file*

Jimmy Wen, Senior Engineer  
*Typed/Printed Name*

August 17, 2015  
*Date*

## INTERTEK TESTING SERVICES

---

Applicant: Lionel L.L.C.

Date of Test: August 17, 2015

Model: LC&LC+RX

Sample: 1/1

Worst Case Operating Mode: Transmit

Table 1

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	147.468	42.5	20.0	17.9	40.4	43.5	-3.1
Horizontal	206.540	42.5	20.0	16.0	38.5	43.5	-5.0
Horizontal	265.432	38.6	20.0	23.6	42.2	46.0	-3.8
Vertical	147.370	42.2	20.0	17.6	39.8	43.5	-3.7
Vertical	176.955	39.1	20.0	17.2	36.3	43.5	-7.2
Vertical	221.090	41.9	20.0	15.4	37.3	46.0	-8.7

- NOTES:
1. Quasi-Peak detector is used except for others stated.
  2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. All emissions are below the QP limit.

## INTERTEK TESTING SERVICES

---

Applicant: Lionel L.L.C.

Date of Test: August 17, 2015

Model: 6-81295

Sample: 1/1

Worst Case Operating Mode: Transmit

Table 2

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	149.868	42.2	20.0	17.9	40.1	43.5	-3.4
Horizontal	226.840	42.0	20.0	16.0	38.0	46.0	-8.0
Horizontal	256.438	37.6	20.0	23.6	41.2	46.0	-4.8
Vertical	177.270	41.3	20.0	17.6	38.9	43.5	-4.6
Vertical	186.855	38.7	20.0	17.2	35.9	43.5	-7.6
Vertical	227.090	39.5	20.0	15.4	34.9	46.0	-11.1

- NOTES:
1. Quasi-Peak detector is used except for others stated.
  2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  5. Negative value in the margin column shows emission below limit.
  6. All emissions are below the QP limit.

## INTERTEK TESTING SERVICES

---

### 3.1.4 Transmitter Spurious Emissions (Radiated)

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission  
at  
7317.00 MHz

Judgement: Passed by 12.5 dB

#### **TEST PERSONNEL:**

*Sign on file*

Jimmy Wen, Senior Engineer  
*Typed/Printed Name*

August 17, 2015  
*Date*

## INTERTEK TESTING SERVICES

---

Applicant: Lionel L.L.C.

Date of Test: August 17, 2015

Model: LC&LC+RX

Sample: 1/1

Worst Case Operating Mode: Transmit

Table 3

### Radiated Emissions

(2402.000MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Vertical	2402.000	104.5	36.7	28.5	96.3	114.0	-17.7
Vertical	4804.000	62.0	36.7	34.6	59.9	74.0	-14.1
Vertical	7206.000	61.7	36.1	33.1	58.7	74.0	-15.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Vertical	2402.000	104.5	36.7	28.5	27.6	68.7	94.0	-25.3
Vertical	4804.000	62.0	36.7	34.6	27.6	32.3	54.0	-21.7
Vertical	7206.000	61.7	36.1	33.1	27.6	31.1	54.0	-22.9

Notes: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Jimmy Wen

---

TRF No.: FCC 15C\_TX\_b  
 FCC ID: LIV-LCPRX2G4  
 Report No.: SZHH00934025-002

## INTERTEK TESTING SERVICES

---

Applicant: Lionel L.L.C.

Date of Test: August 17, 2015

Model: LC&LC+RX

Sample: 1/1

Worst Case Operating Mode: Transmit

Table 4

### Radiated Emissions

(2439.000MHz)

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	2439.000	105.2	36.7	28.6	97.1	114.0	-16.9
Vertical	4878.000	61.5	36.7	35.2	60.0	74.0	-14.0
Vertical	7317.000	64.5	36.1	33.1	61.5	74.0	-12.5

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	2439.000	105.2	36.7	28.6	27.6	69.5	94.0	-24.5
Vertical	4878.000	61.5	36.7	35.2	27.6	32.4	54.0	-21.6
Vertical	7317.000	64.5	36.1	33.1	27.6	33.9	54.0	-20.1

Notes: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Jimmy Wen

---

TRF No.: FCC 15C\_TX\_b

FCC ID: LIV-LCPRX2G4

Report No.: SZHH00934025-002

## INTERTEK TESTING SERVICES

---

Applicant: Lionel L.L.C.

Date of Test: August 17, 2015

Model: LC&LC+RX

Sample: 1/1

Worst Case Operating Mode: Transmit

Table 5

### Radiated Emissions

(2479.000MHz)

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	2479.000	103.3	36.7	28.9	95.5	114.0	-18.5
Vertical	4958.000	62.3	36.7	35.6	61.2	74.0	-12.8
Vertical	7437.000	63.6	36.1	33.1	60.6	74.0	-13.4

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	2479.000	103.3	36.7	28.9	27.6	67.9	94.0	-26.1
Vertical	4958.000	62.3	36.7	35.6	27.6	33.6	54.0	-20.4
Vertical	7437.000	63.6	36.1	33.1	27.6	33.0	54.0	-21.0

Notes: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Jimmy Wen

---

TRF No.: FCC 15C\_TX\_b  
FCC ID: LIV-LCPRX2G4  
Report No.: SZHH00934025-002

## INTERTEK TESTING SERVICES

---

Applicant: Lionel L.L.C.

Date of Test: August 17, 2015

Model: 6-81295

Sample: 1/1

Worst Case Operating Mode: Transmit

Table 6

### Radiated Emissions

(2402.000MHz)

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	2402.000	104.5	36.7	28.5	96.3	114.0	-17.7
Vertical	4804.000	61.8	36.7	34.6	59.7	74.0	-14.3
Vertical	7206.000	61.9	36.1	33.1	58.9	74.0	-15.1

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	2402.000	104.5	36.7	28.5	27.6	68.7	94.0	-25.3
Vertical	4804.000	61.8	36.7	34.6	27.6	32.1	54.0	-21.9
Vertical	7206.000	61.9	36.1	33.1	27.6	31.3	54.0	-22.7

Notes: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Jimmy Wen

---

TRF No.: FCC 15C\_TX\_b

FCC ID: LIV-LCPRX2G4

Report No.: SZHH00934025-002

## INTERTEK TESTING SERVICES

---

Applicant: Lionel L.L.C.

Date of Test: August 17, 2015

Model: 6-81295

Sample: 1/1

Worst Case Operating Mode: Transmit

Table 7

### Radiated Emissions

(2439.000MHz)

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	2439.000	105.2	36.7	28.6	97.1	114.0	-16.9
Vertical	4878.000	60.4	36.7	35.2	58.9	74.0	-15.1
Vertical	7317.000	63.5	36.1	33.1	60.5	74.0	-13.5

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	2439.000	105.2	36.7	28.6	27.6	69.5	94.0	-24.5
Vertical	4878.000	60.4	36.7	35.2	27.6	31.3	54.0	-22.7
Vertical	7317.000	63.5	36.1	33.1	27.6	32.9	54.0	-21.1

- Notes:
1. Peak Detector Data unless otherwise stated.
  2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Jimmy Wen

---

TRF No.: FCC 15C\_TX\_b  
FCC ID: LIV-LCPRX2G4  
Report No.: SZHH00934025-002

## INTERTEK TESTING SERVICES

---

Applicant: Lionel L.L.C.  
 Model: 6-81295  
 Sample: 1/1  
 Worst Case Operating Mode: Transmit

Date of Test: August 17, 2015

Table 8

### Radiated Emissions

(2479.000MHz)

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	2479.000	103.3	36.7	28.9	95.5	114.0	-18.5
Vertical	4958.000	62.2	36.7	35.6	61.1	74.0	-12.9
Vertical	7437.000	63.0	36.1	33.1	60.0	74.0	-14.0

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Vertical	2479.000	103.3	36.7	28.9	27.6	67.9	94.0	-26.1
Vertical	4958.000	62.2	36.7	35.6	27.6	33.5	54.0	-20.5
Vertical	7437.000	63.0	36.1	33.1	27.6	32.4	54.0	-21.6

- Notes:
1. Peak Detector Data unless otherwise stated.
  2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Jimmy Wen

---

TRF No.: FCC 15C\_TX\_b  
 FCC ID: LIV-LCPRX2G4  
 Report No.: SZHH00934025-002

## INTERTEK TESTING SERVICES

---

### 3.2 Conducted Emission at Mains Terminal

#### 3.2.1 Conducted Emissions Configuration Photograph

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

#### 3.2.2 Conducted Emissions

Worst Case Live-Conducted Configuration  
at  
0.150 MHz

Judgement: Passed by 11.8 dB margin

#### **TEST PERSONNEL:**

*Sign on file*

Jimmy Wen, Senior Engineer  
*Typed/Printed Name*


August 17, 2015  
*Date*

# INTERTEK TESTING SERVICES

Applicant: Lionel L.L.C.  
 Model: LC&LC+RX  
 Sample: 1/1  
 Worst Case Operating Mode: Transmit

Date of Test: August 17, 2015

## Conducted Emission Test - FCC

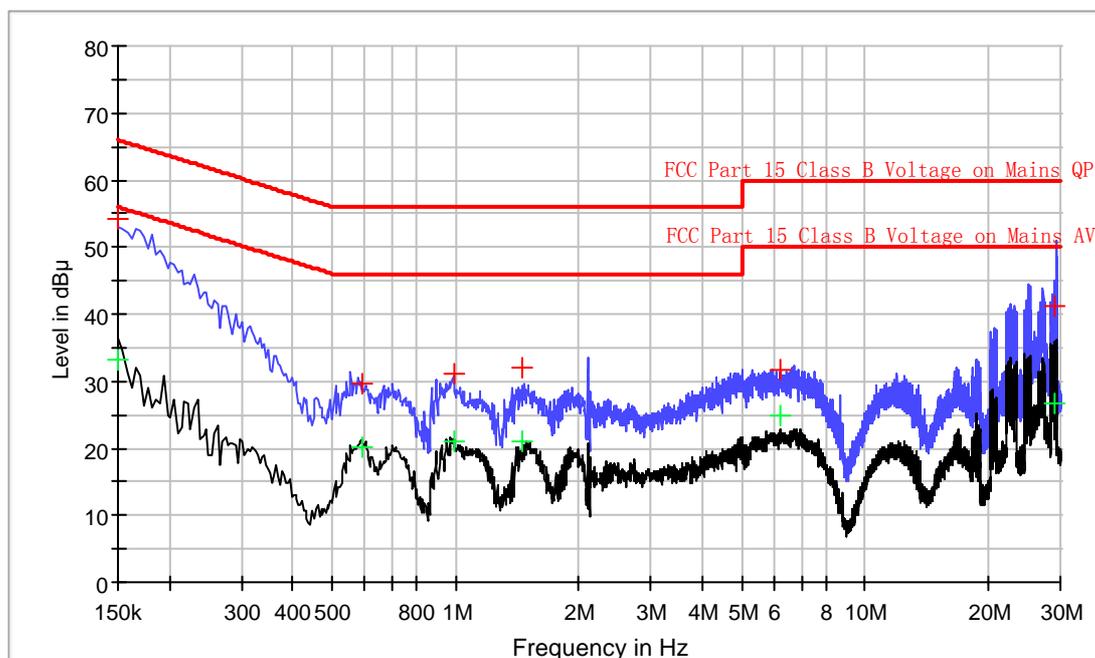

### Result Table QP

Frequency (MHz)	QuasiPeak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150000	54.2	L1	9.8	11.8	66.0
0.590000	29.5	L1	9.9	26.5	56.0
0.990000	31.1	L1	9.9	24.9	56.0
1.462000	32.1	L1	9.9	23.9	56.0
6.230000	31.6	L1	10.0	28.4	60.0
28.878000	41.2	L1	10.6	18.8	60.0

### Result Table AV

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150000	33.3	L1	9.8	22.7	56.0
0.590000	20.2	L1	9.9	25.8	46.0
0.990000	20.9	L1	9.9	25.1	46.0
1.462000	21.1	L1	9.9	24.9	46.0
6.230000	24.8	L1	10.0	25.2	50.0
28.878000	26.8	L1	10.6	23.2	50.0


TRF No.: FCC 15C\_TX\_b  
 FCC ID: LIV-LCPRX2G4  
 Report No.: SZHH00934025-002

## INTERTEK TESTING SERVICES

Applicant: Lionel L.L.C.  
 Model: LC&LC+RX  
 Sample: 1/1  
 Worst Case Operating Mode: Transmit

Date of Test: August 17, 2015

### Conducted Emission Test - FCC

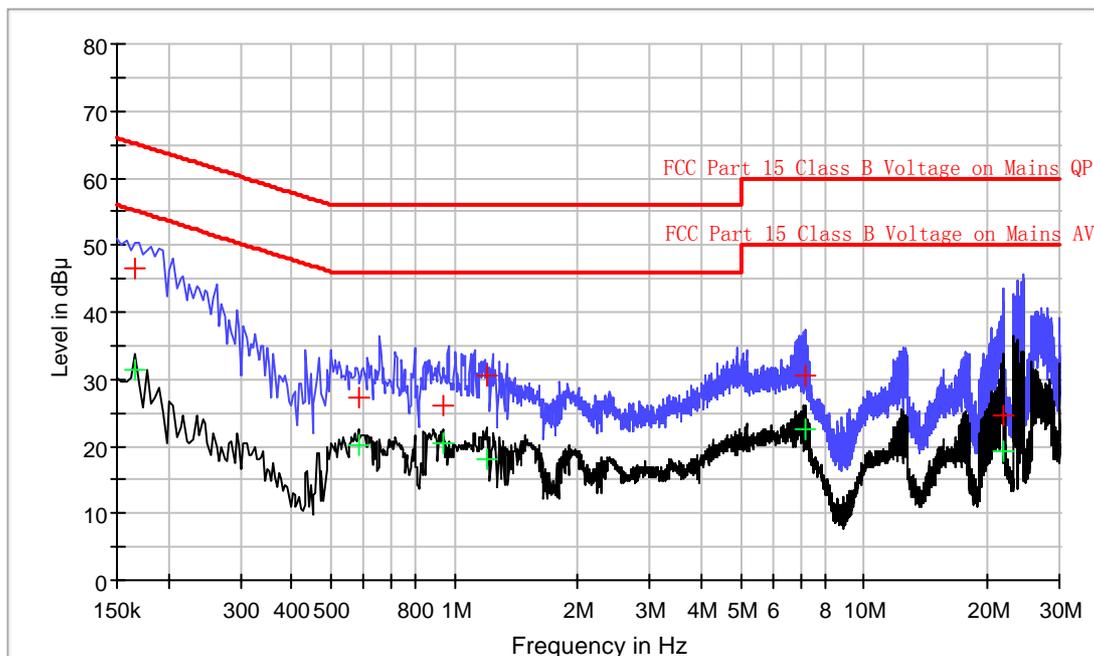

#### Result Table QP

Frequency (MHz)	QuasiPeak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.166000	46.4	N	10.1	18.8	65.2
0.582000	27.2	N	10.2	28.8	56.0
0.934000	26.0	N	10.2	30.0	56.0
1.198000	30.4	N	10.2	25.6	56.0
7.186000	30.4	N	10.4	29.6	60.0
21.798000	24.5	N	10.6	35.5	60.0

#### Result Table AV

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.166000	31.4	N	10.1	23.8	55.2
0.582000	20.2	N	10.2	25.8	46.0
0.934000	20.4	N	10.2	25.6	46.0
1.198000	18.0	N	10.2	28.0	46.0
7.186000	22.5	N	10.4	27.5	50.0
21.798000	19.4	N	10.6	30.6	50.0


TRF No.: FCC 15C\_TX\_b  
 FCC ID: LIV-LCPRX2G4  
 Report No.: SZHH00934025-002

## INTERTEK TESTING SERVICES

Applicant: Lionel L.L.C.  
 Model: 6-81295  
 Sample: 1/1  
 Worst Case Operating Mode: Transmit

Date of Test: August 17, 2015

### Conducted Emission Test - FCC

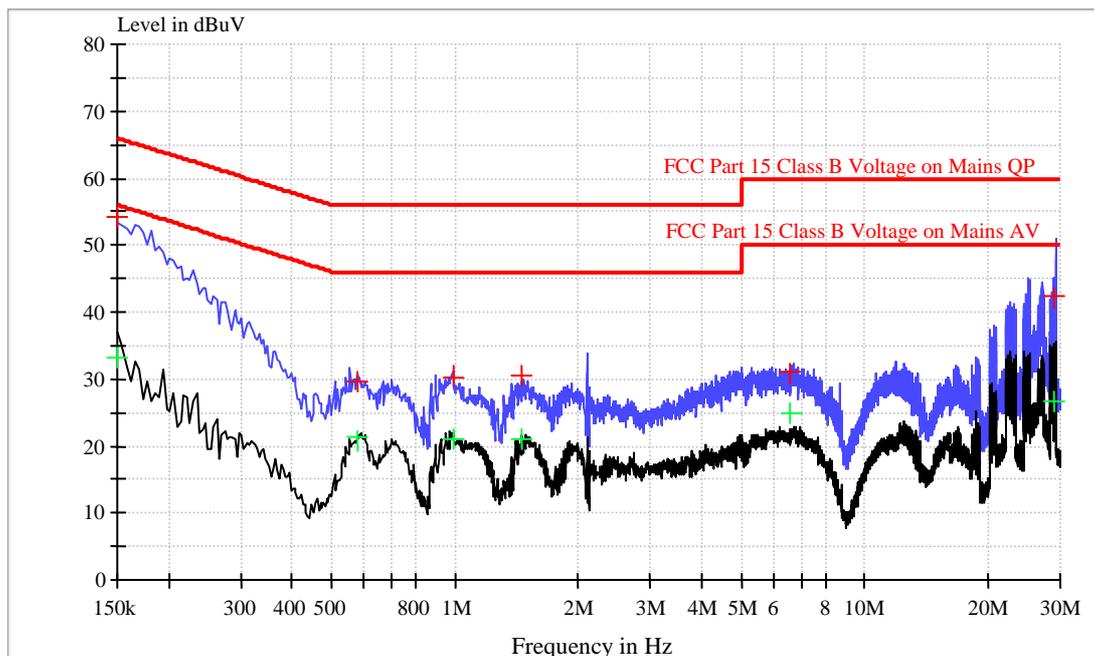

#### Result Table QP

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.150000	54.2	L1	9.8	11.8	66.0
0.576000	29.4	L1	9.9	26.6	56.0
0.988000	31.3	L1	9.9	24.7	56.0
1.458000	32.0	L1	9.9	24.0	56.0
6.390000	31.5	L1	10.0	28.5	60.0
28.876000	42.2	L1	10.6	17.8	60.0

#### Result Table AV

Frequency (MHz)	Average (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.150000	33.3	L1	9.8	22.7	56.0
0.576000	20.2	L1	9.9	25.8	46.0
0.988000	20.7	L1	9.9	25.3	46.0
1.458000	20.9	L1	9.9	25.1	46.0
6.390000	24.6	L1	10.0	25.4	50.0
28.876000	26.7	L1	10.6	23.8	50.0


TRF No.: FCC 15C\_TX\_b  
 FCC ID: LIV-LCPRX2G4  
 Report No.: SZHH00934025-002

## INTERTEK TESTING SERVICES

Applicant: Lionel L.L.C.  
 Model: 6-81295  
 Sample: 1/1  
 Worst Case Operating Mode: Transmit

Date of Test: August 17, 2015

### Conducted Emission Test - FCC

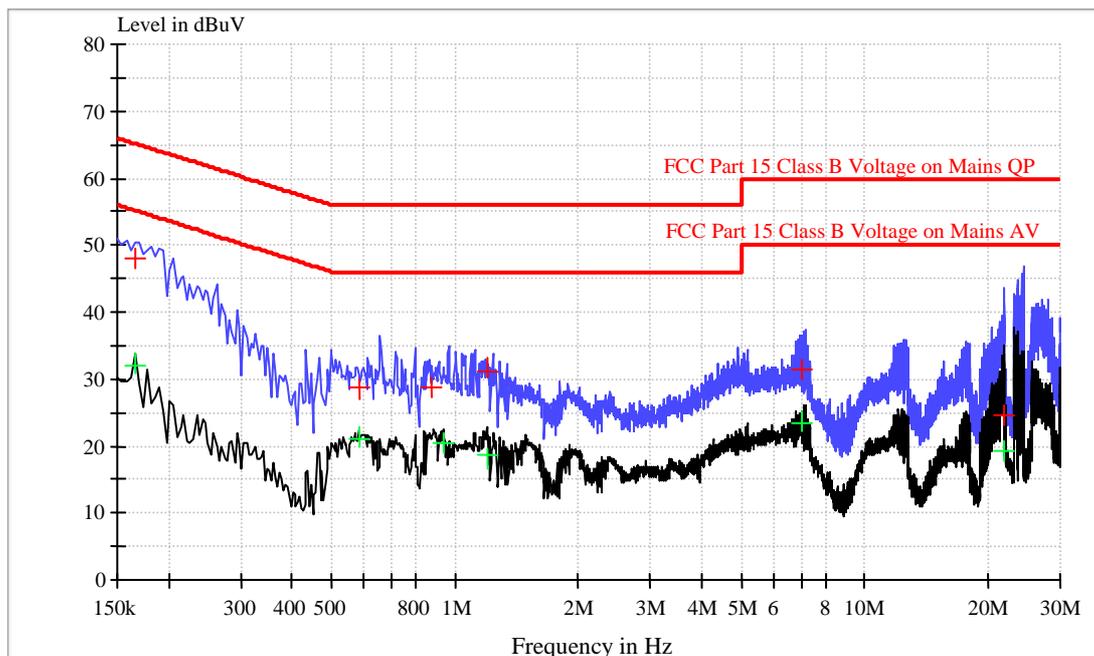

#### Result Table QP

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.165000	46.9	N	10.1	18.3	65.2
0.588000	27.7	N	10.2	28.3	56.0
0.954000	26.3	N	10.2	29.7	56.0
1.198000	30.4	N	10.2	25.6	56.0
7.177000	30.9	N	10.4	29.1	60.0
21.798000	24.5	N	10.6	35.5	60.0

#### Result Table AV

Frequency (MHz)	Average (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.165000	31.8	N	10.1	23.4	55.2
0.588000	20.2	N	10.2	25.8	46.0
0.954000	20.4	N	10.2	25.6	46.0
1.198000	18.0	N	10.2	28.0	46.0
7.177000	23.5	N	10.4	26.5	50.0
21.798000	19.4	N	10.6	30.6	50.0

TRF No.: FCC 15C\_TX\_b  
 FCC ID: LIV-LCPRX2G4  
 Report No.: SZHH00934025-002

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 4**

**EQUIPMENT PHOTOGRAPHS**

## INTERTEK TESTING SERVICES

---

### 4.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

# INTERTEK TESTING SERVICES

---

## EXHIBIT 5 PRODUCT LABELLING

## INTERTEK TESTING SERVICES

---

### 5.0 **Product Labelling**

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

# **INTERTEK TESTING SERVICES**

---

## **EXHIBIT 6**

### **TECHNICAL SPECIFICATIONS**

## INTERTEK TESTING SERVICES

---

### 6.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

# **INTERTEK TESTING SERVICES**

---

## **EXHIBIT 7**

### **INSTRUCTION MANUAL**

## INTERTEK TESTING SERVICES

---

### 7.0 **Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 8**

**MISCELLANEOUS INFORMATION**

## INTERTEK TESTING SERVICES

---

### 8.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, the test procedure and calculation of factor such as pulse desensitization.

## INTERTEK TESTING SERVICES

---

### 8.1 Bandedge Plot

For electronic filing, the plot shows the fundamental emission when modulated is saved with filename: be.pdf. From the plot, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfils the requirement of 15.249(d).

#### Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e ( Bandedge Plot).

#### **(i) Lower channel 2402.000MHz:**

Peak Resultant field strength = Fundamental emissions (peak value) – delta  
from the bandedge plot

$$\begin{aligned} &= 96.3 \text{ dB}\mu\text{V/m}-30.0\text{dB} \\ &= 66.3 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (Average value) –  
delta from the bandedge plot

$$\begin{aligned} &= 68.7 \text{ dB}\mu\text{V/m}-30.0\text{dB} \\ &= 38.7 \text{ dB}\mu\text{V/m} \end{aligned}$$

#### **(ii) Upper channel 2479.000MHz:**

Peak Resultant field strength = Fundamental emissions (peak value) – delta  
from the bandedge plot

$$\begin{aligned} &= 95.5 \text{ dB}\mu\text{V/m}-38.3 \text{ dB} \\ &= 57.2\text{dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (Average value) –  
delta from the bandedge plot

$$\begin{aligned} &= 67.9 \text{ dB}\mu\text{V/m}-38.3 \text{ dB} \\ &= 29.6 \text{ dB}\mu\text{V/m} \end{aligned}$$

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dB $\mu$ V/m (Peak Limit) and 54dB $\mu$ V/m (Average Limit).

## INTERTEK TESTING SERVICES

---

### 8.1 Bandedge Plot (cont'd)

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

Figure 8.1 Bandwidth

## INTERTEK TESTING SERVICES

---

### 8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period ( $T_{\text{eff}}$ ) is approximately 130.4  $\mu\text{s}$  for a digital "1" bit, as shown in the plots of Exhibit 8.3. With a resolution bandwidth (3 dB) of 100 kHz, the pulse desensitivity factor was 0 dB.

---

## INTERTEK TESTING SERVICES

---

### 8.3 Calculation of Average Factor

Averaging factor in dB =  $20 \log(\text{duty cycle})$

The specification for output field strengths in accordance with the FCC rules specify measurements with an average detector. During testing, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation. The duty cycle is measured by placing the spectrum analyzer in zero scan (receiver mode) and linear mode at maximum bandwidth (3 MHz at 3 dB down) and viewing the resulting time domain signal output from the analyzer on a Tektronix oscilloscope. The oscilloscope is used because of its superior time base and triggering facilities.

A plot of the worst-case duty cycle as detected in this manner are saved with filename: af.pdf

The duty cycle is simply the on-time divided by the period:

The duration of one cycle = 12.5652 ms  
Effective period of the cycle =  $130.4 \mu\text{s} \times 4 = 0.5216 \text{ ms}$

$\text{DC} = 0.5216 \text{ ms} / 12.5652 \text{ ms} = 0.0415$  or 4.15%

Therefore, the averaging factor is found by  $20 \log_{10} 0.0415 = -27.6 \text{ dB}$

## INTERTEK TESTING SERVICES

---

### 8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

the EUT and all cables were insulated, if required, from the ground plane by up to 12 mm of insulating material. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.

## INTERTEK TESTING SERVICES

---

### 8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used (RBW3MHz used for fundamental emission) .

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 9**  
**CONFIDENTIALITY REQUEST**

## INTERTEK TESTING SERVICES

---

### 9.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

**EXHIBIT 10**  
**TEST EQUIPMENT LIST**

## INTERTEK TESTING SERVICES

---

### 10.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-03	BiConiLog Antenna	ETS	3142C	00066460	14-Jun-15	14-Jun-16
SZ185-01	EMI Receiver	R&S	ESCI	100547	7-Feb-15	7-Feb-16
SZ061-07	Pyramidal Horn Antenna	ETS	3160-09	00083067	27-Jun-15	27-Dec-15
SZ061-08	Horn Antenna	ETS	3115	00092346	19-Oct-14	19-Oct-15
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	29-Apr-15	29-Apr-16
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	8-Jun-15	8-Jun-16
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	7-Feb-15	7-Feb-16
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	19-Apr-14	19-Apr-16
SZ062-02	RF Cable	RADIALL	RG 213U	--	27-Jun-15	27-Dec-15
SZ062-05	RF Cable	RADIALL	0.04-26.5GHz	--	7-Apr-15	7-Oct-15
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	7-Apr-15	7-Oct-15
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	--	20-May-15	20-May-16
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	1-Nov-14	1-Nov-15
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	1-Nov-14	1-Nov-15
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	24-Jun-15	24-Jun-16
SZ188-03	Shielding Room	ETS	RFD-100	4100	23-Aug-14	23-Aug-16