

TEST REPORT

Report No.: 26010740HKG-002

MGA Entertainment (HK) Ltd.

Application For Original Grant of Certification

Transceiver

FCC ID: LU9254249

This report contains the data of BLE portion only.

Prepared and Checked by:

Approved by:

Signed on File

Leung Pak To, Alex
Assistant Engineer

Tang Kwan Mo, Jess
Assistant Supervisor
Date: April 17, 2026

Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

© 2017 Intertek

TEST REPORT

GENERAL INFORMATION

Grantee:	MGA Entertainment (HK) Ltd.
Grantee Address:	Suite 301, 3/F, Chinachem Golden Plaza, No.77 Mody Road, Tsim Sha Tsui East, Kowloon, Hong Kong.
Manufacturer:	MGA Entertainment (HK) Ltd.
Manufacturer Address:	Suite 301, 3/F, Chinachem Golden Plaza, No.77 Mody Road, Tsim Sha Tsui East, Kowloon, Hong Kong.
FCC Specification Standard:	FCC Part 15, October 1, 2024 Edition
FCC ID:	LU9254249
Model:	254249
Additional Model:	254249C3, 254249C3MMAMT, 254249C3W, 254249EUC, 254249W, 254249C3BULK, 254249EUCBULK, 254249X1 (256441), 254249X1C3(256441C3), 252146(252146EUC), 252153(252153EUC)
Type of EUT:	Transceiver
Description of EUT:	MGA's Miniverse-Real Music Record PI PDQ (254249, 254249C3, 254249C3MMAMT, 254249C3W, 254249EUC, 254249W), MGA's Miniverse-Real Music Record PI BULK (254249C3BULK, 254249EUCBULK), MGA's Miniverse-Real Music Record PI(MGA's Miniverse-Real Music Player SK Bdl) (254249X1 (256441), 254249X1C3(256441C3)), MGA's Miniverse-Real Music (LIC) 2pk (252146(252146EUC)), MGA's Miniverse-Real Music (LIC) 6pk (252153(252153EUC))
Asst. No.:	256441(256441C3)
Brand Name:	MGA's Miniverse-Real Music Record Player
Sample Receipt Date:	January 22, 2026
Date of Test:	February 02, 2026 to March 26, 2026
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%
Conclusion:	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 Certification.
Remark:	This report contains the data of BLE portion only.

TEST REPORT

SUMMARY OF TEST RESULT

Test Items	FCC Part 15	Results
Transmitter Power Line Conducted Emissions	15.207	Not Applicable
Radiated Emission	15.249, 15.209	Complied
Radiated Emission on the Bandedge		Complied
Radiated Emission in Restricted Bands	15.205	Complied

The equipment under test is found to be complying with the following standards:
FCC Part 15, October 1, 2024 Edition

- Note:
1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the pervisions of this section.
 2. Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

TEST REPORT

TABLE OF CONTENTS

1.0	GENERAL DESCRIPTION.....	5
1.1	Product Description.....	5
1.2	Related Submittal(s) Grants	5
1.3	Test Methodology	5
1.4	Test Facility.....	5
2.0	SYSTEM TEST CONFIGURATION.....	6
2.1	Justification	6
2.2	EUT Exercising Software	6
2.3	Special Accessories.....	6
2.4	Measurement Uncertainty	6
2.5	Support Equipment List and Description	6
3.0	EMISSION RESULTS.....	7
3.1	Field Strength Calculation	7
3.2	Radiated Emission Configuration Photograph.....	8
3.3	Radiated Emission Data.....	8
4.0	EQUIPMENT PHOTOGRAPHS.....	13
5.0	PRODUCT LABELLING	13
6.0	TECHNICAL SPECIFICATIONS	13
7.0	INSTRUCTION MANUAL	13
8.0	MISCELLANEOUS INFORMATION	14
8.1	Radiated Emission on the Bandedge	14
8.2	Discussion of Pulse Desensitization.....	17
8.3	Calculation of Average Factor	17
8.4	Emissions Test Procedures	18
8.5	Occupied Bandwidth	20
9.0	CONFIDENTIALITY REQUEST.....	21
10.0	EQUIPMENT LIST	21

TEST REPORT

1.0 GENERAL DESCRIPTION

1.1 Product Description

The Equipment Under Test (EUT), is a 2.4GHz BLE Transceiver for a Bluetooth toy with RFID which operates at a single channel 13.56MHz. The sample supplied operated on 40 channels (BLE), normally at 2402 - 2480MHz. The channels are separated with 2MHz spacing. Simultaneous emissions of BLE and RFID are not available for this EUT.

The EUT is powered by 2 x 1.5V AAA batteries. After switching on EUT, it can play different songs when a black disk is put on top of it. Songs can be downloaded from the app through BLE.

Models: 254249C3, 254249C3MMAMT, 254249C3W, 254249EUC, 254249W, 254249C3BULK, 254249EUCBULK, 254249X1 (256441), 254249X1C3(256441C3), 252146(252146EUC), 252153(252153EUC) are the same as the Model: 254249 in hardware aspect as declared by client. The models are different in model number, item name and packaging only as declared by client.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: Descri.pdf.

1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver (BLE portion).

1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024. All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

1.4 Test Facility

The 3m Chamber used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been placed on file with the FCC.

TEST REPORT

2.0 SYSTEM TEST CONFIGURATION

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024.

The device was powered by 3.0VDC (2 x 1.5V AAA Batteries).

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The unit was operated standalone and placed in the center of the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

The EUT exercise program (FCC Assist 1.0.2.2) used during radiated testing was designed to exercise the various system components in a manner similar to a typical use.

2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

2.4 Measurement Uncertainty

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044.

2.5 Support Equipment List and Description

Not Applicable.

TEST REPORT

3.0 EMISSION RESULTS

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where

FS	=	Field Strength in dB μ V/m
RA	=	Receiver Amplitude (including preamplifier) in dB μ V
AF	=	Antenna Factor in dB
CF	=	Cable Attenuation Factor in dB
AG	=	Amplifier Gain in dB
AV	=	Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain.

An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where

FS	=	Field Strength in dB μ V/m
RR	=	RA - AG - AV in dB μ V
LF	=	CF + AF in dB

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29.0 dB and average factor of 5.0 dB are subtracted, giving a field strength of 27.0 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA	=	52.0 dB μ V/m	
AF	=	7.4 dB	RR = 18.0 dB μ V
CF	=	1.6 dB	LF = 9.0 dB
AG	=	29.0 dB	
AV	=	5.0 dB	
FS	=	RR + LF	
FS	=	18.0 + 9.0 = 27.0 dB μ V/m	

Level in μ V/m = Common Antilogarithm [(27.0 dB μ V/m)/20] = 22.4 μ V/m

TEST REPORT

3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 474.606 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: Setup Photos.pdf.

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 2.9 dB

TEST REPORT

RADIATED EMISSIONS

Model: 254249
Date of Test: February 02, 2026
Worst-Case Operating Mode: Transmitting

Table 1

Pursuant to FCC Part 15 Section 15.249 Requirement

Lowest Channel

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2402.000	81.6	33	29.4	78.0	94.0	-16.0
H	4804.000	33.0	33	34.9	34.9	54.0	-19.1
H	7206.000	35.8	33	37.9	40.7	54.0	-13.3
H	9608.000	37.6	33	40.4	45.0	54.0	-9.0
H	12010.000	38.5	33	40.5	46.0	54.0	-8.0
H	14412.000	39.0	33	40.0	46.0	54.0	-8.0

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2402.000	99.8	33	29.4	96.2	114.0	-17.8
H	4804.000	50.2	33	34.9	52.1	74.0	-21.9
H	7206.000	52.7	33	37.9	57.6	74.0	-16.4
H	9608.000	52.9	33	40.4	60.3	74.0	-13.7
H	12010.000	51.9	33	40.5	59.4	74.0	-14.6
H	14412.000	52.4	33	40.0	59.4	74.0	-14.6

- Notes: 1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+ Errata to C63.10a-2024.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205.
7. Measurement Uncertainty is ±5.3dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 254249
Date of Test: February 02, 2026
Worst-Case Operating Mode: Transmitting

Table 2

Pursuant to FCC Part 15 Section 15.249 Requirement

Middle Channel

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2440.000	80.4	33	29.4	76.8	94.0	-17.2
H	4880.000	32.8	33	34.9	34.7	54.0	-19.3
H	7320.000	32.7	33	37.9	37.6	54.0	-16.4
H	9760.000	39.4	33	40.4	46.8	54.0	-7.2
V	12200.000	38.1	33	40.5	45.6	54.0	-8.4
H	14640.000	39.0	33	38.4	44.4	54.0	-9.6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2440.000	98.5	33	29.4	94.9	114.0	-19.1
H	4880.000	49.7	33	34.9	51.6	74.0	-22.4
H	7320.000	47.6	33	37.9	52.5	74.0	-21.5
H	9760.000	56.0	33	40.4	63.4	74.0	-10.6
V	12200.000	51.3	33	40.5	58.8	74.0	-15.2
H	14640.000	52.4	33	38.4	57.8	74.0	-16.2

- Notes:
1. Peak Detector Data unless otherwise stated.
 2. Average detector is applied according to ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+ Errata to C63.10a-2024.
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205.
 7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 254249
Date of Test: February 02, 2026
Worst-Case Operating Mode: Transmitting

Table 3

Pursuant to FCC Part 15 Section 15.249 Requirement

Highest Channel

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2480.000	80.8	33	29.4	77.2	94.0	-16.8
H	4960.000	36.3	33	34.9	38.2	54.0	-15.8
H	7440.000	35.1	33	37.9	40.0	54.0	-14.0
V	9920.000	39.9	33	40.4	47.3	54.0	-6.7
H	12400.000	39.4	33	40.5	46.9	54.0	-7.1
V	14880.000	38.4	33	38.4	43.8	54.0	-10.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2480.000	98.9	33	29.4	95.3	114.0	-18.7
H	4960.000	53.4	33	34.9	55.3	74.0	-18.7
H	7440.000	51.7	33	37.9	56.6	74.0	-17.4
V	9920.000	57.0	33	40.4	64.4	74.0	-9.6
H	12400.000	52.8	33	40.5	60.3	74.0	-13.7
V	14880.000	51.6	33	38.4	57.0	74.0	-17.0

- Notes:
1. Peak Detector Data unless otherwise stated.
 2. Average detector is applied according to ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+ Errata to C63.10a-2024.
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205.
 7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 254249
Date of Test: March 26, 2026
Worst-Case Operating Mode: BLE

Table 4

Pursuant to FCC Part 15 Section 15.209 Requirement

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
H	474.606	33.1	16	26.0	43.1	46.0	-2.9
H	488.166	30.5	16	26.0	40.5	46.0	-5.5
H	501.727	31.3	16	26.0	41.3	46.0	-4.7
H	515.287	31.3	16	27.0	42.3	46.0	-3.7
H	528.848	26.9	16	27.0	37.9	46.0	-8.1
H	542.407	28.9	16	28.0	40.9	46.0	-5.1

- Notes:
1. Quasi-Peak Detector Data unless otherwise stated.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205.
 6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

4.0 EQUIPMENT PHOTOGRAPHS

For electronic filing, the photographs are saved with filename: External Photos.pdf and Internal Photos.pdf.

5.0 PRODUCT LABELLING

For electronics filing, the FCC ID label artwork and the label location are saved with filename: Label.pdf.

6.0 TECHNICAL SPECIFICATIONS

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: Block.pdf and Circuit.pdf respectively.

7.0 INSTRUCTION MANUAL

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: Manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

TEST REPORT


8.0 MISCELLANEOUS INFORMATION

The miscellaneous information includes details of the test procedure and measured bandwidth / calculation of factor such as pulse desensitization and averaging factor (calculation and timing diagram).

8.1 Radiated Emission on the Bandedge

From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz to 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.10-2020+Cor.1-2023+ C63.10a-2024+Errata to C63.10a-2024 for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of Part 15.249(d).


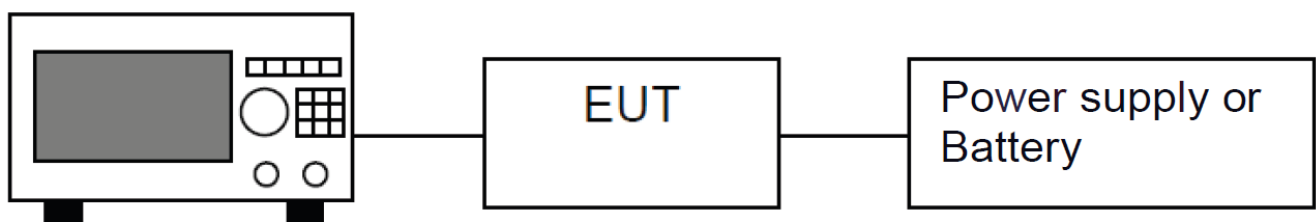


Spectrum Analyzer

Block diagram of Test setup

TEST REPORT

PEAK MEASUREMENT

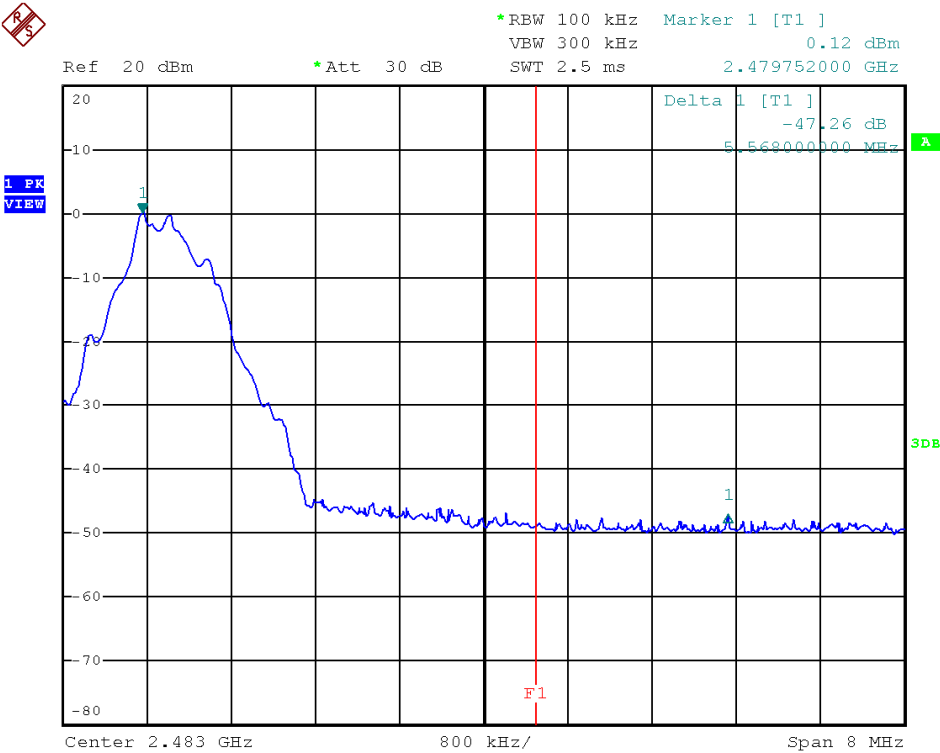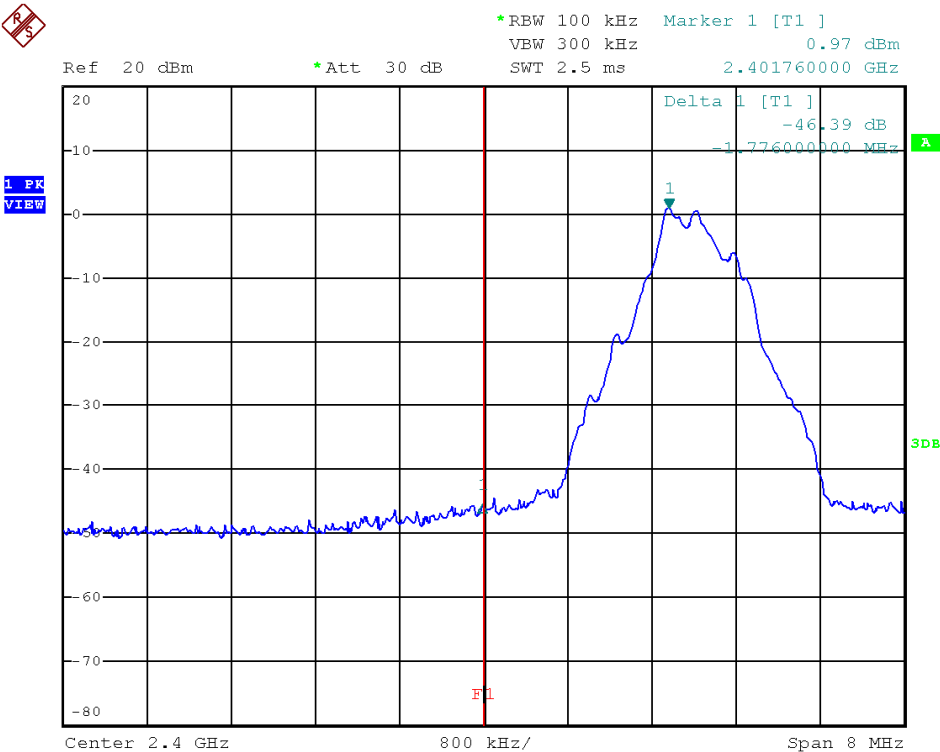

TEST REPORT

PEAK MEASUREMENT

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower Bandedge

Peak Resultant Field Strength = Fundamental Emissions (Peak Value) – delta from the plot

$$= 96.2 \text{ dB}\mu\text{V/m} - 46.4 \text{ dB}$$

$$= 49.8 \text{ dB}\mu\text{V/m}$$

Average Resultant Field Strength = Fundamental Emissions (Average Value) – delta from the plot

$$= 78.0 \text{ dB}\mu\text{V/m} - 46.4 \text{ dB}$$

$$= 31.6 \text{ dB}\mu\text{V/m}$$

Upper Bandedge

Peak Resultant Field Strength = Fundamental Emissions (Peak Value) – delta from the plot

$$= 95.3 \text{ dB}\mu\text{V/m} - 47.3 \text{ dB}$$

$$= 48.0 \text{ dB}\mu\text{V/m}$$

Average Resultant Field Strength = Fundamental Emissions (Average Value) – delta from the plot

$$= 77.2 \text{ dB}\mu\text{V/m} - 47.3 \text{ dB}$$

$$= 29.9 \text{ dB}\mu\text{V/m}$$

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dBμV/m (Peak Limit) and 54 dBμV/m (Average Limit).

TEST REPORT

8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period (Teff) is approximately 625 μ s for a digital "1" bit which illustrated on technical specification, with a resolution bandwidth (3dB) of 3MHz, so the pulse desensitivity factor is 0dB.

8.3 Calculation of Average Factor

Not Applicable.

TEST REPORT

8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+ Errata to C63.10a-2024.


The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 3 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.


TEST REPORT

8.4.1 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

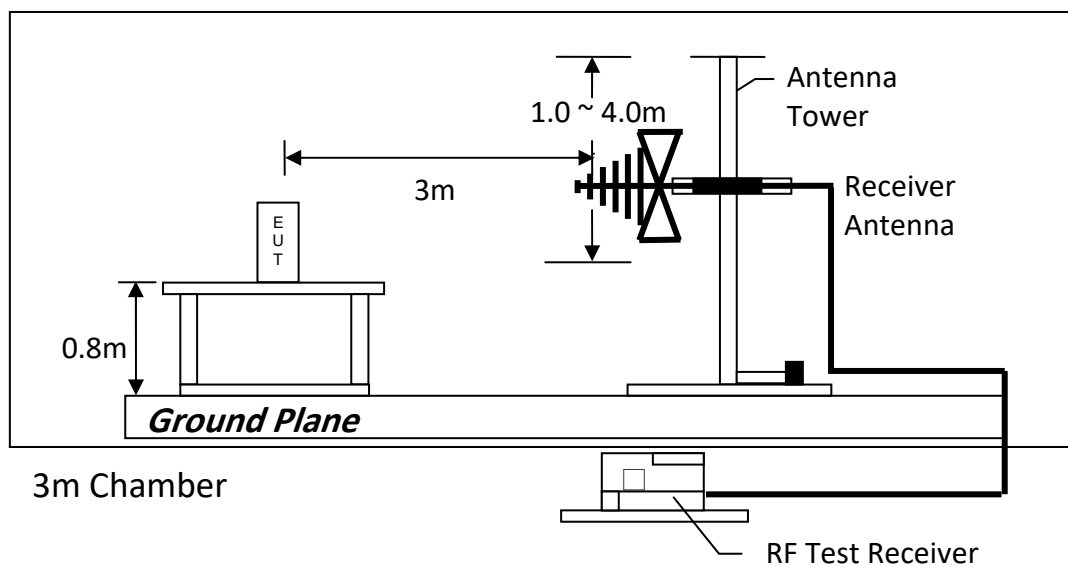


Test setup of radiated emissions up to 1GHz

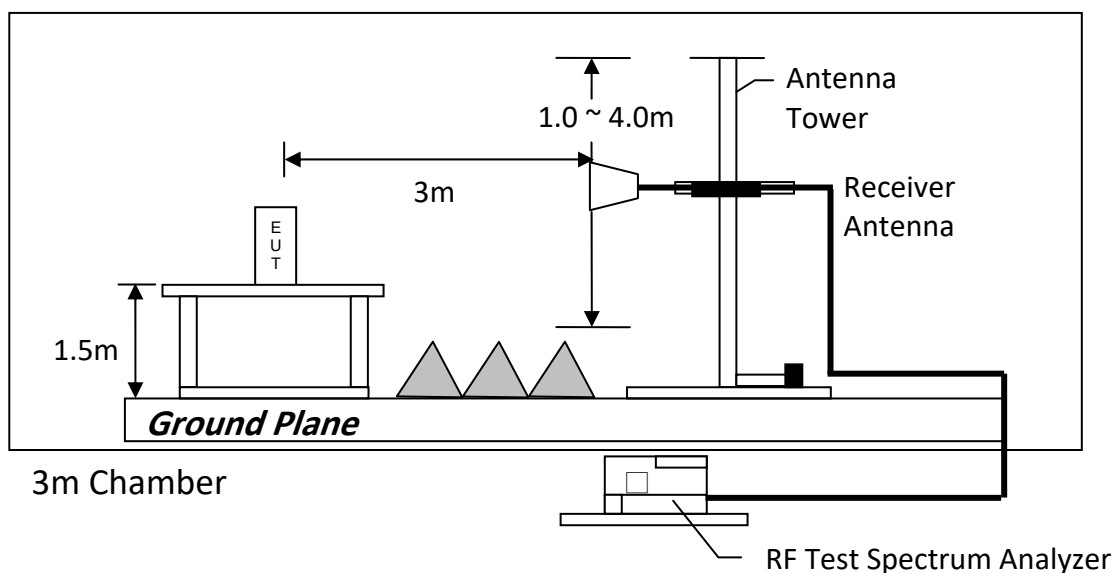


Test setup of radiated emissions above 1GHz

8.5 Occupied Bandwidth



Frequency (MHz)	Occupied Bandwidth (kHz)
Low Channel: 2402	1176
Middle Channel: 2440	1200
High Channel: 2480	1200



TEST REPORT

9.0 CONFIDENTIALITY REQUEST

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: request.pdf.

10.0 EQUIPMENT LIST

1) Radiated Emissions Test

Equipment	EMI Test Receiver (9kHz to 26.5GHz)	Biconical Antenna (30MHz to 300MHz)	Log Periodic Antenna
Registration No.	EW-3156	EW-3242	EW-3243
Manufacturer	ROHDESCHWARZ	EMCO	EMCO
Model No.	ESR26	3110C	3148B
Calibration Date	May 02, 2025	July 30, 2024	July 30, 2024
Calibration Due Date	May 02, 2026	July 30, 2026	July 30, 2026

Equipment	Double Ridged Guide Antenna (1GHz - 18GHz)	Active Loop Antenna (H-field) (9kHz to 30MHz)	Solid State Low Noise Preamplifier Assembly (1 - 18)GHz
Registration No.	EW-1133	EW-2313	EW-3431
Manufacturer	EMCO	ELECTROMETRI	BONN ELEKTRO
Model No.	3115	EM-6876	BLMA 0118-5G
Calibration Date	January 23, 2025	December 19, 2025	December 11, 2025
Calibration Due Date	July 23, 2026	December 19, 2027	December 11, 2026

Equipment	2.4GHz Notch Filter	14m Double Shield RF Cable (9kHz - 6GHz)	RF Cable 14m (1GHz to 26.5GHz)
Registration No.	EW-3435	EW-2376	EW-2781
Manufacturer	MICROWAVE	RADIALL	GREATBILLION
Model No.	N0324413	n m/br56/bnc m 14m	SMA m/SHF5MPU /SMA m ra14m,26G
Calibration Date	October 09, 2024	November 06, 2025	February 18, 2025
Calibration Due Date	April 09, 2026	November 06, 2026	May 18, 2026

Equipment	12 metre RF Cable (1-40)GHz	Pyramidal Horn Antenna
Registration No.	EW-2774	EW-1679
Manufacturer	GREATBILLION	SCHWARZBECK
Model No.	SMA m-m ra 12m 40G outdoor	BBHA9170
Calibration Date	February 18, 2025	August 20, 2025
Calibration Due Date	May 18, 2026	February 20, 2027

TEST REPORT

2) Bandedge & Bandwidth Measurement

Equipment	EMI Test Receiver (9kHz to 3GHz)
Registration No.	EW-3095
Manufacturer	ROHDESCHWARZ
Model No.	ESCI
Calibration Date	June 19, 2025
Calibration Due Date	June 19, 2026

3) Control Software for Radiated Emission

Software Information	
Software Name	EMC32
Manufacturer	ROHDESCHWARZ
Software version	10.50.40

END OF TEST REPORT