



FCC LISTED,
REGISTRATION NUMBER:
720267

Informe de ensayo nº:
Test report No:

ISED LISTED
REGISTRATION NUMBER
4621A-2

NIE: 54777RRF.002A1

Test report (Modification 1)

USA FCC Part 15.231, 15.209

CANADA RSS-210, RSS-Gen

Radio Frequency Devices. Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

Licence-Exempt Radio Apparatus (All Frequency Bands): Category I Equipment.
General Requirements and Information for the Certification of Radio Apparatus.

Identificación del objeto ensayado.....: Identification of item tested	FZV Transmitter
Marca Trademark	BMW
Modelo y/o referencia tipo Model and /or type reference	FZVS2
Other identification of the product	FCC ID: LX8-FZVS2 IC: 2911A-FZVS2
Final HW version	b103258_02 B.01
Final SW version	IC MASK 4bits 4Kb uPD754264GS SO20 BMW 0.2
Características Features	---
Solicitante Applicant	Valeo Comfort and Driving Assistance 8078 76 rue auguste Perret 94046 - Creteil CEDEX FRANCE
Método de ensayo solicitado, norma.....: Test method requested, standard	USA FCC Part 15.231 10-1-16 Edition: Periodic operation in the band 40.66-40.70 MHz and above 70 MHz. USA FCC Part 15.209 10-1-16 Edition: Radiated emission limits; general requirements. CANADA RSS-210 Issue 9 (August 2016). CANADA RSS-Gen Issue 4 (November 2014). ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Resultado.....: Summary	IN COMPLIANCE
Aprobado por (nombre / cargo y firma) Approved by (name / position & signature)	A. Llamas RF Lab. Manager
Fecha de realización Date of issue	2018-02-21
Formato de informe No.: Report template No	FDT11_20

Index

Competences and guarantees.....	3
General conditions.....	3
Uncertainty	3
Usage of samples.....	3
Test sample description	4
Identification of the client	4
Testing period.....	4
Environmental conditions.....	4
Modifications to the reference test report.....	5
Remarks and comments.....	6
Testing verdicts	6
Appendix A – Test result.....	7

Competences and guarantees

DEKRA Testing and Certification is a testing laboratory accredited by the National Accreditation Body (ENAC - Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a laboratory with a measurement facility in compliance with the requirements of Section 2.948 of the FCC rules and has been added to the list of facilities whose measurements data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Registration Number: 720267.

DEKRA Testing and Certification is a laboratory with a measurement site in compliance with the requirements of RSS 212, Issue 1 (Provisional) and has been added to the list of filed sites of the Canadian Certification and Engineering Bureau. Reference File Number: ISED 4621A-2.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification internal document PODT000.

Usage of samples

Samples undergoing test have been selected by: **the client**

Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
54777/012	FZV Transmitter	FZVS2	---	2017-08-25

Auxiliary elements used with the sample S/01:

Control N°	Description	Model	Serial N°	Date of reception
54777/007	Test accessory	---	---	2017-08-25

1. Sample S/01 has undergone following test(s).

All tests indicated in appendix B.

Test sample description

The sample under test is a Remote Keyless Entry (RKE) which is a wireless System that allows the remote control of the Vehicle Doors. It consists of a Radio Frequency Transmitter Key carried by the user and a Receiver embedded in the Vehicle.

Identification of the client

Valeo Comfort and Driving Assistance

76 rue auguste Perret 94046 - Creteil CEDEX FRANCE

Testing period

The performed test started on 2017-08-31 and finished on 2017-09-05.

The tests have been performed at DEKRA Testing and Certification.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 1 Ω

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 1 Ω
Normal site attenuation (NSA)	< ±4 dB at 10 m distance between item under test and receiver antenna, (30 MHz to 1000 MHz)
Field homogeneity	More than 75% of illuminated surface is between 0 and 6 dB (26 MHz to 1000 MHz).

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 35 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar
Shielding effectiveness	> 100 dB
Electric insulation	> 10 kΩ
Reference resistance to earth	< 1 Ω

Modifications to the reference test report

It was introduced the following modifications in respect to the test report number 54777RRF.002 related with the same samples, in the next clauses and sub-clauses:

Clauses / Sub-clauses	Modification	Justification
Cover sheet / Other identification of the product	FCC ID and IC codes are changed to LX8-FZVS2 and 2911A-FZVS2, respectively	Client's request
Cover sheet / Model and /or type reference	Model is changed to FZVS2	Client's request
Usage of samples / model	Model is changed to FZVS2	Client's request

This modification test report cancels and replaces the test report 54777RRF.002.

Remarks and comments

1: Used instrumentation:

Conducted Measurements

	Last Cal. date	Cal. due date
1. Spectrum analyser Rohde & Schwarz FSL6	2016/10	2018/10

Radiated Measurements

	Last Cal. date	Cal. due date
1. Semianechoic Absorber Lined Chamber ETS FACT3 200STP	N.A.	N.A.
2. BiconicalLog antenna ETS LINDGREN 3142E	2015/06	2018/06
3. Multi Device Controller EMCO 2090	N.A.	N.A.
4. Double-ridge Guide Horn antenna 1-18 GHz SCHWARZBECK BBHA 9120 D	2016/11	2019/11
5. EMI Test Receiver R&S ESU 40	2016/03	2018/03
6. Spectrum analyser Rohde & Schwarz FSW50	2015/12	2017/12
7. RF pre-amplifier 20 MHz-7 GHz PAM-0207	2016/09	2017/09
8. RF pre-amplifier 1-18 GHz Bonn Elektronik BLMA 0118-1M	2016/02	2018/02

Testing verdicts

Not applicable	N/A
Pass	P
Fail	F
Not measured	N/M

FCC PART 15 PARAGRAPH / RSS-210		VERDICT			
		NA	P	F	NM
Section 15.231 Subclause (a) (1) / RSS-210 A.1.1.	Transmitter deactivation	P			
Section 15.231 Subclause (c) / RSS-210 A.1.3...	Bandwidth	P			
Section 15.231 Subclause (b) / 15.209 / RSS-210 A.1.2. / RSS-Gen	Field strength and Emission limitations radiated (Transmitter)	P			

Appendix A – Test result

INDEX

TEST CONDITIONS.....	9
Section 15.231 Subclause (a) (1) / RSS-210 A.1.1. Transmitter deactivation.....	11
Section 15.231 Subclause (c) / RSS-210 A.1.3. Bandwidth	12
Occupied Bandwidth	13
Section 15.231 Subclause (b) /15.209 / RSS-210 A.1.2. / RSS-Gen. Field strength and Emission limitations radiated (Transmitter).....	14

TEST CONDITIONS

Power supply (V):

$$V_{\text{nominal}} = 3.0 \text{ Vdc}$$

Type of power supply = DC voltage from rechargeable battery.

Type of antenna = Integral antenna

TEST FREQUENCIES:

The equipment transmits at the nominal frequency of 315 MHz.

CONDUCTED MEASUREMENTS

The equipment under test was set up in a shielded room and it is directly connected to the spectrum analyzer through a coupling device.



RADIATED MEASUREMENTS

The equipment under test was scanned for spurious emissions in the frequency range 30 to 10000 MHz.


All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m for the frequency range 30 MHz-1000 MHz (30 MHz-1000 MHz Bilog antenna) and at a distance of 1m for the frequency range 1 GHz-10 GHz (1 GHz-18 GHz Double ridge horn antenna).

For radiated emissions in the range 1 GHz-10 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance. The sample is prepared so that transmits continuously when the batteries are connected


The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

Radiated measurements setup $f < 1$ GHz

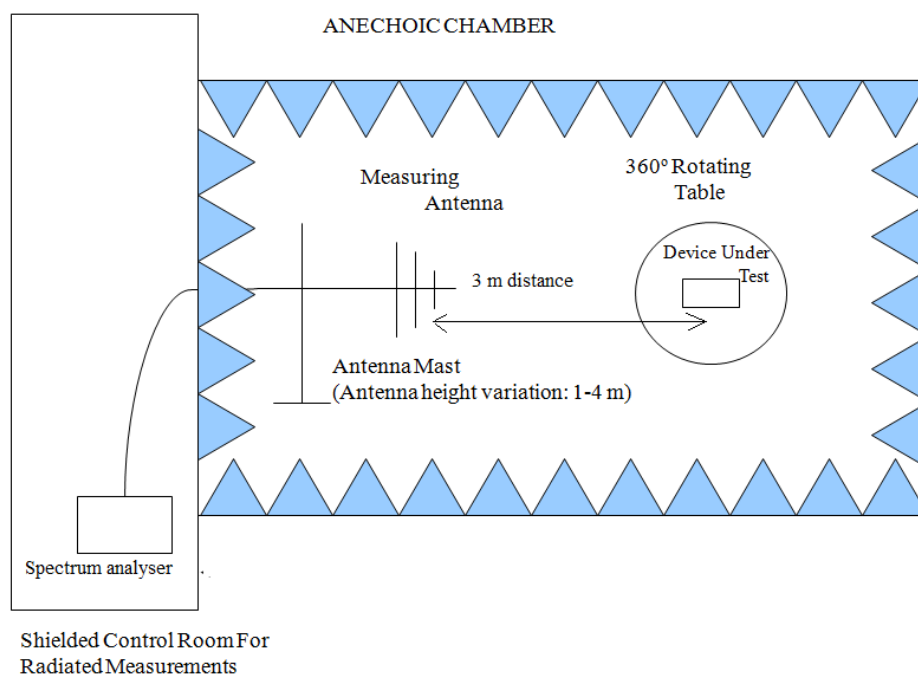

Radiated measurements setup $f > 1$ GHz

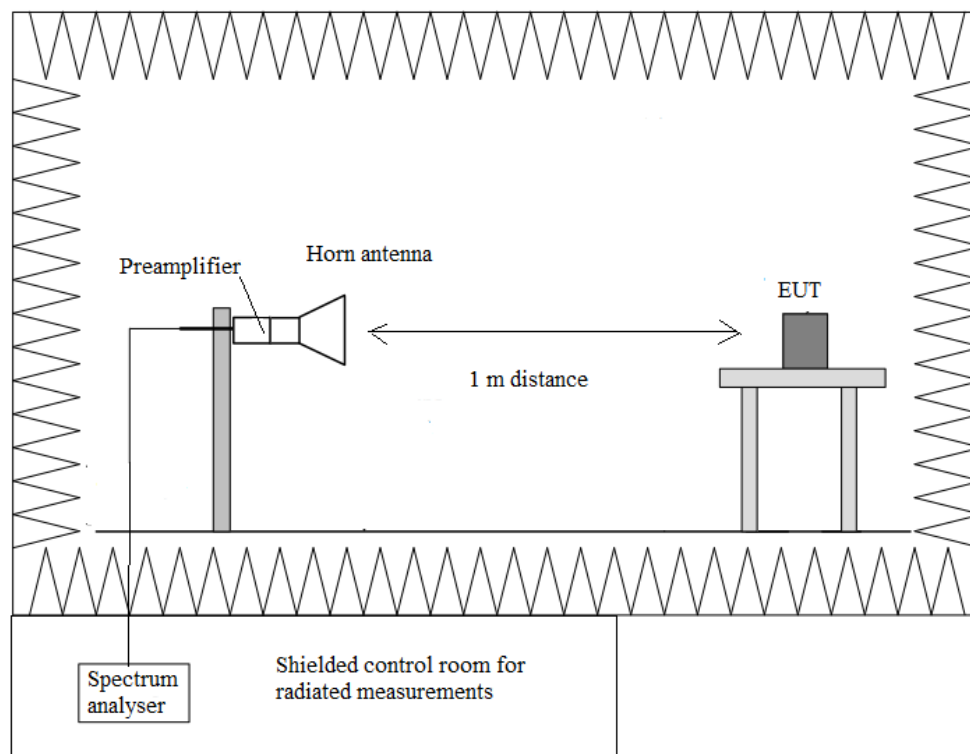

Section 15.231 Subclause (a) (1) / RSS-210 A.1.1. Transmitter deactivation.

SPECIFICATION


A manually operated transmitter shall be equipped with a push-to-operate switch and be under manual control at all times during transmission.

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

RESULTS

The equipment can only operate in manual mode.

The transmission is activated by pressing a button and ceases after releasing it in less than 5 seconds (see next plot).

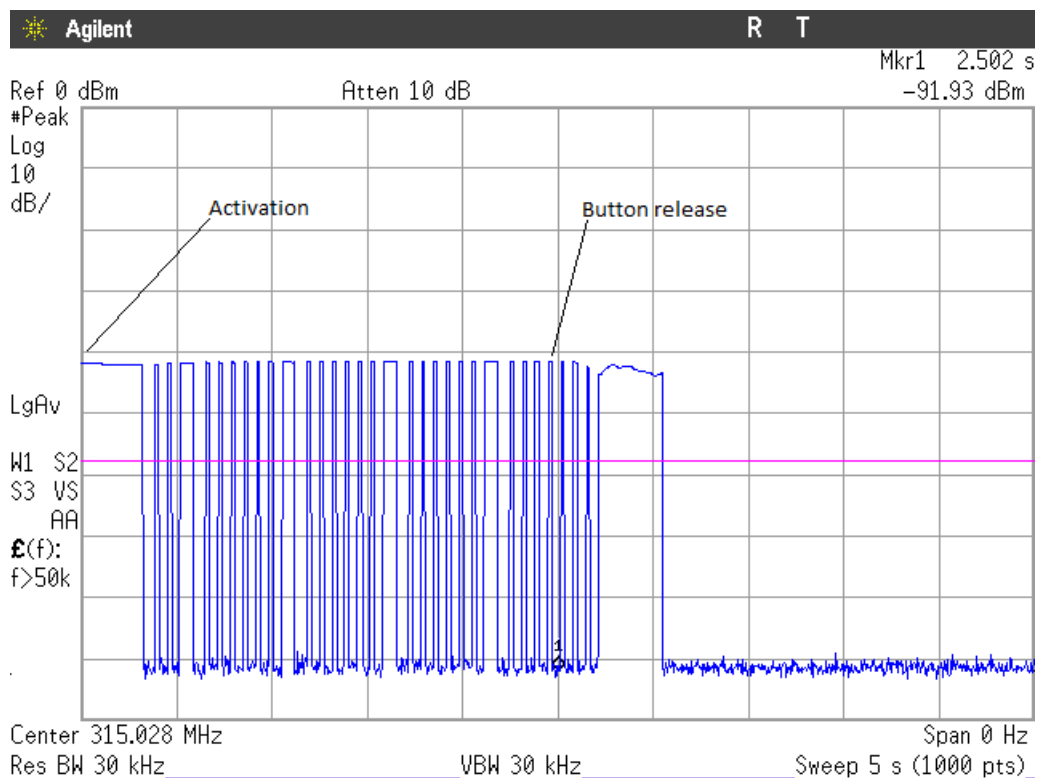

Verdict: Pass

Section 15.231 Subclause (c) / RSS-210 A.1.3. Bandwidth

SPECIFICATION


FCC 15.231: The bandwidth of the emission shall be no wider than 0.25 % of the centre frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

RESULTS (see next plots)

Nominal centre frequency = 315 MHz

Limit of spectrum bandwidth = 0.25 % of 315 MHz = 787.5 kHz

Measured 20 dB Bandwidth (kHz)	8.75
Measurement uncertainty (kHz)	<±0.28

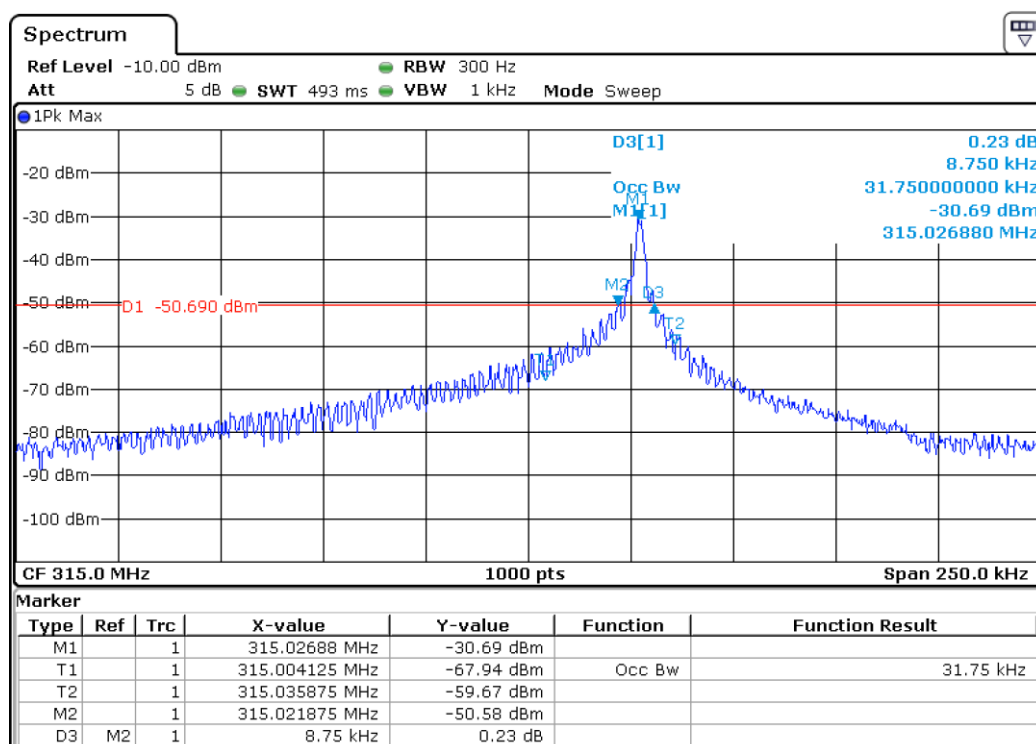

Verdict: PASS

Occupied Bandwidth

SPECIFICATION


RSS-210. A.1.3.: the 99% bandwidth shall be no wider than 0.25% of the centre frequency for devices operating between 70 MHz and 900 MHz.

RESULTS (see next plots).

Nominal centre frequency = 315 MHz

Limit of spectrum bandwidth = 0.25 % of 315 MHz = 787.5 kHz

99% bandwidth (kHz)	31.750
-26 dBc bandwidth (kHz)	21.500
Measurement uncertainty (kHz)	<±0.28

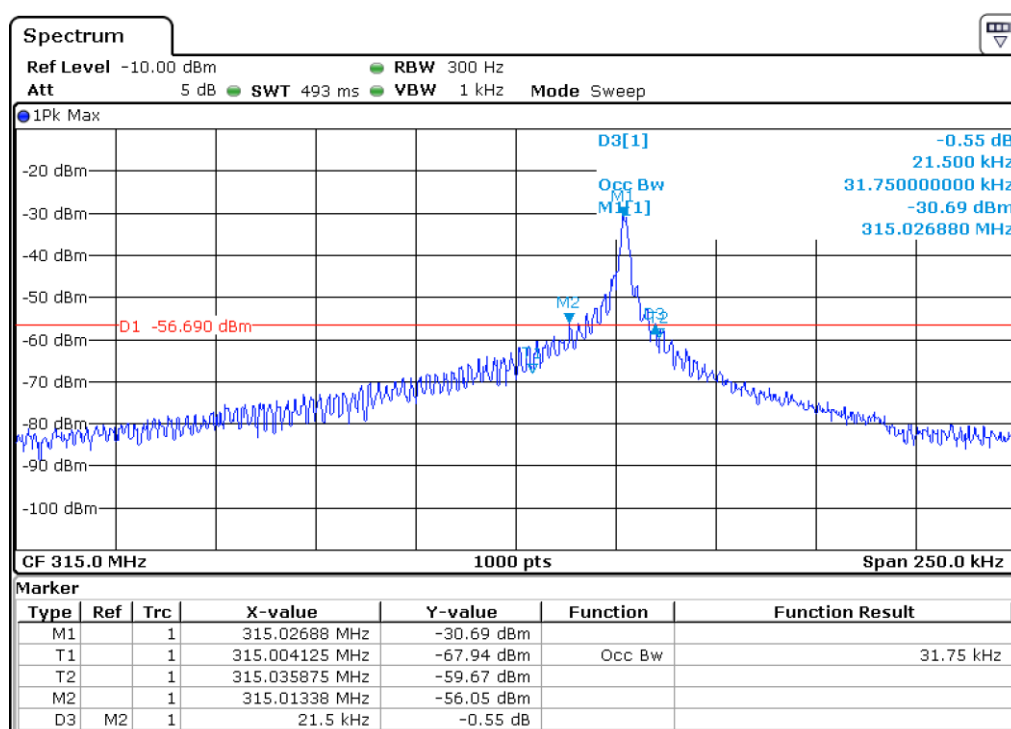

Verdict: PASS

Section 15.231 Subclause (b) / 15.209 / RSS-210 A.1.2. / RSS-Gen. Field strength and Emission limitations radiated (Transmitter)

SPECIFICATION

The field strength of emissions from intentional radiators shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental ($\mu\text{V/m}$)	Field strength of spurious emissions ($\mu\text{V/m}$)
40.66 – 40.70	2,250	225
70 – 130	1,250	125
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3,750	375
260 - 470	3,750 to 12,500 **	375 to 1,2500 **
Above 470	12,500	1,250

**: Linear Interpolations. The maximum permitted unwanted emission level is 20dB below the maximum permitted fundamental level.

Spurious emissions shall be attenuated to the limits shown in the above table or to the general limits shown in Section 15.209/RSS-Gen, whichever limit permits a higher field strength.


For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RESULTS:

The field strength is calculated by adding correction factor to the measured level from the spectrum analyser. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.


The transmission is pulsed so the average values of transmitter fundamental and spurious emissions are calculated from the measured peak values using the duty cycle correction factor δ as indicated in standard ANSI C63.10-2013.

Computation of duty-cycle correction factor

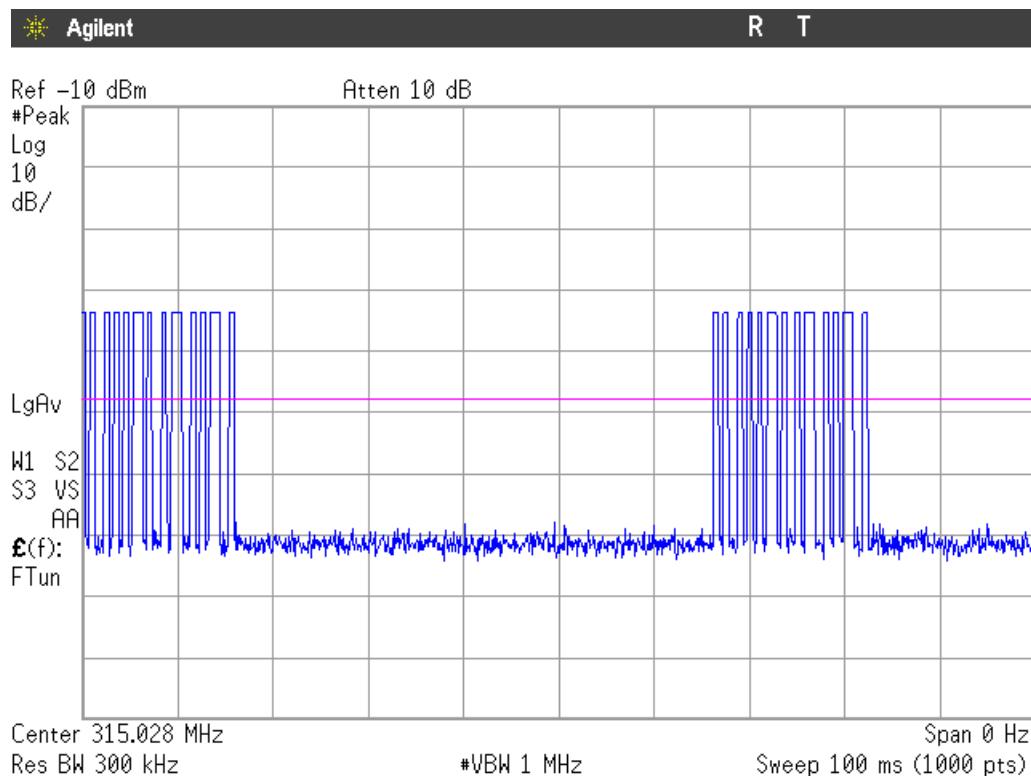


Number of pulses within 100 ms: 26

Sub-part1:

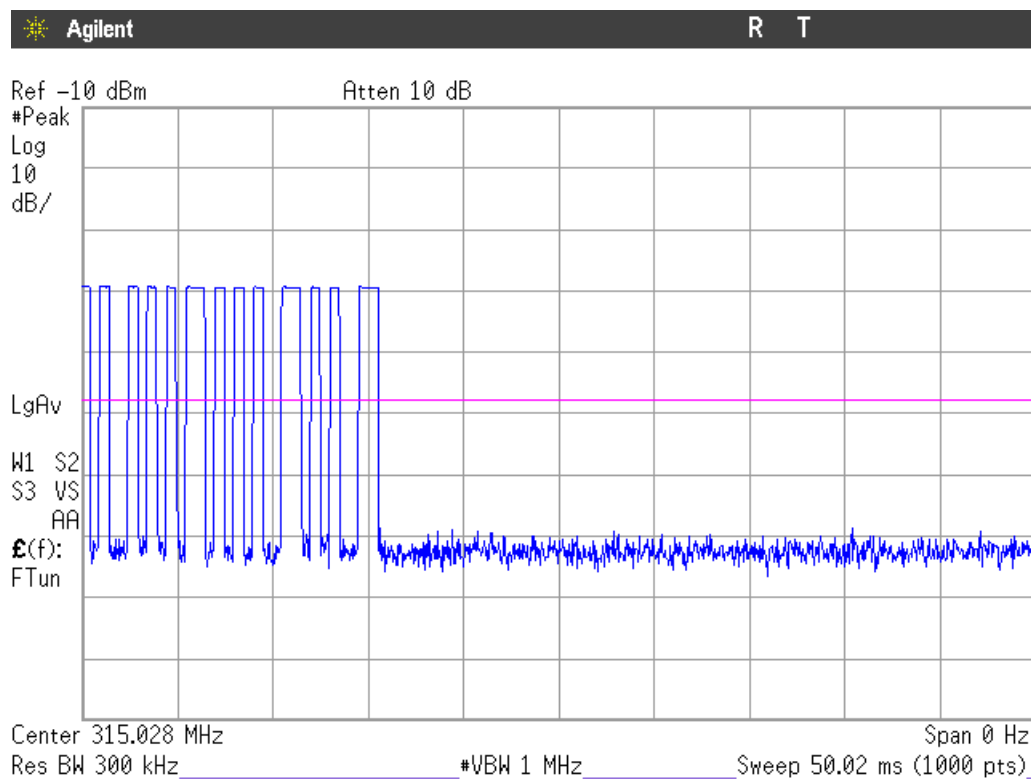

Sub-part2:

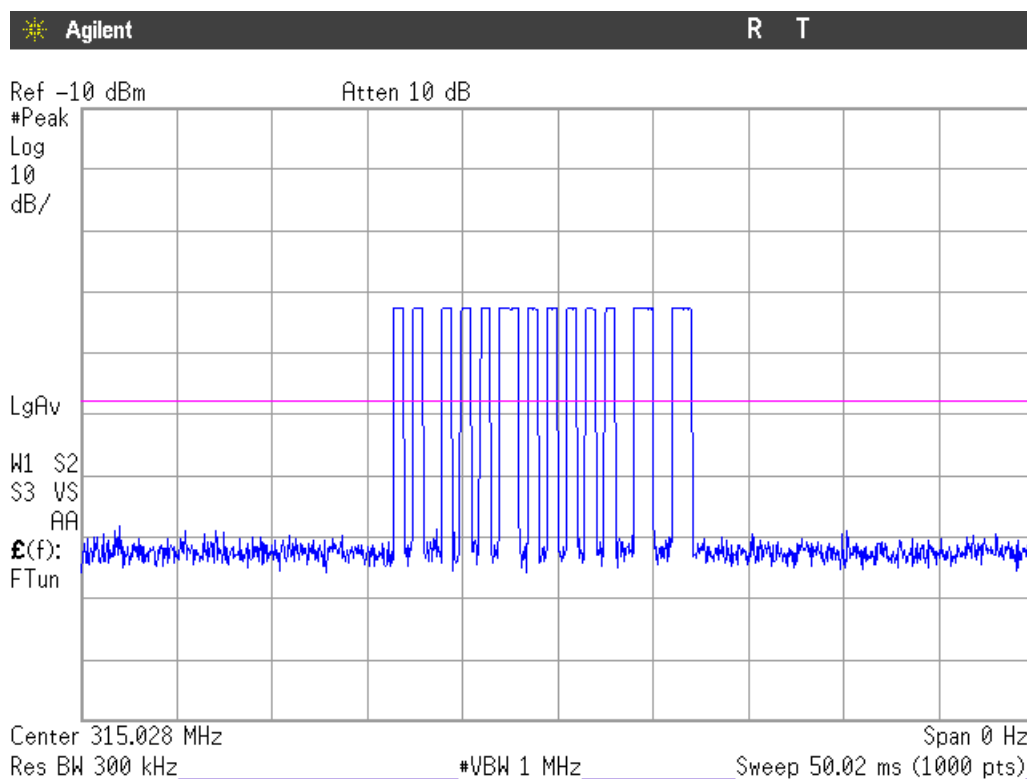

Duty-cycle correction factor calculation.

Sub-part 1

Sub-pulse	Duration (ms)	Number of pulses	Sub-pulse "On Time" (ms)
1	0.5007	10	5.007
2	1.0010	3	3.001
		TOTAL ON TIME Sub-part 1:	8.008

Sub-part 2

Sub-pulse	Duration (ms)	Number of pulses	Sub-pulse "On Time" (ms)
1	0.5007	10	5.007
2	1.0010	3	3.001
		TOTAL ON TIME Sub-part 2:	8.008

Sub-part	Sub-pulse "On Time" (ms)
1	8.008
2	8.008
TOTAL ON TIME:	16.02

Duty-cycle correction factor calculation.

Sub-pulse	Duration (ms)	Number of pulses	Sub-pulse "On Time" (ms)
1	16.02	1	16.02
		TOTAL ON TIME	16.02

Duty cycle correction factor $\delta = 16.02 / 100 = 0.1602$

$\delta = 20 \log (0.1602) = -15.91 \text{ dB}$

Frequency range 30 MHz-1000 MHz (see next plots)

I. Fundamental

Frequency (MHz)	Polarization	Detector	Emission Level ($\mu\text{V/m}$)	Limits ($\mu\text{V/m}$) 15.231 (b) / 15.209
315 (Fundamental)	H	Peak	3,404	60,420 (95.62 dB $\mu\text{V/m}$) / ---
630.090	H	Peak	107.27	6,042 (75.62 dB $\mu\text{V/m}$) / 1,995 (66 dB $\mu\text{V/m}$)
945.098	H	Peak	283.80	6,042 (75.62 dB $\mu\text{V/m}$) / 1,995 (66 dB $\mu\text{V/m}$)

Calculation for average level

Spurious frequency (MHz)	Emission Level (dB $\mu\text{V/m}$) Peak	Duty-cycle correction factor δ (dB)	Corrected Emission Level (dB $\mu\text{V/m}$) Average	Limits ($\mu\text{V/m}$) 15.231 (b) / 15.209
315 (Fundamental)	70.64	-15.91	54.73	6,042 (75.62 dB $\mu\text{V/m}$) / ---
630.090	40.61	-15.91	24.70	604,2 (55.62 dB $\mu\text{V/m}$) / 200 (46 dB $\mu\text{V/m}$)
945.098	49.06	-15.91	33.15	604,2 (55.62 dB $\mu\text{V/m}$) / 200 (46 dB $\mu\text{V/m}$)

Measurement uncertainty (dB): $\pm 3.88 \text{ dB}$.

Frequency range 1 GHz-5 GHz (see next plots)

Highest spurious emissions levels.

Frequency (GHz)	Polarization	Detector	Emission Level (dB μ V/m)	Limits (μ V/m) 15.231 (b) / 15.209
1.5751	H	Peak	56.57	6,042 (75.62 dB μ V/m) / 5,000 (74 dB μ V/m)
1.8901	H	Peak	58.48	6,042 (75.62 dB μ V/m) / 5,000 (74 dB μ V/m)

Calculation for average level


Spurious frequency (GHz)	Emission Level (dB μ V/m) Peak	Duty-cycle correction factor δ (dB)	Corrected Emission Level (dB μ V/m) Average	Limits (μ V/m) 15.231 (b) / 15.209
1.5751	56.57	-15.91	40.66	604,2 (55.62 dB μ V/m) / 500 (53.97 dB μ V/m)
1.8901	58.48	-15.91	42.57	604,2 (55.62 dB μ V/m) / 500 (53.97 dB μ V/m)

All other peak values are below the average limits.

Measurement uncertainty (dB): ± 4.87 dB.

Verdict: PASS.

FREQUENCY RANGE 30 MHz-1000 MHz

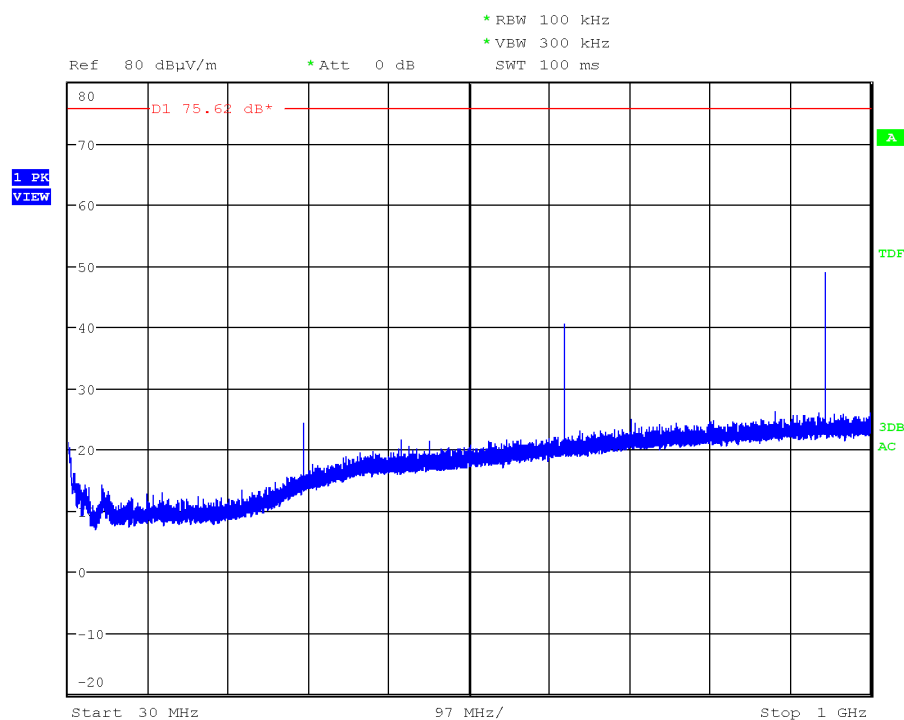

Note: For spurious emissions, measurement the carrier frequency (fundamental) was attenuated using a notch filter.

FREQUENCY RANGE 1 GHz to 5 GHz

