

## System Validation - D1800V2 S/N: 294

(Antenna input power: 250 mW)

SAM; Flat

Probe: ET3DV6 - SN1578; ConvF(5.50,5.50,5.50); Crest factor: 1.0

Head 1800 MHz:  $\sigma = 1.38$  mho/m  $\epsilon_r = 40.1$   $\rho = 1.00$  g/cm<sup>3</sup>


Cube 5x5x7: Peak: 17.1 mW/g, SAR (1g): 9.31 mW/g, SAR (10g): 4.89 mW/g, (Worst-case extrapolation)

Penetration depth: 8.5 (8.1, 9.4) [mm]

Powerdrift: -0.00 dB

Ambient Temperature (degree C): 22.5

Liquid Temperature (degree C): 20

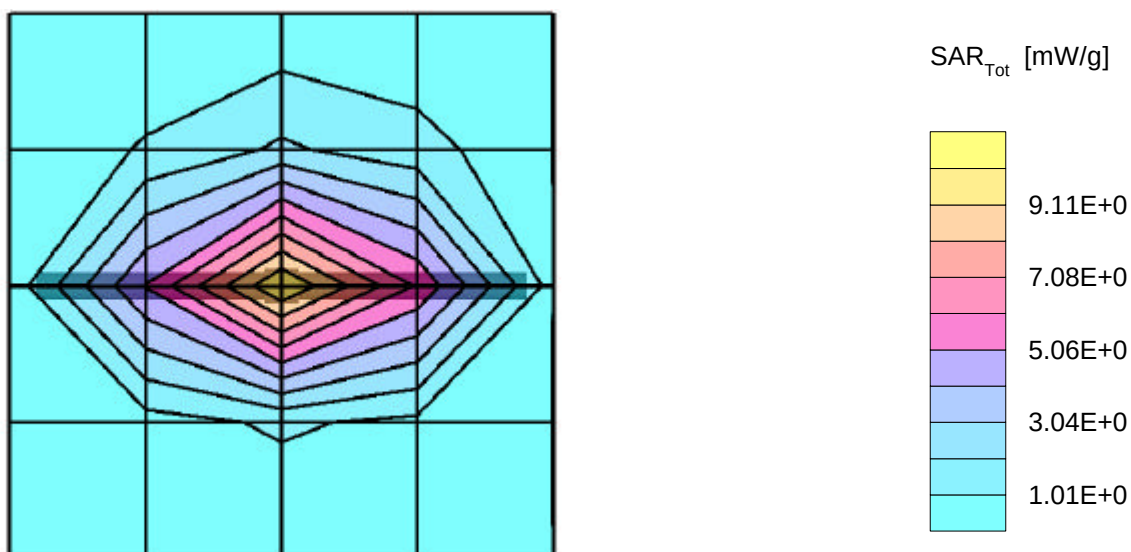

# System Validation - D1800V2 S/N: 294

(Antenna input power: 250 mW)

SAM;  
Probe: ET3DV6 - SN1578; ConvF(5.50,5.50,5.50); Crest factor: 1.0  
Head 1800 MHz:  $\sigma = 1.38 \text{ mho/m}$   $\epsilon_r = 40.1$   $\rho = 1.00 \text{ g/cm}^3$   
: , , ()  
Penetration depth: 8.5 (8.1, 9.4) [mm]

Ambient Temperature (degree C): 22.5  
Liquid Temperature (degree C): 20

