



Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B2 a Mode High Channel 5320 MHz Chain 1

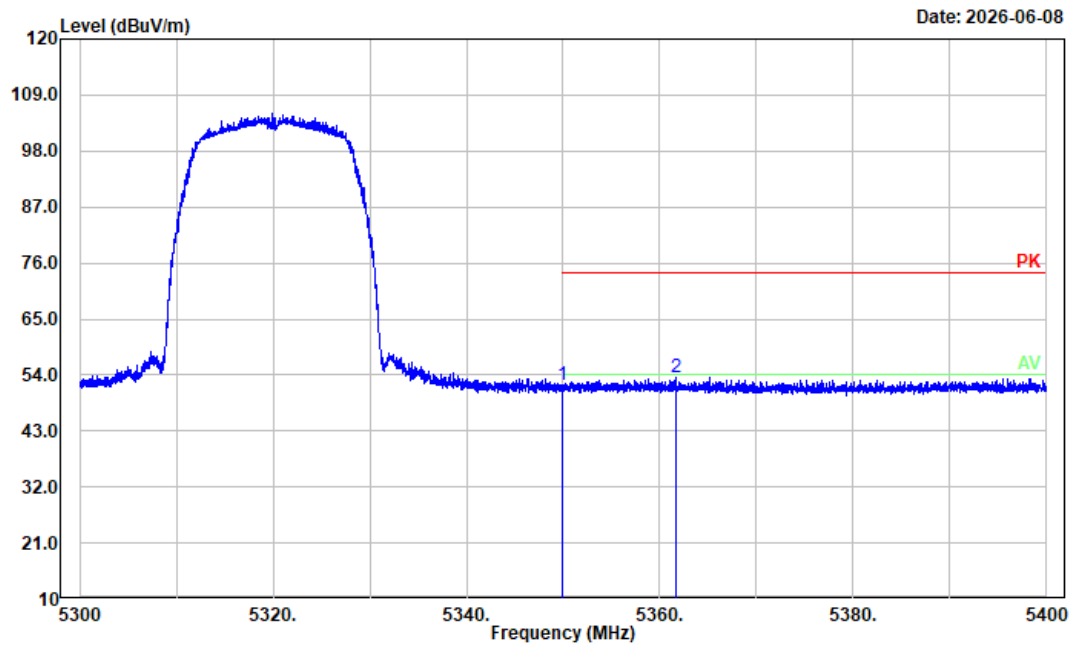


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	45.52	6.43	51.95	74.00	22.05	Peak
2	5361.640	47.15	6.43	53.58	74.00	20.42	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B2 a Mode High Channel 5320 MHz Chain 1

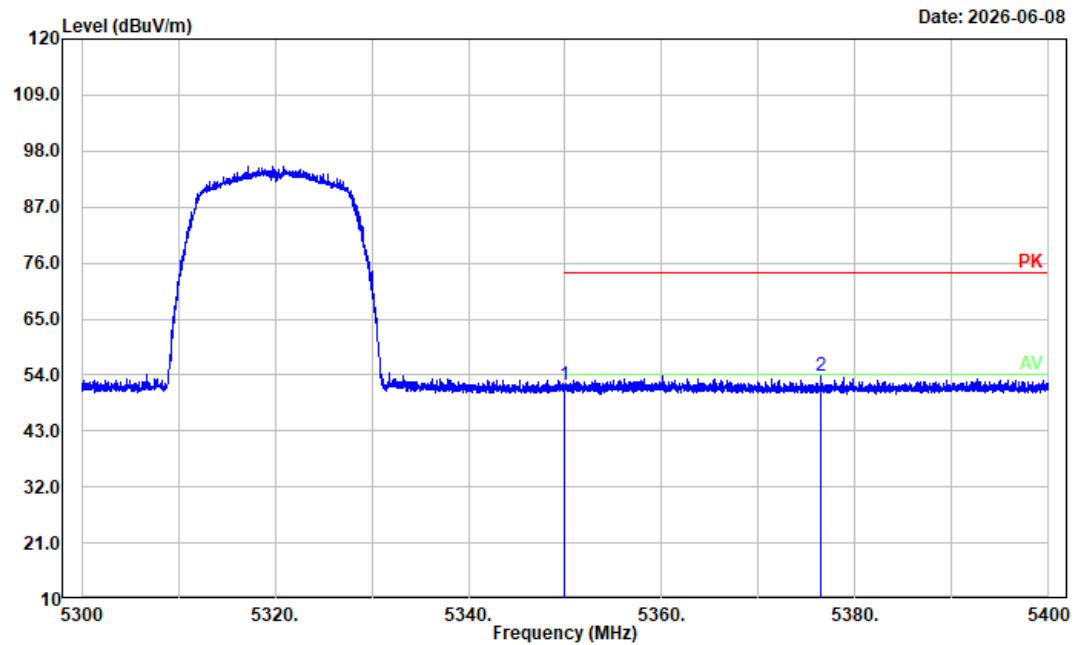


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	45.46	6.43	51.89	74.00	22.11	Peak
2	5376.400	47.43	6.44	53.87	74.00	20.13	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B2 n20 Mode Low Channel 5260 MHz

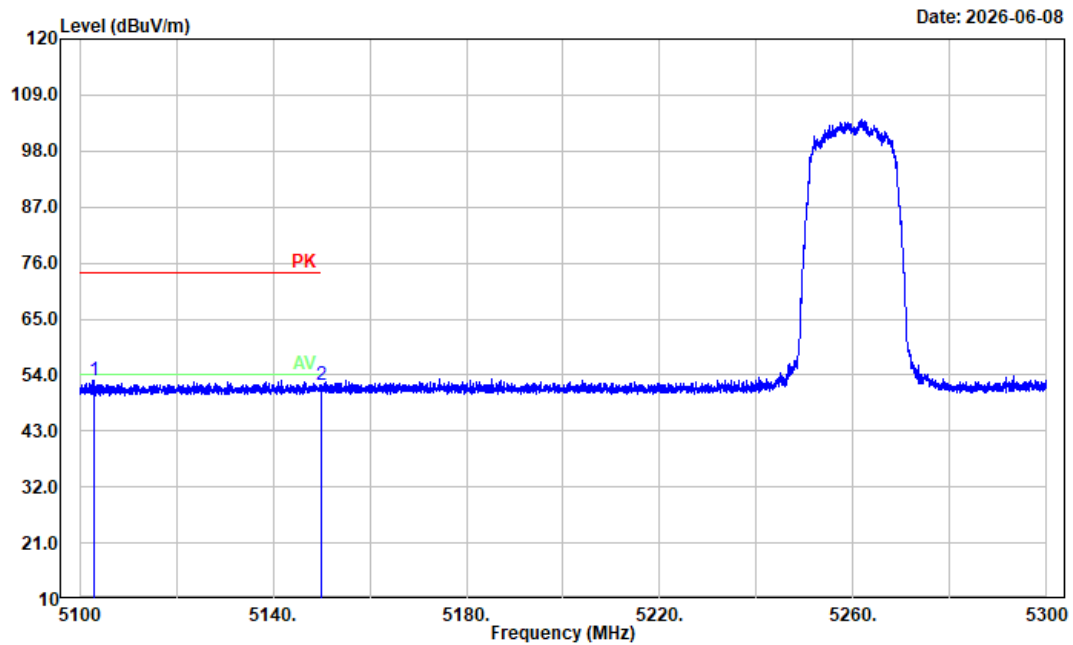


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5103.040	47.30	5.63	52.93	74.00	21.07	Peak
2	5150.000	46.17	5.83	52.00	74.00	22.00	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B2 n20 Mode Low Channel 5260 MHz

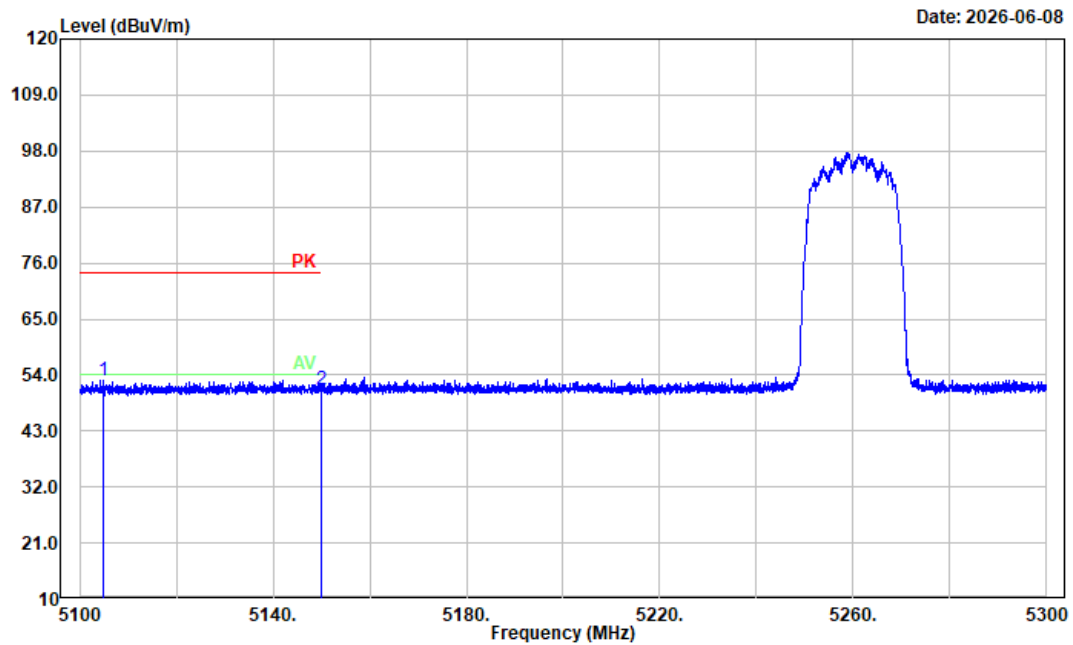


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5105.040	47.43	5.64	53.07	74.00	20.93	Peak
2	5150.000	45.36	5.83	51.19	74.00	22.81	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B2 n20 Mode High Channel 5320 MHz

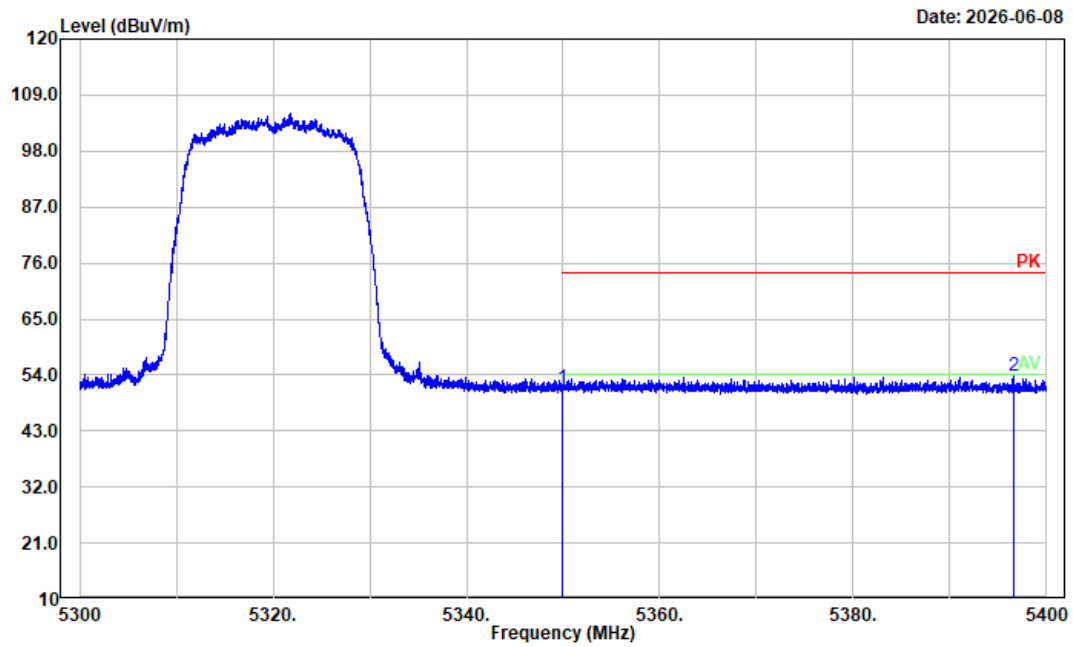


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	45.14	6.43	51.57	74.00	22.43	Peak
2	5396.600	47.26	6.45	53.71	74.00	20.29	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B2 n20 Mode High Channel 5320 MHz

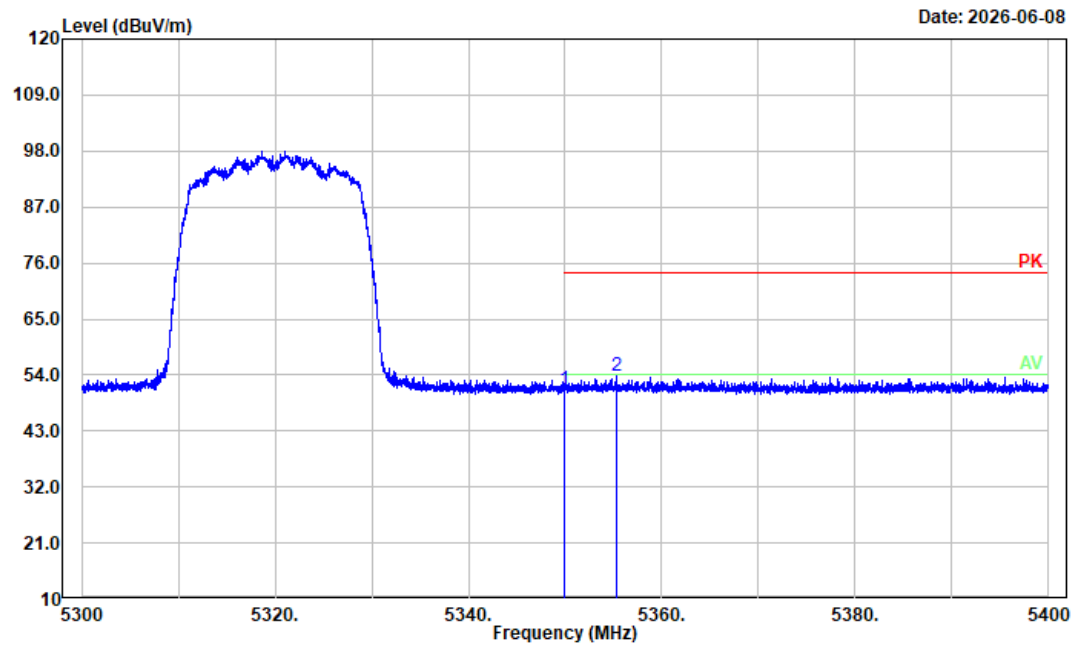


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	44.77	6.43	51.20	74.00	22.80	Peak
2	5355.320	47.37	6.43	53.80	74.00	20.20	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B2 n40 Mode Low Channel 5270 MHz

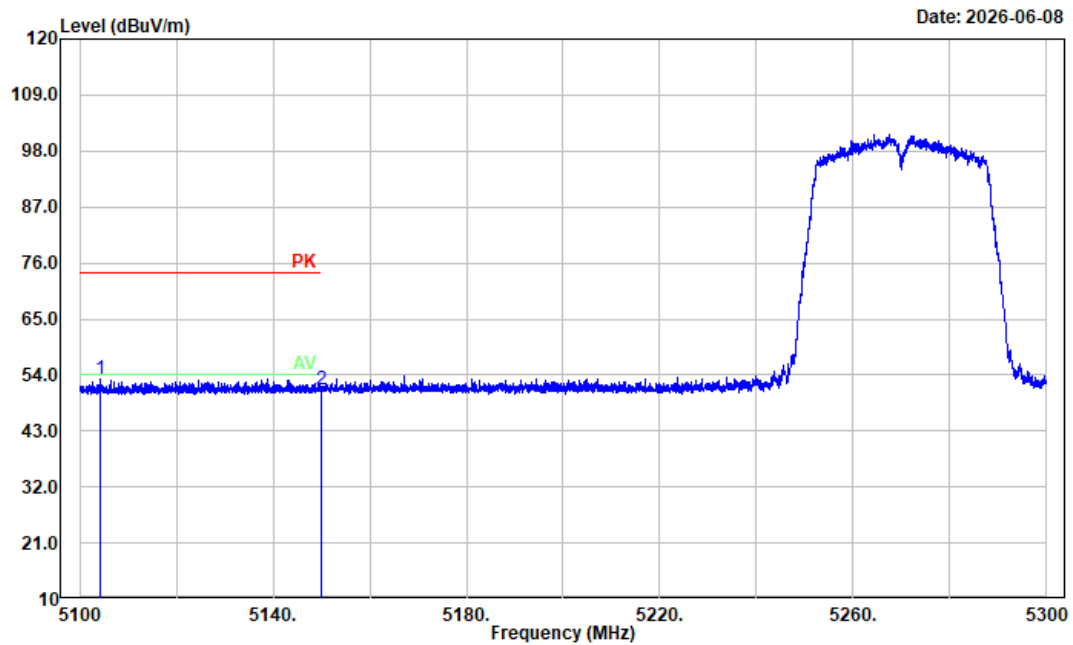


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5104.400	47.66	5.64	53.30	74.00	20.70	Peak
2	5150.000	45.41	5.83	51.24	74.00	22.76	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B2 n40 Mode Low Channel 5270 MHz

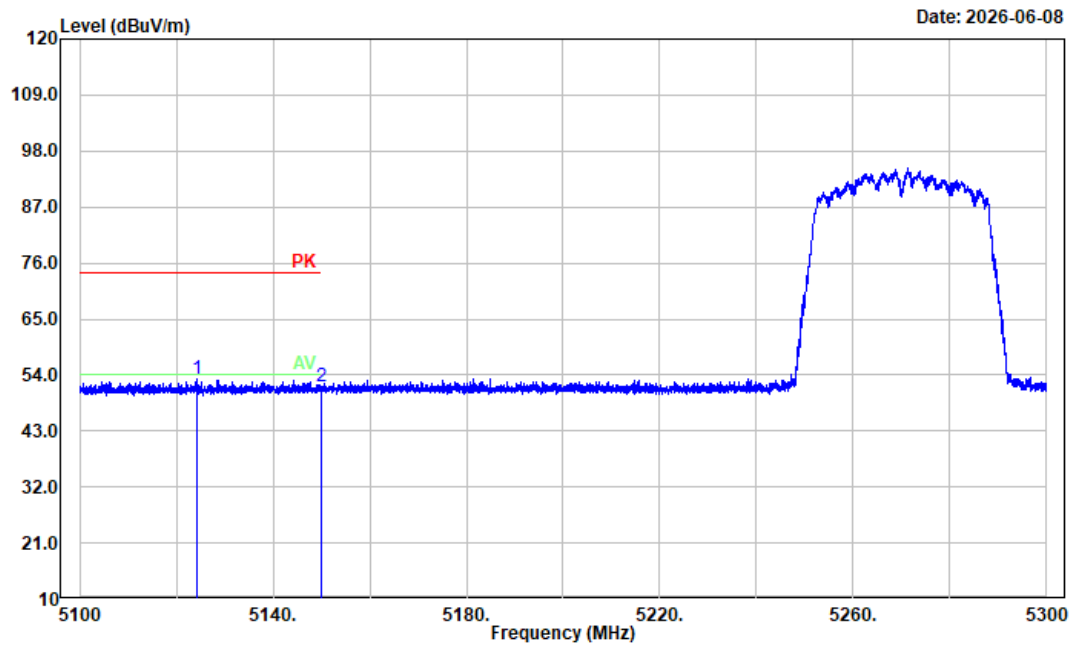


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5124.400	47.38	5.72	53.10	74.00	20.90	Peak
2	5150.000	46.02	5.83	51.85	74.00	22.15	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B2 n40 Mode High Channel 5310 MHz

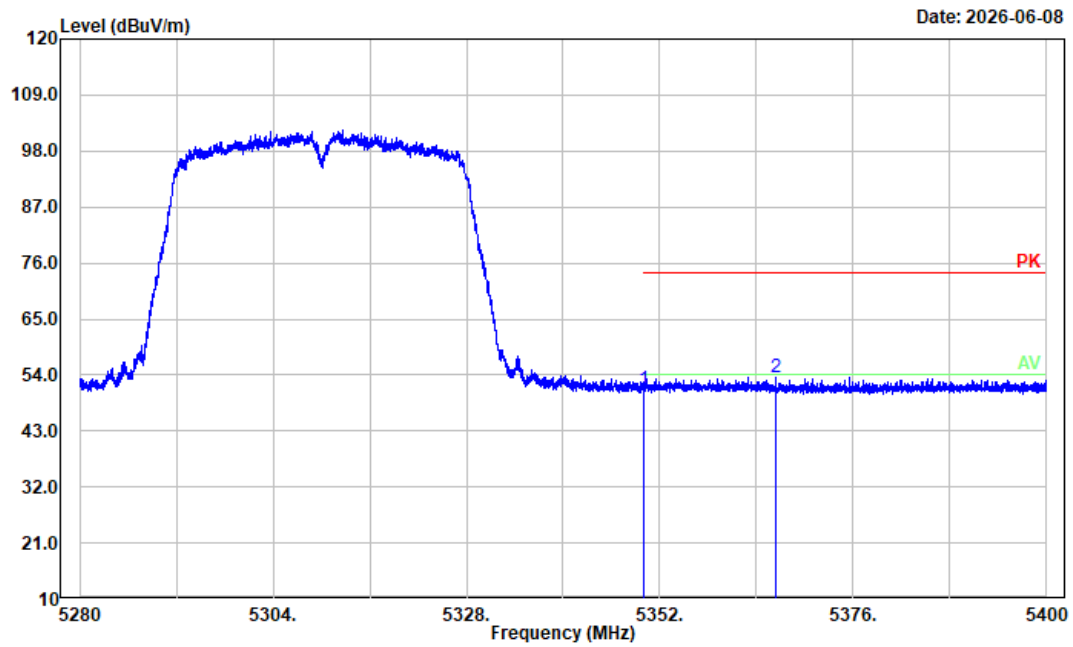


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	44.58	6.43	51.01	74.00	22.99	Peak
2	5366.328	47.22	6.43	53.65	74.00	20.35	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B2 n40 Mode High Channel 5310 MHz

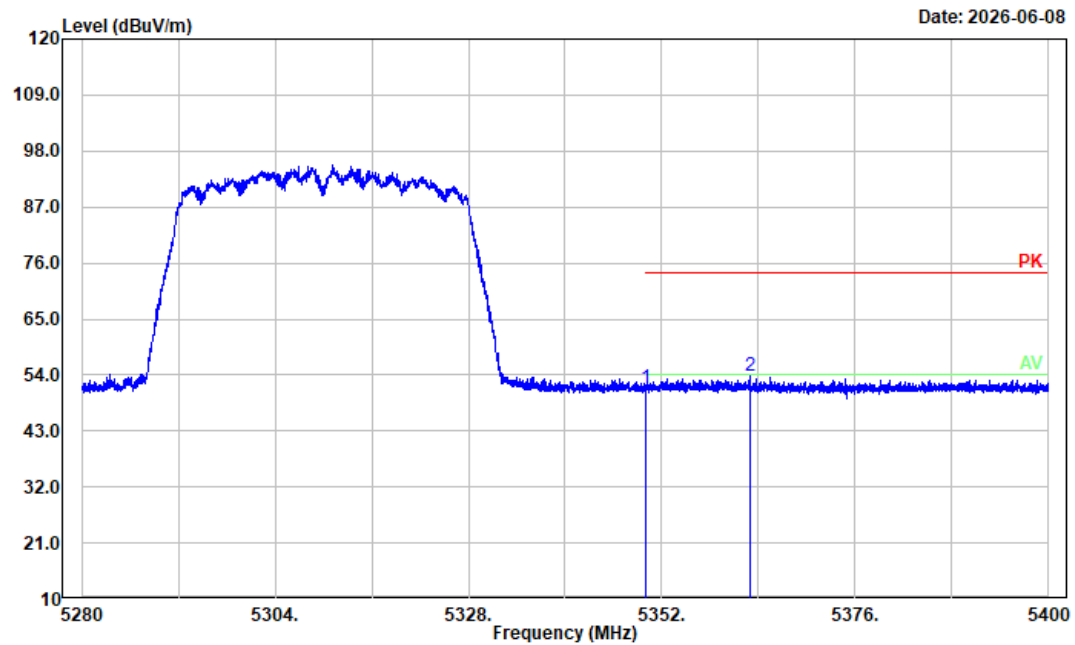


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	44.96	6.43	51.39	74.00	22.61	Peak
2	5362.920	47.52	6.44	53.96	74.00	20.04	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B2 ac20 Mode Low Channel 5260 MHz

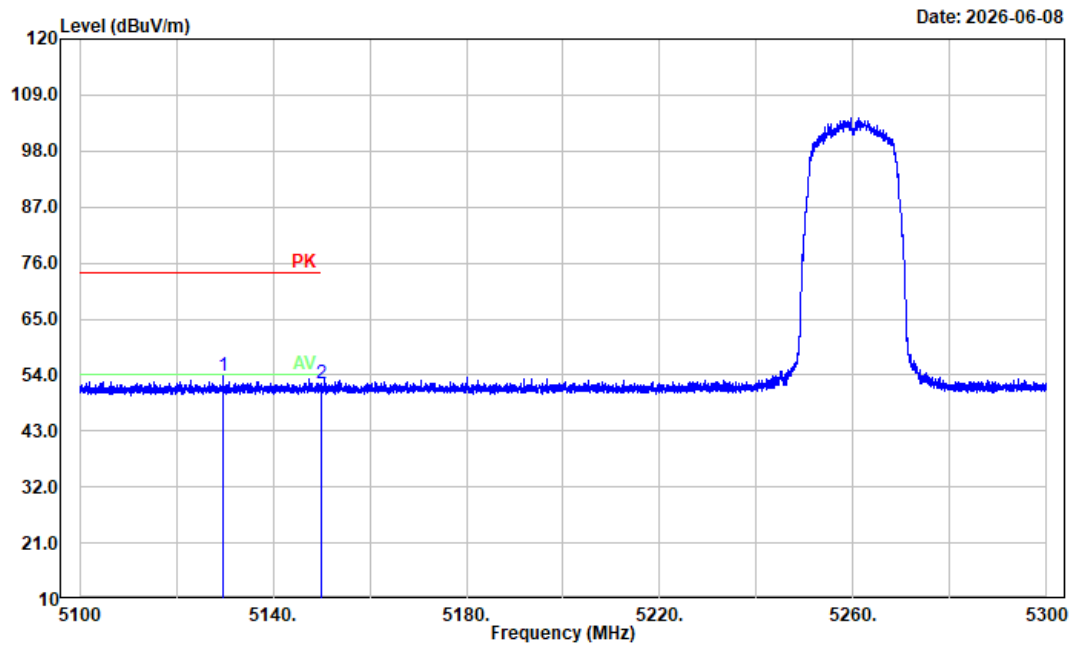


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5129.640	48.18	5.75	53.93	74.00	20.07	Peak
2	5150.000	46.37	5.83	52.20	74.00	21.80	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B2 ac20 Mode Low Channel 5260 MHz

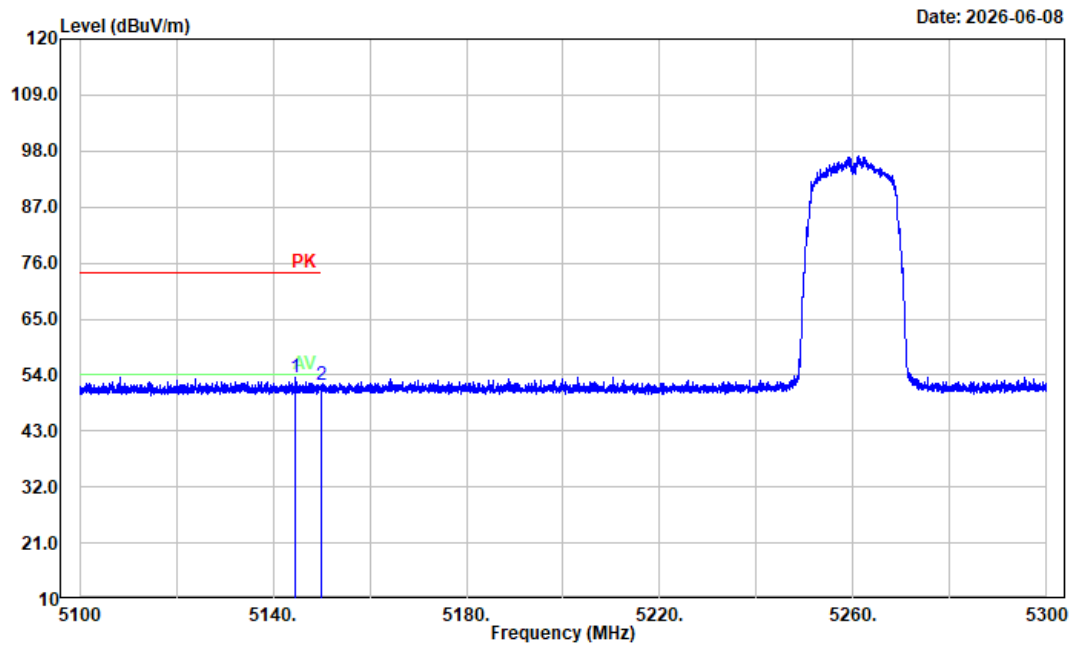


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5144.720	47.64	5.81	53.45	74.00	20.55	Peak
2	5150.000	46.24	5.83	52.07	74.00	21.93	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B2 ac20 Mode High Channel 5320 MHz

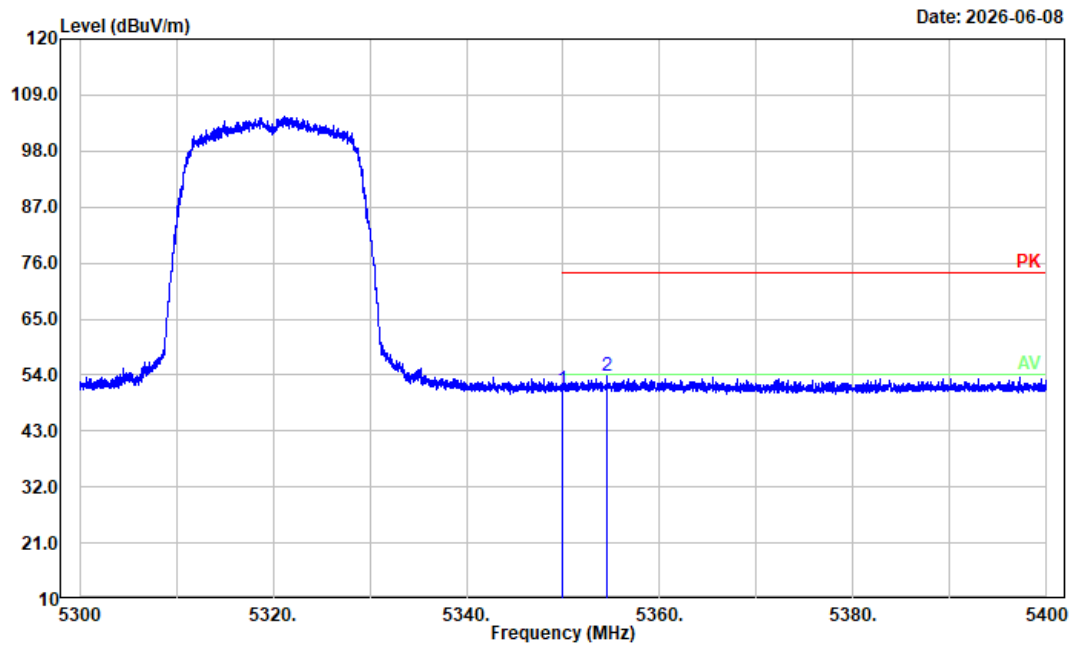


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	44.64	6.43	51.07	74.00	22.93	Peak
2	5354.580	47.37	6.43	53.80	74.00	20.20	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B2 ac20 Mode High Channel 5320 MHz

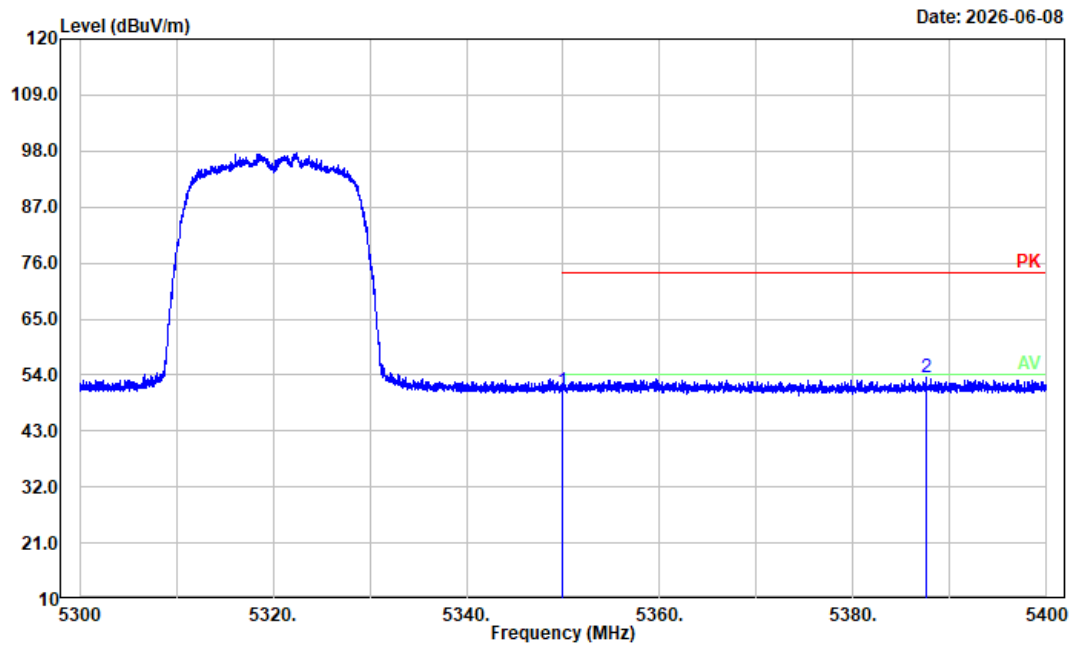


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	44.52	6.43	50.95	74.00	23.05	Peak
2	5387.580	46.95	6.45	53.40	74.00	20.60	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B2 ac40 Mode Low Channel 5270 MHz

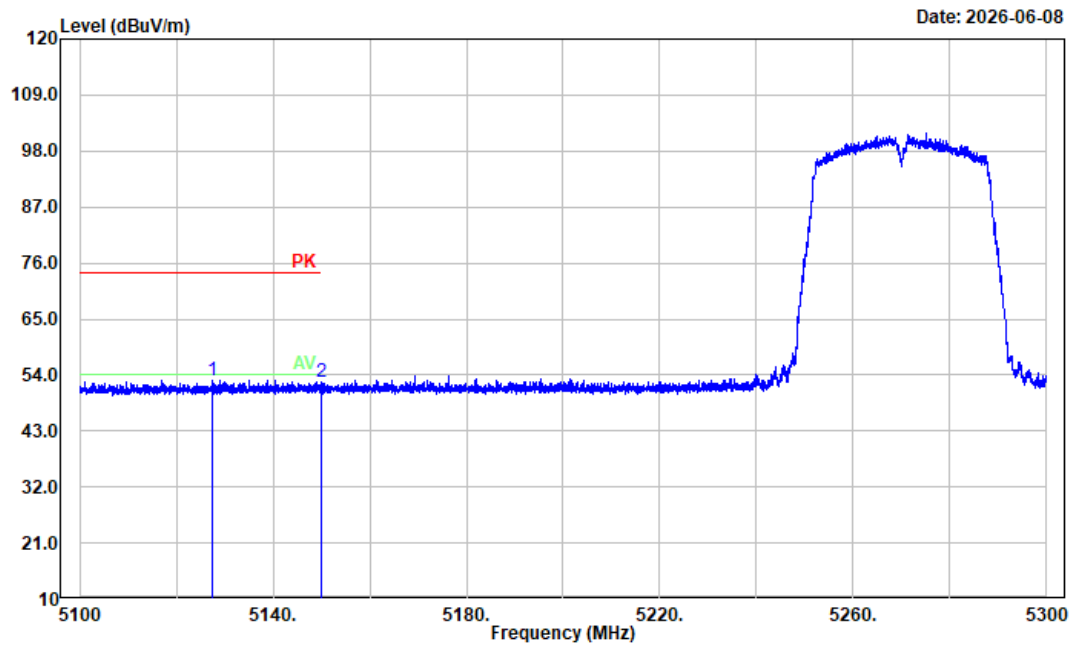


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5127.560	47.32	5.74	53.06	74.00	20.94	Peak
2	5150.000	46.89	5.83	52.72	74.00	21.28	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B2 ac40 Mode Low Channel 5270 MHz

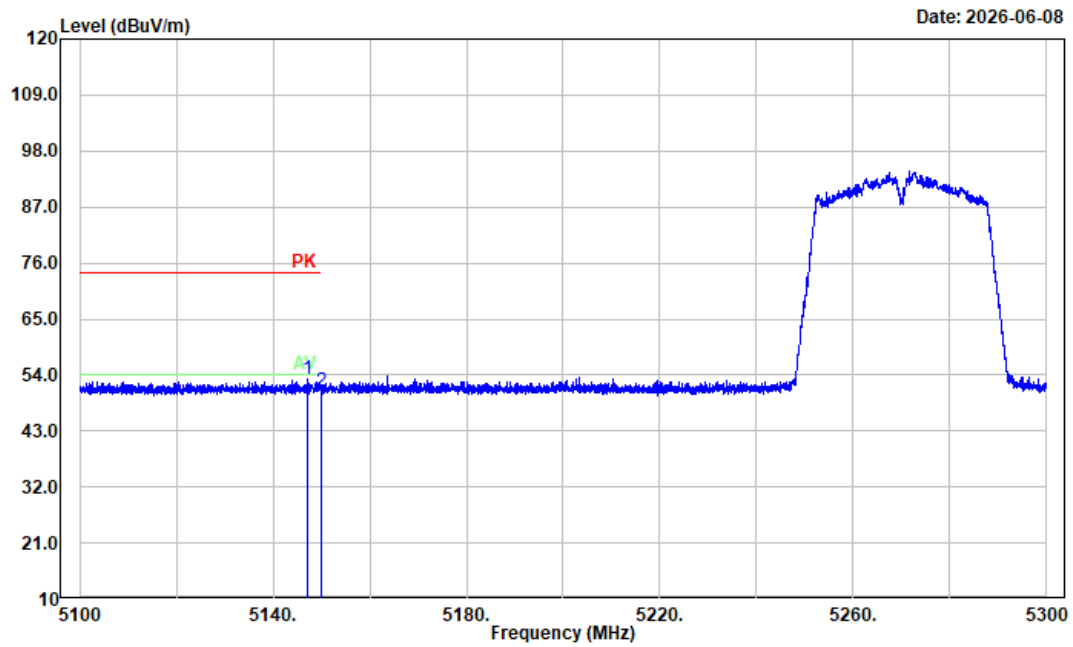


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5147.040	47.46	5.82	53.28	74.00	20.72	Peak
2	5150.000	45.09	5.83	50.92	74.00	23.08	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B2 ac40 Mode High Channel 5310 MHz

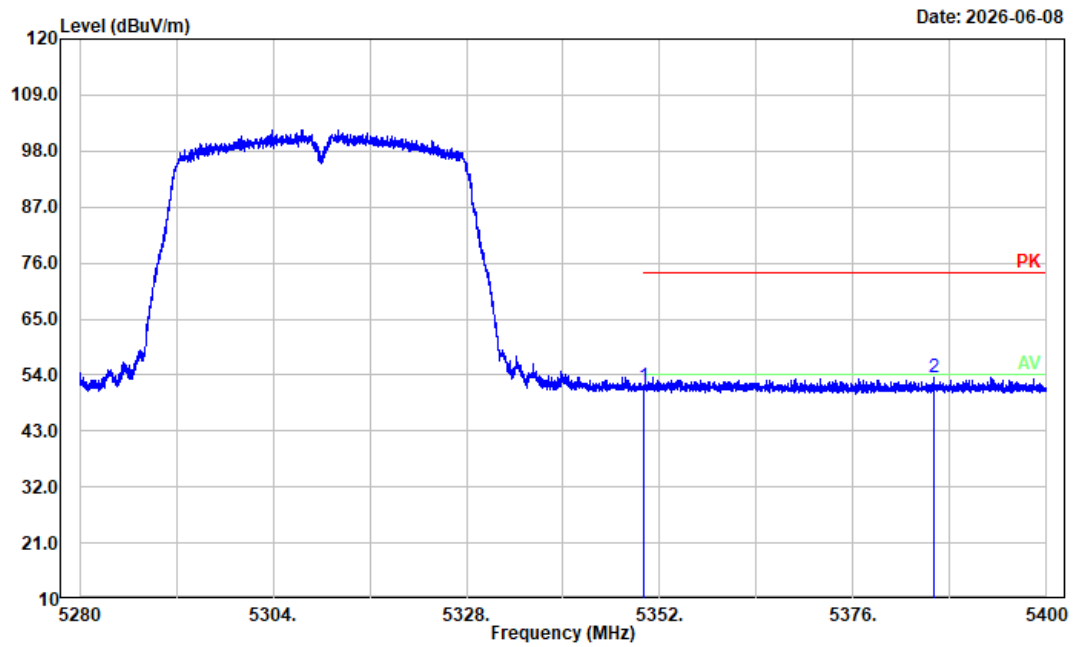


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	45.36	6.43	51.79	74.00	22.21	Peak
2	5385.936	47.20	6.44	53.64	74.00	20.36	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B2 ac40 Mode High Channel 5310 MHz

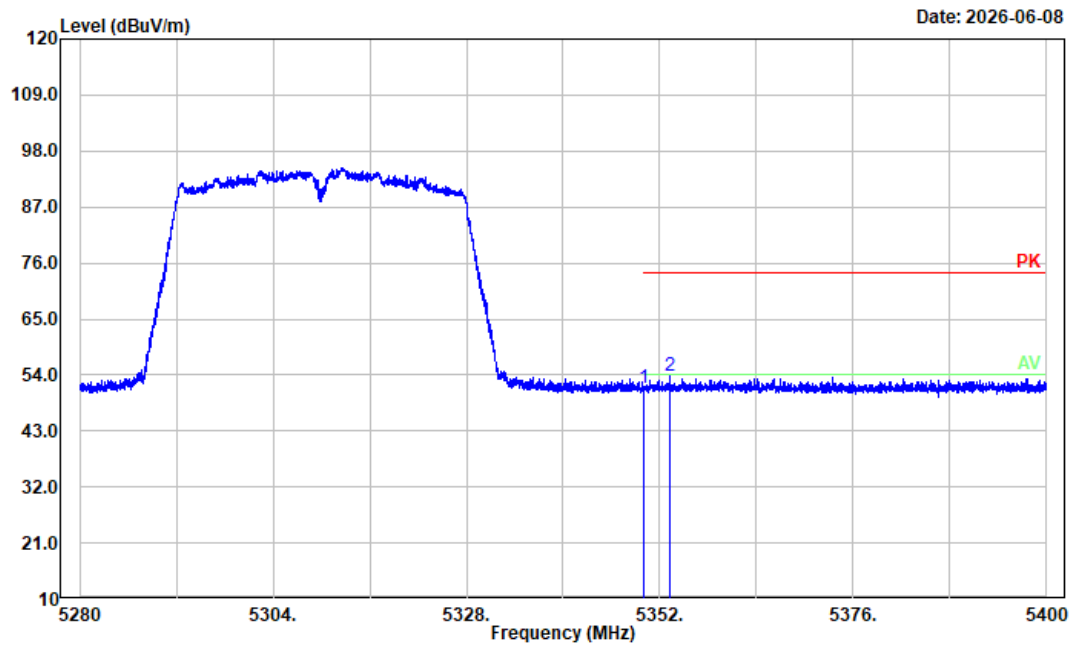


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	44.89	6.43	51.32	74.00	22.68	Peak
2	5353.176	47.39	6.43	53.82	74.00	20.18	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:10kHz
Polarization: Horizontal
Note: 5G WiFi B2 ac80 Mode Middle Channel 5290 MHz

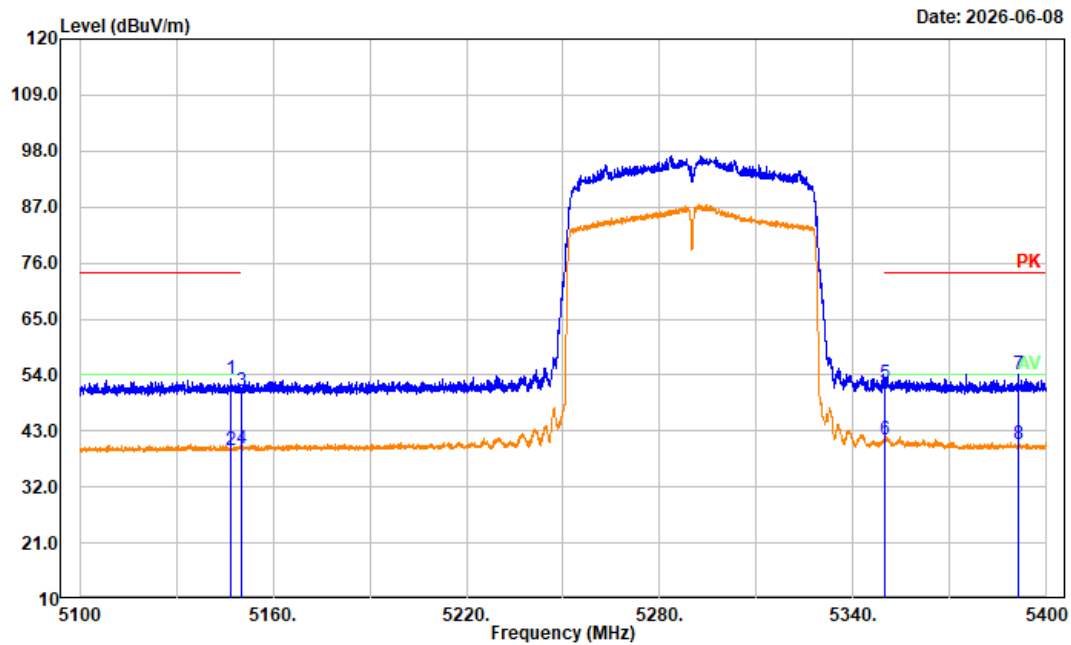


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5146.920	47.27	5.82	53.09	74.00	20.91	Peak
2	5146.920	33.29	5.82	39.11	54.00	14.89	Average
3	5150.000	44.89	5.83	50.72	74.00	23.28	Peak
4	5150.000	33.69	5.83	39.52	54.00	14.48	Average
5	5350.000	45.78	6.43	52.21	74.00	21.79	Peak
6	5350.000	34.99	6.43	41.42	54.00	12.58	Average
7	5391.120	47.74	6.44	54.18	74.00	19.82	Peak
8	5391.120	33.84	6.44	40.28	54.00	13.72	Average

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B2 ac80 Mode Middle Channel 5290 MHz

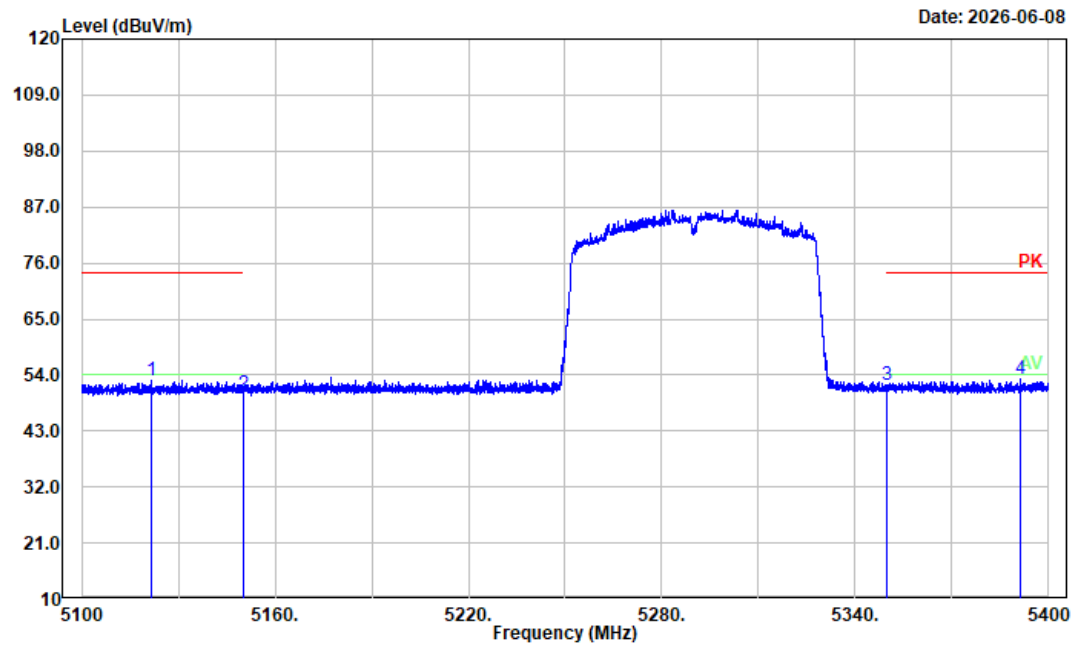


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5121.600	47.26	5.71	52.97	74.00	21.03	Peak
2	5150.000	44.51	5.83	50.34	74.00	23.66	Peak
3	5350.000	45.59	6.43	52.02	74.00	21.98	Peak
4	5391.420	46.80	6.44	53.24	74.00	20.76	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B3 a Mode Low Channel 5500 MHz Chain 0

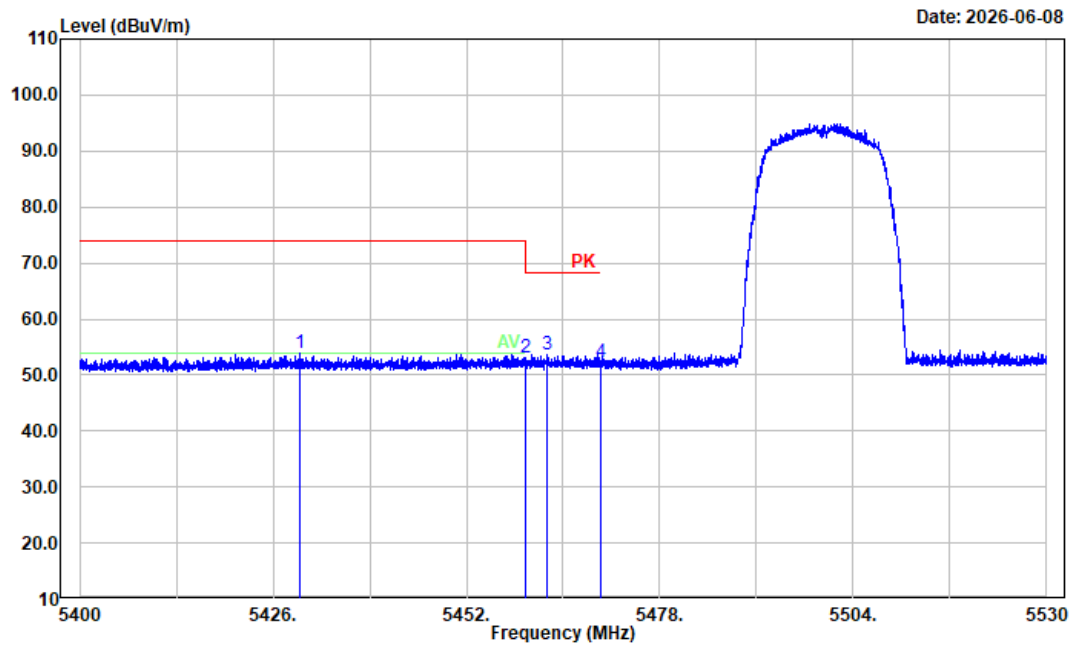


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5429.614	47.20	6.59	53.79	74.00	20.21	Peak
2	5460.000	46.52	6.69	53.21	74.00	20.79	Peak
3	5462.920	46.98	6.69	53.67	68.20	14.53	Peak
4	5470.000	45.60	6.70	52.30	68.20	15.90	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 5G WiFi B3 a Mode Low Channel 5500 MHz Chain 0

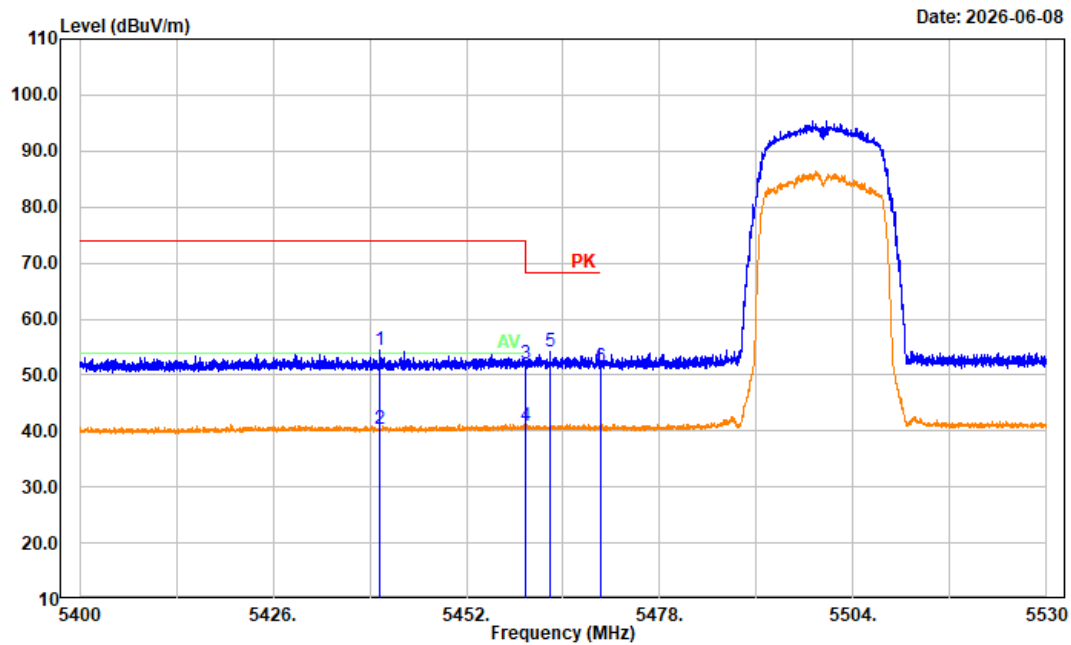


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5440.274	47.91	6.63	54.54	74.00	19.46	Peak
2	5440.274	33.68	6.63	40.31	54.00	13.69	Average
3	5460.000	45.34	6.69	52.03	74.00	21.97	Peak
4	5460.000	34.10	6.69	40.79	54.00	13.21	Average
5	5463.232	47.48	6.69	54.17	68.20	14.03	Peak
6	5470.000	44.82	6.70	51.52	68.20	16.68	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B3 a Mode High Channel 5700 MHz Chain 0

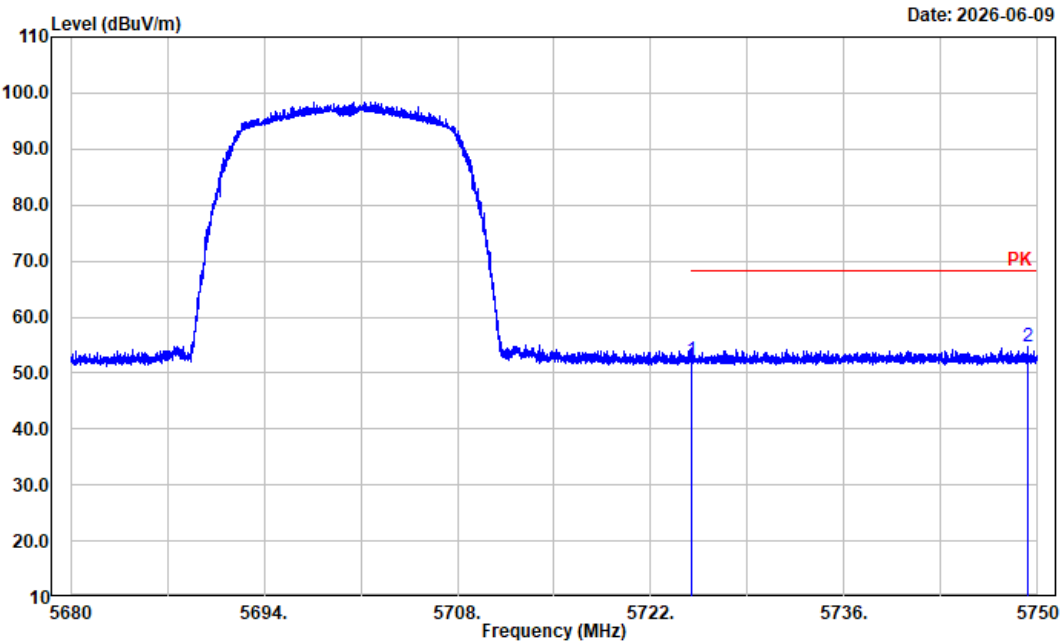


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	45.52	6.83	52.35	68.20	15.85	Peak
2	5749.300	47.81	6.86	54.67	68.20	13.53	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B3 a Mode High Channel 5700 MHz Chain 0

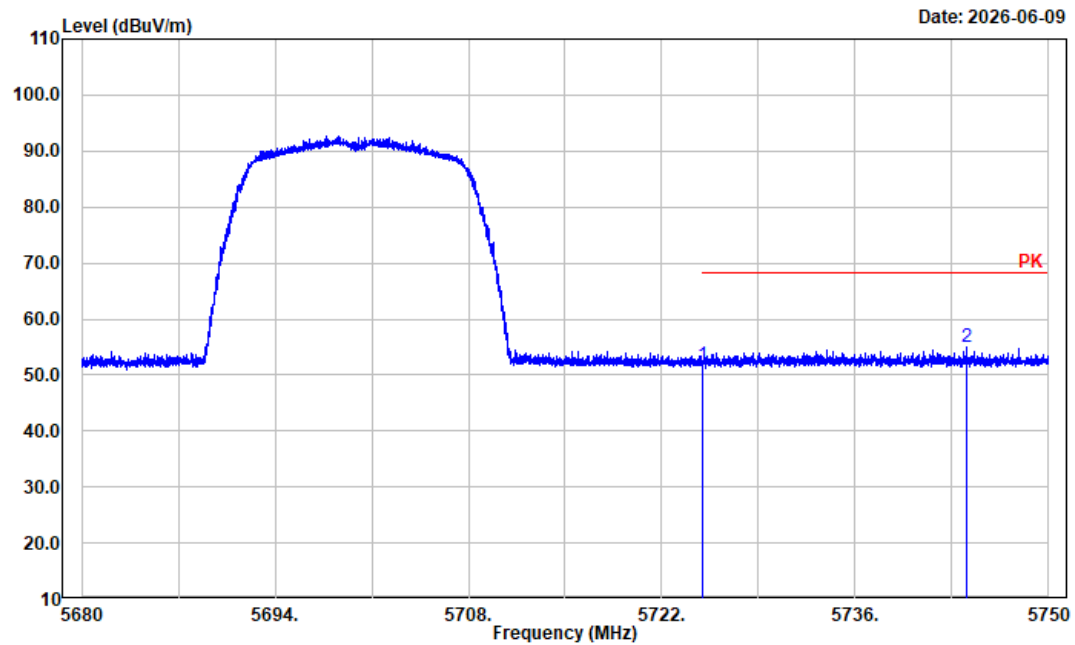


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	44.95	6.83	51.78	68.20	16.42	Peak
2	5744.036	48.16	6.85	55.01	68.20	13.19	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B3 a Mode Low Channel 5500 MHz Chain 1

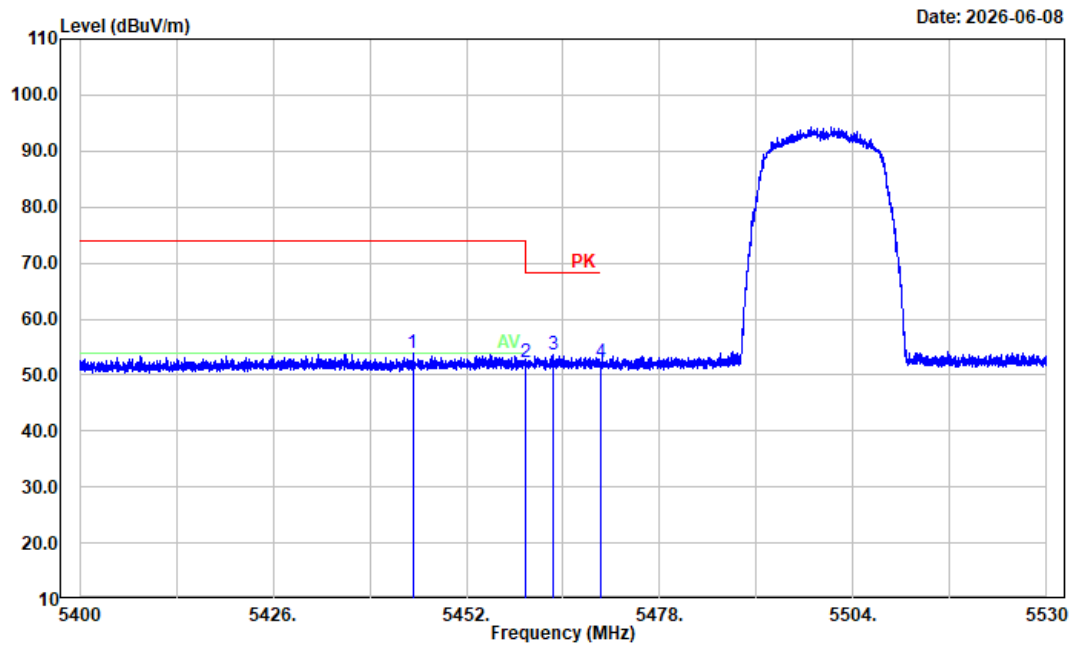


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5444.772	47.15	6.66	53.81	74.00	20.19	Peak
2	5460.000	45.52	6.69	52.21	74.00	21.79	Peak
3	5463.700	46.84	6.69	53.53	68.20	14.67	Peak
4	5470.000	45.68	6.70	52.38	68.20	15.82	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B3 a Mode Low Channel 5500 MHz Chain 1

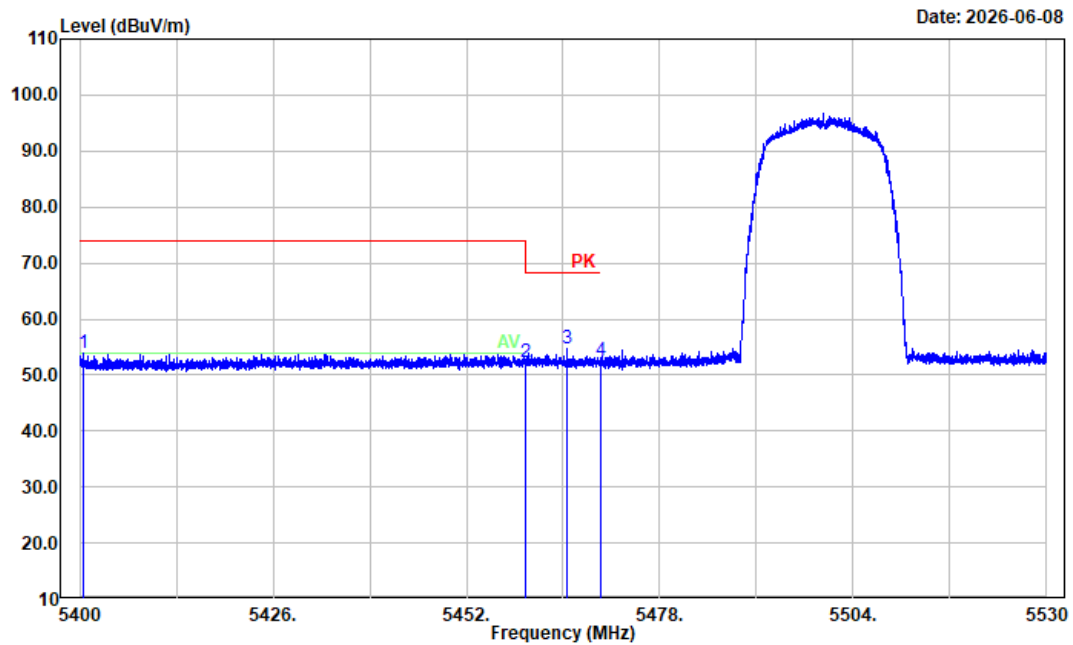


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5400.546	47.41	6.45	53.86	74.00	20.14	Peak
2	5460.000	45.51	6.69	52.20	74.00	21.80	Peak
3	5465.468	47.97	6.70	54.67	68.20	13.53	Peak
4	5470.000	45.91	6.70	52.61	68.20	15.59	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B3 a Mode High Channel 5700 MHz Chain 1

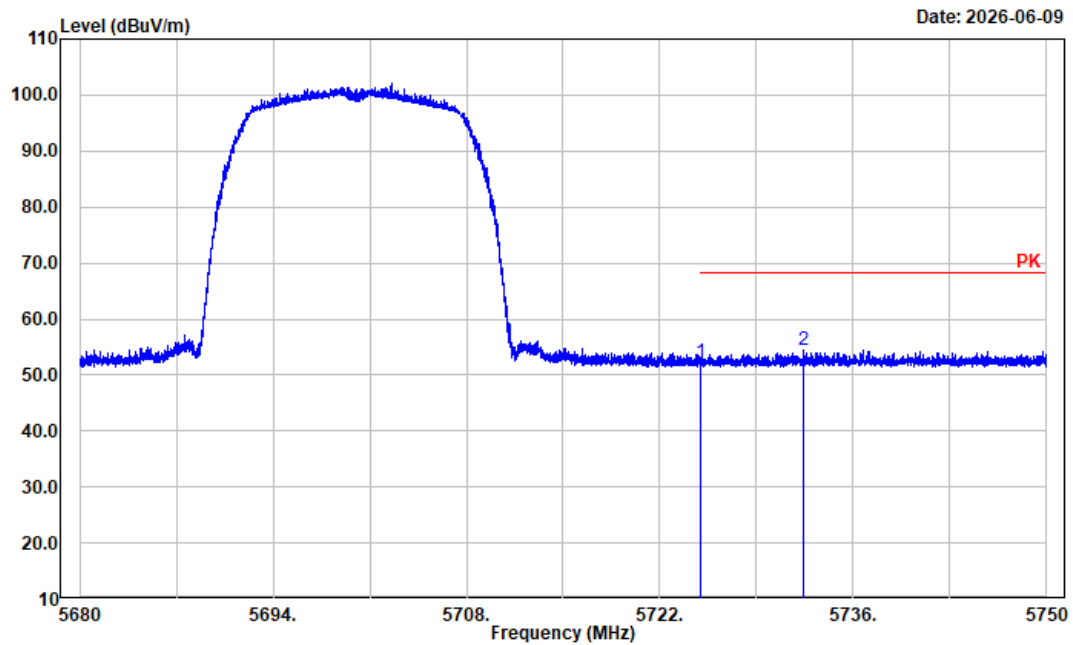


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	45.42	6.83	52.25	68.20	15.95	Peak
2	5732.402	47.69	6.85	54.54	68.20	13.66	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B3 a Mode High Channel 5700 MHz Chain 1

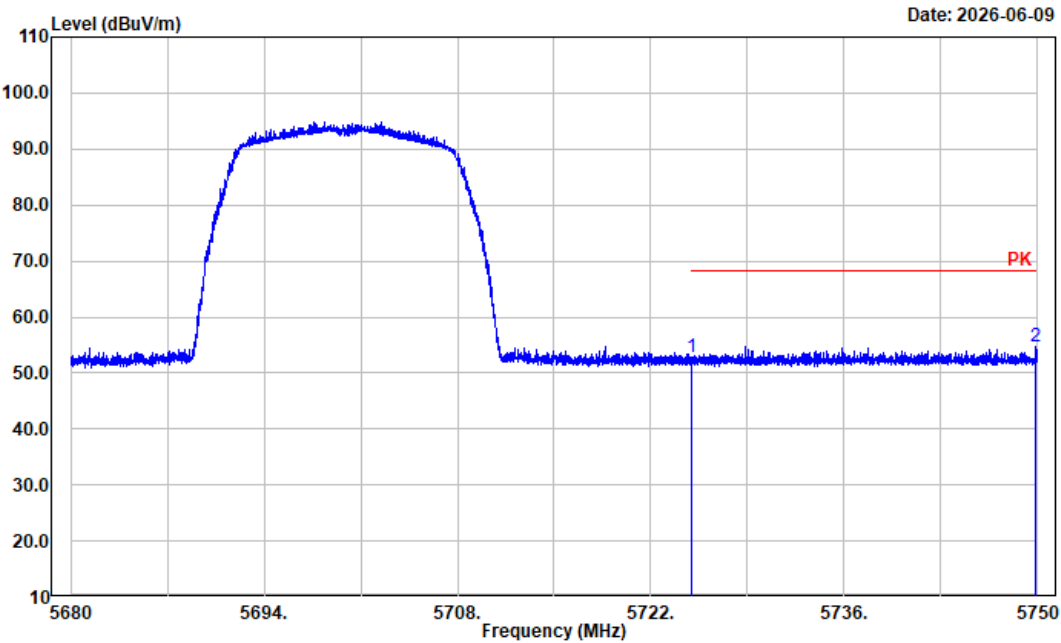


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	46.03	6.83	52.86	68.20	15.34	Peak
2	5749.804	47.87	6.86	54.73	68.20	13.47	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 5G WiFi B3 n20 Mode Low Channel 5500 MHz

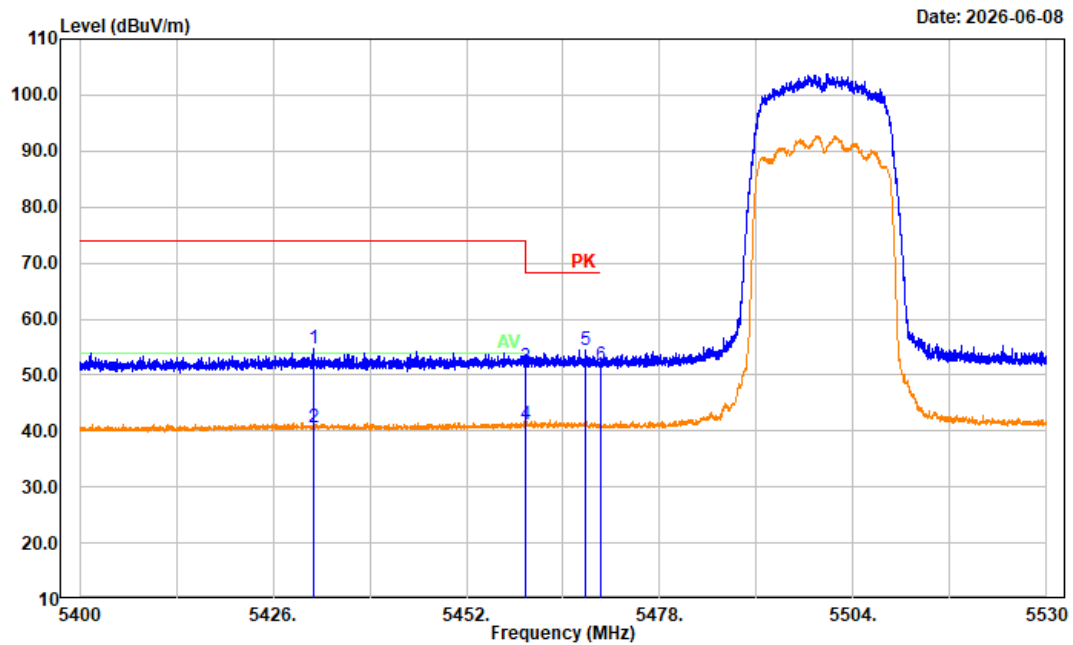


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5431.512	48.23	6.60	54.83	74.00	19.17	Peak
2	5431.512	34.08	6.60	40.68	54.00	13.32	Average
3	5460.000	44.77	6.69	51.46	74.00	22.54	Peak
4	5460.000	34.50	6.69	41.19	54.00	12.81	Average
5	5467.990	47.81	6.70	54.51	68.20	13.69	Peak
6	5470.000	45.13	6.70	51.83	68.20	16.37	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B3 n20 Mode Low Channel 5500 MHz

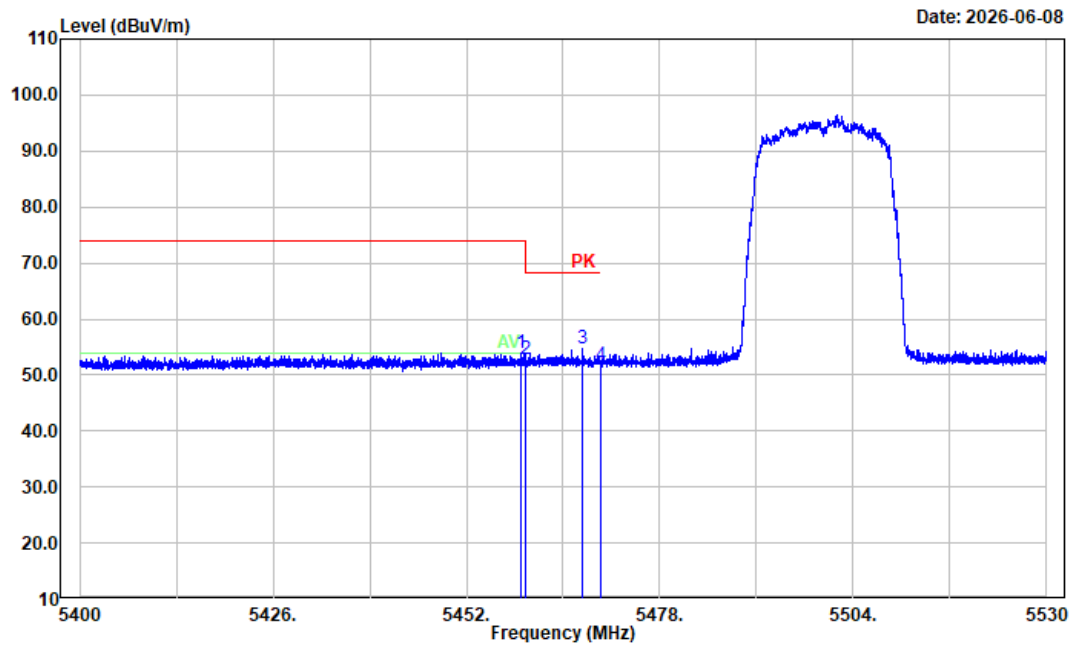


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5459.254	47.30	6.69	53.99	74.00	20.01	Peak
2	5460.000	46.24	6.69	52.93	74.00	21.07	Peak
3	5467.678	48.03	6.70	54.73	68.20	13.47	Peak
4	5470.000	45.05	6.70	51.75	68.20	16.45	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B3 n20 Mode High Channel 5700 MHz

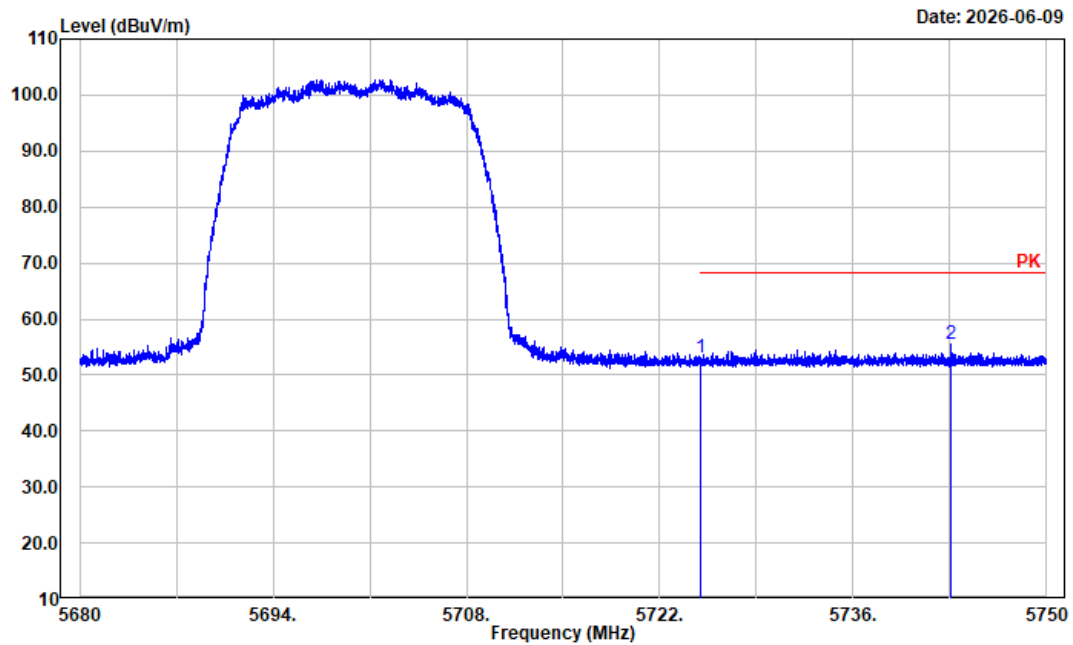


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	46.23	6.83	53.06	68.20	15.14	Peak
2	5743.056	48.69	6.85	55.54	68.20	12.66	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B3 n20 Mode High Channel 5700 MHz

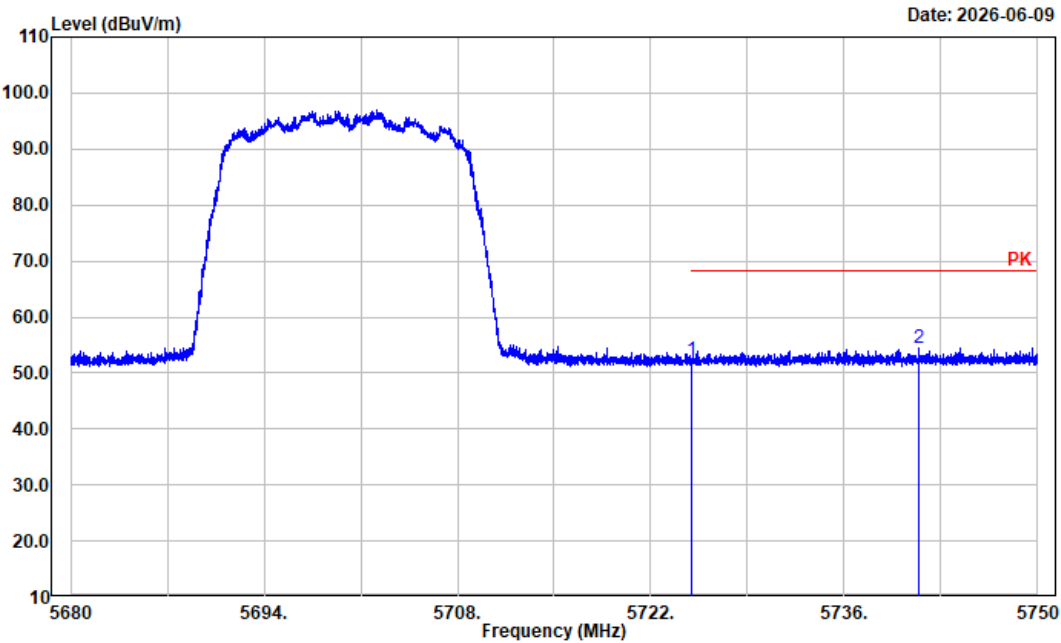


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	45.55	6.83	52.38	68.20	15.82	Peak
2	5741.432	47.65	6.86	54.51	68.20	13.69	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B3 n40 Mode Low Channel 5510 MHz

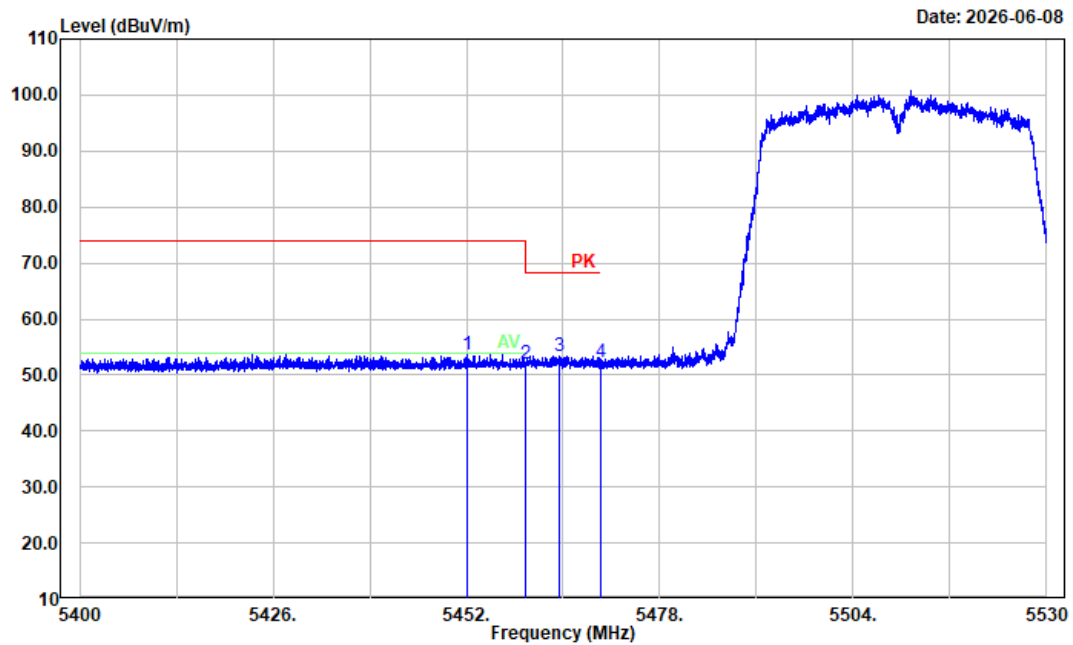


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5452.052	47.04	6.68	53.72	74.00	20.28	Peak
2	5460.000	45.23	6.69	51.92	74.00	22.08	Peak
3	5464.506	46.76	6.69	53.45	68.20	14.75	Peak
4	5470.000	45.56	6.70	52.26	68.20	15.94	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B3 n40 Mode Low Channel 5510 MHz

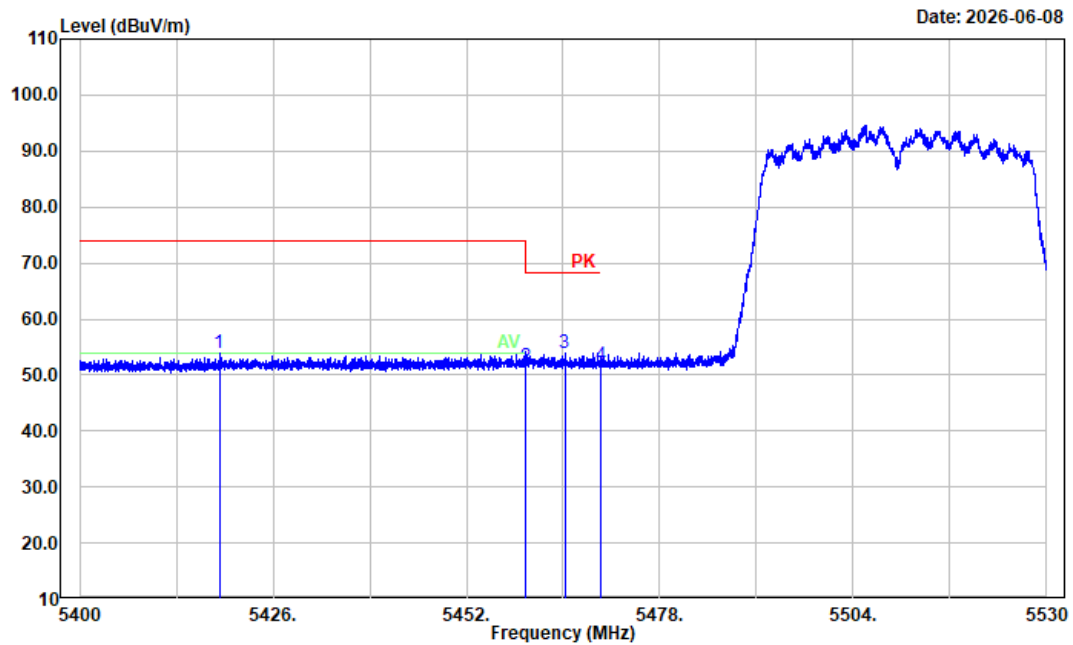


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5418.772	47.35	6.54	53.89	74.00	20.11	Peak
2	5460.000	44.86	6.69	51.55	74.00	22.45	Peak
3	5465.208	47.24	6.70	53.94	68.20	14.26	Peak
4	5470.000	45.10	6.70	51.80	68.20	16.40	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B3 n40 Mode High Channel 5670 MHz

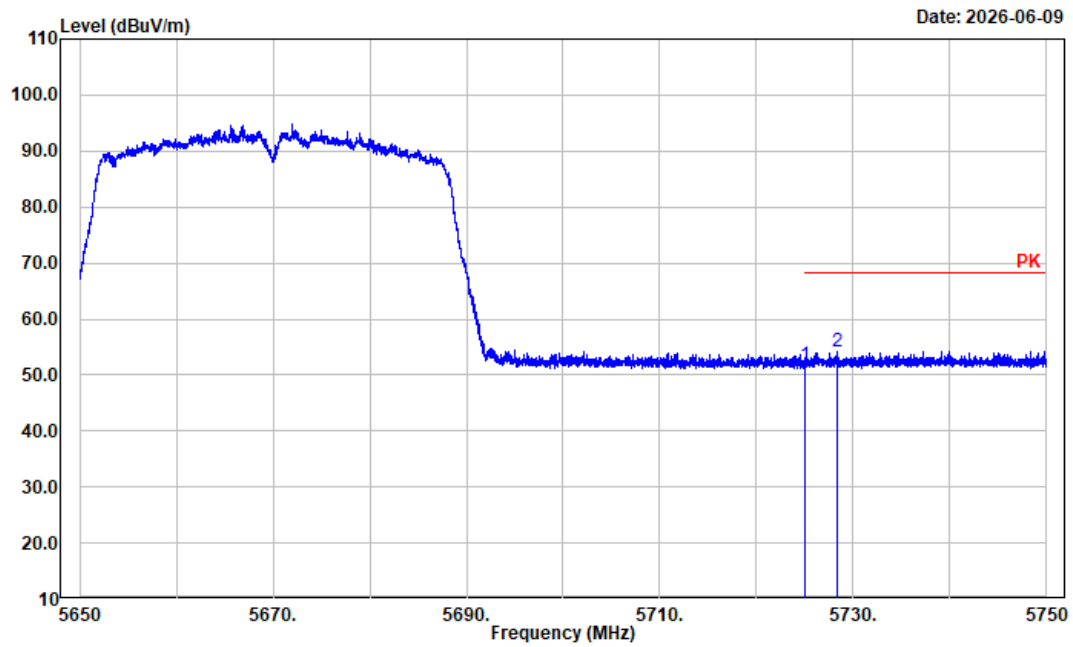


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	44.99	6.83	51.82	68.20	16.38	Peak
2	5728.380	47.39	6.84	54.23	68.20	13.97	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B3 n40 Mode High Channel 5670 MHz

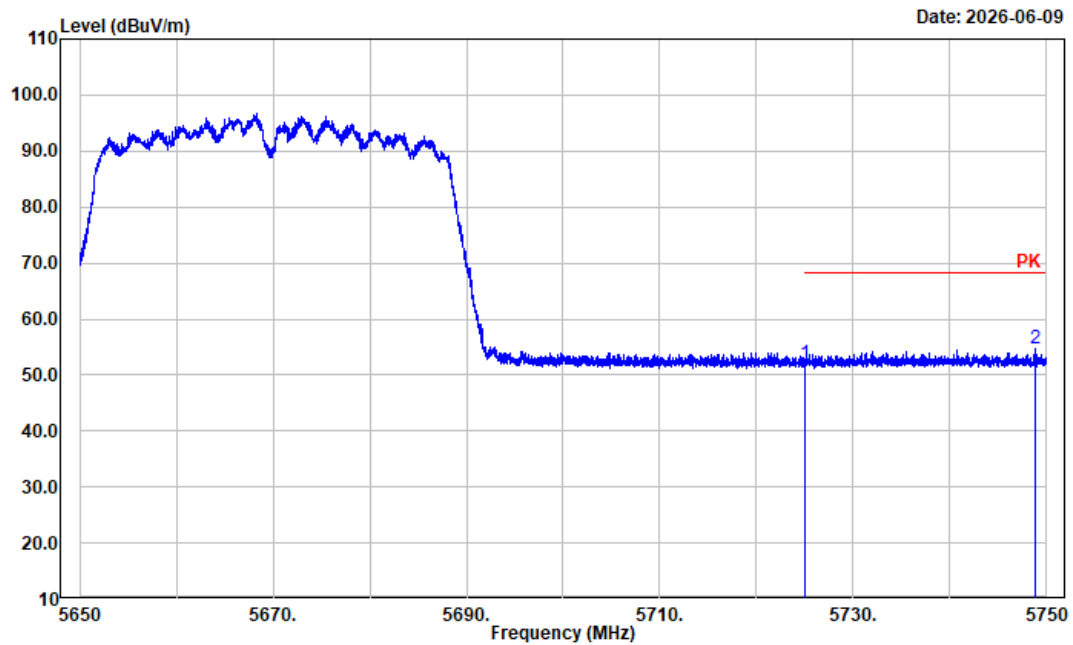


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	45.20	6.83	52.03	68.20	16.17	Peak
2	5748.860	47.79	6.86	54.65	68.20	13.55	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 5G WiFi B3 ac20 Mode Low Channel 5500 MHz

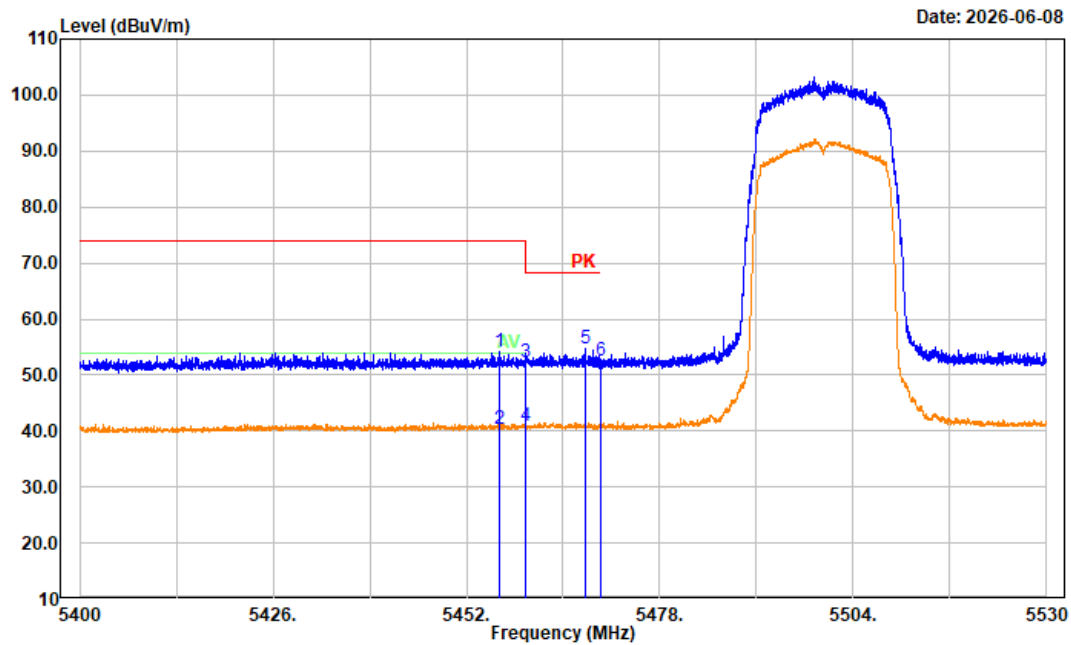


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5456.524	47.41	6.69	54.10	74.00	19.90	Peak
2	5456.524	33.62	6.69	40.31	54.00	13.69	Average
3	5460.000	45.66	6.69	52.35	74.00	21.65	Peak
4	5460.000	34.16	6.69	40.85	54.00	13.15	Average
5	5467.990	47.94	6.70	54.64	68.20	13.56	Peak
6	5470.000	45.81	6.70	52.51	68.20	15.69	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 5G WiFi B3 ac20 Mode Low Channel 5500 MHz

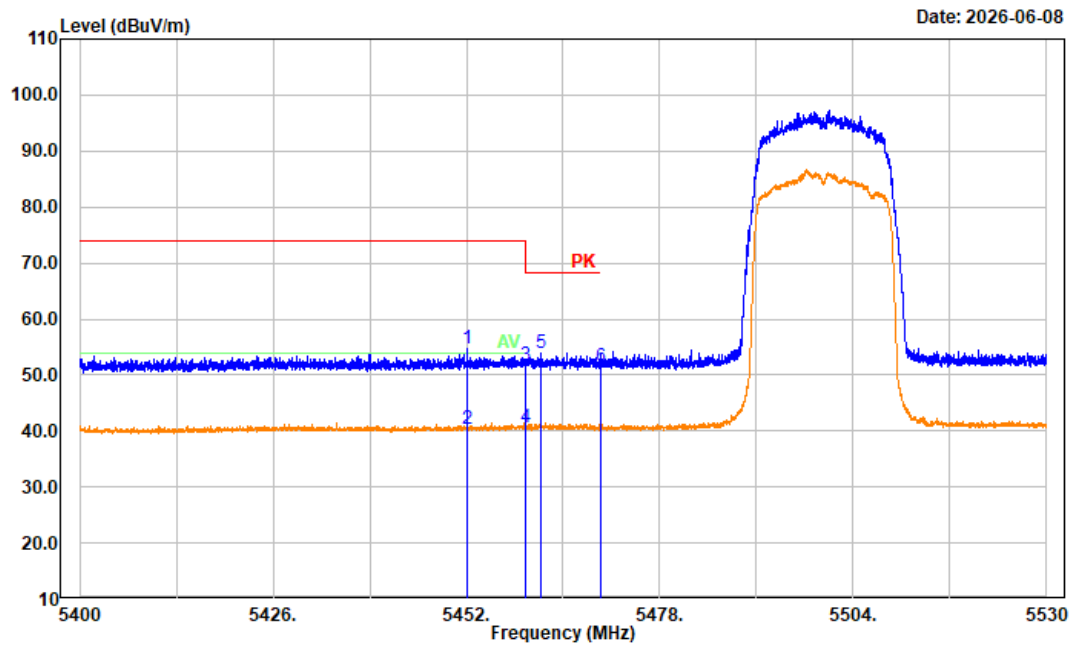


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5452.156	48.05	6.68	54.73	74.00	19.27	Peak
2	5452.156	33.61	6.68	40.29	54.00	13.71	Average
3	5460.000	44.95	6.69	51.64	74.00	22.36	Peak
4	5460.000	34.00	6.69	40.69	54.00	13.31	Average
5	5462.088	47.14	6.69	53.83	68.20	14.37	Peak
6	5470.000	44.82	6.70	51.52	68.20	16.68	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B3 ac20 Mode High Channel 5700 MHz

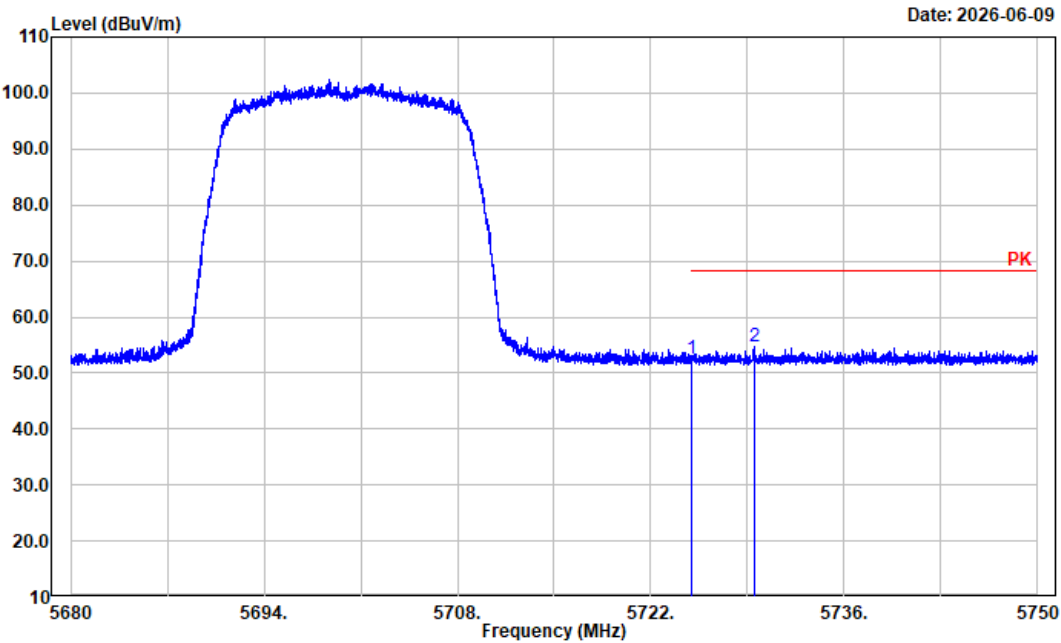


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	45.73	6.83	52.56	68.20	15.64	Peak
2	5729.490	47.99	6.84	54.83	68.20	13.37	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B3 ac20 Mode High Channel 5700 MHz

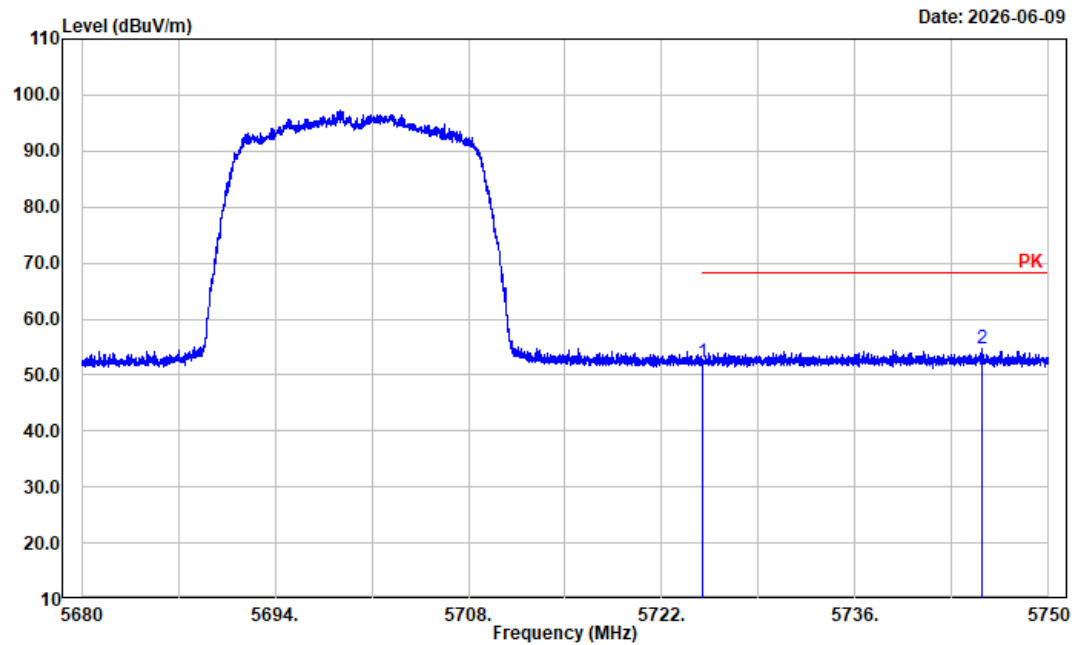


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	45.34	6.83	52.17	68.20	16.03	Peak
2	5745.226	47.96	6.85	54.81	68.20	13.39	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B3 ac40 Mode Low Channel 5510 MHz

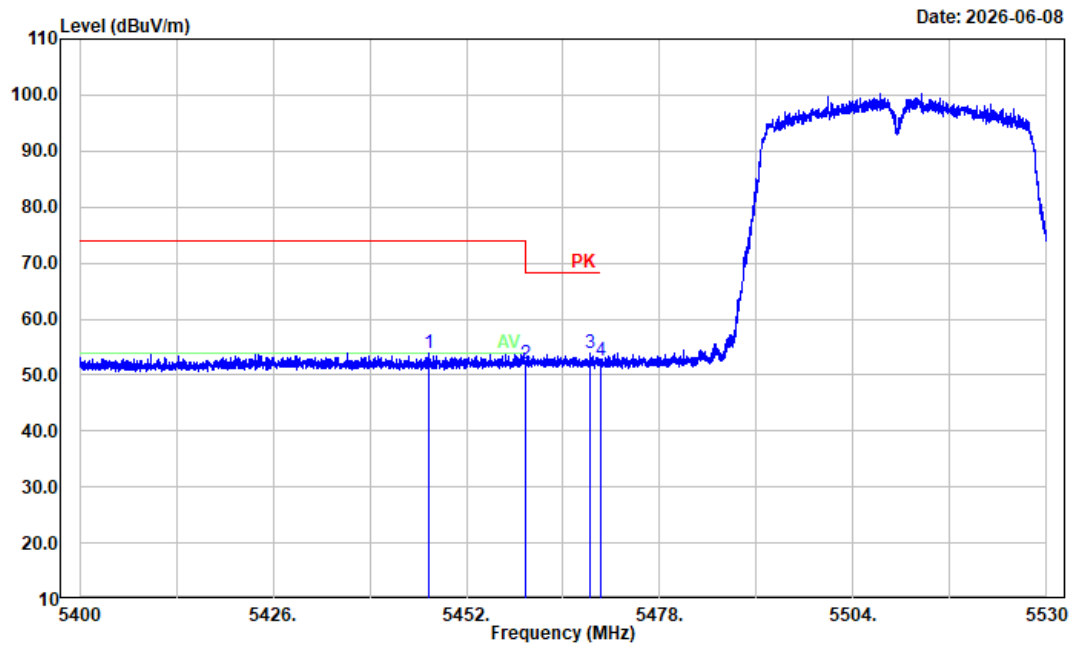


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5446.878	47.32	6.67	53.99	74.00	20.01	Peak
2	5460.000	45.42	6.69	52.11	74.00	21.89	Peak
3	5468.614	47.14	6.70	53.84	68.20	14.36	Peak
4	5470.000	45.88	6.70	52.58	68.20	15.62	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B3 ac40 Mode Low Channel 5510 MHz

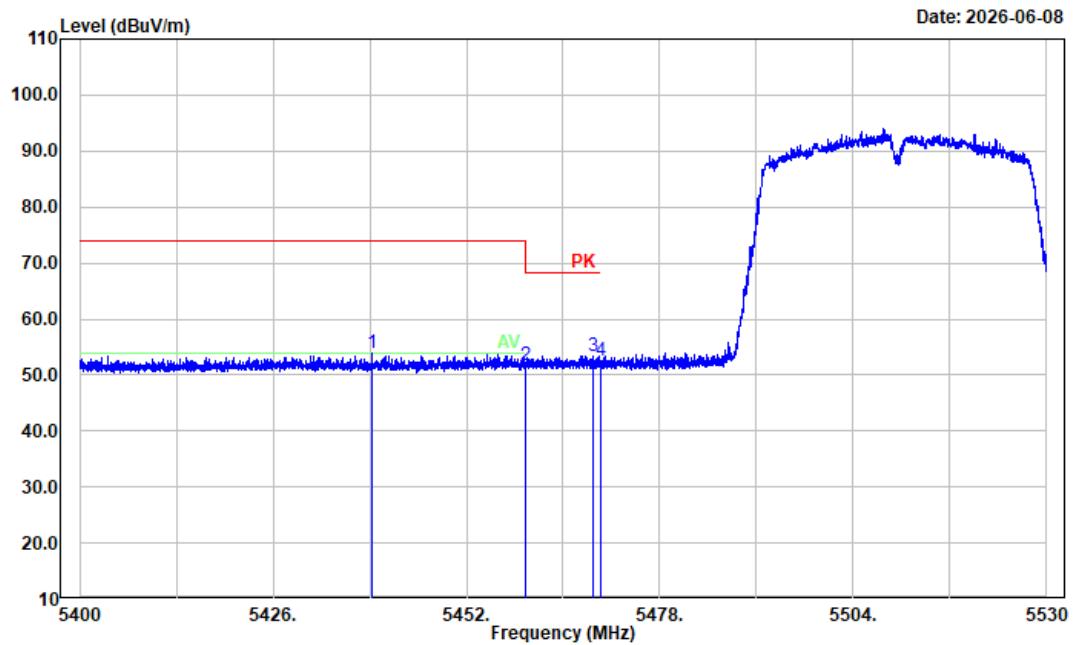


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5439.338	47.18	6.63	53.81	74.00	20.19	Peak
2	5460.000	45.03	6.69	51.72	74.00	22.28	Peak
3	5468.978	46.75	6.70	53.45	68.20	14.75	Peak
4	5470.000	45.90	6.70	52.60	68.20	15.60	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B3 ac40 Mode High Channel 5670 MHz

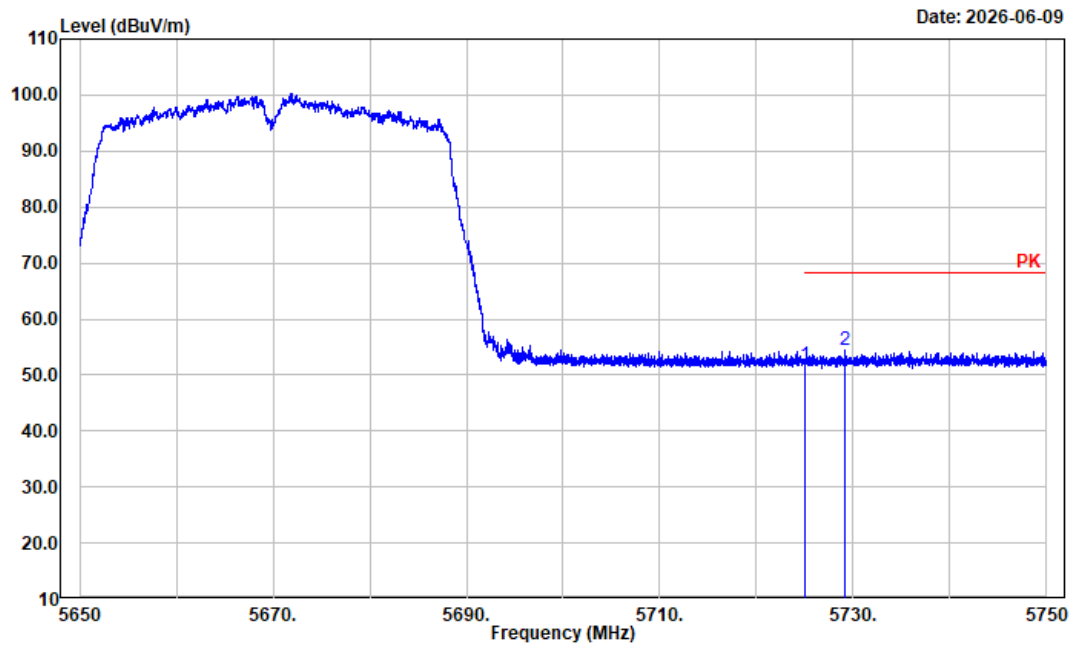


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	44.95	6.83	51.78	68.20	16.42	Peak
2	5729.100	47.71	6.84	54.55	68.20	13.65	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B3 ac40 Mode High Channel 5670 MHz

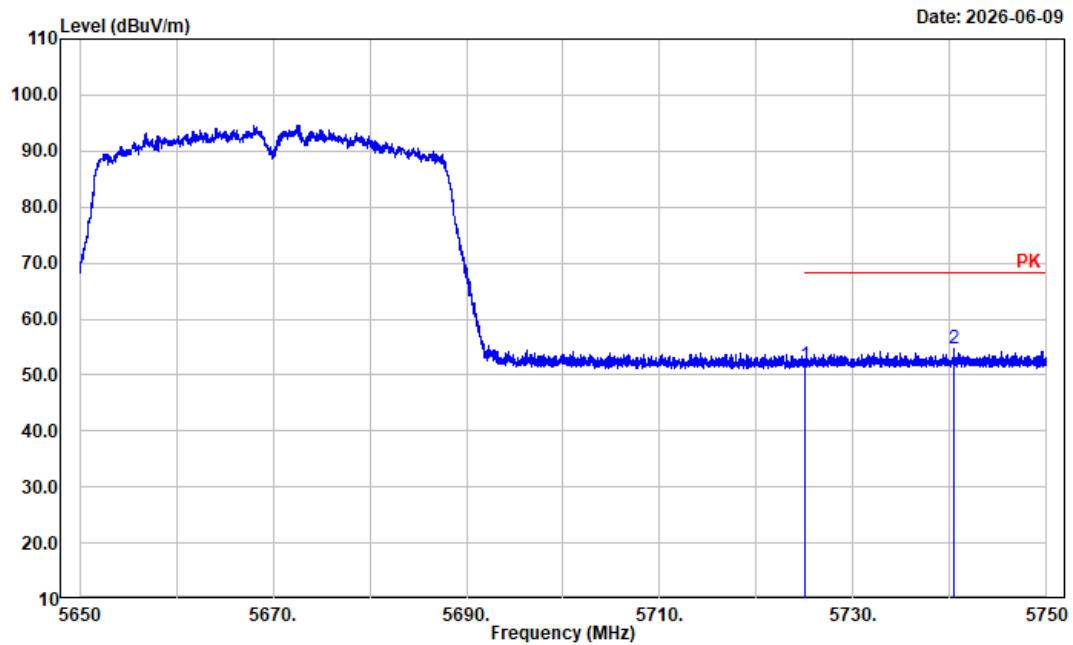


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	44.92	6.83	51.75	68.20	16.45	Peak
2	5740.440	47.89	6.85	54.74	68.20	13.46	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;AV trace RBW:1MHz; VBW:10kHz
Polarization: Horizontal
Note: 5G WiFi B3 ac80 Mode Low Channel 5530 MHz

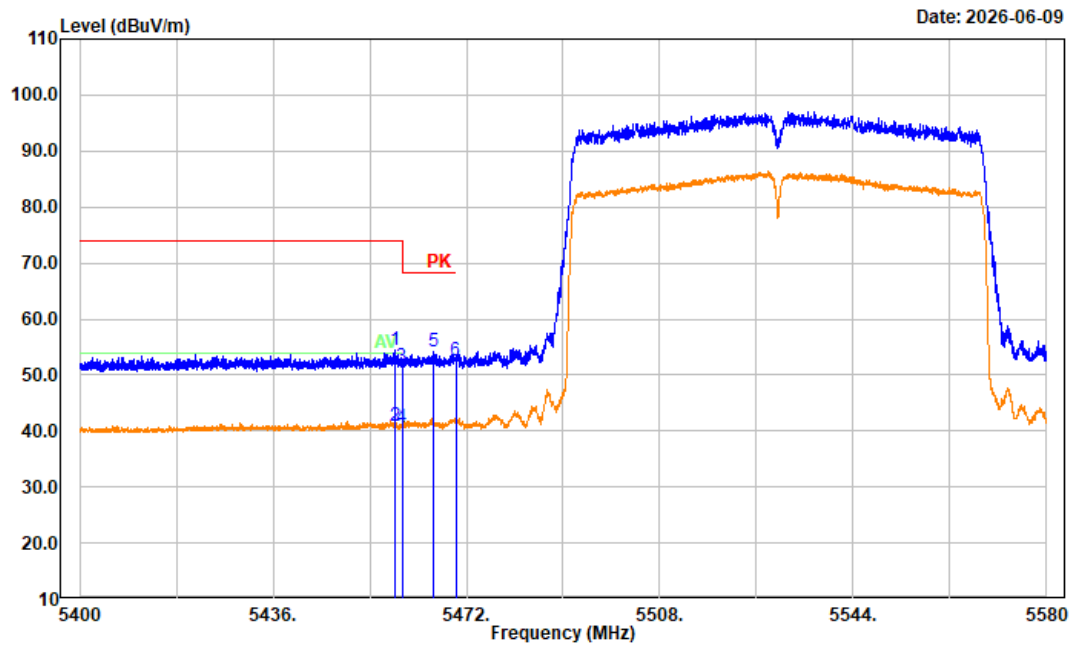


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5458.716	47.69	6.69	54.38	74.00	19.62	Peak
2	5458.716	34.31	6.69	41.00	54.00	13.00	Average
3	5460.000	44.90	6.69	51.59	74.00	22.41	Peak
4	5460.000	33.90	6.69	40.59	54.00	13.41	Average
5	5465.952	47.44	6.70	54.14	68.20	14.06	Peak
6	5470.000	45.82	6.70	52.52	68.20	15.68	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B3 ac80 Mode Low Channel 5530 MHz

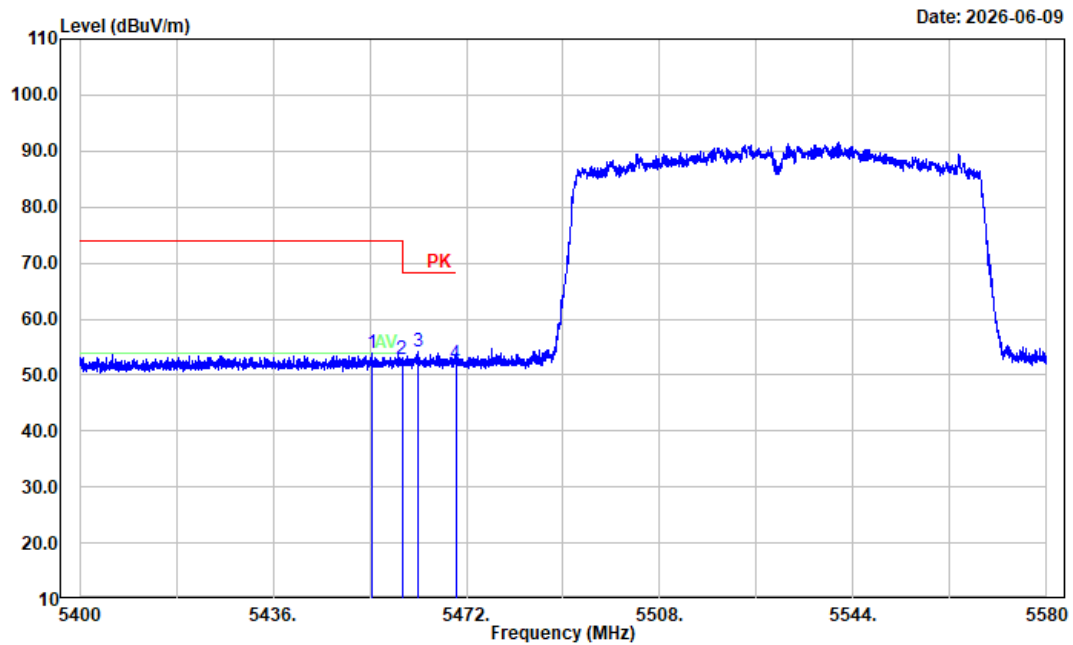


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5454.288	47.13	6.68	53.81	74.00	20.19	Peak
2	5460.000	46.13	6.69	52.82	74.00	21.18	Peak
3	5462.892	47.42	6.69	54.11	68.20	14.09	Peak
4	5470.000	45.31	6.70	52.01	68.20	16.19	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B3 ac80 Mode High Channel 5610 MHz

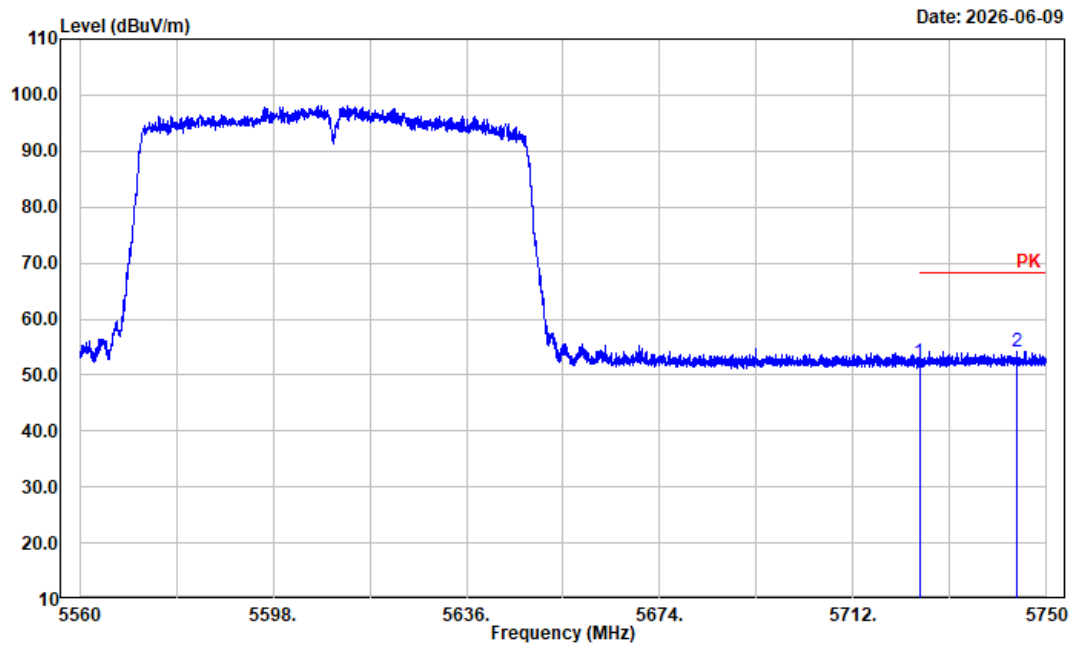


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	45.32	6.83	52.15	68.20	16.05	Peak
2	5744.262	47.43	6.85	54.28	68.20	13.92	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B3 ac80 Mode High Channel 5610 MHz

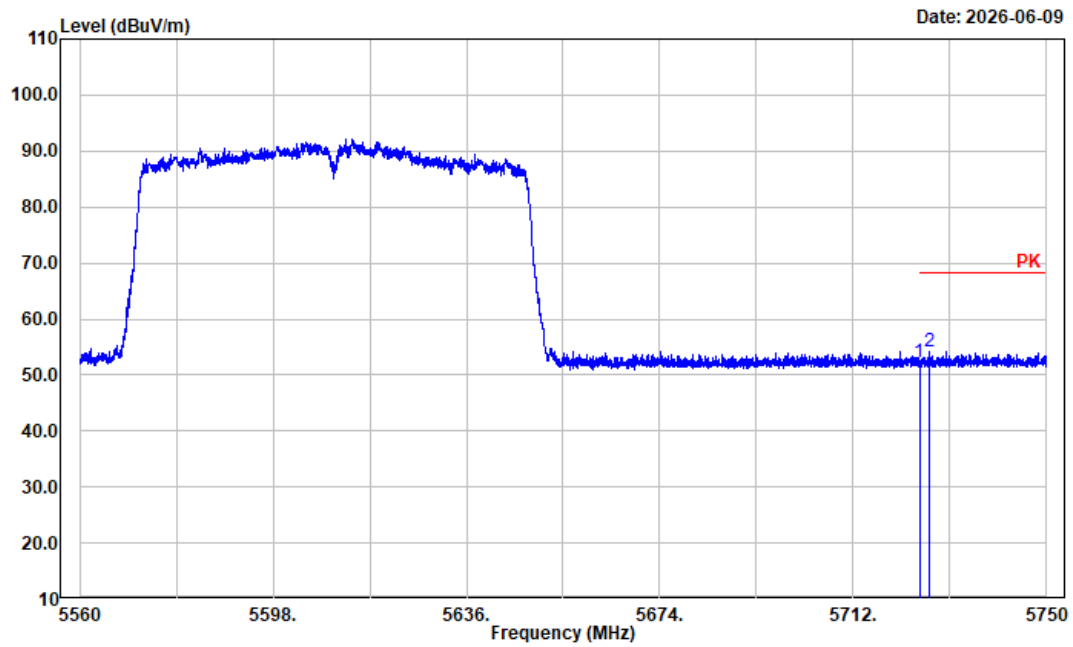


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5725.000	45.41	6.83	52.24	68.20	15.96	Peak
2	5726.820	47.42	6.84	54.26	68.20	13.94	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B4 a Mode Low Channel 5745 MHz Chain 0

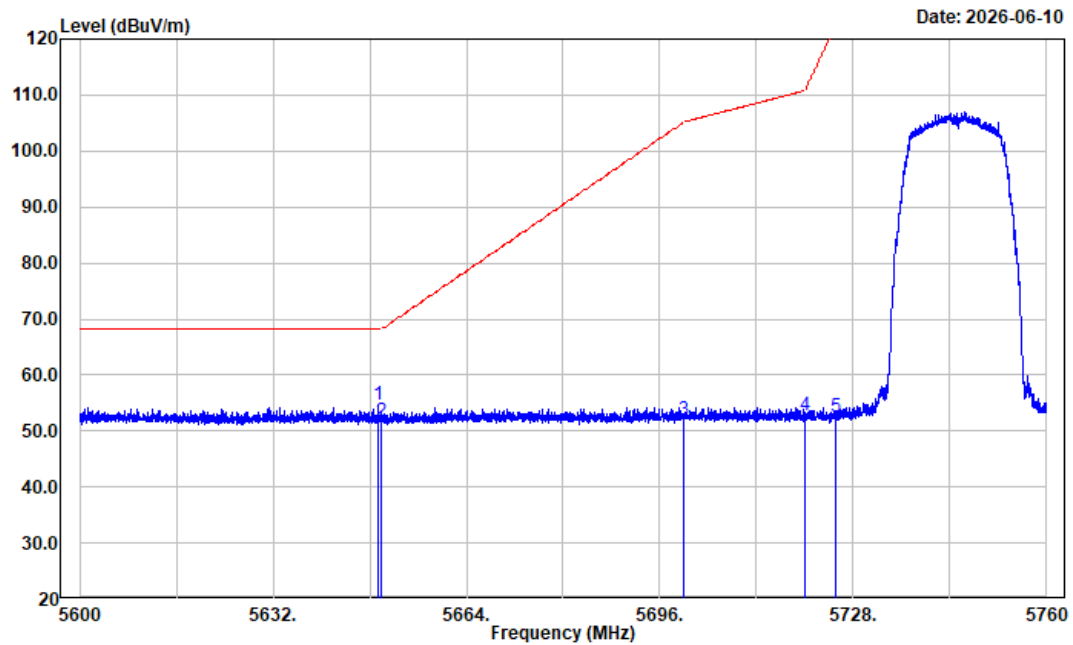


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5649.472	47.74	6.83	54.57	68.20	13.63	Peak
2	5650.000	44.94	6.83	51.77	68.20	16.43	Peak
3	5700.000	45.28	6.81	52.09	105.20	53.11	Peak
4	5720.000	45.92	6.83	52.75	110.80	58.05	Peak
5	5725.000	45.56	6.83	52.39	122.20	69.81	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B4 a Mode Low Channel 5745 MHz Chain 0

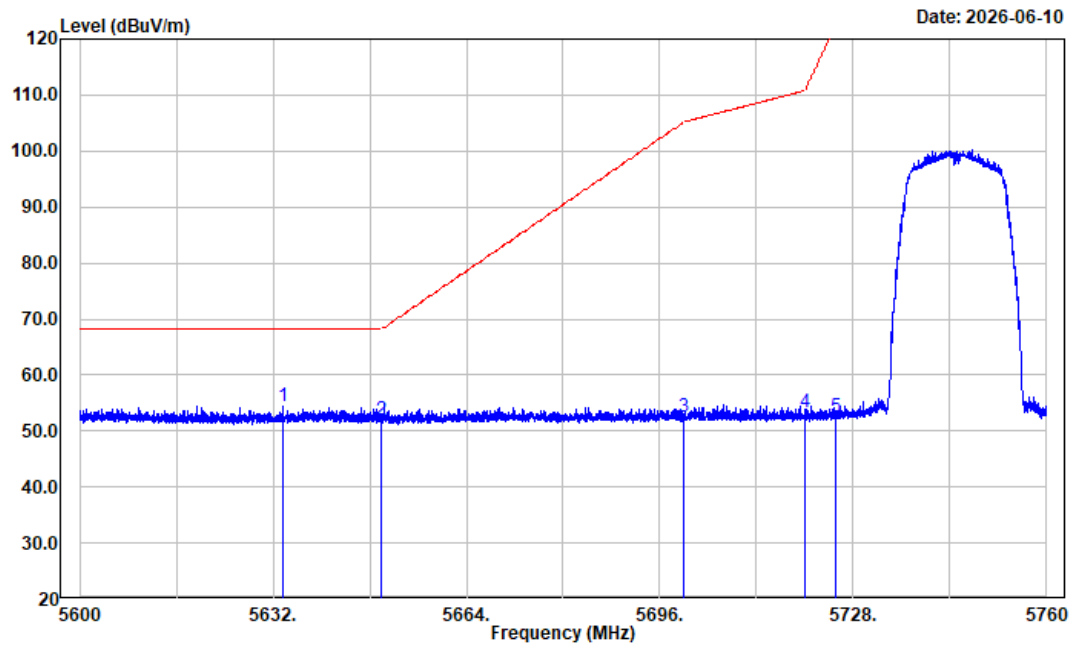


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5633.696	47.56	6.82	54.38	68.20	13.82	Peak
2	5650.000	45.20	6.83	52.03	68.20	16.17	Peak
3	5700.000	45.80	6.81	52.61	105.20	52.59	Peak
4	5720.000	46.57	6.83	53.40	110.80	57.40	Peak
5	5725.000	45.68	6.83	52.51	122.20	69.69	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B4 a Mode High Channel 5825 MHz Chain 0

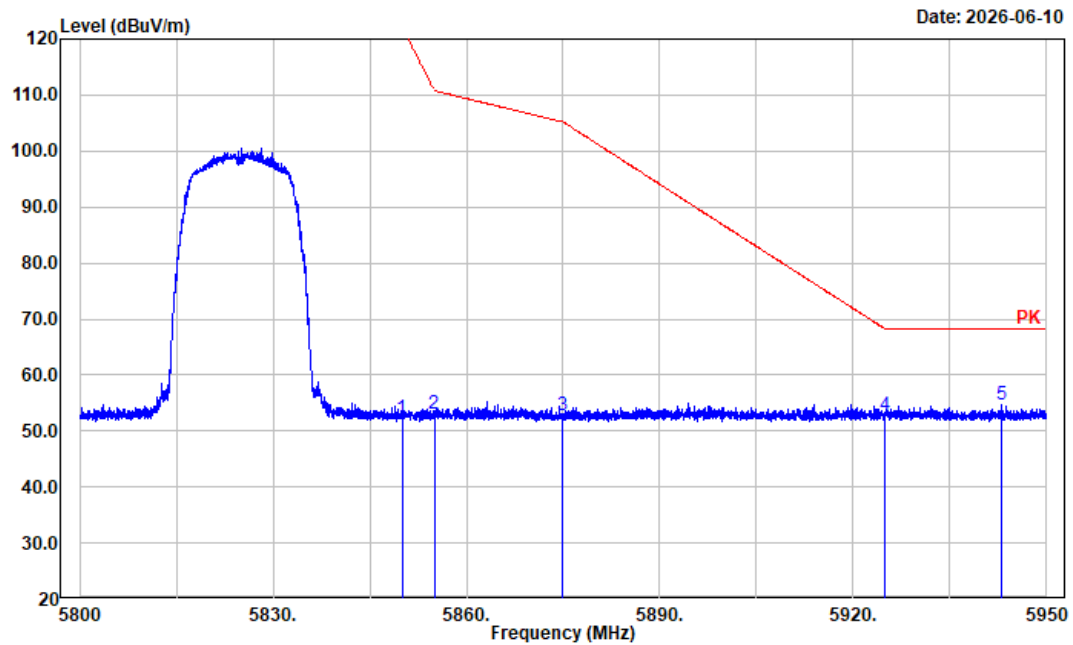


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	45.45	6.92	52.37	122.20	69.83	Peak
2	5855.000	46.20	6.94	53.14	110.80	57.66	Peak
3	5875.000	45.64	7.02	52.66	105.20	52.54	Peak
4	5925.000	45.58	7.17	52.75	68.20	15.45	Peak
5	5943.040	47.34	7.22	54.56	68.20	13.64	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B4 a Mode High Channel 5825 MHz Chain 0

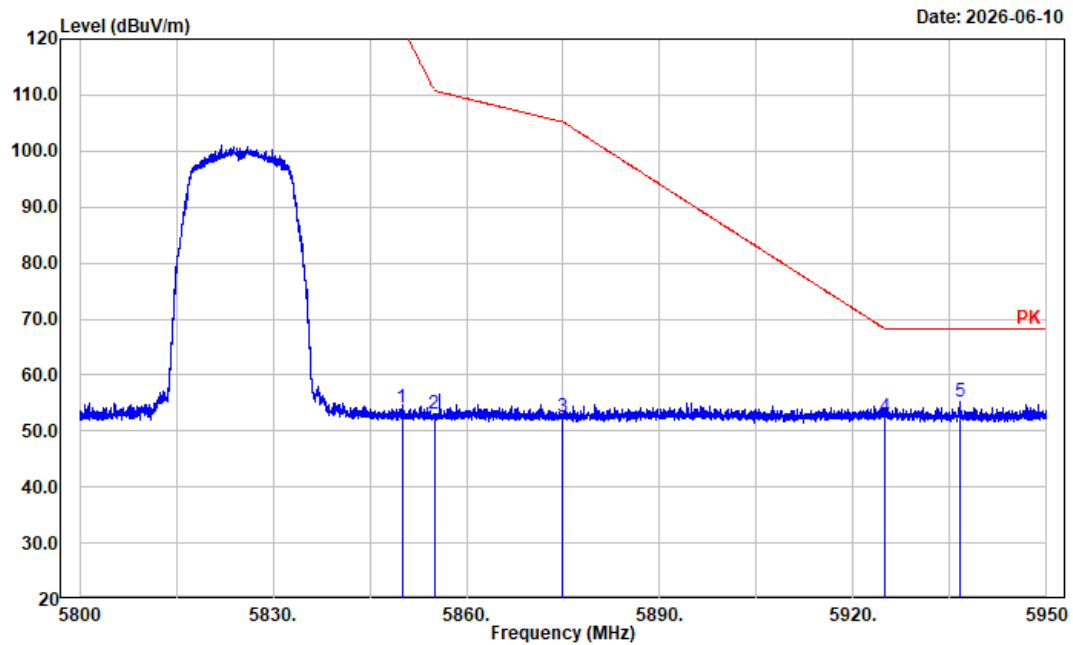


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.26	6.92	54.18	122.20	68.02	Peak
2	5855.000	46.14	6.94	53.08	110.80	57.72	Peak
3	5875.000	45.42	7.02	52.44	105.20	52.76	Peak
4	5925.000	45.38	7.17	52.55	68.20	15.65	Peak
5	5936.680	47.89	7.21	55.10	68.20	13.10	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B4 a Mode Low Channel 5745 MHz Chain 1

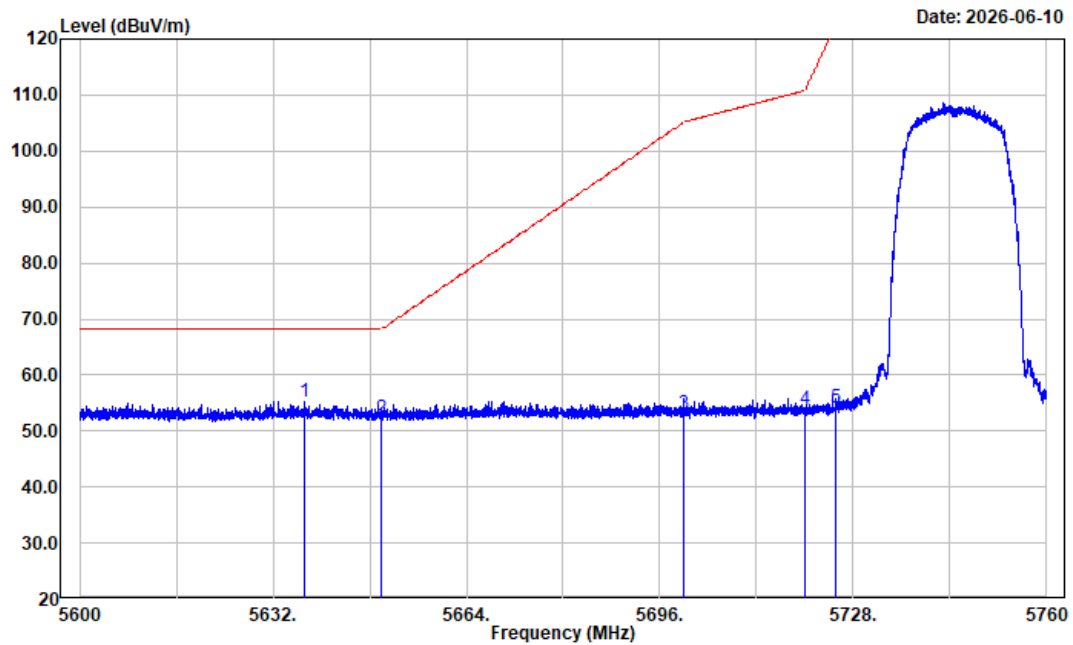


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5637.248	48.38	6.83	55.21	68.20	12.99	Peak
2	5650.000	45.31	6.83	52.14	68.20	16.06	Peak
3	5700.000	46.26	6.81	53.07	105.20	52.13	Peak
4	5720.000	46.95	6.83	53.78	110.80	57.02	Peak
5	5725.000	47.19	6.83	54.02	122.20	68.18	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B4 a Mode Low Channel 5745 MHz Chain 1

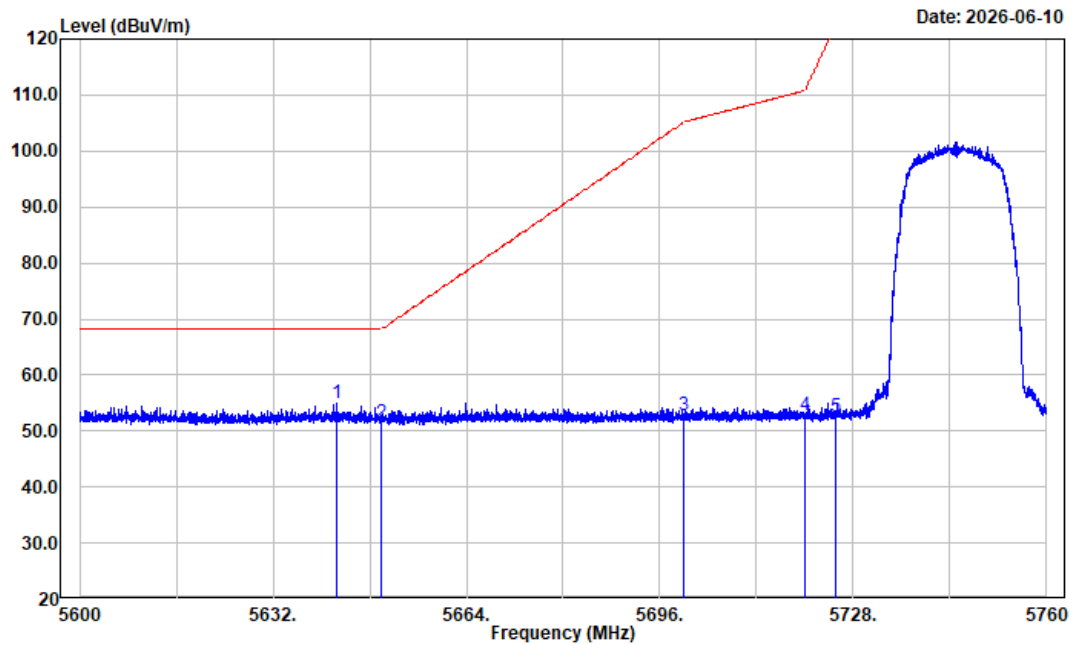


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5642.624	48.03	6.83	54.86	68.20	13.34	Peak
2	5650.000	44.72	6.83	51.55	68.20	16.65	Peak
3	5700.000	45.96	6.81	52.77	105.20	52.43	Peak
4	5720.000	46.09	6.83	52.92	110.80	57.88	Peak
5	5725.000	45.73	6.83	52.56	122.20	69.64	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B4 a Mode High Channel 5825 MHz Chain 1

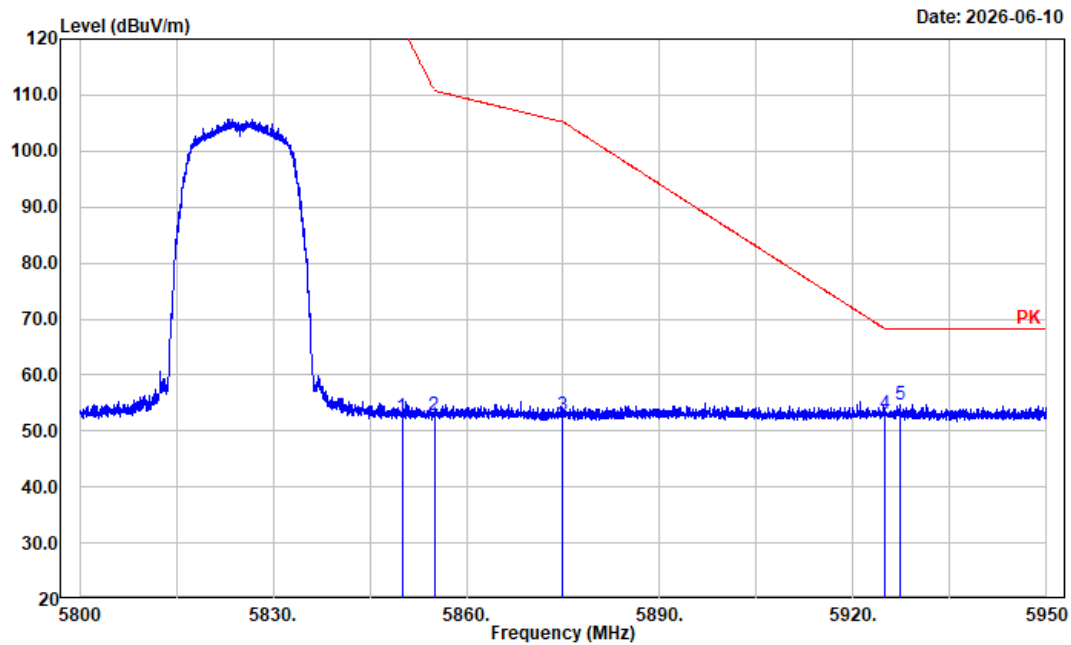


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	45.50	6.92	52.42	122.20	69.78	Peak
2	5855.000	45.88	6.94	52.82	110.80	57.98	Peak
3	5875.000	45.77	7.02	52.79	105.20	52.41	Peak
4	5925.000	46.00	7.17	53.17	68.20	15.03	Peak
5	5927.170	47.48	7.18	54.66	68.20	13.54	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B4 a Mode High Channel 5825 MHz Chain 1

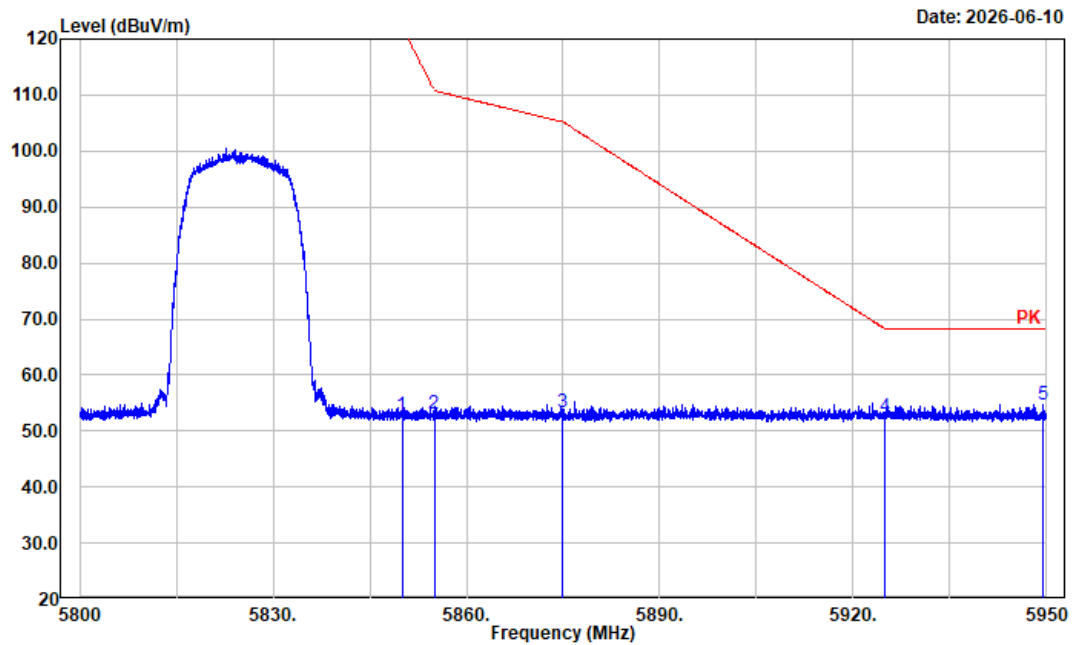


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	45.83	6.92	52.75	122.20	69.45	Peak
2	5855.000	46.24	6.94	53.18	110.80	57.62	Peak
3	5875.000	46.36	7.02	53.38	105.20	51.82	Peak
4	5925.000	45.44	7.17	52.61	68.20	15.59	Peak
5	5949.400	47.53	7.24	54.77	68.20	13.43	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B4 n20 Mode Low Channel 5745 MHz

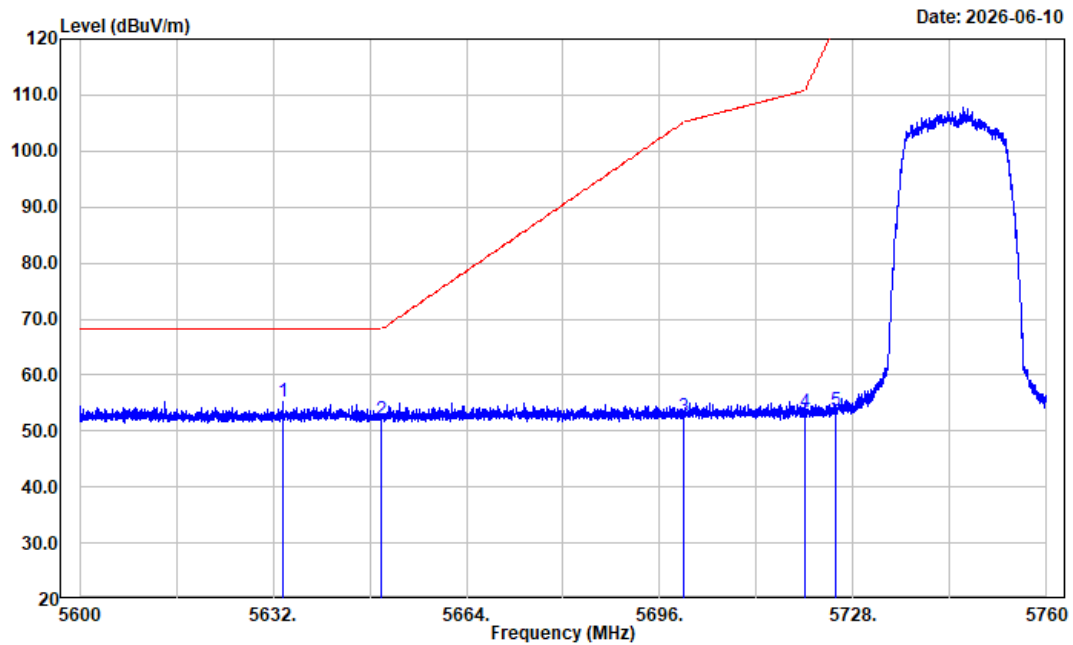


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5633.728	48.35	6.82	55.17	68.20	13.03	Peak
2	5650.000	45.16	6.83	51.99	68.20	16.21	Peak
3	5700.000	45.59	6.81	52.40	105.20	52.80	Peak
4	5720.000	46.44	6.83	53.27	110.80	57.53	Peak
5	5725.000	46.87	6.83	53.70	122.20	68.50	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B4 n20 Mode Low Channel 5745 MHz

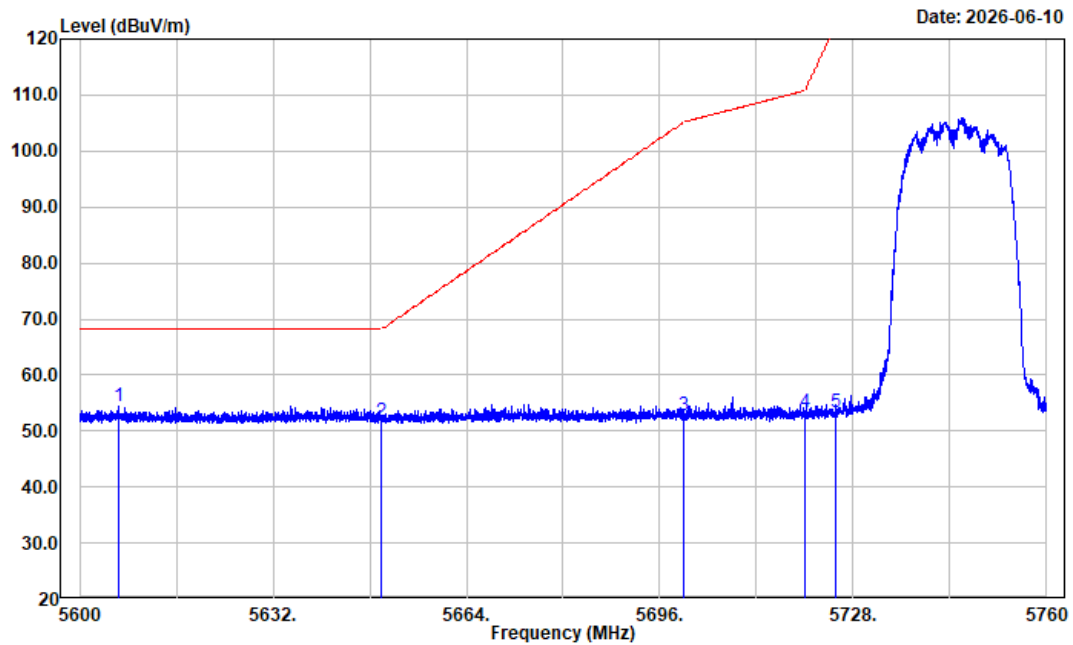


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5606.560	47.61	6.82	54.43	68.20	13.77	Peak
2	5650.000	44.89	6.83	51.72	68.20	16.48	Peak
3	5700.000	45.86	6.81	52.67	105.20	52.53	Peak
4	5720.000	46.63	6.83	53.46	110.80	57.34	Peak
5	5725.000	46.45	6.83	53.28	122.20	68.92	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B4 n20 Mode High Channel 5825 MHz

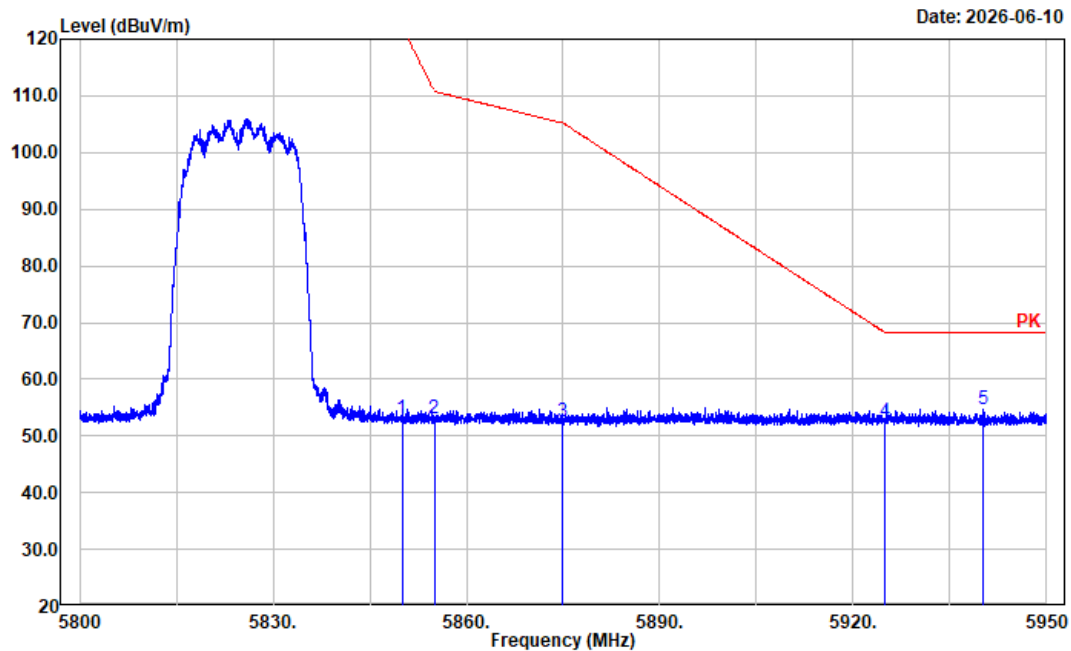


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	46.17	6.92	53.09	122.20	69.11	Peak
2	5855.000	46.06	6.94	53.00	110.80	57.80	Peak
3	5875.000	45.45	7.02	52.47	105.20	52.73	Peak
4	5925.000	45.46	7.17	52.63	68.20	15.57	Peak
5	5940.070	47.45	7.21	54.66	68.20	13.54	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B4 n20 Mode High Channel 5825 MHz

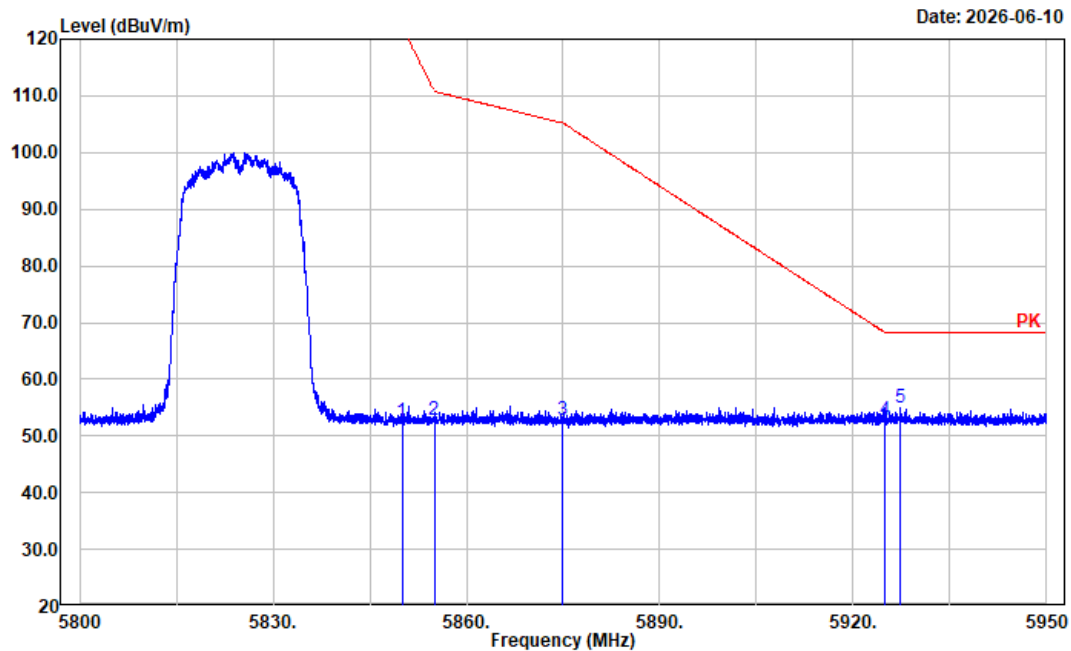


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	45.63	6.92	52.55	122.20	69.65	Peak
2	5855.000	45.85	6.94	52.79	110.80	58.01	Peak
3	5875.000	45.69	7.02	52.71	105.20	52.49	Peak
4	5925.000	45.74	7.17	52.91	68.20	15.29	Peak
5	5927.380	47.70	7.18	54.88	68.20	13.32	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B4 n40 Mode Low Channel 5755 MHz

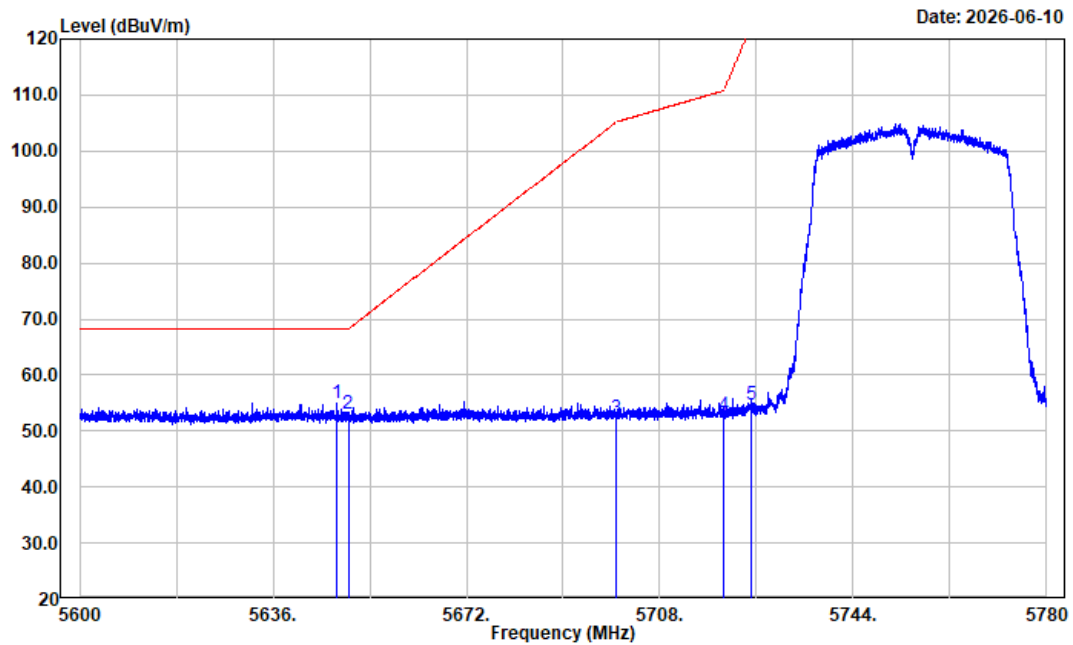


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5647.880	48.01	6.83	54.84	68.20	13.36	Peak
2	5650.000	46.36	6.83	53.19	68.20	15.01	Peak
3	5700.000	45.56	6.81	52.37	105.20	52.83	Peak
4	5720.000	46.00	6.83	52.83	110.80	57.97	Peak
5	5725.000	47.77	6.83	54.60	122.20	67.60	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B4 n40 Mode Low Channel 5755 MHz

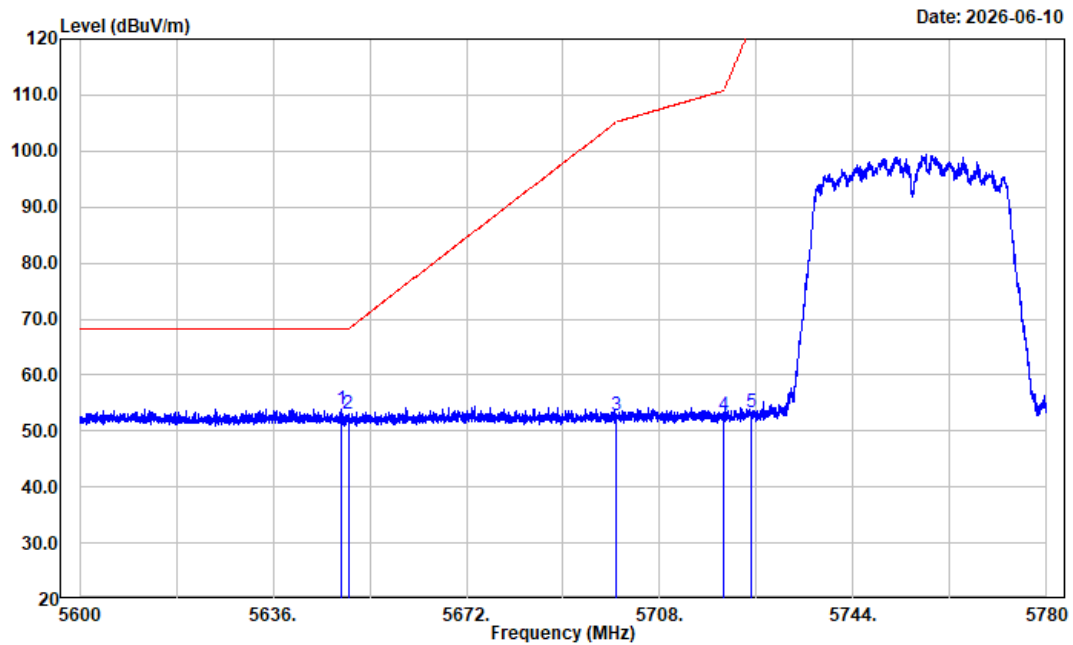


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5648.672	47.02	6.83	53.85	68.20	14.35	Peak
2	5650.000	46.19	6.83	53.02	68.20	15.18	Peak
3	5700.000	46.01	6.81	52.82	105.20	52.38	Peak
4	5720.000	45.85	6.83	52.68	110.80	58.12	Peak
5	5725.000	46.55	6.83	53.38	122.20	68.82	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B4 n40 Mode High Channel 5795 MHz

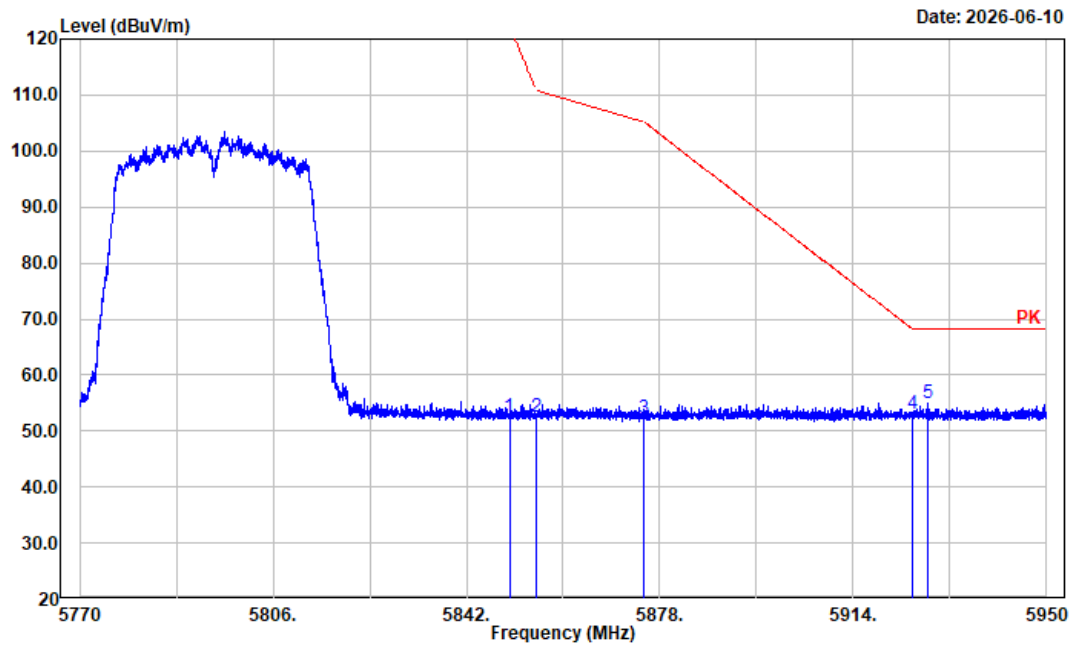


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	45.52	6.92	52.44	122.20	69.76	Peak
2	5855.000	45.55	6.94	52.49	110.80	58.31	Peak
3	5875.000	45.26	7.02	52.28	105.20	52.92	Peak
4	5925.000	45.79	7.17	52.96	68.20	15.24	Peak
5	5927.932	47.77	7.18	54.95	68.20	13.25	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B4 n40 Mode High Channel 5795 MHz

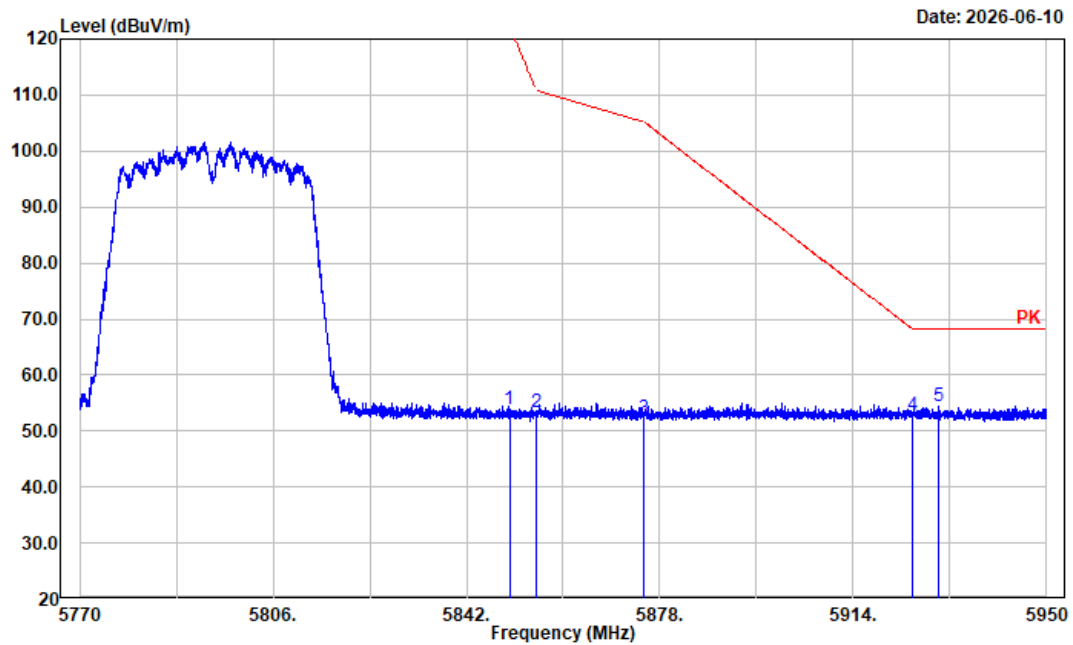


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	47.05	6.92	53.97	122.20	68.23	Peak
2	5855.000	46.27	6.94	53.21	110.80	57.59	Peak
3	5875.000	45.11	7.02	52.13	105.20	53.07	Peak
4	5925.000	45.67	7.17	52.84	68.20	15.36	Peak
5	5930.020	47.35	7.18	54.53	68.20	13.67	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B4 ac20 Mode Low Channel 5745 MHz

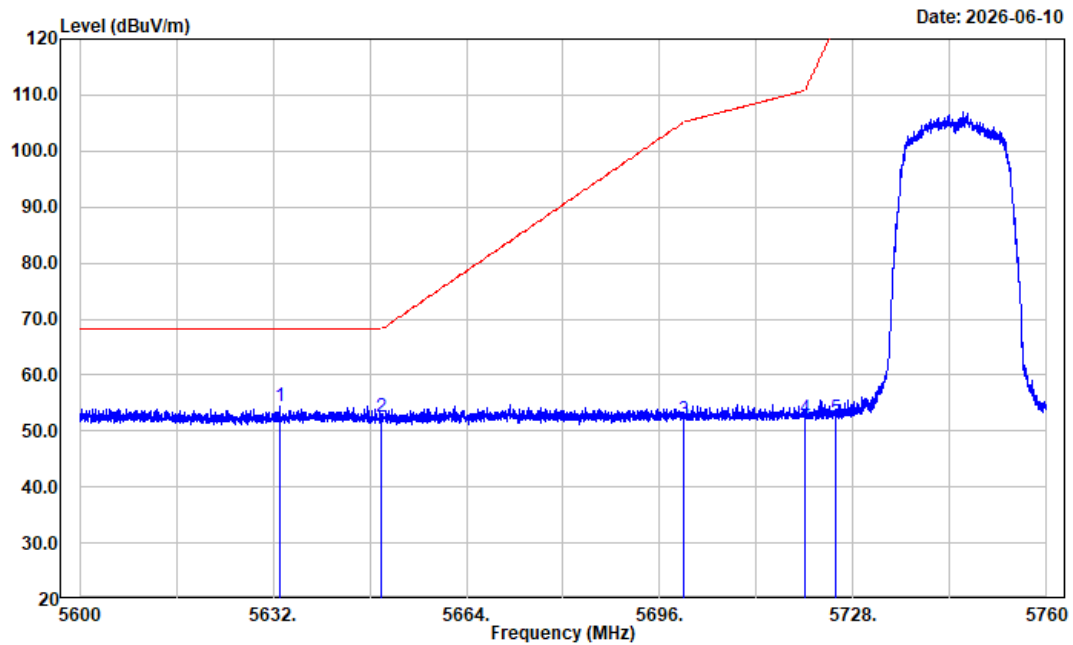


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5633.088	47.71	6.82	54.53	68.20	13.67	Peak
2	5650.000	45.69	6.83	52.52	68.20	15.68	Peak
3	5700.000	45.18	6.81	51.99	105.20	53.21	Peak
4	5720.000	45.54	6.83	52.37	110.80	58.43	Peak
5	5725.000	45.44	6.83	52.27	122.20	69.93	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B4 ac20 Mode Low Channel 5745 MHz

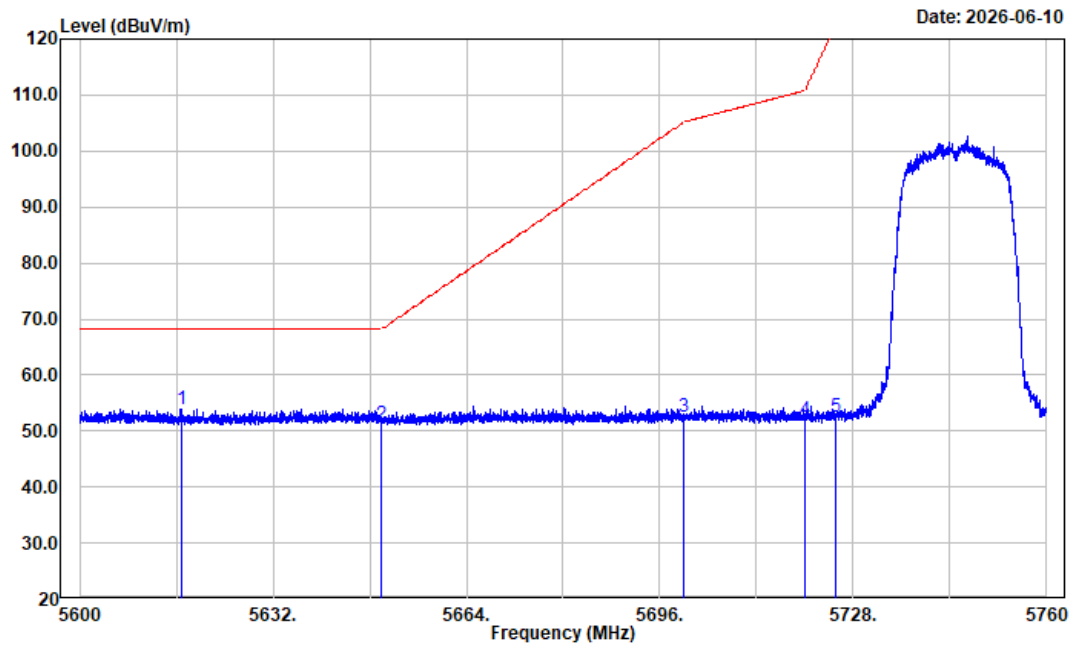


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5616.896	47.02	6.83	53.85	68.20	14.35	Peak
2	5650.000	44.46	6.83	51.29	68.20	16.91	Peak
3	5700.000	45.62	6.81	52.43	105.20	52.77	Peak
4	5720.000	45.02	6.83	51.85	110.80	58.95	Peak
5	5725.000	45.62	6.83	52.45	122.20	69.75	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B4 ac20 Mode High Channel 5825 MHz

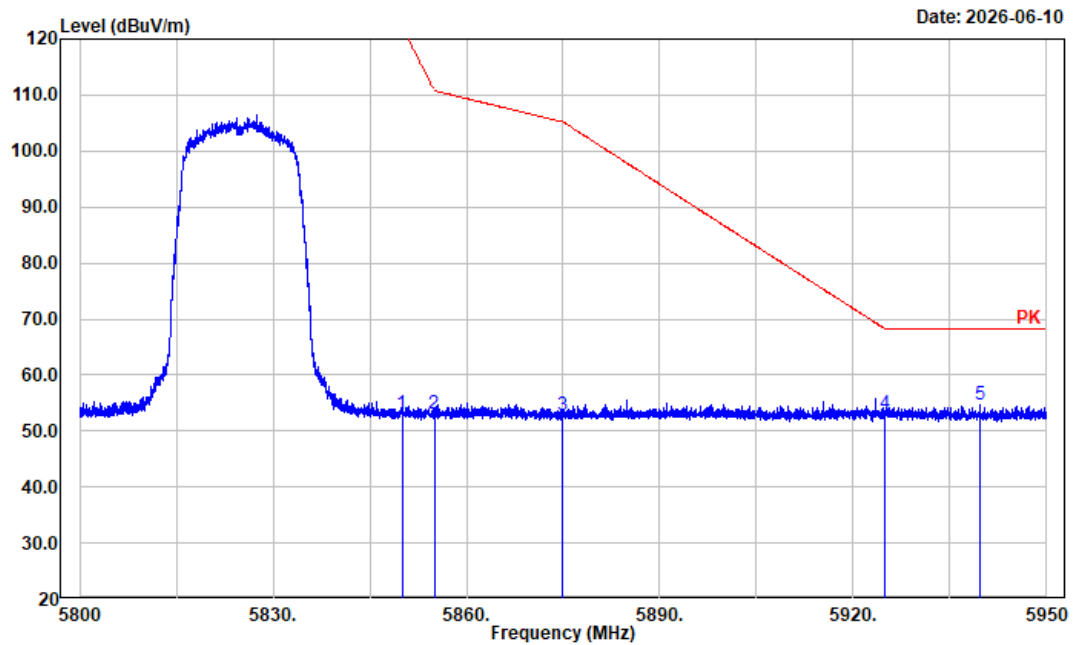


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	46.25	6.92	53.17	122.20	69.03	Peak
2	5855.000	46.06	6.94	53.00	110.80	57.80	Peak
3	5875.000	45.84	7.02	52.86	105.20	52.34	Peak
4	5925.000	45.82	7.17	52.99	68.20	15.21	Peak
5	5939.710	47.50	7.21	54.71	68.20	13.49	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B4 ac20 Mode High Channel 5825 MHz

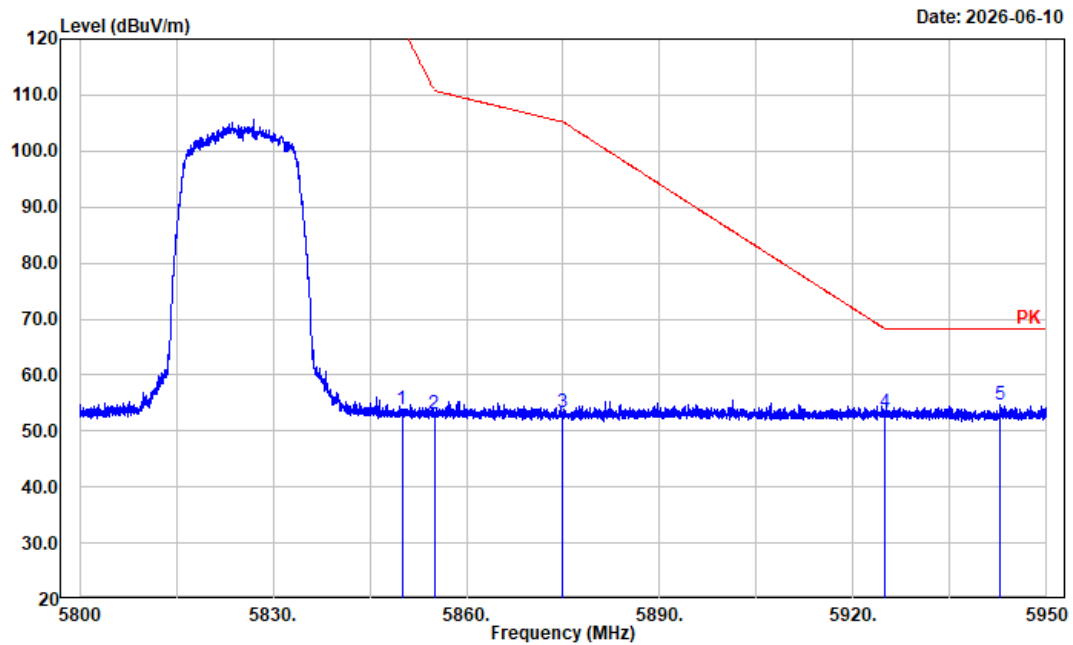


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.01	6.92	53.93	122.20	68.27	Peak
2	5855.000	46.00	6.94	52.94	110.80	57.86	Peak
3	5875.000	46.18	7.02	53.20	105.20	52.00	Peak
4	5925.000	46.04	7.17	53.21	68.20	14.99	Peak
5	5942.680	47.60	7.22	54.82	68.20	13.38	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B4 ac40 Mode Low Channel 5755 MHz

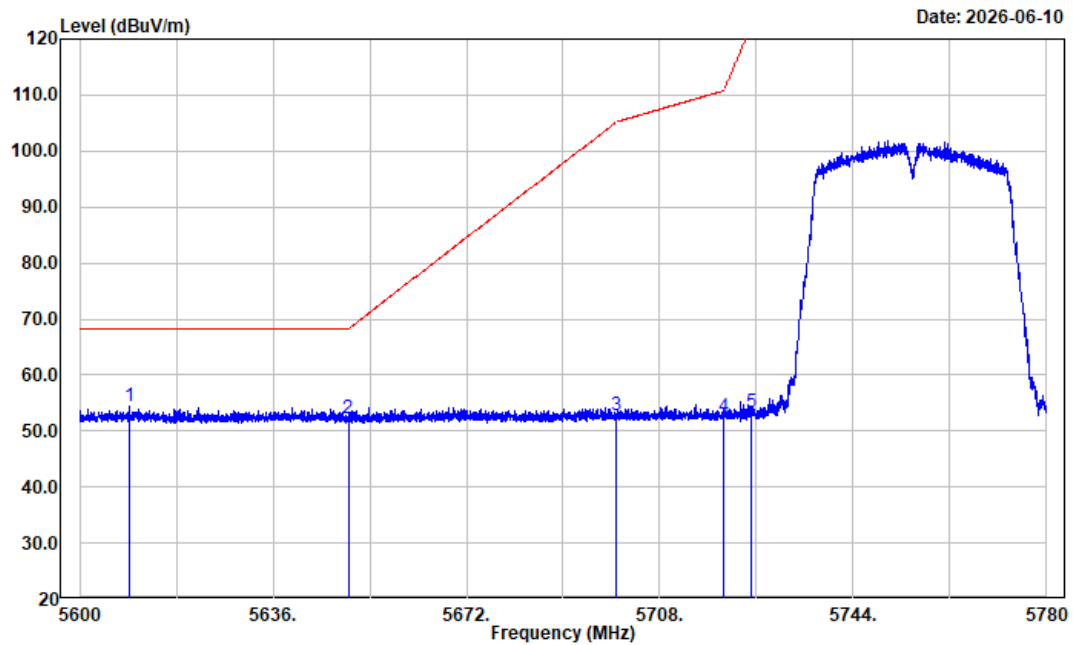


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5609.180	47.56	6.82	54.38	68.20	13.82	Peak
2	5650.000	45.37	6.83	52.20	68.20	16.00	Peak
3	5700.000	45.92	6.81	52.73	105.20	52.47	Peak
4	5720.000	45.62	6.83	52.45	110.80	58.35	Peak
5	5725.000	46.46	6.83	53.29	122.20	68.91	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B4 ac40 Mode Low Channel 5755 MHz

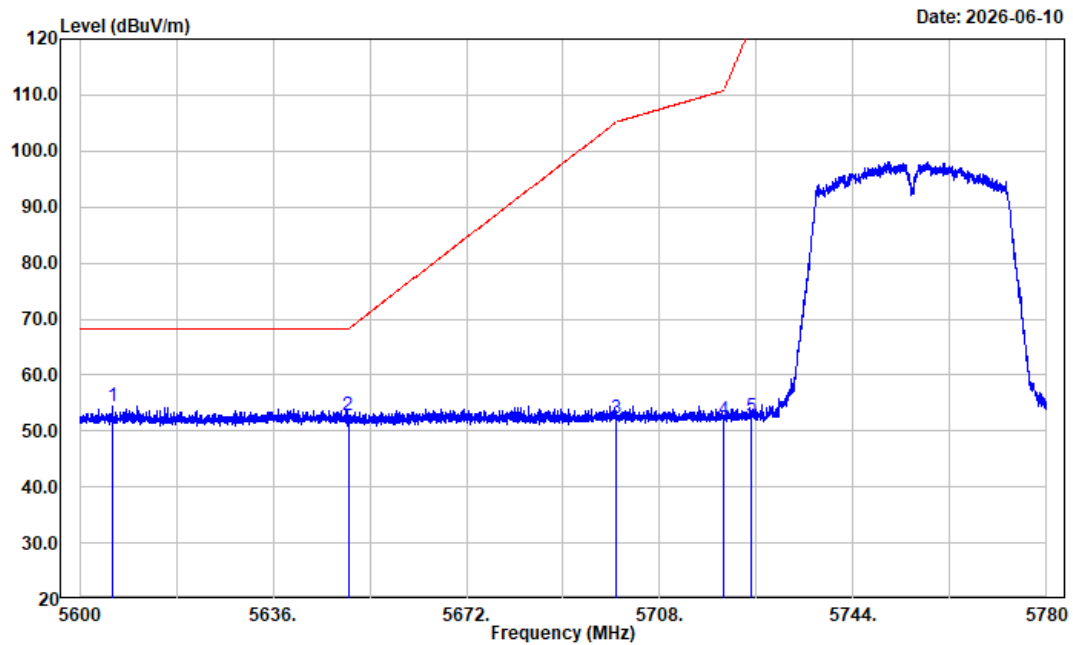


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5606.156	47.72	6.82	54.54	68.20	13.66	Peak
2	5650.000	45.96	6.83	52.79	68.20	15.41	Peak
3	5700.000	45.54	6.81	52.35	105.20	52.85	Peak
4	5720.000	45.10	6.83	51.93	110.80	58.87	Peak
5	5725.000	45.76	6.83	52.59	122.20	69.61	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B4 ac40 Mode High Channel 5795 MHz

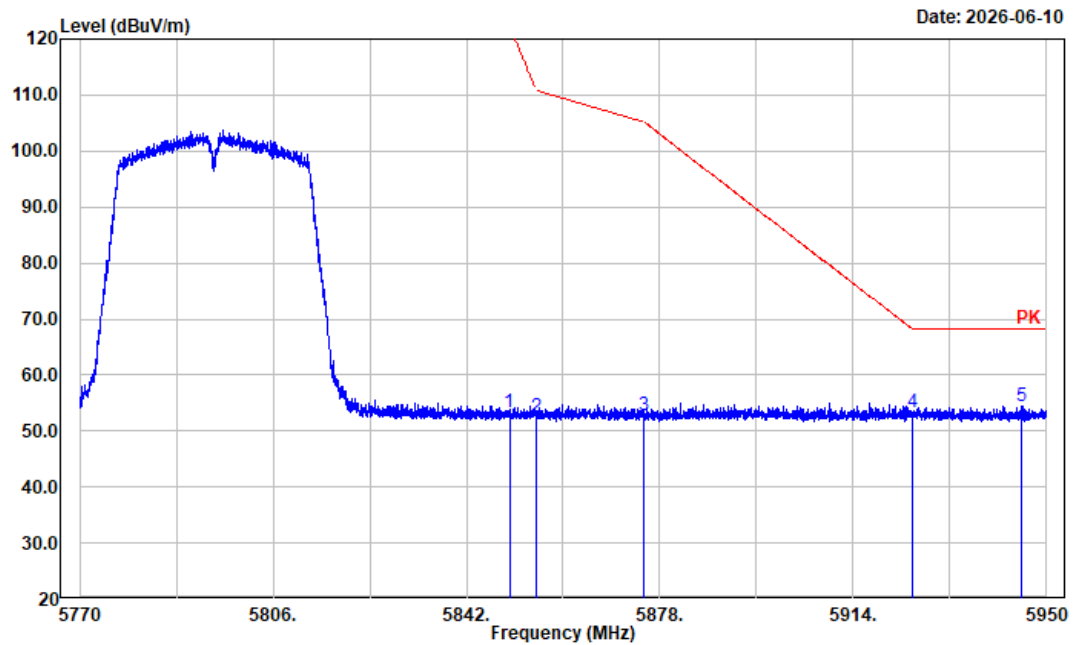


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	46.54	6.92	53.46	122.20	68.74	Peak
2	5855.000	45.55	6.94	52.49	110.80	58.31	Peak
3	5875.000	45.89	7.02	52.91	105.20	52.29	Peak
4	5925.000	46.18	7.17	53.35	68.20	14.85	Peak
5	5945.248	47.32	7.23	54.55	68.20	13.65	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B4 ac40 Mode High Channel 5795 MHz

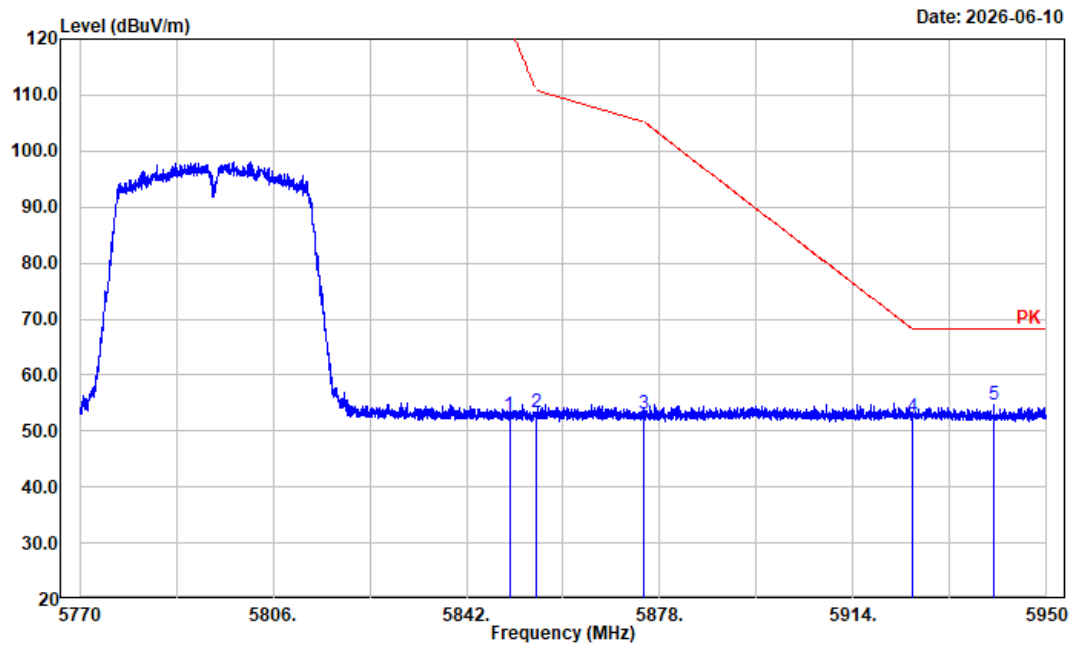


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	45.76	6.92	52.68	122.20	69.52	Peak
2	5855.000	46.26	6.94	53.20	110.80	57.60	Peak
3	5875.000	46.07	7.02	53.09	105.20	52.11	Peak
4	5925.000	45.41	7.17	52.58	68.20	15.62	Peak
5	5940.208	47.52	7.21	54.73	68.20	13.47	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B4 ac80 Mode Middle Channel 5775 MHz

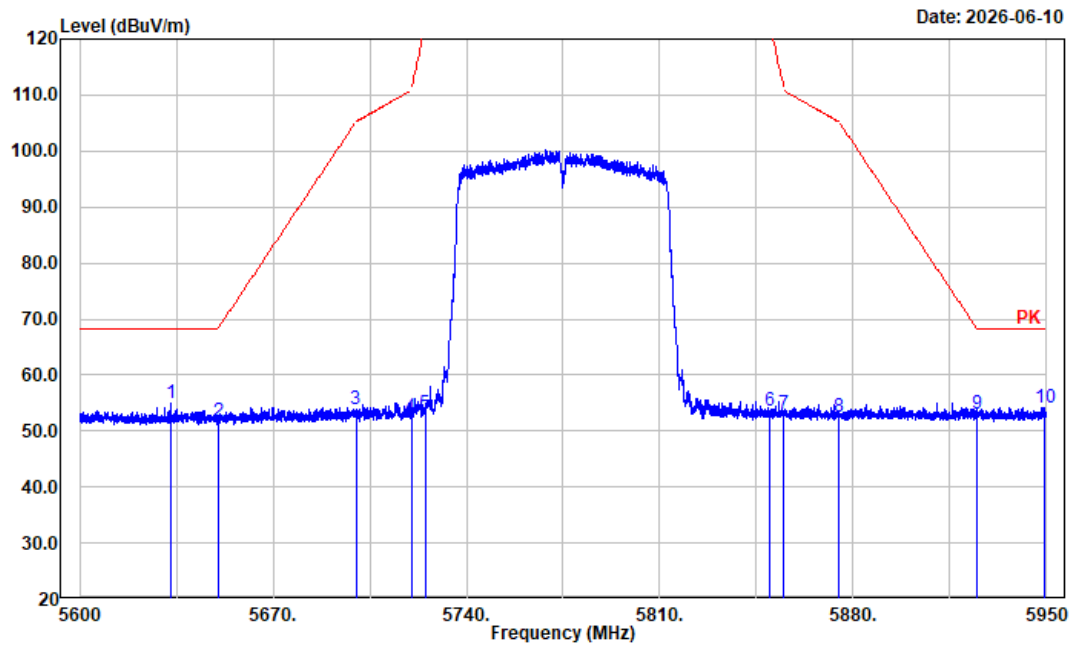

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5632.900	48.02	6.82	54.84	68.20	13.36	Peak
2	5650.000	44.94	6.83	51.77	68.20	16.43	Peak
3	5700.000	46.98	6.81	53.79	105.20	51.41	Peak
4	5720.000	45.75	6.83	52.58	110.80	58.22	Peak
5	5725.000	46.11	6.83	52.94	122.20	69.26	Peak
6	5850.000	46.78	6.92	53.70	122.20	68.50	Peak
7	5855.000	46.17	6.94	53.11	110.80	57.69	Peak
8	5875.000	45.43	7.02	52.45	105.20	52.75	Peak
9	5925.000	45.77	7.17	52.94	68.20	15.26	Peak
10	5949.160	47.04	7.24	54.28	68.20	13.92	Peak

Project No: 2603T22083E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B4 ac80 Mode Middle Channel 5775 MHz

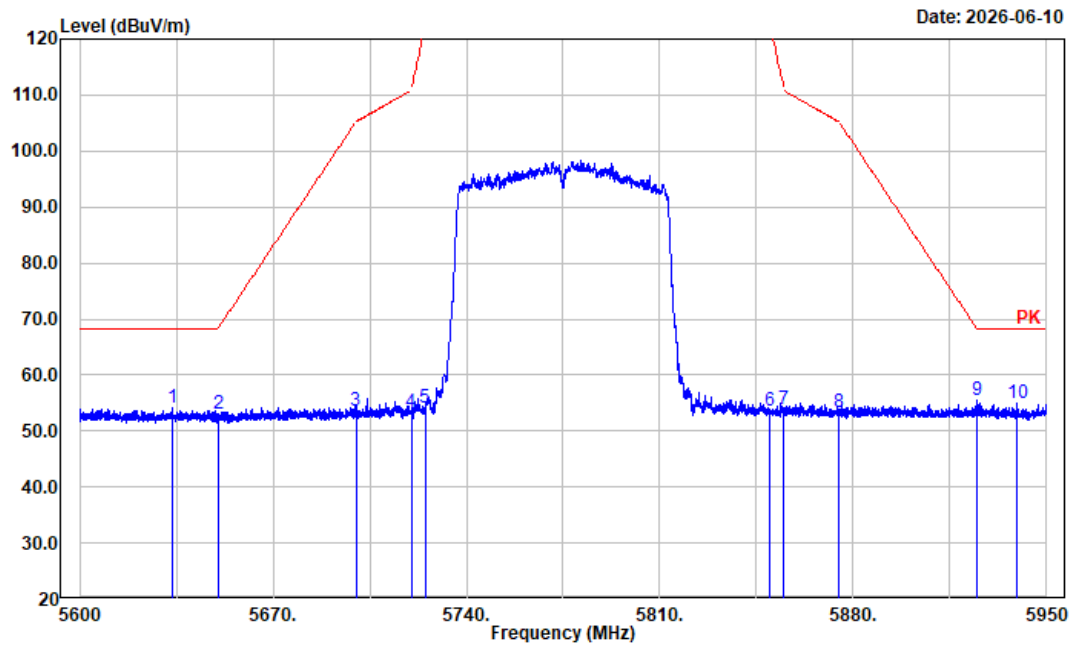

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5633.600	47.25	6.82	54.07	68.20	14.13	Peak
2	5650.000	46.25	6.83	53.08	68.20	15.12	Peak
3	5700.000	46.81	6.81	53.62	105.20	51.58	Peak
4	5720.000	46.64	6.83	53.47	110.80	57.33	Peak
5	5725.000	47.25	6.83	54.08	122.20	68.12	Peak
6	5850.000	46.56	6.92	53.48	122.20	68.72	Peak
7	5855.000	46.97	6.94	53.91	110.80	56.89	Peak
8	5875.000	46.44	7.02	53.46	105.20	51.74	Peak
9	5925.000	48.44	7.17	55.61	68.20	12.59	Peak
10	5939.150	47.87	7.21	55.08	68.20	13.12	Peak

4.3 RF Conducted Data

Please refer to Annex "2603T22083E-RF-00A_Appendix A" for detail test data.

5. EUT PHOTOGRAPHS

Please refer to the attachment 2603T22083E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2603T22083E-RF-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2603T22083E-RF-00A-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====