



*FCC PART 15, SUBPART B and C; and FCC SECTION 15.247; RSS-247 and RSS-GEN
TEST REPORT*

for

PULSE RF4CE UE878J CONVERSION 2021

Part Number: R32068BD00-00001

Prepared for

UNIVERSAL ELECTRONICS, INC.
201 E. SANDPOINTE AVENUE, 7TH FLOOR
SANTA ANA, CALIFORNIA 92707

Prepared by: _____

JAMES ROSS

Approved by: _____

KYLE FUJIMOTO

COMPATIBLE ELECTRONICS INC.
114 OLINDA DRIVE
BREA, CALIFORNIA 92823
(714) 579-0500

DATE: MAY 2, 2022

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	22	2	2	2	13	68	109

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



NVLAP LAB CODE 200528-0

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	5
1. PURPOSE	6
1.1 Decision rule & risk	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
3. APPLICABLE DOCUMENTS	8
4. DESCRIPTION OF TEST CONFIGURATION	9
4.1.1 Cable Construction and Termination	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1 EUT and Accessory List	10
5.2 Emissions Test Equipment	11
6. TEST SITE DESCRIPTION	12
6.1 Test Facility Description	12
6.2 EUT Mounting, Bonding and Grounding	12
6.3 Measurement Uncertainty	12
7. CHARACTERISTICS OF THE TRANSMITTER	13
7.1 Channel Number and Frequencies	13
7.2 Antenna	13
8. TEST PROCEDURES	14
8.1 RF Emissions	14
8.1.1 Conducted Emissions Test	14
8.1.2 Radiated Emissions Test	15
8.1.3 RF Emissions Test Results	16
8.1.4 Sample Calculations	17
8.2 DTS Bandwidth	18
8.3 Maximum Peak Conducted Output Power	18
8.4 Emissions in Non-restricted Frequency Bands	19
8.5 RF Band Edges	19
8.6 Spectral Density Test	20
8.7 99 % Bandwidth	20
8.8 Duty Cycle Calculation	21
9. CONCLUSIONS	22



LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Models Covered Under This Report
D	Diagrams and Charts • Test Setup Diagrams • Antenna and Effective Gain Factors
E	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Conducted Emissions Test Setup
2	Layout of the Semi-Anechoic Test Chamber

LIST OF TABLES

TABLE	TITLE
1	Radiated Emission Results

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used by the client to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the U.S. government.

Device Tested: Pulse RF4CE UE878J Conversion 2021
P/N: R32068BD00-00001
S/N: N/A

Product Description: The equipment under test is a hand-held wireless universal remote control with RF4CE. Dimensions: 35 mm (D) x 50 mm (W) x 175 mm (L). Clock(s): 32 MHz.

Modifications: The EUT was not modified in order to meet the specifications.

Customer: Universal Electronics, Inc.
201 E. Sandpointe Avenue, 7th Floor
Santa Ana, California 92707

Test Dates: April 11, 12, 13 and 14, 2022

Test Specification covered by accreditation:



Test Specifications: Emissions requirements
CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209, and 15.247; RSS-247 and RSS-GEN

Test Procedures: ANSI C63.4 and ANSI C63.10

Test Deviations: The test procedure was not deviated from during the testing.



SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz	This test was not performed because the EUT operates on internal battery power only and cannot be connected to the AC public mains.
2	Radiated RF Emissions, 9 kHz – 25000 MHz	Complies with the Class B limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15 Subpart C, 15.205, 15.209 and 15.247 (d); RSS-247 and RSS-GEN Highest reading in relation to spec limit 32.67 dBuV/m (QP) @ 666.10 MHz (*U = 3.30 dB)
3	DTS Bandwidth	Complies with the relevant requirements of CFR Title 47, Part 15, Subpart C, section 15.247 (a)(2); RSS-247
4	Peak Output Power	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (b)(3); RSS-247
5	RF Band Edges	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (d); RSS-247
6	Spectral Density	Complies with the relevant requirements of FCC Title 47, Part 15, Subpart C, section 15.247 (e); RSS-247

1. PURPOSE

This document is a qualification test report based on the emissions tests performed on the Pulse RF4CE UE878J Conversion 2021, P/N: R32068BD00-00001 (EUT). The emissions measurements were performed according to the measurement procedure described in ANSI C 63.4 and ANSI C 63.10. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the Class B specification limits defined by CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209, and 15.247; RSS-247 and RSS-Gen.

1.1 DECISION RULE & RISK

If a measured value exceeds a specification limit it implies non-compliance. If the value is below a specification limit it implies compliance. Measurement uncertainty of the laboratory is reported with all measurement results but generally not taken into consideration unless a standard, rule or law requires it to be considered.

Qualification test reports are only produced for products that are in compliance with the test requirements, therefore results are always in conformity. Otherwise, an engineering report or just the data is provided to the customer.

When performing a measurement and making a statement of conformity, in or out-of-specification to manufacturer's specifications or Pass/Fail against a requirement, there are two possible outcomes:

- The result is reported as conforming with the specification
- The result is reported as not conforming with the specification

The decision rule is defined below.

When the test result is found to be below the limit but within our measurement uncertainty of the limit, it is our policy that the final acceptance decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be exactly on the specification, it is our policy, in the case of unwanted emissions measurements to consider the result non-compliant; however, the final decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be over the specification limit under any condition, it is our policy to consider the result non-compliant.

In terms of uncertainty of measurement, the laboratory is a calibrated and tightly controlled environment and generally exceptionally stable, the measurement uncertainties are evaluated without the consideration of the test sample. When it comes to the test sample however, as most testing is performed on a single sample rather than a sample population, and that sample is often a pre-production representation of the final product that test sample represents a significantly higher source of measurement uncertainty. We advise our customers of this and that when in doubt (small test to limit margins), they may wish to perform statistical sampling on a population to gain a higher confidence in the results. All lab reported results are that of a single sample in any event.



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The emissions tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Universal Electronics, Inc.

Jesse Mendez Staff Engineer, Electrical

Compatible Electronics Inc.

Kyle Fujimoto Sr. Test Engineer

James Ross Sr. Test Engineer

2.4 Date Test Sample was Received

The test sample was received prior to initial date of testing. Received as defined in product description.

2.5 Disposition of the Test Sample

The test sample has not been returned to Universal Electronics, Inc. as of the date of this test report.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
ITE	Information Technology Equipment
DoC	Declaration of Conformity
FCC	Federal Communications Commission
RSS	Radio Standards Specification
N/A	Not Applicable
Tx	Transmit
Rx	Receive
Inc.	Incorporated
RF	Radio Frequency
GND	Ground
LED	Light Emitting Diode



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this emissions Test Report.

SPEC	TITLE
FCC Title 47, Part 15 Subpart C	FCC Rules – Radio frequency devices (including digital devices) – Intentional Radiators
FCC Title 47, Part 15 Subpart B	FCC Rules – Radio frequency devices (including digital devices) – Unintentional Radiators
558074 D01 DTS Meas Guidance v05r02	Guidance for Performing Compliance Measurements on Digital Transmissions Systems (DTS) Operating Under Section 15.247
EN 50147-2: 1997	Anechoic chambers. Alternative test site suitability with respect to site attenuation
ANSI C63.4 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10 2013	American National Standard for Testing Unlicensed Wireless Devices
RSS-Gen Issue 5 April 2019 Amendment 1	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2 February 2017	Digital Transmissions Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices



4. DESCRIPTION OF TEST CONFIGURATION

The Pulse RF4CE UE878J Conversion 2021, P/N: R32068BD00-00001 (EUT) was setup in a stand-alone configuration. The EUT was investigated in all three orthogonal axes. During the testing, the EUT was continuously transmitting at 2425 MHz, 2450 MHz, and 2475 MHz. The EUT was tested from 9 kHz to 25 GHz.

Fresh batteries were installed inside the EUT prior to the testing. The EUT was programmed via the Radio Control Console v4.6.2 firmware.

The firmware is stored in one of the network drives in the company's server.

The final radiated data for the EUT was taken in the mode described above. Please see Appendix E for the data sheets.

4.1.1 Cable Construction and Termination

The EUT contained no external cables.

5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

5.1 EUT and Accessory List

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID
PULSE RF4E UE878J CONVERSION 2021 (EUT)	UNIVERSAL ELECTRONICS, INC.	P/N: R32068BD00-00001	N/A	MG3-R32068BD00
LAPTOP*	HEWLETT PACKARD	HSTNN-C82C	N/A	N/A
AC ADAPTER FOR LAPTOP*	HEWLETT PACKARD	HSTNN-DA40	N/A	N/A
PROGRAM BOARD*	UNIVERSAL ELECTRONICS, INC.	FTD1232	N/A	N/A
FIRMWARE	UNIVERSAL ELECTRONICS, INC.	RADIO CONTROL CONSOLE	v4.6.2	N/A

*Used to program the EUT only and was removed prior to testing.

5.2 Emissions Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. CYCLE
RF RADIATED AND CONDUCTED EMISSIONS TEST EQUIPMENT					
TDK TestLab	TDK RF Solutions, Inc.	9.22	700145	N/A	N/A
MXE EMI Receiver, 20 Hz – 26.5 GHz	Keysight Technologies, Inc.	N9038A	MY51210150	September 17, 2021	2 Year
System Controller	Sunol Sciences Corporation	SC110V	112213-1	N/A	N/A
Turntable	Sunol Sciences Corporation	2011VS	N/A	N/A	N/A
Antenna-Mast	Sunol Sciences Corporation	TWR95-4	112213-3	N/A	N/A
Loop Antenna	Com-Power	AL-130R	121090	February 10, 2022	3 Year
CombiLog Antenna	Com-Power	AC-220	61093	December 14, 2021	2 Year
Horn Antenna	Com-Power	AH-118	10050113	December 16, 2021	2 Year
Horn Antenna	Com-Power	AH-826	71957	N/A	N/A
Preamplifier	Com-Power	PAM-118	181653	March 7, 2022	1 Year
Preamplifier	Com-Power	PA-840	711013	April 8, 2022	2 Year
Computer	Hewlett Packard	p6716f	MXX1030PX0	N/A	N/A
LCD Monitor	Hewlett Packard	52031a	3CQ046N3MG	N/A	N/A

6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and 7.1 of this report for emissions test location.

6.2 EUT Mounting, Bonding and Grounding

For frequencies 1 GHz and below: The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

For frequencies above 1 GHz: The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 1.5 meters above the ground plane.

The EUT was not grounded.

6.3 Measurement Uncertainty

“Compatible Electronics” U_{lab} value is less than U_{cisprr} , thus based on this – compliance is deemed to occur if no measured disturbance exceeds the disturbance limit.

The uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level, using a coverage factor of $k=2$

$$u_c(y) = \sqrt{\sum_i c_i^2 u^2(x_i)}$$

Measurement		U_{cisprr}	$U_{lab} = 2u_c(y)$
Conducted disturbance (mains port)	(150 kHz – 30 MHz)	3.4 dB	2.72 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(30 MHz – 1,000 MHz)	6.3 dB	3.32 dB (Vertical) 3.30 dB (Horizontal)
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(1 GHz – 6 GHz)	5.2 dB	4.06 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(6 GHz – 18 GHz)	5.5 dB	4.06 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(18 GHz – 26 GHz)	N/A	4.43 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(26.5 GHz – 40 GHz)	N/A	4.51 dB



7. CHARACTERISTICS OF THE TRANSMITTER

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

7.1 Channel Number and Frequencies

The EUT uses a total of 3 channels which are spaced 25 MHz apart.

The low channel is 2425 MHz

The middle channel is 2450 MHz

The high channel is 2475 MHz

7.2 Antenna

The EUT has a 1.12 dBi gain dipole PCB trace antenna.



8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions

8.1.1 Conducted Emissions Test

The EMI Receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. A 10 dB attenuator used for the protection of the EMI Receiver input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the EMI Receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63:4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by computer software. The final qualification data is located in Appendix E.

Test Results:

This test was not performed because the EUT operates on battery power only and cannot be connected to the AC public mains.

8.1.2 Radiated Emissions Test

The EMI Receiver was used as the measuring meter. Above 1000 MHz, preamplifiers were used to increase the sensitivity of the instrument. The EMI Receiver was initially used with the Analyzer mode feature activated. In this mode, the EMI receiver can then record the actual frequency to be measured. This final reading is then taken accurately in the EMI Receiver mode, which takes into account the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit. The effective measurement bandwidth used for the radiated emissions test was according to the frequency measured.

The frequencies below 1 GHz were quasi-peaked using the quasi-peak detector of the EMI Receiver.

The frequencies above 1 GHz were averaged using the duty cycle correction factor in section 8.8 of this test report.

The EMI test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4 and ANSI C63.10. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results.

The EUT was tested at a 3-meter test distance. The six highest emissions are listed in Table 1.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
9 kHz to 150 kHz	200 Hz	Loop Antenna
150 kHz to 30 MHz	9 kHz	Loop Antenna
30 MHz to 1 GHz	120 kHz	CombiLog Antenna
1 GHz to 25 GHz	1 MHz	Horn Antenna

Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; the limits of CFR Title 47, Part 15, Subpart C sections 15.205, 15.209 and 15.247; and the limits of RSS-247 and RSS-Gen for radiated emissions.

8.1.3 RF Emissions Test Results

Table 1 RADIATED EMISSION RESULTS
Pulse RF4CE UE878J Conversion 2021
P/N: R32068BD00-00001

Frequency (MHz)	EMI Reading (dBuV/m)	Specification Limit (dBuV/m)	Delta (Cor. Reading – Spec. Limit) (dB)
666.10 (H) (Tx – Low Channel)	32.67 (QP)	46.00	-13.33
668.70 (H) (Tx – Low Channel)	32.58 (QP)	46.00	-13.42
674.40 (H) (Tx – Low Channel)	32.44 (QP)	46.00	-13.56
652.60 (H) (Tx – Low Channel)	32.28 (QP)	46.00	-13.72
4900.00 (Z-Axis) (Vertical)	36.94 (AV)	53.97	-17.03
162.10 (H) (Tx – Low Channel)	26.43 (QP)	43.50	-17.07

Notes: * The complete emissions data is given in Appendix E of this report.
(V) Vertical
(H) Horizontal
(QP) Quasi-Peak
(AV) Average
Tx Transmit



8.1.4

Sample Calculations

A correction factor for the antenna, cable and a distance factor (if any) must be applied to the meter reading before a true field strength reading can be obtained. This Corrected Meter Reading is then compared to the specification limit in order to determine compliance with the limits.

Conversion to logarithmic terms: Specification limit ($\mu\text{V}/\text{m}$) $\log \times 20$ = Specification Limit in dBuV/m

To correct for distance when measuring at a distance other than the specification

For measurements below 30 MHz: (Specification distance / test distance) $\log \times 40$ = distance factor

For measurements above 30 MHz: (Specification distance / test distance) $\log \times 20$ = distance factor

Note: When using an Active Antenna, the Antenna factor shall be subtracted due to the combination of the internal amplification and antenna loss.

Corrected Meter Reading = meter reading + F – A + C

where: F = antenna factor

A = amplifier gain

C = cable loss

The correction factors for the antenna and the amplifier gain are attached in Appendix D of this report. The data sheets are attached in Appendix E.

The distance factor D is 0 when the test is performed at the required specification distance.



8.2 DTS Bandwidth

The DTS Bandwidth was measured using the EMI Receiver. The following steps were performed for measuring the DTS Bandwidth.

1. Set RBW = 100 kHz
2. Set the video bandwidth (VBW) to equal or greater than 3 times the RBW
3. Detector = Peak
4. Trace Mode = Max Hold
5. Sweep = Auto Couple
6. Allow the trace to stabilize
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (a)(2); and RSS-247.

8.3 Maximum Peak Conducted Output Power

The Maximum Peak Conducted Output Power was measured using the EMI Receiver. The Maximum Peak Conducted Output Power was measured using the procedure described in section 11.9.1.1 of ANSI C63.10. The Maximum Peak Conducted Output Power was then taken. The following steps were performed for measuring the Maximum Peak Conducted Output Power.

1. Set the RBW $\geq$ DTS bandwidth
2. Set VBW $\geq$ [3 x RBW]
3. Set span $\geq$ [3 x RBW]
4. Sweep time = auto couple
5. Detector = peak
6. Trace mode = max hold
7. Allow trace to fully stabilize
8. Use peak marker function to determine the peak amplitude level

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (b)(3); and RSS-247.

8.4 Emissions in Non-restricted Frequency Bands

The emissions in the non-restricted frequency bands measurements were performed using the EMI receiver directly connected to the EUT. The reference level was established by setting the instrument center frequency to the DTS channel center frequency. The span was set to ≥ 1.5 times the DTS bandwidth. The RBW was set to 100 kHz and the VBW was set to 300 kHz. A peak detector was used with sweep set to auto. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the reference level. For emission level measurement, the center frequency and span were set to encompass the frequency range to be measured. The RBW was set to 100 kHz and the VBW was set to 300 kHz. A peak detector was used with a sweep time set to auto. The number of measurement points were greater than the span/RBW. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the maximum amplitude level. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (d); and RSS-247.

8.5 RF Band Edges

The RF band edges were taken at 2390 MHz when the EUT was on the low channel and 2483.5 MHz when the EUT was on the high channel using the EMI Receiver. A preamplifier was used to boost the signal level, with the plots being taken at a 3 meter test distance. The radiated emissions test procedure as describe in section 8.1.2 of this test report was used to maximize the emission.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (d); and RSS-247. The RF power at the restricted bands closest to the band edges at 2390 MHz and 2483.5 MHz also meet the limits of section 15.209. Please see the data sheets located in Appendix E.



8.6 Spectral Density Test

The spectrum density output was measured using the EMI Receiver. The spectral density output was measured using a direct connection from the RF out on the EUT into the input of the EMI Receiver. The following steps were performed for measuring the spectral density.

1. Set analyzer center frequency to DTS channel center frequency
2. Set the span to 1.5 times the OBW.
3. Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
4. Set the VBW $\geq [3 \times \text{RBW}]$
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow the trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Results:

The EUT complies with the relevant requirements of FCC Title 47, Part 15, Subpart C section 15.247 (e); and RSS-247.

8.7 99 % Bandwidth

The 99 % bandwidth was measured using an EMI Receiver.

The following steps were performed for measuring the 99 % bandwidth per RSS-GEN, Issue 5, clause 6.7:

1. Set RBW to 1 % to 5 % of the actual occupied bandwidth.
2. Set VBW to greater than 3 times the RBW.
3. Set the EMI Receiver to the occupied bandwidth Function set at 99 %
4. Set the peak detector to max hold.
5. Set the sweep time to auto
6. Allow the trace to stabilize.

Please note that this was only used to determine the emission bandwidth and that there are no limits or pass/fail criteria for this test. Please see the data sheets located in Appendix E.



8.8

Duty Cycle Calculation

The fundamental and harmonics were measured at a 3-meter test distance. The EMI Receiver was used to obtain the final test data. The final qualification data sheets are located in Appendix E.

Where

$$\delta(\text{dB}) = 20 \log \left[\frac{\sum (nt_1 + mt_2 + \dots + \xi t_x)}{T} \right]$$

n is the number of pulses of duration t_1

m is the number of pulses of duration t_2

ξ is the number of pulses of duration t_x

T is the period of the pulse train or 100 ms if the pulse train length is greater than 100 ms

The worst case was when the EUT was in data mode

Duty Cycle Correction Factor = -20 dB

Time of One Pulse = 1.58 ms

Total On Time = 1.58 ms

The time between pulses is 101.5 ms

Duty Cycle = 1.58 ms / 100 ms = 0.0158 = 1.58 %


The maximum Peak to Average ratio of -20 dB can be utilized



9. CONCLUSIONS

The Pulse RF4CE UE878J Conversion 2021, P/N: R32068BD00-00001 (EUT), as tested, meets all of the specification limits defined in CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.207, 15.209, and 15.247; RSS-GEN and RSS-247.



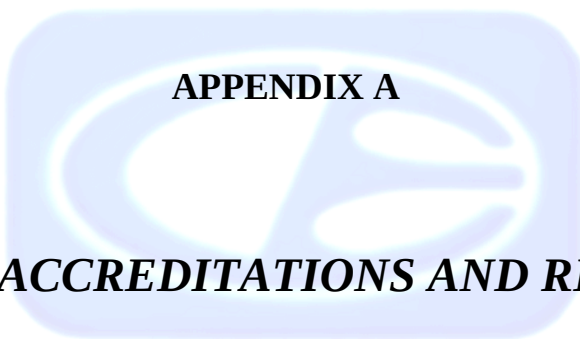

APPENDIX A

LABORATORY ACCREDITATIONS AND RECOGNITIONS

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

For the most up-to-date version of our scopes and certificates please visit

<http://celectronics.com/quality/scope/>

Quote from ISO-ILAC-IAF Communiqué on the Management Systems Requirements of ISO/IEC 17025, General Requirements for the competence of testing and calibration laboratories:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025 are written in language relevant to laboratory operations and operate generally in accordance with the principles of ISO 9001"

ISED Test Site Registration Number: 2154A



APPENDIX B

MODIFICATIONS TO THE EUT



MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC Subpart B and FCC 15.247; RSS-GEN and RSS-210 specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT during the testing.





APPENDIX C

***MODELS COVERED
UNDER THIS REPORT***



MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

S/N: N/A

There are no additional models covered under this report.





APPENDIX D

DIAGRAMS AND CHARTS



FIGURE 1: CONDUCTED EMISSIONS TEST SETUP


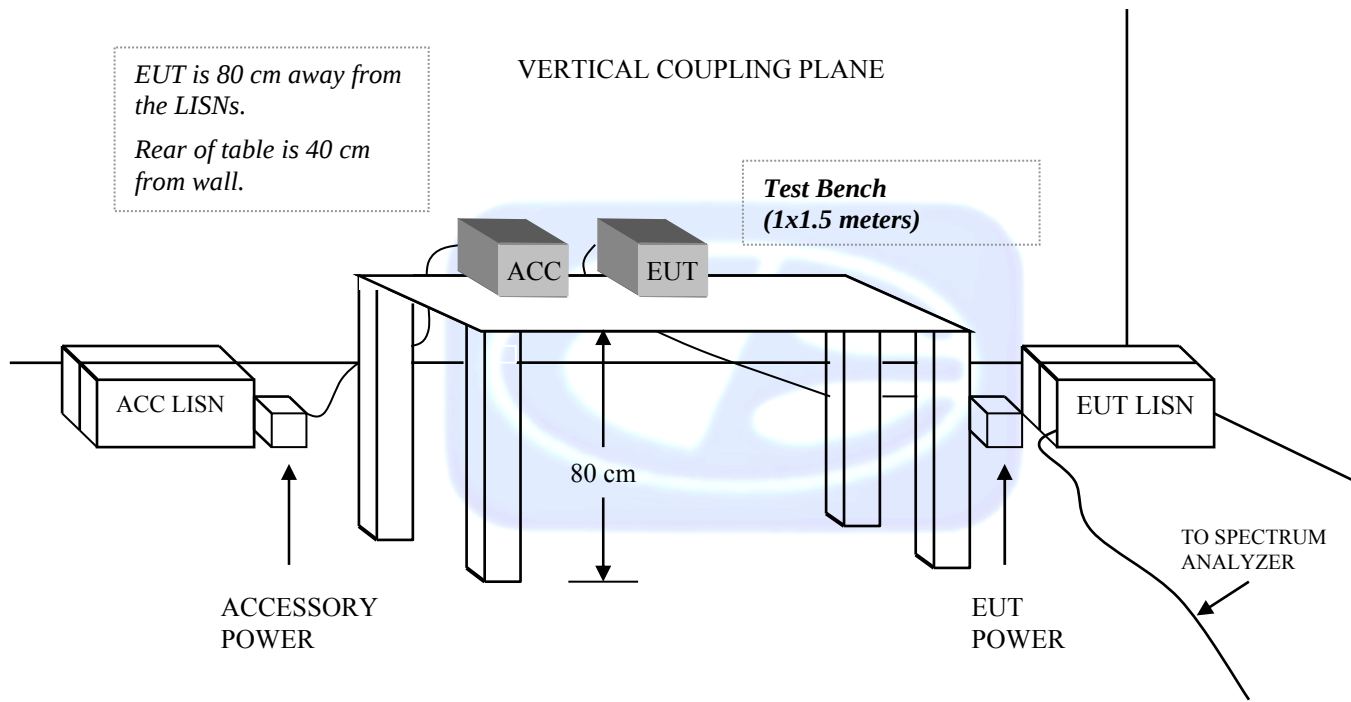




FIGURE 2: LAYOUT OF THE SEMI-ANECHOIC TEST CHAMBER



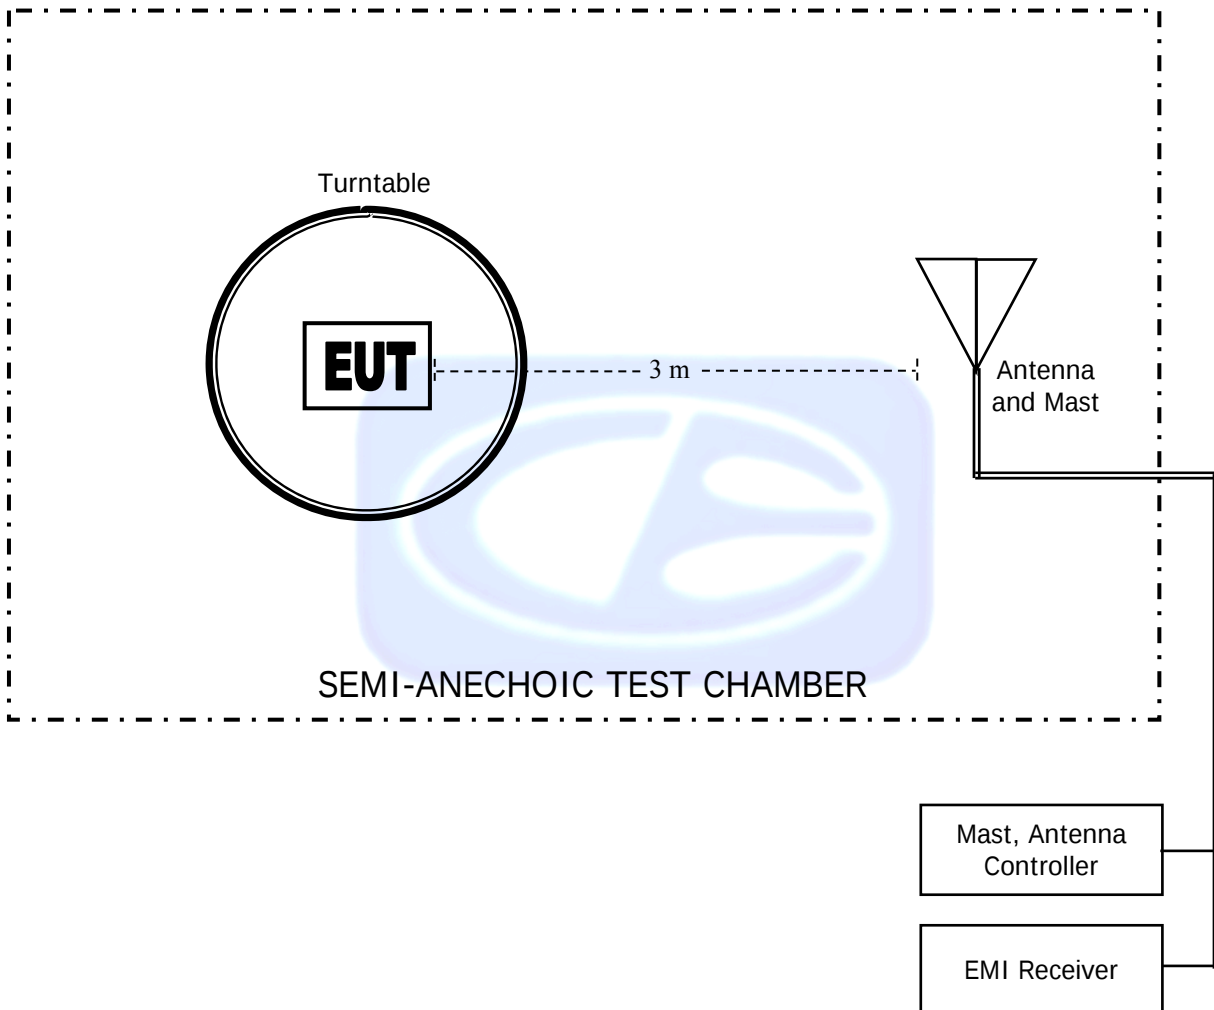

COM-POWER AL-130R

LOOP ANTENNA

S/N: 121090

CALIBRATION DATE: FEBRUARY 10, 2022

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	15.6	-35.8
0.01	15.8	-35.6
0.02	14.8	-36.6
0.03	15.6	-35.9
0.04	15.0	-36.5
0.05	14.4	-37.1
0.06	14.6	-36.9
0.07	14.3	-37.2
0.08	14.3	-37.2
0.09	14.4	-37.0
0.10	14.1	-37.4
0.20	14.1	-37.4
0.30	14.0	-37.5
0.40	13.9	-37.6
0.50	14.1	-37.3
0.60	14.1	-37.3
0.70	14.2	-37.3
0.80	14.2	-37.3
0.90	14.2	-37.2
1.00	14.4	-37.0
2.00	14.6	-36.9
3.00	14.6	-36.8
4.00	14.9	-36.6
5.00	14.9	-36.7
6.00	14.8	-36.7
7.00	14.6	-36.8
8.00	14.5	-37.0
9.00	14.3	-37.2
10.00	14.5	-37.0
11.00	14.6	-36.9
12.00	14.7	-36.7
13.00	14.9	-36.6
14.00	15.0	-36.5
15.00	14.9	-36.6
16.00	14.9	-36.6
17.00	14.6	-36.8
18.00	14.4	-37.1
19.00	14.5	-37.0
20.00	14.5	-37.0
21.00	14.2	-37.3
22.00	13.9	-37.5
23.00	13.9	-37.5
24.00	13.8	-37.7
25.00	13.4	-38.0
26.00	13.2	-38.2
27.00	13.2	-38.3
28.00	12.7	-38.7
29.00	12.7	-38.8
30.00	12.4	-39.0



COM-POWER AC-220

COMBILOG ANTENNA

S/N: 61093

CALIBRATION DATE: DECEMBER 14, 2021

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	22.50	200	16.00
35	21.40	250	17.40
40	21.00	300	19.70
45	20.60	350	20.00
50	19.70	400	22.20
60	16.10	450	22.40
70	12.80	500	23.10
80	12.50	550	23.40
90	14.20	600	24.90
100	15.40	650	25.30
120	16.50	700	25.40
125	16.80	750	26.40
140	15.90	800	26.70
150	16.60	850	27.10
160	18.50	900	27.90
175	15.90	950	28.00
180	15.50	1000	28.00



COM POWER AH-118

HORN ANTENNA

S/N: 10050113

CALIBRATION DATE: DECEMBER 16, 2021

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	23.86	10.0	38.91
1.5	25.67	10.5	39.94
2.0	28.25	11.0	39.10
2.5	29.17	11.5	39.70
3.0	29.78	12.0	40.29
3.5	30.88	12.5	41.93
4.0	31.21	13.0	41.34
4.5	32.96	13.5	40.57
5.0	33.30	14.0	40.23
5.5	34.24	14.5	42.25
6.0	34.57	15.0	43.63
6.5	35.61	15.5	39.96
7.0	36.60	16.0	40.38
7.5	37.49	16.5	40.56
8.0	37.44	17.0	40.93
8.5	37.98	17.5	42.27
9.0	38.01	18.0	43.77
9.5	38.53		



COM-POWER AH-826

HORN ANTENNA

S/N: 71957

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
18.0	33.5	22.5	35.5
18.5	33.5	23.0	35.9
19.0	34.0	23.5	35.7
19.5	34.0	24.0	35.6
20.0	34.3	24.5	36.0
20.5	34.9	25.0	36.2
21.0	34.7	25.5	36.1
21.5	35.0	26.0	36.2
22.0	35.0	26.5	35.7



COM-POWER PAM-118

PREAMPLIFIER

S/N: 181653

CALIBRATION DATE: MARCH 7, 2022

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	40.02	6.0	38.84
1.1	39.72	6.5	39.20
1.2	39.93	7.0	39.46
1.3	39.98	7.5	39.67
1.4	39.99	8.0	39.28
1.5	40.20	8.5	38.63
1.6	40.05	9.0	38.96
1.7	40.15	9.5	39.33
1.8	40.20	10.0	39.58
1.9	40.33	11.0	38.25
2.0	40.33	12.0	40.03
2.5	40.60	13.0	40.55
3.0	40.76	14.0	40.36
3.5	40.87	15.0	39.34
4.0	40.39	16.0	37.34
4.5	39.55	17.0	42.14
5.0	40.34	18.0	42.54
5.5	39.45		



COM-POWER PA-840

MICROWAVE PREAMPLIFIER

S/N: 711013

CALIBRATION DATE: APRIL 8, 2022

FREQUENCY (GHz)	FACTOR (dB)
18.0	24.85
19.0	24.25
20.0	22.69
21.0	22.17
22.0	22.78
23.0	23.23
24.0	23.72
25.0	24.13
26.0	24.28
26.5	25.06



**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

Report Number: B20413D1

Page D10



FRONT VIEW

UNIVERSAL ELECTRONICS, INC.
PULSE RF4CE UE878J CONVERSION 2021
P/N: R32068BD00-00001

FCC SUBPART B AND C; RSS-GEN and RSS-247 – RADIATED EMISSIONS – BELOW 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

Report Number: B20413D1

Page D11



REAR VIEW

UNIVERSAL ELECTRONICS, INC.
PULSE RF4CE UE878J CONVERSION 2021
P/N: R32068BD00-00001


FCC SUBPART B AND C; RSS-GEN and RSS-247 – RADIATED EMISSIONS – BELOW 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

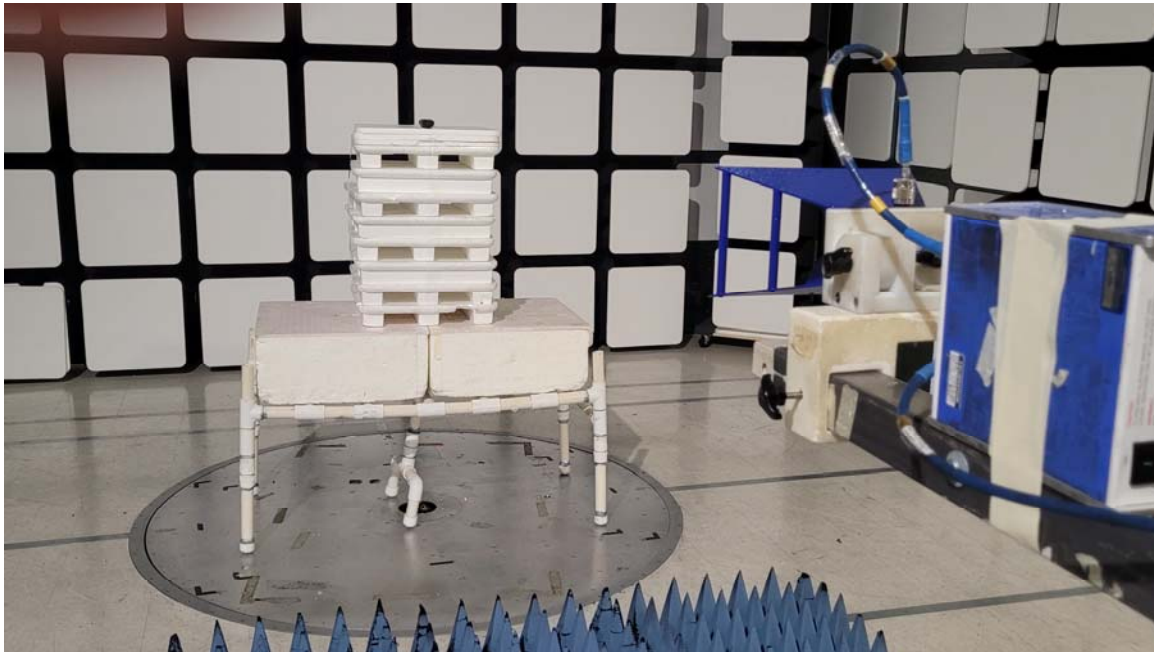


FRONT VIEW

UNIVERSAL ELECTRONICS, INC.
PULSE RF4CE UE878J CONVERSION 2021
P/N: R32068BD00-00001

FCC SUBPART B AND C; RSS-GEN and RSS-247 – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

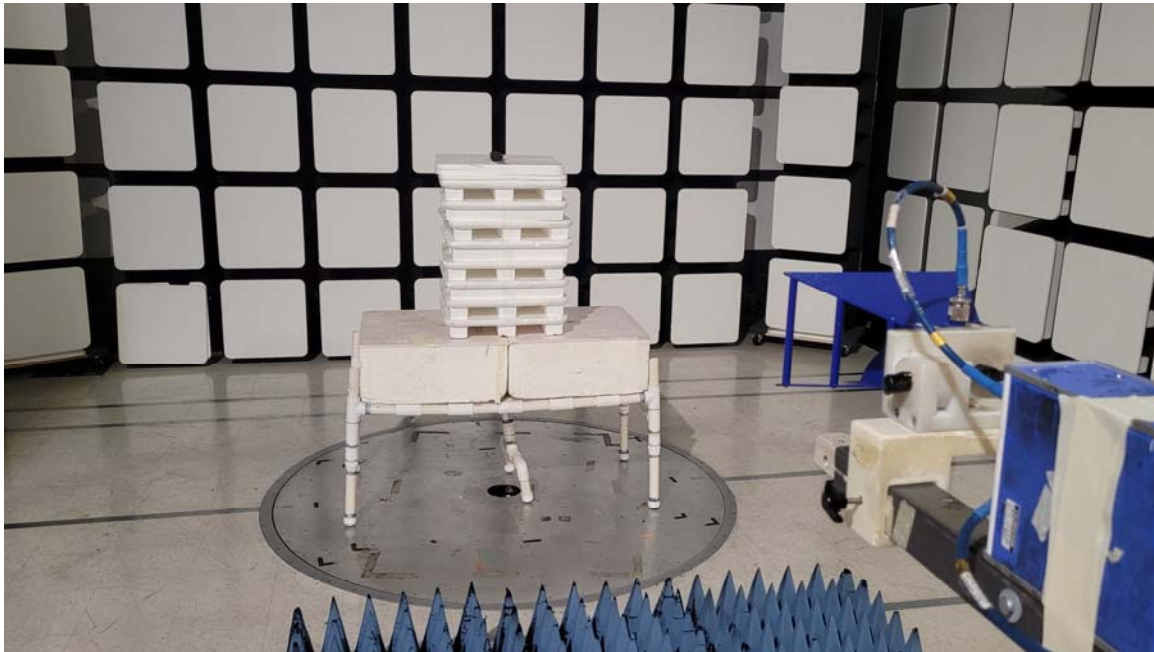

REAR VIEW

UNIVERSAL ELECTRONICS, INC.
PULSE RF4CE UE878J CONVERSION 2021
P/N: R32068BD00-00001

FCC SUBPART B AND C; RSS-GEN and RSS-247 – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



APPENDIX E

DATA SHEETS



***RADIATED EMISSIONS
DATA SHEETS***



FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Low Channel

Transmit Mode - X-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4850.00	45.41	V	73.97	-28.56	Peak	260.73	166.02	
4850.00	25.41	V	53.97	-28.56	Avg	260.75	166.02	
7275.00	44.55	V	73.97	-29.42	Peak	266.50	100.00	
7275.00	24.55	V	53.97	-29.42	Avg	266.50	100.00	
9700.00								Not in Restricted Band
9700.00								Done via Conducted
12125.00								No Emission
12125.00								Detected
14550.00								No Emission
14550.00								Detected
16975.00								No Emission
16975.00								Detected
19400.00								No Emission
19400.00								Detected
21825.00								No Emission
21825.00								Detected
24250.00								No Emission
24250.00								Detected



FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Low Channel

Transmit Mode - Y-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4850.00	55.71	V	73.97	-18.26	Peak	113.50	175.40	
4850.00	35.71	V	53.97	-18.26	Avg	113.50	175.40	
7275.00	52.78	V	73.97	-21.19	Peak	223.00	222.80	
7275.00	32.78	V	53.97	-21.19	Avg	223.00	222.80	
9700.00								Not in Restricted Band
9700.00								Done via Conducted
12125.00								No Emission
12125.00								Detected
14550.00								No Emission
14550.00								Detected
16975.00								No Emission
16975.00								Detected
19400.00								No Emission
19400.00								Detected
21825.00								No Emission
21825.00								Detected
24250.00								No Emission
24250.00								Detected


**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Low Channel**Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4850.00	55.78	V	73.97	-18.19	Peak	105.50	111.46	
4850.00	35.78	V	53.97	-18.19	Avg	105.50	111.46	
7275.00	51.70	V	73.97	-22.27	Peak	222.75	207.34	
7275.00	31.70	V	53.97	-22.27	Avg	222.75	207.34	
9700.00								Not in Restricted Band
9700.00								Done via Conducted
12125.00								No Emission
12125.00								Detected
14550.00								No Emission
14550.00								Detected
16975.00								No Emission
16975.00								Detected
19400.00								No Emission
19400.00								Detected
21825.00								No Emission
21825.00								Detected
24250.00								No Emission
24250.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Low Channel

Transmit Mode - X-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4850.00	55.42	H	73.97	-18.55	Peak	35.00	35.00	
4850.00	35.42	H	53.97	-18.55	Avg	35.00	126.20	
7275.00	50.63	H	73.97	-23.34	Peak	304.50	174.32	
7275.00	30.63	H	53.97	-23.34	Avg	304.50	174.32	
9700.00								Not in Restricted Band
9700.00								Done via Conducted
12125.00								No Emission
12125.00								Detected
14550.00								No Emission
14550.00								Detected
16975.00								No Emission
16975.00								Detected
19400.00								No Emission
19400.00								Detected
21825.00								No Emission
21825.00								Detected
24250.00								No Emission
24250.00								Detected



FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Low Channel

Transmit Mode - Y-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4850.00	52.90	H	73.97	-21.07	Peak	350.25	175.10	
4850.00	32.90	H	53.97	-21.07	Avg	350.25	175.10	
7275.00	52.02	H	73.97	-21.95	Peak	114.25	207.16	
7275.00	32.02	H	53.97	-21.95	Avg	114.25	207.16	
9700.00								Not in Restricted Band
9700.00								Done via Conducted
12125.00								No Emission
12125.00								Detected
14550.00								No Emission
14550.00								Detected
16975.00								No Emission
16975.00								Detected
19400.00								No Emission
19400.00								Detected
21825.00								No Emission
21825.00								Detected
24250.00								No Emission
24250.00								Detected


**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Low Channel**Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4850.00	46.55	H	73.97	-27.42	Peak	303.00	127.58	
4850.00	26.55	H	53.97	-27.42	Avg	303.00	127.58	
7275.00	49.85	H	73.97	-24.12	Peak	201.75	143.28	
7275.00	29.85	H	53.97	-24.12	Avg	201.75	143.28	
9700.00								Not in Restricted Band
9700.00								Done via Conducted
12125.00								No Emission
12125.00								Detected
14550.00								No Emission
14550.00								Detected
16975.00								No Emission
16975.00								Detected
19400.00								No Emission
19400.00								Detected
21825.00								No Emission
21825.00								Detected
24250.00								No Emission
24250.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044


**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Middle Channel**Transmit Mode - X-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4900.00	46.96	V	73.97	-27.01	Peak	82.75	111.46	
4900.00	26.96	V	53.97	-27.01	Avg	82.75	111.46	
7350.00	54.80	V	73.97	-19.17	Peak	244.25	146.44	
7350.00	34.80	V	53.97	-19.17	Avg	244.25	146.44	
9800.00								Not in Restricted Band
9800.00								Done via Conducted
12250.00								No Emission
12250.00								Detected
14700.00								No Emission
14700.00								Detected
17150.00								No Emission
17150.00								Detected
19600.00								No Emission
19600.00								Detected
22050.00								No Emission
22050.00								Detected
24500.00								No Emission
24500.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Middle Channel

Transmit Mode - Y-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4900.00	55.67	V	73.97	-18.30	Peak	35.50	127.52	
4900.00	35.67	V	53.97	-18.30	Avg	35.50	127.52	
7350.00	51.80	V	73.97	-22.17	Peak	54.00	191.34	
7350.00	31.80	V	53.97	-22.17	Avg	54.00	191.34	
9800.00								Not in Restricted Band
9800.00								Done via Conducted
12250.00								No Emission
12250.00								Detected
14700.00								No Emission
14700.00								Detected
17150.00								No Emission
17150.00								Detected
19600.00								No Emission
19600.00								Detected
22050.00								No Emission
22050.00								Detected
24500.00								No Emission
24500.00								Detected



FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Middle Channel

Transmit Mode - Z-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4900.00	56.94	V	73.97	-17.03	Peak	50.86	292.50	
4900.00	36.94	V	53.97	-17.03	Avg	50.86	292.50	
7350.00	51.02	V	73.97	-22.95	Peak	43.75	162.50	
7350.00	31.02	V	53.97	-22.95	Avg	43.75	162.50	
9800.00								Not in Restricted Band
9800.00								Done via Conducted
12250.00								No Emission
12250.00								Detected
14700.00								No Emission
14700.00								Detected
17150.00								No Emission
17150.00								Detected
19600.00								No Emission
19600.00								Detected
22050.00								No Emission
22050.00								Detected
24500.00								No Emission
24500.00								Detected


**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Middle Channel**Transmit Mode - X-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4900.00	53.46	H	73.97	-20.51	Peak	165.25	112.00	
4900.00	33.46	H	53.97	-20.51	Avg	165.25	112.00	
7350.00	50.97	H	73.97	-23.00	Peak	95.25	191.22	
7350.00	30.97	H	53.97	-23.00	Avg	95.25	191.22	
9800.00								Not in Restricted Band
9800.00								Done via Conducted
12250.00								No Emission
12250.00								Detected
14700.00								No Emission
14700.00								Detected
17150.00								No Emission
17150.00								Detected
19600.00								No Emission
19600.00								Detected
22050.00								No Emission
22050.00								Detected
24500.00								No Emission
24500.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Middle Channel

Transmit Mode - Y-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4900.00	54.17	H	73.97	-19.80	Peak	166.00	160.00	
4900.00	34.17	H	53.97	-19.80	Avg	166.00	160.00	
7350.00	50.62	H	73.97	-23.35	Peak	354.25	178.02	
7350.00	30.62	H	53.97	-23.35	Avg	354.25	178.02	
9800.00								Not in Restricted Band
9800.00								Done via Conducted
12250.00								No Emission
12250.00								Detected
14700.00								No Emission
14700.00								Detected
17150.00								No Emission
17150.00								Detected
19600.00								No Emission
19600.00								Detected
22050.00								No Emission
22050.00								Detected
24500.00								No Emission
24500.00								Detected

**FCC 15.247**

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - Middle Channel**Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4900.00	50.56	H	73.97	-23.41	Peak	320.50	239.16	
4900.00	30.56	H	53.97	-23.41	Avg	320.50	239.16	
7350.00	49.38	H	73.97	-24.59	Peak	30.00	111.46	
7350.00	29.38	H	53.97	-24.59	Avg	30.00	111.46	
9800.00								Not in Restricted Band
9800.00								Done via Conducted
12250.00								No Emission
12250.00								Detected
14700.00								No Emission
14700.00								Detected
17150.00								No Emission
17150.00								Detected
19600.00								No Emission
19600.00								Detected
22050.00								No Emission
22050.00								Detected
24500.00								No Emission
24500.00								Detected



FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - High Channel

Transmit Mode - X-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4950.00	44.01	V	73.97	-29.96	Peak	294.25	238.98	
4950.00	24.01	V	53.97	-29.96	Avg	294.25	238.98	
7425.00	48.16	V	73.97	-25.81	Peak	0.25	111.28	
7425.00	28.16	V	53.97	-25.81	Avg	0.25	111.28	
9900.00								Not in Restricted Band
9900.00								Done via Conducted
12375.00								No Emission
12375.00								Detected
14850.00								No Emission
14850.00								Detected
17325.00								No Emission
17325.00								Detected
19800.00								No Emission
19800.00								Detected
22275.00								No Emission
22275.00								Detected
24750.00								No Emission
24750.00								Detected


**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - High Channel**Transmit Mode - Y-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4950.00	55.56	V	73.97	-18.41	Peak	299.00	160.89	
4950.00	35.56	V	53.97	-18.41	Avg	299.00	160.89	
7425.00	53.87	V	73.97	-20.10	Peak	44.50	191.04	
7425.00	33.87	V	53.97	-20.10	Avg	44.50	191.04	
9900.00								Not in Restricted Band
9900.00								Done via Conducted
12375.00								No Emission
12375.00								Detected
14850.00								No Emission
14850.00								Detected
17325.00								No Emission
17325.00								Detected
19800.00								No Emission
19800.00								Detected
22275.00								No Emission
22275.00								Detected
24750.00								No Emission
24750.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - High Channel

Transmit Mode - Z-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4950.00	53.47	V	73.97	-20.50	Peak	301.25	174.14	
4950.00	33.47	V	53.97	-20.50	Avg	301.25	174.14	
7425.00	47.50	V	73.97	-26.47	Peak	40.75	102.80	
7425.00	27.50	V	53.97	-26.47	Avg	40.75	102.80	
9900.00								Not in Restricted Band
9900.00								Done via Conducted
12375.00								No Emission
12375.00								Detected
14850.00								No Emission
14850.00								Detected
17325.00								No Emission
17325.00								Detected
19800.00								No Emission
19800.00								Detected
22275.00								No Emission
22275.00								Detected
24750.00								No Emission
24750.00								Detected


**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - High Channel**Transmit Mode - X-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4950.00	52.90	H	73.97	-21.07	Peak	163.75	128.11	
4950.00	32.90	H	53.97	-21.07	Avg	163.75	128.11	
7425.00	53.37	H	73.97	-20.60	Peak	282.25	126.02	
7425.00	33.37	H	53.97	-20.60	Avg	282.25	126.02	
9900.00								Not in Restricted Band
9900.00								Done via Conducted
12375.00								No Emission
12375.00								Detected
14850.00								No Emission
14850.00								Detected
17325.00								No Emission
17325.00								Detected
19800.00								No Emission
19800.00								Detected
22275.00								No Emission
22275.00								Detected
24750.00								No Emission
24750.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - High Channel

Transmit Mode - Y-Axis

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4950.00	51.52	H	73.97	-22.45	Peak	178.50	142.56	
4950.00	31.52	H	53.97	-22.45	Avg	178.50	142.56	
7425.00	50.36	H	73.97	-23.61	Peak	359.25	191.46	
7425.00	30.36	H	53.97	-23.61	Avg	359.25	191.46	
9900.00								Not in Restricted Band
9900.00								Done via Conducted
12375.00								No Emission
12375.00								Detected
14850.00								No Emission
14850.00								Detected
17325.00								No Emission
17325.00								Detected
19800.00								No Emission
19800.00								Detected
22275.00								No Emission
22275.00								Detected
24750.00								No Emission
24750.00								Detected


**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Harmonics - High Channel**Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
4950.00	47.63	H	73.97	-26.34	Peak	121.25	127.52	
4950.00	27.63	H	53.97	-26.34	Avg	121.25	127.52	
7425.00	51.52	H	73.97	-22.45	Peak	110.00	127.28	
7425.00	31.52	H	53.97	-22.45	Avg	110.00	127.28	
9900.00								Not in Restricted Band
9900.00								Done via Conducted
12375.00								No Emission
12375.00								Detected
14850.00								No Emission
14850.00								Detected
17325.00								No Emission
17325.00								Detected
19800.00								No Emission
19800.00								Detected
22275.00								No Emission
22275.00								Detected
24750.00								No Emission
24750.00								Detected

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



FCC 15.247

Universal Electronics, Inc.
Pulse RF4CE UE878J Conversion 2021
P/N: R32068BD00-00001

Date: 04/11/2022

Lab: D

Tested By: Kyle Fujimoto

Non Harmonic Emissions from the Tx and Digital Portion - 9 kHz to 30 MHz

Non Harmonic Emissions from the Tx and Digital Portion - 1 GHz to 25 GHz

[illegible]

**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

Title: Pre-Scan - FCC Class B

File: 1 - RS - Pre-Scan - Tx Mode - FCC Class B.set

Operator: Kye Fujimoto

EUT Type: Pulse RF4CE UE878J Conversion 2021

EUT Condition: The EUT is continuously transmitting at the low channel (Worst Case)

Company: Universal Electronics, Inc.


P/N: R32068BD00-00001

S/N: N/A

4/13/2022 2:39:52 PM
Sequence: Preliminary Scan

FCC Class B

Electric Field Strength (dBuV/m)

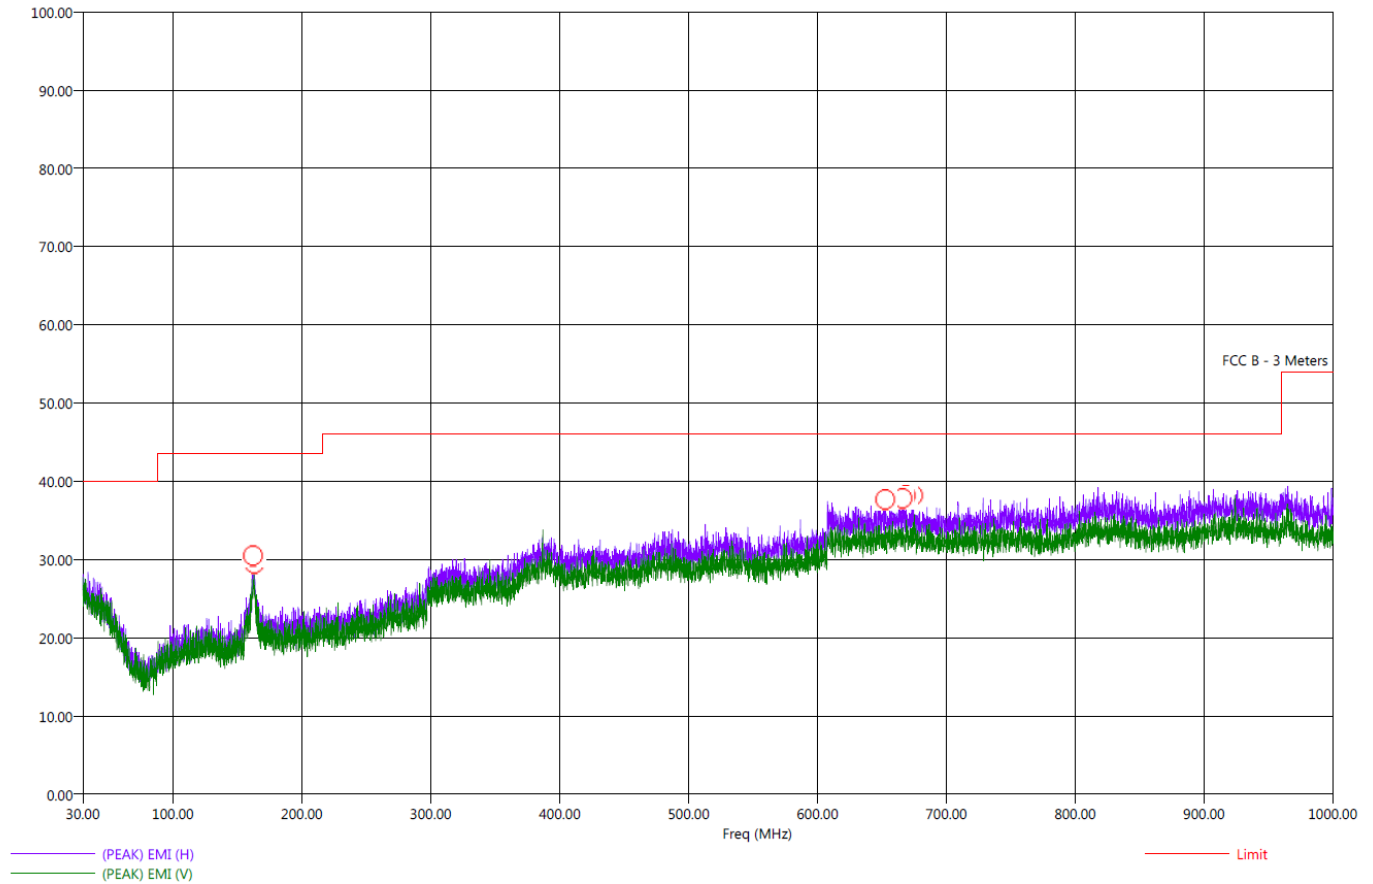

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



Title: Radiated Final - FCC Class B
File: 1 - RS - Final Scan - Tx Mode - FCC Class B.set
Operator: Kyle Fujimoto
EUT Type: Pulse RF4CE UE878J Conversion 2021
EUT Condition: The EUT is continuously transmitting at the low channel (Worst Case)
Company: Universal Electronics, Inc.
P/N: R32068BD00-00001
S/N: N/A

4/13/2022 2:48:19 PM
Sequence: Final Measurements

FCC Class B

Freq (MHz)	Pol	(PEAK) EMI (dBμV/m)	(QP) EMI (dBμV/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dBμV/m)	Transducer (dB)	Cable (dB)	Ttbl Aql (deq)	Twr Ht (cm)
162.10	H	31.11	26.43	-12.39	-17.07	43.50	22.99	1.07	340.00	334.26
163.10	H	30.15	24.89	-13.35	-18.61	43.50	21.49	1.07	338.50	270.44
652.60	H	38.02	32.28	-7.98	-13.72	46.00	25.36	2.13	0.00	350.68
666.10	H	37.70	32.67	-8.30	-13.33	46.00	25.90	2.16	335.00	334.98
668.70	H	38.14	32.58	-7.86	-13.42	46.00	25.80	2.16	159.00	160.11
674.40	H	37.84	32.44	-8.16	-13.56	46.00	25.70	2.17	198.25	317.61





***BAND EDGES
DATA SHEETS***



FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/12/2022

Lab: D

Tested By: Kyle Fujimoto

Band Edges

[illegible]



FCC 15.247

Universal Electronics, Inc.

Pulse RF4CE UE878J Conversion 2021

P/N: R32068BD00-00001

Date: 04/12/2022

Lab: D

Tested By: Kyle Fujimoto

Band Edges

[illegible]




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

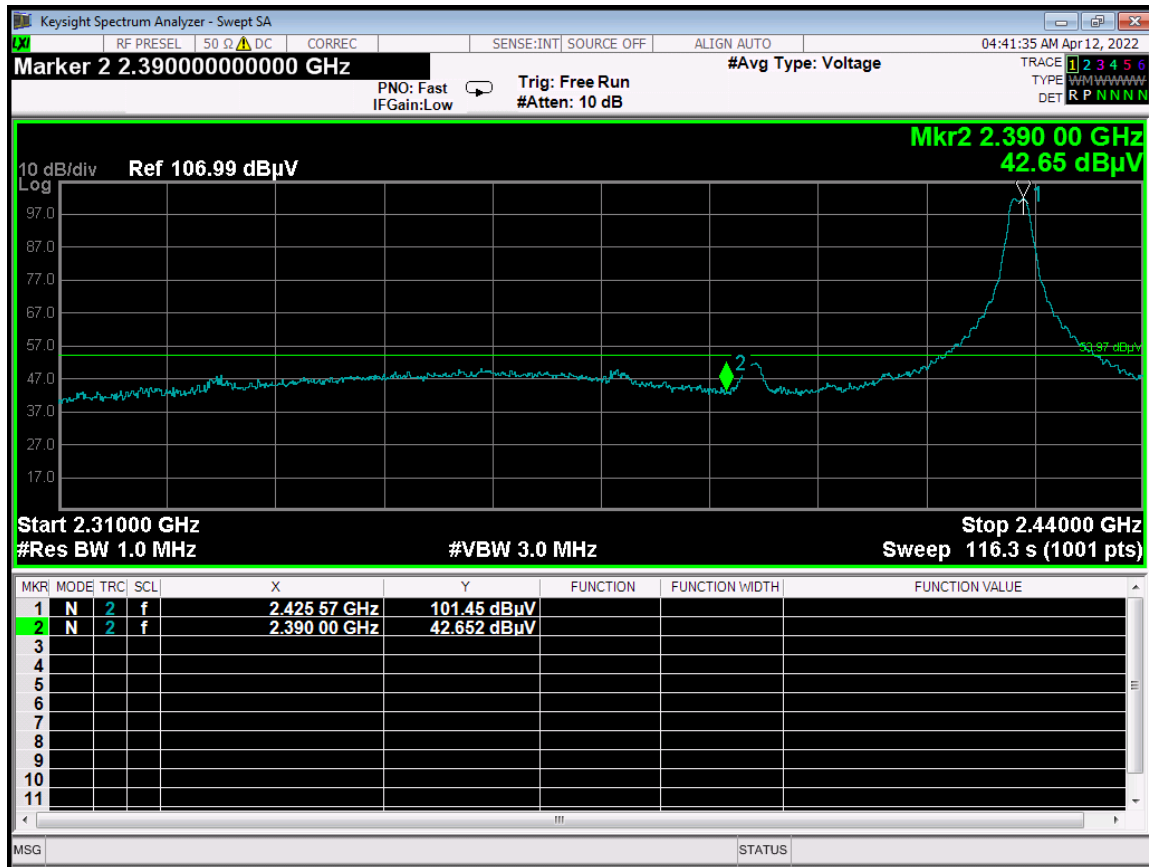

BE - 2425 MHz - Horizontal - X-Axis - Worst Case

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

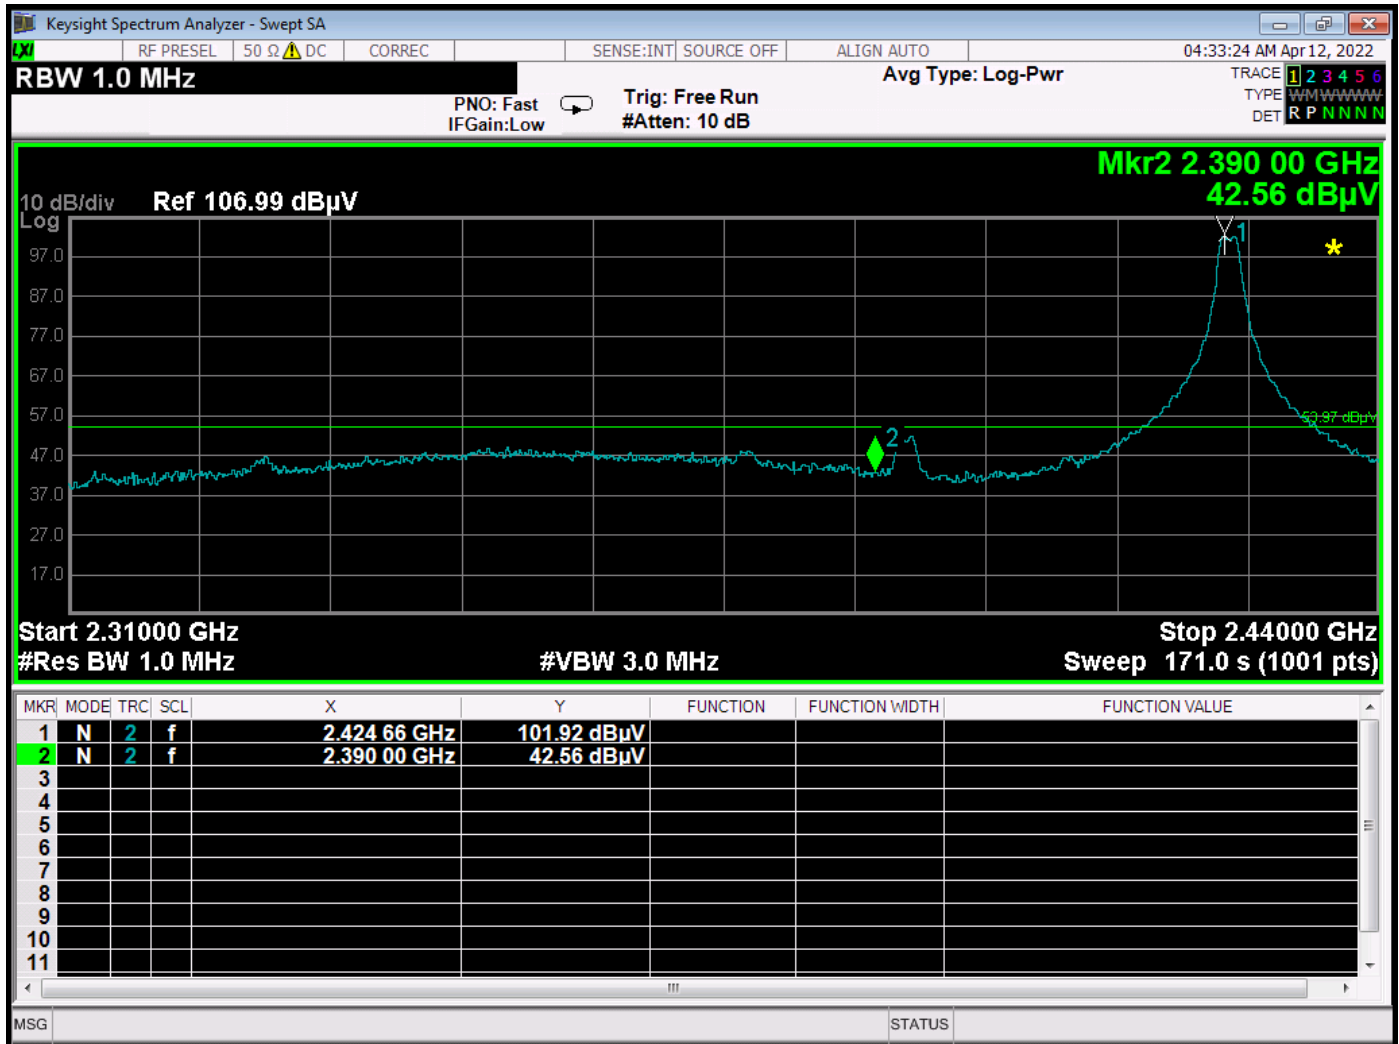

BE - 2425 MHz - Vertical - Z-Axis - Worst Case

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

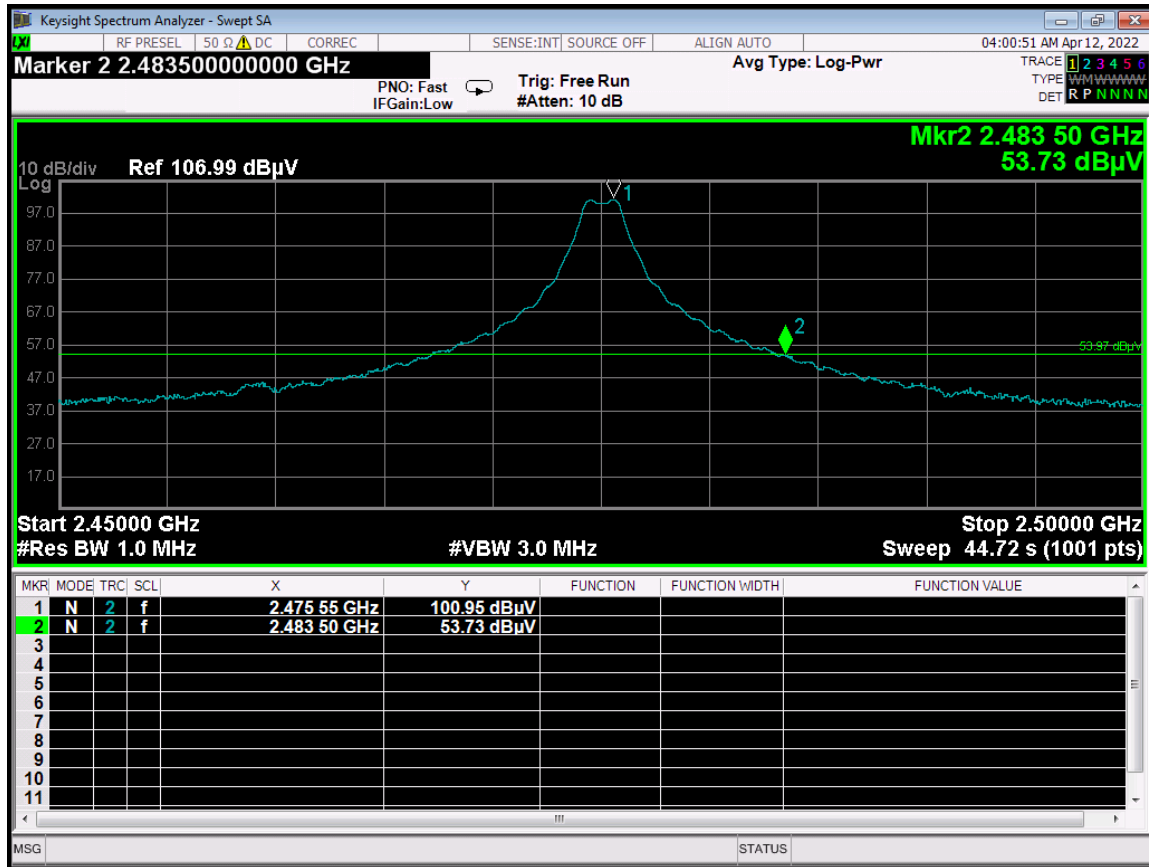

BE - 2475 MHz - Horizontal - X-Axis - Worst Case

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

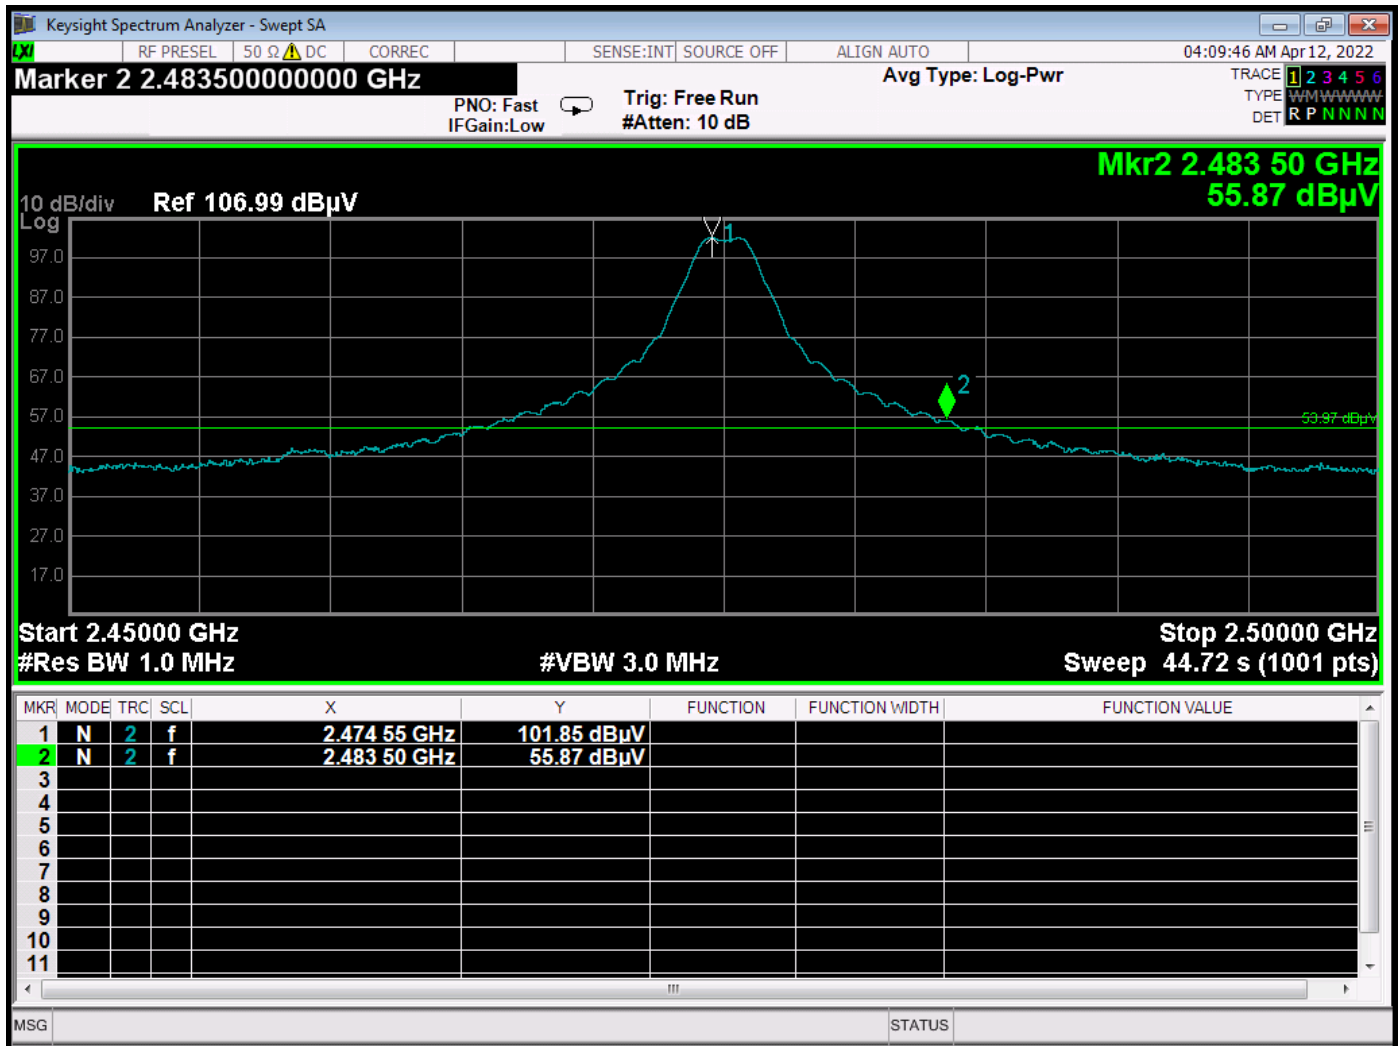

BE - 2475 MHz - Vertical - Z-Axis - Worst Case

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



***DTS BANDWIDTH
DATA SHEETS***




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

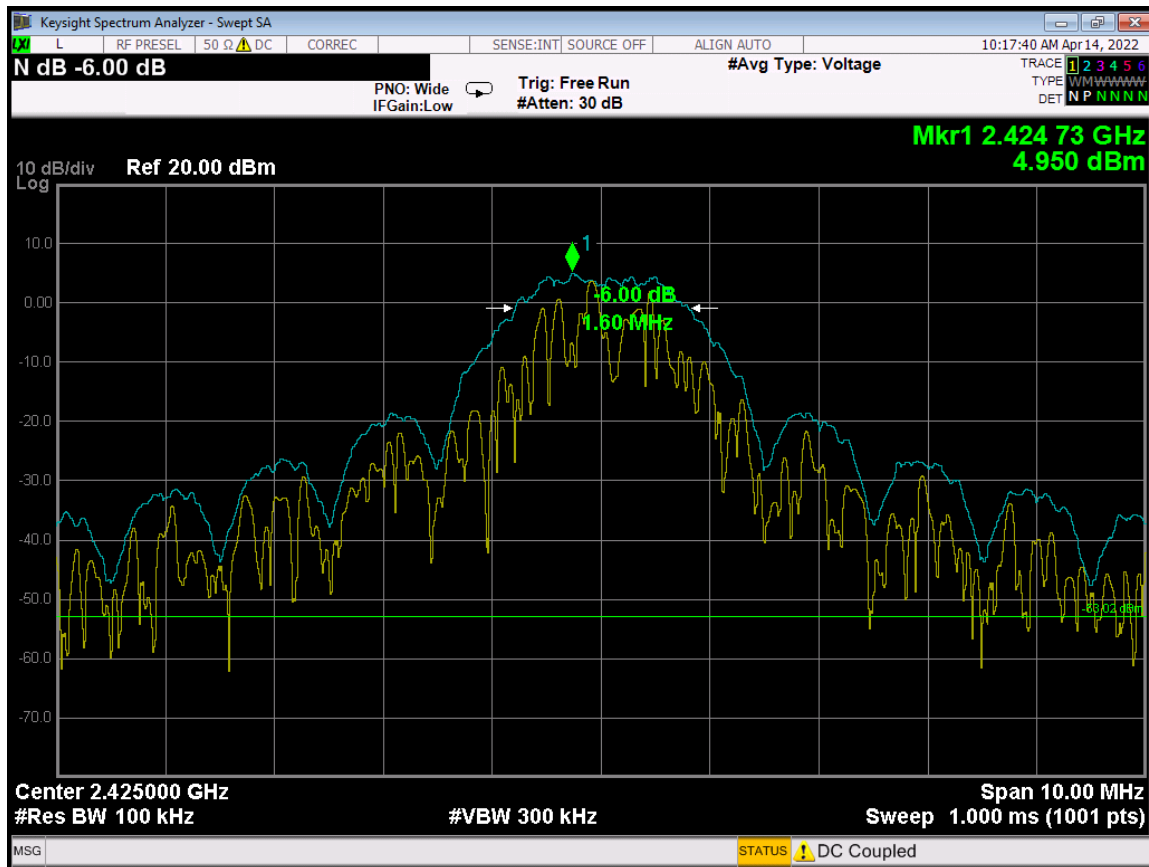

Bandwidth 6 dB - 2425 MHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

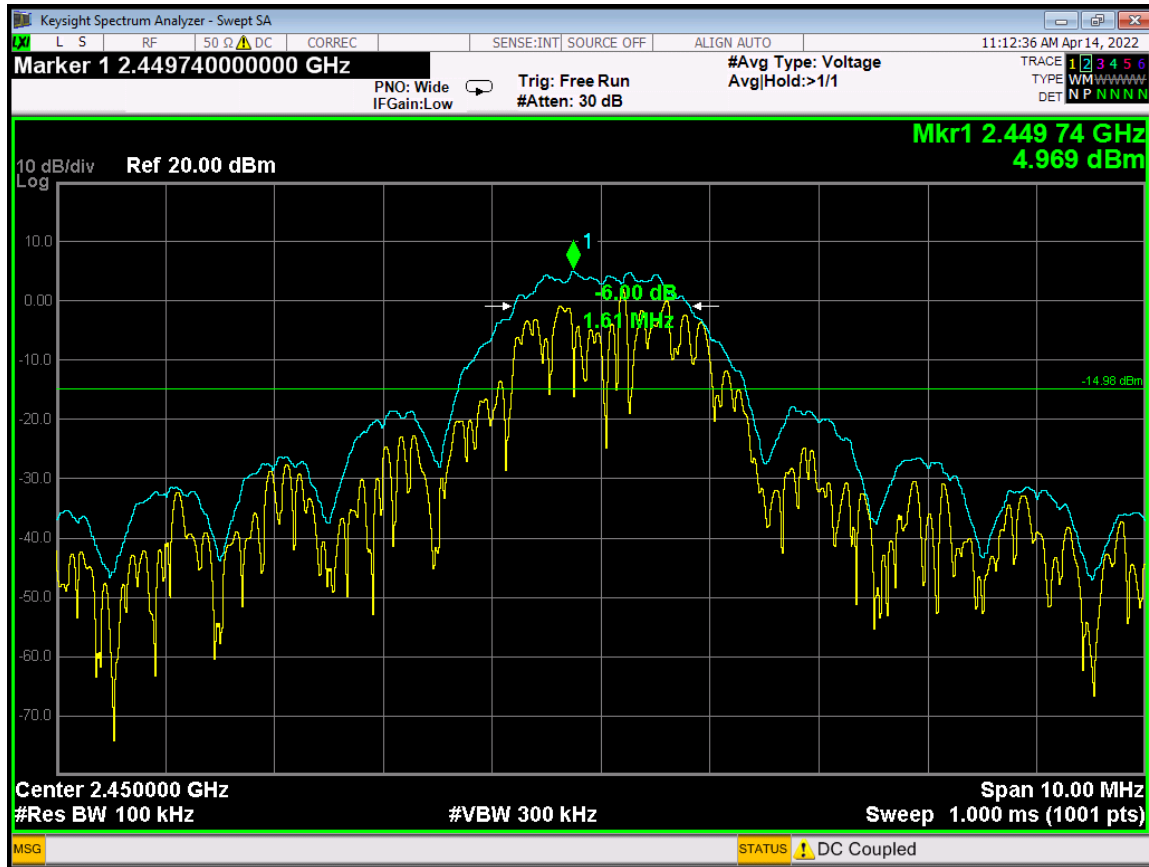

Bandwidth 6 dB - 2450 MHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

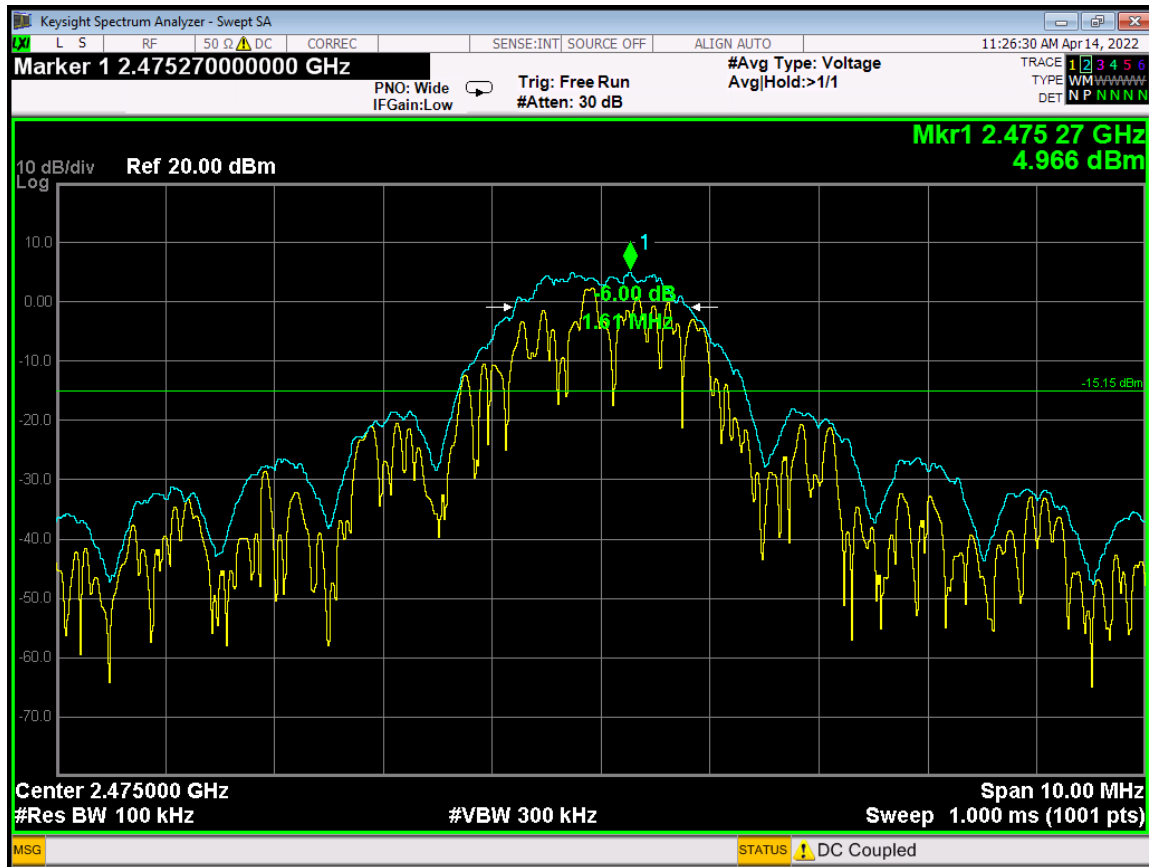

Bandwidth 6 dB - 2475 MHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



***PEAK OUTPUT POWER
DATA SHEETS***




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

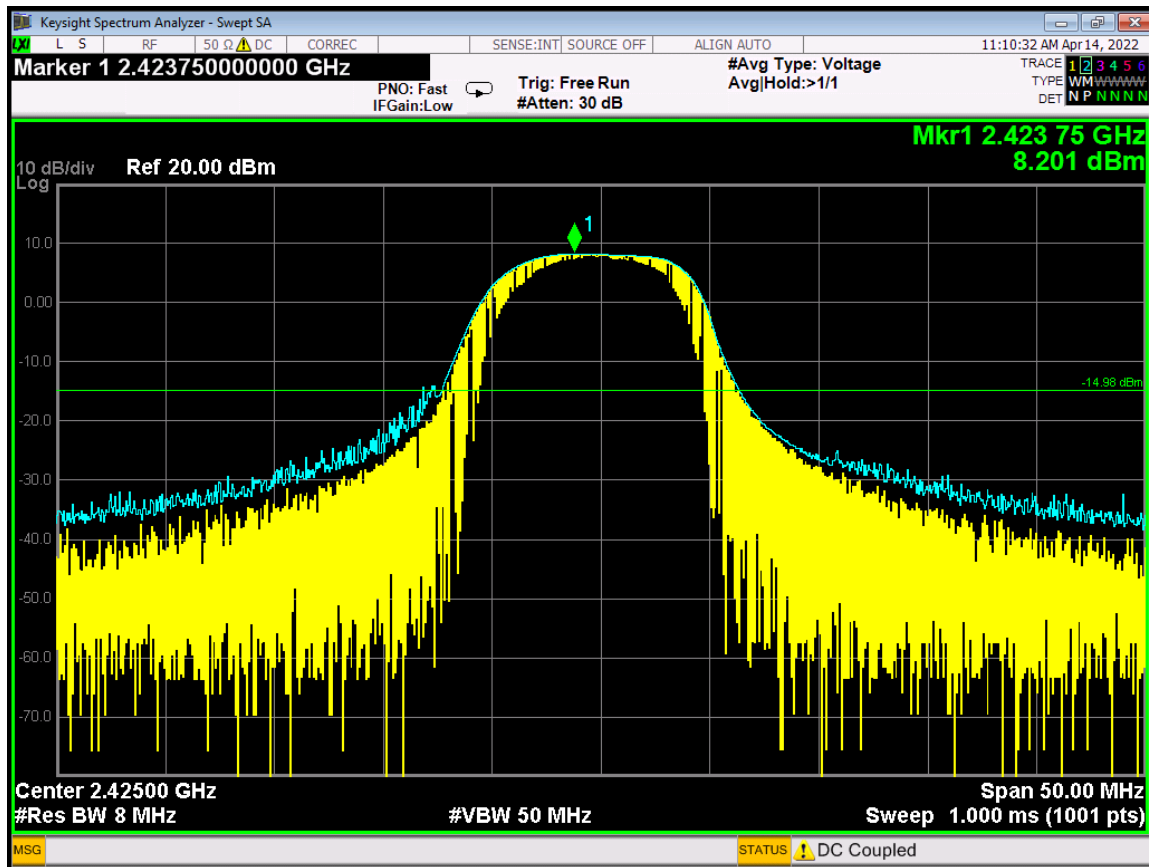


Peak Power Output - 2425 MHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044

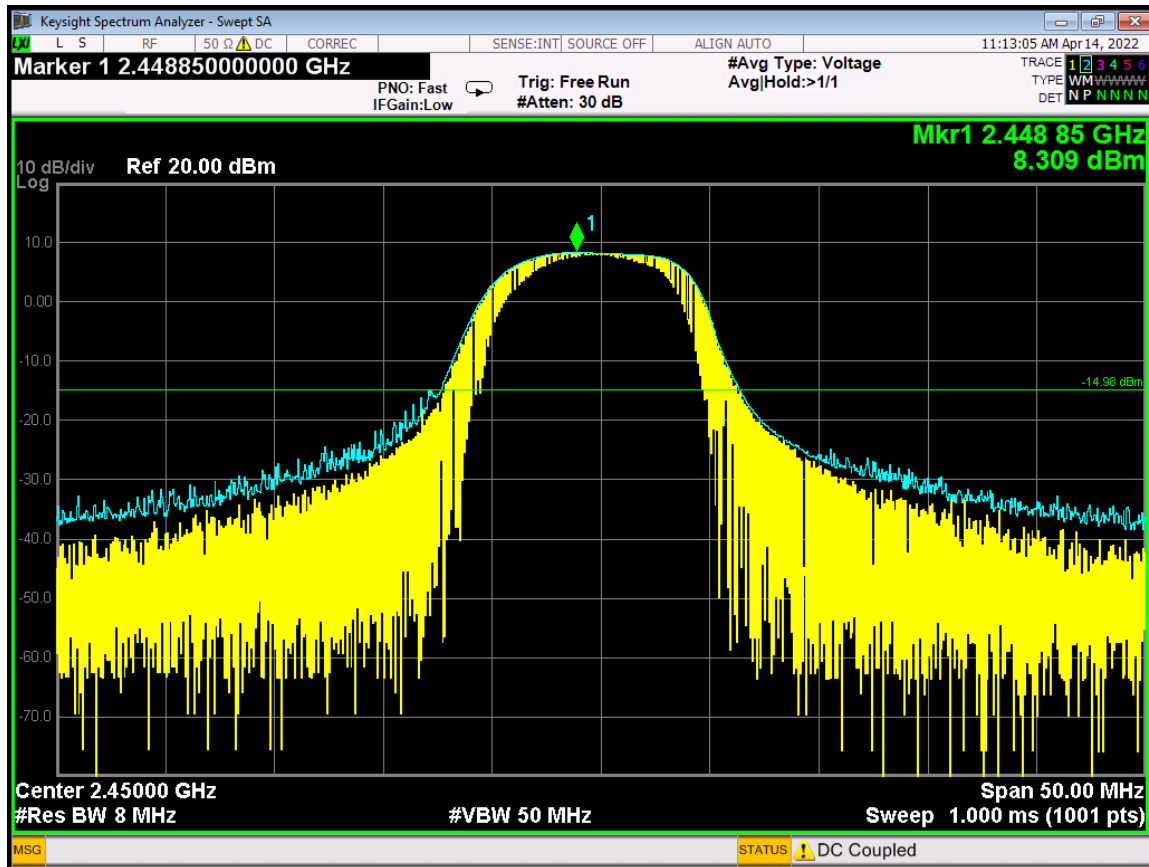


Peak Power Output - 2450 MHz

**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

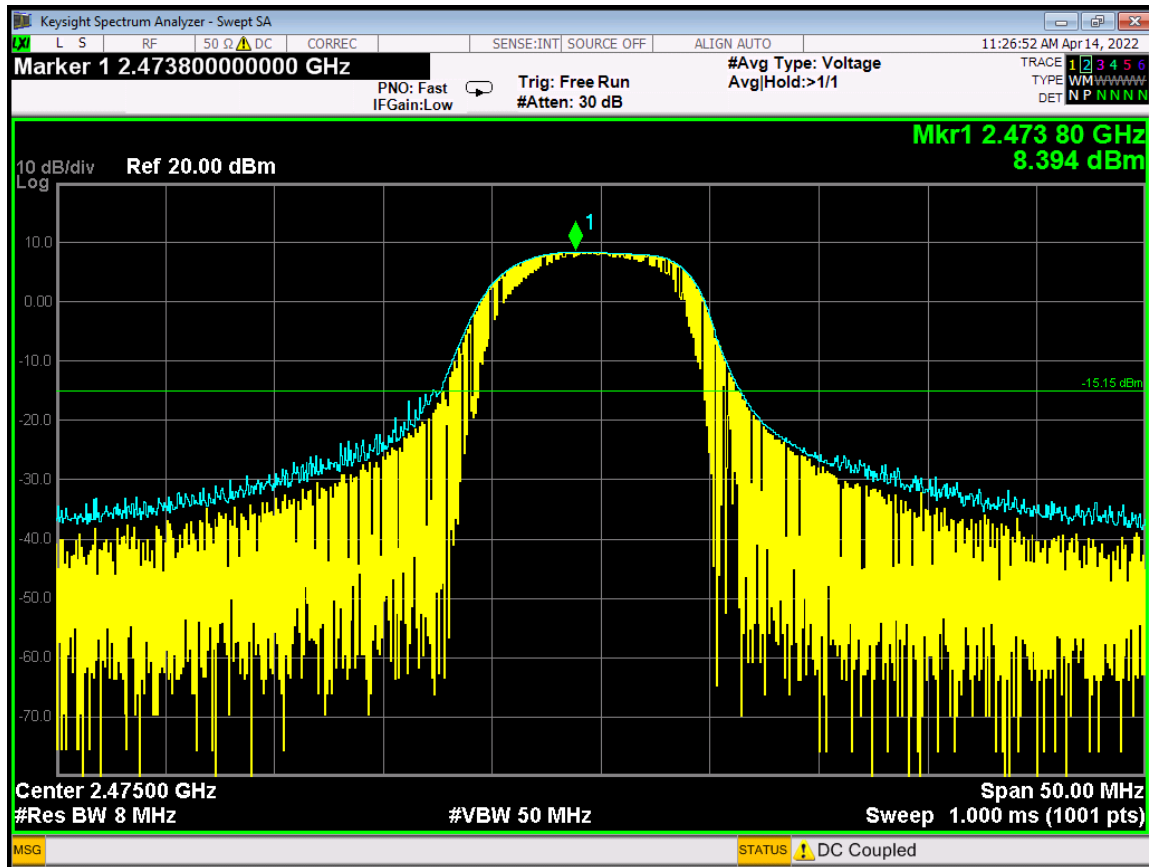

Peak Power Output - 2475 MHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



***SPECTRAL DENSITY OUTPUT
DATA SHEETS***




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

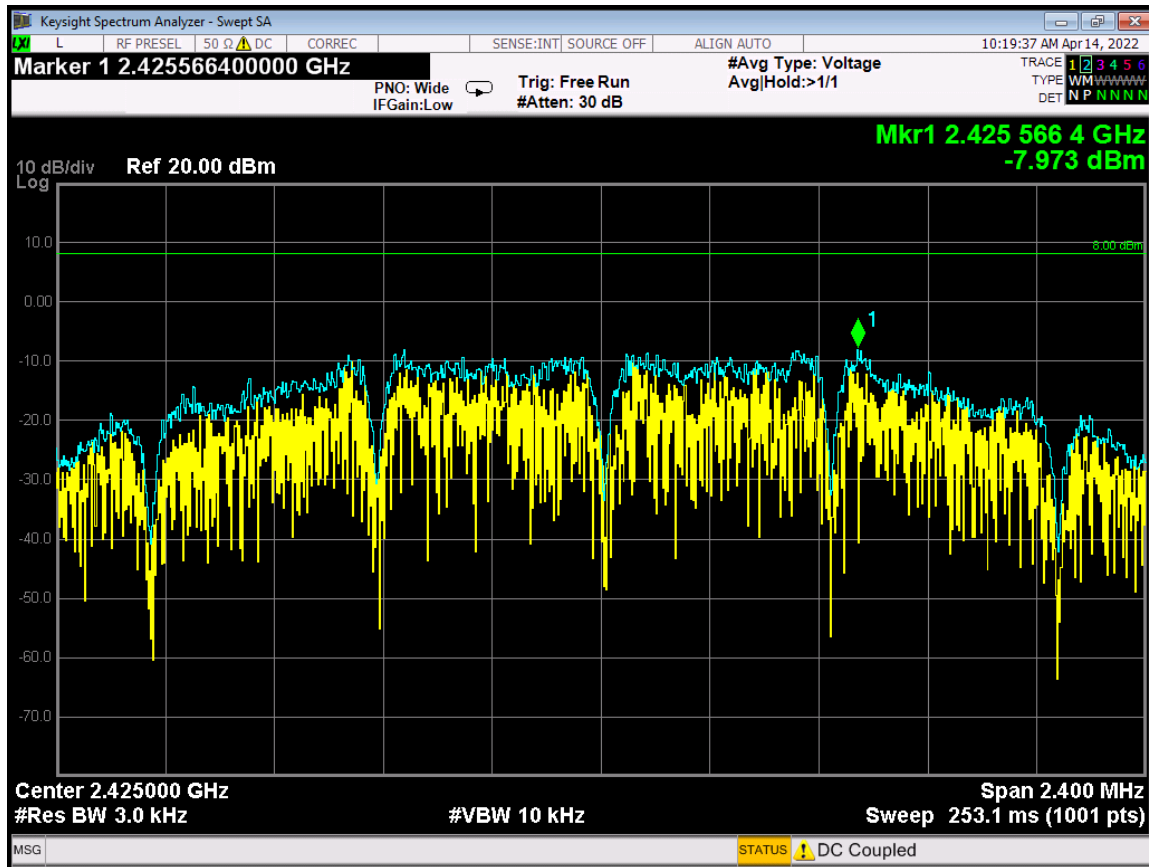

Special Density Output - 2425 MHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

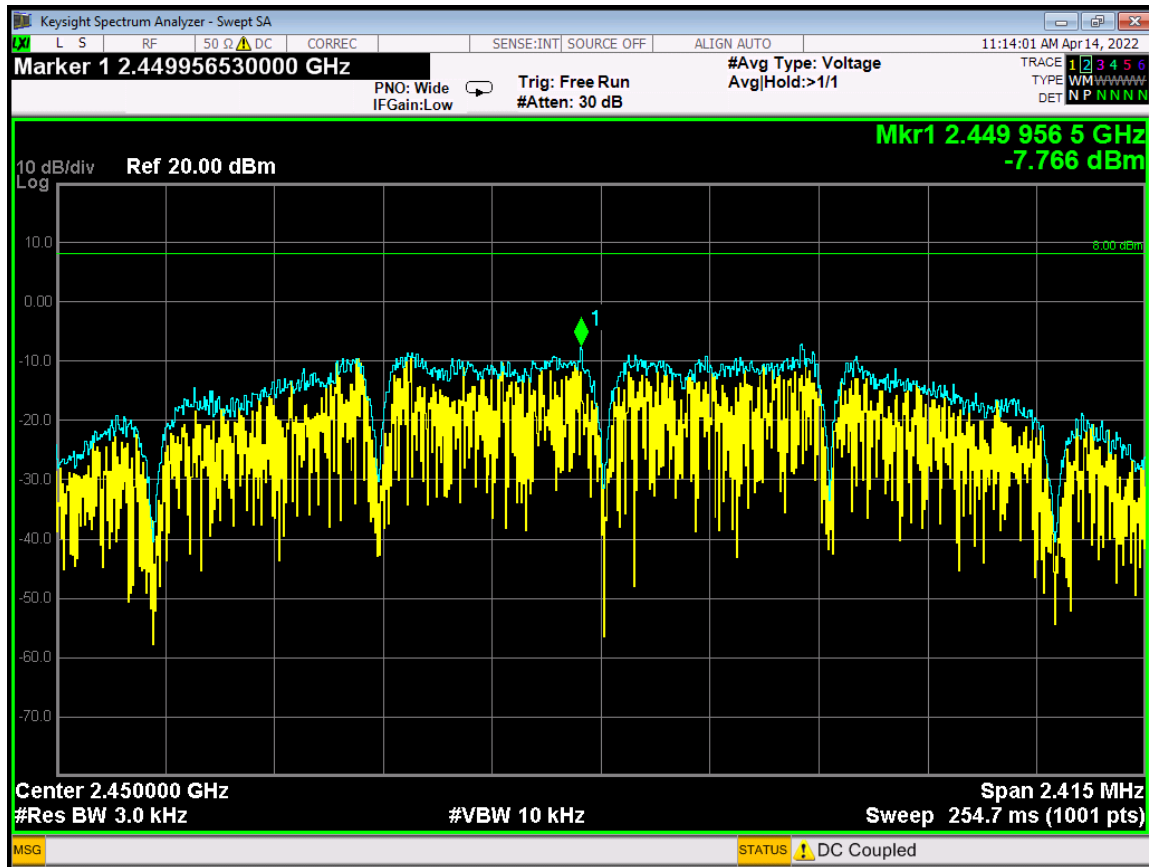

Special Density Output - 2450 MHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

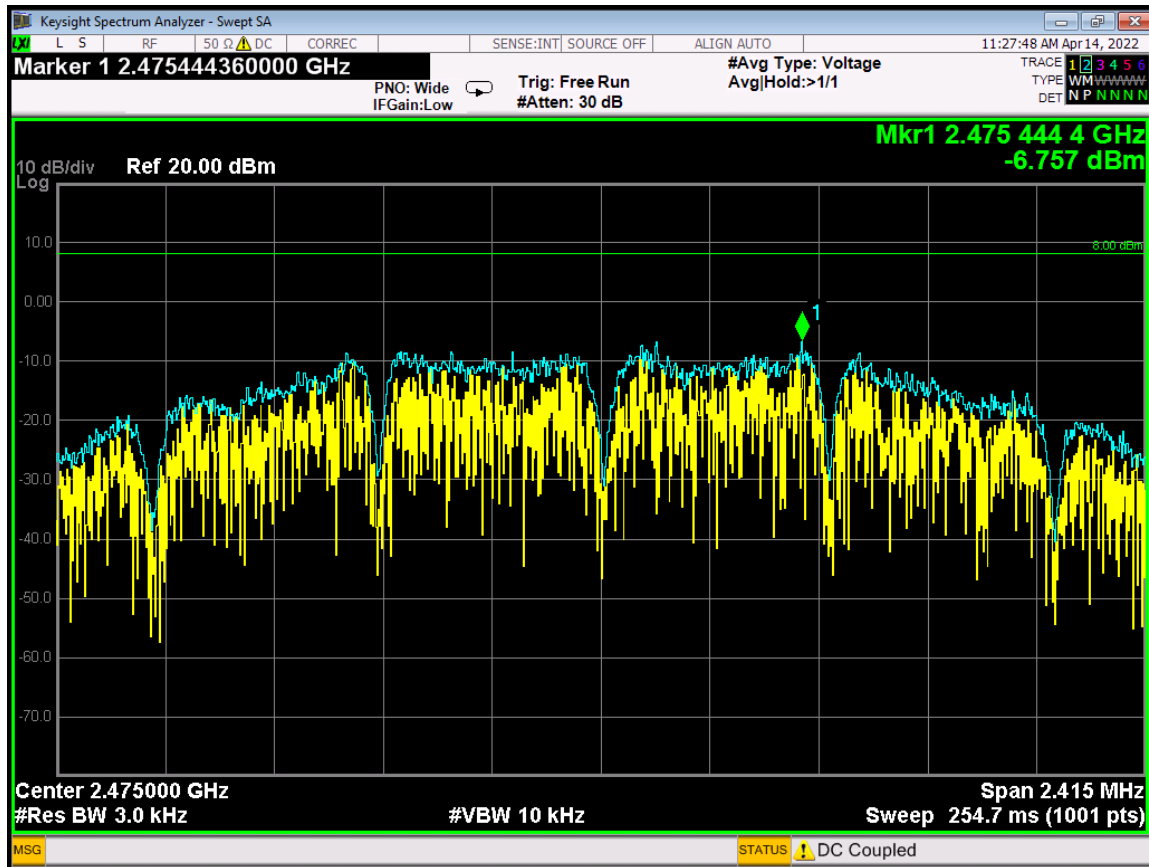

Special Density Output - 2475 MHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



**99% BANDWIDTH
DATA SHEETS**




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

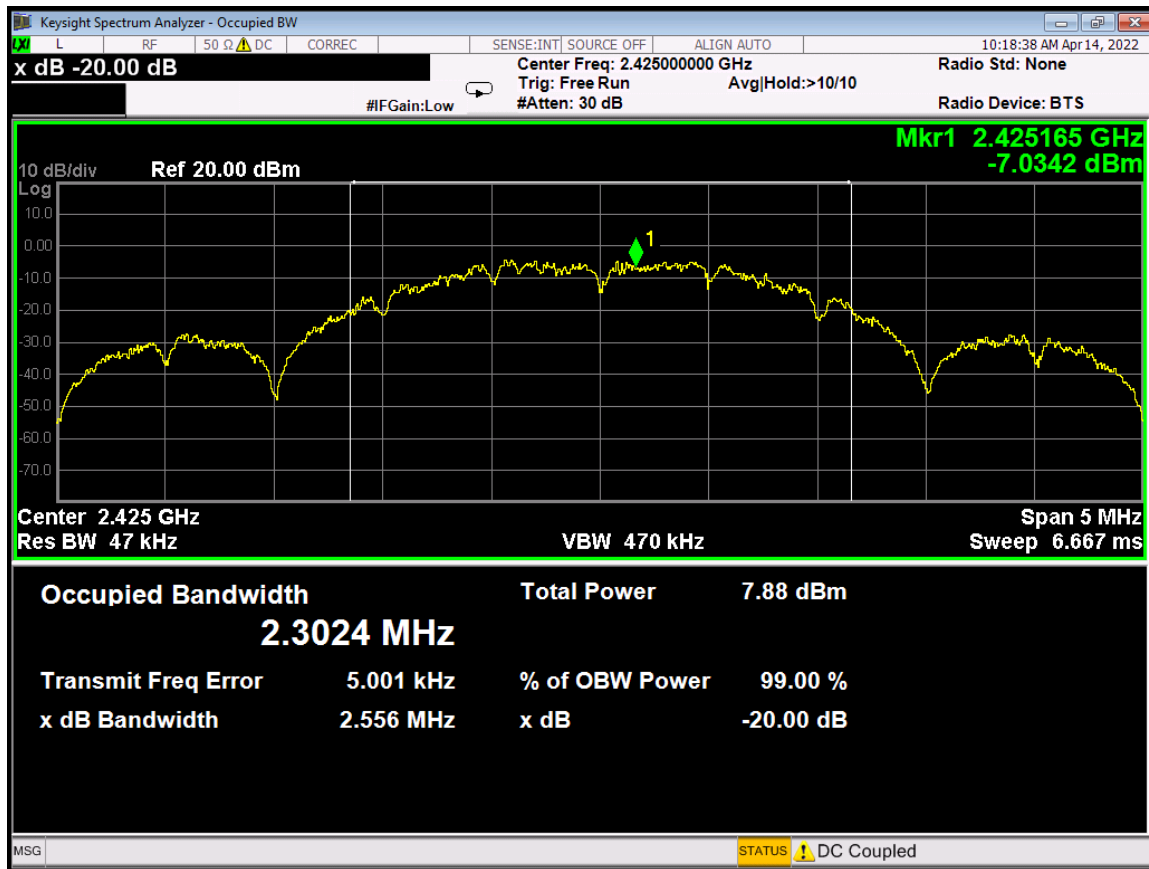

99% Bandwidth - 2425 MHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

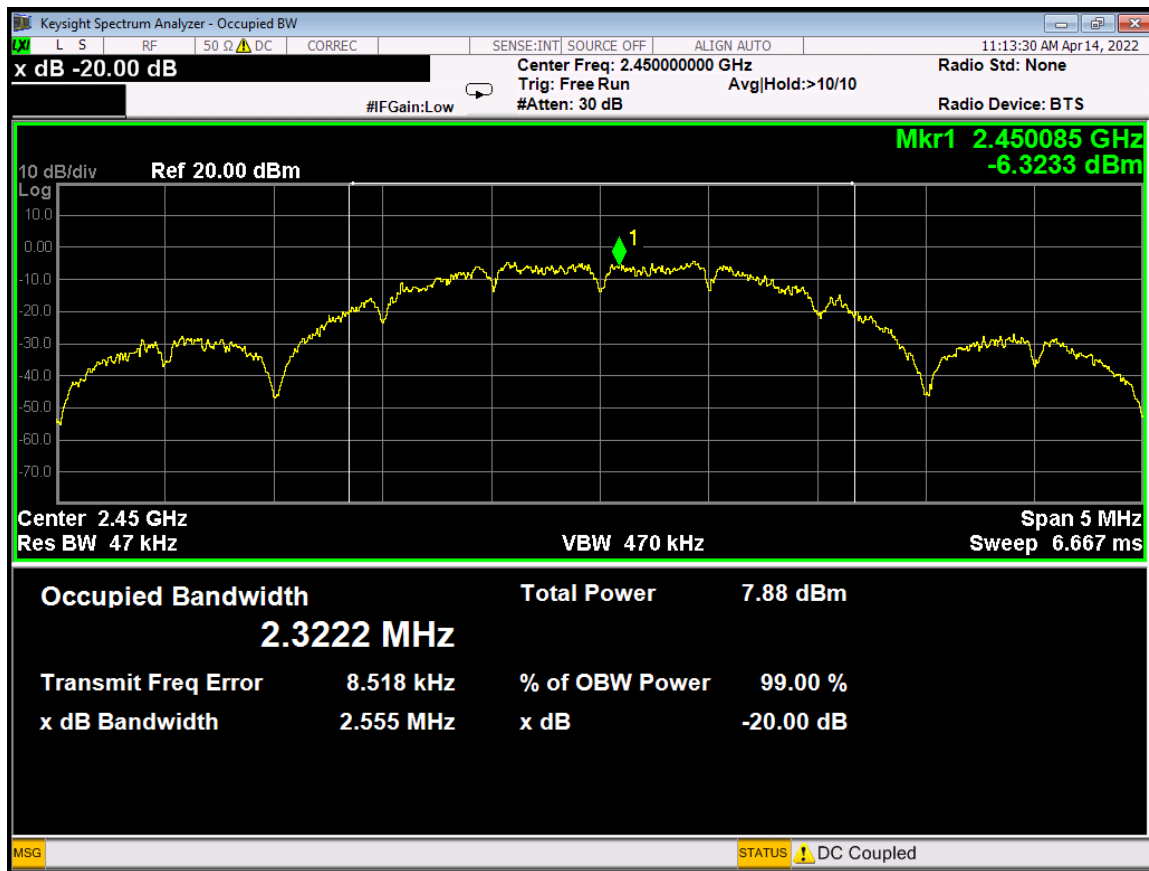

99% Bandwidth - 2450 MHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

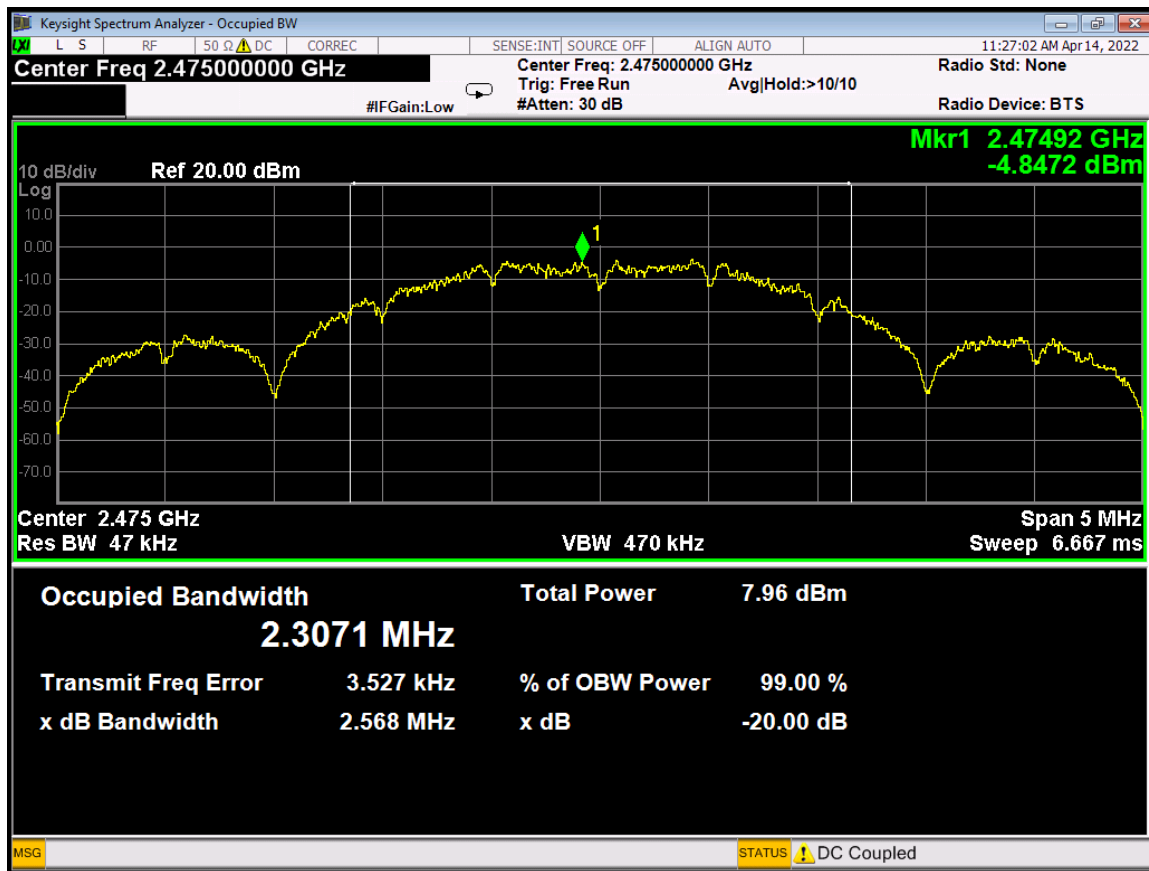

99% Bandwidth - 2475 MHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



***RF ANTENNA CONDUCTED
DATA SHEETS***




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

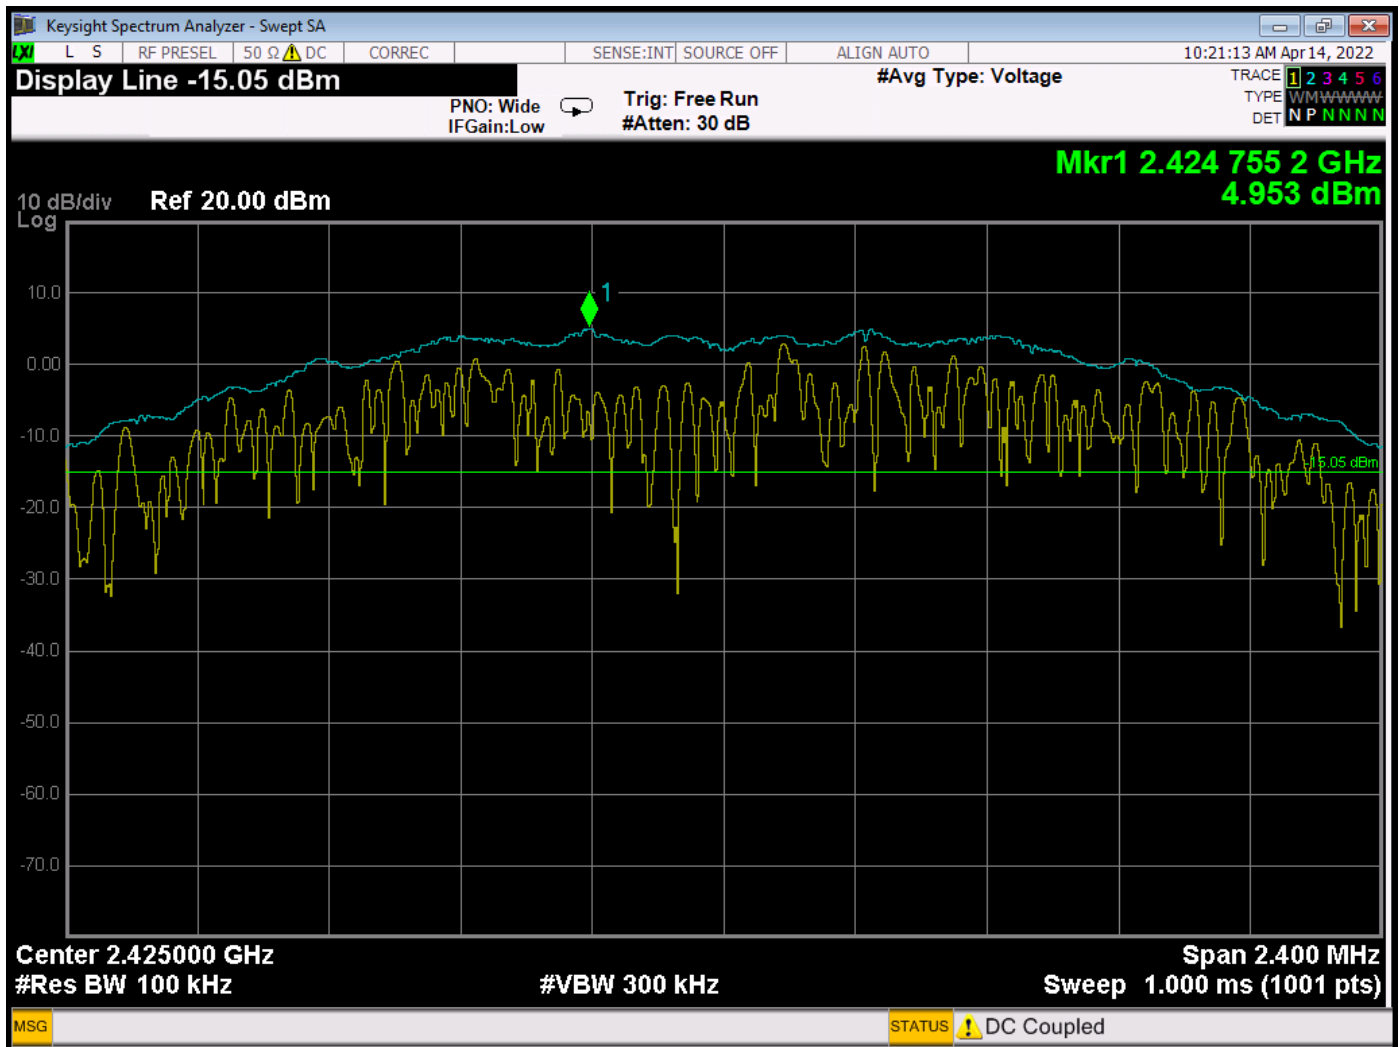

RF Antenna Conducted Test – Low Channel – Reference Level

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

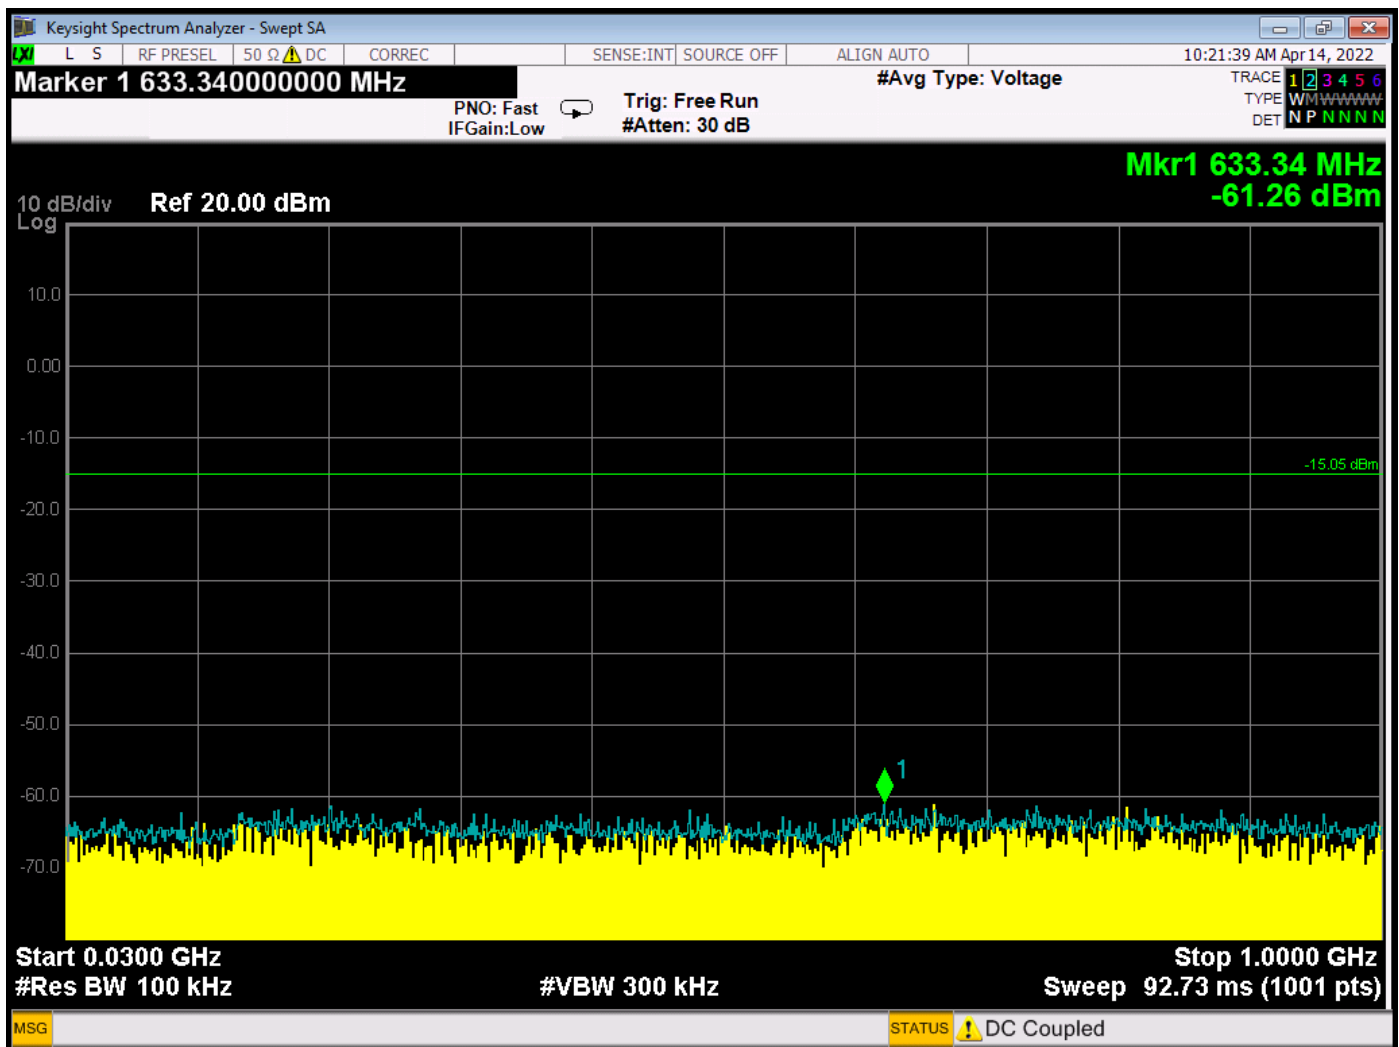

RF Antenna Conducted Test – Low Channel – 30 MHz to 1 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

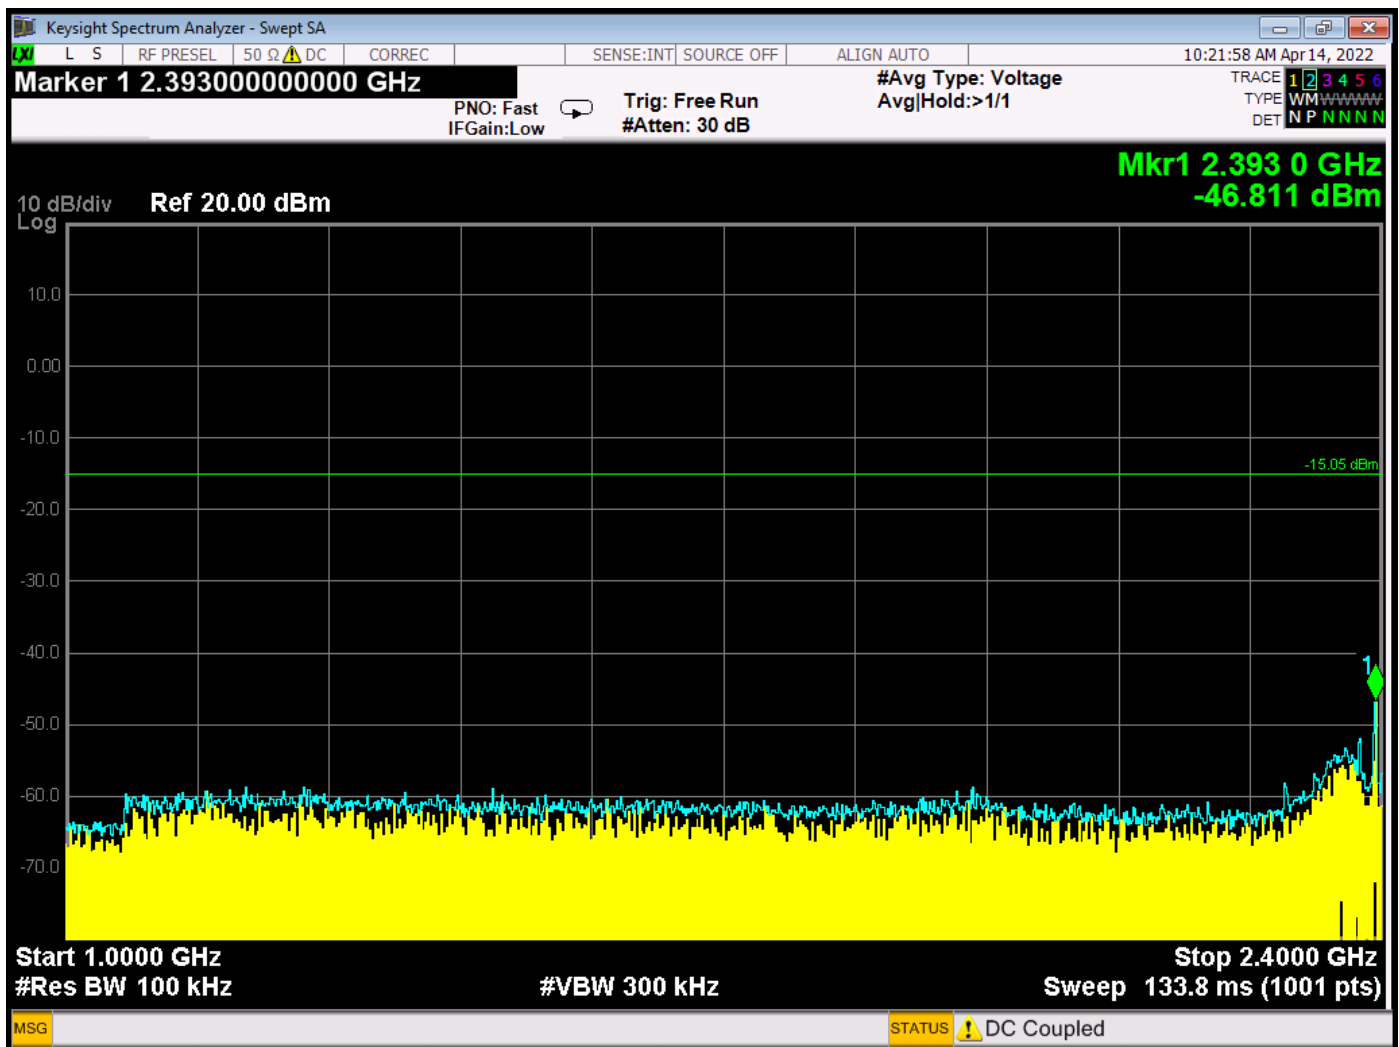

RF Antenna Conducted Test – Low Channel – 1 GHz to 2.4 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

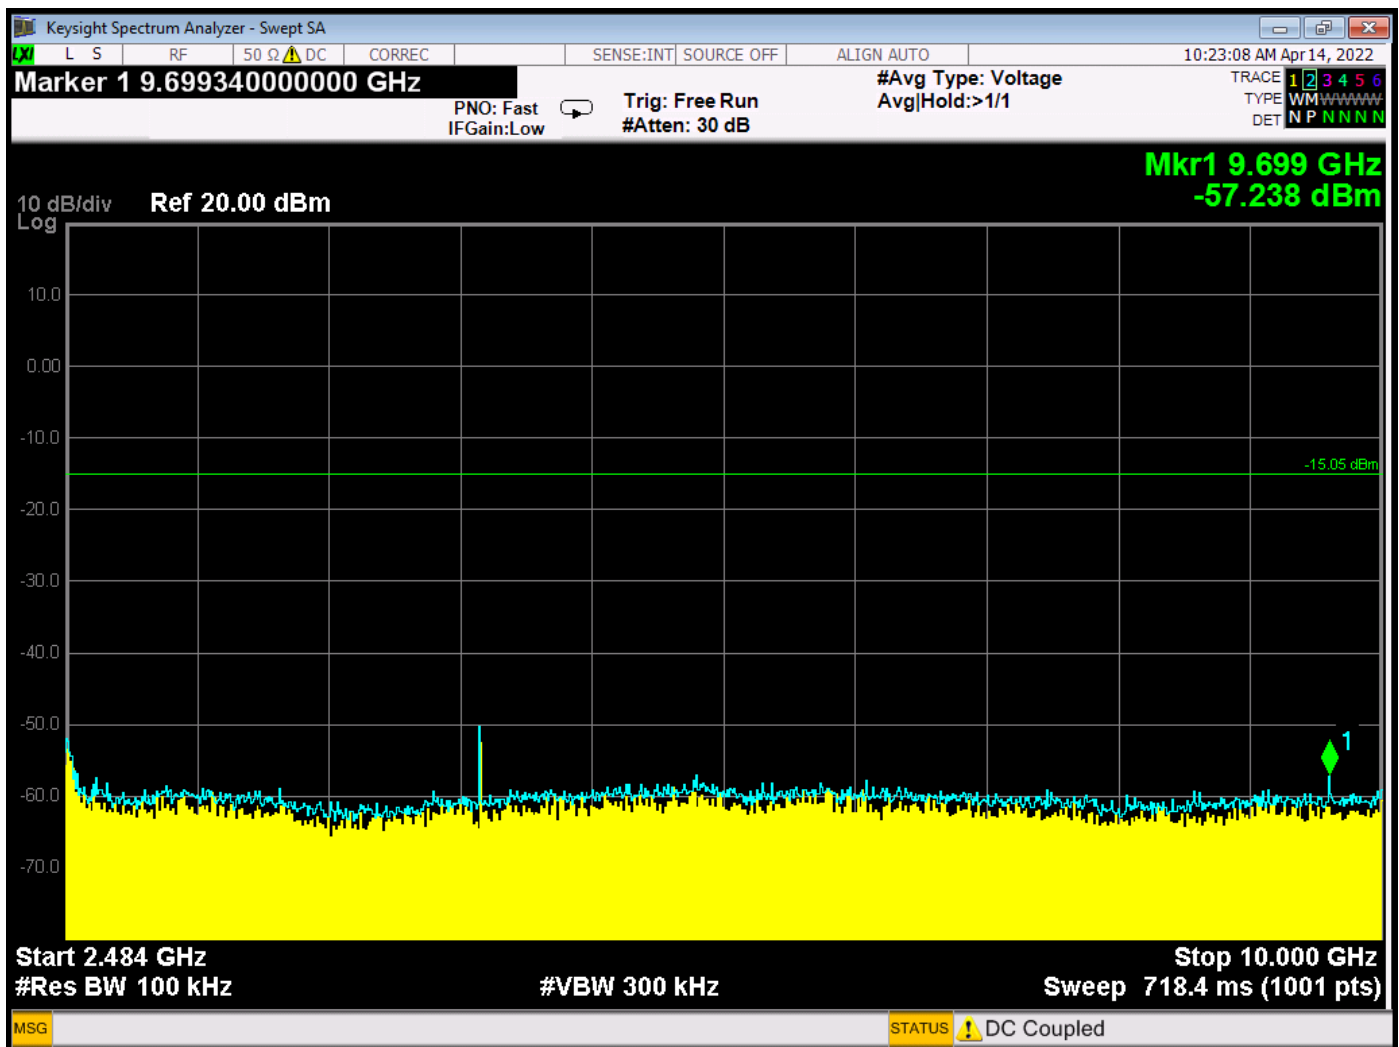

RF Antenna Conducted Test – Low Channel – 2483.5 MHz to 10 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

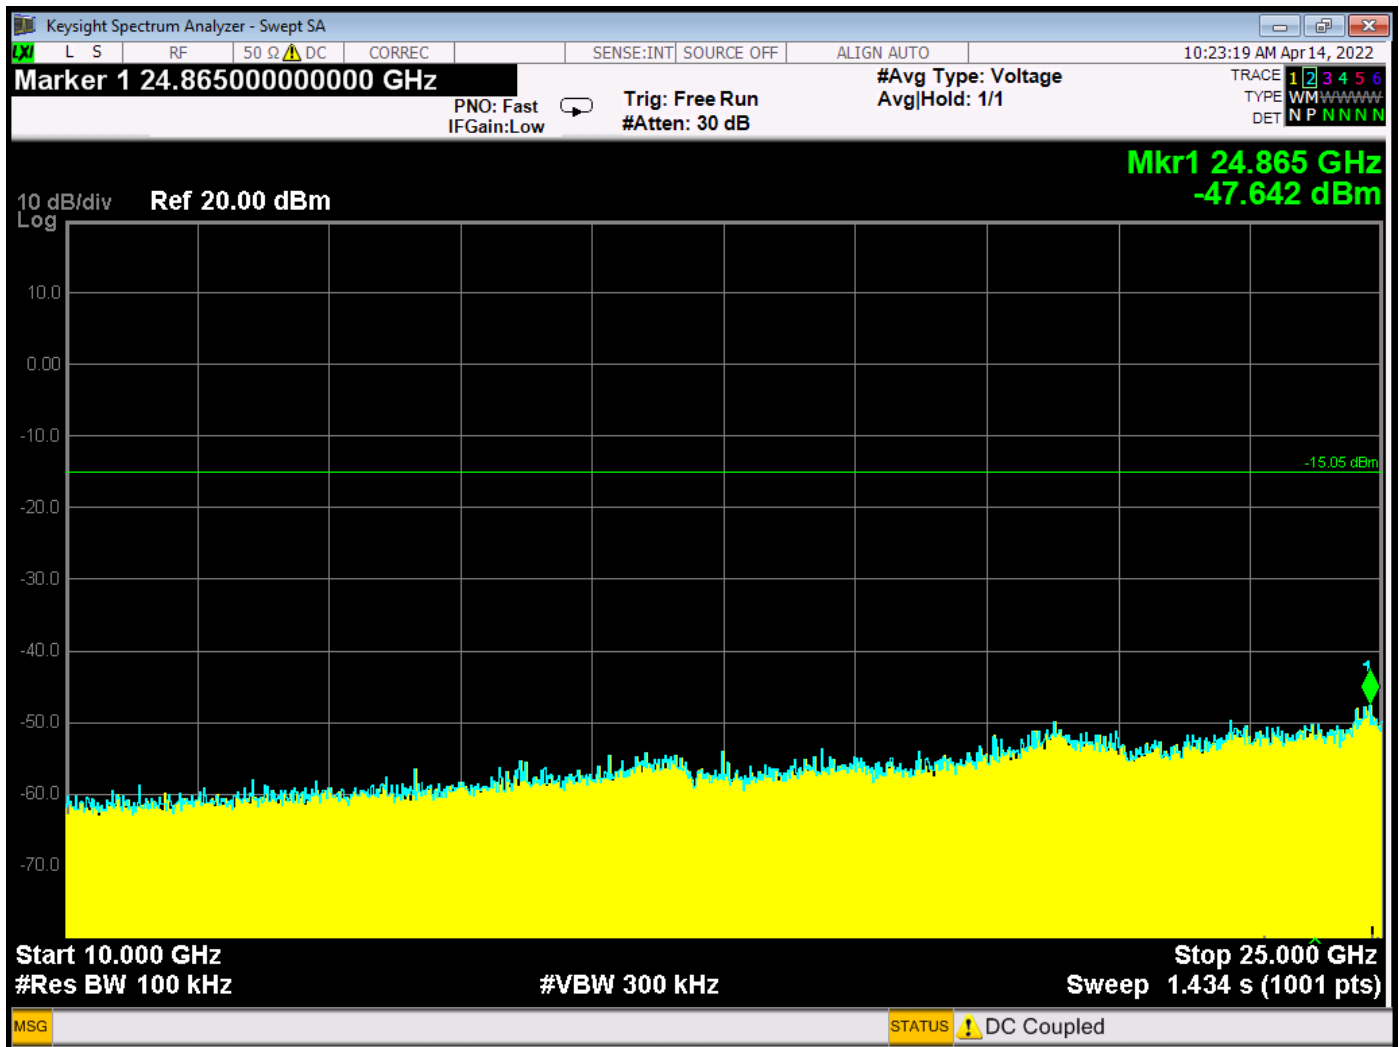

RF Antenna Conducted Test – Low Channel – 10 GHz to 25 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

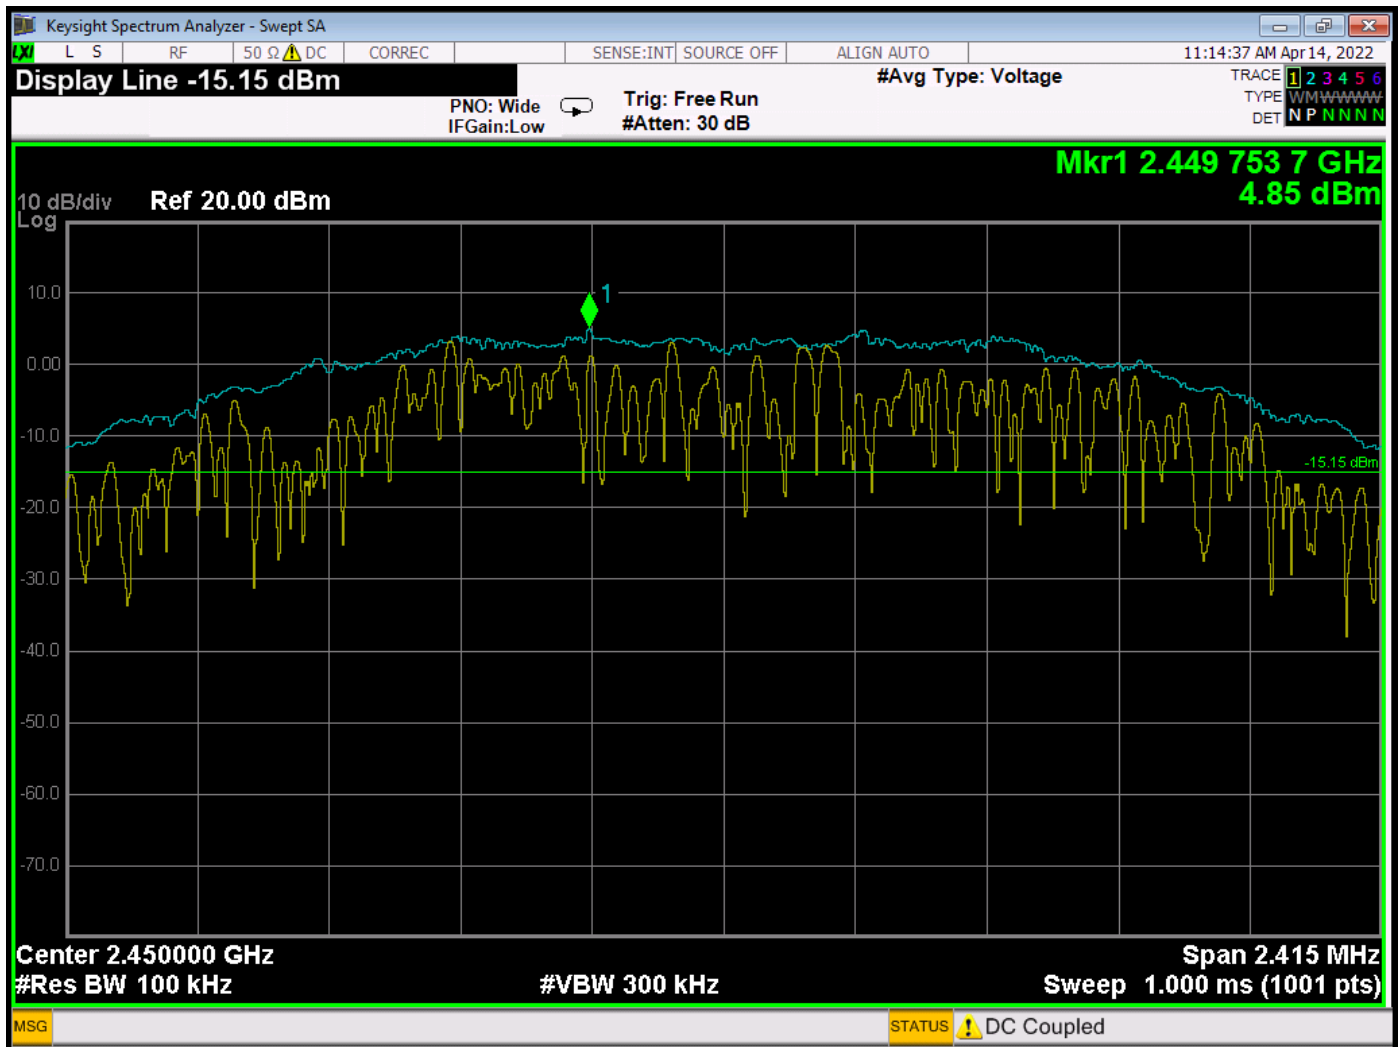

RF Antenna Conducted Test – Middle Channel – Reference Level

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

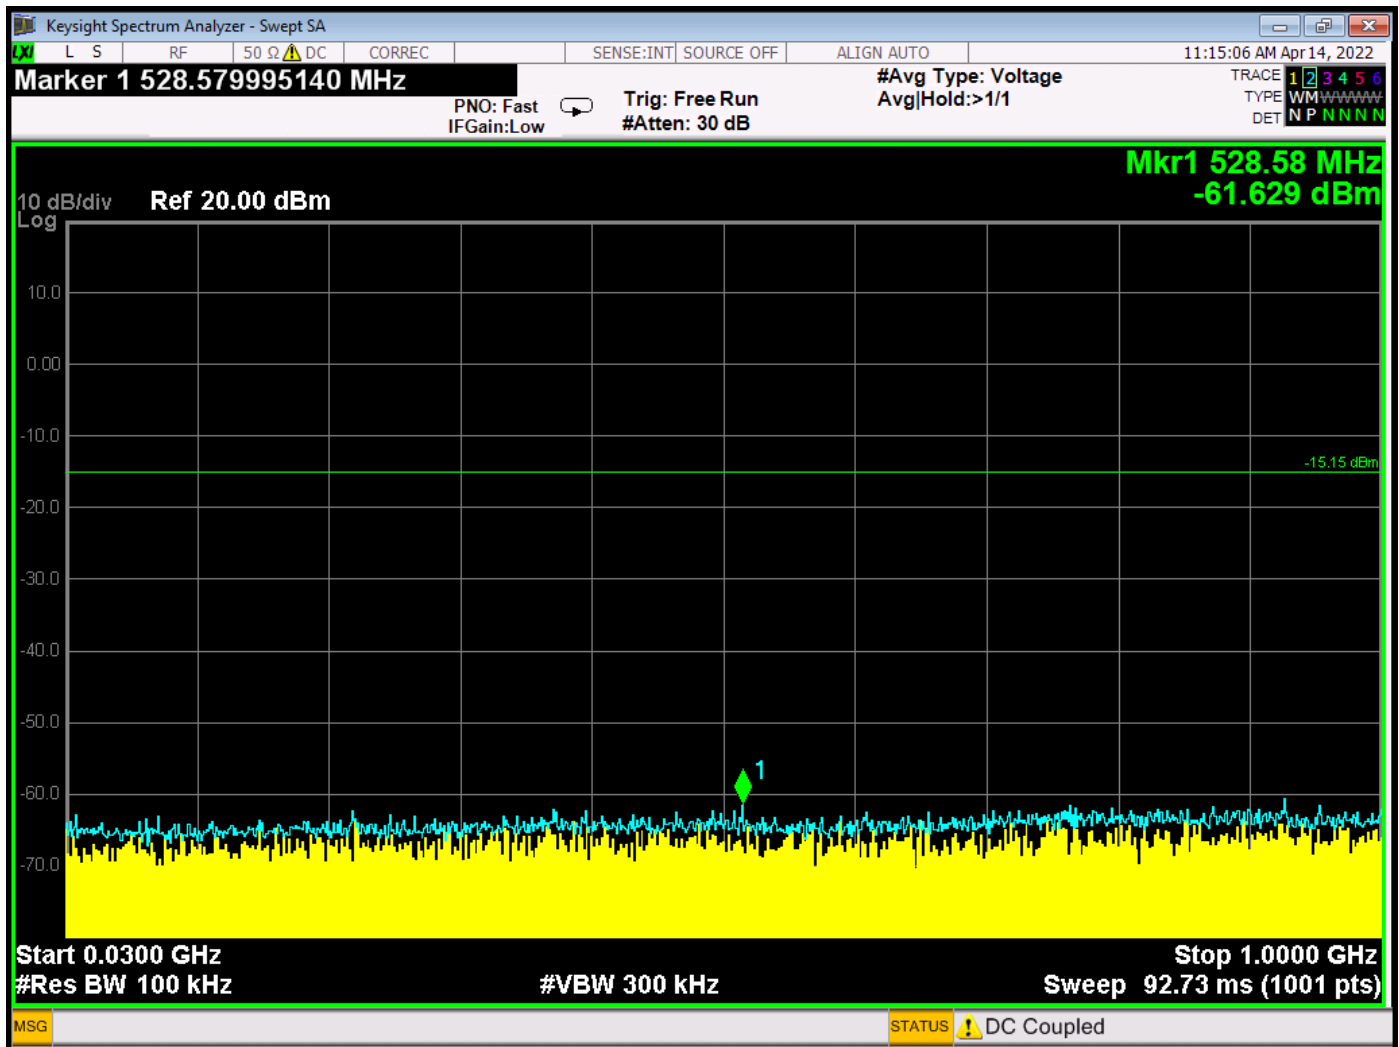

RF Antenna Conducted Test – Middle Channel – 30 MHz to 1 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

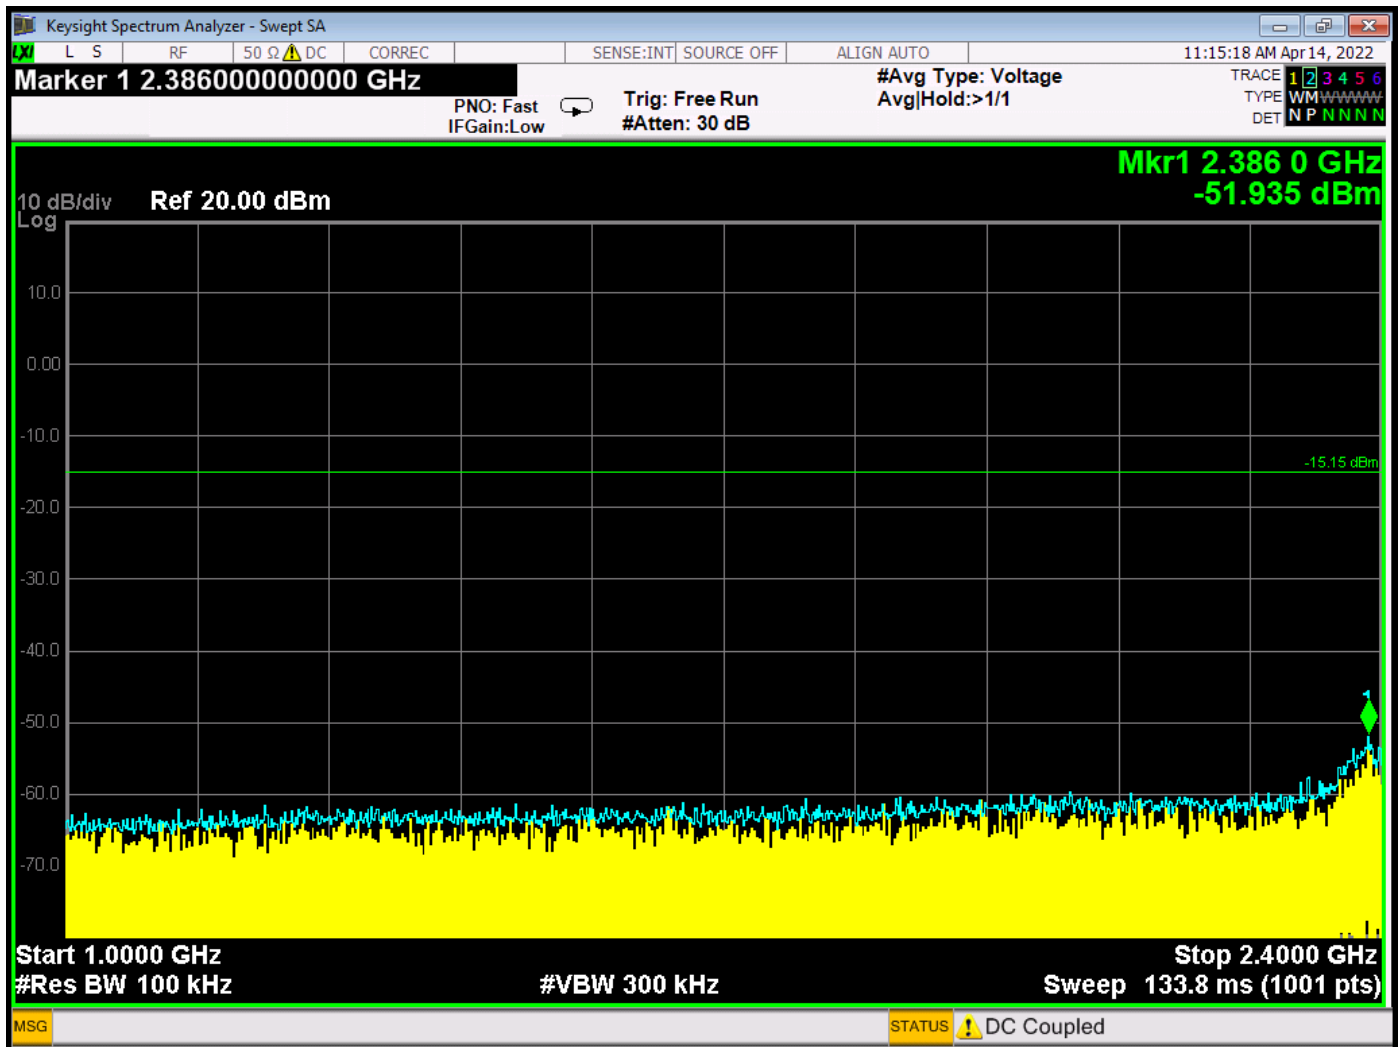

RF Antenna Conducted Test – Middle Channel – 1 GHz to 2.4 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

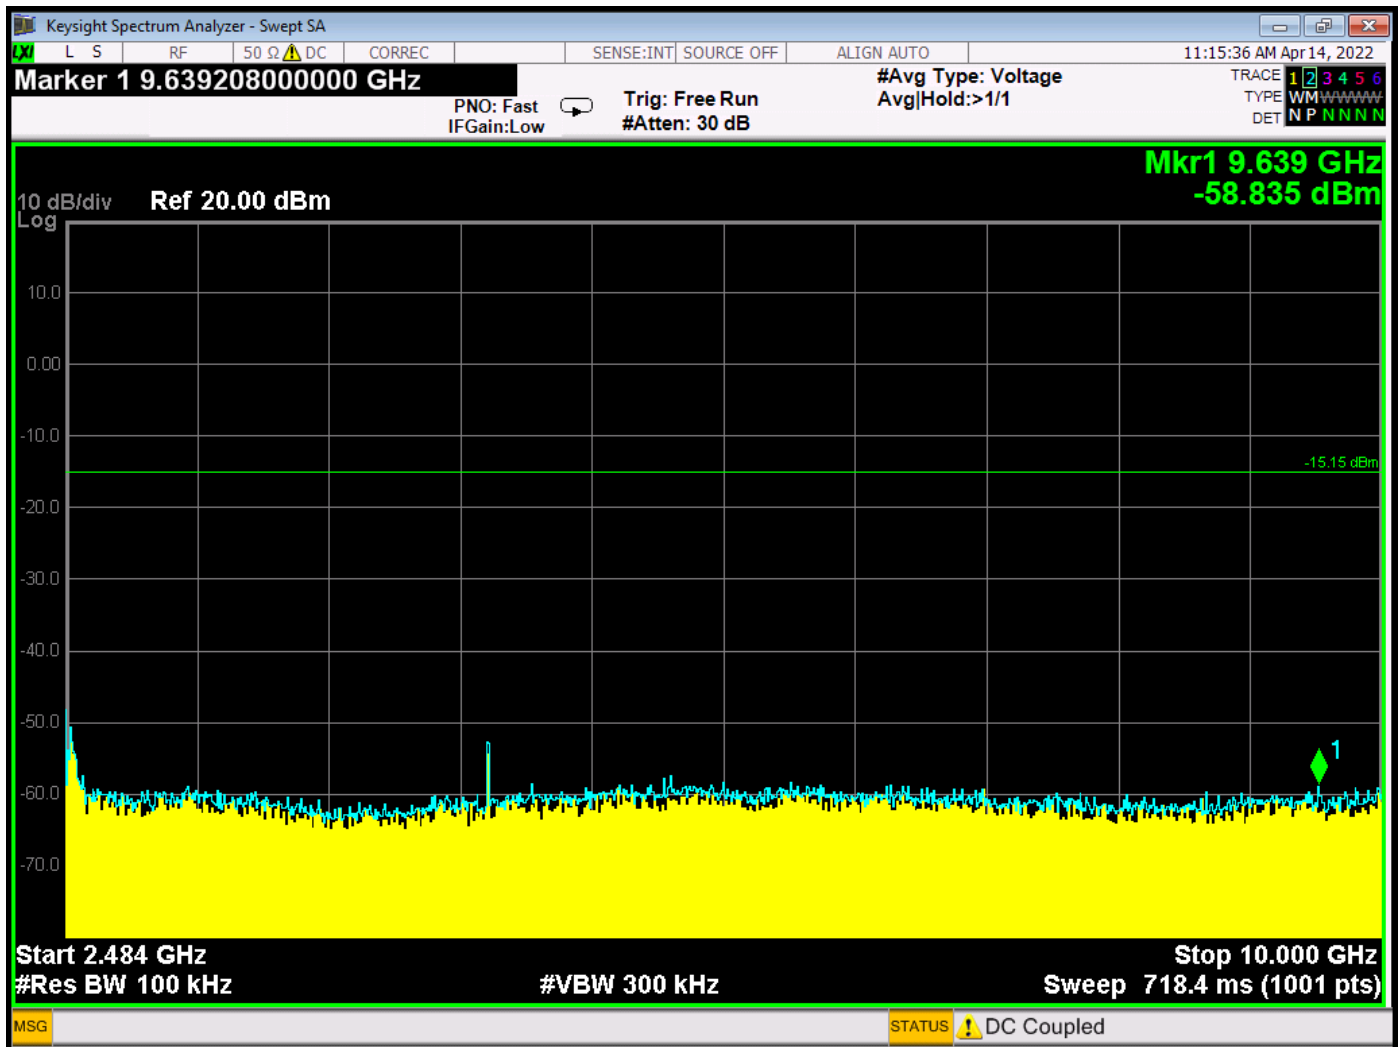

RF Antenna Conducted Test – Middle Channel – 2483.5 MHz to 10 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

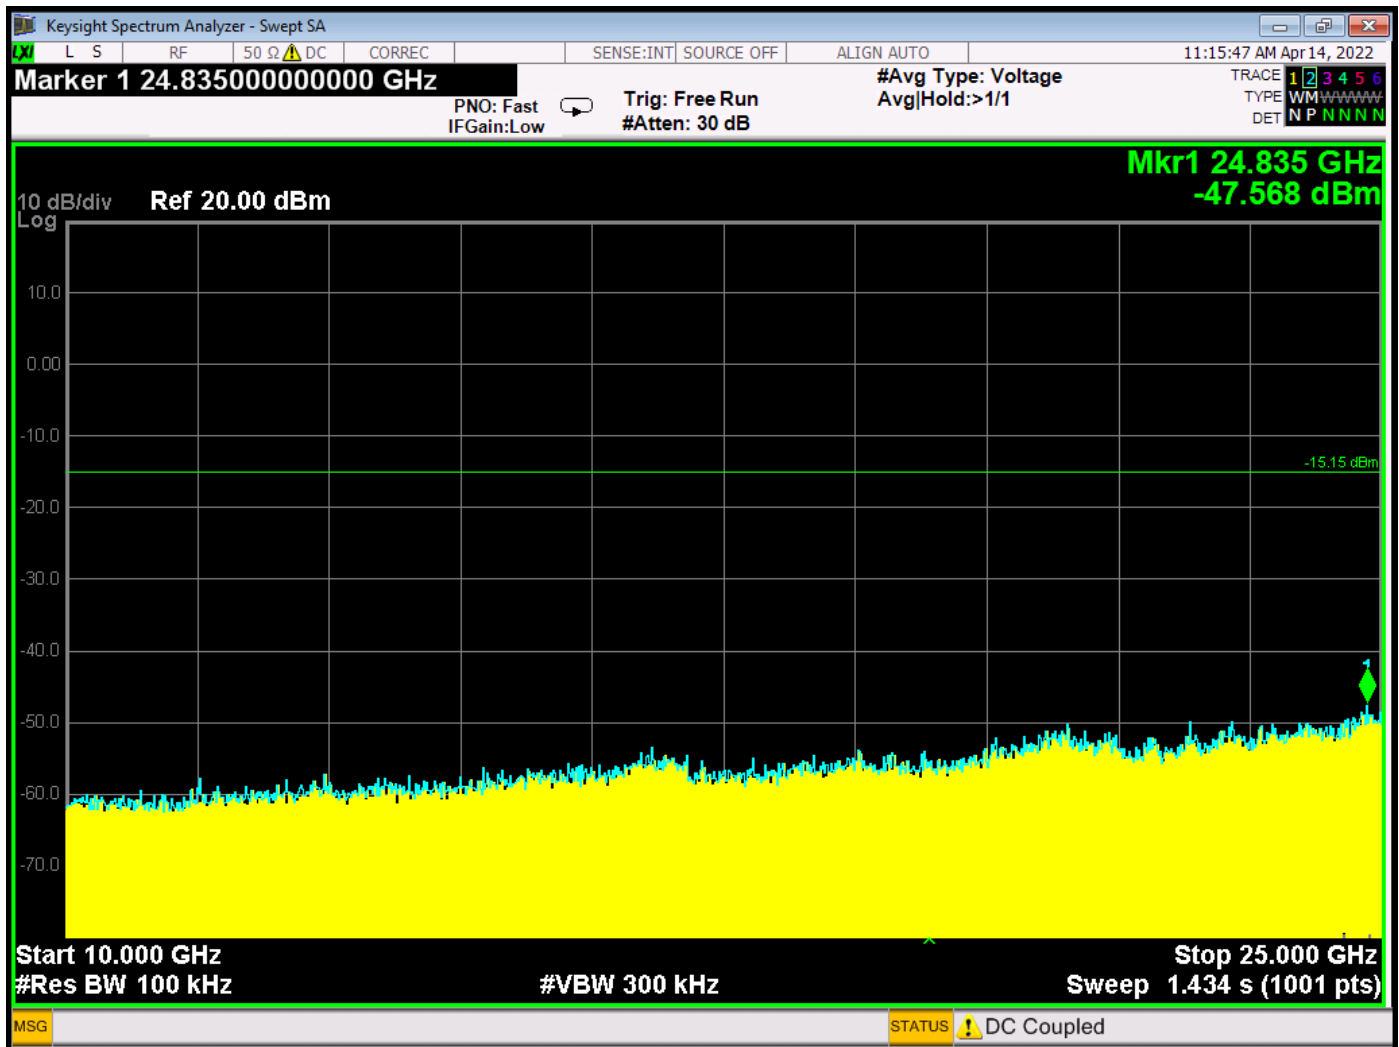

RF Antenna Conducted Test – Middle Channel – 10 GHz to 25 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

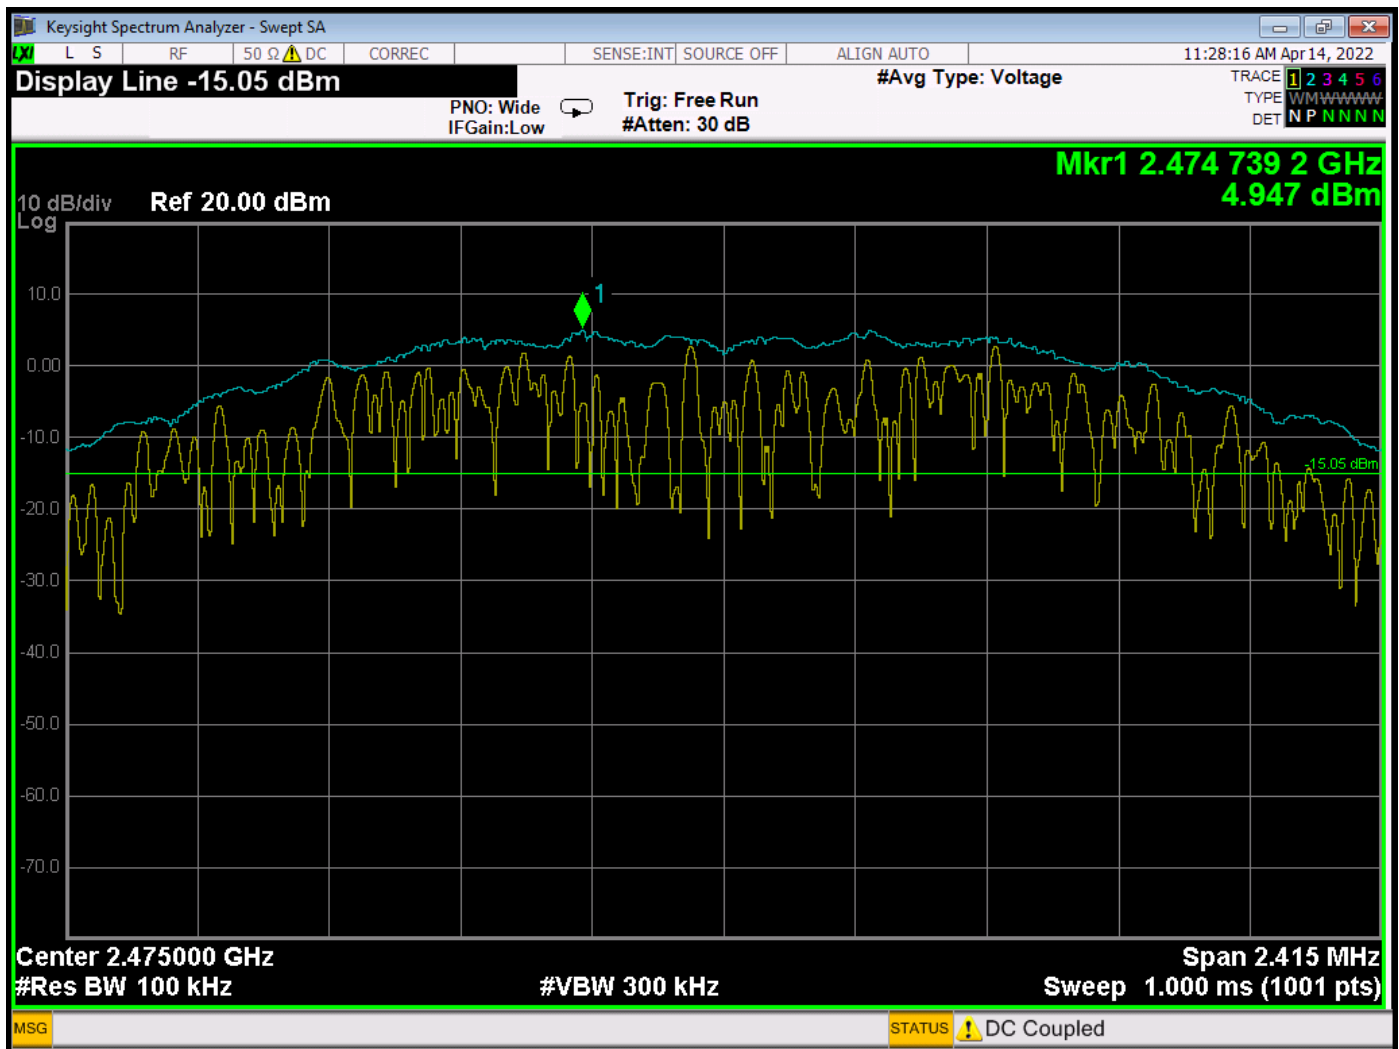

RF Antenna Conducted Test – High Channel – Reference Level

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

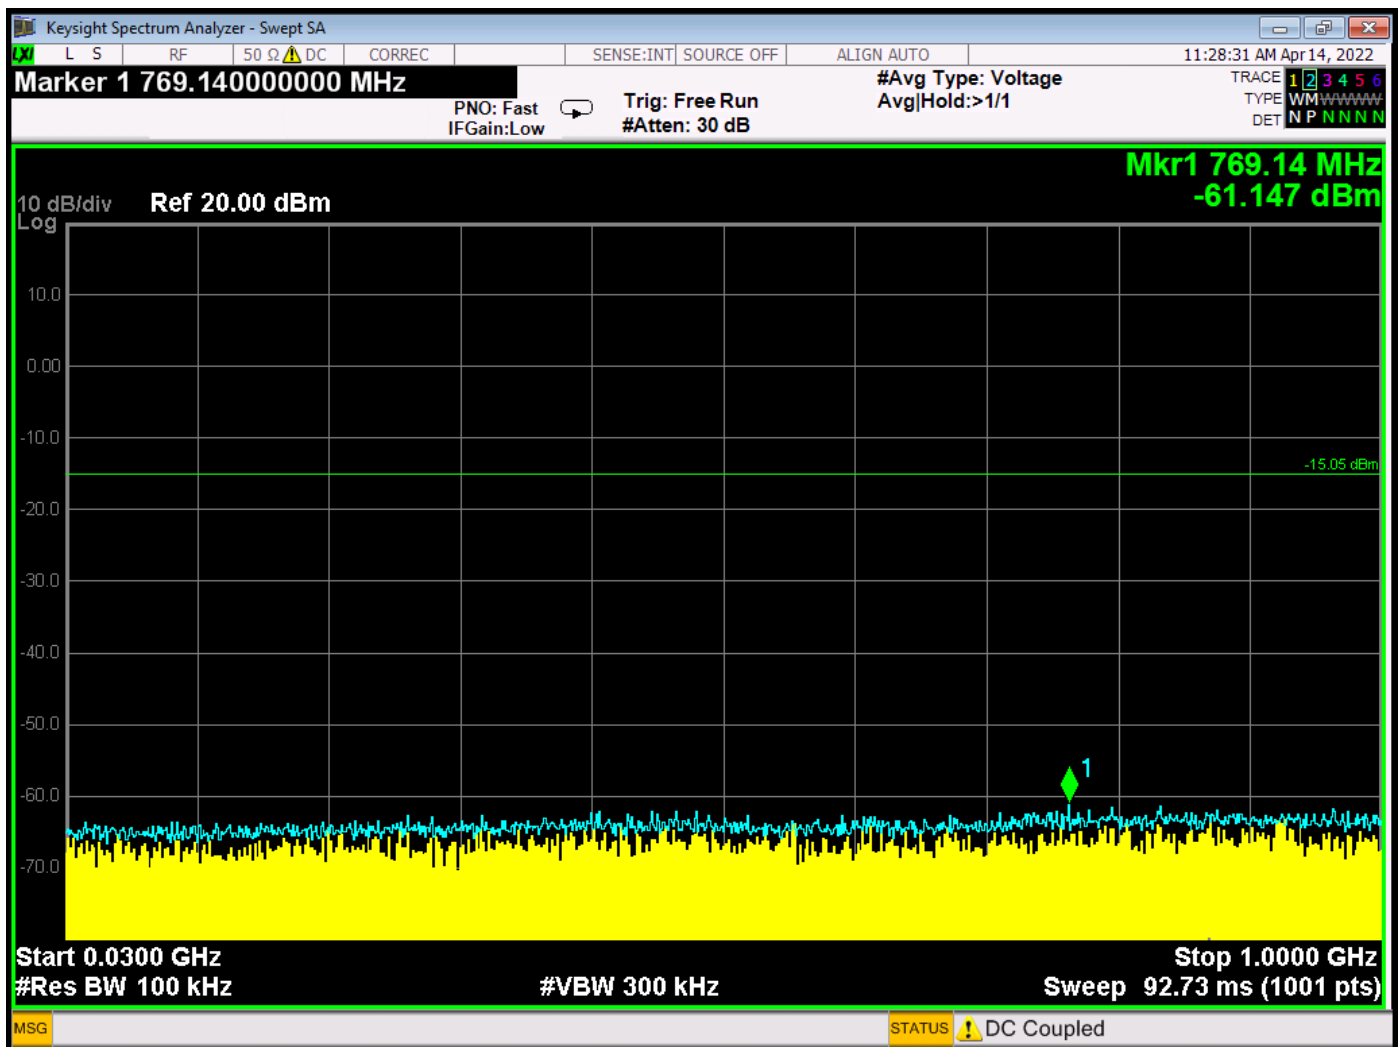

RF Antenna Conducted Test – High Channel – 30 MHz to 1 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400


Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044


**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

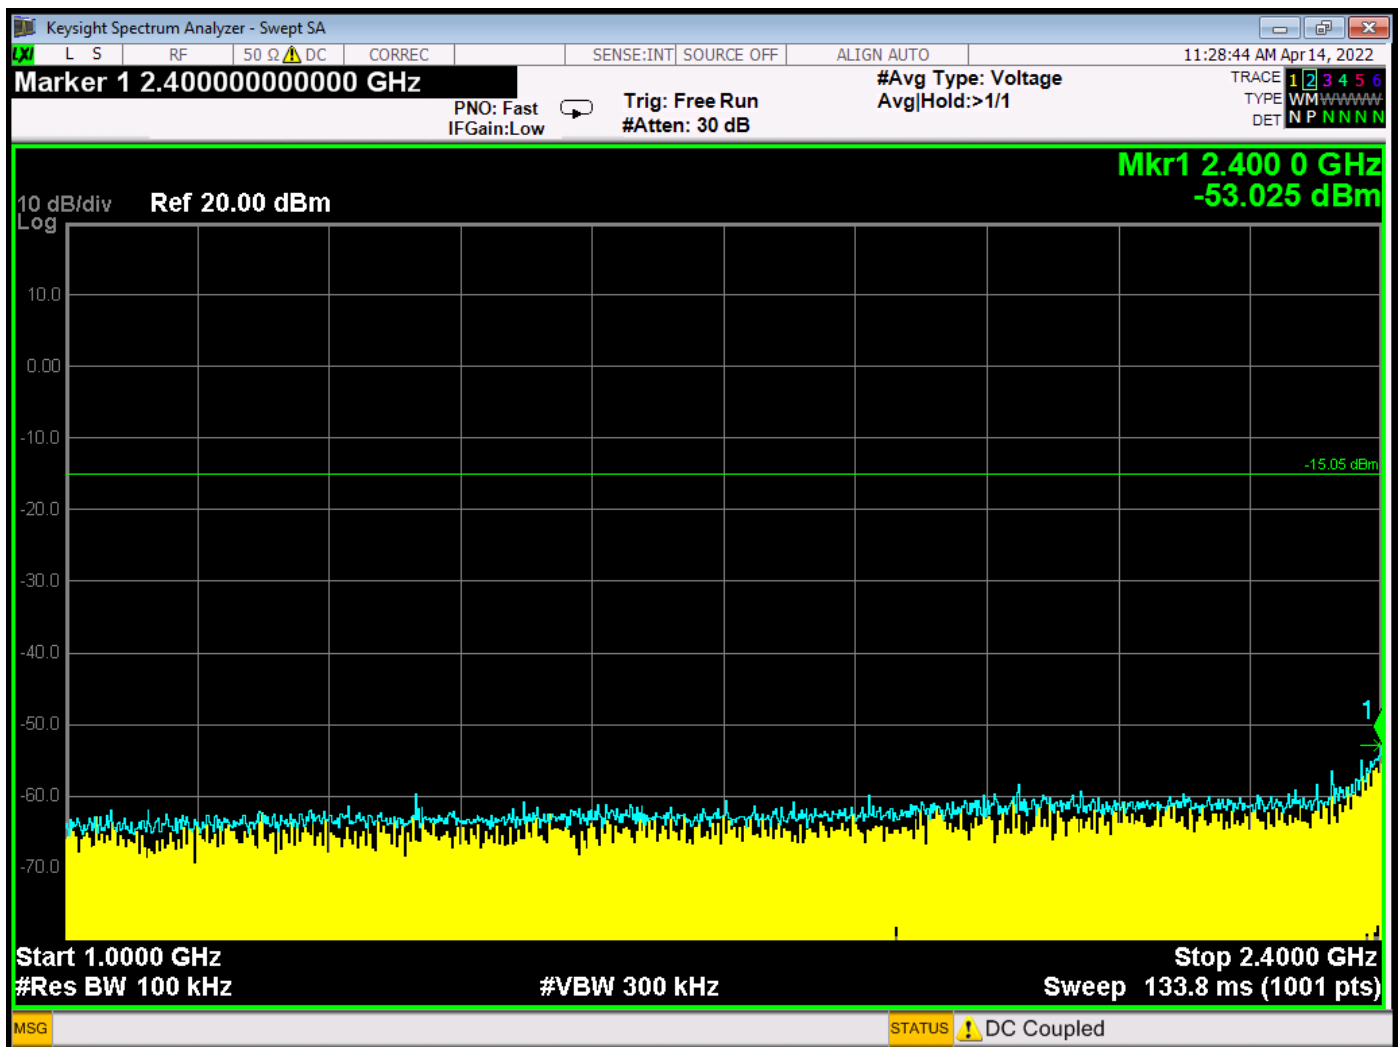

RF Antenna Conducted Test – High Channel – 1 GHz to 2.4 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

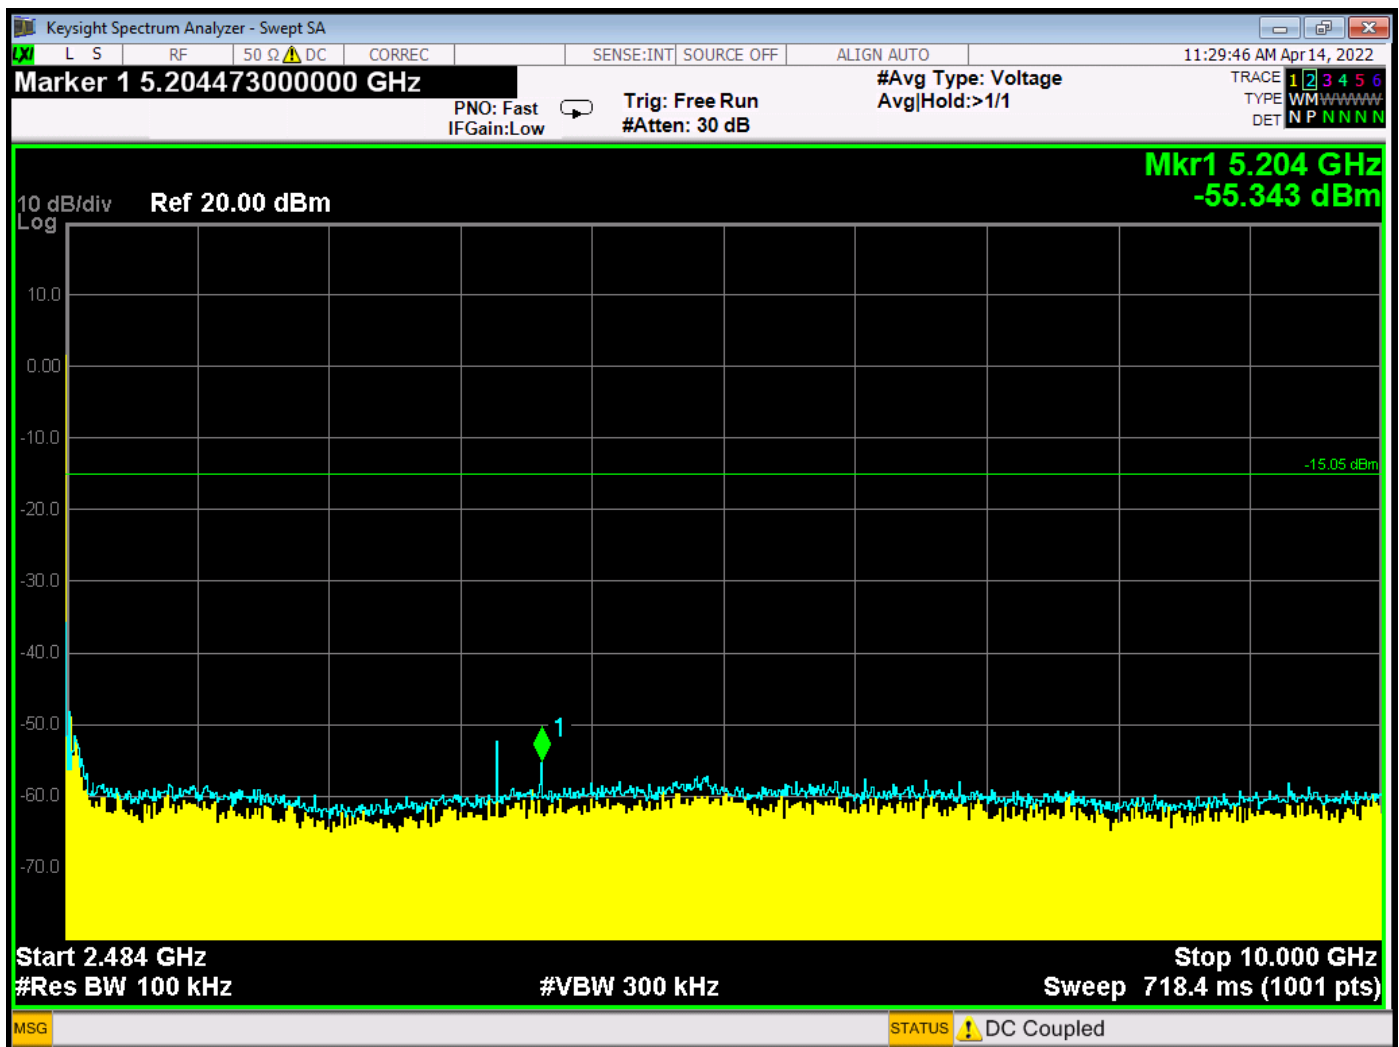

RF Antenna Conducted Test – High Channel – 2483.5 MHz to 10 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

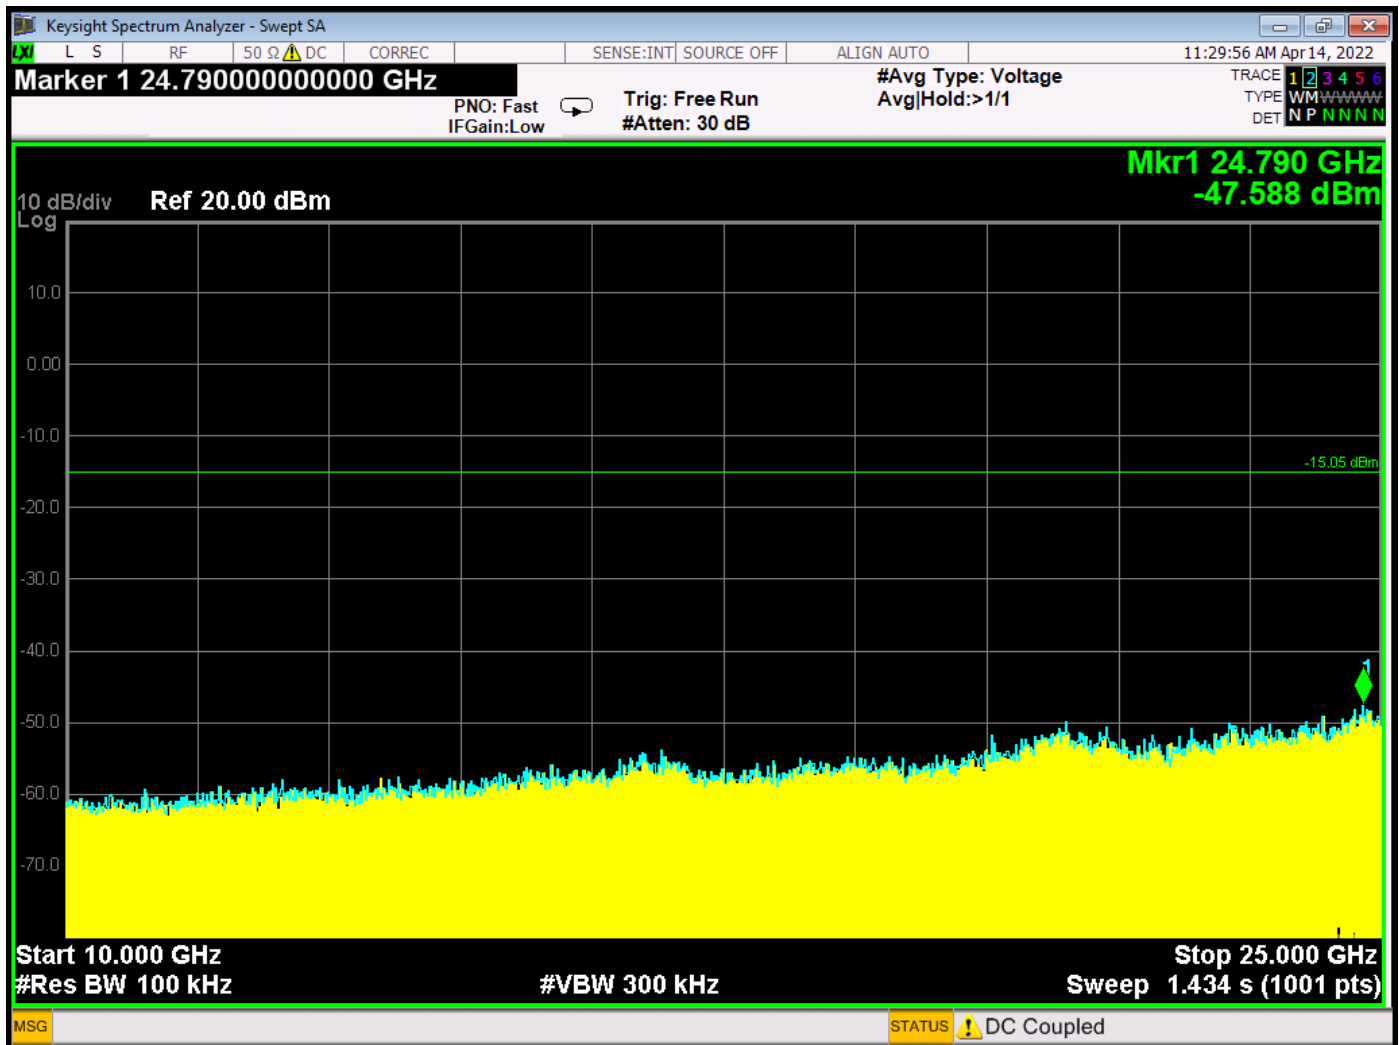

RF Antenna Conducted Test – High Channel – 10 GHz to 25 GHz

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044



UNIVERSAL ELECTRONICS, INC.

PULSE RF4CE UE878J CONVERSION 2021

PART NUMBER: R3206BD00-00001

EMISSIONS IN NON-RESTRICTED BANDS

FREQUENCY (MHz)	LEVEL (dBm)	Limit* (dBm)	Margin (dB)
2393.00	-46.811	-15.047	-31.764
9639.00	-58.835	-15.047	-43.788
5204.00	-55.343	-15.047	-40.296

Note: The three highest non-restricted emissions are reported.

*The Limit is based on 20 dB below the highest reference level obtained on the previous pages.



DUTY CYCLE

DATA SHEETS




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

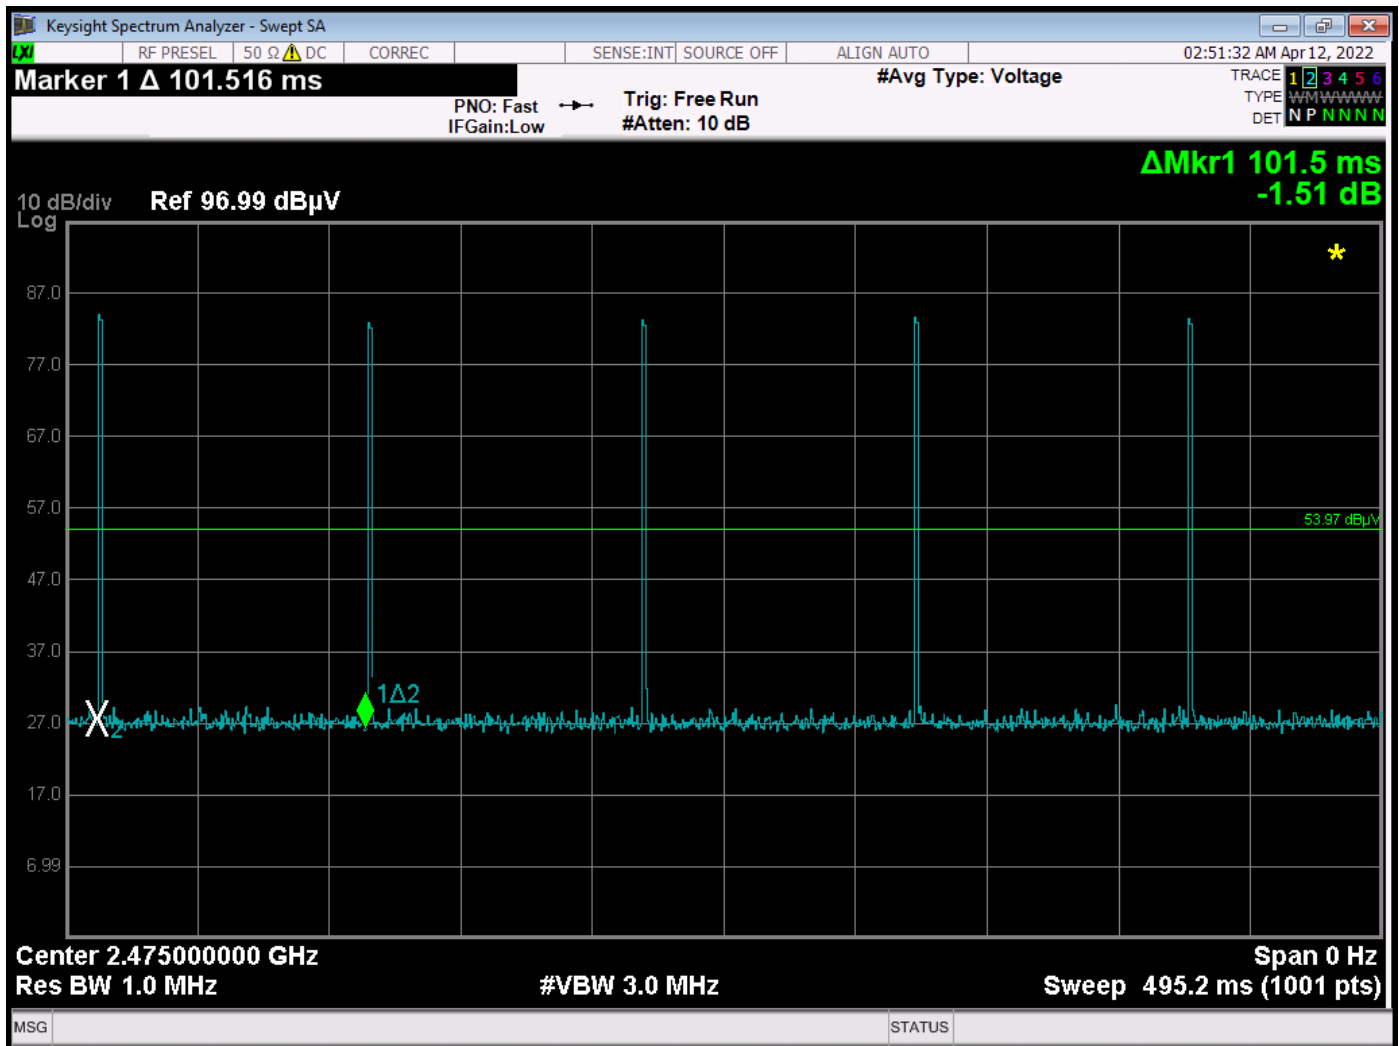

Time Between Pulses is 101.5 ms – Advertising Mode

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400


Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044


**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

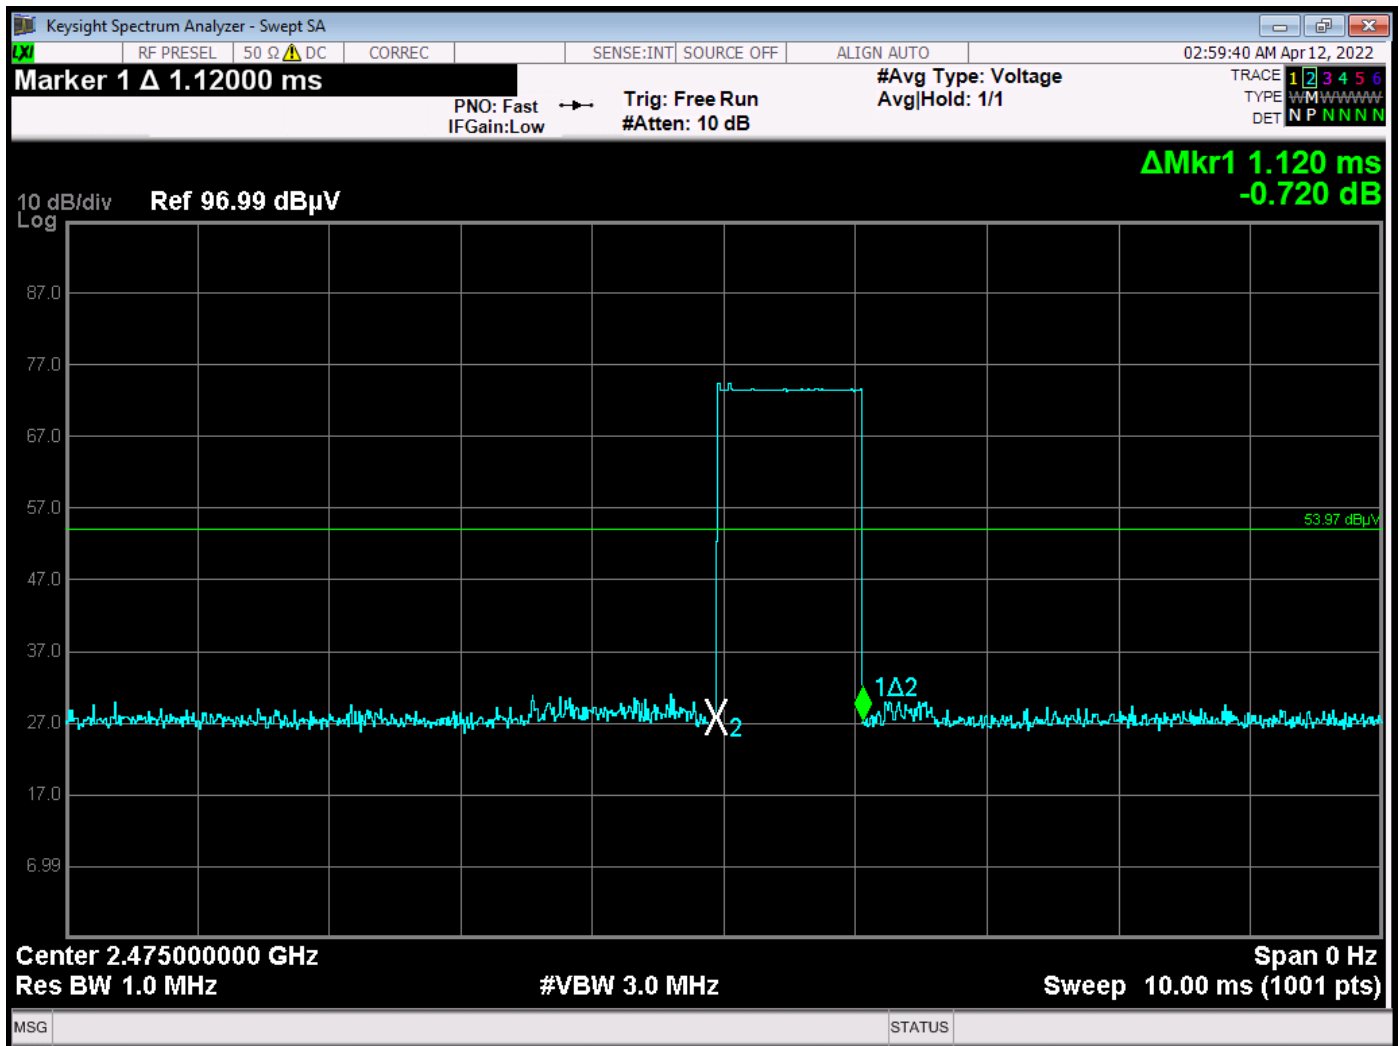

Time of One Pulse 1.12 ms - Advertising Mode

$$\text{Duty Cycle} = 1.12 \text{ ms} / 100 \text{ ms} = 1.12 \%$$

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

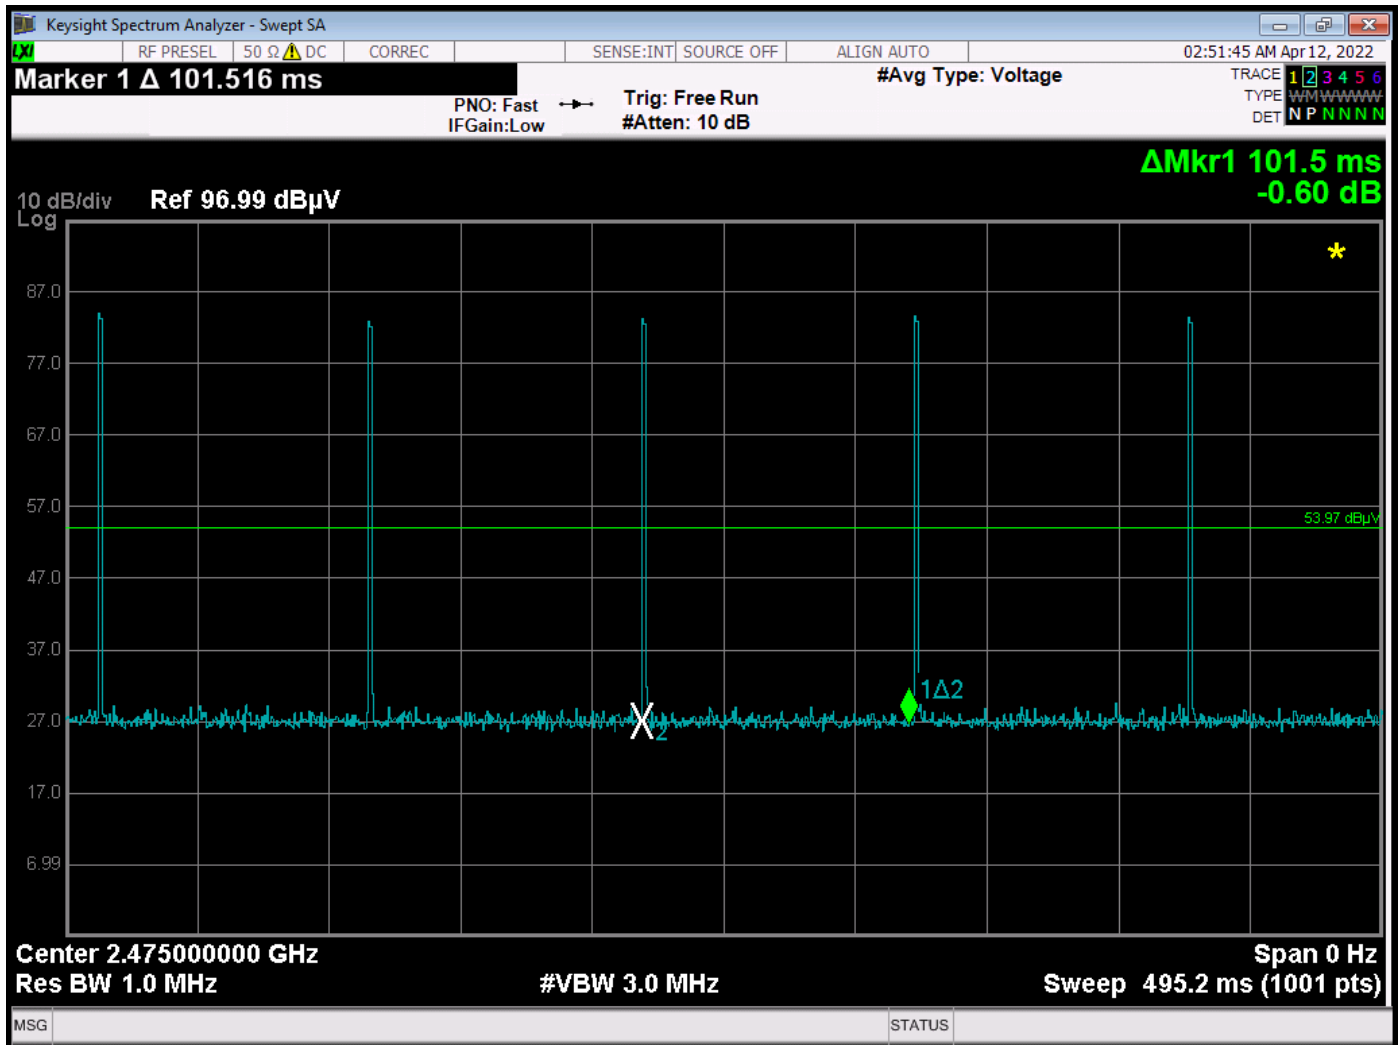

Time Between Pulses is 101.5 ms – Data Mode

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044




**COMPATIBLE
ELECTRONICS**

FCC Part 15 Subpart B and C; FCC Section 15.247; RSS-247; and RSS-GEN Test Report

Pulse RF4CE UE878J Conversion 2021

Part Number: R32068BD00-00001

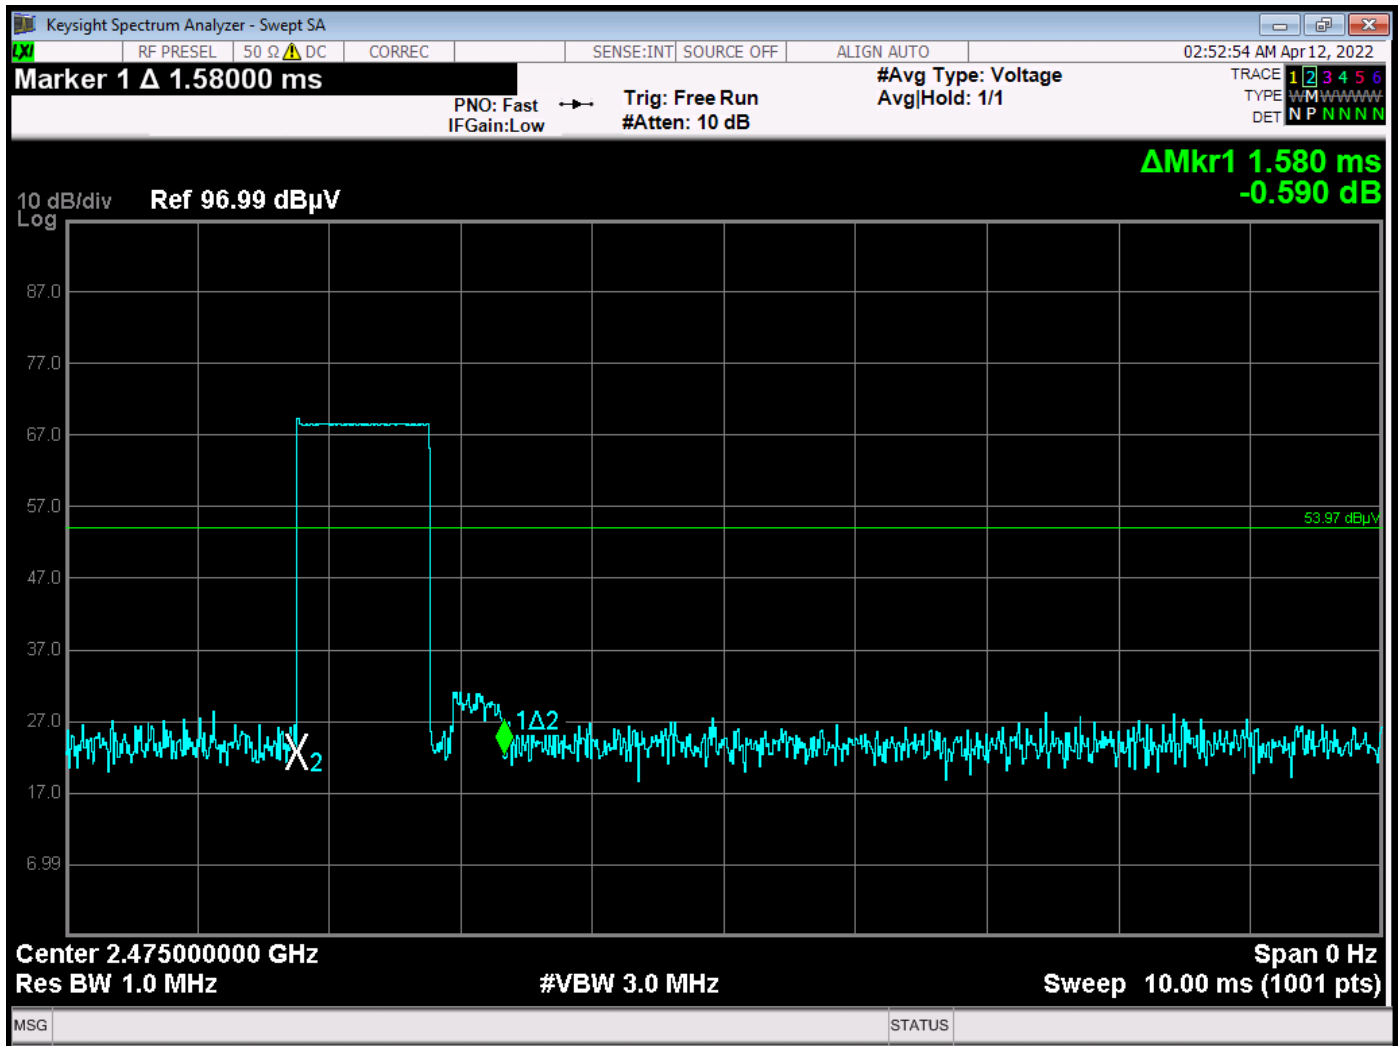

Time of One Pulse (Worst Case) is 1.58 ms – Data Mode

$$\text{Duty Cycle} = 1.58 \text{ ms} / 100 \text{ ms} = 1.58\%$$

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Newbury Park Division
1050 Lawrence Drive
Newbury Park, CA 91320
(805) 480-4044