



FCC PART 15C TEST REPORT FOR CERTIFICATION On Behalf of

ASUSTeK Computer Inc

MODULE-WIRELESS CHRG

Model Number: GST868003

FCC ID: MSQ-GST868003

Applicant:	ASUSTeK Computer Inc
Address:	1F, No.15, Lide Rd., Beitou, Taipei Taiwan
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: 86-769-83081888-808	

Report Number:	ESTE-R2603199
Date of Test:	Feb. 09, 2026 to Mar. 12, 2026
Date of Report:	Mar. 18, 2026

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
2. SUMMARY OF TEST	5
2.1. Summary of test result	5
2.2. Test Facilities.....	6
2.3. Measurement uncertainty	7
2.4. Assistant equipment used for test	7
2.5. Block Diagram	7
2.6. The test mode was selected for the final test as listed below.	8
2.7. Test Equipment List.....	9
3. RADIATED EMISSION	10
3.1. Limit.....	10
3.2. Test Setup.....	11
3.3. Spectrum Analyzer Setting	11
3.4. Test Procedure.....	12
3.5. Test Result.....	13
4. 20DB OCCUPIED BANDWIDTH	19
4.1. Limit.....	19
4.2. Test Setup.....	19
4.3. Spectrum Analyzer Setting	19
4.4. Test Procedure.....	19
4.5. Test Condition	19
4.6. Test Result.....	20
5. ANTENNA REQUIREMENTS	21
5.1. Limit.....	21
5.2. Test Result.....	21
6. TEST SETUP PHOTO.....	22
7. EUT PHOTO	23

Applicant: Address:	ASUSTeK Computer Inc 1F, No.15, Lide Rd., Beitou, Taipei Taiwan		
Manufacturer: Address:	ASUSTeK Computer Inc 1F, No.15, Lide Rd., Beitou, Taipei Taiwan		
E.U.T:	MODULE-WIRELESS CHRG		
Model Number:	GST868003		
Power Supply:	DC 9V-16V, 2A		
Trade Name:	-----	Sample No.:	EST-260209045-001
Date of Receipt:	Feb. 09, 2026	Date of Test:	Feb. 09, 2026 to Mar. 12, 2026
Test Specification:	FCC Part 15 Subpart C ANSI C63.10:2020		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
Date: Mar 27, 2026			

Prepared by:

Zephyr Zhu

Zephyr Zhu / Assistant

Reviewed by:

Seven Wang

Seven Wang / Engineer

Approved by:

Iceman Hu

Iceman Hu / Manager

Other Aspects:

None.

Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested

This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd. The statement of compliance in this report is based on the limit in the test standard, the measurement uncertainty is not considered.

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	MODULE-WIRELESS CHRG
Model Number	:	GST868003
Operation Frequency	:	110.5-148kHz
Max Wireless Charge Power	:	5W/7.5W/10W/15W(max)
Max Field Strength of Fundamental	:	54.7 dB μ V/m
Modulation Type	:	ASK
Antenna Type	:	Induction coil
Sample Type	:	Prototype production
Note: The product information is provided by the manufacturer. The laboratory is not responsible for this data.		

2. SUMMARY OF TEST

2.1. Summary of test result

No.	Description of Test Item	FCC Standard Section	Results
1	Radiated Emission	15.205 15.209	PASS
2	20dB Occupied Bandwidth	15.215	PASS
3	AC Power Line Conducted Emissions	15.207	N/A
4	Antenna Requirement	15.203	PASS

Note: "N/A" denotes test is not applicable in this test report.

2.2. Test Facilities

EMC Lab : Accredited by CNAS, CHINA
Registration No.: L5288
This Accreditation is valid until: November 12, 2029

Recognized by FCC, USA
Designation Number: CN1215
This Recognition is valid until: January 31, 2028

Accredited by A2LA, USA
Registration No.: 4366.01
This Accreditation is valid until: January 31, 2028

Recognized by Industry Canada
CAB identifier No.: CN0035
This Recognition is valid until: January 31, 2028

Recognized by VCCI, Japan
Registration No.: C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Recognition is valid until: Apr. 19, 2026

Recognized by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Recognized by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan,
Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	±3.48dB
Uncertainty for spurious emissions test (Below 30MHz)	±1.62dB
Uncertainty for spurious emissions test (30MHz-1GHz)	±4.60 dB(Polarize: H)
	±4.68 dB(Polarize: V)
Uncertainty for spurious emissions test (1GHz to 18GHz)	±4.96dB
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	1.08dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
Load	Mobile Phone	-	HUAWEI P60 Pro	-	-

Item	Shielded Type	Ferrite Core	Length	Model Name/Type No.	Note
1	NO	NO	0.2m	NO	DC Cable

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 meter high above ground.

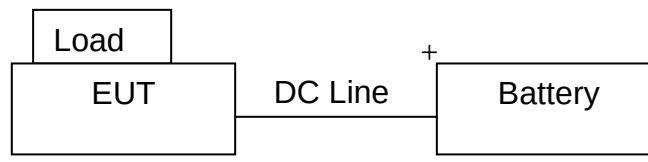

(EUT: MODULE-WIRELESS CHRQ)

2.6. The test mode was selected for the final test as listed below.

Test Item	Test Mode
Radiated Emission	5W, 7.5W, 10W, 15W
AC Power Line Conducted Emissions	5W, 7.5W, 10W, 15W

Note: All modes have been tested. The report only reflects the worst case of 15W full load test data.

2.7. Test Equipment List

For AC Power Line Conducted Emissions Test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESRP3	EST-E070	LISAI	June 11,25	June 10,26
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 11,25	June 10,26
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 11,25	June 10,26
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For Radiated Emission Test(9kHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 11,25	June 10,26
Active Loop Antenna	SCHWABE BECK	FMZB 1519B	EST-E054	LISAI	June 11,25	June 10,26
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For Radiated Emission Test (30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 11,25	June 10,26
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 11,25	June 10,26
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

3. RADIATED EMISSION

3.1. Limit

15.209 Radiated emission limits

Frequency (MHz)	Field Strength($\mu\text{V/m}$)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Note:

1. Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V/m}$.
2. The smaller limit shall apply at the cross point between two frequency bands.
3. Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

3.2. Test Setup

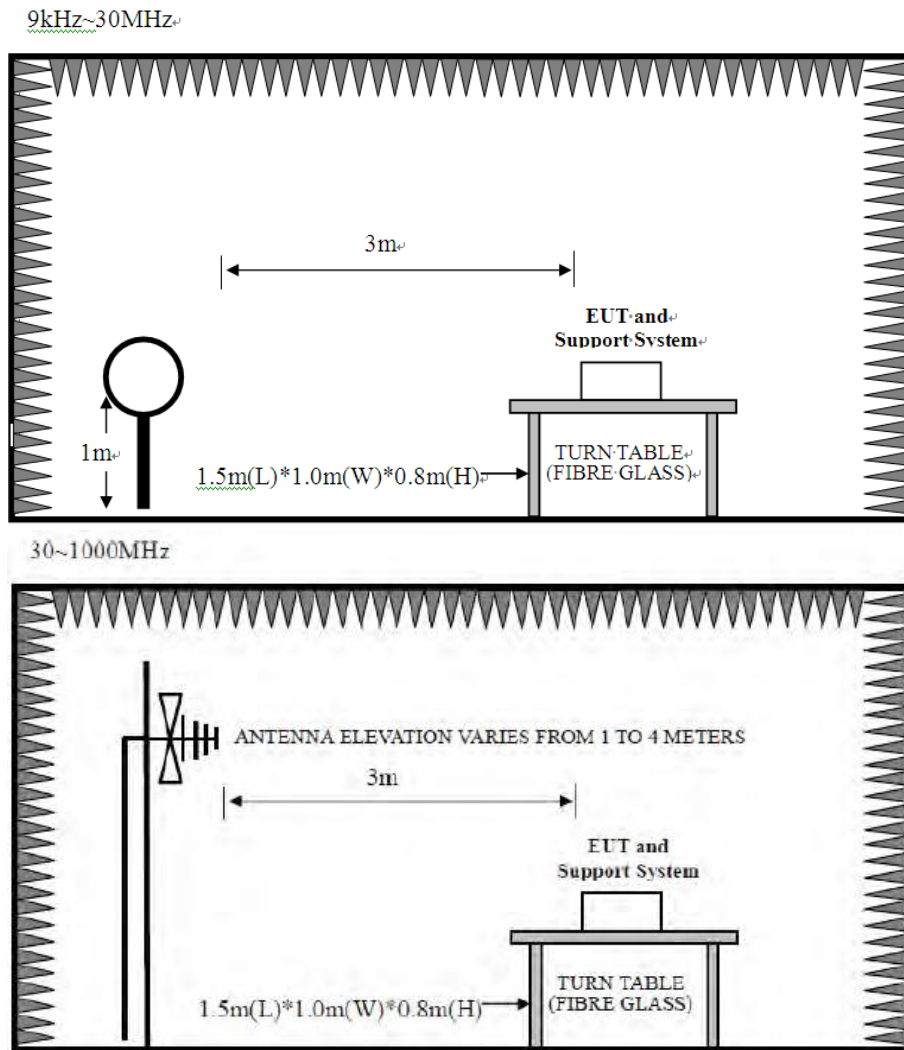

3.3. Spectrum Analyzer Setting

For 9KHz-150KHz

Spectrum Parameters	Setting
RBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
VBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
Start frequency	9KHz
Stop frequency	150KHz
Sweep Time	Auto
Detector	PEAK/QP/AVG
Trace Mode	Max Hold

For 150KHz-30MHz

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For 30MHz-1000MHz

Spectrum Parameters	Setting
RBW	120KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	1000MHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

3.4. Test Procedure

- EUT was placed on a turn table, which is 0.8 meter high above ground.
- EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower.
- Set the EUT transmit continuously with maximum output power.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- The turn table can rotate 360 degrees to determine the position of the maximum emission level.
- For below 30MHz test, the center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates both coaxial and coplanar polarization to find out the maximum emission level.
- For above 30MHz test, the antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both coaxial and coplanar polarization of the antenna are set on test.
- Record the results in the test report.

Note:

- For emissions below 30MHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
- For emissions below 30MHz, if peak level comply with QP limit, then the QP level is deemed to comply with QP limit.

3.5. Test Result

Radiated Emission Below 30MHz


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 17

File: \\EMC-966-2\\test data\\2026\\Report\\RF\\H\\Hua Shuo\\GST868003.EM6 (20)

Date: 2026-03-04

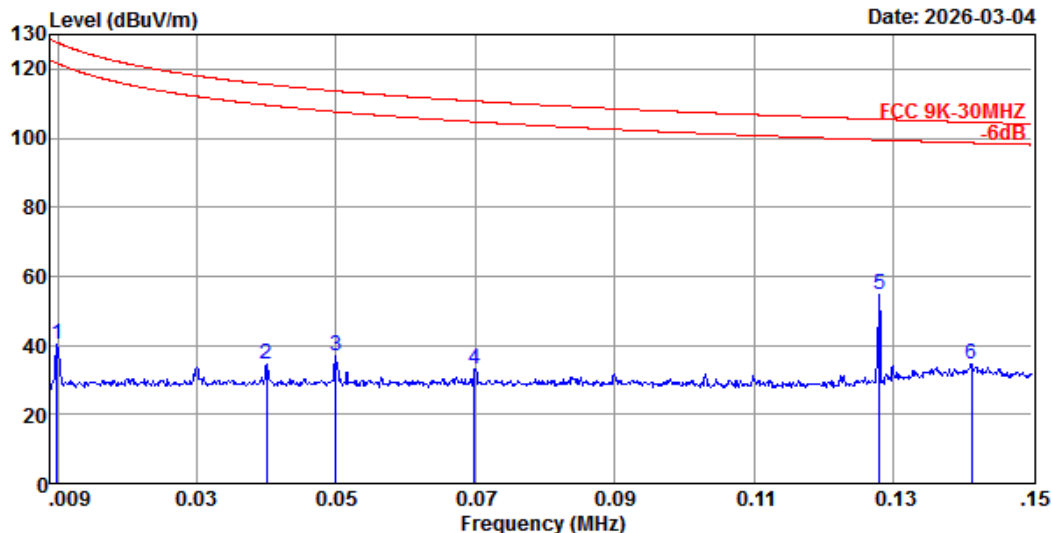

Site no. : 2# 966 chamber Data no. : 17
Dis. / Ant. : 3m FMZB 1519B Ant. pol. : COAXIAL
Limit : FCC 9K-30MHz
Env. / Ins. : Temp:20.5℃;Humi:54%;Press:101.3kPa
Engineer : Eric Lin
EUT : MODULE-WIRELESS CHRQ
Power : DC 12V From Battery
M/N : GST868003
Test Mode : TX Mode
Sample No. : EST-260209045-001
15W

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	19.50	0.03	20.64	40.17	127.62	87.45	Peak
2	0.0400	19.60	0.03	14.74	34.37	115.56	81.19	Peak
3	0.0500	19.60	0.03	17.10	36.73	113.62	76.89	Peak
4	0.0699	19.70	0.03	13.50	33.23	110.71	77.48	Peak
5	0.1280	20.00	0.03	34.67	54.70	105.46	50.76	Peak
6	0.1413	20.00	0.03	14.65	34.68	104.60	69.92	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 18

File: \\EMC-966-2\test data\2026\Report\RF\Hua Shuo\GST868003.EM6 (20)

Date: 2026-03-04

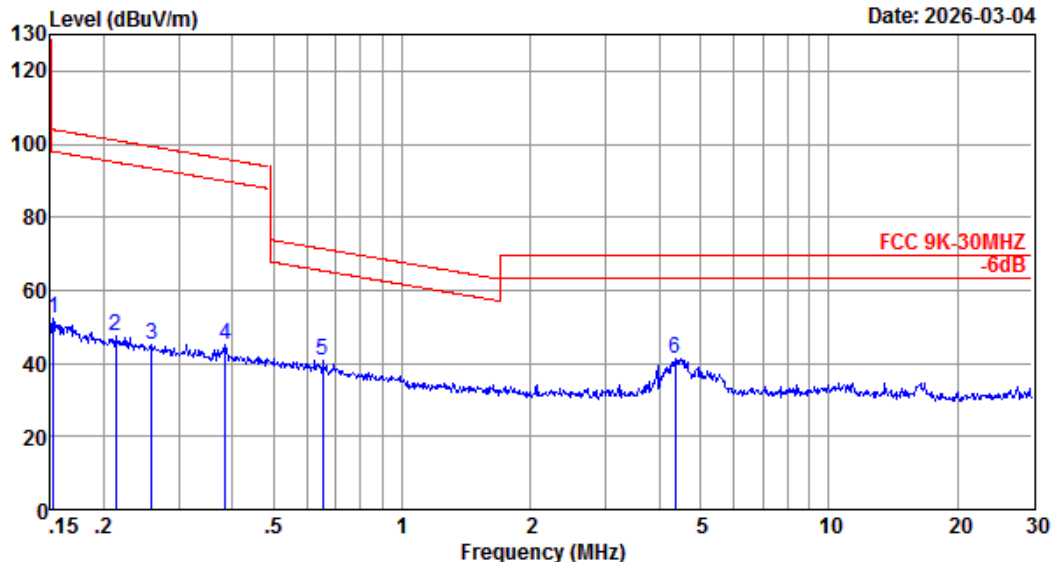

Site no. : 2# 966 chamber Data no. : 18
Dis. / Ant. : 3m FMZB 1519B Ant. pol. : COAXIAL
Limit : FCC 9K-30MHZ
Env. / Ins. : Temp:20.5°C;Humi:54%;Press:101.3kPa
Engineer : Eric Lin
EUT : MODULE-WIRELESS CHRQ
Power : DC 12V From Battery
M/N : GST868003
Test Mode : TX Mode
Sample No. : EST-260209045-001
15W

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1524	19.90	0.03	32.31	52.24	103.94	51.70	Peak
2	0.2128	19.86	0.03	27.64	47.53	101.04	53.51	Peak
3	0.2589	19.85	0.03	25.19	45.07	99.34	54.27	Peak
4	0.3852	19.75	0.03	25.38	45.16	95.89	50.73	Peak
5	0.6508	19.73	0.02	20.90	40.65	71.33	30.68	Peak
6	4.3606	20.07	0.12	21.26	41.45	69.54	28.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 19

File: \\EMC-966-2\\test data\\2026\\Report\\RF\\Hua Shuo\\GST868003.EM6 (20)

Date: 2026-03-04

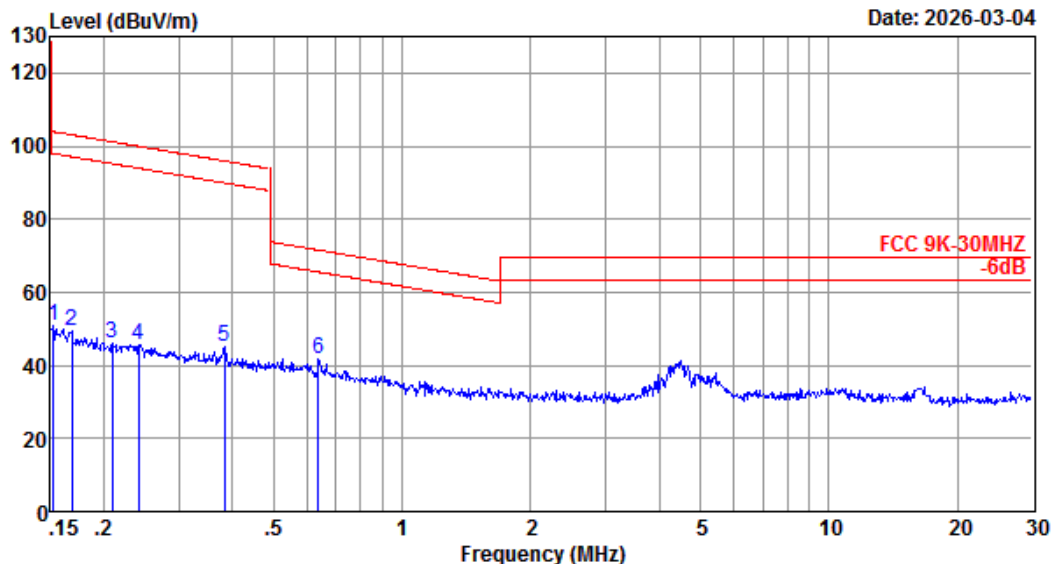

Site no. : 2# 966 chamber Data no. : 19
Dis. / Ant. : 3m FMZB 1519B Ant. pol. : COPLANAR
Limit : FCC 9K-30MHZ
Env. / Ins. : Temp:20.5°C;Humi:54%;Press:101.3kPa
Engineer : Eric Lin
EUT : MODULE-WIRELESS CHRQ
Power : DC 12V From Battery
M/N : GST868003
Test Mode : TX Mode
Sample No. : EST-260209045-001
15W

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1524	19.90	0.03	30.74	50.67	103.94	53.27	Peak
2	0.1685	19.90	0.03	29.50	49.43	103.07	53.64	Peak
3	0.2094	19.86	0.03	25.97	45.86	101.18	55.32	Peak
4	0.2416	19.85	0.03	25.85	45.73	99.94	54.21	Peak
5	0.3832	19.77	0.03	25.41	45.21	95.94	50.73	Peak
6	0.6372	19.73	0.02	21.75	41.50	71.52	30.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 20

File: \\EMC-966-2\test data\2026\Report\RF\Hua Shuo\GST868003.EM6 (20)

Date: 2026-03-04

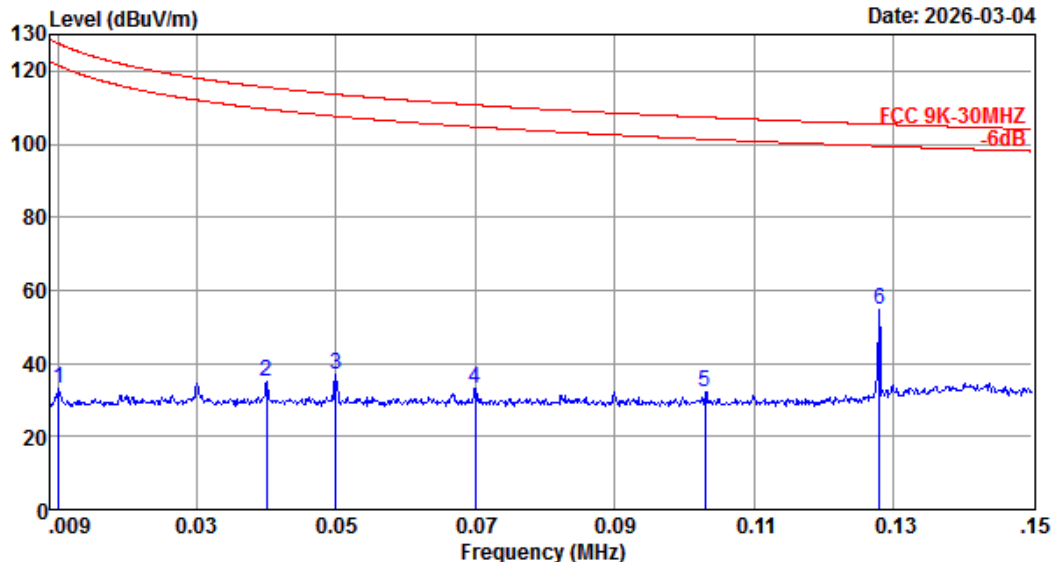

Site no. : 2# 966 chamber Data no. : 20
Dis. / Ant. : 3m FMZB 1519B Ant. pol. : COPLANAR
Limit : FCC 9K-30MHz
Env. / Ins. : Temp:20.5°C;Humi:54%;Press:101.3kPa
Engineer : Eric Lin
EUT : MODULE-WIRELESS CHRQ
Power : DC 12V From Battery
M/N : GST868003
Test Mode : TX Mode
Sample No. : EST-260209045-001
15W

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0101	19.50	0.03	13.61	33.14	127.49	94.35	Peak
2	0.0400	19.60	0.03	15.41	35.04	115.56	80.52	Peak
3	0.0500	19.60	0.03	17.47	37.10	113.62	76.52	Peak
4	0.0701	19.70	0.03	13.58	33.31	110.70	77.39	Peak
5	0.1030	19.80	0.03	12.52	32.35	107.34	74.99	Peak
6	0.1280	20.00	0.03	34.67	54.70	105.46	50.76	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Radiated Emission Above 30MHz


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 19

File: \\EMC-966-5\Test Data2\2026\Report\RF\Hua Shuo\GST868003.EM6 (24)

Date: 2026-03-02

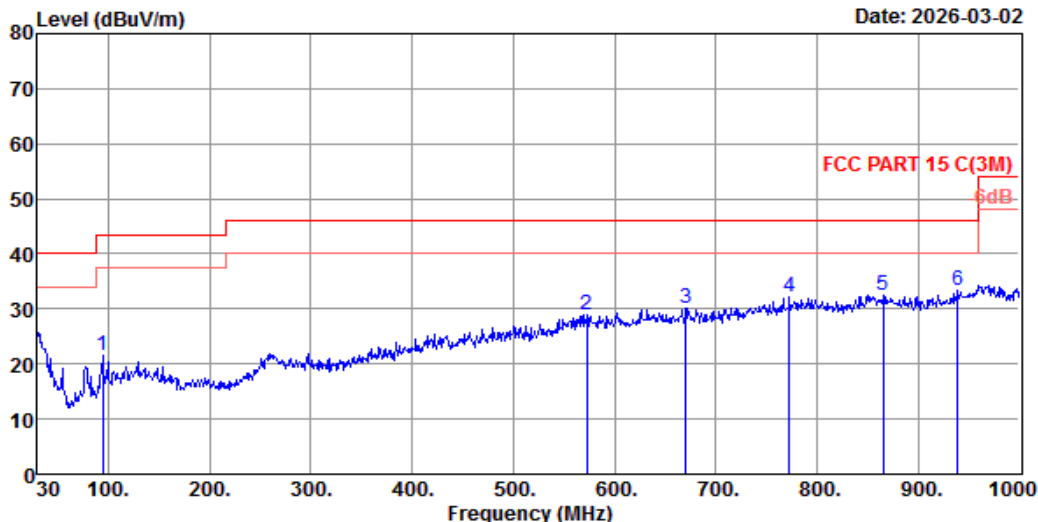

Site no. : 5# 966 Chamber Data no. : 19
Dis. / Ant. : 3m 54681 Ant. pol. : VERTICAL
Limit : FCC PART 15 C(3M)
Env. / Ins. : Temp:20.3°C;Humi:49%;Press:101.55kPa
Engineer : Shadow Yang
EUT : MODULE-WIRELESS CHRQ
Power : DC 12V From Battery
M/N : GST868003
Test Mode : TX Mode
Sample No. : EST-260209045-001
15W

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	94.02	10.30	1.67	9.52	21.49	43.50	22.01	QP
2	572.23	19.58	4.36	5.09	29.03	46.00	16.97	QP
3	670.20	20.30	4.75	5.11	30.16	46.00	15.84	QP
4	773.02	21.62	5.15	5.30	32.07	46.00	13.93	QP
5	865.17	22.75	5.47	4.22	32.44	46.00	13.56	QP
6	938.89	23.81	5.72	3.77	33.30	46.00	12.70	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 20

File: \\EMC-966-5\Test Data2\2026\Report\RF\Hua Shuo\GST868003.EM6 (24)

Date: 2026-03-02

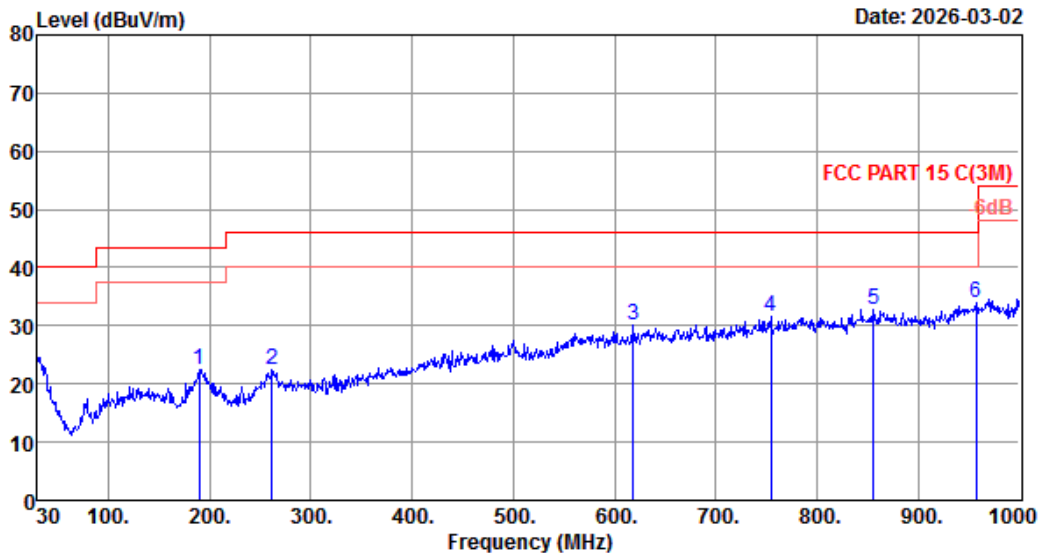

Site no. : 5# 966 Chamber
Dis. / Ant. : 3m 54681
Limit : FCC PART 15 C(3M)
Env. / Ins. : Temp:20.3°C;Humi:49%;Press:101.55kPa
Engineer : Shadow Yang
EUT : MODULE-WIRELESS CHRQ
Power : DC 12V From Battery
M/N : GST868003
Test Mode : TX Mode
Sample No. : EST-260209045-001
15W

Data no. : 20
Ant. pol. : HORIZONTAL

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	190.05	9.10	2.41	11.03	22.54	43.50	20.96	QP
2	261.83	14.74	2.86	4.74	22.34	46.00	23.66	QP
3	618.79	19.47	4.55	6.05	30.07	46.00	15.93	QP
4	754.59	21.24	5.08	5.33	31.65	46.00	14.35	QP
5	855.47	22.72	5.44	4.72	32.88	46.00	13.12	QP
6	957.32	24.34	5.78	3.96	34.08	46.00	11.92	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

4. 20DB OCCUPIED BANDWIDTH

4.1. Limit

N/A

4.2. Test Setup

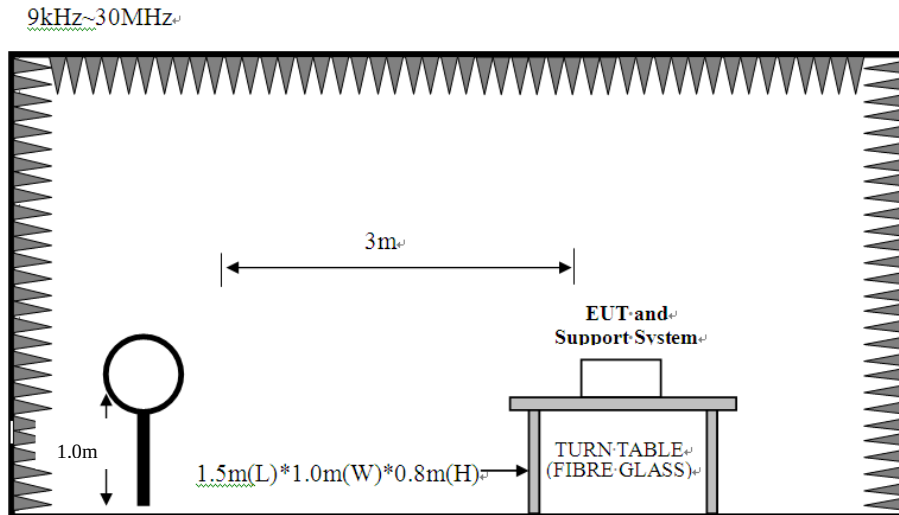

4.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	10Hz
VBW	3×RBW
Span	100Hz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

Note: Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 10 Hz to perform the occupied bandwidth test.

4.4. Test Procedure

- EUT was placed on a turn table, which is 0.8 meter high above ground.
- EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower.
- Set the EUT transmit continuously with maximum output power.
- The turn table can rotate 360 degrees to determine the position of the maximum emission level.
- Spectrum analyzer setting parameters in accordance with section 4.3.
- Allow the trace to stabilize, Set the spectrum analyzer marker to the highest level of the displayed trace, use the ndB power bandwidth function to measure 20dB occupied bandwidth
- Record the the value of 20dB cupied bandwidth


4.5. Test Condition

Temperature	24.6℃	Relative Humidity	54%	Test Voltage	DC 12V
-------------	-------	-------------------	-----	--------------	--------

4.6. Test Result

Output Power (W)	Test Frequency (KHz)	20dB Occupied Bandwidth (KHz)	Result
15	128	0.025	Pass

20dB Occupied Bandwidth

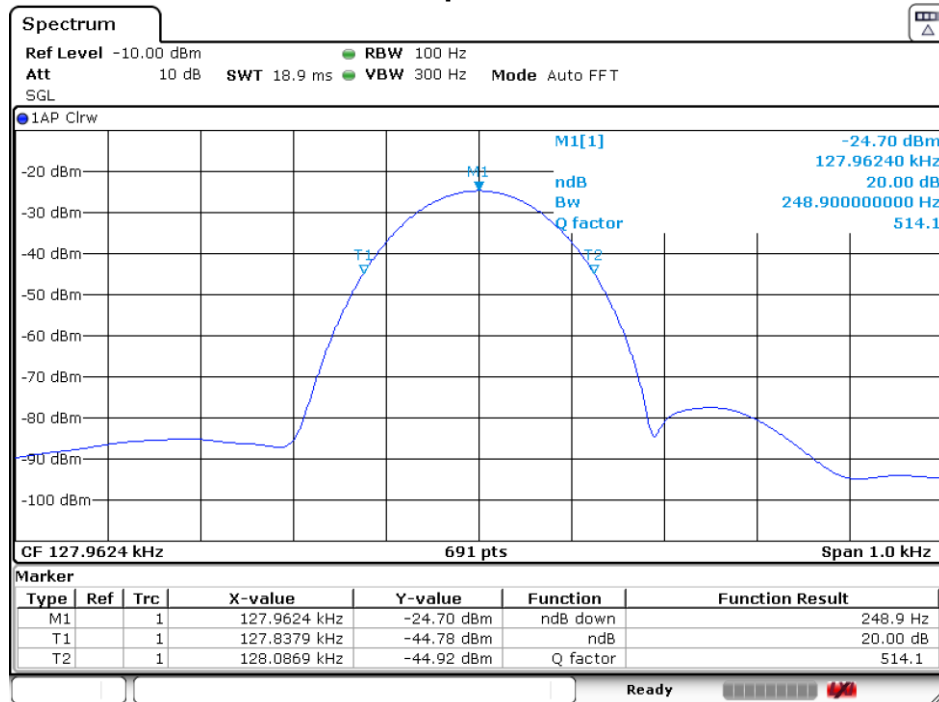

Date: 24.FEB.2026 08:37:10

5. ANTENNA REQUIREMENTS

5.1. Limit


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

5.2. Test Result


The antennas used for this product is coil antenna, so compliance with antenna requirements. (Please refer to the EUT photo for details)

6. TEST SETUP PHOTO

Radiated Test (Below 30MHz)


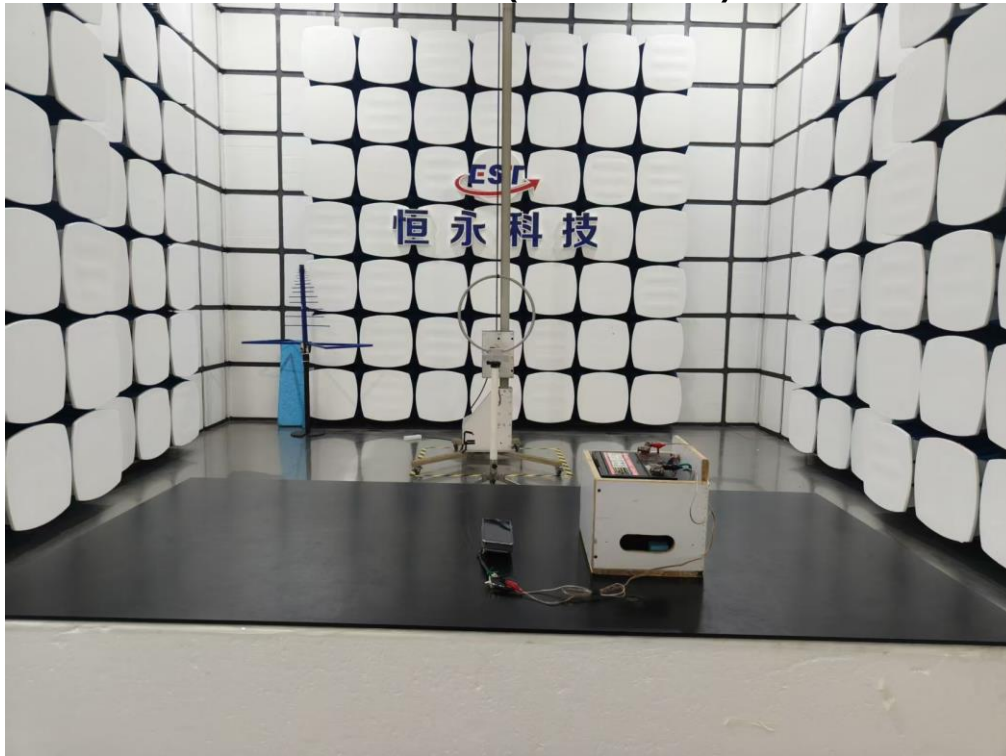


Radiated Test (Above 30MHz)


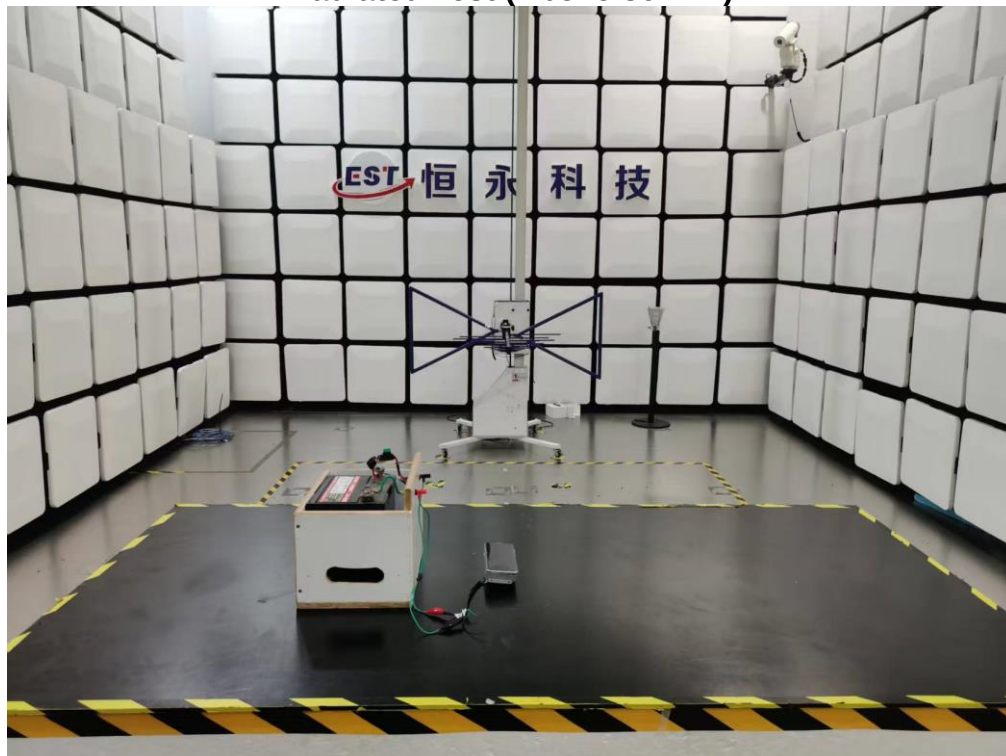


7. EUT PHOTO



External Photos M/N: GST868003

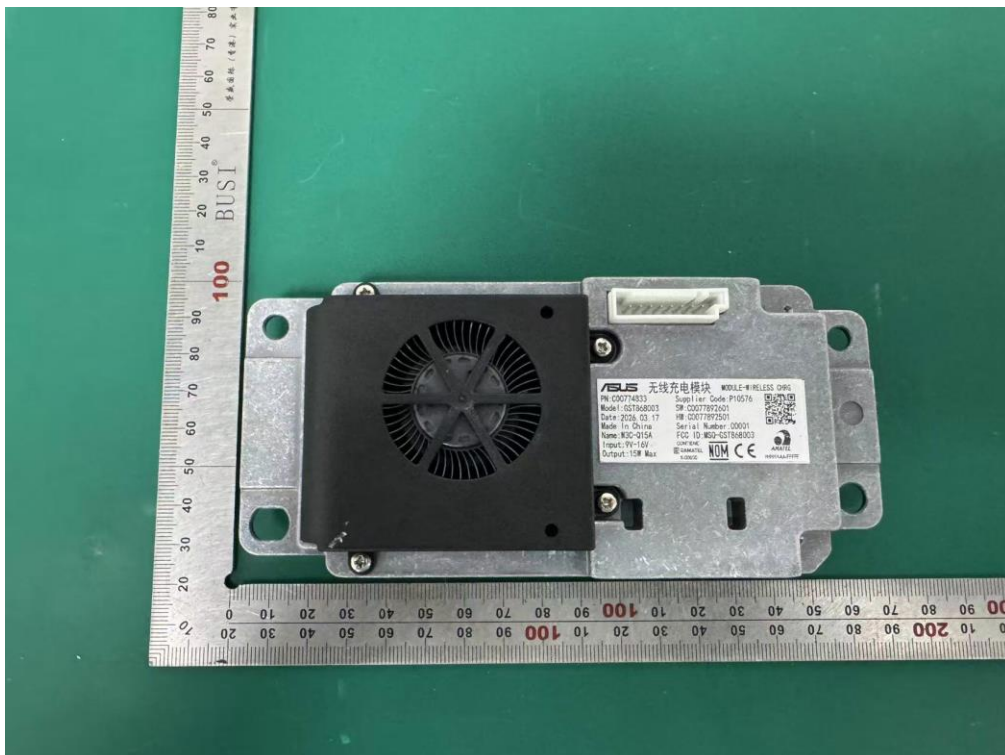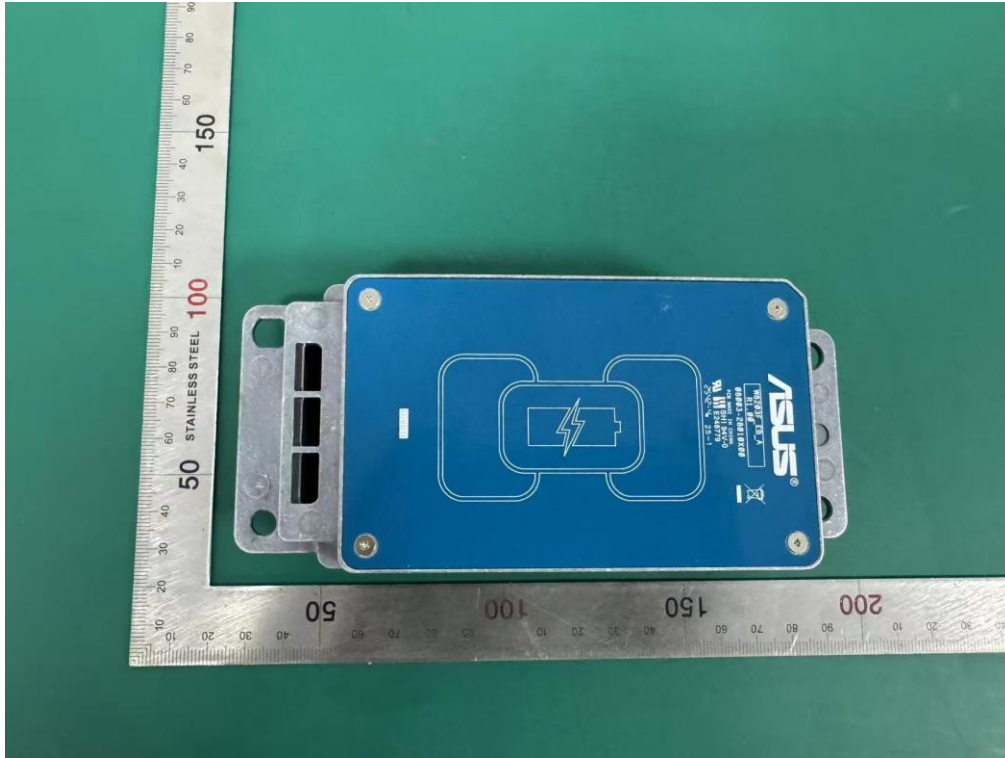



External Photos
M/N: GST868003

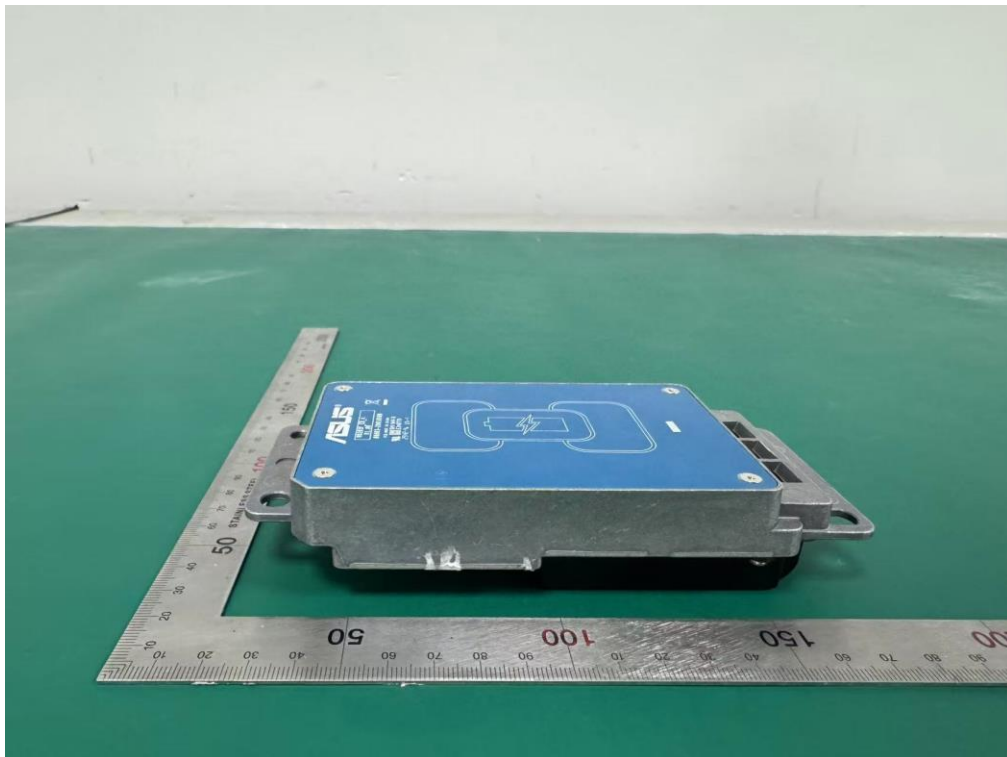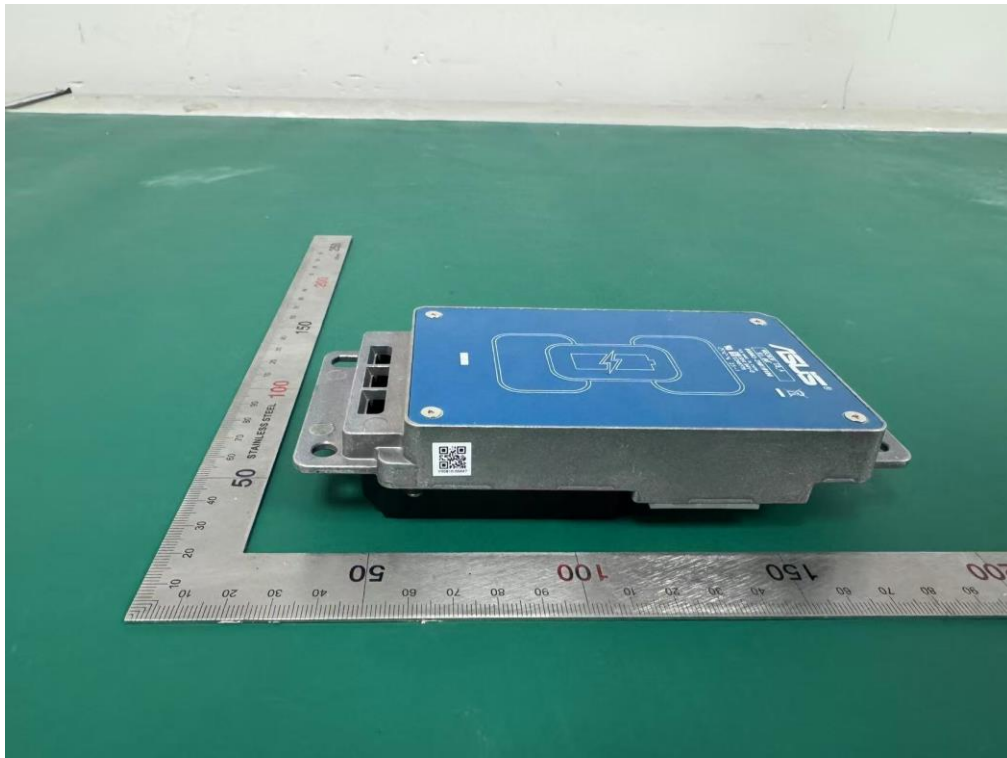


External Photos
M/N: GST868003

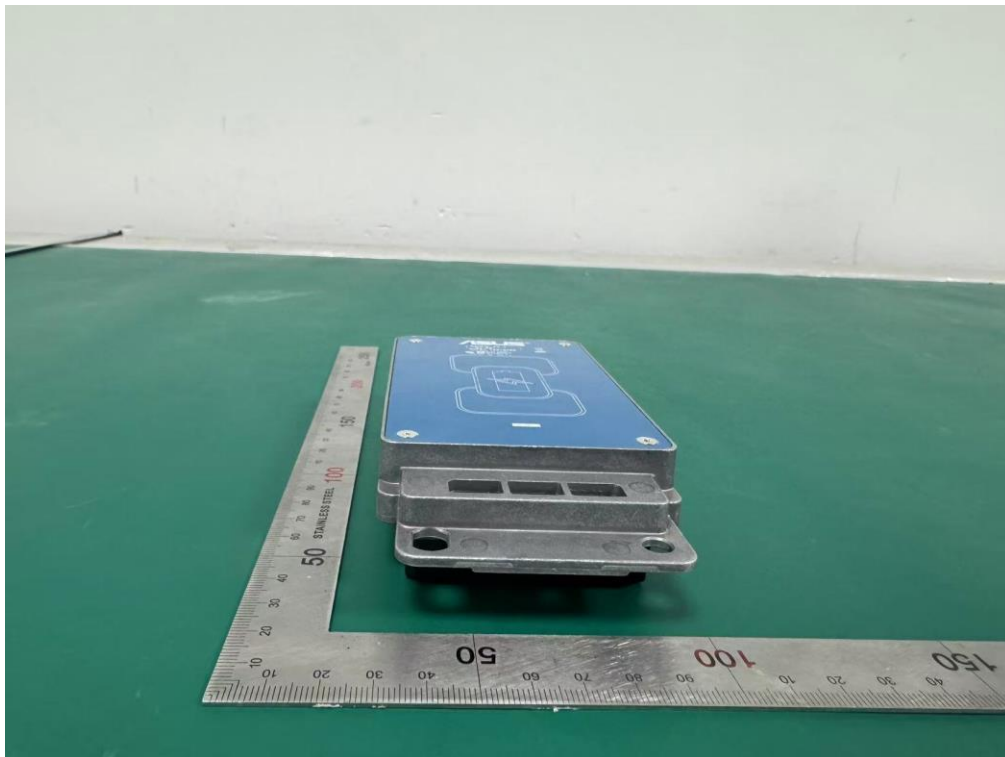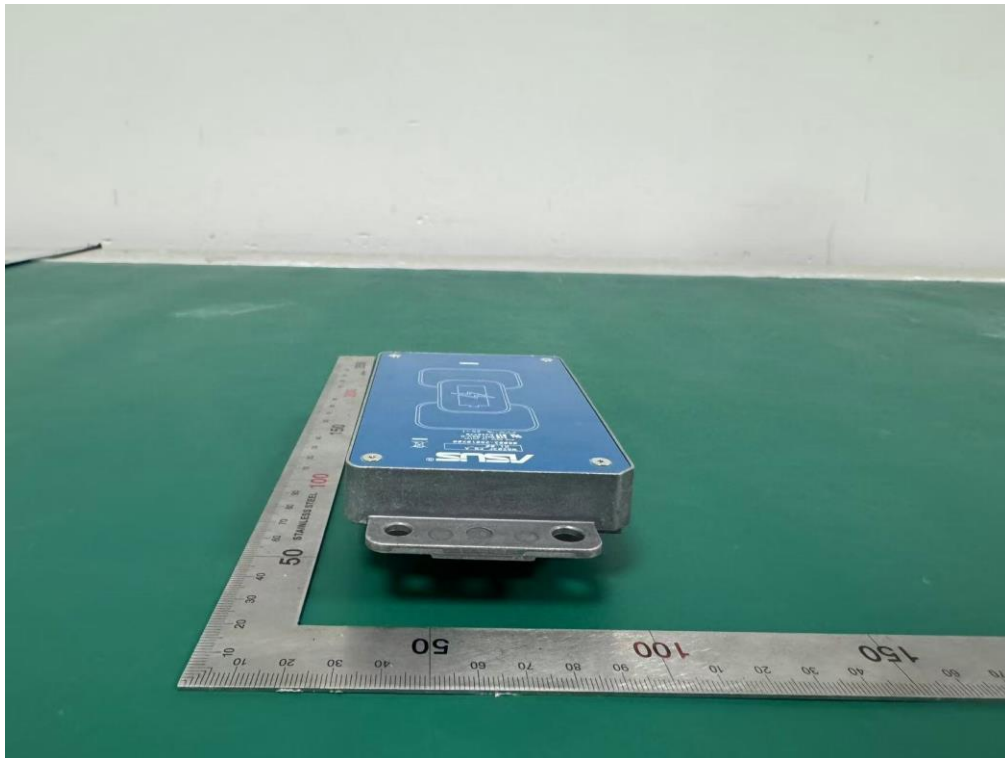


Internal Photos
M/N: GST868003

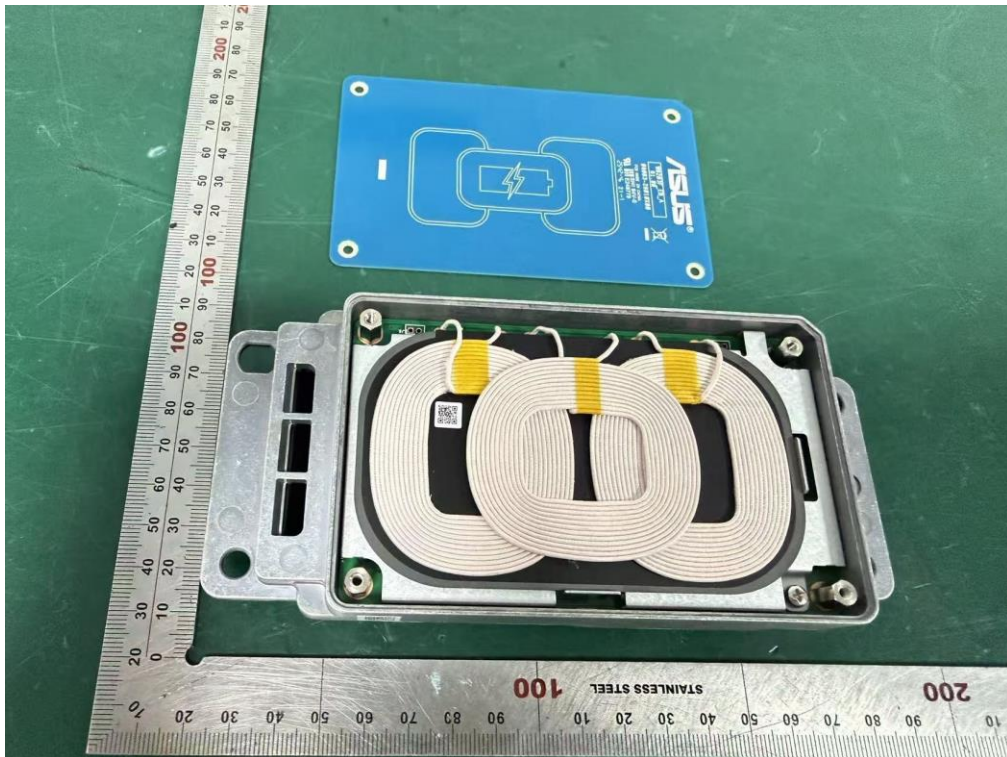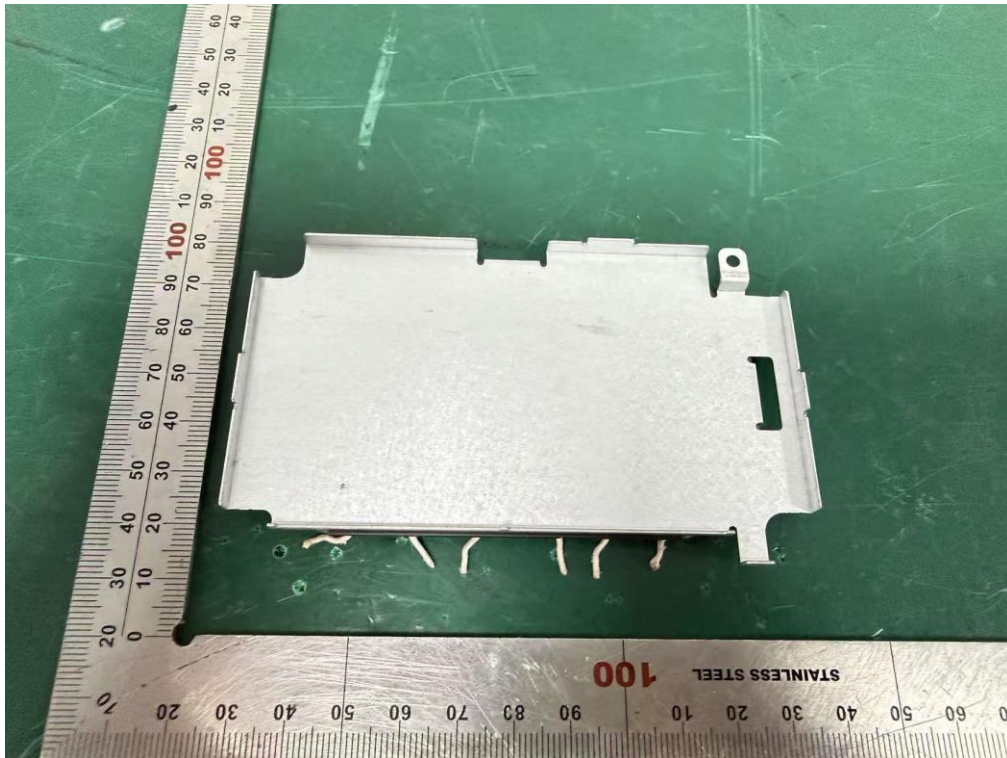


Internal Photos
M/N: GST868003

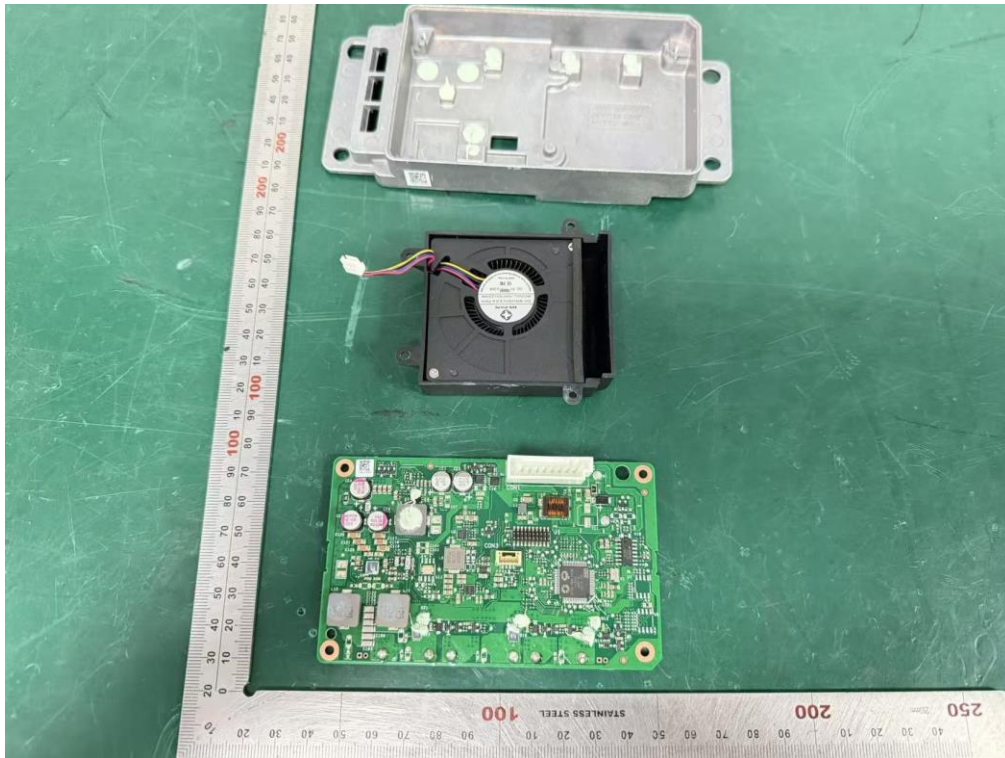

Internal Photos M/N: GST868003

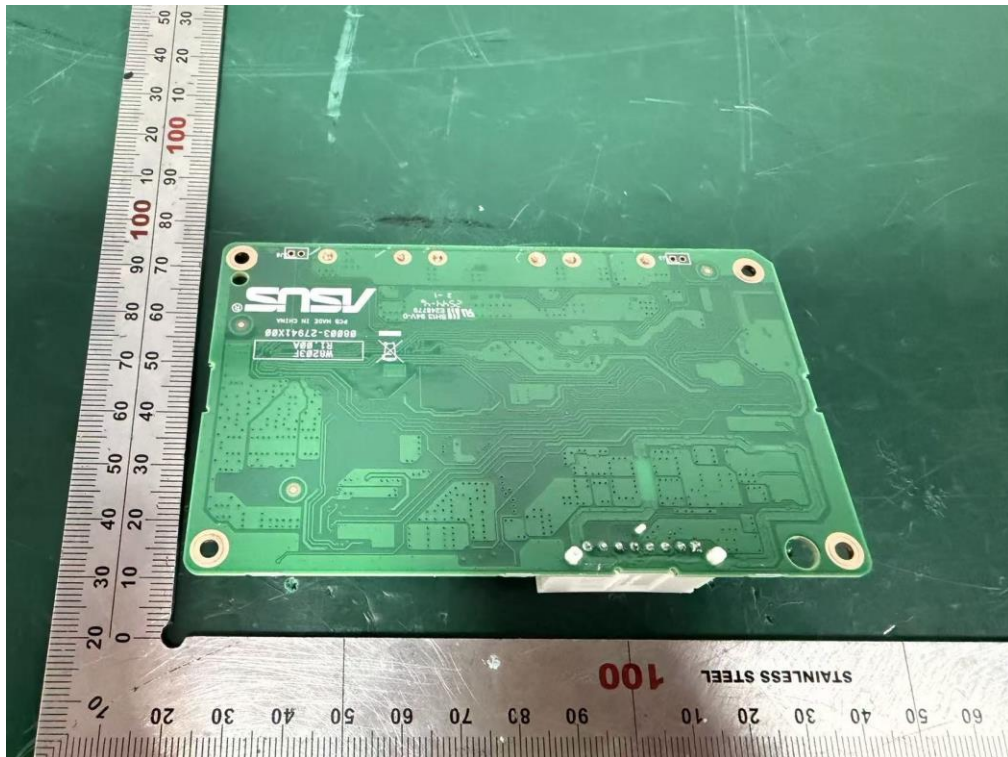

Internal Photos
M/N: GST868003

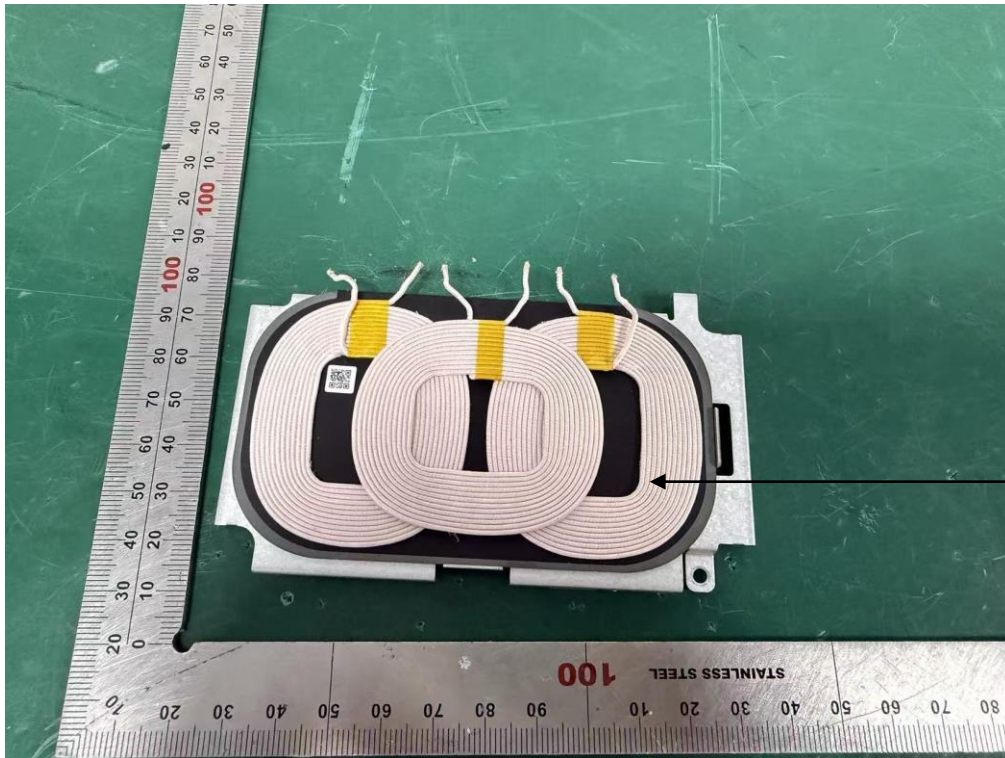

Coil
Antenna

End of Test Report