

FCC Test Report

FCC ID : MXF-F240WA
Equipment : 7368 ISAM CPE
Model No. : F-240W-A
Brand Name : Alcatel-Lucent
Applicant : Gemtek Technology Co., Ltd.
Address : No. 15-1 Zhonghua Road, Hsinchu Industrial
Park, Hukou, Hsinchu, Taiwan, 30352.
Standard : 47 CFR FCC Part 15.407
Received Date : Jun. 10, 2015
Tested Date : Jun. 23 ~ Jul. 07, 2015

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:


Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	8
1.4	The Equipment List	9
1.5	Testing Applied Standards	10
1.6	Measurement Uncertainty	10
2	TEST CONFIGURATION	11
2.1	Testing Condition	11
2.2	The Worst Test Modes and Channel Details	12
3	TRANSMITTER TEST RESULTS.....	14
3.1	Conducted Emissions.....	14
3.2	Emission Bandwidth	23
3.3	RF Output Power	28
3.4	Peak Power Spectral Density	31
3.5	Transmitter Radiated and Band Edge Emissions	37
3.6	Frequency Stability	72
4	TEST LABORATORY INFORMATION	75

Release Record

Report No.	Version	Description	Issued Date
FR561002AN	Rev. 01	Initial issue	Sep. 10, 2015

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.438MHz 38.91 (Margin -8.19dB) - AV	Pass
15.407(b) 15.209	Radiated Emissions	Non-beamforming mode [dBuV/m at 3m]: 5150.00MHz 52.88 (Margin -1.12dB) – AV Beamforming mode [dBuV/m at 3m]: 5860.00MHz 52.98 (Margin -1.02dB) – AV	Pass
15.407(a)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(e)	6dB bandwidth	Meet the requirement of limit	Pass
15.407(a)	RF Output Power	Max Power [dBm]: Non-beamforming mode 5150-5250MHz: 27.30 5725-5850MHz: 25.28 Beamforming mode 5150-5250MHz: 25.17 5725-5850MHz: 25.18	Pass
15.407(a)	Peak Power Spectral Density	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
5150-5250	n (HT40)	5190-5230	38-46 [2]	4	MCS 0-31
5150-5250	ac (VHT40)	5190-5230	38-46 [2]	4	MCS 0-9
5150-5250	ac (VHT80)	5210	42 [1]	4	MCS 0-9

Note 1: RF output power specifies that Maximum Conducted Output Power.
 Note 2: 802.11n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
 Note 3: 802.11ac supports beamforming function.

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
5725-5850	n (HT40)	5755-5795	151-159 [2]	4	MCS 0-31
5725-5850	ac (VHT40)	5755-5795	151-159 [2]	4	MCS 0-9
5725-5850	ac (VHT80)	5775	155 [1]	4	MCS 0-9

Note 1: RF output power specifies that Maximum Conducted Output Power.
 Note 2: 802.11n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
 Note 3: 802.11ac supports beamforming function.

1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Operating Frequency (MHz) / Gain (dBi)		
				2400~2483.5	5150~5250	5725~5850
1	WVVDDB-104ACN Wi-Fi ant_1	Dipole	IPEX	3.74	---	---
2	WVVDDB-104ACN Wi-Fi ant_2	Dipole	IPEX	3.02	---	---
3	WVVDDB-104ACN Wi-Fi ant_3	Dipole	IPEX	3.71	---	---
4	WVVDDB-104ACN Wi-Fi ant_4	Dipole	IPEX	---	4.47	4.15
5	WVVDDB-104ACN Wi-Fi ant_5	Dipole	IPEX	---	3.78	4.03
6	WVVDDB-104ACN Wi-Fi ant_6	Dipole	IPEX	---	4.71	4.84
7	WVVDDB-104ACN Wi-Fi ant_7	Dipole	IPEX	---	4.13	4.80

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	12Vdc from adapter
--------------------------	--------------------

1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	AC Adapter	Brand Name: FSP GROUP INC Model Name: FSP090-AHAT2 I/P: 100-240Vac, 50-60Hz, 1.2A O/P: 12Vdc, 7.5A Power Line: DC 1.92m non-shielded cable with one core AC 1.5m non-shielded cable w/o core
2	RJ45 cable	1.45m non-shielded cable w/o core
3	RJ11 - A	1.76m non-shielded cable w/o core
4	RJ11 - B	1.45m non-shielded cable w/o core
5	Cradle	---

1.1.5 Channel List

For Frequency band 5150-5250 MHz		For Frequency band 5725~5850 MHz	
HT40 / VHT40		HT40 / VHT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
38	5190	151	5755
46	5230	159	5795
VHT 80		VHT80	
42	5210	155	5775

1.1.6 Test Tool and Duty Cycle

Test Tool	telnet				
Duty Cycle and Duty Factor	Mode	Beamforming		Non-Beamforming	
		Duty cycle (%)	Duty factor (dB)	Duty cycle (%)	Duty factor (dB)
	VHT40	88.60%	0.53	99.30%	0.03
	VHT80	86.57%	0.63	92.33%	0.35

1.1.7 Power Setting


For Frequency band 5150-5250 MHz			
Modulation Mode	Test Frequency (MHz)	Power Set	
		Beamforming	Non-Beamforming
HT40	5190	---	14
HT40	5230	---	21
VHT40	5190	16	14
VHT40	5230	19	21
VHT80	5210	13	13

For Frequency band 5725~5850 MHz			
Modulation Mode	Test Frequency (MHz)	Power Set	
		Beamforming	Non-Beamforming
HT40	5755	---	15
HT40	5795	---	19
VHT40	5755	15	15
VHT40	5795	19	19
VHT80	5775	15	14

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6430	DoC	RJ45, 10m non-shielded.
2	Notebook	DELL	Latitude E5420	DoC	RJ45, 10m non-shielded.
3	USB 2.0 flash	Kingston	DTSE9	---	---
4	USB 2.0 flash	Kingston	DTSE9	---	---

1.3 Test Setup Chart

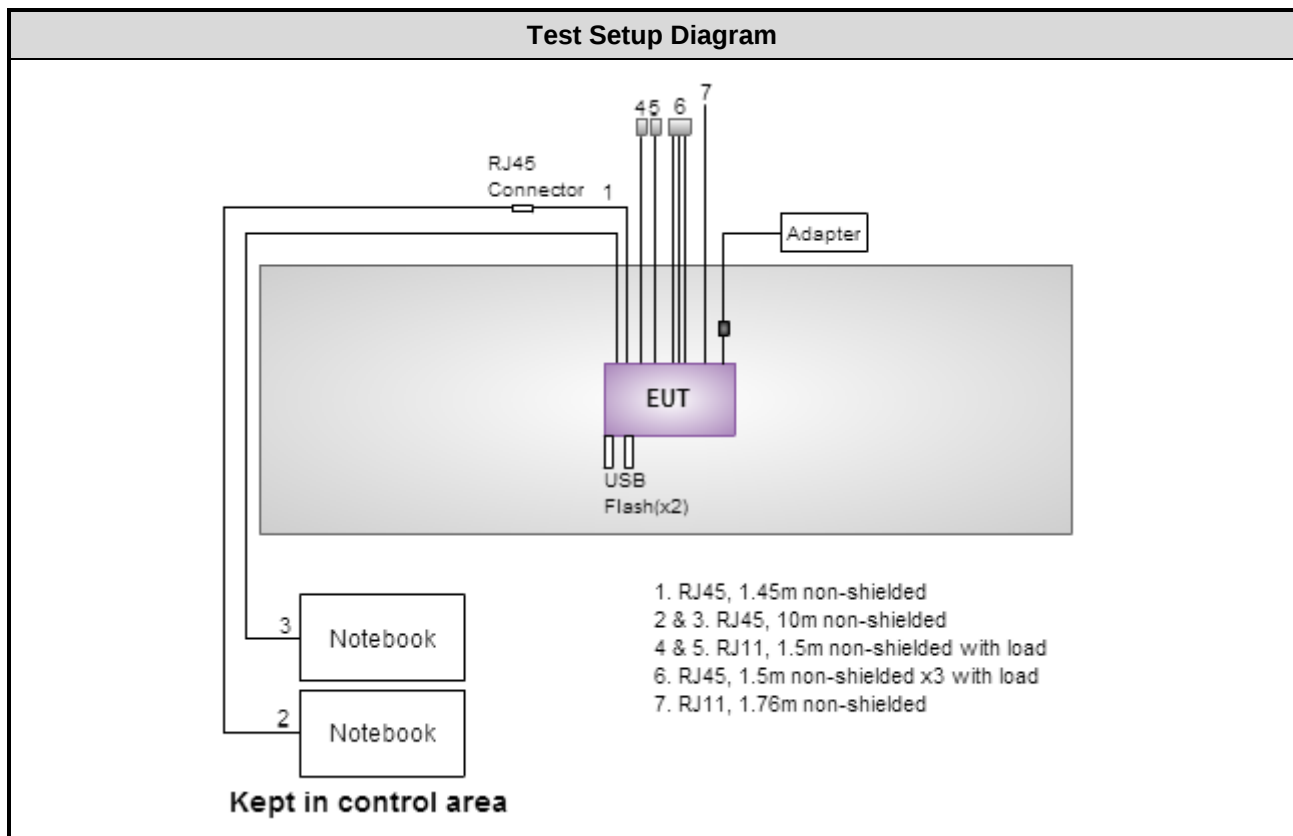

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 17, 2014	Oct. 16, 2015
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 17, 2014	Nov. 16, 2015
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Nov. 26, 2014	Nov. 25, 2015
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 31, 2014	Dec. 30, 2015
50 ohm terminal (Support Unit)	NA	50	04	Apr. 15, 2015	Apr. 14, 2016
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 09, 2014	Dec. 08, 2015
Receiver	R&S	ESR3	101658	Nov. 10, 2014	Nov. 09, 2015
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Sep. 05, 2014	Sep. 04, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 11, 2014	Dec. 10, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 10, 2014	Nov. 09, 2015
Loop Antenna	R&S	HFH2-Z2	11900	Nov. 10, 2014	Nov. 09, 2015
Preamplifier	Burgeon	BPA-530	SN:100219	Sep. 09, 2014	Sep. 08, 2015
Preamplifier	Agilent	83017A	MY39501308	Oct. 09, 2014	Oct. 08, 2015
Preamplifier	EMC	EMC184045B	980192	Aug. 26, 2014	Aug. 25, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 15, 2014	Dec. 14, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 15, 2014	Dec. 14, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 15, 2014	Dec. 14, 2015
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 15, 2014	Dec. 14, 2015
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 15, 2014	Dec. 14, 2015
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Feb. 03, 2015	Feb. 02, 2016
Power Meter	Anritsu	ML2495A	1241002	Sep. 29, 2014	Sep. 28, 2015
Power Sensor	Anritsu	MA2411B	1207366	Sep. 29, 2014	Sep. 28, 2015
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Testing Applied Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.407

ANSI C63.10-2013

FCC 789033 D02 General UNII Test Procedures New Rules v01

FCC KDB 644545 D03 Guidance for IEEE 802.11ac New Rules v01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.134 Hz
Conducted power	± 0.808 dB
Frequency error	± 34.134 Hz
Power density	± 0.463 dB
Conducted emission	± 2.670 dB
AC conducted emission	± 2.92 dB
Radiated emission ≤ 1 GHz	± 3.72 dB
Radiated emission > 1 GHz	± 5.65 dB
Time	$\pm 0.1\%$
Temperature	± 0.6 °C

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 64%	Kevin Ma
Radiated Emissions	03CH01-WS	22-26°C / 63-66%	Felix Sung Morgan Chen
RF Conducted	TH01-WS	22°C / 66%	Brad Wu

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Non-beamforming mode

For Frequency band 5150-5250 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	VHT40	5230	MCS 0	---
Radiated Emissions ≤ 1 GHz	VHT40	5230	MCS 0	---
RF Output Power	HT40	5190 / 5230	MCS 0	---
	VHT40	5190 / 5230	MCS 0	
	VHT80	5210	MCS 0	
Radiated Emissions > 1 GHz Emission Bandwidth Peak Power Spectral Density	VHT40	5190 / 5230	MCS 0	---
	VHT80	5210	MCS 0	
Frequency Stability	Un-modulation	5200	---	---

NOTE: The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.

For Frequency band 5725-5850 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	VHT40	5795	MCS 0	---
Radiated Emissions ≤ 1 GHz	VHT40	5795	MCS 0	---
RF Output Power	HT40	5755 / 5795	MCS 0	---
	VHT40	5755 / 5795	MCS 0	
	VHT80	5775	MCS 0	
Radiated Emissions > 1 GHz Emission Bandwidth 6dB bandwidth Peak Power Spectral Density	VHT40	5755 / 5795	MCS 0	---
	VHT80	5775	MCS 0	
Frequency Stability	Un-modulation	5785	---	---

NOTE: The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.

Beamforming mode

For Frequency band 5150-5250 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	VHT40	5230	MCS 0	---
Radiated Emissions ≤ 1 GHz	VHT40	5230	MCS 0	---
RF Output Power	VHT40	5190 / 5230	MCS 0	---
	VHT80	5210	MCS 0	
Radiated Emissions > 1 GHz Emission Bandwidth Peak Power Spectral Density	VHT40	5190 / 5230	MCS 0	---
	VHT80	5210	MCS 0	---
Frequency Stability	Un-modulation	5200	---	---
NOTE: The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.				

For Frequency band 5725-5850 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	VHT40	5795	MCS 0	---
Radiated Emissions ≤ 1 GHz	VHT40	5795	MCS 0	---
RF Output Power	VHT40	5755 / 5795	MCS 0	---
	VHT80	5775	MCS 0	
Radiated Emissions > 1 GHz Emission Bandwidth 6dB bandwidth Peak Power Spectral Density	VHT40	5755 / 5795	MCS 0	---
	VHT80	5775	MCS 0	---
Frequency Stability	Un-modulation	5785	---	---
NOTE: The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.				

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

3.1.3 Test Setup

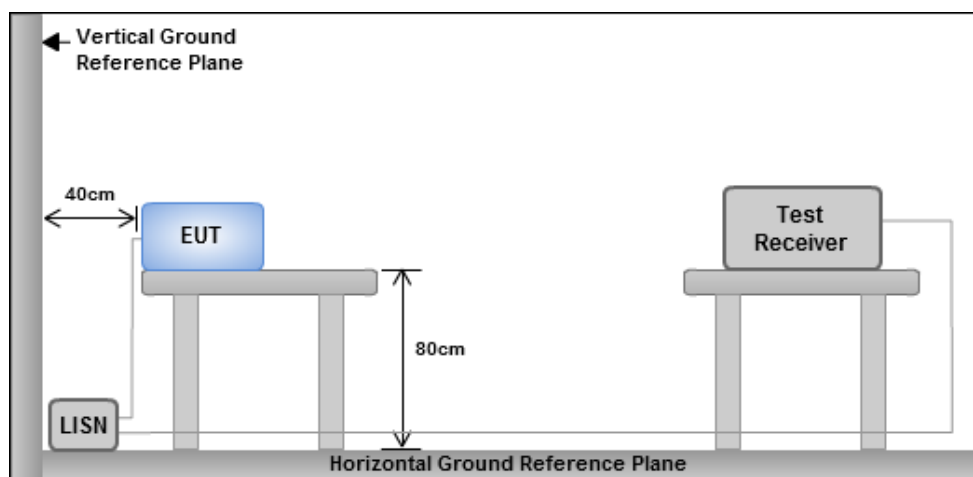


- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

Non- beamforming mode

Modulation	VHT40	Test Freq. (MHz)	5230
Power Phase	Line		

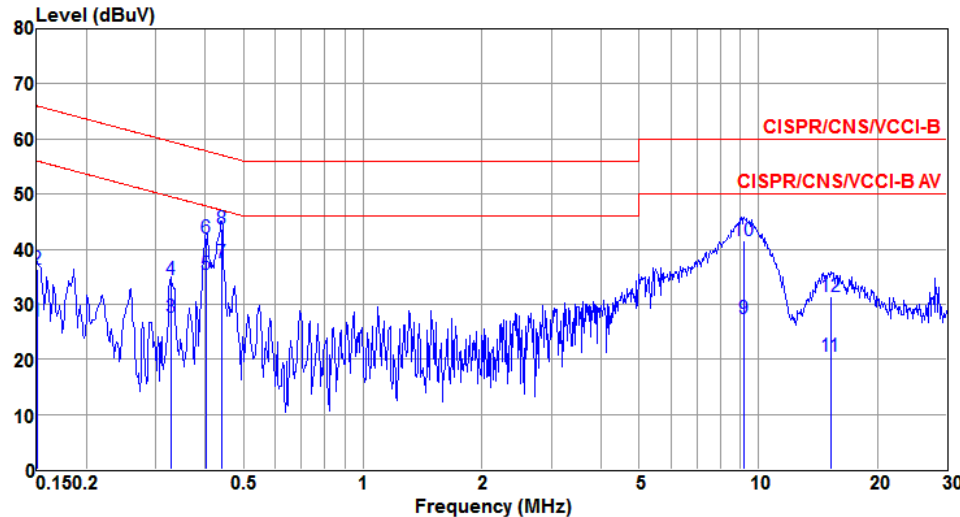


Freq	Level	Limit	Over	Read	LISN	cable		
MHz	dBuV	Line	Limit	Level	factor	loss	Remark	
		dBuV	dB	dBuV	dB	dB		
1	0.150	26.86	56.00	-29.14	26.71	0.07	0.08	Average
2	0.150	36.43	66.00	-29.57	36.28	0.07	0.08	QP
3	0.328	27.59	49.50	-21.91	27.42	0.07	0.10	Average
4	0.328	34.51	59.50	-24.99	34.34	0.07	0.10	QP
5	0.401	35.45	47.83	-12.38	35.27	0.07	0.11	Average
6	0.401	41.96	57.83	-15.87	41.78	0.07	0.11	QP
7*	0.438	37.45	47.09	-9.64	37.27	0.07	0.11	Average
8	0.438	43.78	57.09	-13.31	43.60	0.07	0.11	QP
9	9.204	27.30	50.00	-22.70	26.80	0.20	0.30	Average
10	9.204	41.51	60.00	-18.49	41.01	0.20	0.30	QP
11	15.226	20.50	50.00	-29.50	20.03	0.28	0.19	Average
12	15.226	31.50	60.00	-28.50	31.03	0.28	0.19	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).


Modulation	VHT40	Test Freq. (MHz)	5230
Power Phase	Neutral		

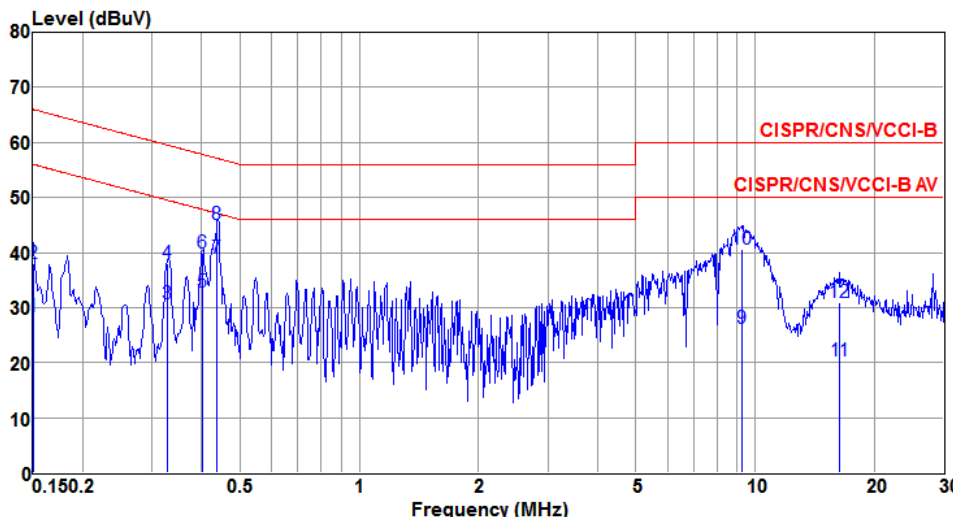

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.150	28.24	56.00	-27.76	28.09	0.07	0.08	Average
2	0.150	37.94	66.00	-28.06	37.79	0.07	0.08	QP
3	0.328	30.58	49.51	-18.93	30.41	0.07	0.10	Average
4	0.328	38.04	59.51	-21.47	37.87	0.07	0.10	QP
5	0.401	32.80	47.82	-15.02	32.62	0.07	0.11	Average
6	0.401	39.88	57.82	-17.94	39.70	0.07	0.11	QP
7*	0.438	38.91	47.10	-8.19	38.73	0.07	0.11	Average
8	0.438	45.06	57.10	-12.04	44.88	0.07	0.11	QP
9	9.253	26.11	50.00	-23.89	25.59	0.22	0.30	Average
10	9.253	40.69	60.00	-19.31	40.17	0.22	0.30	QP
11	16.398	20.34	50.00	-29.66	19.89	0.31	0.14	Average
12	16.398	30.91	60.00	-29.09	30.46	0.31	0.14	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation	VHT40	Test Freq. (MHz)	5795
Power Phase	Line		

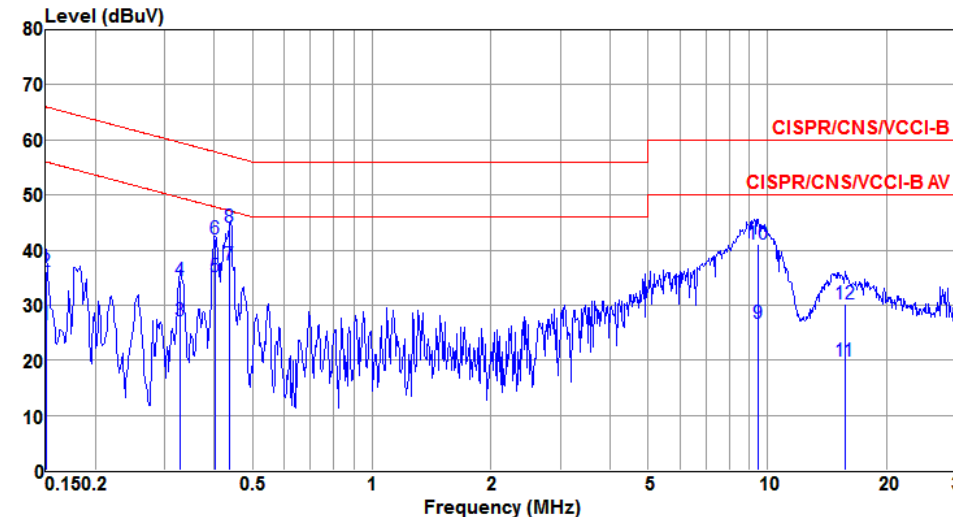

	Freq	Level	Limit	Over	Read	LISN	cable	
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark
			dBuV	dB	dBuV	dB	dB	
1	0.150	26.33	56.00	-29.67	26.18	0.07	0.08	Average
2	0.150	36.23	66.00	-29.77	36.08	0.07	0.08	QP
3	0.328	27.15	49.50	-22.35	26.98	0.07	0.10	Average
4	0.328	34.55	59.50	-24.95	34.38	0.07	0.10	QP
5	0.401	35.09	47.83	-12.74	34.91	0.07	0.11	Average
6	0.401	42.06	57.83	-15.77	41.88	0.07	0.11	QP
7*	0.437	37.38	47.12	-9.74	37.20	0.07	0.11	Average
8	0.437	44.03	57.12	-13.09	43.85	0.07	0.11	QP
9	9.451	26.67	50.00	-23.33	26.17	0.20	0.30	Average
10	9.451	41.07	60.00	-18.93	40.57	0.20	0.30	QP
11	15.718	19.77	50.00	-30.23	19.32	0.28	0.17	Average
12	15.718	30.29	60.00	-29.71	29.84	0.28	0.17	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

Modulation	VHT40	Test Freq. (MHz)	5795
Power Phase	Neutral		

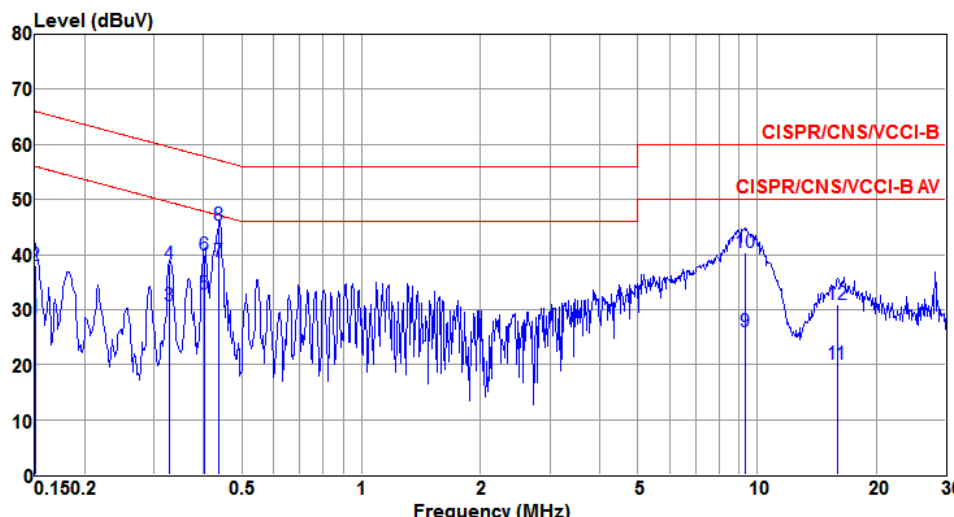


Freq	Level	Limit	Over	Read	LISN	cable	Remark	
MHz	dBuV	Line	Limit	Level	factor	loss		
		dBuV	dB	dBuV	dB	dB		
1	0.150	28.45	56.00	-27.55	28.30	0.07	0.08	Average
2	0.150	38.00	66.00	-28.00	37.85	0.07	0.08	QP
3	0.328	30.75	49.50	-18.75	30.58	0.07	0.10	Average
4	0.328	38.16	59.50	-21.34	37.99	0.07	0.10	QP
5	0.401	32.86	47.82	-14.96	32.68	0.07	0.11	Average
6	0.401	40.00	57.82	-17.82	39.82	0.07	0.11	QP
7*	0.437	38.65	47.12	-8.47	38.47	0.07	0.11	Average
8	0.437	45.23	57.12	-11.89	45.05	0.07	0.11	QP
9	9.352	25.89	50.00	-24.11	25.37	0.22	0.30	Average
10	9.352	40.38	60.00	-19.62	39.86	0.22	0.30	QP
11	15.970	20.08	50.00	-29.92	19.62	0.30	0.16	Average
12	15.970	30.81	60.00	-29.19	30.35	0.30	0.16	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).

Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Beamforming mode


Modulation	VHT40	Test Freq. (MHz)	5230
Power Phase	Line		

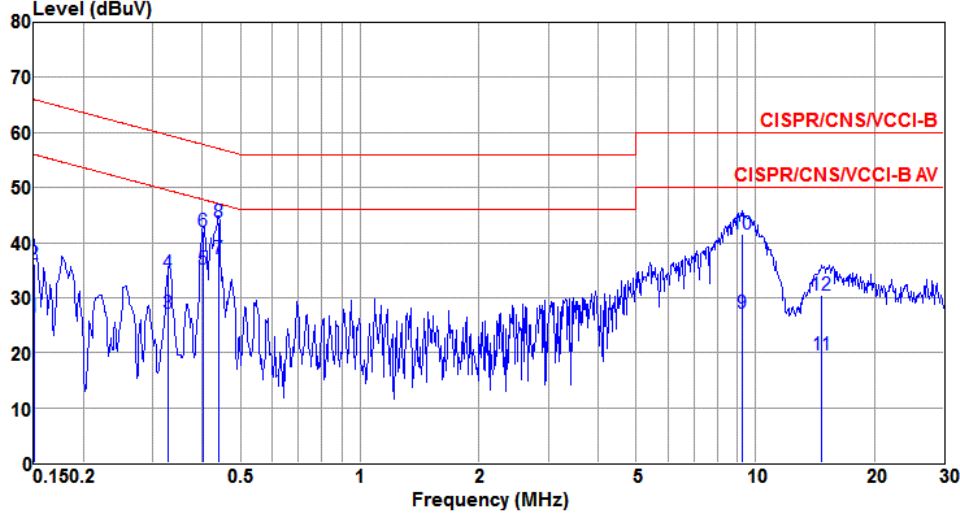

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.150	26.33	56.00	-29.67	26.18	0.07	0.08	Average
2	0.150	36.23	66.00	-29.77	36.08	0.07	0.08	QP
3	0.329	27.07	49.49	-22.42	26.90	0.07	0.10	Average
4	0.329	34.43	59.49	-25.06	34.26	0.07	0.10	QP
5	0.401	35.09	47.83	-12.74	34.91	0.07	0.11	Average
6	0.401	42.02	57.83	-15.81	41.84	0.07	0.11	QP
7*	0.438	36.95	47.09	-10.14	36.77	0.07	0.11	Average
8	0.438	43.76	57.09	-13.33	43.58	0.07	0.11	QP
9	9.253	27.12	50.00	-22.88	26.62	0.20	0.30	Average
10	9.253	41.54	60.00	-18.46	41.04	0.20	0.30	QP
11	14.750	19.57	50.00	-30.43	19.09	0.27	0.21	Average
12	14.750	30.41	60.00	-29.59	29.93	0.27	0.21	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).


Modulation	VHT40	Test Freq. (MHz)	5230
Power Phase	Neutral		

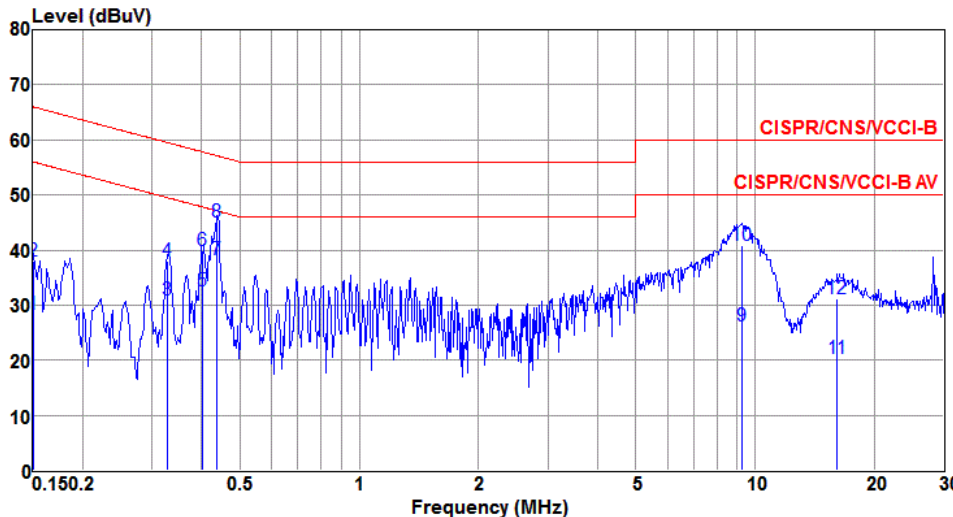

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.150	28.34	56.00	-27.66	28.19	0.07	0.08	Average
2	0.150	37.92	66.00	-28.08	37.77	0.07	0.08	QP
3	0.327	30.84	49.52	-18.68	30.67	0.07	0.10	Average
4	0.327	38.00	59.52	-21.52	37.83	0.07	0.10	QP
5	0.402	32.66	47.81	-15.15	32.48	0.07	0.11	Average
6	0.402	39.86	57.81	-17.95	39.68	0.07	0.11	QP
7*	0.437	38.29	47.11	-8.82	38.11	0.07	0.11	Average
8	0.437	45.13	57.11	-11.98	44.95	0.07	0.11	QP
9	9.253	26.11	50.00	-23.89	25.59	0.22	0.30	Average
10	9.253	40.73	60.00	-19.27	40.21	0.22	0.30	QP
11	16.140	20.23	50.00	-29.77	19.77	0.31	0.15	Average
12	16.140	31.16	60.00	-28.84	30.70	0.31	0.15	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation	VHT40	Test Freq. (MHz)	5795
Power Phase	Line		

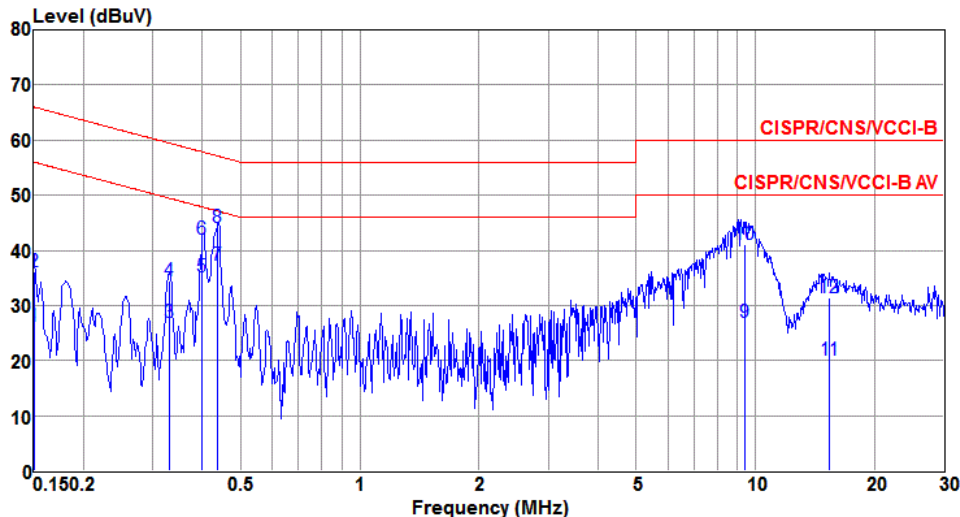

	Freq MHz	Level dBUV	Limit dBUV	Over Limit dB	Read Level dBUV	LISN factor dB	cable loss dB	Remark
1	0.150	26.26	56.00	-29.74	26.11	0.07	0.08	Average
2	0.150	36.19	66.00	-29.81	36.04	0.07	0.08	QP
3	0.329	27.01	49.48	-22.47	26.84	0.07	0.10	Average
4	0.329	34.45	59.48	-25.03	34.28	0.07	0.10	QP
5	0.400	35.10	47.85	-12.75	34.92	0.07	0.11	Average
6	0.400	41.95	57.85	-15.90	41.77	0.07	0.11	QP
7*	0.437	37.38	47.11	-9.73	37.20	0.07	0.11	Average
8	0.437	44.03	57.11	-13.08	43.85	0.07	0.11	QP
9	9.401	26.99	50.00	-23.01	26.49	0.20	0.30	Average
10	9.401	41.14	60.00	-18.86	40.64	0.20	0.30	QP
11	15.388	20.15	50.00	-29.85	19.69	0.28	0.18	Average
12	15.388	31.31	60.00	-28.69	30.85	0.28	0.18	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

Modulation	VHT40	Test Freq. (MHz)	5795
Power Phase	Neutral		

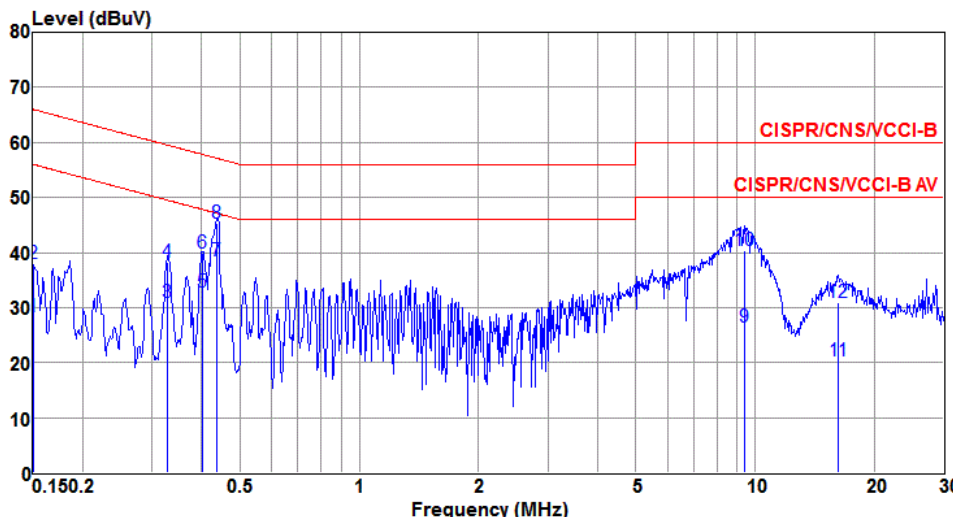

	Freq	Level	Limit	Over	Read	LISN	cable	
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark
			dBuV	dB	dBuV	dB	dB	
1	0.150	28.39	56.00	-27.61	28.24	0.07	0.08	Average
2	0.150	37.90	66.00	-28.10	37.75	0.07	0.08	QP
3	0.328	30.84	49.50	-18.66	30.67	0.07	0.10	Average
4	0.328	38.16	59.50	-21.34	37.99	0.07	0.10	QP
5	0.401	32.93	47.83	-14.90	32.75	0.07	0.11	Average
6	0.401	40.00	57.83	-17.83	39.82	0.07	0.11	QP
7*	0.437	38.57	47.11	-8.54	38.39	0.07	0.11	Average
8	0.437	45.25	57.11	-11.86	45.07	0.07	0.11	QP
9	9.401	26.32	50.00	-23.68	25.80	0.22	0.30	Average
10	9.401	40.30	60.00	-19.70	39.78	0.22	0.30	QP
11	16.226	20.40	50.00	-29.60	19.94	0.31	0.15	Average
12	16.226	31.04	60.00	-28.96	30.58	0.31	0.15	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

3.2 Emission Bandwidth

3.2.1 Limit of Emission bandwidth

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.2.2 Test Procedures

26dB Bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.


Occupied Bandwidth

1. Set RBW = 1 % to 5 % of the OBW
2. Set VBW $\geq$ 3 RBW
3. Sample detection and single sweep mode shall be used
4. Use the 99 % power bandwidth function of the instrument

6dB Bandwidth

1. Set RBW = 100kHz, VBW = 300kHz
2. Detector = Peak, Trace mode = max hold.
3. Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission


3.2.3 Test Setup



3.2.4 Test Result of Emission Bandwidth

Non- beamforming mode

For Frequency band 5150-5250 MHz										
Emission Bandwidth										
Mode	N _{TX}	Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)			
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3
VHT40	4	5190	44.29	44.06	44.29	43.59	37.08	36.84	36.98	36.78
VHT40	4	5230	61.16	75.65	73.91	75.94	37.26	37.34	37.56	37.40
VHT80	4	5210	83.71	80.93	83.25	83.01	75.72	75.40	75.60	75.76

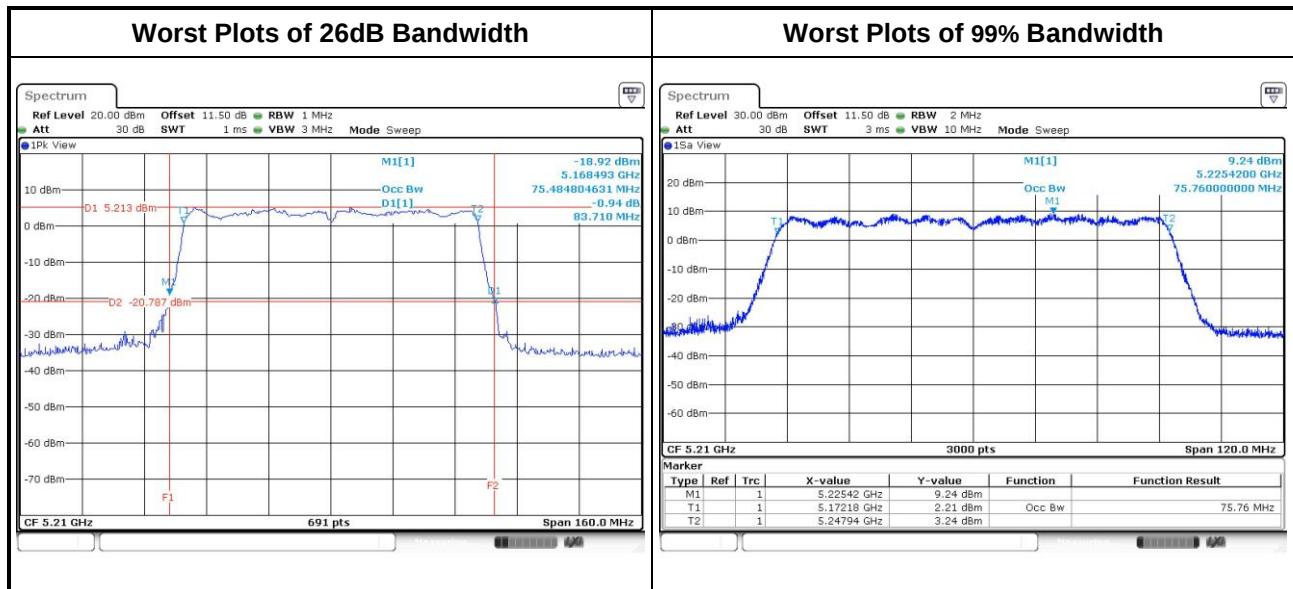


For Frequency band 5725-5850 MHz


Emission Bandwidth

Mode	N _{TX}	Freq. (MHz)	OBW Bandwidth (MHz)				6dB Bandwidth (MHz)				6dB BW Limit (MHz)
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	
VHT40	4	5755	37.12	36.80	36.94	36.74	36.41	36.17	36.41	36.17	0.5
VHT40	4	5795	37.26	36.94	37.18	36.86	36.41	36.17	36.41	36.06	0.5
VHT80	4	5775	75.56	75.28	75.52	75.72	75.13	75.13	75.13	75.13	0.5

Worst Plots of 99% Bandwidth

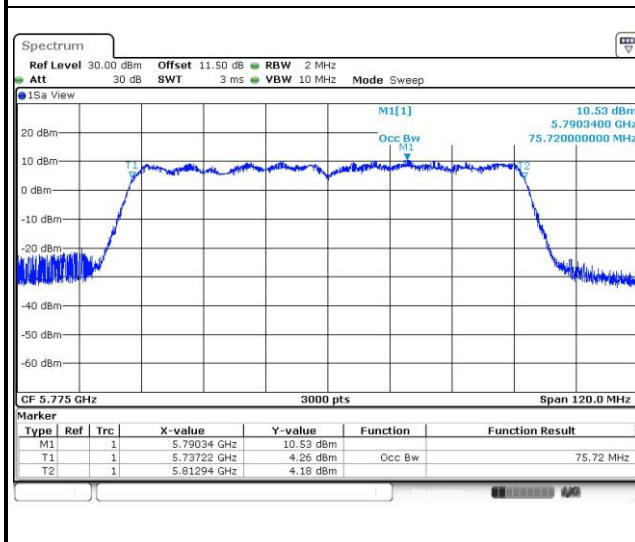


Worst Plots of 6dB Bandwidth

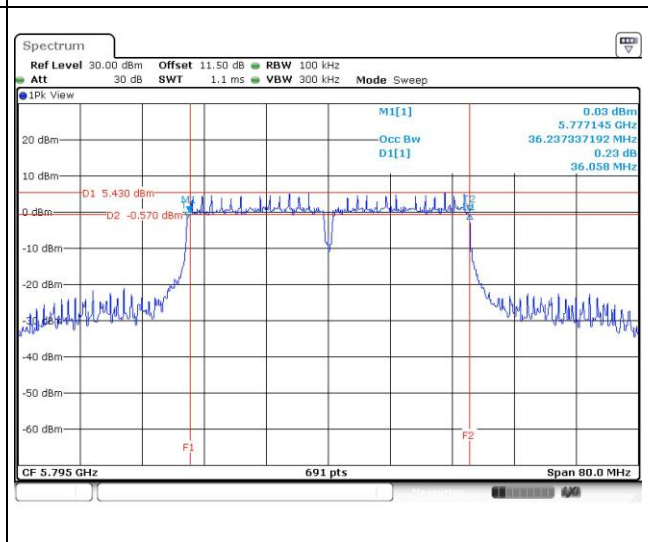

Beamforming mode

For Frequency band 5150-5250 MHz										
Emission Bandwidth										
Mode	N _{TX}	Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)			
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3
VHT40	4	5190	44.52	43.71	44.17	43.83	37.00	36.80	36.94	36.76
VHT40	4	5230	44.29	56.81	44.29	55.65	37.14	36.94	37.10	36.92
VHT80	4	5210	83.94	80.46	83.48	83.01	75.68	75.40	75.60	75.80

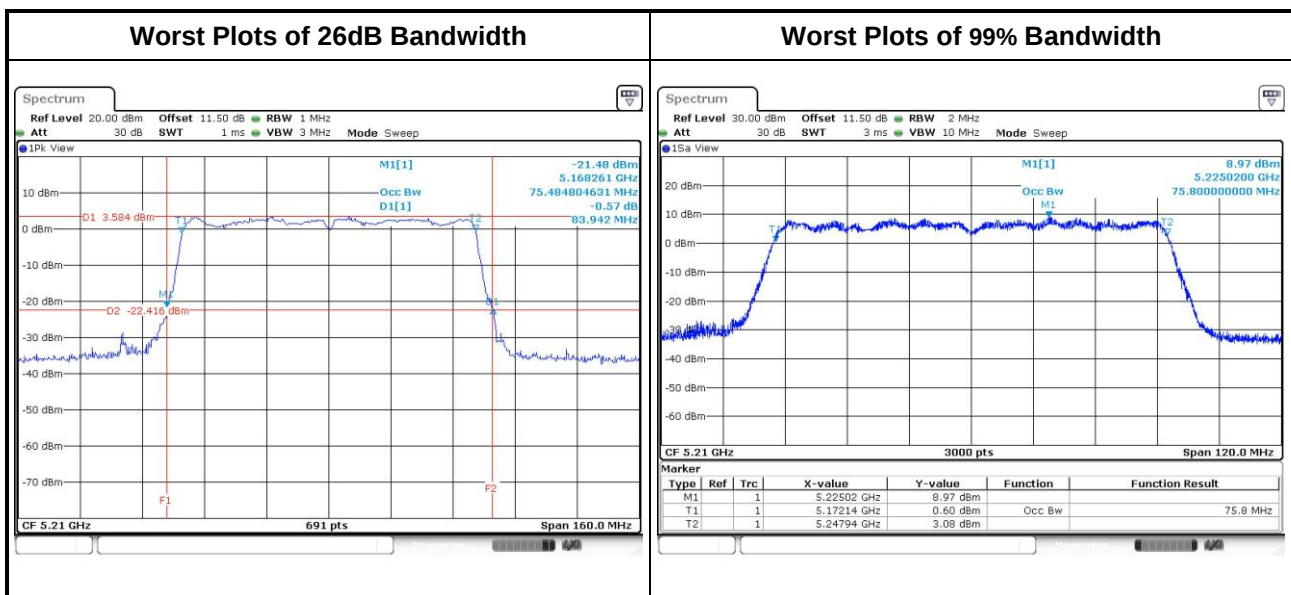


For Frequency band 5725-5850 MHz


Emission Bandwidth

Mode	N _{TX}	Freq. (MHz)	OBW Bandwidth (MHz)				6dB Bandwidth (MHz)				6dB BW Limit (MHz)
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	
VHT40	4	5755	37.14	36.80	36.94	36.72	36.41	36.17	36.41	36.17	0.5
VHT40	4	5795	37.32	36.96	37.24	36.92	36.41	36.17	36.41	36.06	0.5
VHT80	4	5775	75.64	75.32	75.56	75.68	75.13	75.13	75.13	75.13	0.5

Worst Plots of 99% Bandwidth

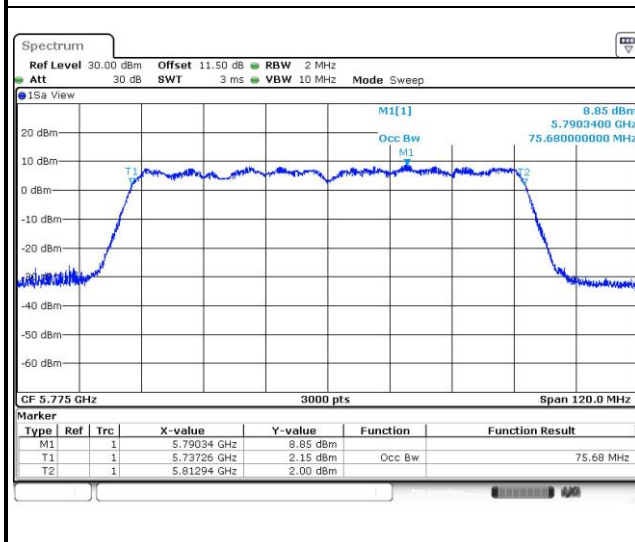

Worst Plots of 6dB Bandwidth

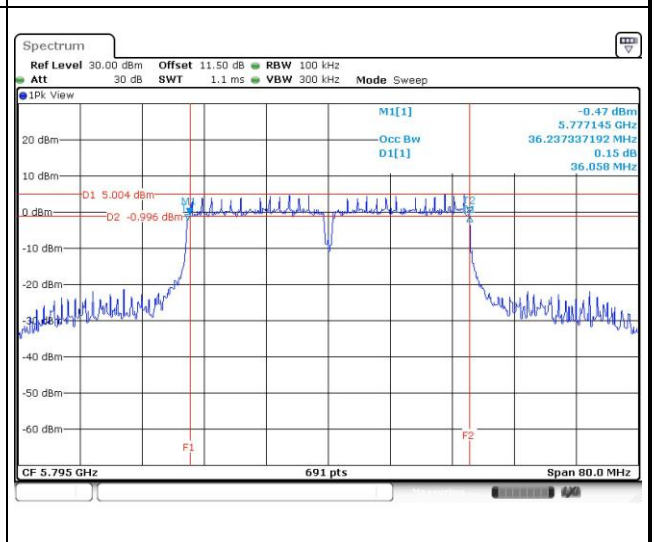

3.3 RF Output Power

3.3.1 Limit of RF Output Power

Frequency band 5150-5250 MHz		
Operating Mode		Limit
☐	Outdoor access point	Conducted Power: 1 W The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm)
☒	Indoor access point	Conducted Power: 1 W
☐	Fixed point-to-point access points	Conducted Power: 1 W
☐	Mobile and portable client devices	Conducted Power: 250 mW


Frequency Band (MHz)		Limit
☐	5250 ~ 5350	250mW or 11dBm+10 log B
☐	5470 ~ 5725	250mW or 11dBm+10 log B
☒	5725 ~ 5850	1 W

Note: "B" is the 26dB emission bandwidth in MHz.

3.3.2 Test Procedures

- ☒ **Method PM-G (Measurement using a gated RF average power meter)**
 - ☒ Measurements may is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.3.3 Test Setup



3.3.4 Test Result of Maximum Conducted Output Power

Non- beamforming mode

For Frequency band 5150-5250 MHz									
Mode	N _{TX}	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
HT40	4	5190	14.36	13.96	14.72	13.76	105.595	20.24	30.00
HT40	4	5230	20.66	21.41	21.75	20.92	527.988	27.23	30.00
VHT40	4	5190	14.41	14.02	14.75	13.86	107.016	20.29	30.00
VHT40	4	5230	20.73	21.48	21.82	21.01	537.146	27.30	30.00
VHT80	4	5210	13.73	12.71	13.44	13.12	84.860	19.29	30.00

For Frequency band 5725-5850 MHz									
Mode	N _{TX}	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
HT40	4	5755	15.48	15.35	15.28	15.12	135.833	21.33	30.00
HT40	4	5795	19.27	19.26	19.16	19.03	331.259	25.20	30.00
VHT40	4	5755	15.54	15.44	15.35	15.19	138.118	21.40	30.00
VHT40	4	5795	19.37	19.35	19.22	19.10	337.440	25.28	30.00
VHT80	4	5775	14.51	14.27	14.35	13.91	106.810	20.29	30.00

Beamforming mode

For Frequency band 5150-5250 MHz									
Mode	N _{TX}	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
VHT40	4	5190	12.46	12.01	12.88	12.15	69.320	18.41	25.70
VHT40	4	5230	18.98	18.85	19.52	19.21	328.709	25.17	25.70
VHT80	4	5210	13.07	12.60	13.09	13.21	79.785	19.02	25.70

Note:

- Directional gain = $10 * \log((10^{4.47/20} + 10^{3.78/20} + 10^{4.71/20} + 10^{4.13/20})^2 / 4) = 10.30 \text{ dBi} > 6 \text{ dBi}$.
Limit shall be reduced to $30 \text{ dBm} - (10.30 \text{ dBi} - 6 \text{ dBi}) = 25.70 \text{ dBm}$.

For Frequency band 5725-5850 MHz									
Mode	N _{TX}	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
VHT40	4	5755	13.35	13.33	13.26	13.20	85.232	19.31	25.52
VHT40	4	5795	19.45	19.24	18.93	19.01	329.830	25.18	25.52
VHT80	4	5775	12.61	13.51	13.03	13.11	81.233	19.10	25.52

Note:

- Directional gain = $10 * \log((10^{4.15/20} + 10^{4.03/20} + 10^{4.84/20} + 10^{4.8/20})^2 / 4) = 10.48 \text{ dBi} > 6 \text{ dBi}$.
Limit shall be reduced to $30 \text{ dBm} - (10.48 \text{ dBi} - 6 \text{ dBi}) = 25.52 \text{ dBm}$.

3.4 Peak Power Spectral Density

3.4.1 Limit of Peak Power Spectral Density

Frequency band 5150-5250 MHz		
Operating Mode		Limit
☐	Outdoor access point	17 dBm / MHz
☒	Indoor access point	17 dBm / MHz
☐	Fixed point-to-point access points	17 dBm / MHz
☐	Mobile and portable client devices	11 dBm / MHz

Frequency Band (MHz)		Limit
☐	5250 ~ 5350	11 dBm / MHz
☐	5470 ~ 5725	11 dBm / MHz
☒	5725 ~ 5850	30 dBm /500 kHz

3.4.2 Test Procedures


For 5150 ~ 5250 MHz

- ☒ Method SA-1 (Non- Beamforming: VHT40)
 1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
 2. Trace average 100 traces.
 3. Use the peak marker function to determine the maximum amplitude level.
- ☒ Method SA-2 Alternative (Non- Beamforming: VHT80 only / Beamforming: all modes)
 1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
 2. Set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$.
 3. Perform a single sweep.
 4. Use the peak marker function to determine the maximum amplitude level.
 5. Add $10 \log(1/x)$, where x is the duty cycle.

For 5725 ~ 5850 MHz

- ☒ Method SA-1 (Non- Beamforming: VHT40)
 1. Set RBW = 500 kHz, VBW = 2 MHz, Sweep time = auto, Detector = RMS.
 2. Trace average 100 traces.
 3. Use the peak marker function to determine the maximum amplitude level.
- ☒ Method SA-2 Alternative (Non- Beamforming: VHT80 only / Beamforming: all modes)
 1. Set RBW = 500 kHz, VBW = 2 MHz, Detector = RMS.
 2. Set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$.
 3. Perform a single sweep.
 4. Use the peak marker function to determine the maximum amplitude level.
 5. Add $10 \log(1/x)$, where x is the duty cycle.

3.4.3 Test Setup




3.4.4 Test Result of Peak Power Spectral Density

Non- beamforming mode

For Frequency band 5150-5250 MHz						
Condition			Peak Power Spectral Density (dBm/MHz)			
Modulation Mode	N _{TX}	Freq. (MHz)	PPSD w/o D.F (dBm/MHz)	Duty Factor (dB)	PPSD with D.F (dBm/MHz)	PPSD Limit (dBm/MHz)
VHT40	4	5190	4.57	0.00	4.57	12.7
VHT40	4	5230	11.15	0.00	11.15	12.7
VHT80	4	5210	0.38	0.35	0.73	12.7

Note:


1. D.F is duty factor.
2. Test result is bin-by-bin summing measured value of each TX port.
3. Directional gain = $10 * \log((10^{4.47/20} + 10^{3.78/20} + 10^{4.71/20} + 10^{4.13/20})^2 / 4) = 10.30 \text{ dBi} > 6 \text{ dBi}$.
Limit shall be reduced to $17 \text{ dBm} - (10.30 \text{ dBi} - 6 \text{ dBi}) = 12.7 \text{ dBm}$.

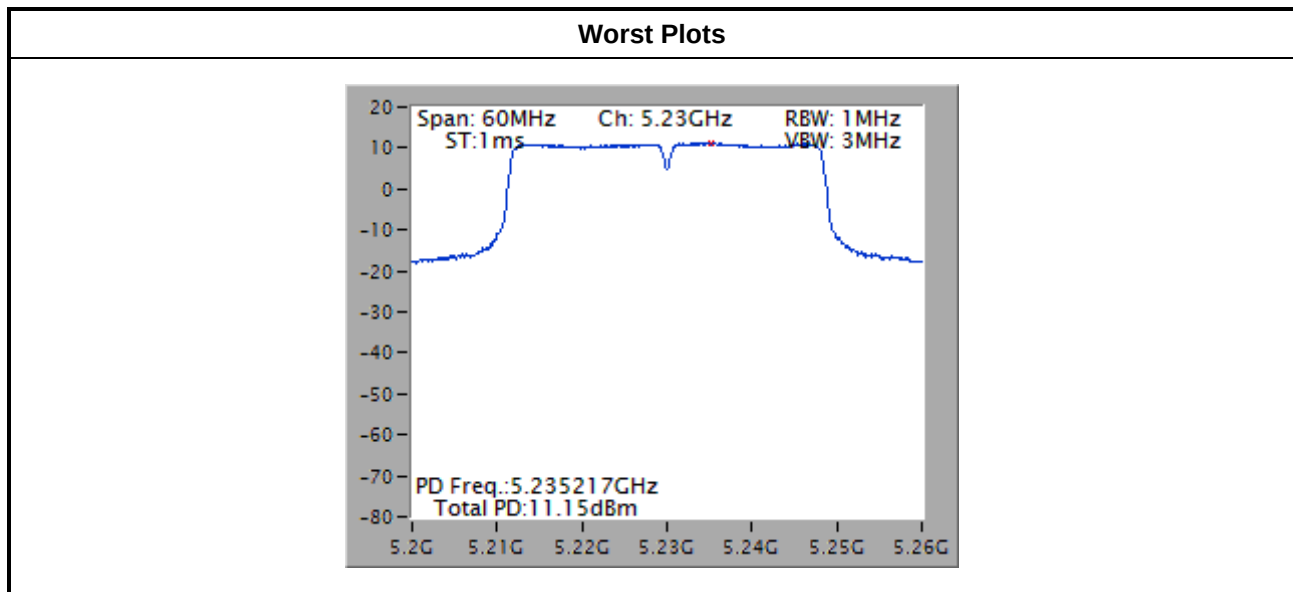

For Frequency band 5725-5850 MHz						
Condition			Peak Power Spectral Density (dBm/500kHz)			
Modulation Mode	N _{TX}	Freq. (MHz)	PPSD w/o D.F (dBm/500kHz)	Duty Factor (dB)	PPSD with D.F (dBm/500kHz)	PPSD Limit (dBm/500kHz)
VHT40	4	5755	4.04	0.00	4.04	25.52
VHT40	4	5795	7.71	0.00	7.71	25.52
VHT80	4	5775	0.02	0.35	0.37	25.52

Note:

1. D.F is duty factor.
2. Test result is bin-by-bin summing measured value of each TX port.
3. Directional gain = $10 * \log((10^{4.15/20} + 10^{4.03/20} + 10^{4.84/20} + 10^{4.8/20})^2 / 4) = 10.48 \text{ dBi} > 6 \text{ dBi}$.
Limit shall be reduced to $30 \text{ dBm} - (10.48 \text{ dBi} - 6 \text{ dBi}) = 25.52 \text{ dBm}$.

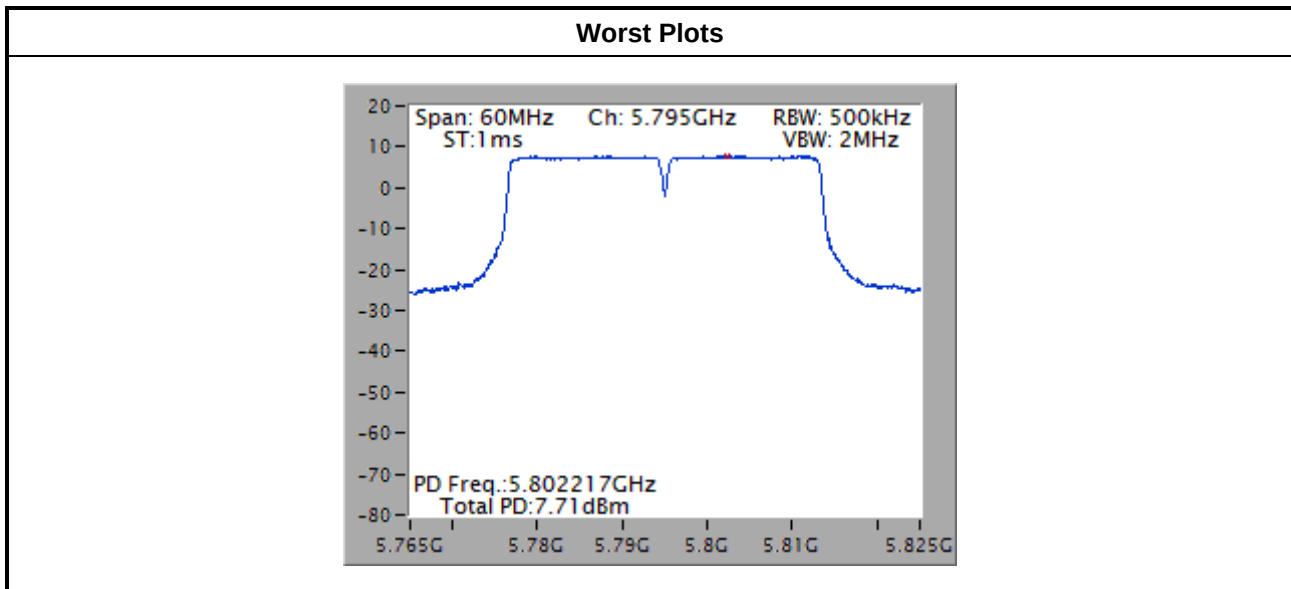


Beamforming mode

For Frequency band 5150-5250 MHz						
Condition			Peak Power Spectral Density (dBm/MHz)			
Modulation Mode	N _{TX}	Freq. (MHz)	PPSD w/o D.F (dBm/MHz)	Duty Factor (dB)	PPSD with D.F (dBm/MHz)	PPSD Limit (dBm/MHz)
VHT40	4	5190	1.51	0.53	2.04	12.7
VHT40	4	5230	10.88	0.53	11.41	12.7
VHT80	4	5210	-0.43	0.63	0.20	12.7

Note:

1. D.F is duty factor.
2. Test result is bin-by-bin summing measured value of each TX port.
3. Directional gain = $10 * \log((10^{4.47/20} + 10^{3.78/20} + 10^{4.71/20} + 10^{4.13/20})^2 / 4) = 10.30 \text{ dBi} > 6 \text{ dBi}$.
Limit shall be reduced to $17 \text{ dBm} - (10.30 \text{ dBi} - 6 \text{ dBi}) = 12.7 \text{ dBm}$.

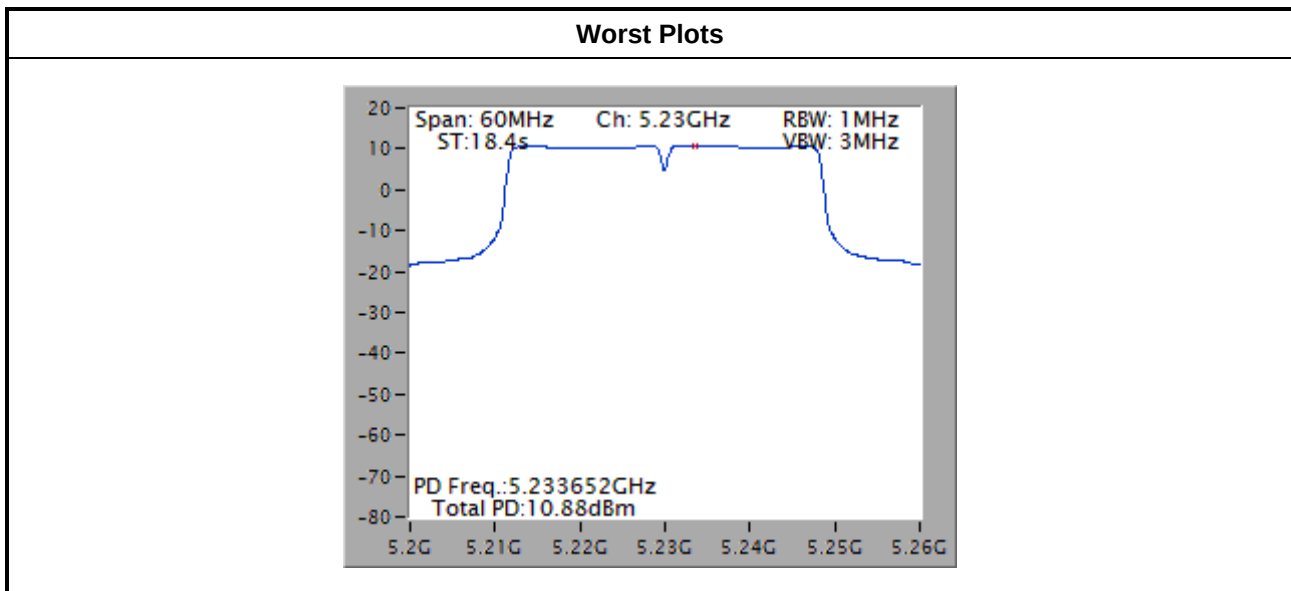


Note: Power density plot without duty factor

For Frequency band 5725-5850 MHz						
Condition			Peak Power Spectral Density (dBm/500kHz)			
Modulation Mode	N _{TX}	Freq. (MHz)	PPSD w/o D.F (dBm/500kHz)	Duty Factor (dB)	PPSD with D.F (dBm/500kHz)	PPSD Limit (dBm/500kHz)
VHT40	4	5755	1.14	0.53	1.67	25.52
VHT40	4	5795	6.76	0.53	7.29	25.52
VHT80	4	5775	-1.71	0.63	-1.08	25.52

Note:

1. D.F is duty factor.
2. Test result is bin-by-bin summing measured value of each TX port.
3. Directional gain = $10 * \log((10^{4.15/20} + 10^{4.03/20} + 10^{4.84/20} + 10^{4.8/20})^2 / 4) = 10.48 \text{ dBi} > 6 \text{ dBi}$.
Limit shall be reduced to $30 \text{ dBm} - (10.48 \text{ dBi} - 6 \text{ dBi}) = 25.52 \text{ dBm}$.

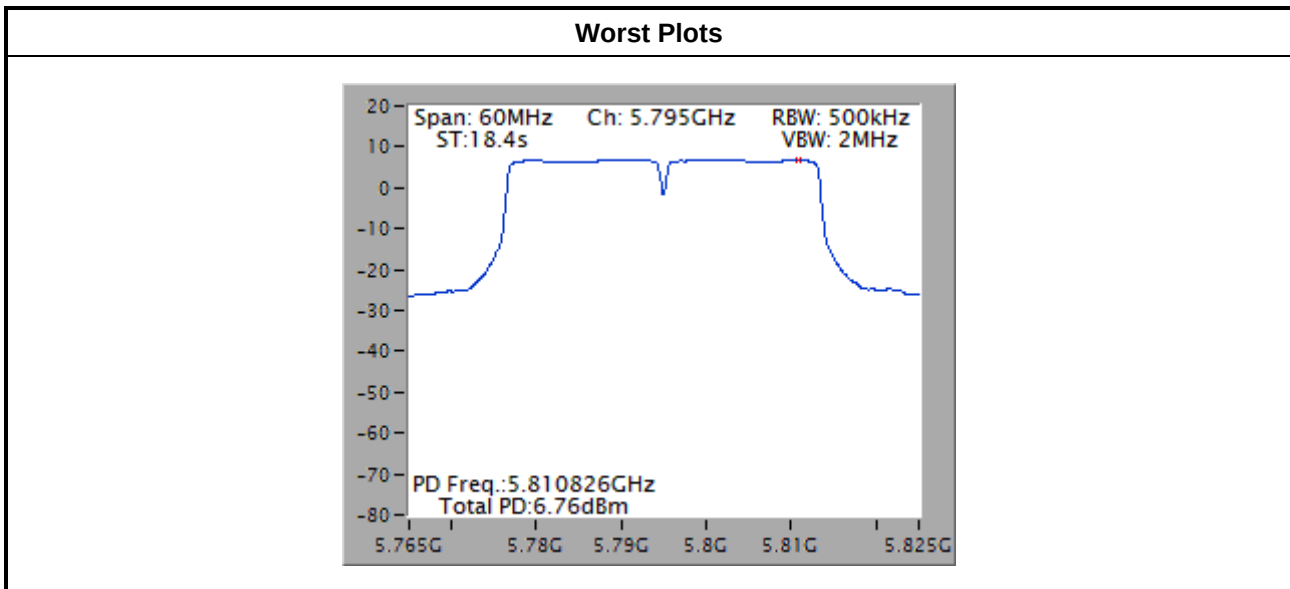

Note: Power density plot without duty factor

3.5 Transmitter Radiated and Band Edge Emissions

3.5.1 Limit of Transmitter Radiated and Band Edge Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.850 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.85 5.86 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360° . A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360° , the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup

Radiated Emissions below 1 GHz

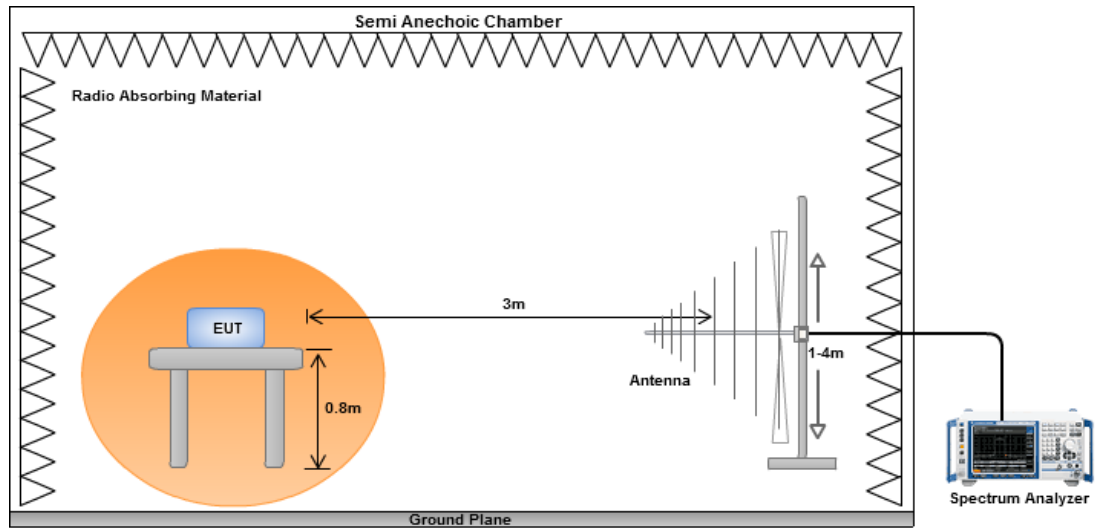

Radiated Emissions above 1 GHz

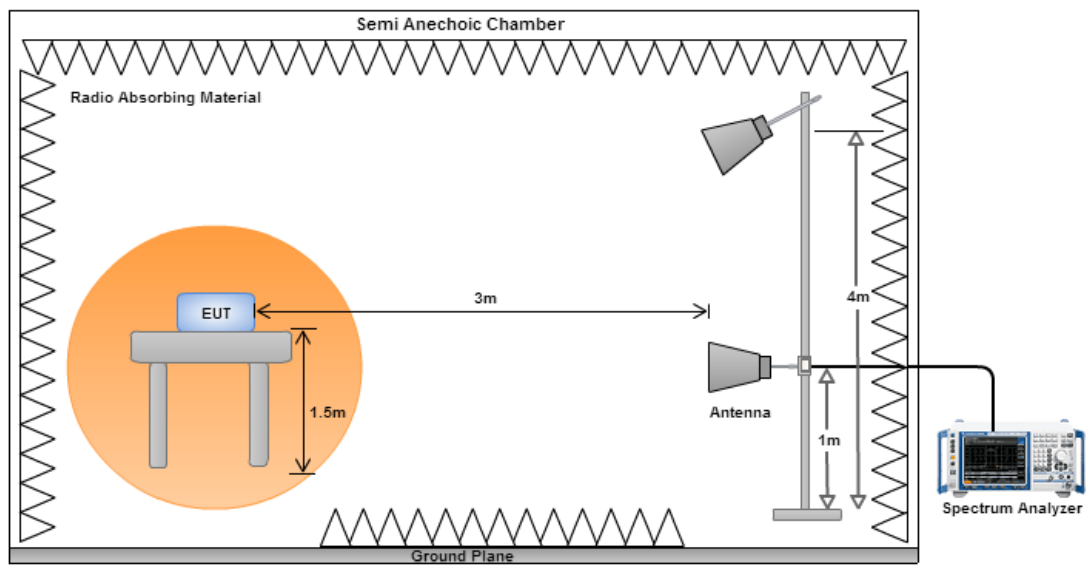


Non- beamforming mode

3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		
Level (dBuV/m) </			


Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Vertical		

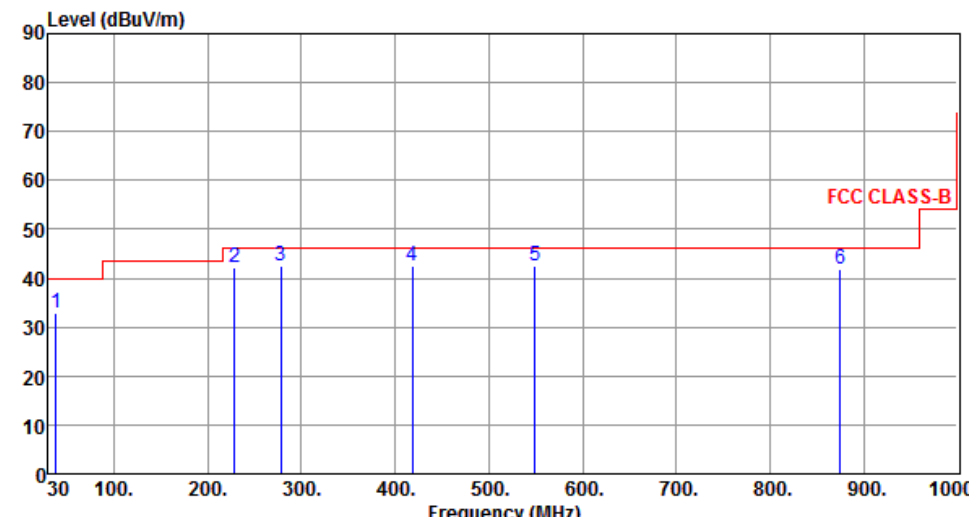

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	37.76	32.77	40.00	-7.23	49.64	-16.87	QP	---	---
2	228.85	42.16	46.00	-3.84	60.29	-18.13	Peak	---	---
3	278.32	42.35	46.00	-3.65	58.81	-16.46	QP	---	---
4	418.00	42.38	46.00	-3.62	55.52	-13.14	Peak	---	---
5	548.95	42.38	46.00	-3.62	52.83	-10.45	Peak	---	---
6	874.87	42.01	46.00	-3.99	47.78	-5.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Horizontal		

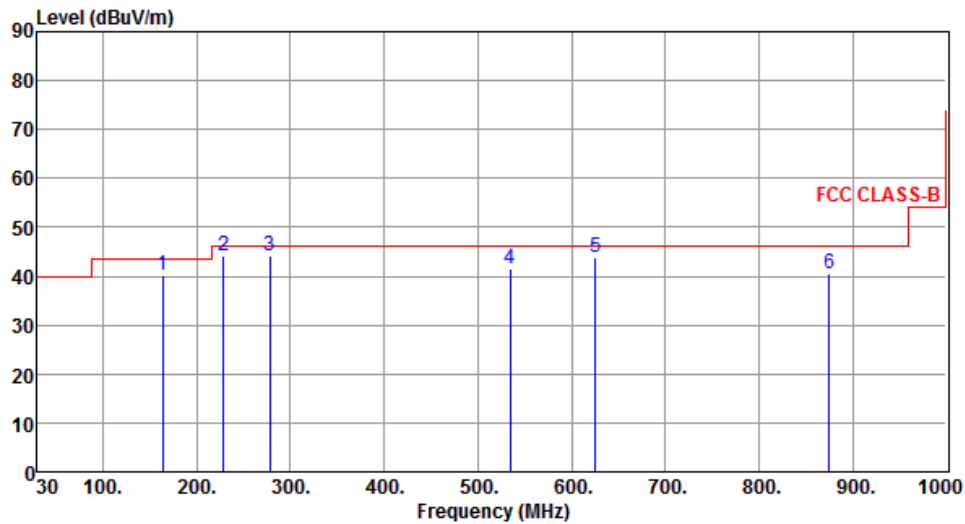

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	163.86	40.18	43.50	-3.32	56.97	-16.79	QP	---	---
2	228.85	44.16	46.00	-1.84	62.29	-18.13	QP	---	---
3	278.32	44.11	46.00	-1.89	60.57	-16.46	QP	---	---
4	534.40	41.46	46.00	-4.54	52.19	-10.73	QP	---	---
5	625.58	43.89	46.00	-2.11	53.08	-9.19	QP	---	---
6	874.87	40.65	46.00	-5.35	46.42	-5.77	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Vertical		

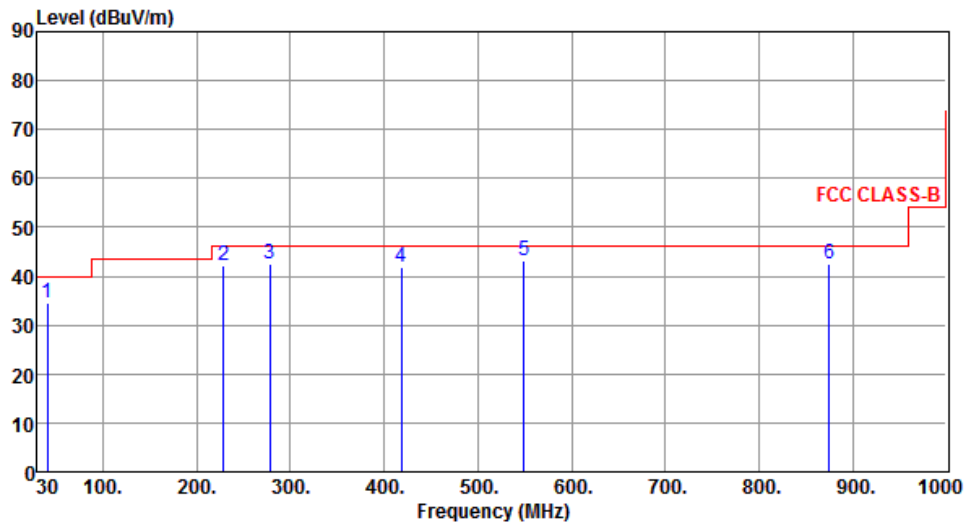

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	40.67	34.55	40.00	-5.45	51.13	-16.58	QP	---	---
2	228.85	42.18	46.00	-3.82	60.31	-18.13	Peak	---	---
3	278.32	42.38	46.00	-3.62	58.84	-16.46	QP	---	---
4	418.00	41.79	46.00	-4.21	54.93	-13.14	Peak	---	---
5	548.95	43.19	46.00	-2.81	53.64	-10.45	Peak	---	---
6	874.87	42.60	46.00	-3.40	48.37	-5.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40


Modulation	VHT40	Test Freq. (MHz)	5190
Polarization	Horizontal		

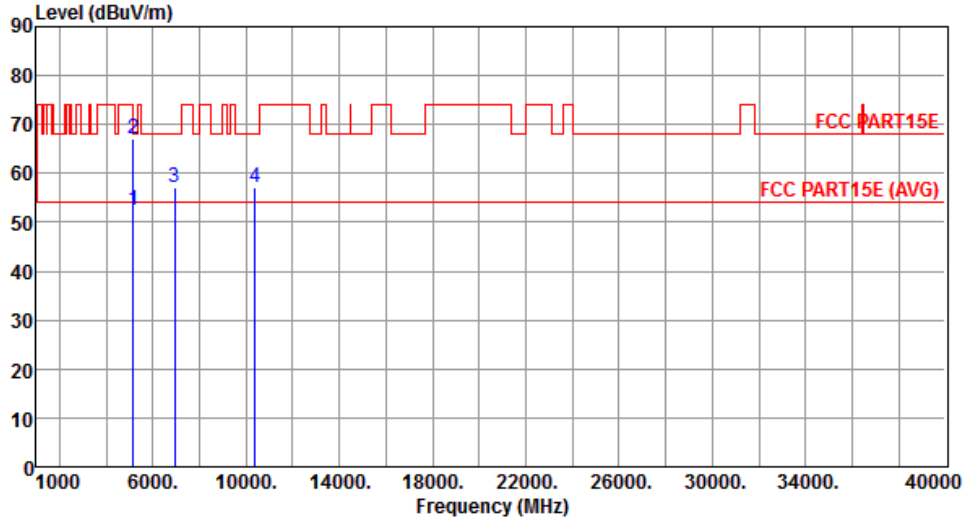

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	52.45	54.00	-1.55	46.99	5.46	Average	---	---
2	5150.00	67.23	74.00	-6.77	61.77	5.46	Peak	---	---
3	6920.00	56.98	68.20	-11.22	48.55	8.43	Peak	---	---
4	10380.00	57.03	68.20	-11.17	41.55	15.48	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	VHT40	Test Freq. (MHz)	5190
Polarization	Vertical		

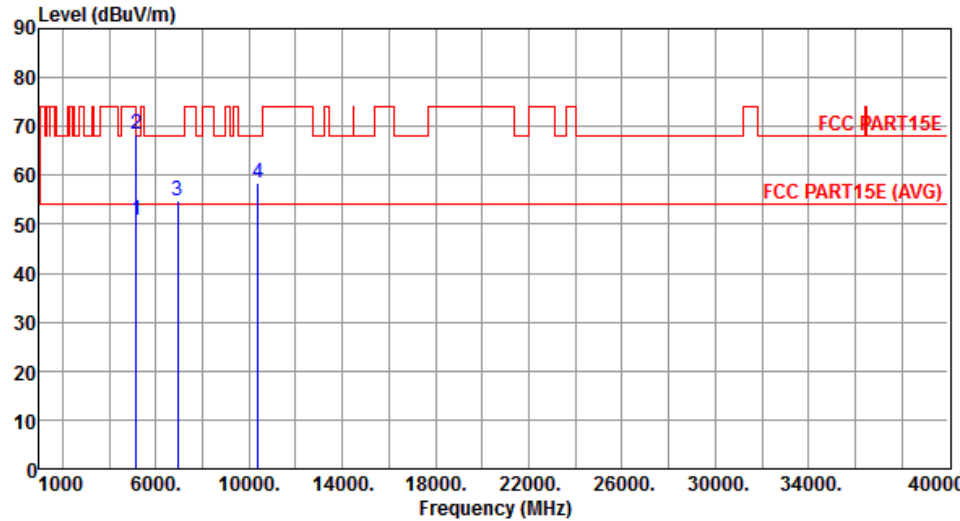


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	50.90	54.00	-3.10	45.44	5.46	Average	---	---
2	5150.00	68.34	74.00	-5.66	62.88	5.46	Peak	---	---
3	6920.00	54.64	68.20	-13.56	46.21	8.43	Peak	---	---
4	10380.00	58.36	68.20	-9.84	42.88	15.48	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).


Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		

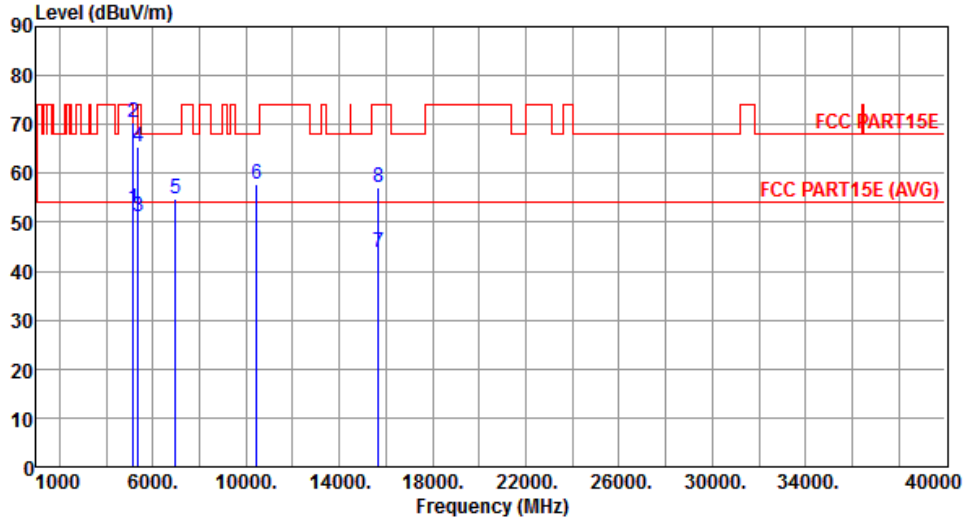

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	52.88	54.00	-1.12	47.42	5.46	Average	---	---
2	5150.00	70.44	74.00	-3.56	64.98	5.46	Peak	---	---
3	5350.00	51.11	54.00	-2.89	45.55	5.56	Average	---	---
4	5350.00	65.37	74.00	-8.63	59.81	5.56	Peak	---	---
5	6973.00	54.93	68.20	-13.27	46.43	8.50	Peak	---	---
6	10460.00	57.66	68.20	-10.54	41.88	15.78	Peak	---	---
7	15690.00	43.99	54.00	-10.01	28.78	15.21	Average	---	---
8	15690.00	57.07	74.00	-16.93	41.86	15.21	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Vertical		

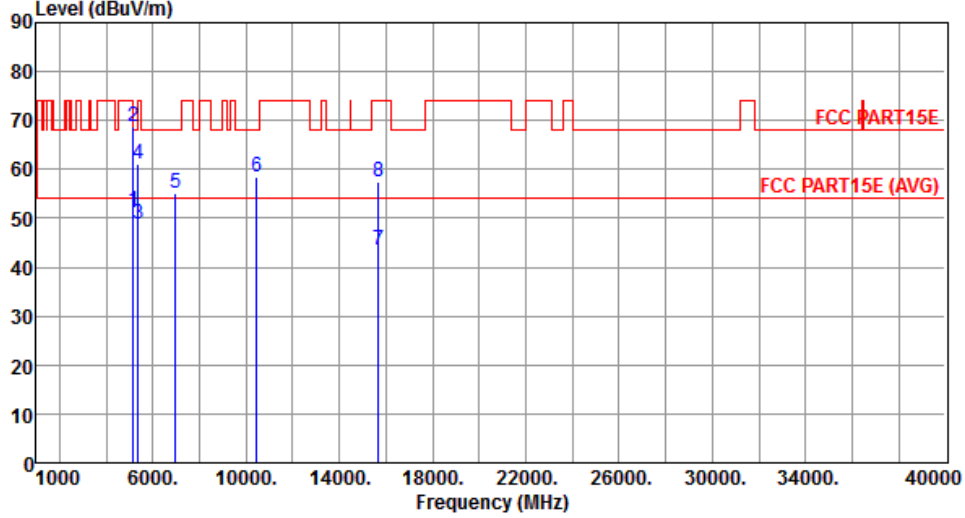

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	51.45	54.00	-2.55	45.99	5.46	Average	---	---
2	5150.00	68.79	74.00	-5.21	63.33	5.46	Peak	---	---
3	5350.00	48.77	54.00	-5.23	43.21	5.56	Average	---	---
4	5350.00	61.12	74.00	-12.88	55.56	5.56	Peak	---	---
5	6973.00	55.01	68.20	-13.19	46.51	8.50	Peak	---	---
6	10460.00	58.45	68.20	-9.75	42.67	15.78	Peak	---	---
7	15690.00	43.67	54.00	-10.33	28.46	15.21	Average	---	---
8	15690.00	57.55	74.00	-16.45	42.34	15.21	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).


Modulation	VHT40	Test Freq. (MHz)	5755
Polarization	Horizontal		

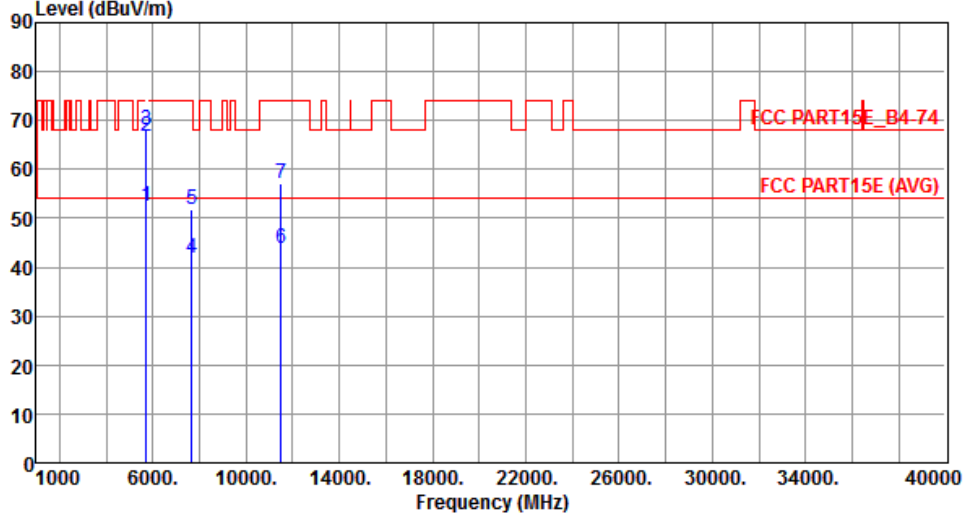

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	52.59	54.00	-1.41	46.94	5.65	Average	---	---
2	5715.00	66.76	74.00	-7.24	61.11	5.65	Peak	---	---
3	5725.00	68.13	78.20	-10.07	62.49	5.64	Peak	---	---
4	7676.00	41.89	54.00	-12.11	31.77	10.12	Average	---	---
5	7676.00	51.89	74.00	-22.11	41.77	10.12	Peak	---	---
6	11510.00	43.80	54.00	-10.20	27.88	15.92	Average	---	---
7	11510.00	57.17	74.00	-16.83	41.25	15.92	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	VHT40	Test Freq. (MHz)	5755
Polarization	Vertical		

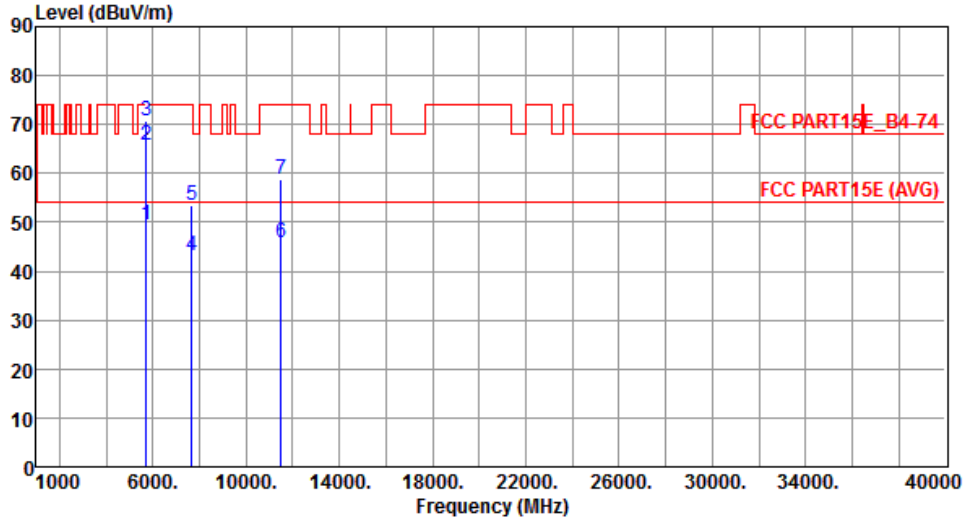


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	49.44	54.00	-4.56	43.79	5.65	Average	---	---
2	5715.00	65.66	74.00	-8.34	60.01	5.65	Peak	---	---
3	5725.00	70.83	78.20	-7.37	65.19	5.64	Peak	---	---
4	7676.00	43.22	54.00	-10.78	33.10	10.12	Average	---	---
5	7676.00	53.55	74.00	-20.45	43.43	10.12	Peak	---	---
6	11510.00	45.94	54.00	-8.06	30.02	15.92	Average	---	---
7	11510.00	58.90	74.00	-15.10	42.98	15.92	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Vertical		
Level (dBuV/m) </			

3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

Modulation	VHT80	Test Freq. (MHz)	5210
Polarization	Horizontal		

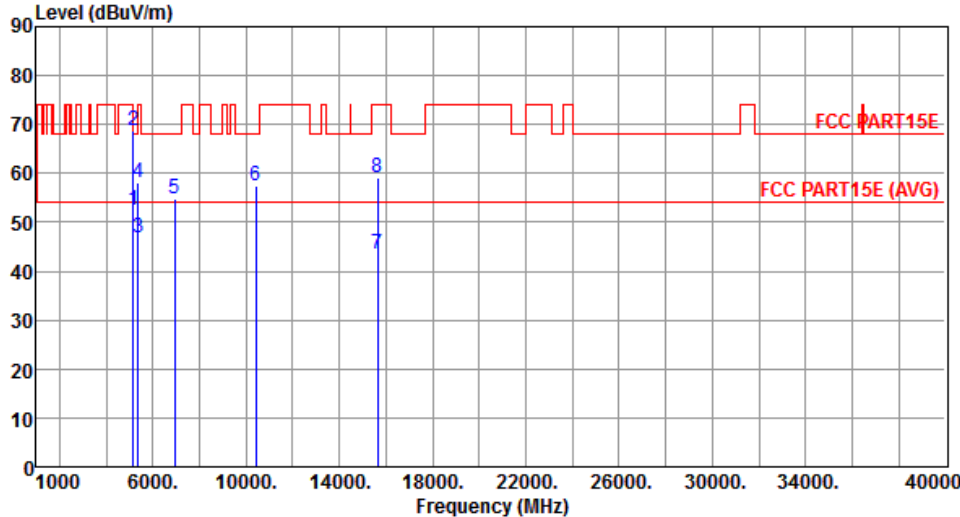

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	52.41	54.00	-1.59	46.95	5.46	Average	---	---
2	5150.00	68.79	74.00	-5.21	63.33	5.46	Peak	---	---
3	5350.00	46.83	54.00	-7.17	41.27	5.56	Average	---	---
4	5350.00	58.07	74.00	-15.93	52.51	5.56	Peak	---	---
5	6946.00	54.87	68.20	-13.33	46.41	8.46	Peak	---	---
6	10420.00	57.60	68.20	-10.60	41.97	15.63	Peak	---	---
7	15630.00	43.47	54.00	-10.53	28.02	15.45	Average	---	---
8	15630.00	59.00	74.00	-15.00	43.55	15.45	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	VHT80	Test Freq. (MHz)	5210
Polarization	Vertical		
Level (dBuV/m)			

Modulation	VHT80	Test Freq. (MHz)	5775
Polarization	Horizontal		
Level (dBuV/m)			

Modulation	VHT80	Test Freq. (MHz)	5775
Polarization	Vertical		
Level (dBuV/m)			


Beamforming mode

3.5.7 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		
Level (dBuV/m)			

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Vertical		
Level (dBuV/m) </			

Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Horizontal		

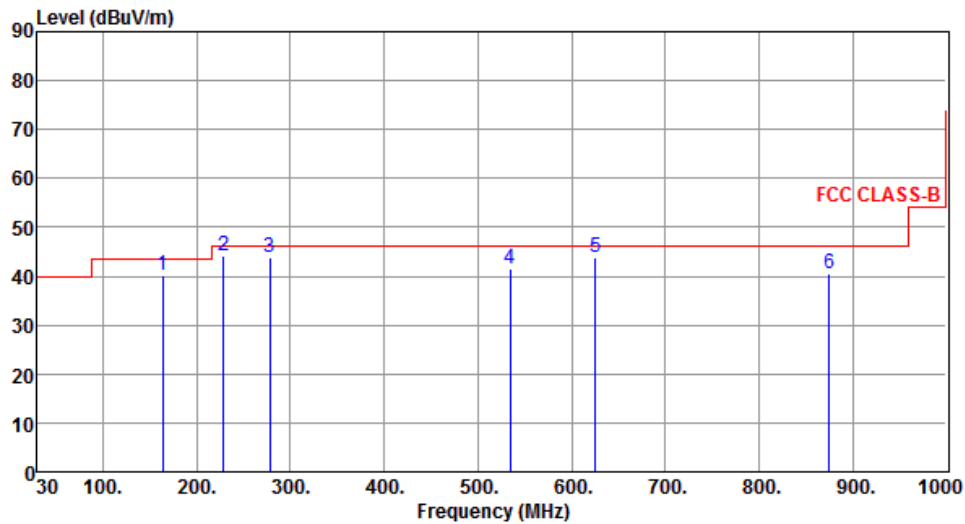

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	163.72	40.06	43.50	-3.44	56.84	-16.78	QP	---	---
2	228.74	44.03	46.00	-1.97	62.17	-18.14	QP	---	---
3	278.21	43.94	46.00	-2.06	60.41	-16.47	QP	---	---
4	534.27	41.37	46.00	-4.63	52.10	-10.73	QP	---	---
5	625.42	43.72	46.00	-2.28	52.91	-9.19	QP	---	---
6	874.75	40.52	46.00	-5.48	46.29	-5.77	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Vertical		
 </			

3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

Modulation	VHT40	Test Freq. (MHz)	5190
Polarization	Horizontal		

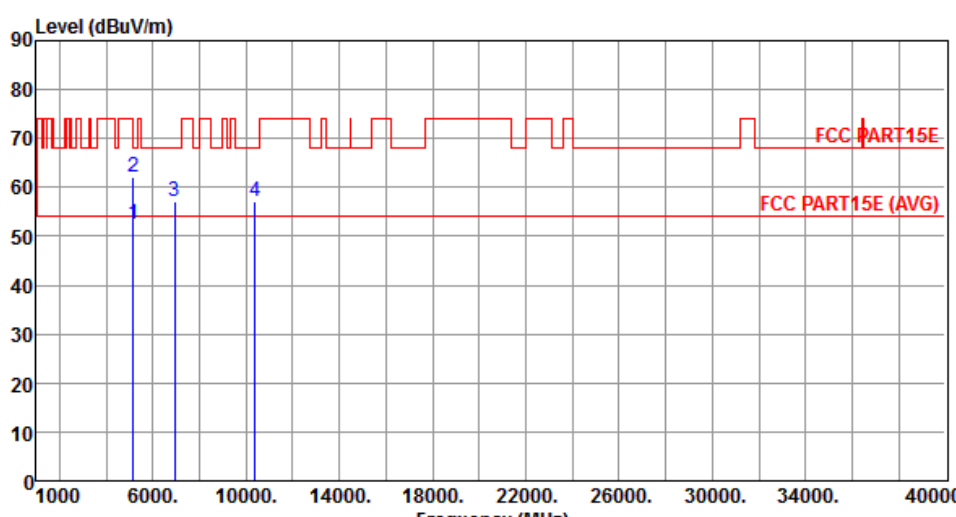

Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	
1	5150.00	52.56	54.00	-1.44	47.10	5.46	Average	---	---
2	5150.00	62.20	74.00	-11.80	56.74	5.46	Peak	---	---
3	6920.00	57.12	68.20	-11.08	48.69	8.43	Peak	---	---
4	10380.00	57.25	68.20	-10.95	41.77	15.48	Peak	---	---


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5150.00	52.56	54.00	-1.44	47.10	5.46	Average	---	---
2	5150.00	62.20	74.00	-11.80	56.74	5.46	Peak	---	---
3	6920.00	57.12	68.20	-11.08	48.69	8.43	Peak	---	---
4	10380.00	57.25	68.20	-10.95	41.77	15.48	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	VHT40	Test Freq. (MHz)	5190
Polarization	Vertical		

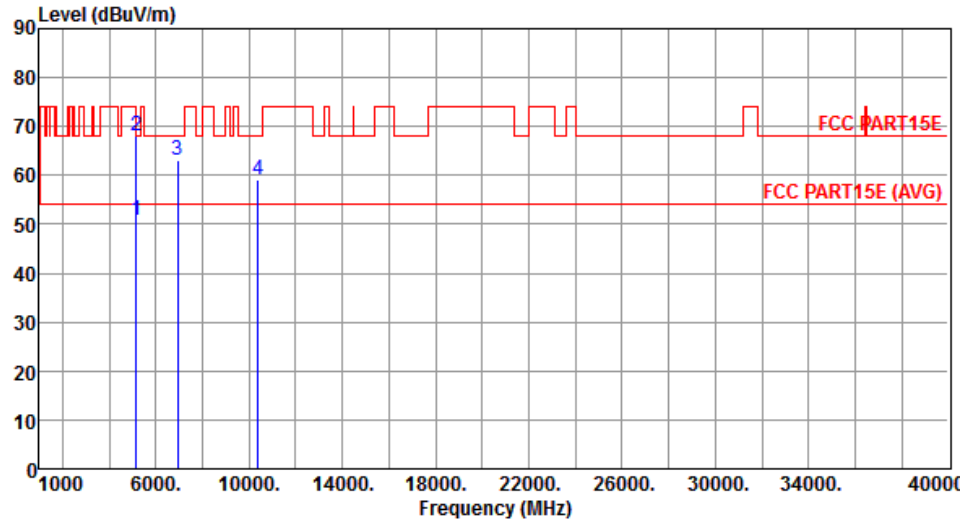


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	50.87	54.00	-3.13	45.41	5.46	Average	---	---
2	5150.00	67.99	74.00	-6.01	62.53	5.46	Peak	---	---
3	6920.00	63.24	68.20	-4.96	54.81	8.43	Peak	---	---
4	10380.00	58.98	68.20	-9.22	43.50	15.48	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		
 </			

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Vertical		

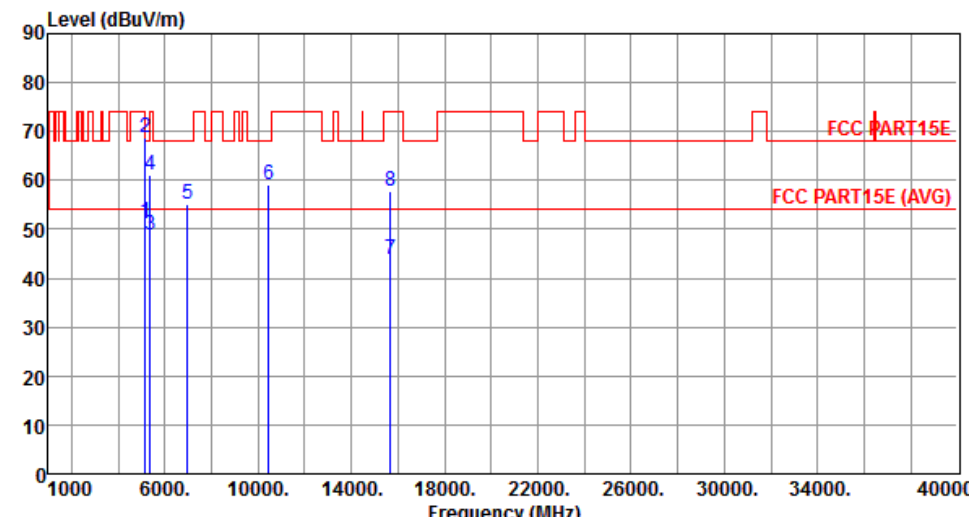


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	51.52	54.00	-2.48	46.06	5.46	Average	---	---
2	5150.00	68.85	74.00	-5.15	63.39	5.46	Peak	---	---
3	5350.00	48.89	54.00	-5.11	43.33	5.56	Average	---	---
4	5350.00	61.22	74.00	-12.78	55.66	5.56	Peak	---	---
5	6973.00	55.11	68.20	-13.09	46.61	8.50	Peak	---	---
6	10460.00	58.96	68.20	-9.24	43.18	15.78	Peak	---	---
7	15690.00	43.85	54.00	-10.15	28.64	15.21	Average	---	---
8	15690.00	57.68	74.00	-16.32	42.47	15.21	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	VHT40	Test Freq. (MHz)	5755
Polarization	Horizontal		
Level (dBUV/m) </			

Modulation	VHT40	Test Freq. (MHz)	5755
Polarization	Vertical		
Level (dBuV/m)			


Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Horizontal		

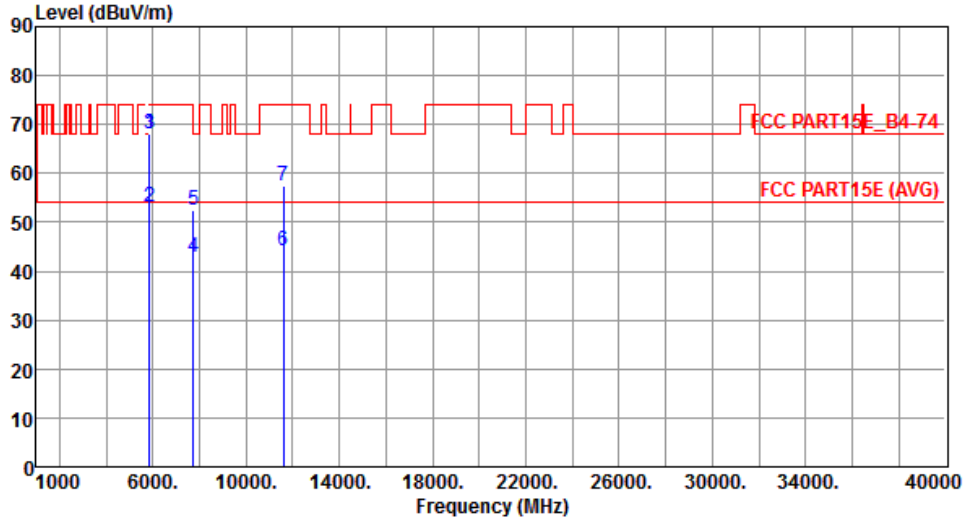

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	68.10	78.20	-10.10	62.35	5.75	Peak	---	---
2	5860.00	52.98	54.00	-1.02	47.22	5.76	Average	---	---
3	5860.00	67.97	74.00	-6.03	62.21	5.76	Peak	---	---
4	7726.00	42.71	54.00	-11.29	32.63	10.08	Average	---	---
5	7726.00	52.35	74.00	-21.65	42.27	10.08	Peak	---	---
6	11590.00	44.21	54.00	-9.79	28.50	15.71	Average	---	---
7	11590.00	57.32	74.00	-16.68	41.61	15.71	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	VHT40	Test Freq. (MHz)	5795
Polarization	Vertical		

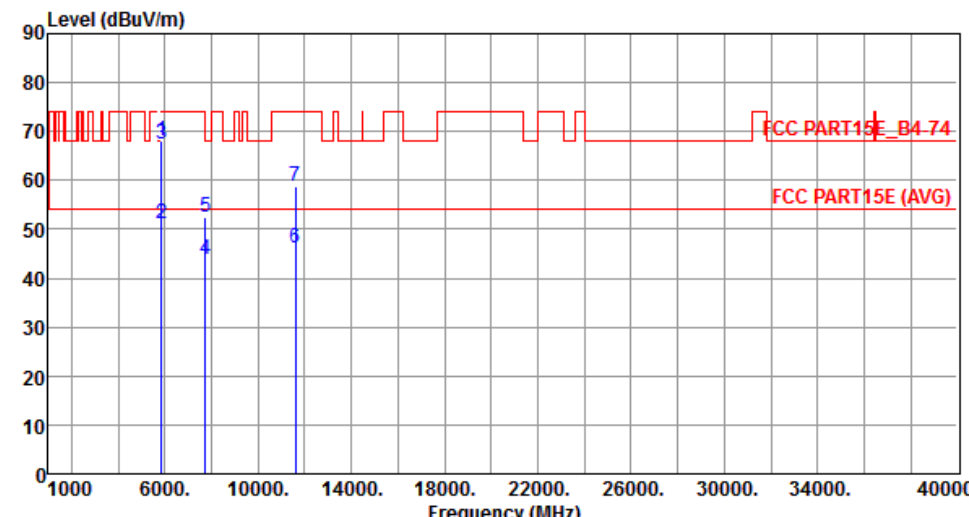


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	68.20	78.20	-10.00	62.45	5.75	Peak	---	---
2	5860.00	51.17	54.00	-2.83	45.41	5.76	Average	---	---
3	5860.00	67.29	74.00	-6.71	61.53	5.76	Peak	---	---
4	7726.00	43.68	54.00	-10.32	33.60	10.08	Average	---	---
5	7726.00	52.41	74.00	-21.59	42.33	10.08	Peak	---	---
6	11590.00	46.12	54.00	-7.88	30.41	15.71	Average	---	---
7	11590.00	58.78	74.00	-15.22	43.07	15.71	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.5.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

Modulation	VHT80	Test Freq. (MHz)	5210
Polarization	Horizontal		

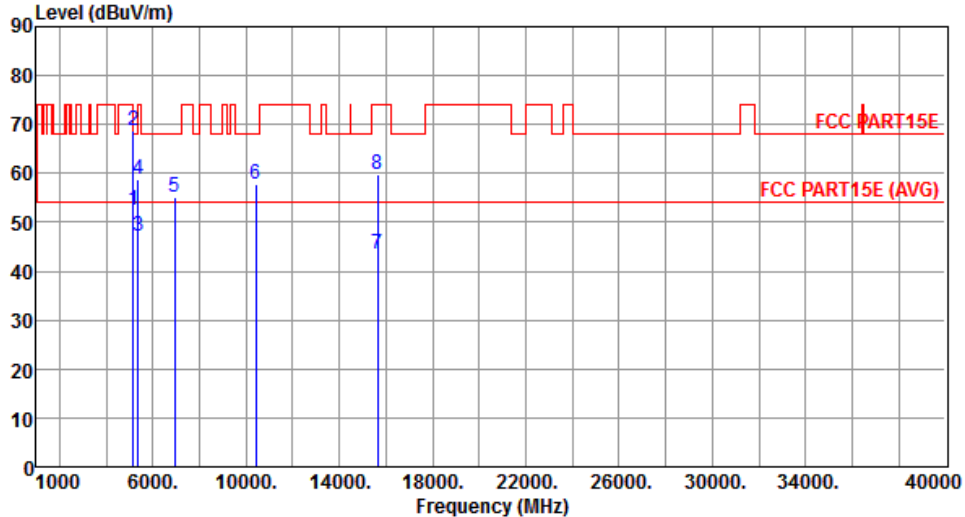


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	52.34	54.00	-1.66	46.88	5.46	Average	---	---
2	5150.00	68.88	74.00	-5.12	63.42	5.46	Peak	---	---
3	5350.00	47.26	54.00	-6.74	41.70	5.56	Average	---	---
4	5350.00	58.64	74.00	-15.36	53.08	5.56	Peak	---	---
5	6946.00	54.98	68.20	-13.22	46.52	8.46	Peak	---	---
6	10420.00	57.81	68.20	-10.39	42.18	15.63	Peak	---	---
7	15630.00	43.67	54.00	-10.33	28.22	15.45	Average	---	---
8	15630.00	59.81	74.00	-14.19	44.36	15.45	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT80	Test Freq. (MHz)	5210
Polarization	Vertical		
Level (dBuV/m)			

Modulation	VHT80	Test Freq. (MHz)	5775
Polarization	Horizontal		
Level (dBuV/m) </			

Modulation	VHT80	Test Freq. (MHz)	5775
Polarization	Vertical		

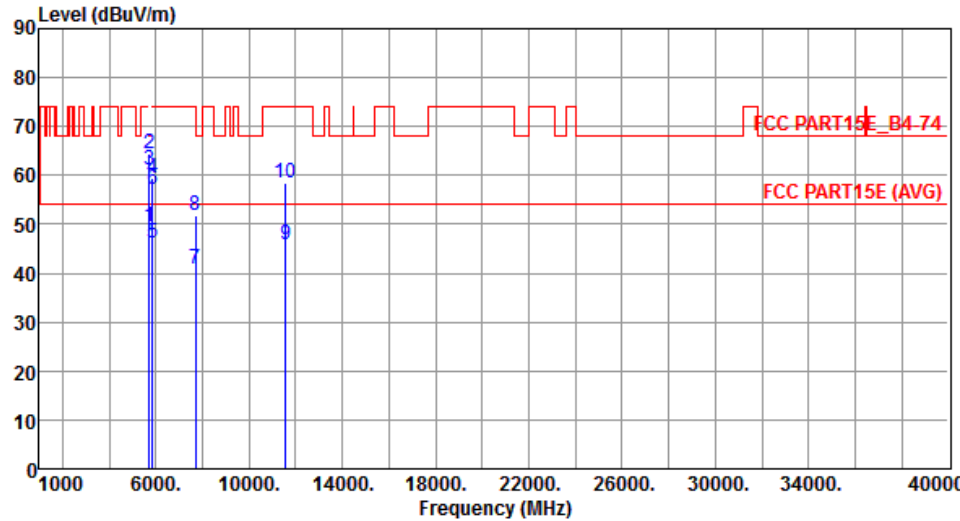

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	49.49	54.00	-4.51	43.84	5.65	Average	---	---
2	5715.00	64.47	74.00	-9.53	58.82	5.65	Peak	---	---
3	5725.00	61.05	78.20	-17.15	55.41	5.64	Peak	---	---
4	5850.00	59.29	78.20	-18.91	53.54	5.75	Peak	---	---
5	5860.00	46.10	54.00	-7.90	40.34	5.76	Average	---	---
6	5860.00	57.13	74.00	-16.87	51.37	5.76	Peak	---	---
7	7700.00	40.72	54.00	-13.28	30.63	10.09	Average	---	---
8	7700.00	51.85	74.00	-22.15	41.76	10.09	Peak	---	---
9	11550.00	45.99	54.00	-8.01	30.18	15.81	Average	---	---
10	11550.00	58.32	74.00	-15.68	42.51	15.81	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6 Frequency Stability


3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.6.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.

3.6.3 Test Setup

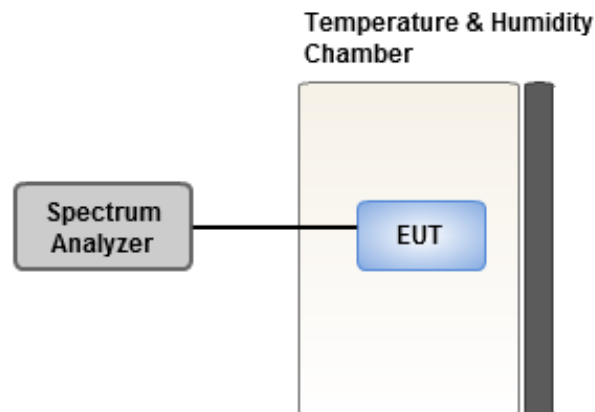

3.6.4 Test Result of Frequency Stability

Non- beamforming mode

Frequency: 5200 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	4.77	5.10	5.68	4.54
T20°C Vmin	3.98	4.58	4.45	4.52
T50°C Vnom	4.12	4.57	4.09	4.14
T40°C Vnom	3.35	3.94	3.32	3.82
T30°C Vnom	2.85	2.97	2.94	3.23
T20°C Vnom	3.08	3.30	3.62	3.65
T10°C Vnom	2.60	2.73	2.78	3.25
T0°C Vnom	3.29	3.03	3.35	3.30
T-10°C Vnom	2.22	2.47	2.46	2.02
T-20°C Vnom	0.61	0.94	0.83	0.92
T-30°C Vnom	0.38	0.83	0.62	0.48
Vnom [Vac]: 120	Vmax [Vac]: 138			Vmin [Vac]: 102
Tnom [°C]: 20	Tmax [°C]: 50			Tmin [°C]: -30

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	4.07	3.77	3.87	4.46
T20°C Vmin	4.21	4.49	4.87	4.55
T50°C Vnom	3.78	3.49	4.61	3.35
T40°C Vnom	4.21	3.89	4.00	4.33
T30°C Vnom	3.47	3.72	3.23	4.21
T20°C Vnom	4.63	4.70	5.33	4.97
T10°C Vnom	3.91	3.47	4.30	4.46
T0°C Vnom	4.35	4.46	4.52	4.81
T-10°C Vnom	2.28	2.60	2.06	2.63
T-20°C Vnom	0.45	0.49	0.37	0.77
T-30°C Vnom	-0.34	-0.66	-0.30	0.24
Vnom [Vac]: 120	Vmax [Vac]: 138			Vmin [Vac]: 102
Tnom [°C]: 20	Tmax [°C]: 50			Tmin [°C]: -30

Beamforming mode

Frequency: 5200 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	4.24	4.25	4.62	4.11
T20°C Vmin	3.97	4.35	4.33	3.72
T50°C Vnom	4.18	4.38	4.55	4.52
T40°C Vnom	3.95	3.88	3.84	4.69
T30°C Vnom	3.53	3.85	3.54	4.22
T20°C Vnom	3.31	3.24	3.40	3.76
T10°C Vnom	3.27	3.30	3.65	3.90
T0°C Vnom	3.58	3.95	3.92	3.95
T-10°C Vnom	2.49	2.58	2.71	2.15
T-20°C Vnom	0.19	-0.15	0.05	0.71
T-30°C Vnom	0.02	-0.07	-0.04	0.32
Vnom [Vac]: 120		Vmax [Vac]: 138		Vmin [Vac]: 102
Tnom [°C]: 20		Tmax [°C]: 50		Tmin [°C]: -30

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	4.49	4.26	4.43	4.76
T20°C Vmin	4.16	4.39	4.22	4.41
T50°C Vnom	3.30	3.39	2.92	3.59
T40°C Vnom	4.04	4.28	4.44	3.67
T30°C Vnom	3.38	3.22	3.39	3.54
T20°C Vnom	3.90	4.15	3.73	4.16
T10°C Vnom	3.23	3.95	3.15	3.23
T0°C Vnom	4.01	4.50	4.26	4.52
T-10°C Vnom	2.33	2.85	1.91	2.68
T-20°C Vnom	0.02	0.09	-0.08	-0.14
T-30°C Vnom	-0.29	-0.18	0.28	-0.39
Vnom [Vac]: 120		Vmax [Vac]: 138		Vmin [Vac]: 102
Tnom [°C]: 20		Tmax [°C]: 50		Tmin [°C]: -30

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan,
R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd
St., Kwei Shan Hsiang, Tao Yuan
Hsien 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan Hsiang, Tao Yuan
Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==