



23/06/2026

EIRP PSD;Band:6.7G;ax20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6535MHz;TX

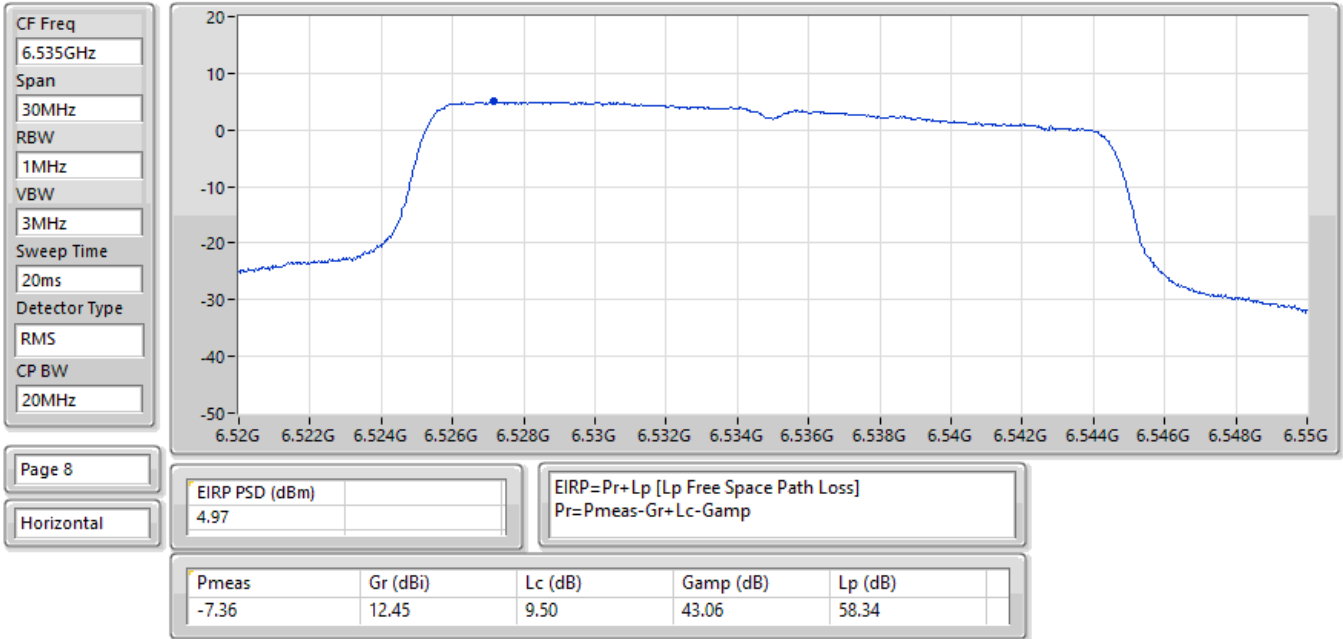


23/06/2026

EIRP PSD;Band:6.7G;ax20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

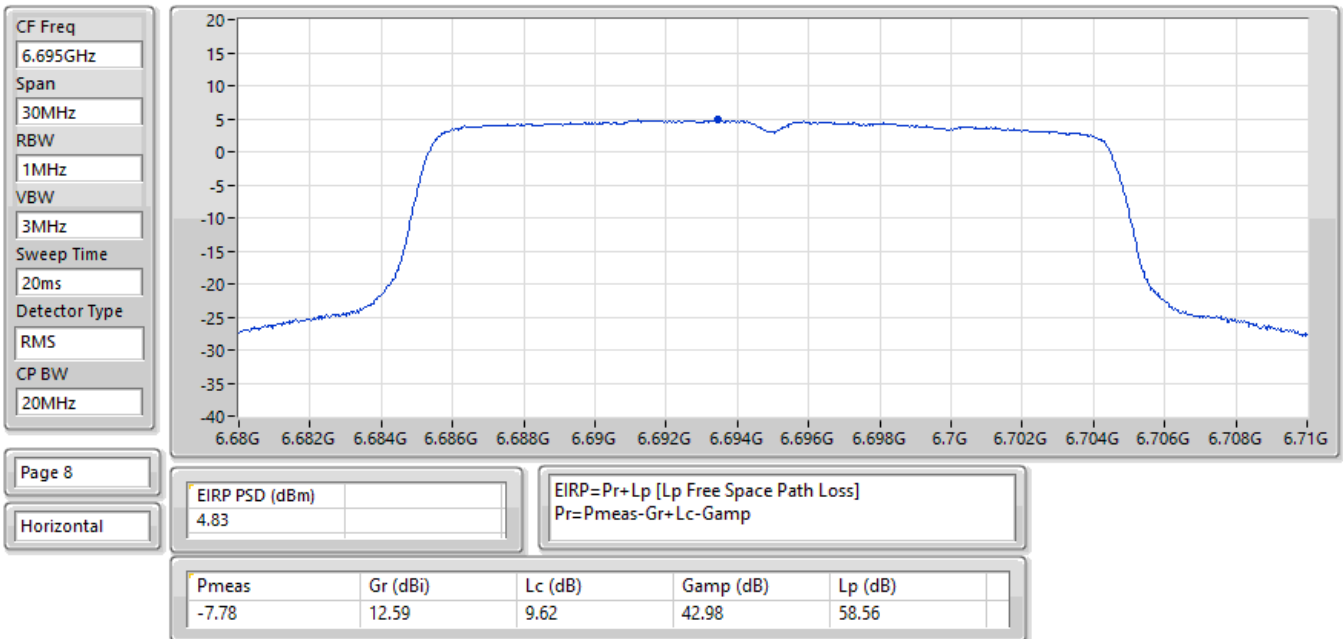


15/07/2026

EIRP PSD;Band:6.7G;ax20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6855MHz;TX

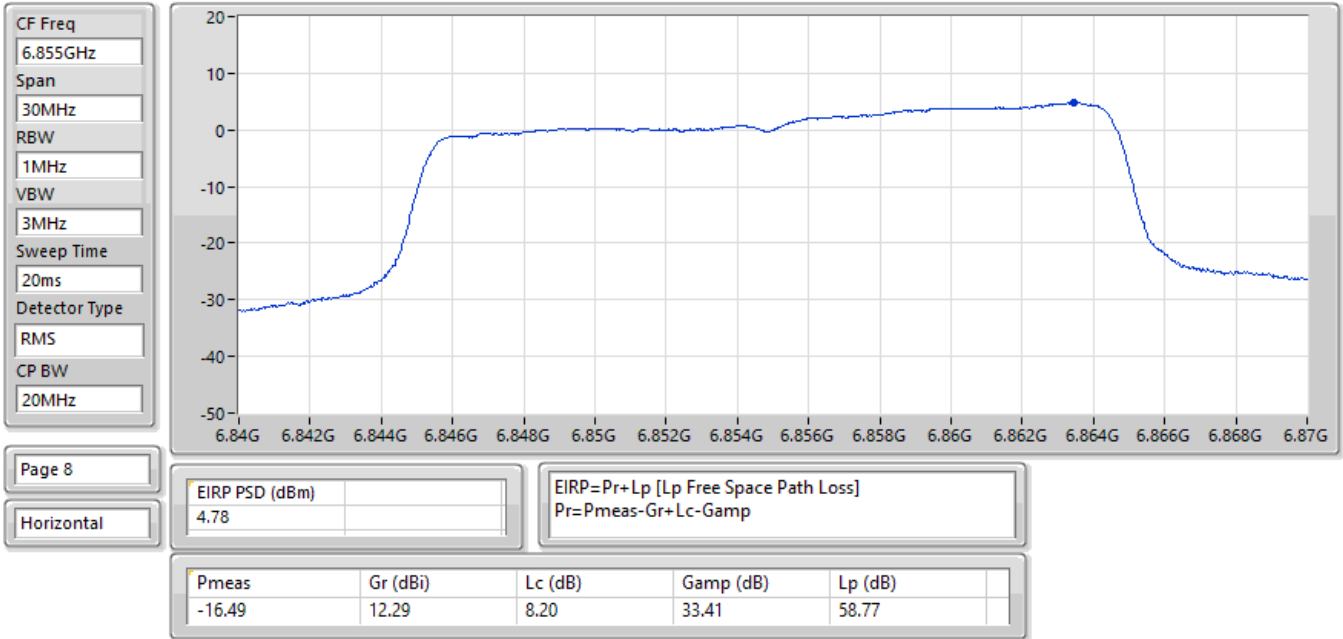


08/06/2026

EIRP PSD;Band:6.7G;ax20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6875MHz;TX

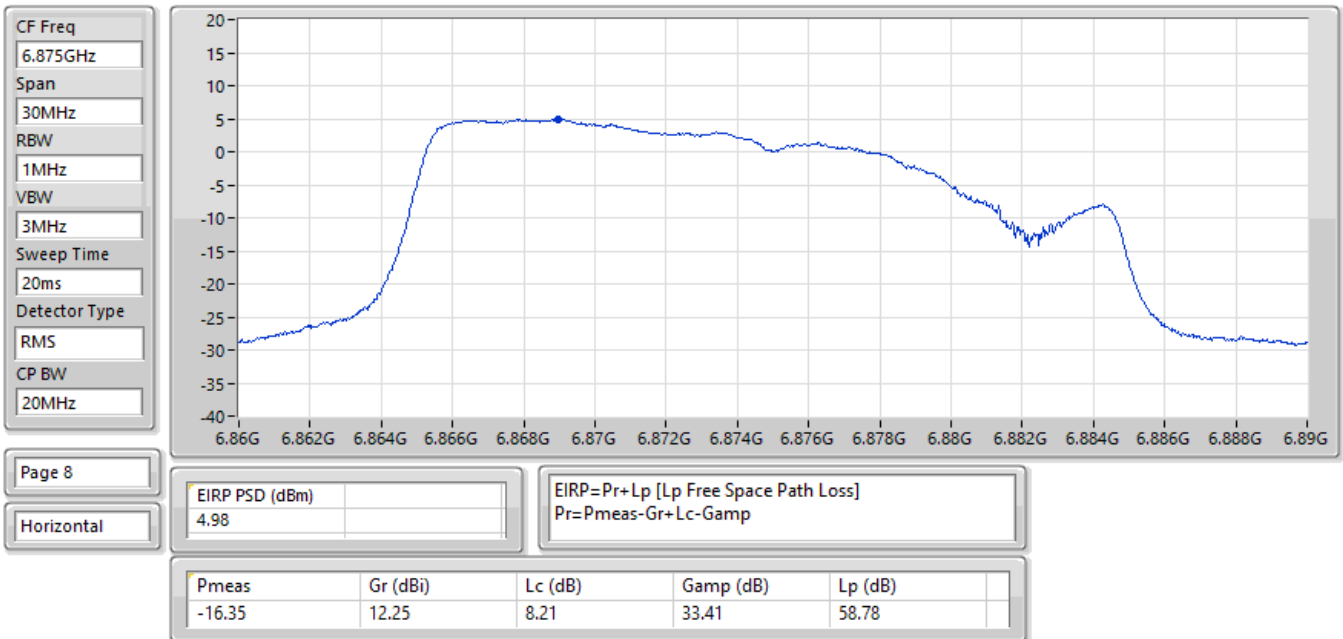


08/06/2026

EIRP PSD;Band:7.0G;ax20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6995MHz;TX

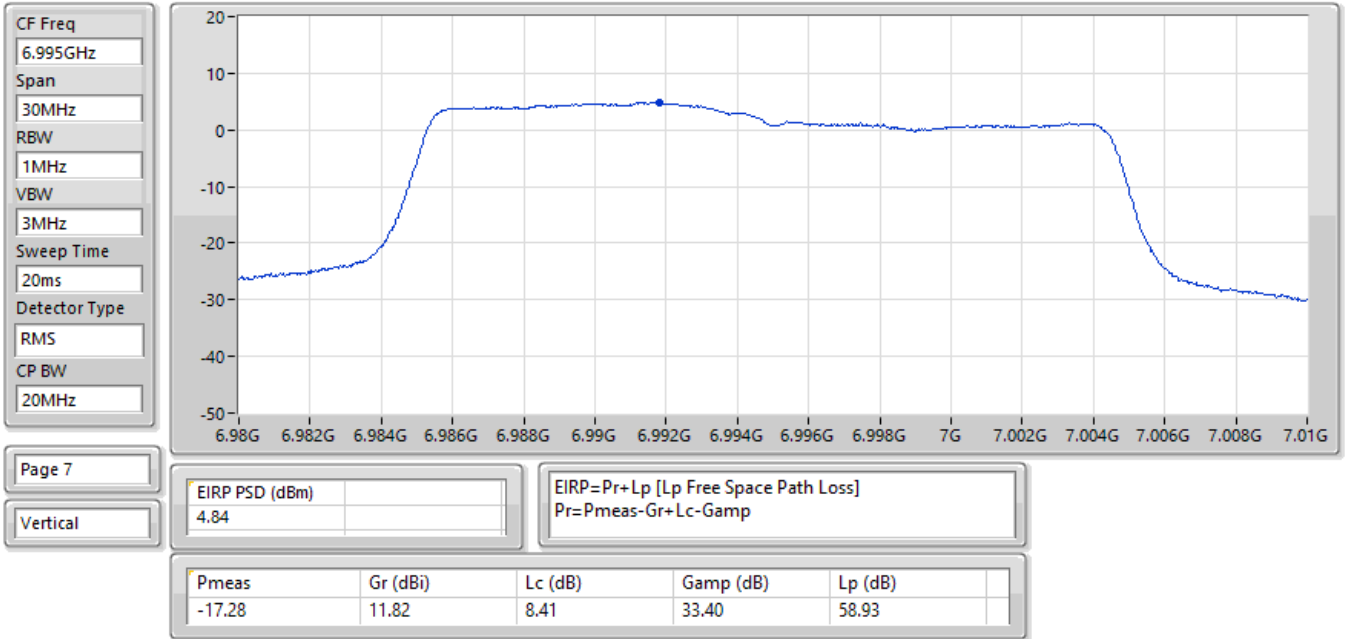

27/06/2026

EIRP PSD;Band:7.0G;ax20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:7095MHz;TX

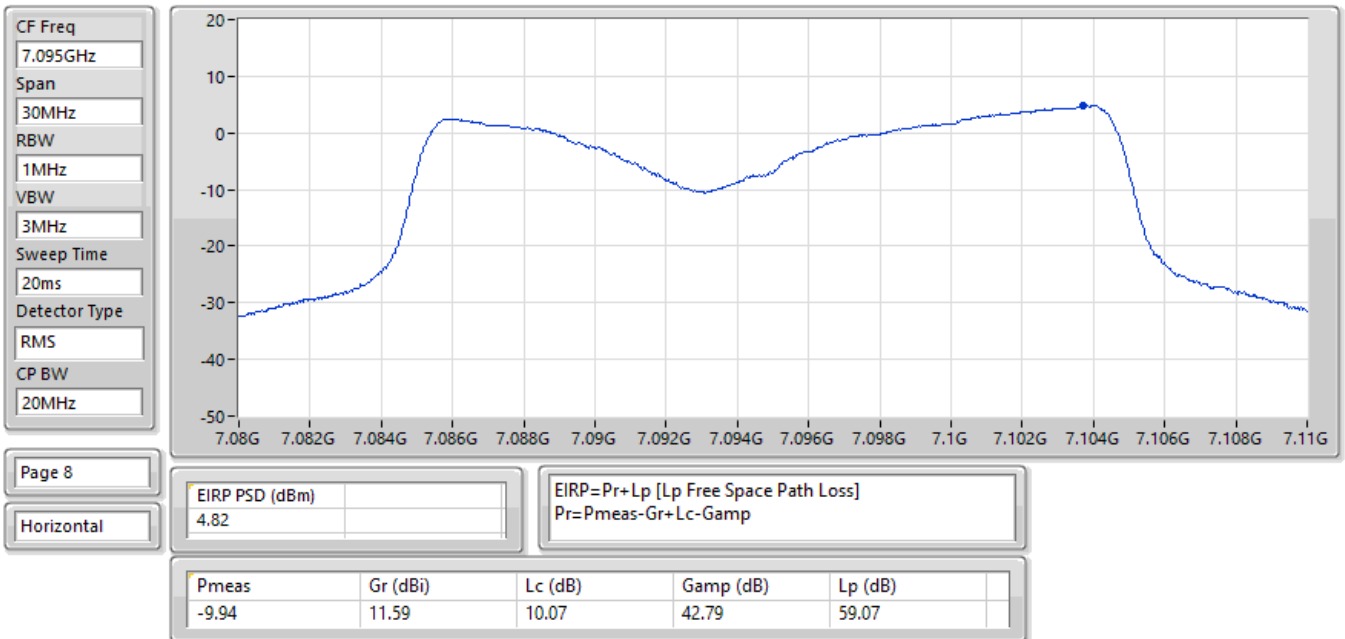

27/06/2026

EIRP PSD;Band:7.0G;ax20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:7115MHz;TX

CF Freq
7.115GHz

Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

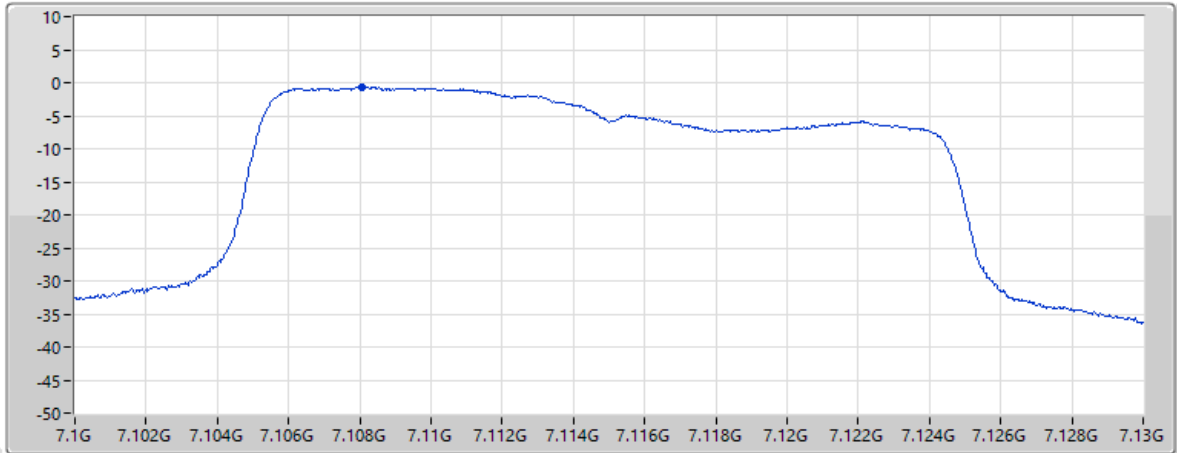

Page 8

Horizontal

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
-0.65		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.45	11.58	10.08	42.78	59.08

23/06/2026

EIRP PSD;Band:6.2G;ax40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:5965MHz;TX

CF Freq
5.965GHz

Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
40MHz

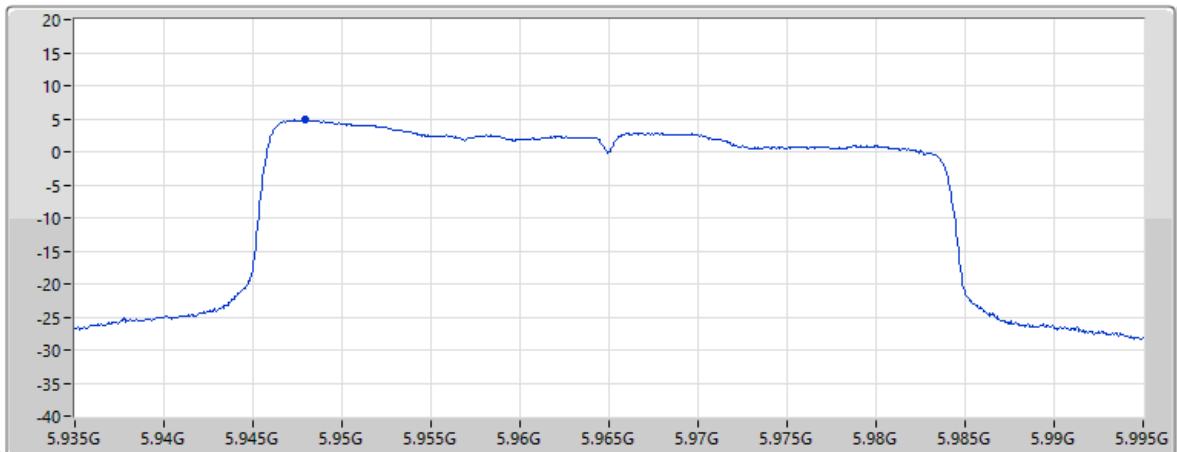


Page 8

Horizontal

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
4.82		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-4.98	13.30	8.95	43.38	57.53


27/06/2026

EIRP PSD;Band:6.2G;ax40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6205MHz;TX

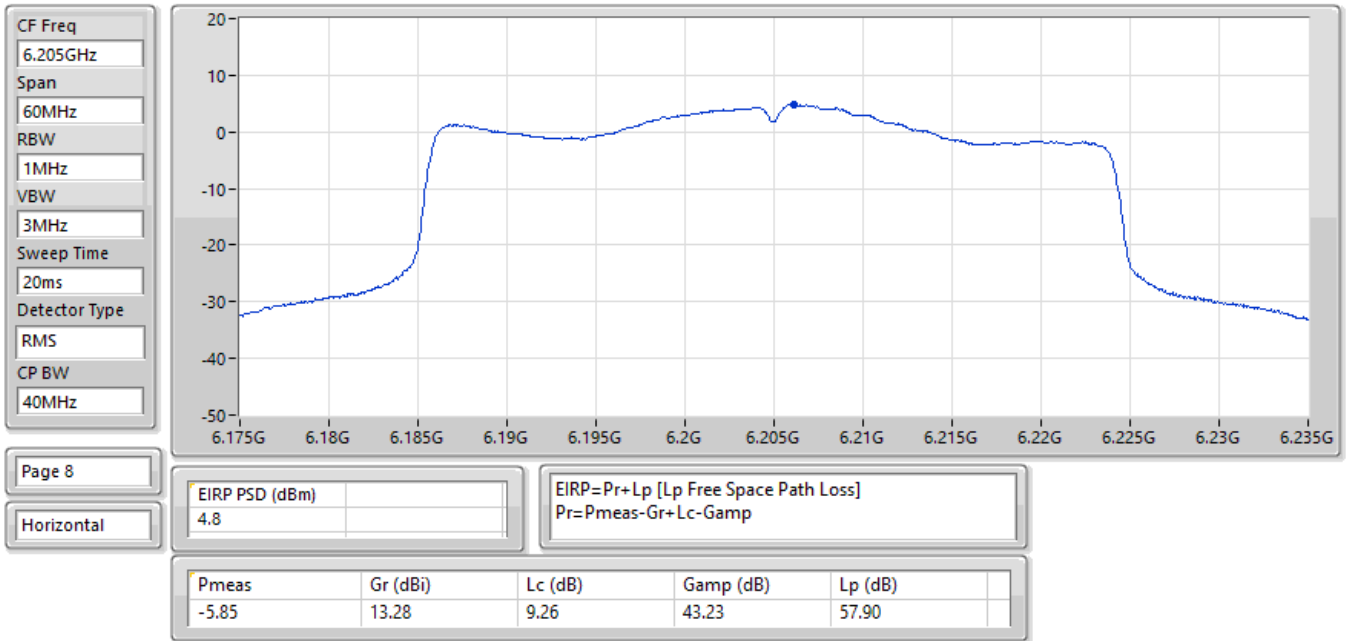

23/06/2026


EIRP PSD;Band:6.2G;ax40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6405MHz;TX

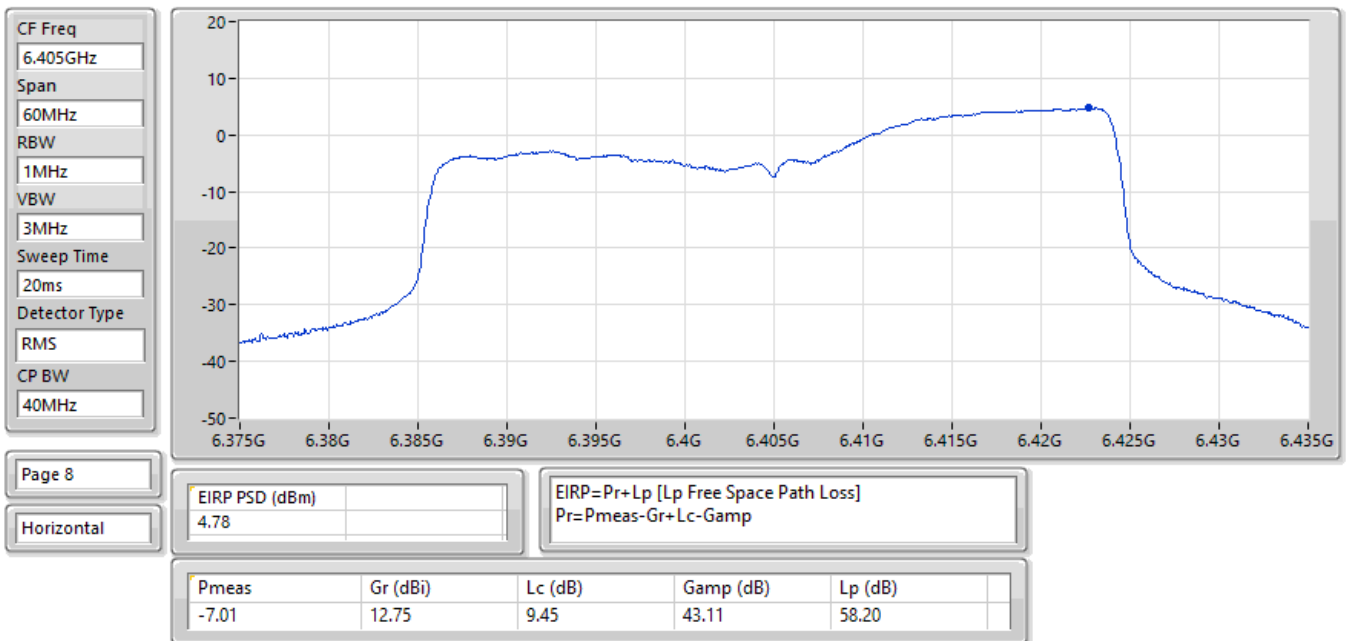

11/06/2026

EIRP PSD;Band:6.4G;ax40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6445MHz;TX

CF Freq
6.445GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

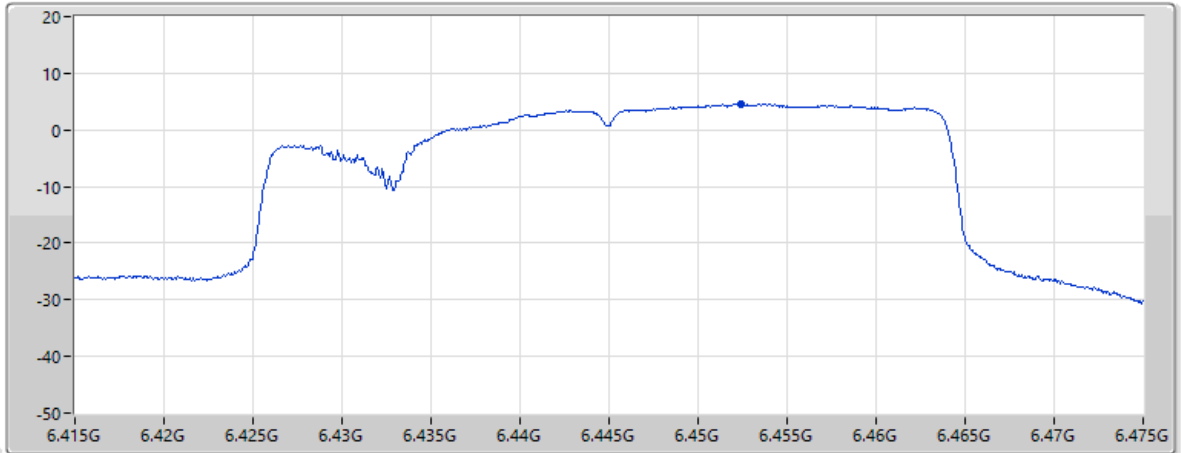


Page 8
Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.62				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-14.88	11.60	7.97	35.11	58.24

06/06/2026

EIRP PSD;Band:6.4G;ax40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6485MHz;TX

CF Freq
6.485GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
60s
Detector Type
RMS
CP BW
40MHz

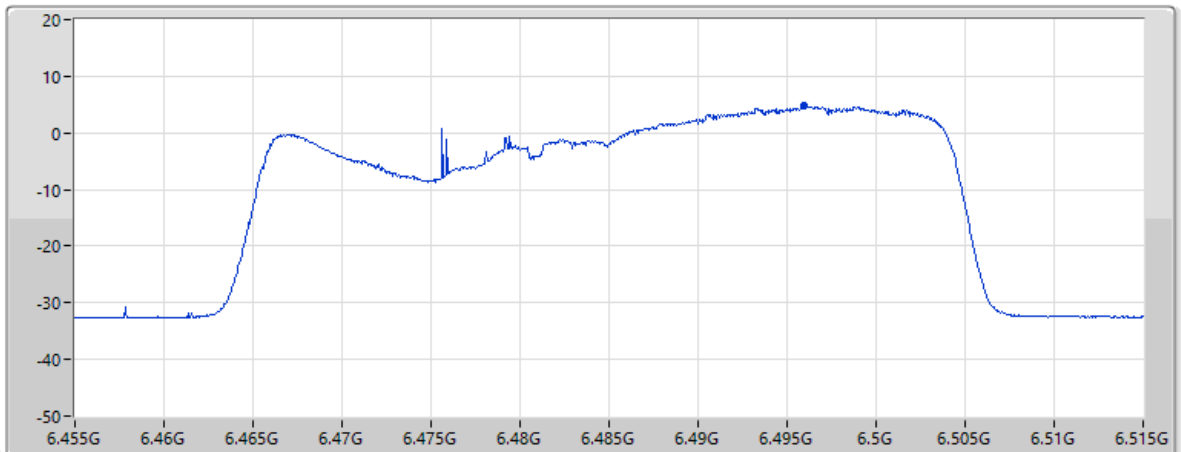

Page 7
Vertical

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.78				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.49	12.19	8.49	30.33	58.30

10/06/2026

EIRP PSD;Band:6.4G;ax40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6525MHz;TX

CF Freq
6.525GHz

Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
40MHz

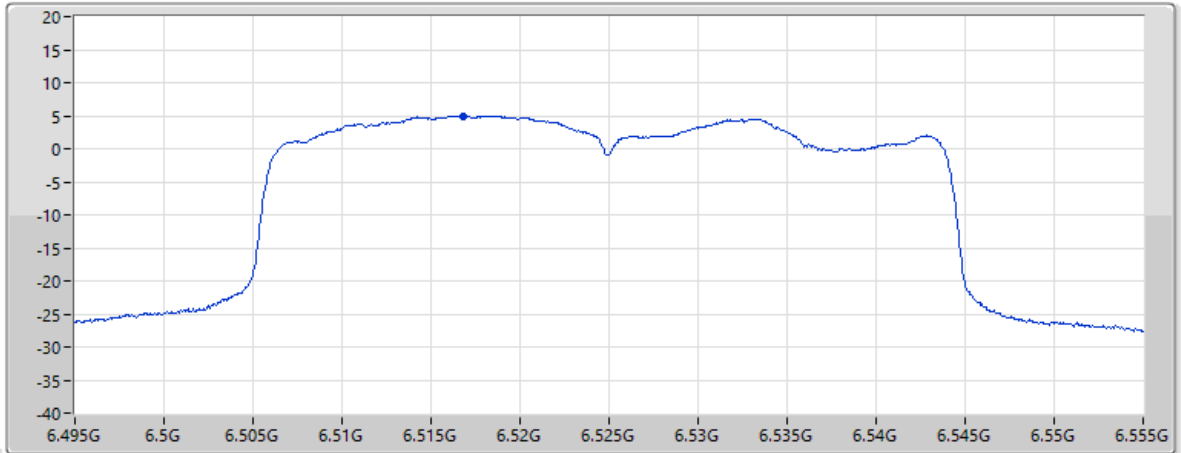

Page 8

Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.97				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-20.51	11.10	10.67	32.41	58.32

08/06/2026

EIRP PSD;Band:6.7G;ax40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

CF Freq
6.565GHz

Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
40MHz

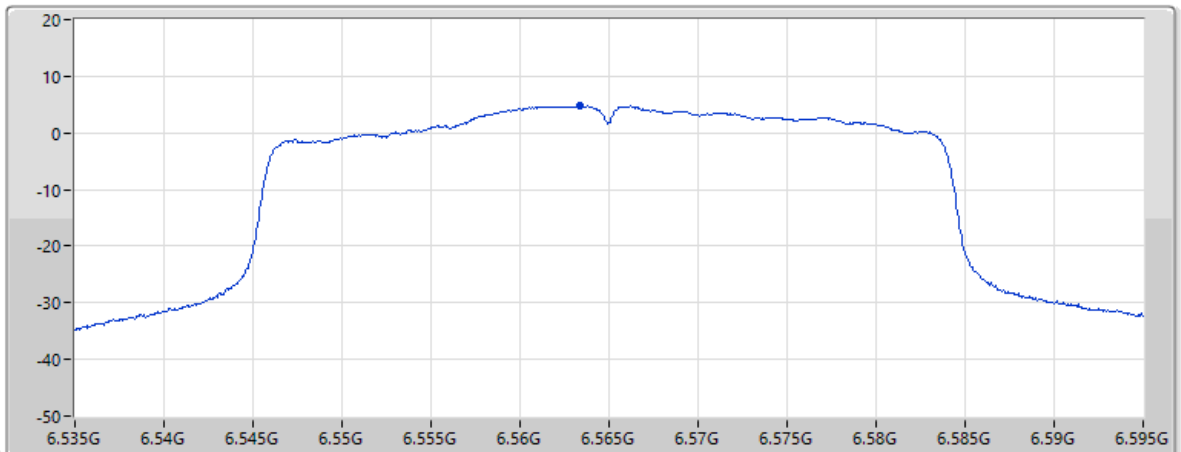


Page 7

Vertical

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.71				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-15.81	12.30	7.87	33.43	58.38


08/06/2026

EIRP PSD;Band:6.7G;ax40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

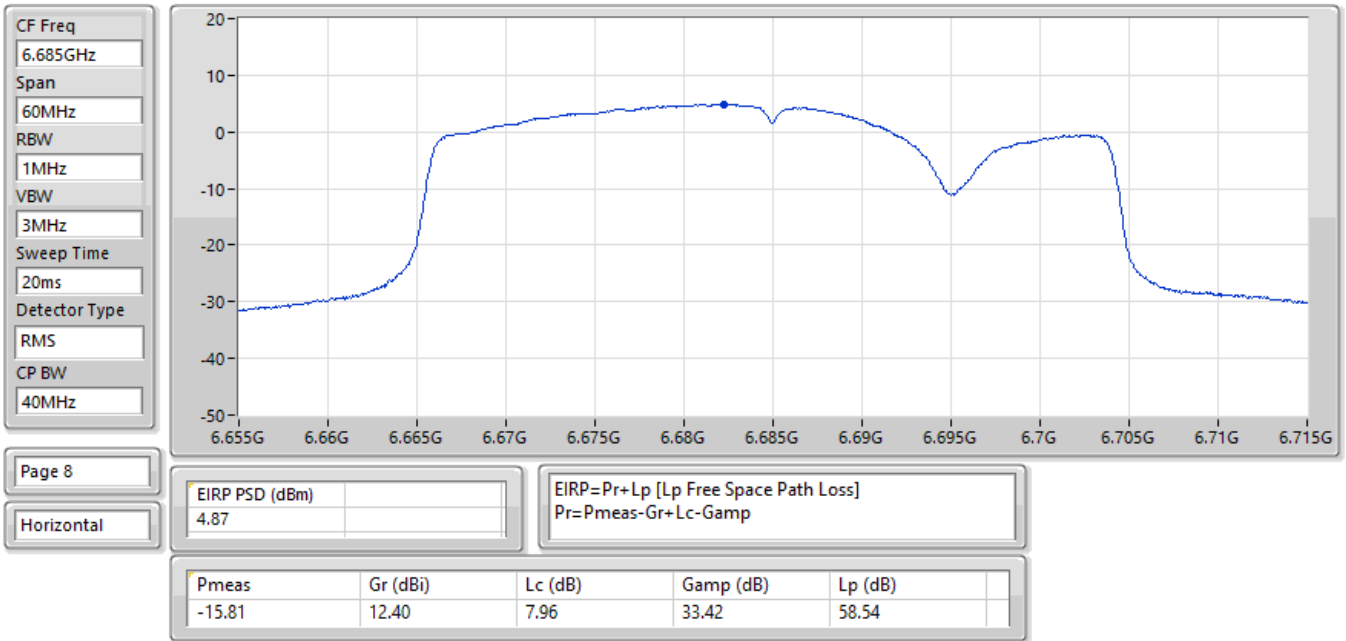


09/06/2026

EIRP PSD;Band:6.7G;ax40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6845MHz;TX

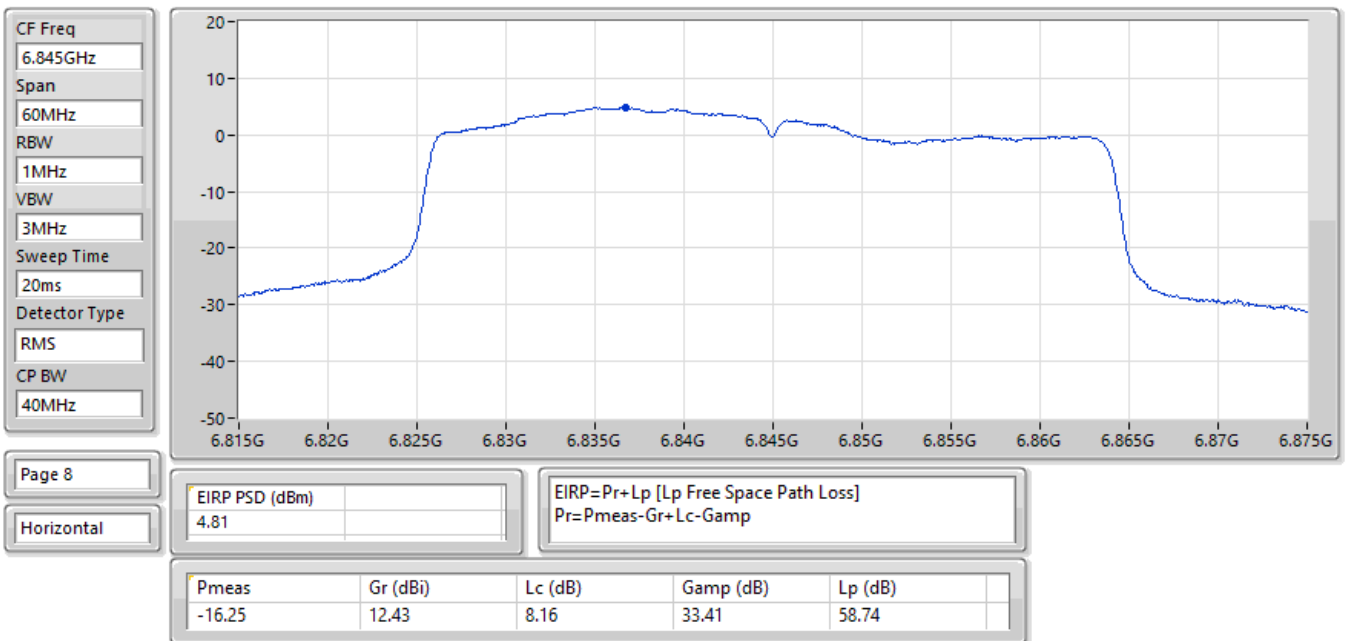


09/06/2026

EIRP PSD;Band:6.7G;ax40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6885MHz;TX

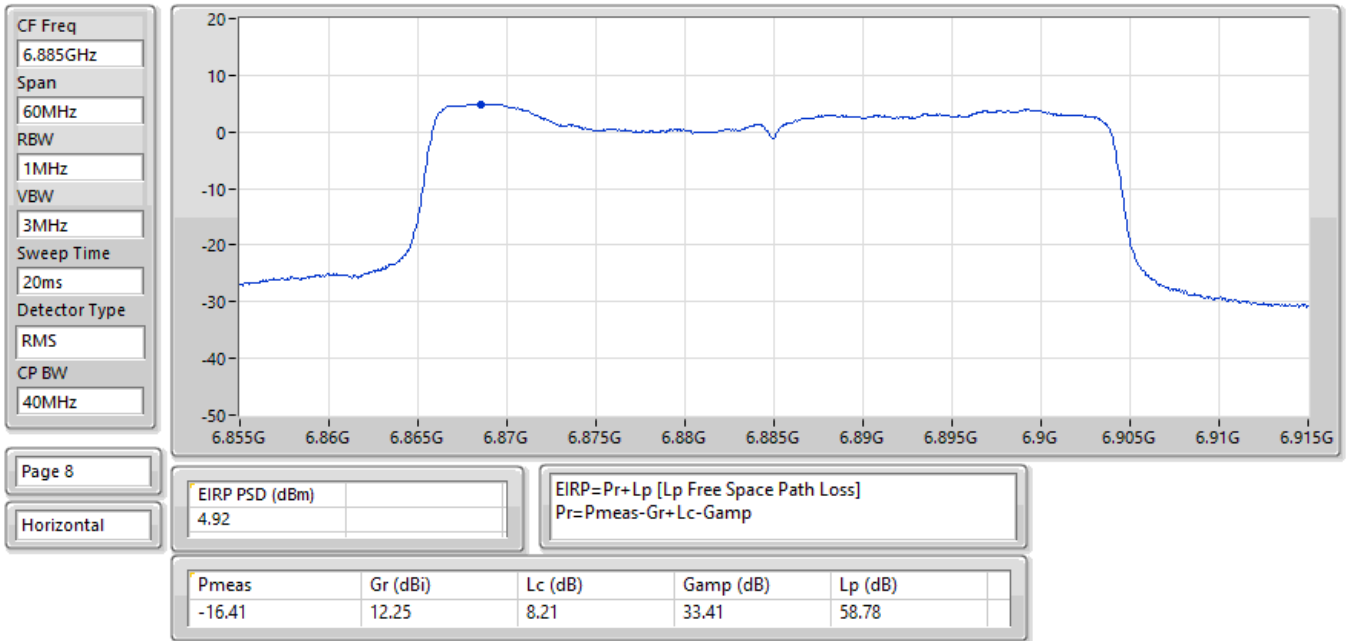


09/06/2026

EIRP PSD;Band:7.0G;ax40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7005MHz;TX

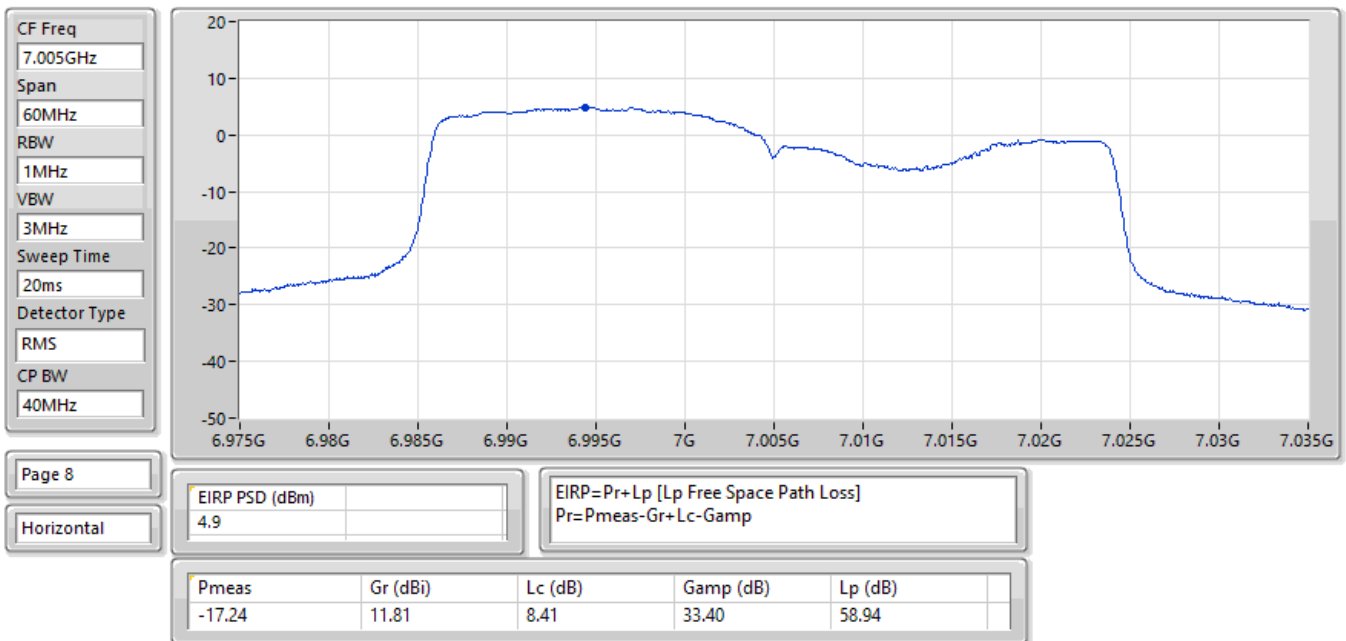


09/06/2026

EIRP PSD;Band:7.0G;ax40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7085MHz;TX

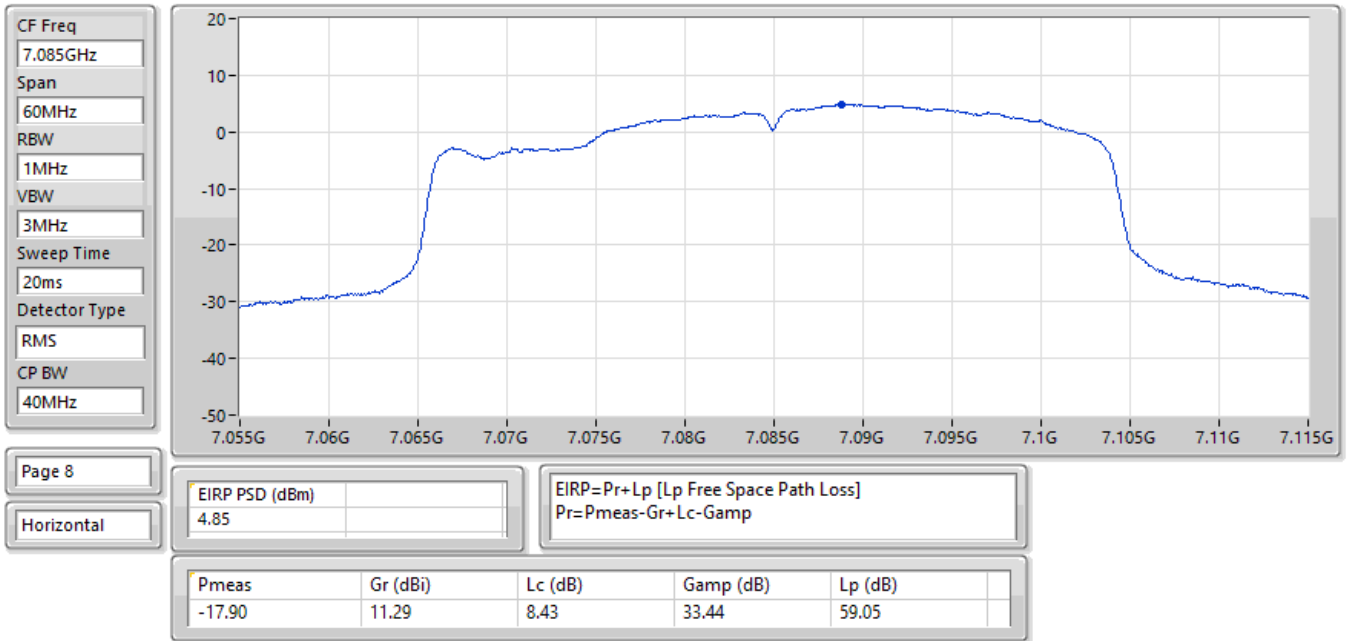


23/06/2026

EIRP PSD;Band:6.2G;ax80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:5985MHz;TX

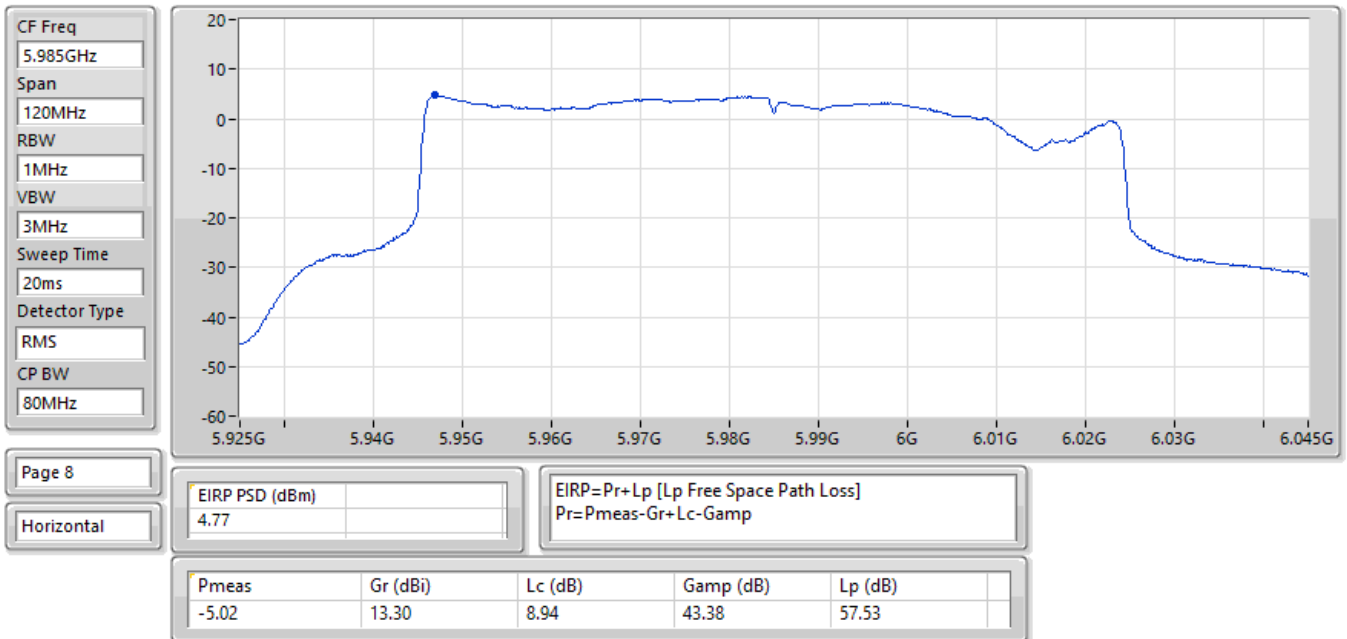


27/06/2026

EIRP PSD;Band:6.2G;ax80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6225MHz;TX

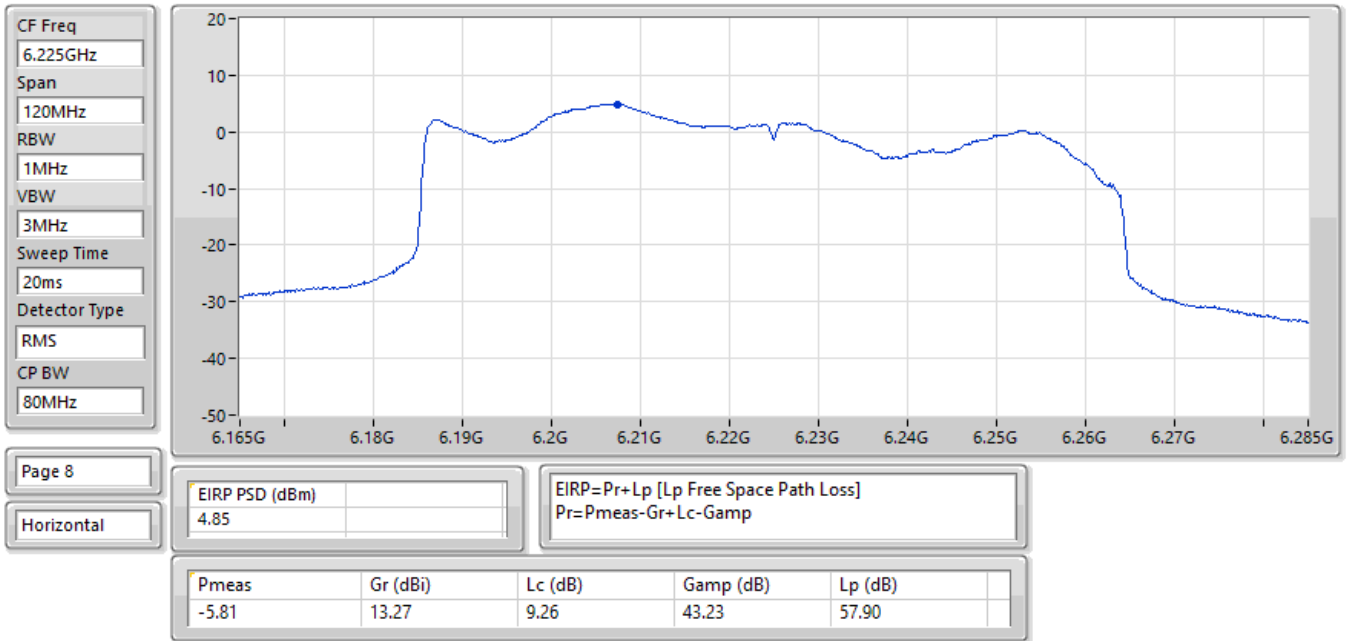


23/06/2026

EIRP PSD;Band:6.2G;ax80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6385MHz;TX

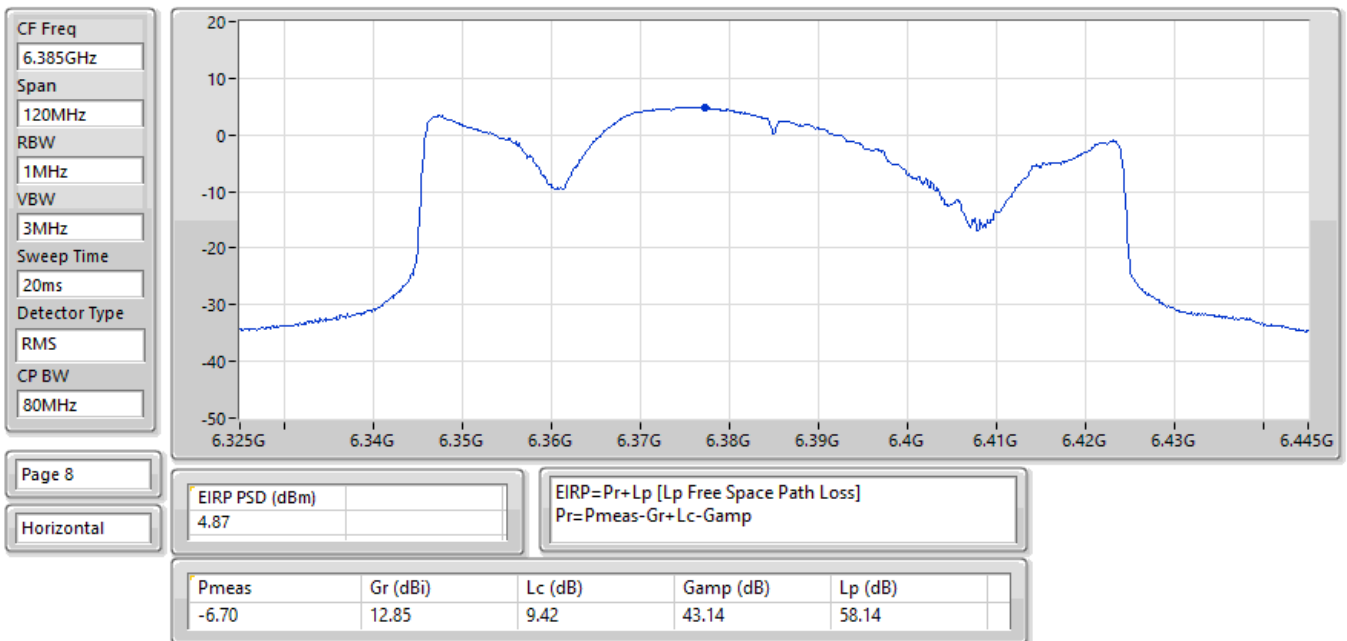


23/06/2026

EIRP PSD;Band:6.4G;ax80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6465MHz;TX

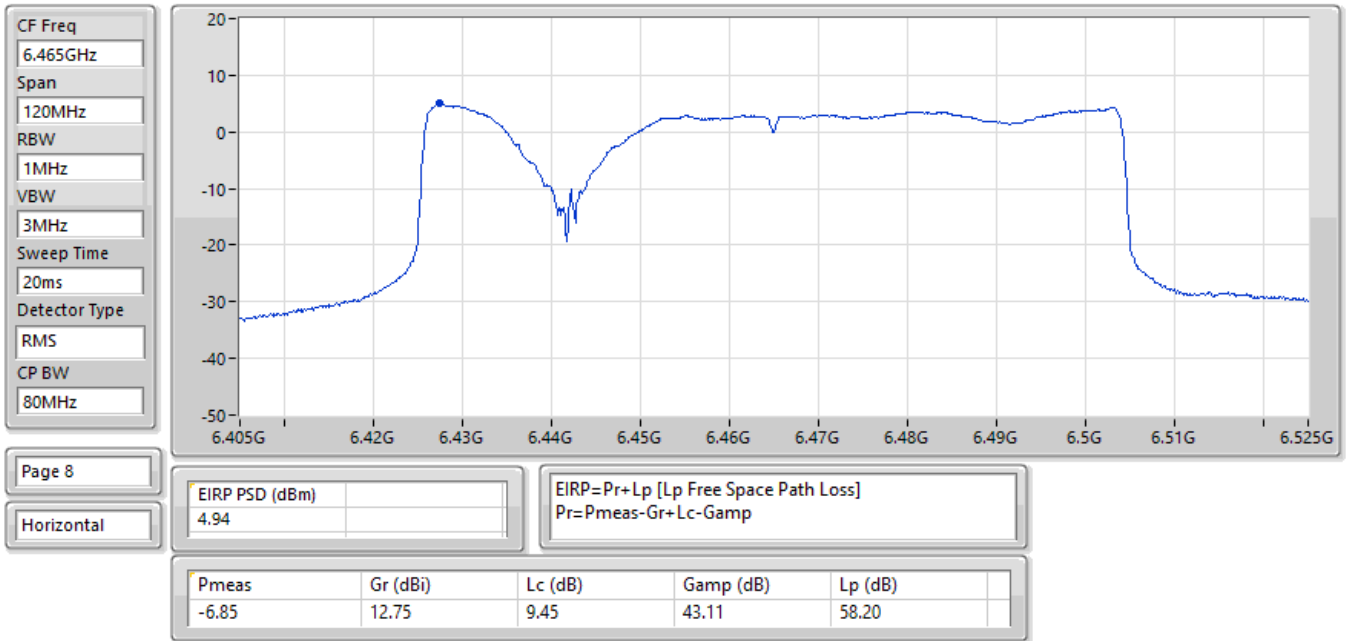


23/06/2026

EIRP PSD;Band:6.4G;ax80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6545MHz;TX

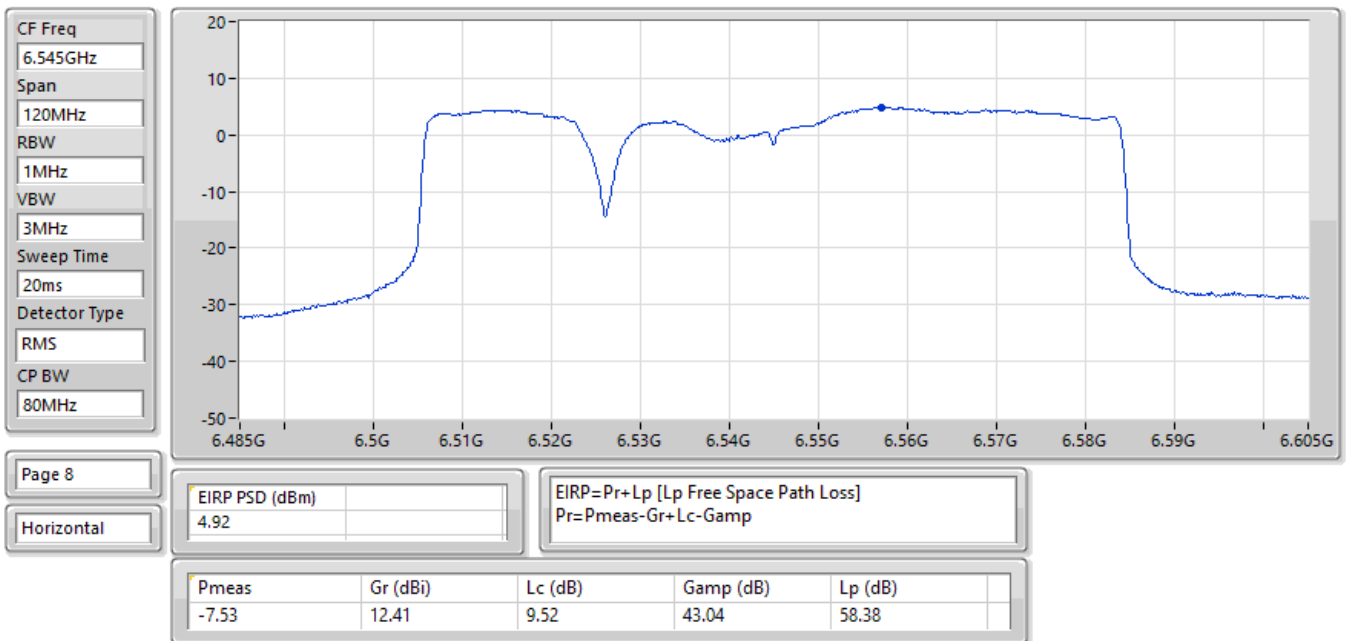


23/06/2026

EIRP PSD;Band:6.7G;ax80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6625MHz;TX

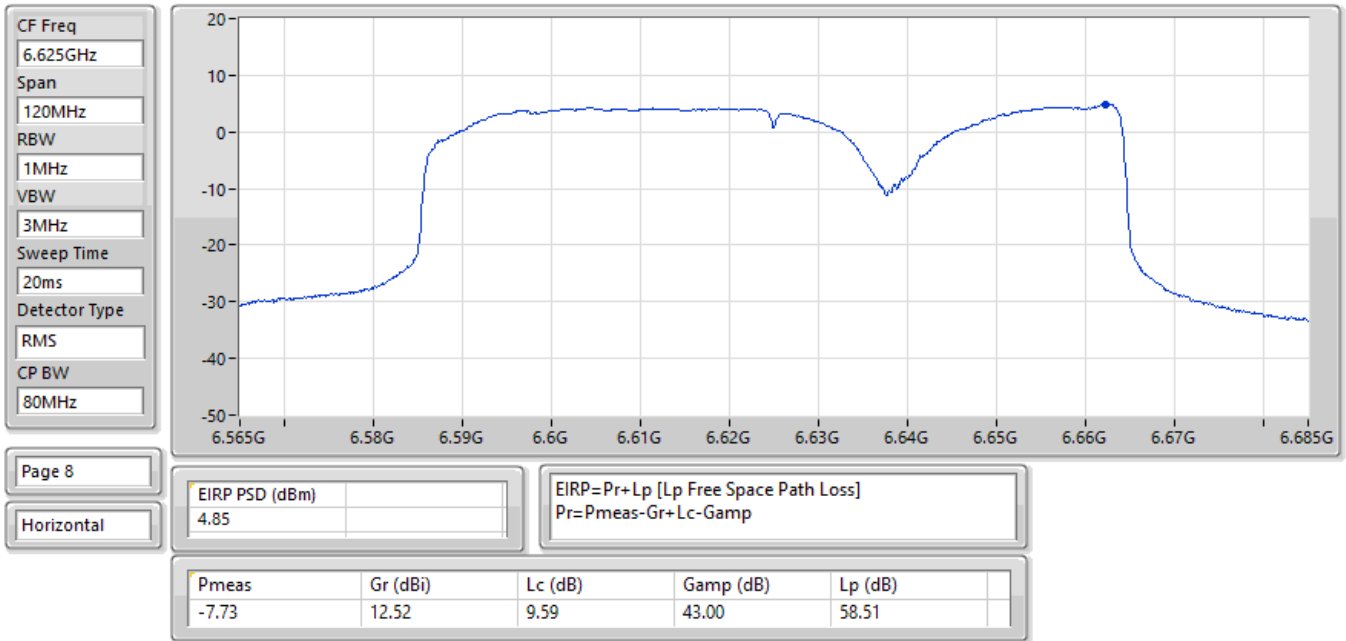


27/06/2026

EIRP PSD;Band:6.7G;ax80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6705MHz;TX

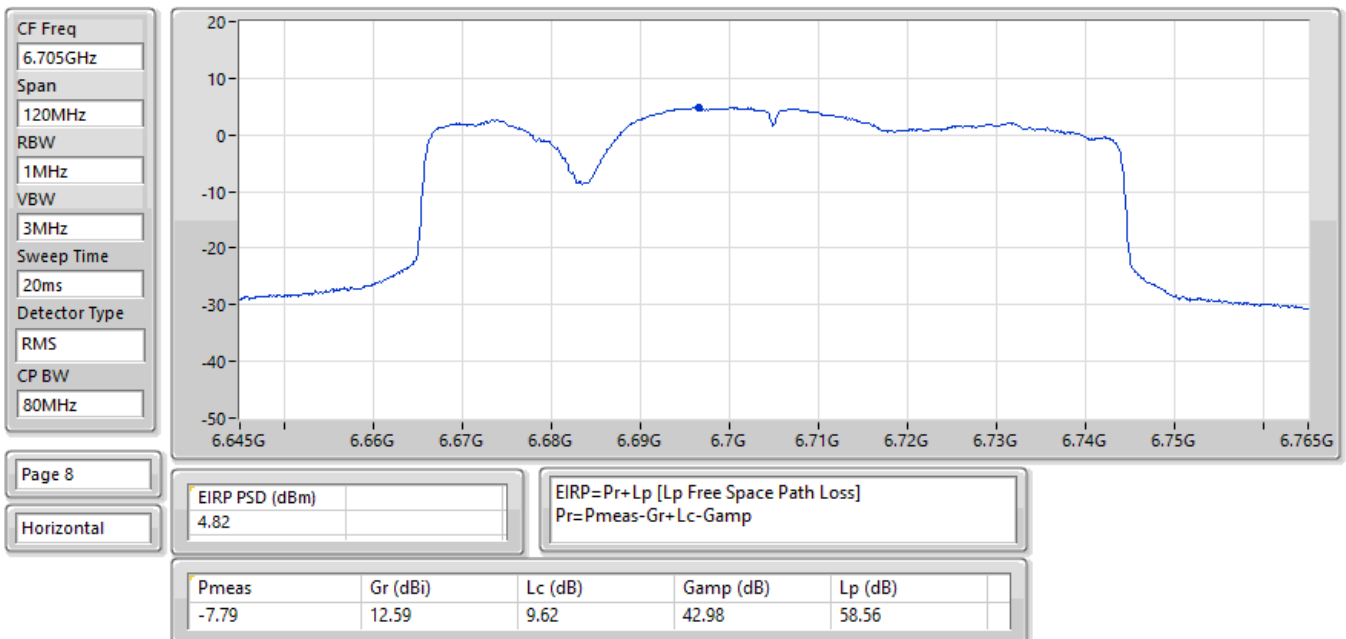


27/06/2026

EIRP PSD;Band:6.7G;ax80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

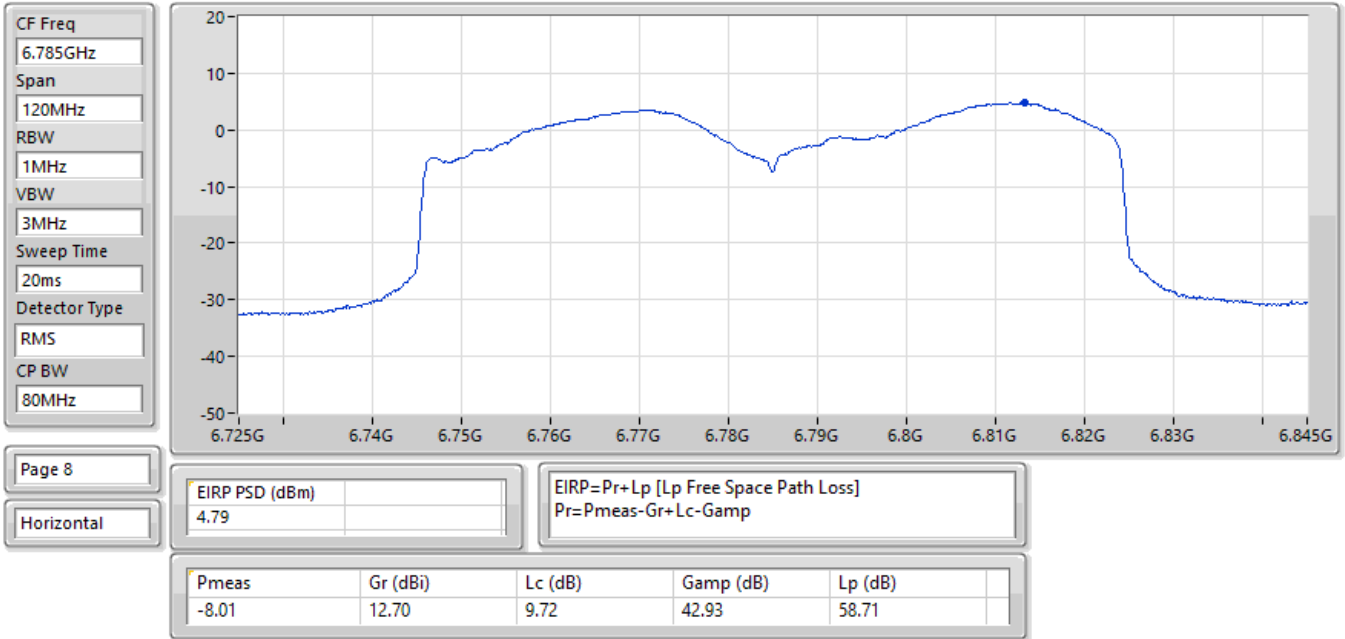


27/06/2026

EIRP PSD;Band:6.7G;ax80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6865MHz;TX

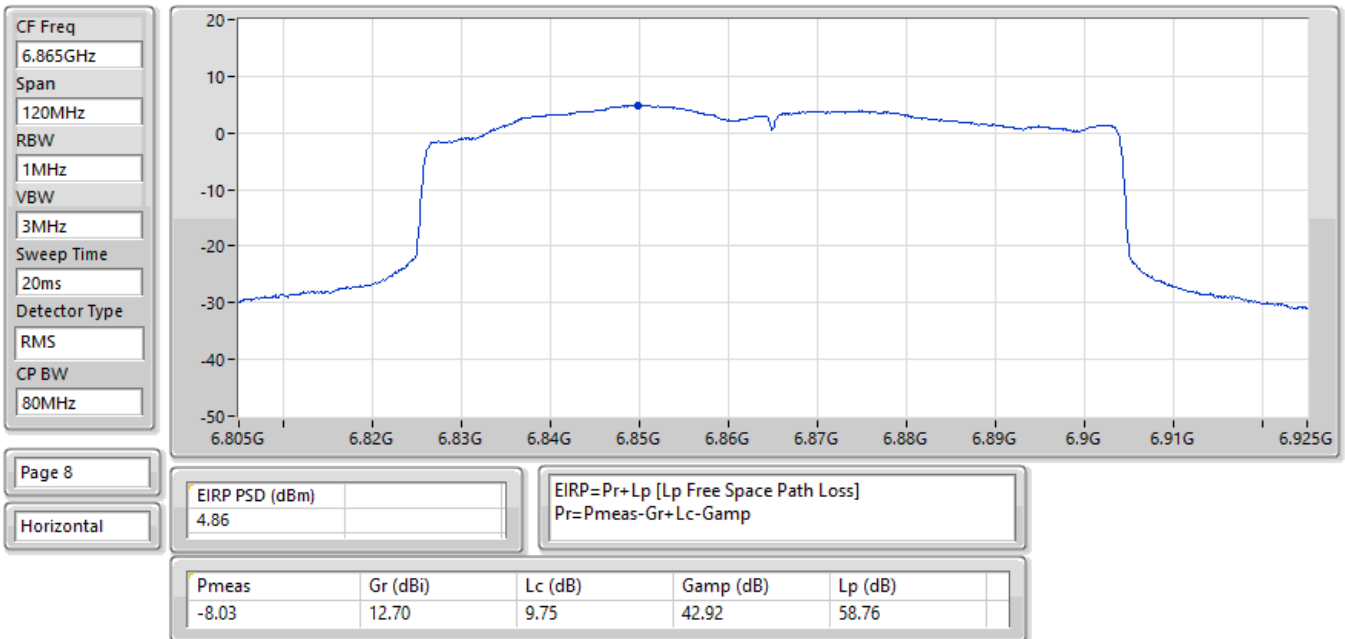


27/06/2026

EIRP PSD;Band:7.0G;ax80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6945MHz;TX

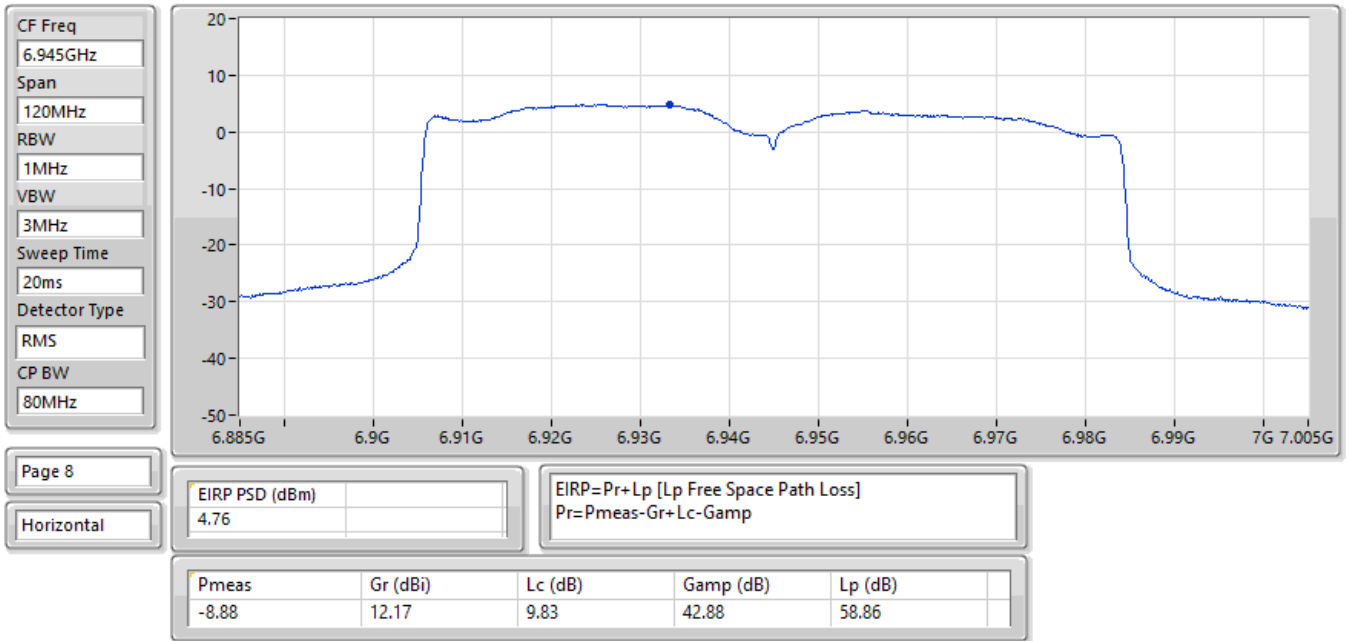


09/06/2026

EIRP PSD;Band:7.0G;ax80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:7025MHz;TX

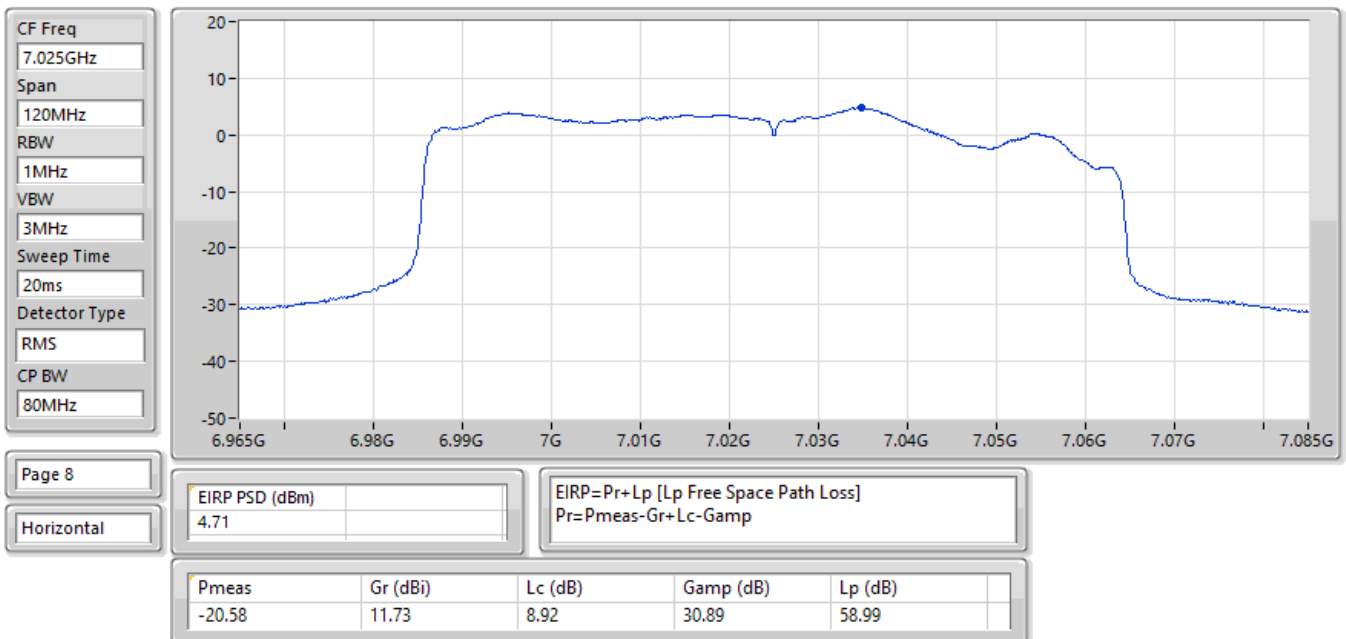


15/07/2026

EIRP PSD;Band:6.2G;ax160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6025MHz;TX

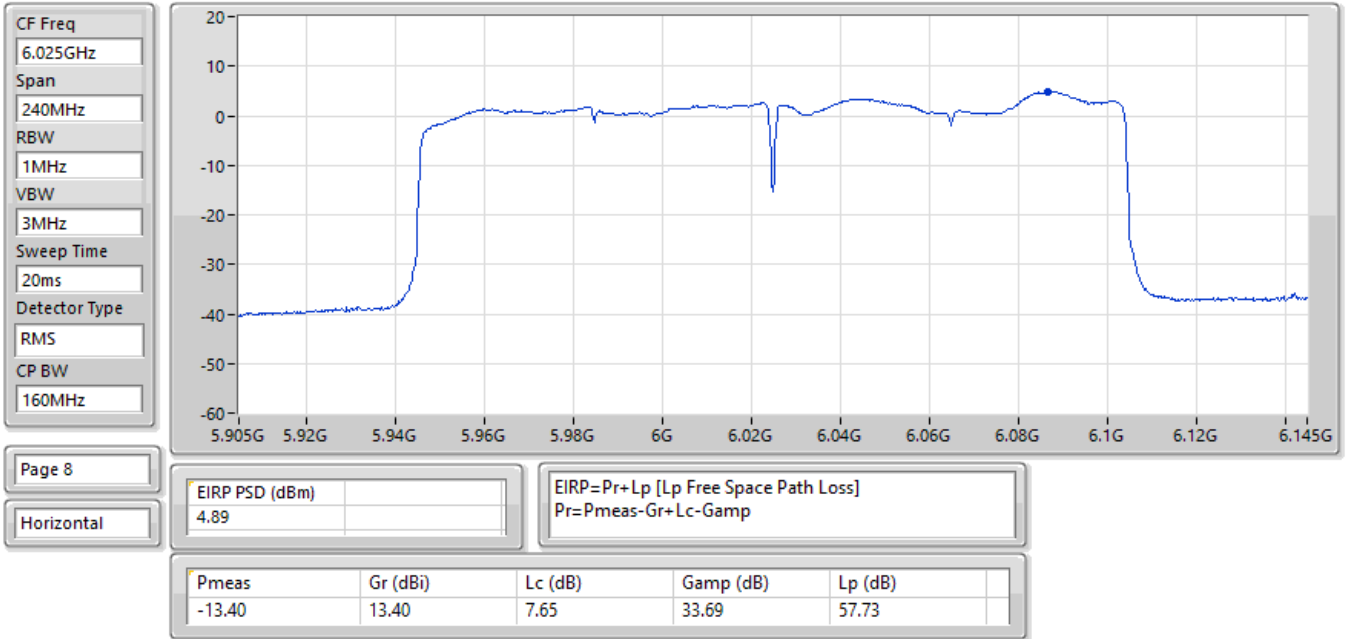

27/06/2026

EIRP PSD;Band:6.2G;ax160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6185MHz;TX

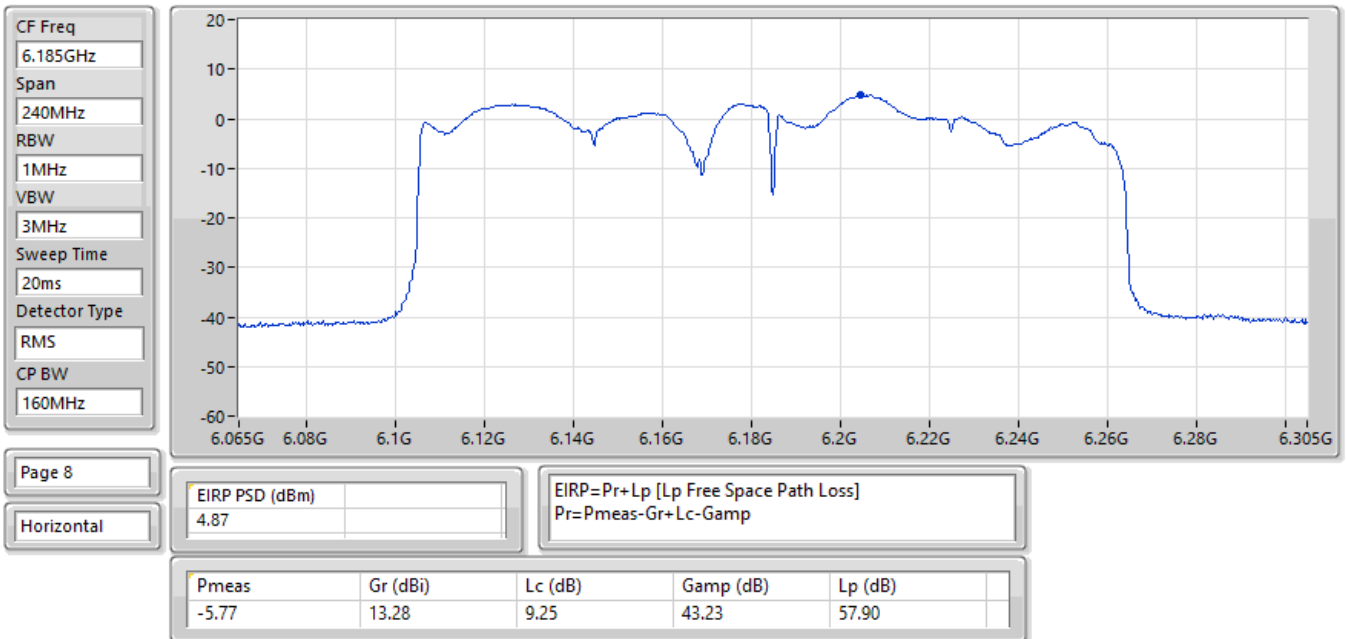

11/06/2026

EIRP PSD;Band:6.2G;ax160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6345MHz;TX

CF Freq
6.345GHz

Span
240MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
160MHz

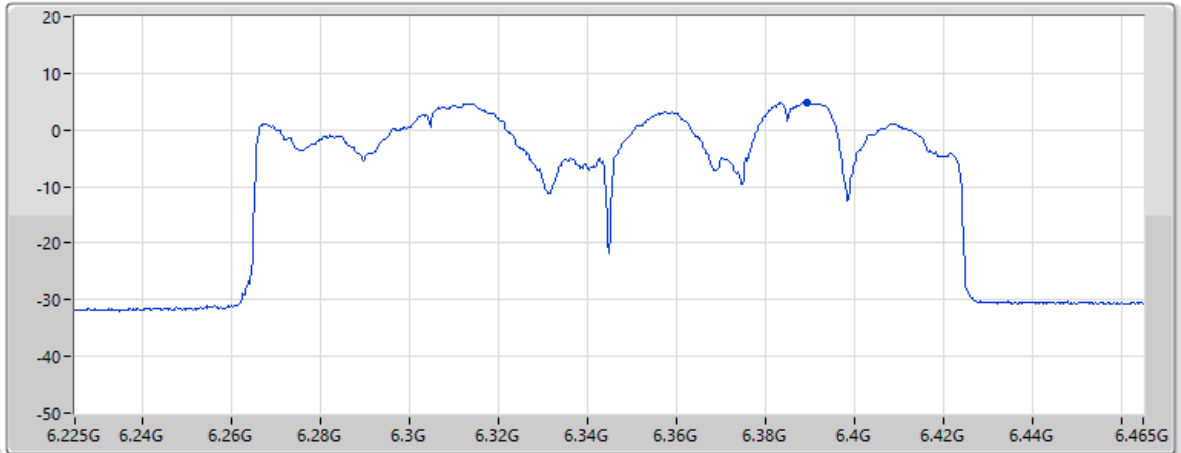

Page 8

Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.79				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-19.95	11.62	10.64	32.43	58.15

27/06/2026

EIRP PSD;Band:6.4G;ax160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6505MHz;TX

CF Freq
6.505GHz

Span
240MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
160MHz

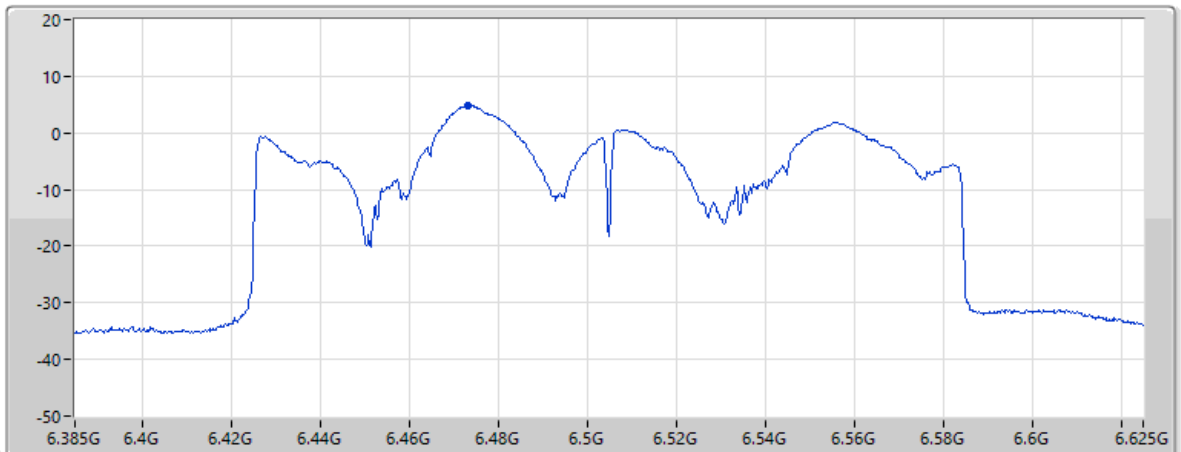


Page 8

Horizontal

EIRP PSD (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
4.89				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-7.16	12.61	9.48	43.08	58.26


15/07/2026

EIRP PSD;Band:6.7G;ax160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

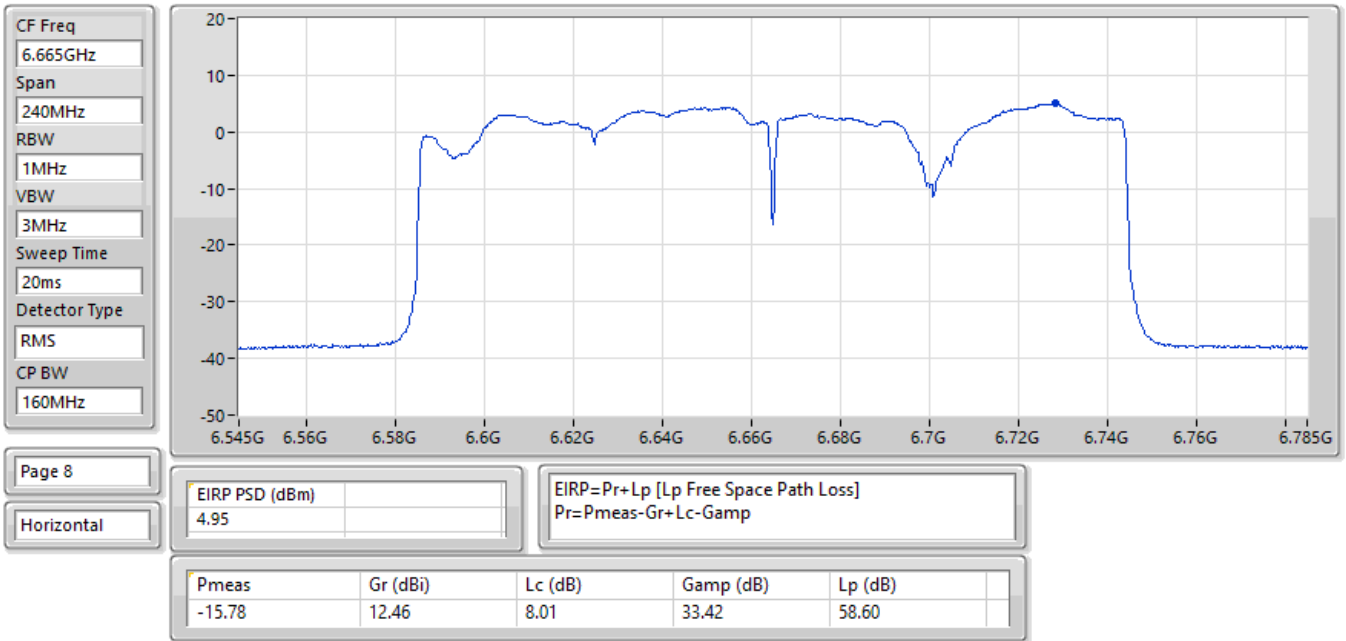


11/06/2026

EIRP PSD;Band:6.7G;ax160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6825MHz;TX

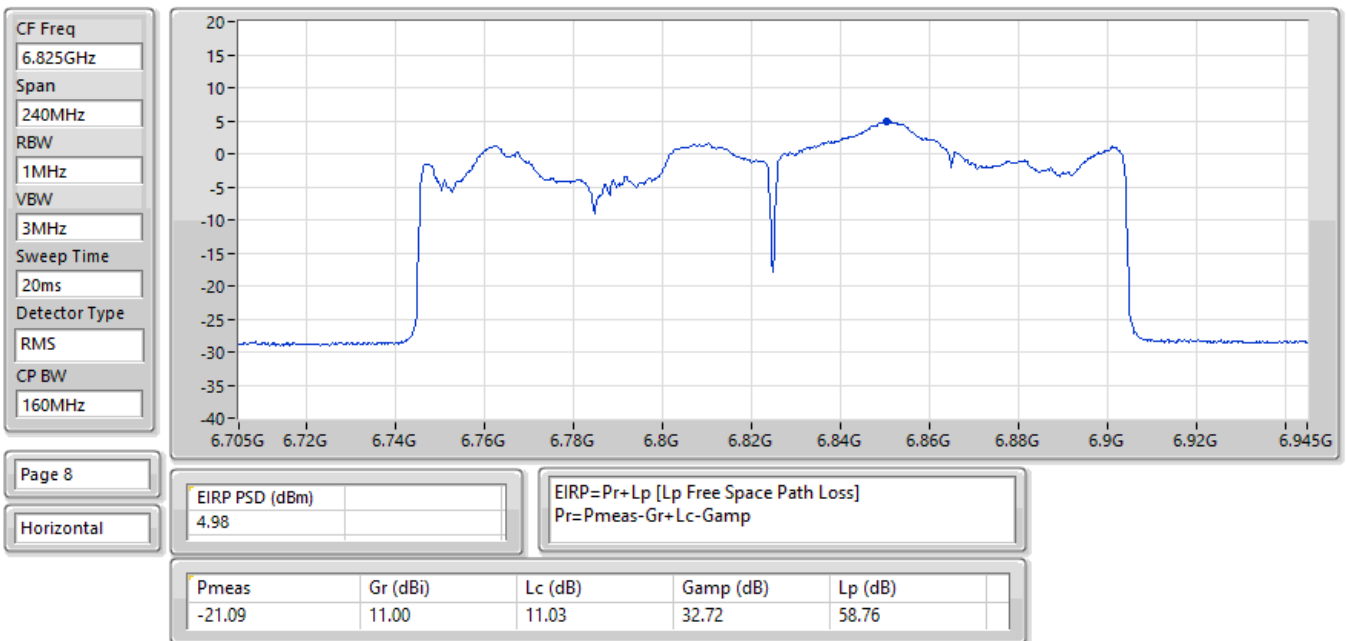

10/06/2026

EIRP PSD;Band:7.0G;ax160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6985MHz;TX

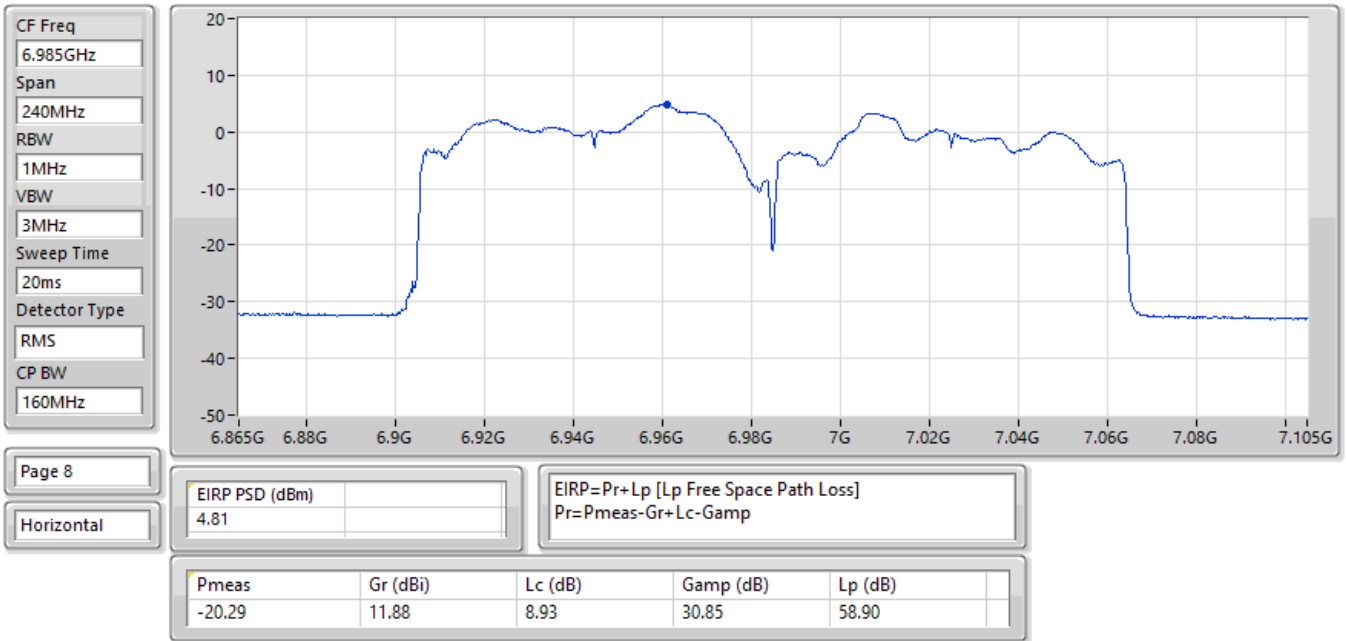




Radiated Emissions below 1GHz

Appendix E.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	333.61M	42.00	46.00	-4.00	Horizontal

Mode 1

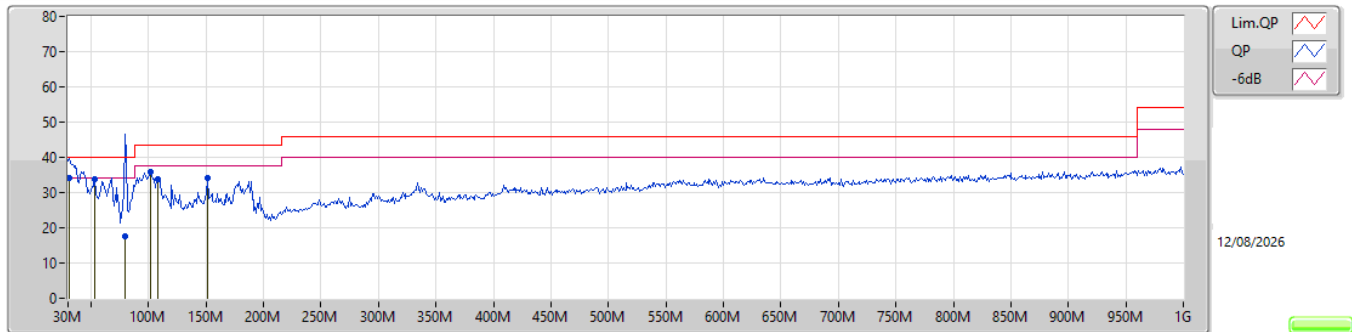

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
QP	30.97M	34.09	40.00	-5.91	-19.96	3	Vertical	40	1.00	"Worst"	54.05	23.55	0.97	44.48		
PK	53.28M	33.65	40.00	-6.35	-30.25	3	Vertical	179	1.00	-	63.90	13.20	1.32	44.77		
QP	79.47M	17.55	40.00	-22.45	-30.47	3	Vertical	178	1.25	-	48.02	12.76	1.58	44.81		
PK	101.78M	35.88	43.50	-7.62	-26.26	3	Vertical	138	1.25	-	62.14	16.78	1.79	44.83		
PK	108.57M	33.79	43.50	-9.71	-25.52	3	Vertical	258	1.50	-	59.31	17.45	1.84	44.81		
PK	151.25M	34.21	43.50	-9.29	-26.62	3	Vertical	109	1.00	-	60.83	15.93	2.18	44.73		

Mode 1

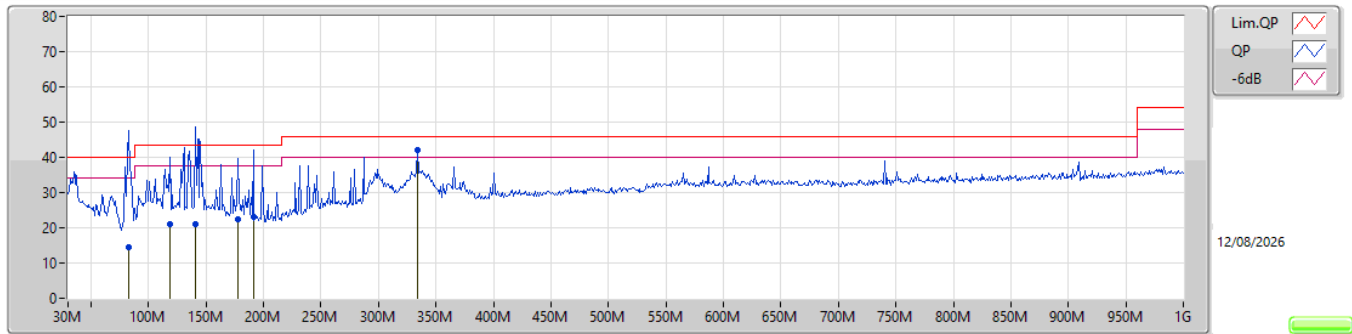

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
QP	82.38M	14.61	40.00	-25.39	-30.11	3	Horizontal	351	2.00	-	44.72	13.08	1.62	44.81		
QP	118.27M	20.96	43.50	-22.54	-25.13	3	Horizontal	179	3.00	-	46.09	17.73	1.93	44.79		
QP	140.58M	20.92	43.50	-22.58	-25.80	3	Horizontal	360	3.00	-	46.72	16.82	2.12	44.74		
QP	177.44M	22.27	43.50	-21.23	-27.29	3	Horizontal	74	2.00	-	49.56	15.01	2.39	44.69		
QP	191.02M	22.97	43.50	-20.53	-27.54	3	Horizontal	70	1.50	-	50.51	14.69	2.44	44.67		
PK	333.61M	42.00	46.00	-4.00	-21.81	3	Horizontal	0	1.00	"Worst"	63.81	19.50	3.19	44.50		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
6.875-7.125GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_4TX	Pass	RMS	7.1265G	67.84	68.20	-0.36	3	Horizontal	50	2.97	BP 1MHz

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

5955MHz_TX

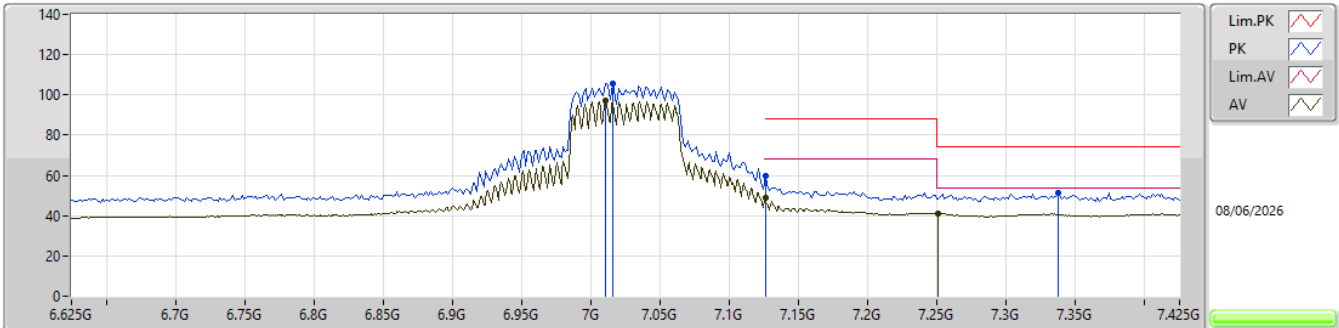


EUT_X_4TX
Setting 47
06-E-J-11-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.0154G	105.57	Inf	-Inf	95.17	3	Vertical	7	2.88	-	35.39	8.42	33.41			
RMS	7.0106G	97.41	Inf	-Inf	87.03	3	Vertical	7	2.88	-	35.36	8.42	33.40			
PK	7.1258G	59.55	88.20	-28.65	48.47	3	Vertical	7	2.88	-	36.10	8.44	33.46			
RMS	7.1258G	49.14	68.20	-19.06	38.06	3	Vertical	7	2.88	-	36.10	8.44	33.46			
PK	7.337G	51.23	74.00	-22.77	39.44	3	Vertical	7	2.88	-	36.53	8.81	33.55			
AV	7.2506G	41.11	54.00	-12.89	29.64	3	Vertical	7	2.88	-	36.40	8.58	33.51			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

5955MHz_TX

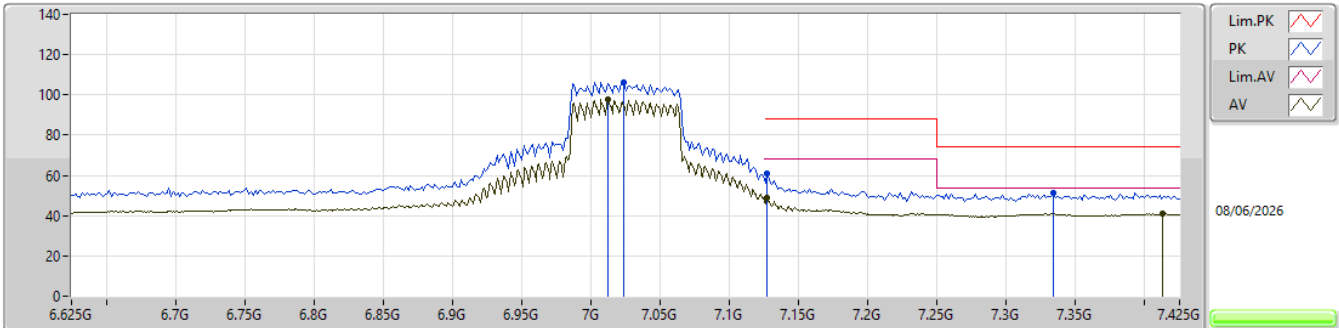


EUT_X_4TX
Setting 47
06-E-J-11-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.0234G	106.15	Inf	-Inf	95.70	3	Horizontal	26	2.94	-	35.44	8.42	33.41			
RMS	7.0122G	97.66	Inf	-Inf	87.28	3	Horizontal	26	2.94	-	35.37	8.42	33.41			
PK	7.1274G	60.68	88.20	-27.52	49.59	3	Horizontal	26	2.94	-	36.11	8.44	33.46			
RMS	7.1274G	49.04	68.20	-19.16	37.95	3	Horizontal	26	2.94	-	36.11	8.44	33.46			
PK	7.3338G	51.23	74.00	-22.77	39.45	3	Horizontal	26	2.94	-	36.53	8.80	33.55			
AV	7.413G	41.14	54.00	-12.86	29.30	3	Horizontal	26	2.94	-	36.45	8.97	33.58			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_4TX


5955MHz_TX

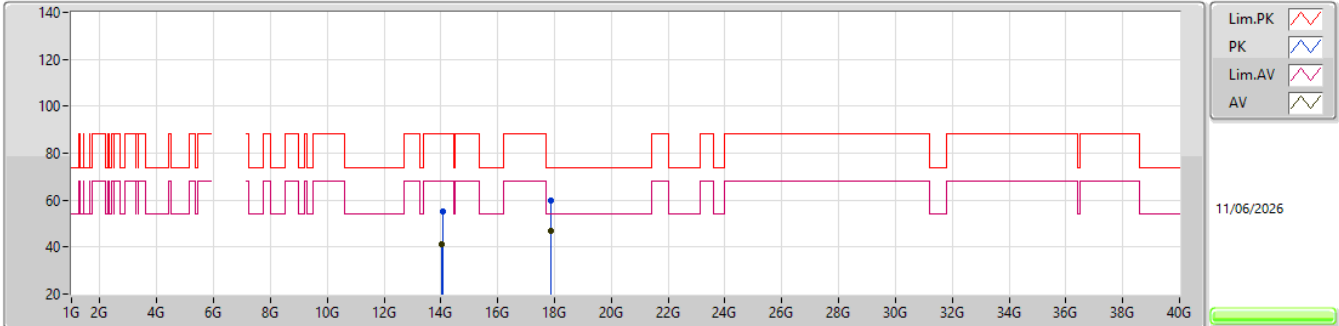EUT X_4TX
Setting 47
04-H-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	14.04999G	54.94	88.20	-33.26	42.20	3	Vertical	94	1.67	-	40.90	15.52	43.68			
RMS	14.04981G	41.06	68.20	-27.14	28.32	3	Vertical	94	1.67	-	40.90	15.52	43.68			
PK	17.85714G	60.07	74.00	-13.93	40.79	3	Vertical	18	1.61	-	46.00	16.31	43.03			
AV	17.87982G	46.72	54.00	-7.28	26.80	3	Vertical	18	1.61	-	46.63	16.31	43.02			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_4TX


5955MHz_TX

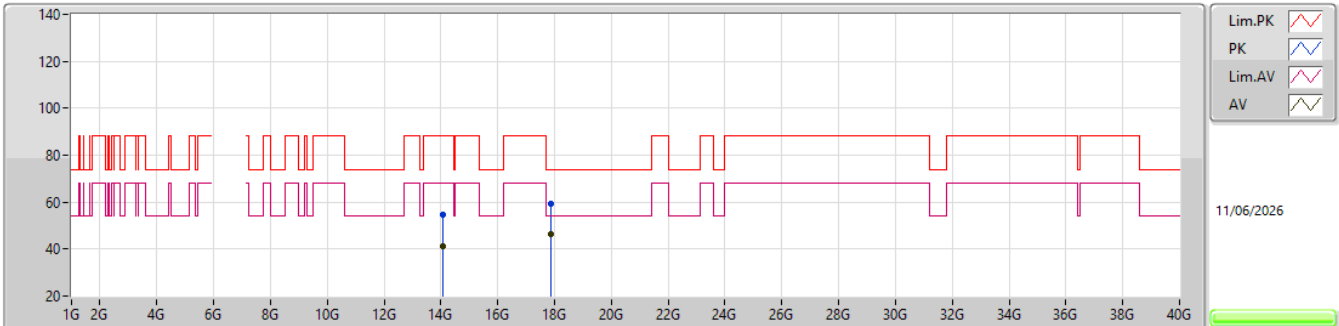EUT_X_4TX
Setting 47
04-H-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	14.05088G	54.67	88.20	-33.53	41.92	3	Horizontal	320	2.72	-	40.91	15.52	43.68			
RMS	14.05027G	41.07	68.20	-27.13	28.33	3	Horizontal	320	2.72	-	40.90	15.52	43.68			
PK	17.87538G	59.49	74.00	-14.51	39.69	3	Horizontal	203	2.01	-	46.51	16.31	43.02			
AV	17.8797G	46.60	54.00	-7.40	26.68	3	Horizontal	203	2.01	-	46.63	16.31	43.02			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

5955MHz_TX

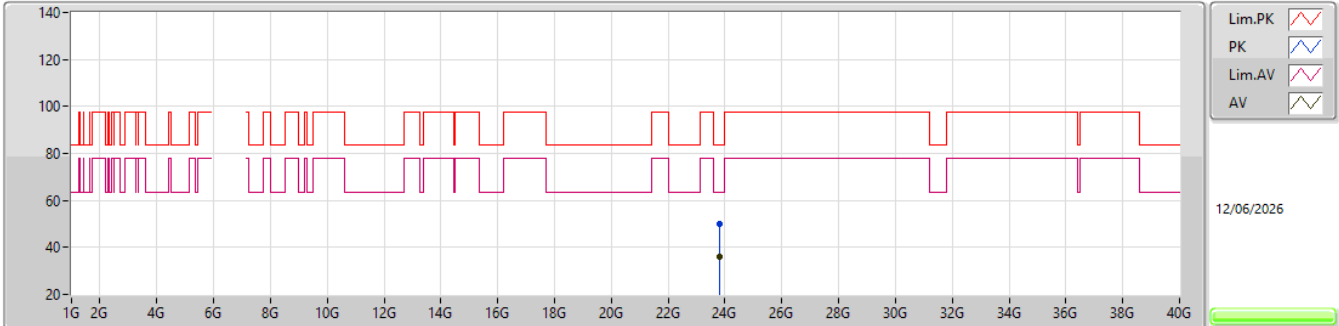


EUT_X_4TX
Setting 47
04-C-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.81869G	50.15	83.54	-33.39	41.04	1	Vertical	311	1.60	-	38.90	18.11	47.90			
AV	23.81944G	36.21	63.54	-27.33	27.09	1	Vertical	311	1.60	-	38.90	18.12	47.90			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

5955MHz_TX

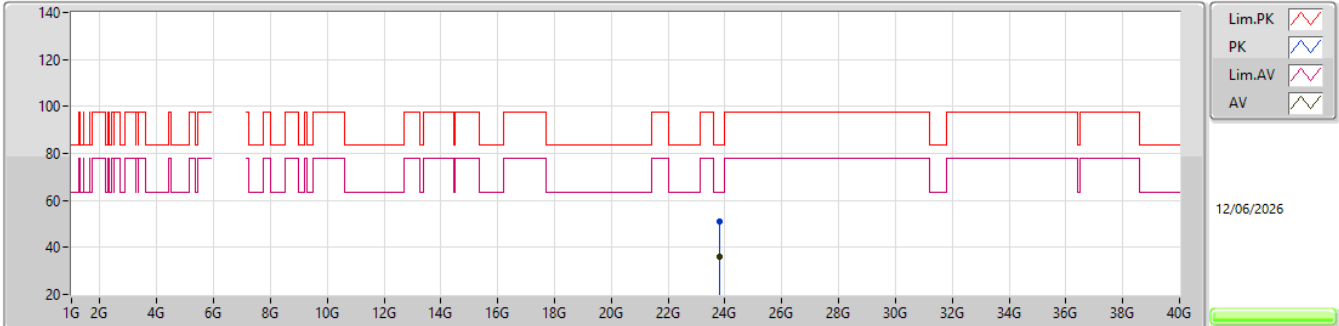


EUT_X_4TX
Setting 47
04-C-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.82062G	50.86	83.54	-32.68	41.74	1	Horizontal	160	1.13	-	38.90	18.12	47.90			
AV	23.81932G	36.27	63.54	-27.27	27.15	1	Horizontal	160	1.13	-	38.90	18.12	47.90			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6195MHz_TX

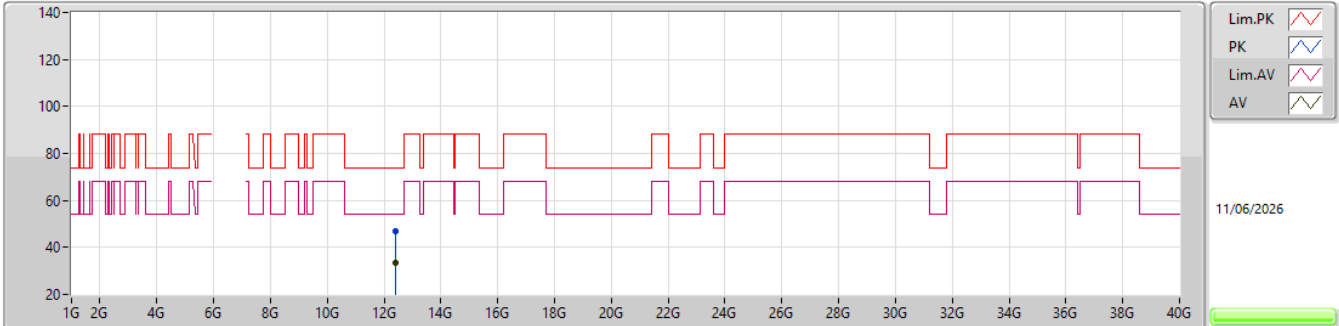


EUT X_4TX
Setting 41
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39006G	47.13	74.00	-26.87	37.82	3	Vertical	6	1.56	-	38.82	13.95	43.46			
AV	12.38997G	33.35	54.00	-20.65	24.04	3	Vertical	6	1.56	-	38.82	13.95	43.46			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6195MHz_TX

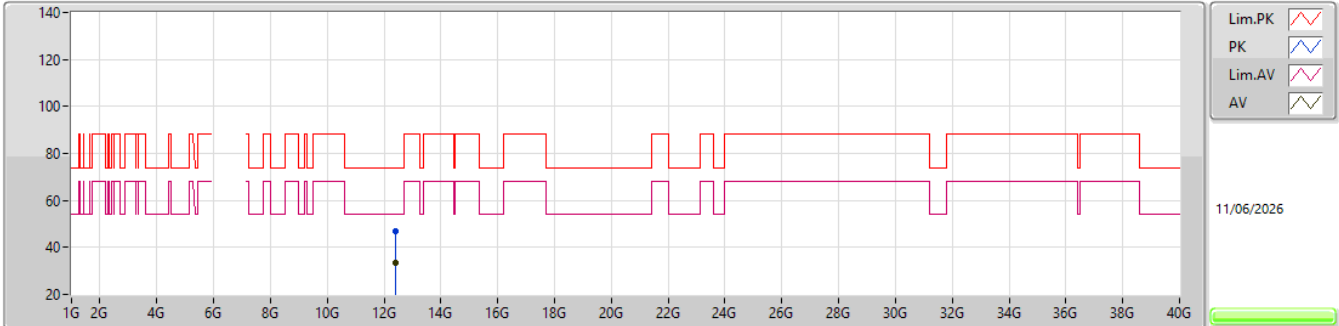


EUT X_4TX
Setting 41
04-H-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.38955G	47.04	74.00	-26.96	37.73	3	Horizontal	241	1.10	-	38.82	13.95	43.46			
AV	12.39012G	33.40	54.00	-20.60	24.09	3	Horizontal	241	1.10	-	38.82	13.95	43.46			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6195MHz_TX

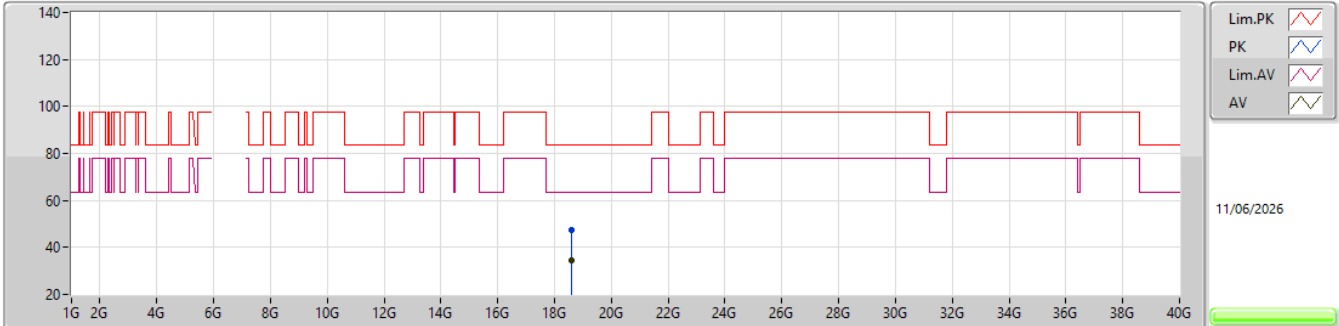


EUT X_4TX
Setting 41
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.59856G	47.60	83.54	-35.94	42.82	1	Vertical	205	1.63	-	37.69	15.75	48.66			
AV	18.59754G	34.40	63.54	-29.14	29.62	1	Vertical	205	1.63	-	37.69	15.75	48.66			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6195MHz_TX

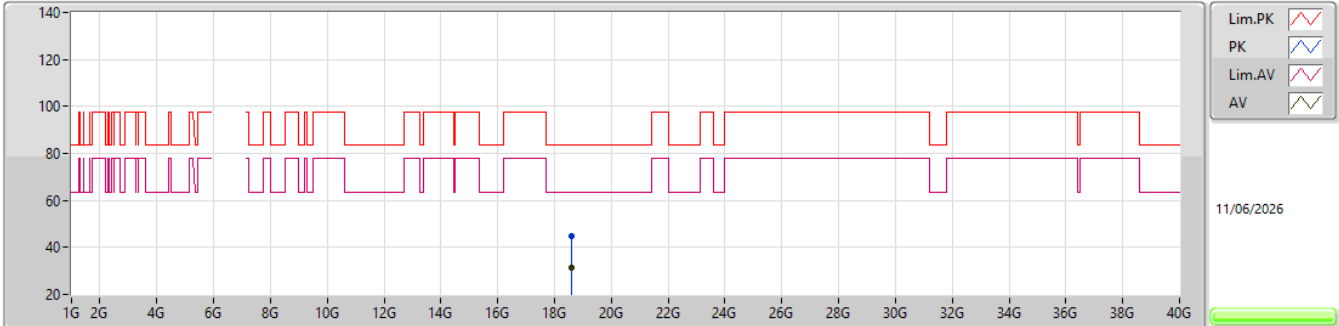


EUT_X_4TX
Setting 41
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.59448G	44.91	83.54	-38.63	40.14	1	Horizontal	349	1.86	-	37.68	15.75	48.66			
AV	18.5994G	31.53	63.54	-32.01	26.74	1	Horizontal	349	1.86	-	37.70	15.75	48.66			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6415MHz_TX

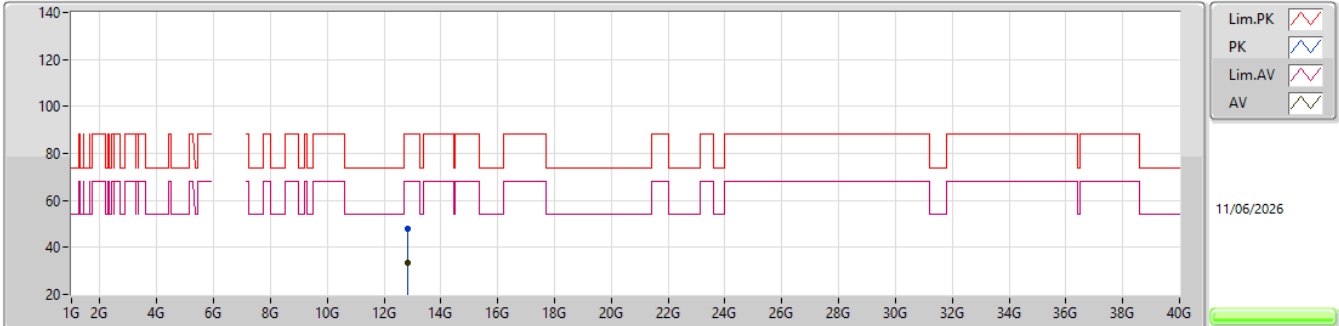


EUT X_4TX
Setting 45
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.82938G	48.12	88.20	-40.08	38.19	3	Vertical	75	1.06	-	39.06	14.37	43.50			
RMS	12.83003G	33.44	68.20	-34.76	23.50	3	Vertical	75	1.06	-	39.06	14.38	43.50			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6415MHz_TX

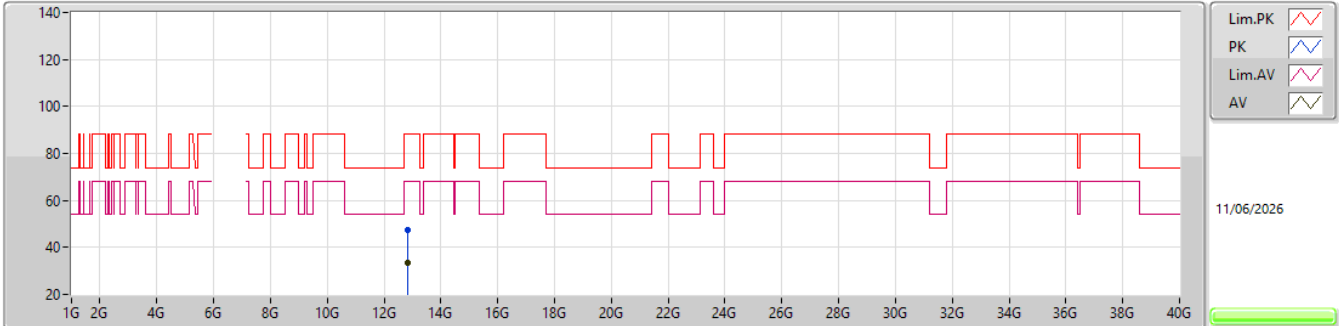


EUT X_4TX
Setting 45
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.82949G	47.57	88.20	-40.63	37.64	3	Horizontal	69	1.61	-	39.06	14.37	43.50			
RMS	12.8308G	33.48	68.20	-34.72	23.54	3	Horizontal	69	1.61	-	39.06	14.38	43.50			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6415MHz_TX

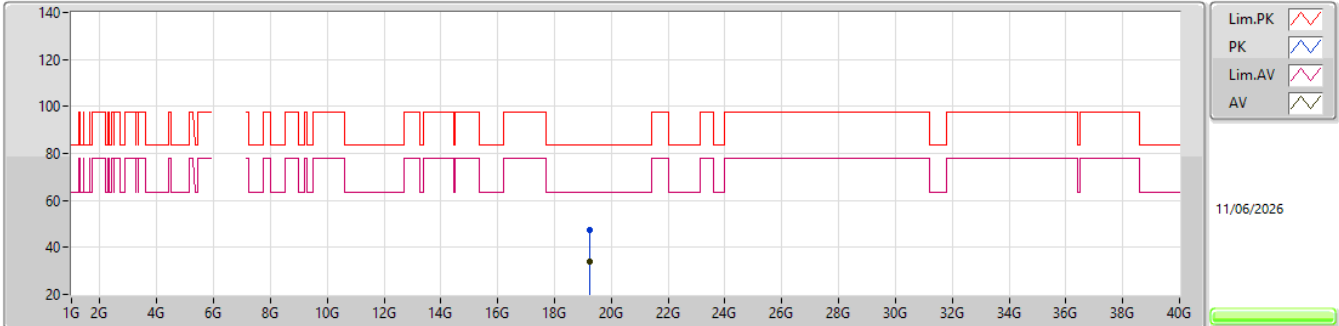


EUT X_4TX
Setting 45
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.24596G	47.16	83.54	-36.38	42.08	1	Vertical	255	2.12	-	37.88	16.05	48.85			
AV	19.25202G	34.18	63.54	-29.36	29.09	1	Vertical	255	2.12	-	37.89	16.05	48.85			

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6415MHz_TX

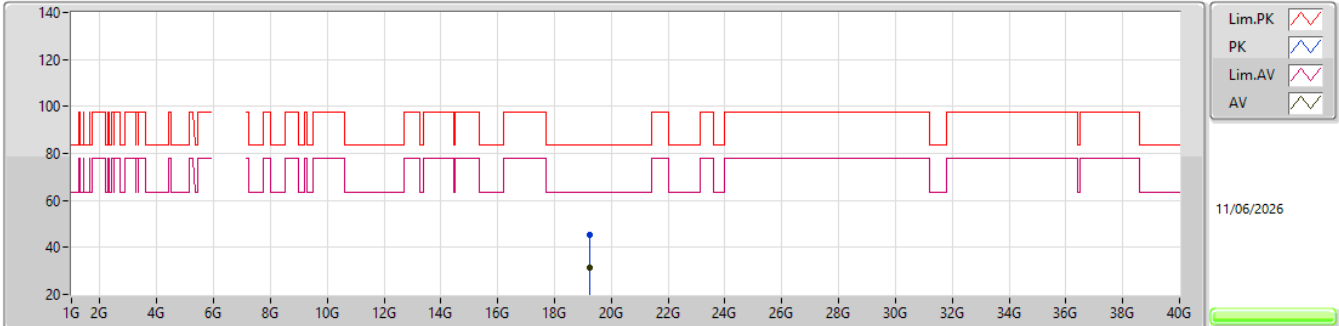


EUT_X_4TX
Setting 45
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.25466G	45.15	83.54	-38.39	40.08	1	Horizontal	64	2.85	-	37.87	16.05	48.85			
AV	19.24134G	31.29	63.54	-32.25	26.25	1	Horizontal	64	2.85	-	37.85	16.04	48.85			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

5965MHz_TX

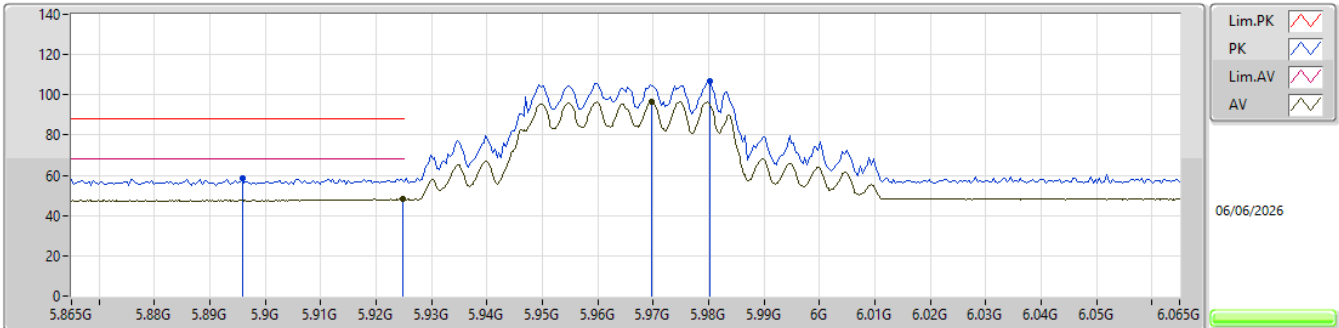


EUT X_4TX
Setting 56
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.8958G	58.28	88.20	-29.92	52.33	3	Vertical	76	1.74	-	32.19	7.52	33.76			
RMS	5.9248G	48.37	68.20	-19.83	42.31	3	Vertical	76	1.74	-	32.25	7.57	33.76			
PK	5.9802G	107.07	Inf	-Inf	100.79	3	Vertical	76	1.74	-	32.36	7.67	33.75			
RMS	5.9698G	96.82	Inf	-Inf	90.57	3	Vertical	76	1.74	-	32.34	7.66	33.75			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

5965MHz_TX

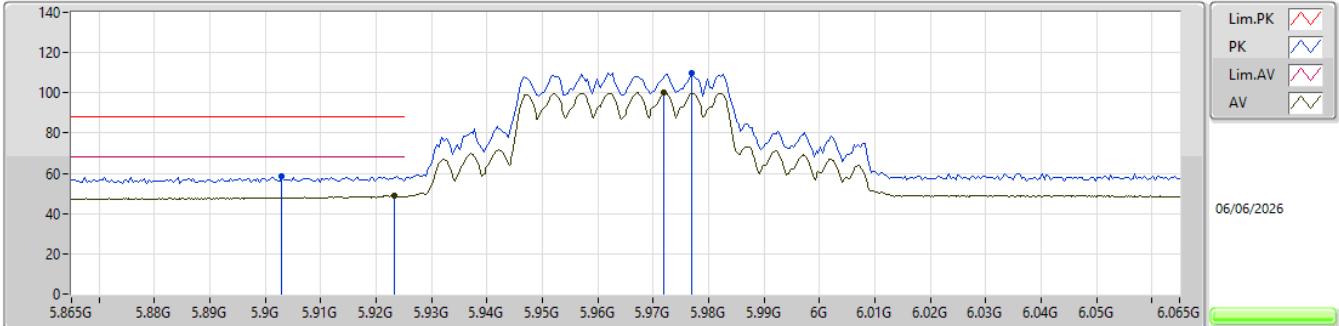


EUT X_4TX
Setting 56
06-E-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.903G	58.71	88.20	-29.49	52.72	3	Horizontal	10	2.46	-	32.21	7.54	33.76			
RMS	5.9232G	48.69	68.20	-19.51	42.63	3	Horizontal	10	2.46	-	32.25	7.57	33.76			
PK	5.977G	109.61	Inf	-Inf	103.34	3	Horizontal	10	2.46	-	32.35	7.67	33.75			
RMS	5.972G	100.11	Inf	-Inf	93.86	3	Horizontal	10	2.46	-	32.34	7.66	33.75			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

5965MHz_TX

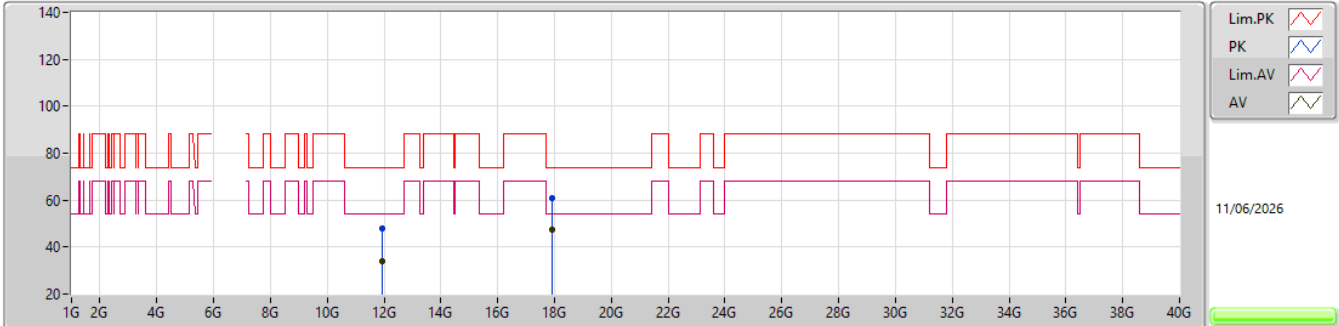


EUT X_4TX
Setting 56
04-H-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.92952G	47.70	74.00	-26.30	38.53	3	Vertical	108	1.37	-	38.90	13.52	43.25				
AV	11.931G	33.82	54.00	-20.18	24.65	3	Vertical	108	1.37	-	38.90	13.52	43.25				
PK	17.9019G	60.78	74.00	-13.22	40.21	3	Vertical	179	1.71	-	47.25	16.32	43.00				
AV	17.90208G	47.57	54.00	-6.43	27.00	3	Vertical	179	1.71	-	47.25	16.32	43.00				

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_4TX


5965MHz_TX

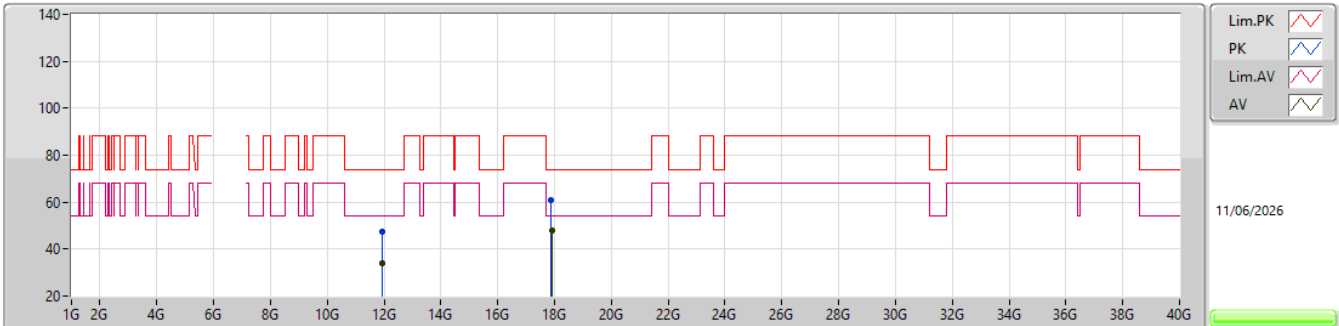EUT X_4TX
Setting 56
04-H-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.92937G	47.44	74.00	-26.56	38.27	3	Horizontal	119	2.83	-	38.90	13.52	43.25			
AV	11.93094G	33.82	54.00	-20.18	24.65	3	Horizontal	119	2.83	-	38.90	13.52	43.25			
PK	17.8863G	60.71	74.00	-13.29	40.58	3	Horizontal	47	2.38	-	46.82	16.32	43.01			
AV	17.90994G	47.69	54.00	-6.31	26.92	3	Horizontal	47	2.38	-	47.44	16.32	42.99			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

5965MHz_TX

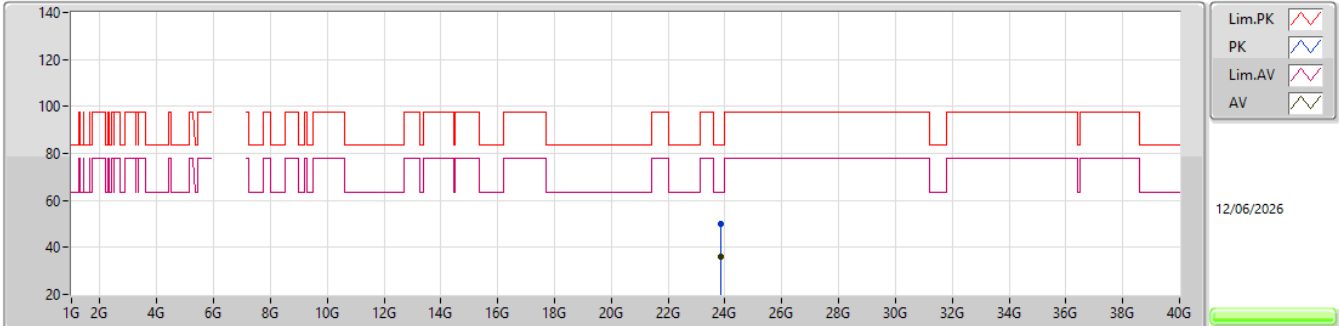


EUT X_4TX
Setting 56
04-C-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.85995G	50.07	83.54	-33.47	40.93	1	Vertical	291	3.00	-	38.90	18.14	47.90			
AV	23.86003G	36.11	63.54	-27.43	26.97	1	Vertical	291	3.00	-	38.90	18.14	47.90			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

5965MHz_TX

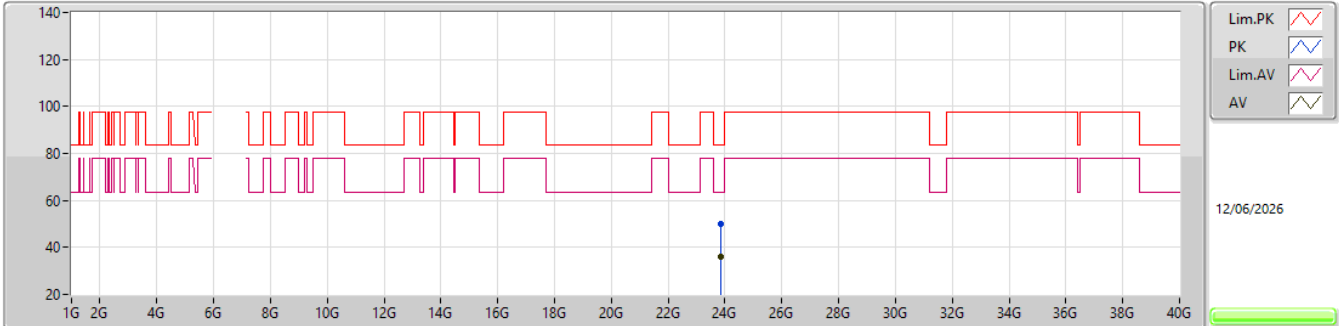


EUT X_4TX
Setting 56
04-C-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.86131G	50.08	83.54	-33.46	40.94	1	Horizontal	182	1.60	-	38.90	18.14	47.90			
AV	23.85917G	36.14	63.54	-27.40	27.00	1	Horizontal	182	1.60	-	38.90	18.14	47.90			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6205MHz_TX

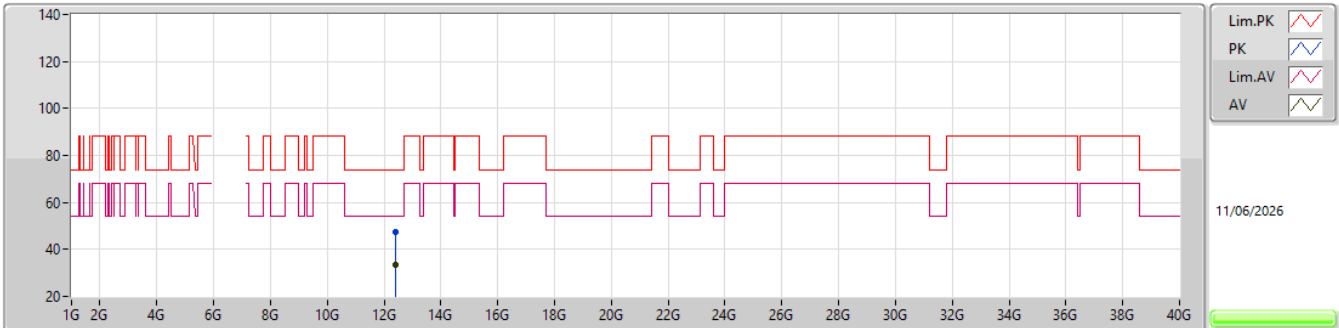


EUT X_4TX
Setting 54
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.41042G	47.23	74.00	-26.77	37.99	3	Vertical	210	2.99	-	38.74	13.97	43.47			
AV	12.40983G	33.31	54.00	-20.69	24.07	3	Vertical	210	2.99	-	38.74	13.97	43.47			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6205MHz_TX

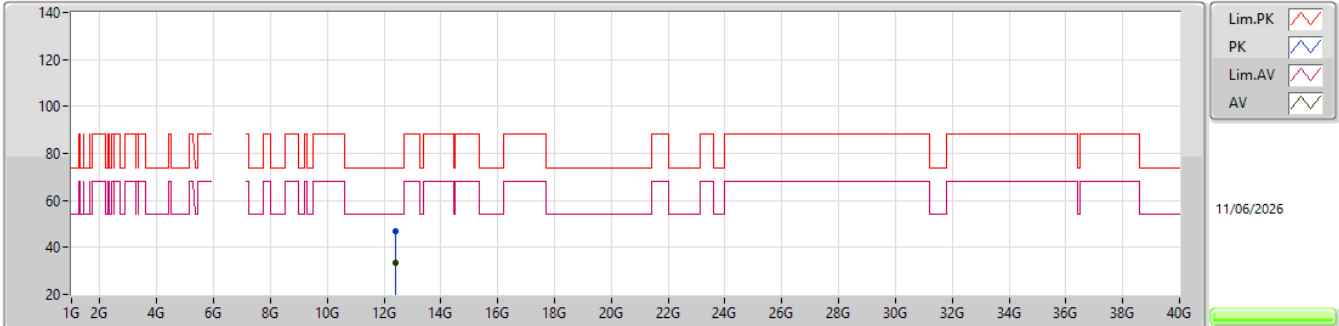


EUT X_4TX
Setting 54
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.40929G	47.06	74.00	-26.94	37.82	3	Horizontal	12	2.42	-	38.74	13.97	43.47			
AV	12.40994G	33.29	54.00	-20.71	24.05	3	Horizontal	12	2.42	-	38.74	13.97	43.47			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6205MHz_TX

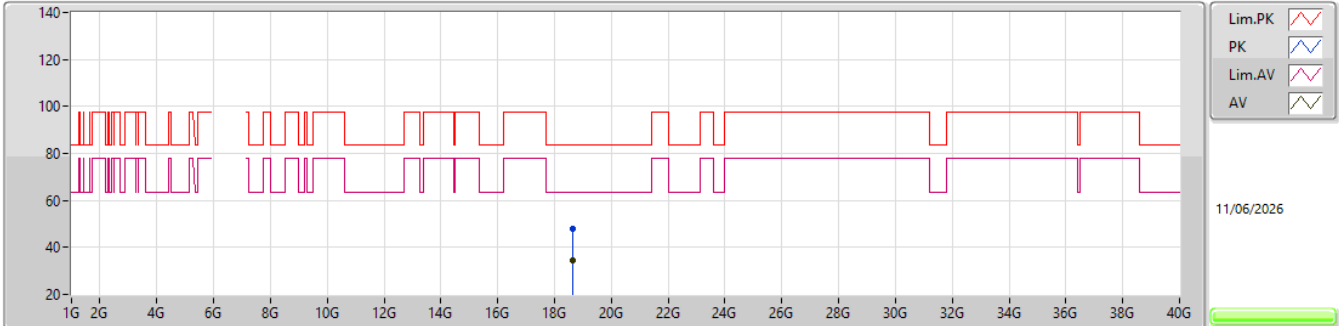


EUT X_4TX
Setting 54
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.62124G	48.00	83.54	-35.54	43.25	1	Vertical	179	2.38	-	37.66	15.76	48.67			
AV	18.62286G	34.60	63.54	-28.94	29.86	1	Vertical	179	2.38	-	37.65	15.76	48.67			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6205MHz_TX

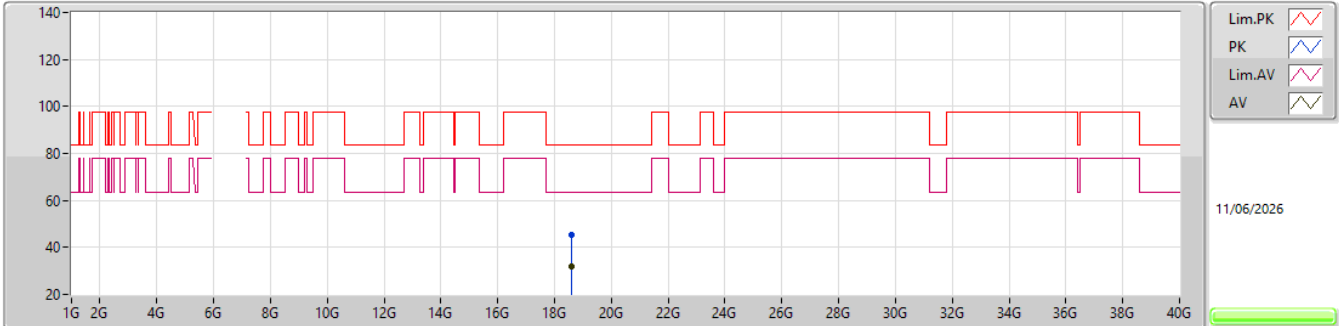


EUT X_4TX
Setting 54
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.61962G	45.30	83.54	-38.24	40.55	1	Horizontal	29	2.34	-	37.66	15.76	48.67			
AV	18.61746G	31.70	63.54	-31.84	26.94	1	Horizontal	29	2.34	-	37.67	15.76	48.67			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6405MHz_TX

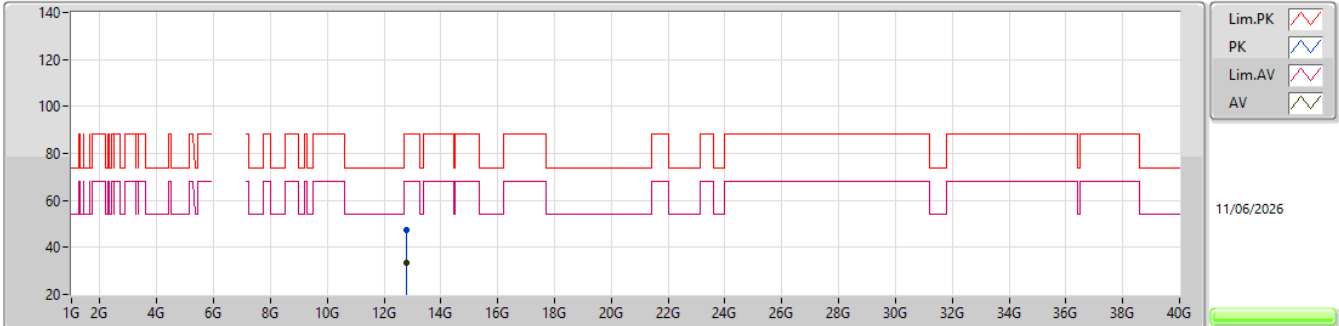


EUT X_4TX
Setting 55
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.80906G	47.20	88.20	-41.00	37.33	3	Vertical	291	1.55	-	39.02	14.35	43.50			
RMS	12.81011G	33.42	68.20	-34.78	23.54	3	Vertical	291	1.55	-	39.02	14.36	43.50			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6405MHz_TX

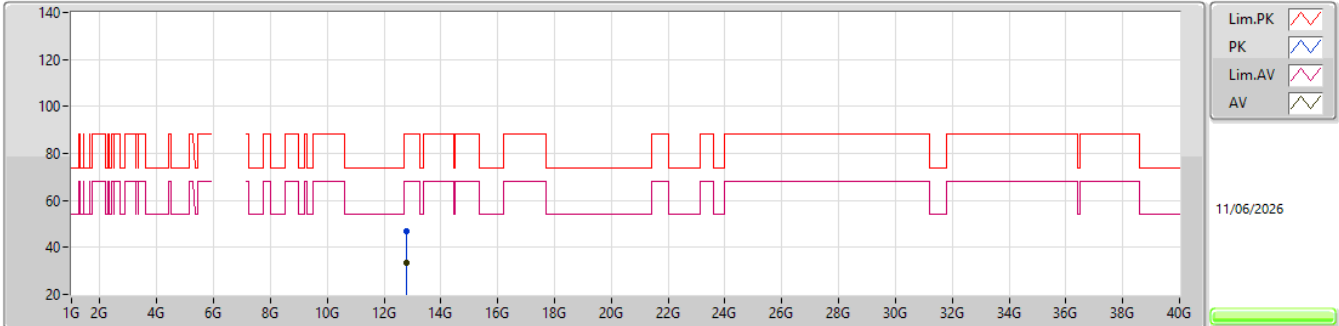


EUT X_4TX
Setting 55
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.81024G	46.93	88.20	-41.27	37.05	3	Horizontal	213	2.02	-	39.02	14.36	43.50			
RMS	12.8097G	33.41	68.20	-34.79	23.53	3	Horizontal	213	2.02	-	39.02	14.36	43.50			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6405MHz_TX

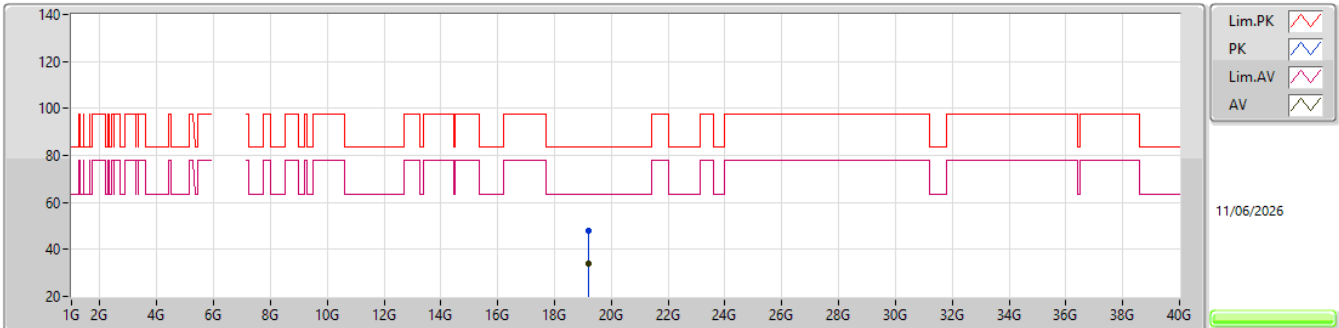


EUT X_4TX
Setting 55
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.21649G	47.71	83.54	-35.83	42.84	1	Vertical	321	2.85	-	37.70	16.03	48.86			
AV	19.21606G	33.83	63.54	-29.71	28.96	1	Vertical	321	2.85	-	37.70	16.03	48.86			

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6405MHz_TX

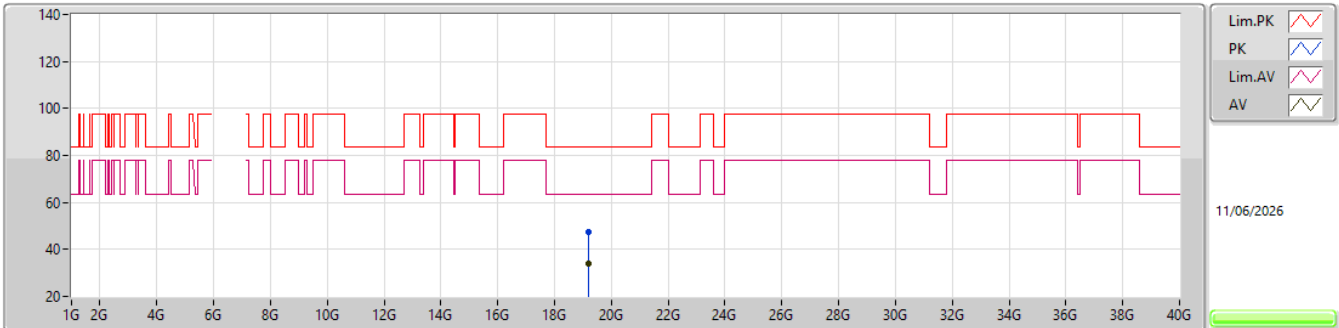


EUT X_4TX
Setting 55
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.21549G	47.18	83.54	-36.36	42.32	1	Horizontal	287	1.54	-	37.69	16.03	48.86			
AV	19.21565G	33.82	63.54	-29.72	28.96	1	Horizontal	287	1.54	-	37.69	16.03	48.86			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

5985MHz_TX

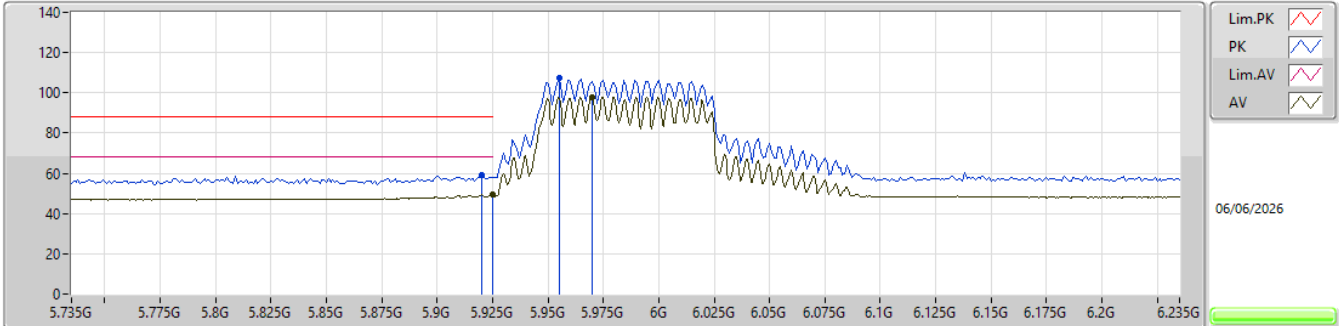


EUT X_4TX
Setting 78
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.92G	58.99	88.20	-29.21	52.94	3	Vertical	82	1.77	-	32.24	7.57	33.76			
RMS	5.925G	49.28	68.20	-18.92	43.21	3	Vertical	82	1.77	-	32.25	7.58	33.76			
PK	5.955G	107.34	Inf	-Inf	101.16	3	Vertical	82	1.77	-	32.31	7.63	33.76			
RMS	5.97G	97.97	Inf	-Inf	91.72	3	Vertical	82	1.77	-	32.34	7.66	33.75			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

5985MHz_TX

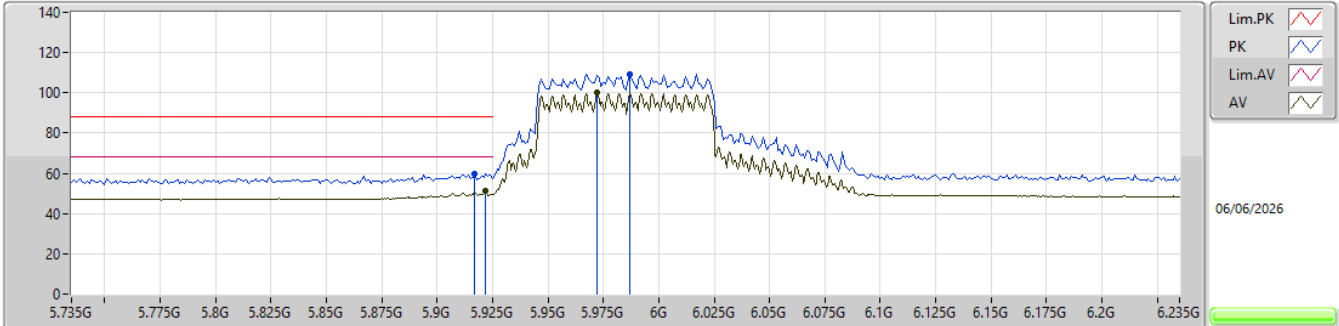


EUT X_4TX
Setting 78
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.917G	59.96	88.20	-28.24	53.93	3	Horizontal	96	1.80	-	32.23	7.56	33.76			
RMS	5.922G	51.16	68.20	-17.04	45.11	3	Horizontal	96	1.80	-	32.24	7.57	33.76			
PK	5.987G	109.40	Inf	-Inf	103.09	3	Horizontal	96	1.80	-	32.37	7.69	33.75			
RMS	5.972G	99.98	Inf	-Inf	93.73	3	Horizontal	96	1.80	-	32.34	7.66	33.75			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_4TX


5985MHz_TX

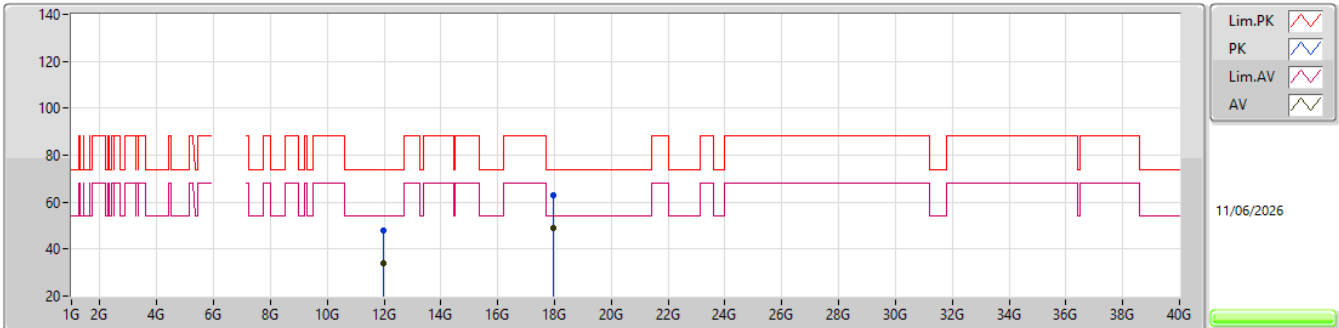EUT X_4TX
Setting 78
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.97073G	48.15	74.00	-25.85	38.98	3	Vertical	271	1.23	-	38.90	13.55	43.28			
AV	11.97096G	33.96	54.00	-20.04	24.79	3	Vertical	271	1.23	-	38.90	13.55	43.28			
PK	17.9548G	62.86	74.00	-11.14	40.94	3	Vertical	239	2.56	-	48.55	16.33	42.96			
AV	17.95634G	48.86	54.00	-5.14	26.88	3	Vertical	239	2.56	-	48.60	16.33	42.95			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

5985MHz_TX

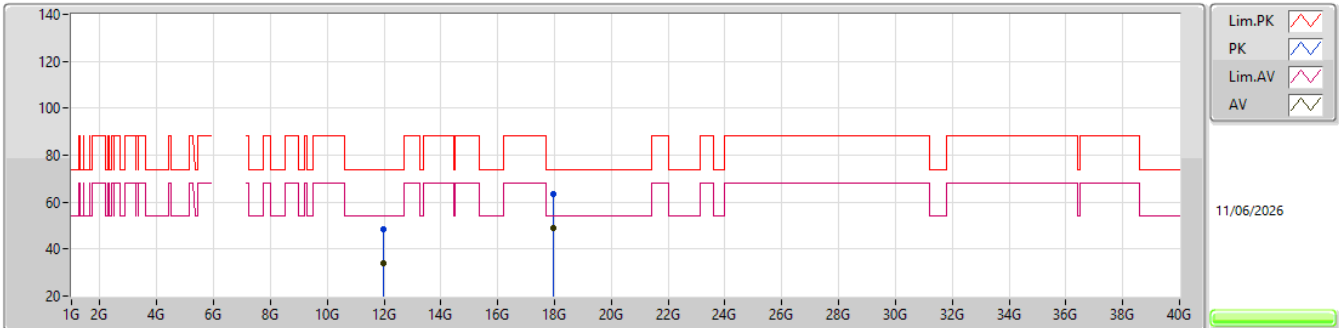


EUT X_4TX
Setting 78
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.9696G	48.36	74.00	-25.64	39.19	3	Horizontal	322	1.10	-	38.90	13.55	43.28			
AV	11.97097G	33.94	54.00	-20.06	24.77	3	Horizontal	322	1.10	-	38.90	13.55	43.28			
PK	17.95379G	63.58	74.00	-10.42	41.69	3	Horizontal	262	2.28	-	48.52	16.33	42.96			
AV	17.95579G	48.80	54.00	-5.20	26.84	3	Horizontal	262	2.28	-	48.59	16.33	42.96			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

5985MHz_TX

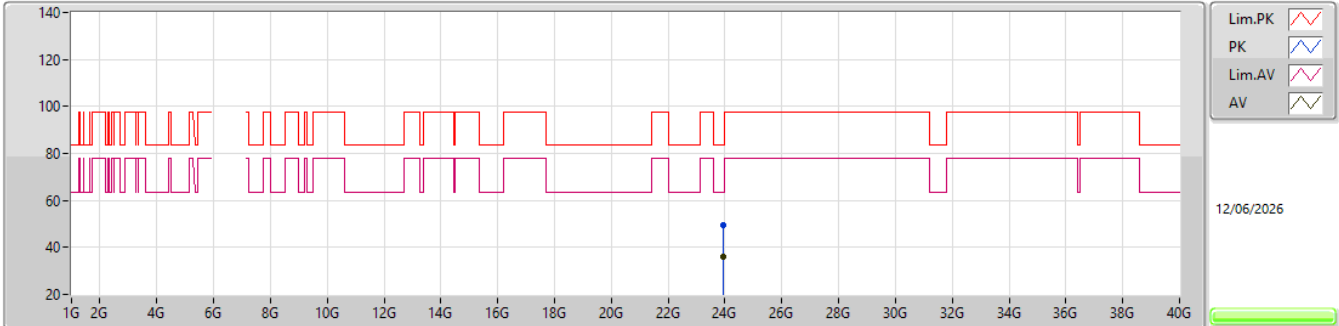


EUT X_4TX
Setting 78
04-C-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.93955G	49.59	83.54	-33.95	40.33	1	Vertical	260	1.37	-	38.98	18.18	47.90			
AV	23.93929G	35.84	63.54	-27.70	26.58	1	Vertical	260	1.37	-	38.98	18.18	47.90			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

5985MHz_TX

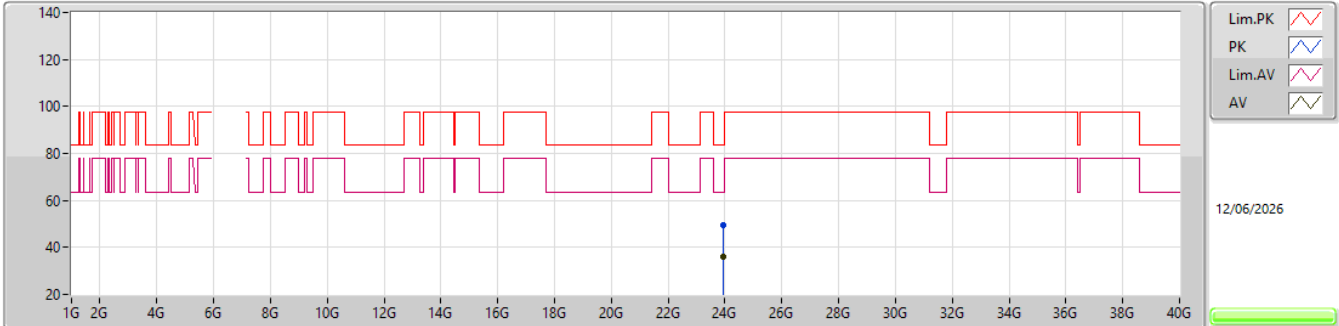


EUT X_4TX
Setting 78
04-C-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.94061G	49.62	83.54	-33.92	40.35	1	Horizontal	74	2.64	-	38.98	18.19	47.90			
AV	23.93968G	35.83	63.54	-27.71	26.56	1	Horizontal	74	2.64	-	38.98	18.19	47.90			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6225MHz_TX

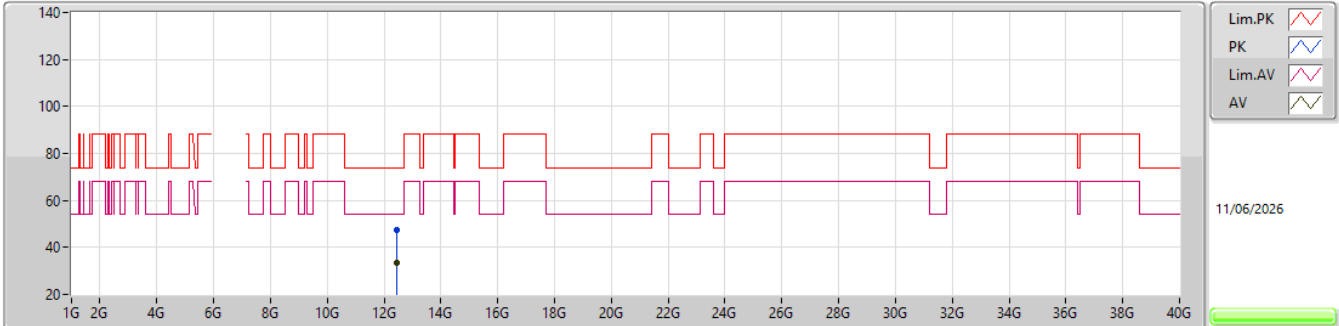


EUT X_4TX
Setting 66
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.44982G	47.28	74.00	-26.72	38.26	3	Vertical	258	2.21	-	38.50	14.01	43.49			
AV	12.44977G	33.46	54.00	-20.54	24.44	3	Vertical	258	2.21	-	38.50	14.01	43.49			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6225MHz_TX

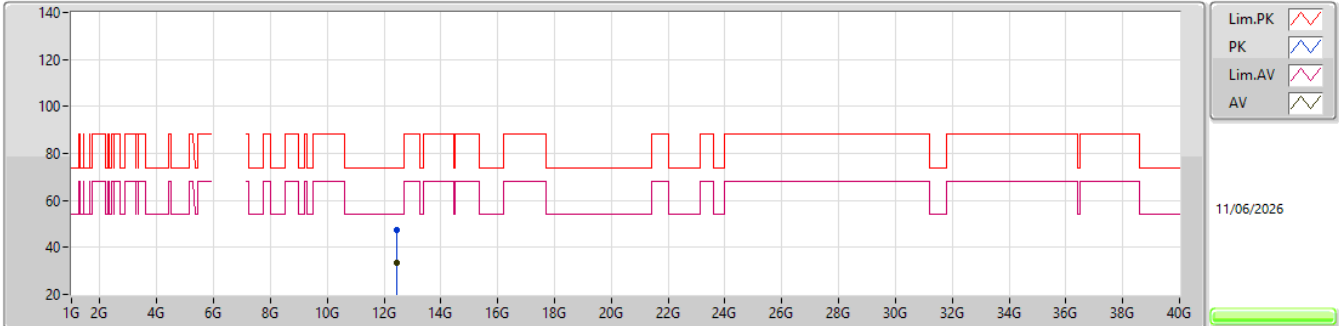


EUT X_4TX
Setting 66
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.4497G	47.18	74.00	-26.82	38.16	3	Horizontal	331	2.71	-	38.50	14.01	43.49			
AV	12.44983G	33.45	54.00	-20.55	24.43	3	Horizontal	331	2.71	-	38.50	14.01	43.49			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6225MHz_TX

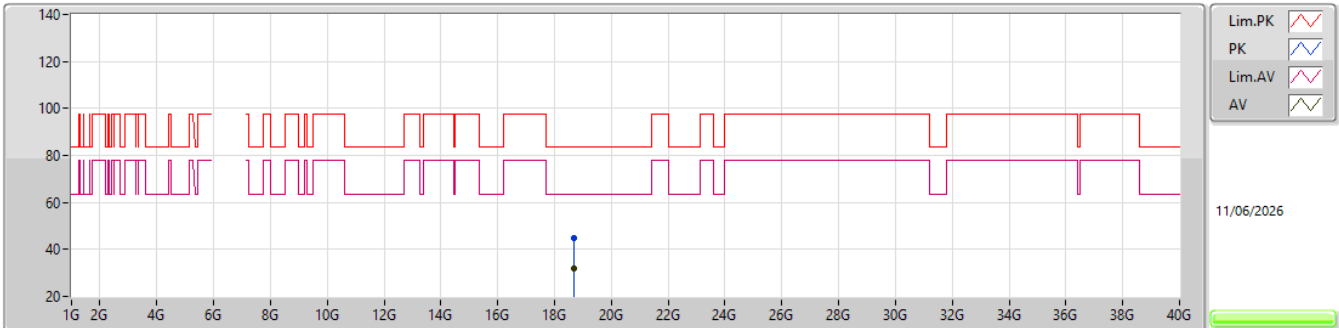


EUT X_4TX
Setting 66
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.6754G	45.03	83.54	-38.51	40.41	1	Vertical	301	1.68	-	37.55	15.78	48.71			
AV	18.67491G	31.71	63.54	-31.83	27.08	1	Vertical	301	1.68	-	37.55	15.78	48.70			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6225MHz_TX

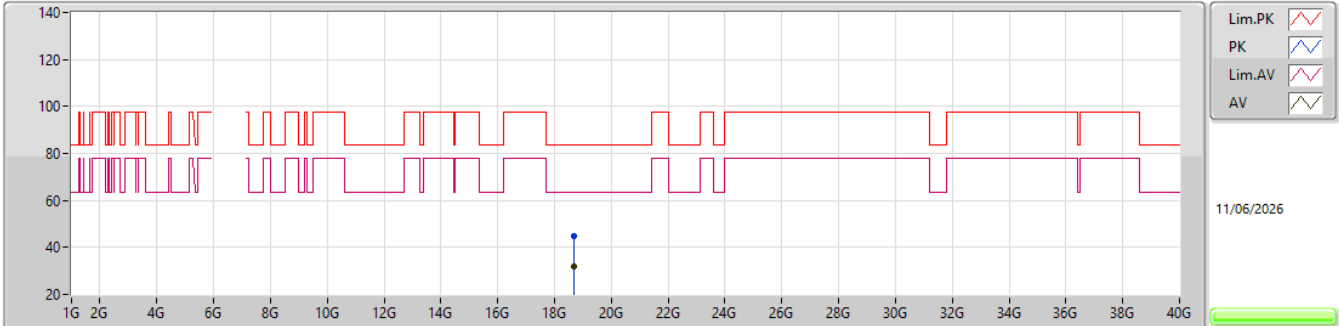


EUT X_4TX
Setting 66
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.67528G	44.94	83.54	-38.60	40.32	1	Horizontal	352	2.89	-	37.55	15.78	48.71			
AV	18.67423G	31.72	63.54	-31.82	27.09	1	Horizontal	352	2.89	-	37.55	15.78	48.70			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6385MHz_TX

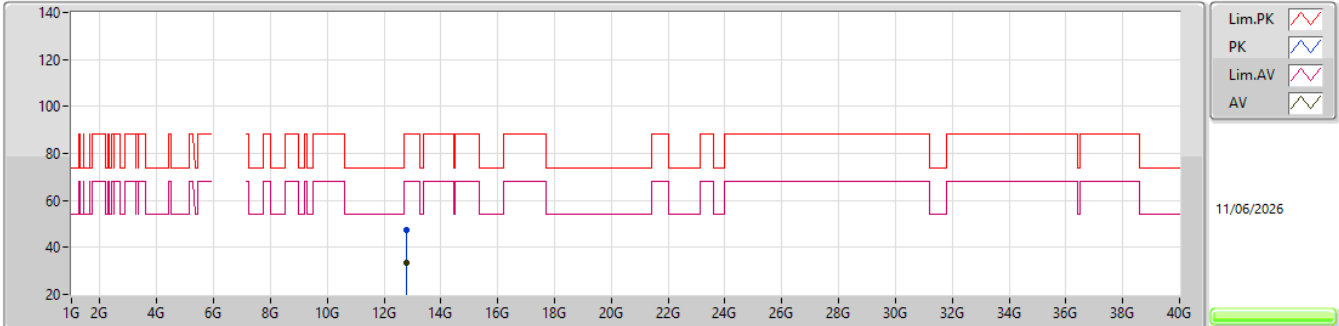


EUT X_4TX
Setting 74
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.769G	47.29	88.20	-40.91	37.53	3	Vertical	81	1.14	-	38.94	14.32	43.50			
RMS	12.77062G	33.52	68.20	-34.68	23.76	3	Vertical	81	1.14	-	38.94	14.32	43.50			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6385MHz_TX

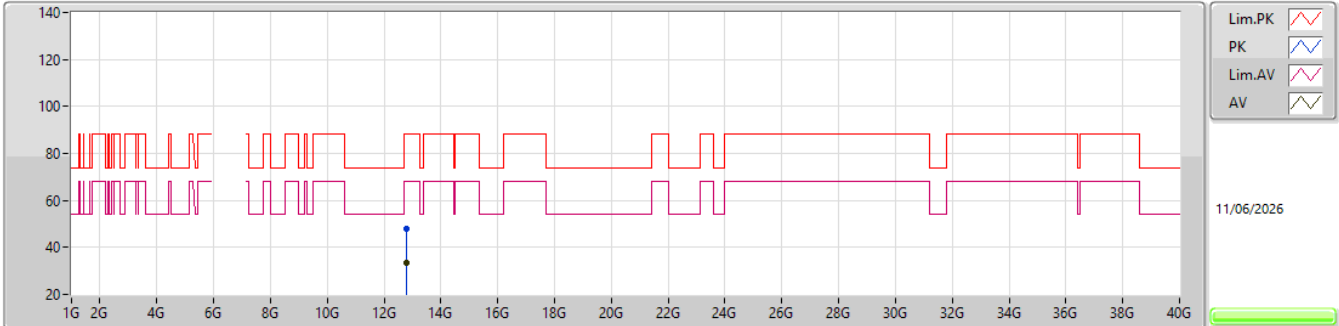


EUT X_4TX
Setting 74
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.76948G	47.76	88.20	-40.44	38.00	3	Horizontal	354	1.12	-	38.94	14.32	43.50			
RMS	12.76938G	33.53	68.20	-34.67	23.77	3	Horizontal	354	1.12	-	38.94	14.32	43.50			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6385MHz_TX

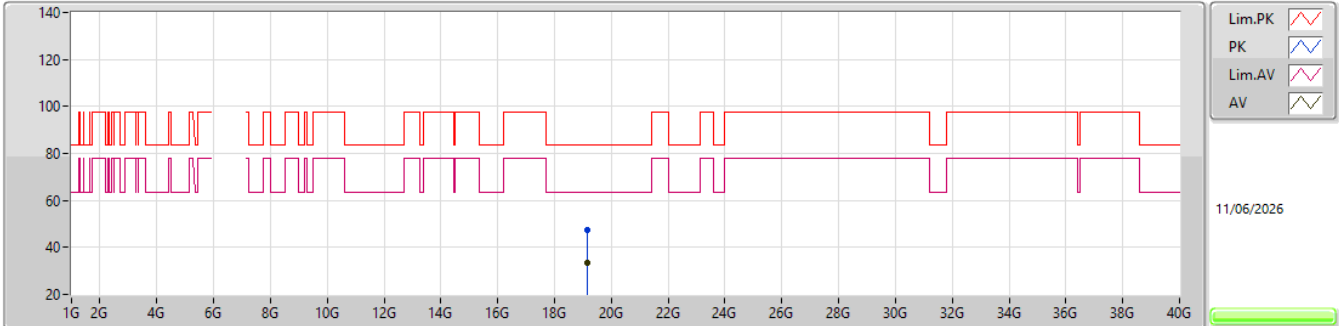


EUT X_4TX
Setting 66
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.15551G	47.34	83.54	-36.20	42.42	1	Vertical	342	1.97	-	37.78	16.01	48.87			
AV	19.15393G	33.53	63.54	-30.01	28.61	1	Vertical	342	1.97	-	37.78	16.01	48.87			

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6385MHz_TX

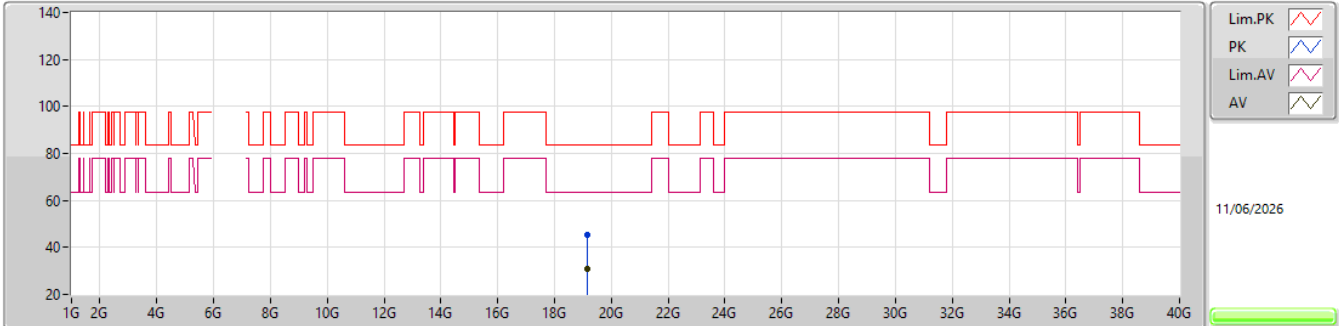


EUT X_4TX
Setting 66
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.15623G	45.15	83.54	-38.39	40.23	1	Horizontal	19	1.31	-	37.78	16.01	48.87			
AV	19.15385G	30.79	63.54	-32.75	25.87	1	Horizontal	19	1.31	-	37.78	16.01	48.87			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6025MHz_TX

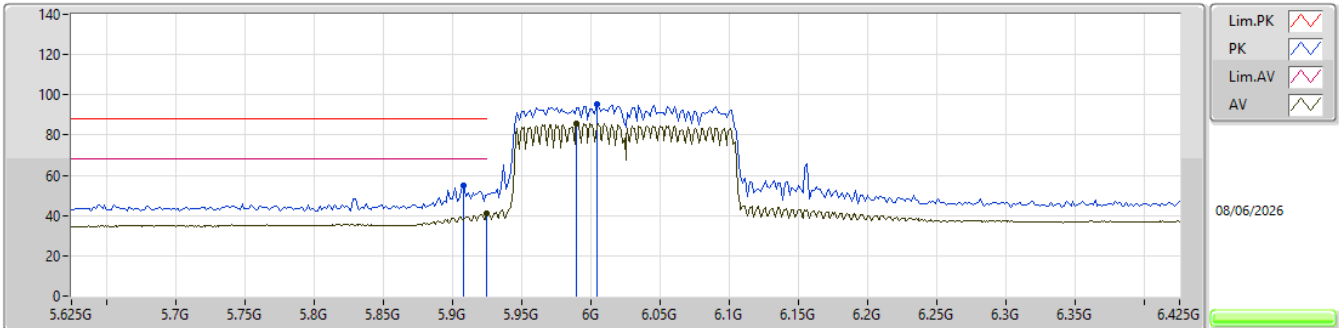


EUT_X_4TX
Setting 72
06-E-J-11-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.9082G	54.88	88.20	-33.32	48.88	3	Vertical	28	1.97	-	32.22	7.54	33.76			
RMS	5.925G	40.76	68.20	-27.44	34.69	3	Vertical	28	1.97	-	32.25	7.58	33.76			
PK	6.0042G	95.63	Inf	-Inf	89.26	3	Vertical	28	1.97	-	32.41	7.71	33.75			
RMS	5.9898G	85.72	Inf	-Inf	79.40	3	Vertical	28	1.97	-	32.38	7.69	33.75			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6025MHz_TX

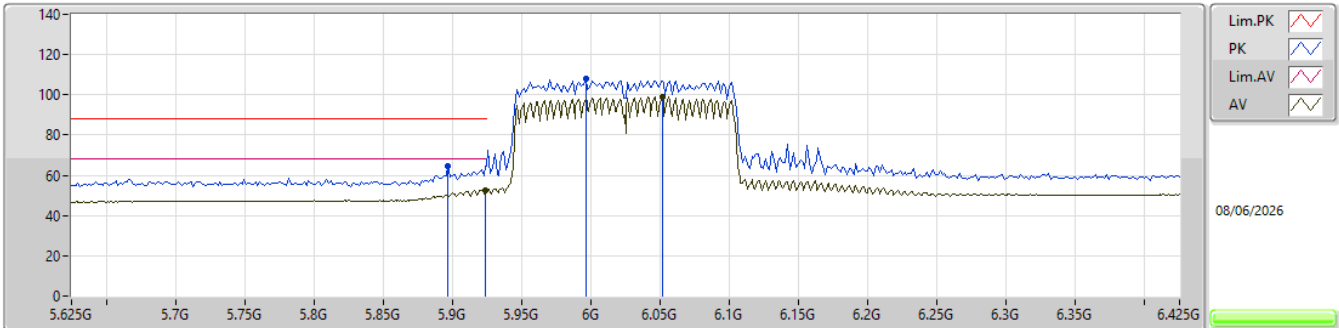


EUT_X_4TX
Setting 72
06-E-J-11-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.897G	64.38	88.20	-23.82	58.43	3	Horizontal	0	2.78	-	32.19	7.52	33.76			
RMS	5.9242G	52.64	68.20	-15.56	46.58	3	Horizontal	0	2.78	-	32.25	7.57	33.76			
PK	5.9962G	108.27	Inf	-Inf	101.93	3	Horizontal	0	2.78	-	32.39	7.70	33.75			
RMS	6.0514G	98.89	Inf	-Inf	92.43	3	Horizontal	0	2.78	-	32.50	7.68	33.72			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6025MHz_TX

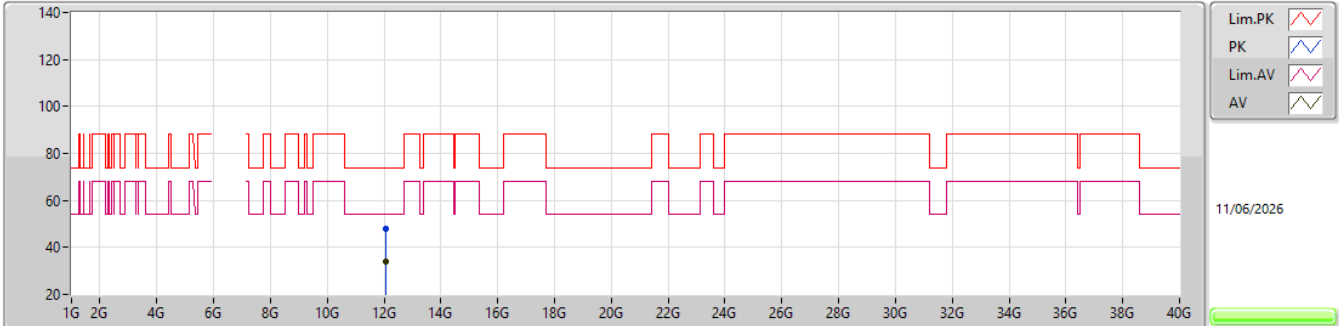


EUT X_4TX
Setting 72
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.04963G	47.74	74.00	-26.26	38.24	3	Vertical	55	2.30	-	39.20	13.62	43.32			
AV	12.04949G	33.91	54.00	-20.09	24.41	3	Vertical	55	2.30	-	39.20	13.62	43.32			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6025MHz_TX

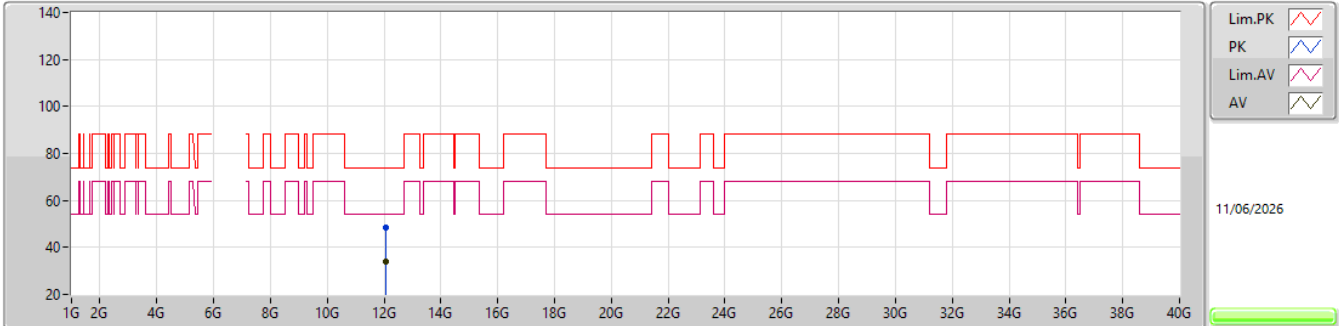


EUT X_4TX
Setting 72
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.05093G	48.27	74.00	-25.73	38.77	3	Horizontal	152	2.67	-	39.20	13.62	43.32			
AV	12.04935G	33.91	54.00	-20.09	24.41	3	Horizontal	152	2.67	-	39.20	13.62	43.32			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6025MHz_TX

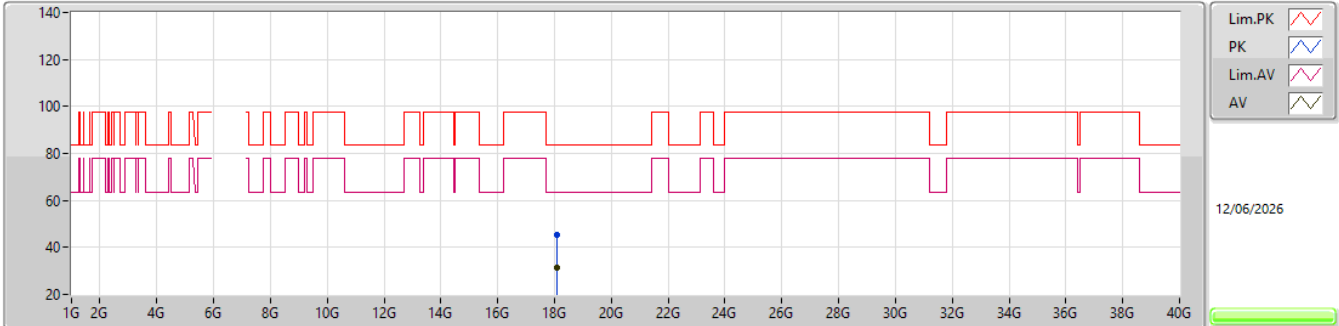


EUT X_4TX
Setting 72
04-C-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.07405G	45.19	83.54	-38.35	40.87	1	Vertical	210	2.63	-	37.25	15.50	48.43			
AV	18.07351G	31.37	63.54	-32.17	27.05	1	Vertical	210	2.63	-	37.25	15.50	48.43			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6025MHz_TX

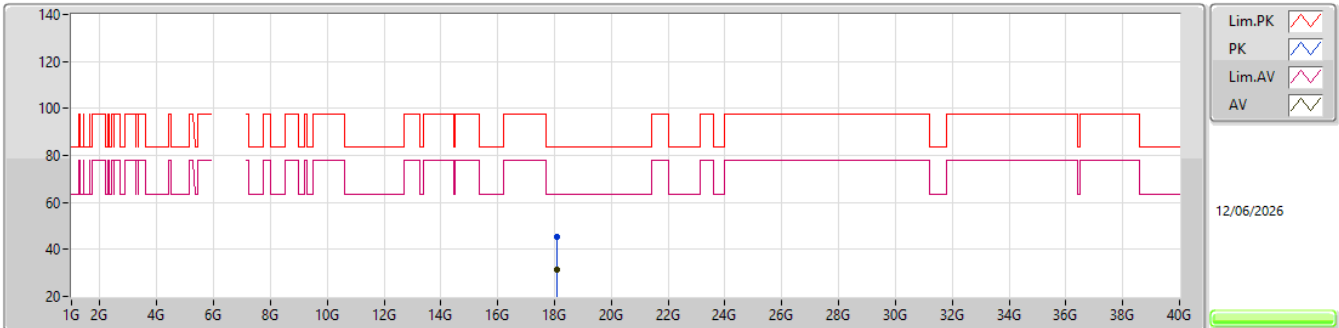


EUT X_4TX
Setting 72
04-C-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.07472G	45.16	83.54	-38.38	40.84	1	Horizontal	30	1.49	-	37.25	15.50	48.43			
AV	18.07398G	31.37	63.54	-32.17	27.05	1	Horizontal	30	1.49	-	37.25	15.50	48.43			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6185MHz_TX

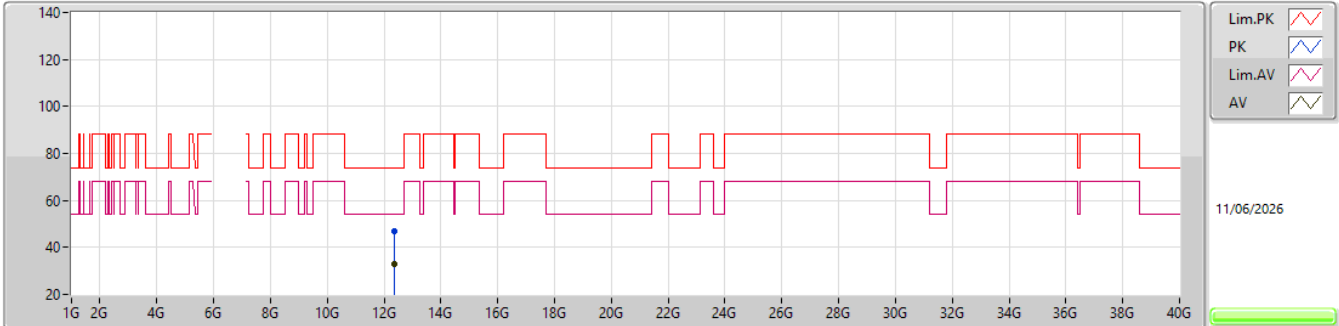


EUT X_4TX
Setting 70
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.36978G	46.78	74.00	-27.22	37.45	3	Vertical	101	2.32	-	38.86	13.93	43.46			
AV	12.37032G	32.91	54.00	-21.09	23.58	3	Vertical	101	2.32	-	38.86	13.93	43.46			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6185MHz_TX

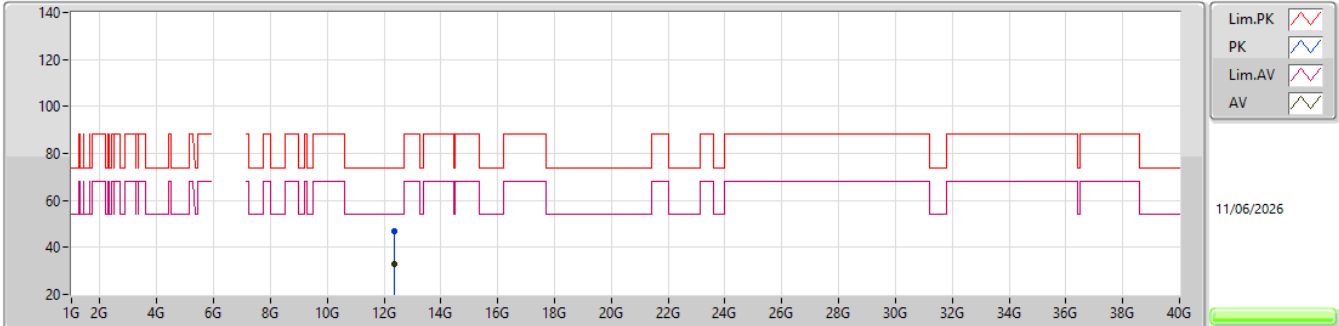


EUT X_4TX
Setting 70
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.37081G	47.12	74.00	-26.88	37.79	3	Horizontal	130	1.42	-	38.86	13.93	43.46			
AV	12.37032G	32.94	54.00	-21.06	23.61	3	Horizontal	130	1.42	-	38.86	13.93	43.46			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6185MHz_TX

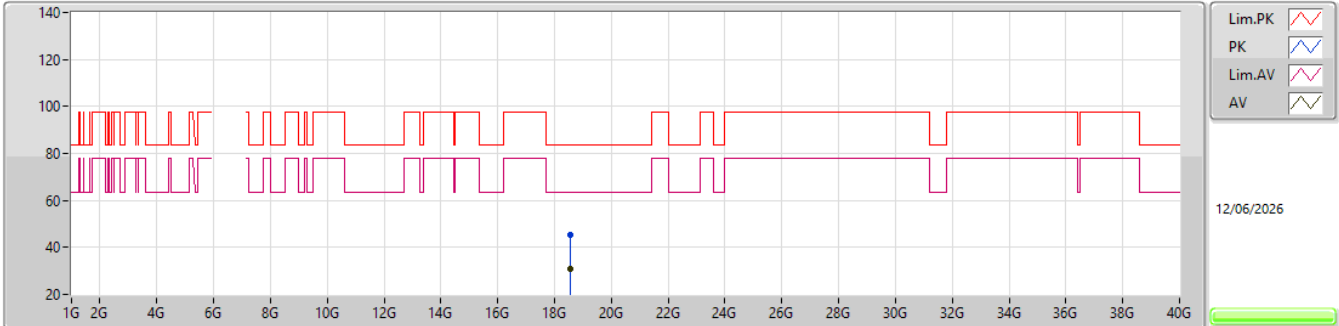


EUT X_4TX
Setting 70
04-C-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	18.55356G	45.16	83.54	-38.38	40.55	1	Vertical	25	1.59	-	37.51	15.73	48.63			
AV	18.55632G	31.07	63.54	-32.47	26.44	1	Vertical	25	1.59	-	37.53	15.73	48.63			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6185MHz_TX

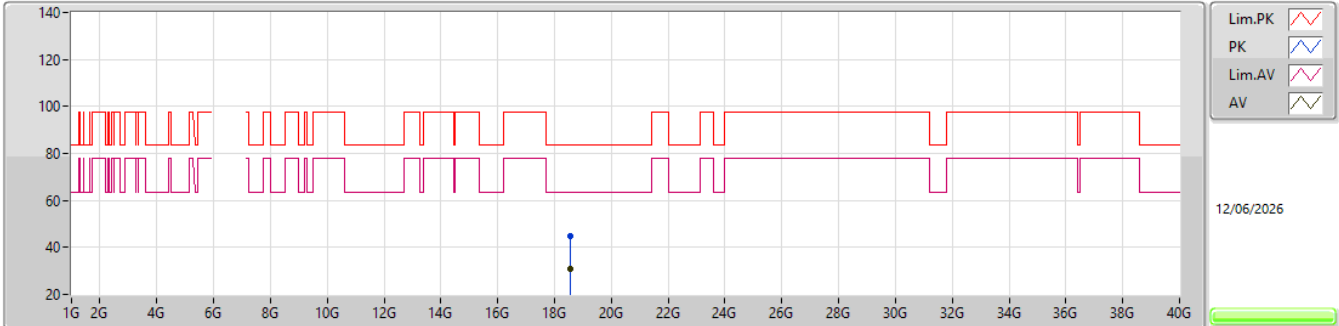


EUT X_4TX
Setting 70
04-C-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.55619G	44.72	83.54	-38.82	40.10	1	Horizontal	28	1.51	-	37.52	15.73	48.63			
AV	18.55647G	31.08	63.54	-32.46	26.45	1	Horizontal	28	1.51	-	37.53	15.73	48.63			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6345MHz_TX

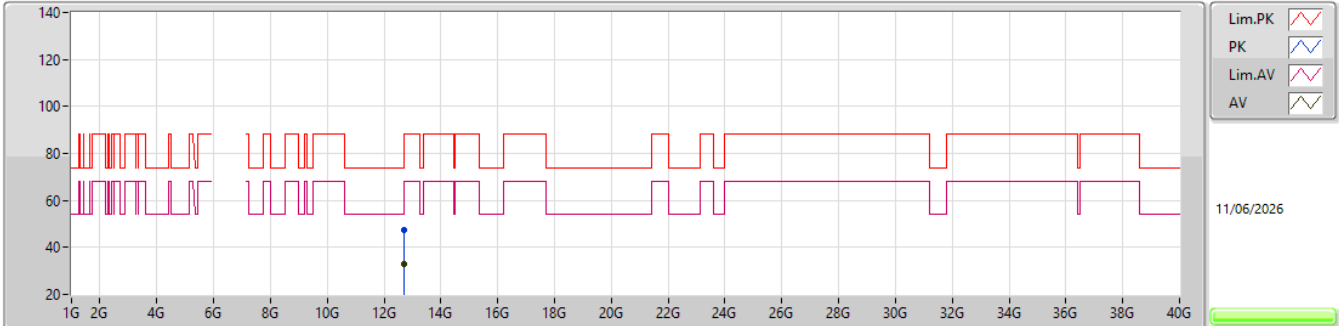


EUT X_4TX
Setting 83
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.69085G	47.58	74.00	-26.42	38.08	3	Vertical	146	1.17	-	38.76	14.24	43.50			
AV	12.68983G	32.96	54.00	-21.04	23.46	3	Vertical	146	1.17	-	38.76	14.24	43.50			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6345MHz_TX

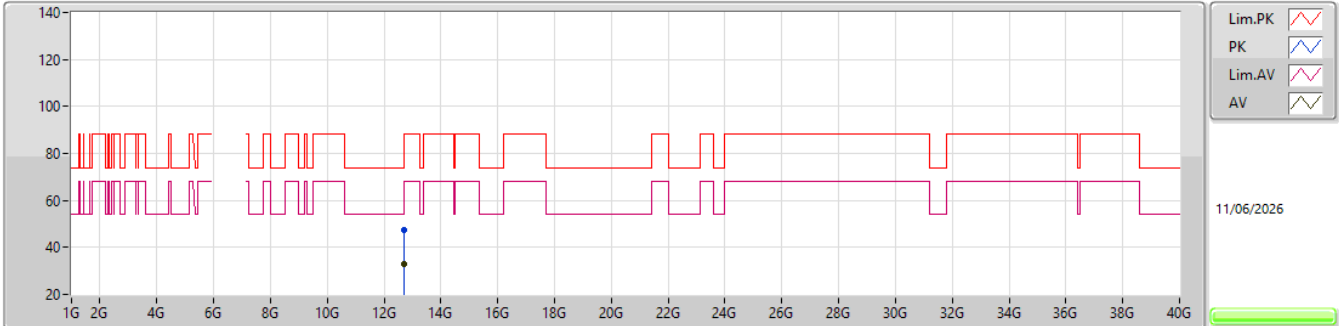


EUT X_4TX
Setting 83
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.69025G	47.34	74.00	-26.66	37.84	3	Horizontal	81	1.22	-	38.76	14.24	43.50			
AV	12.68918G	32.97	54.00	-21.03	23.47	3	Horizontal	81	1.22	-	38.76	14.24	43.50			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6345MHz_TX

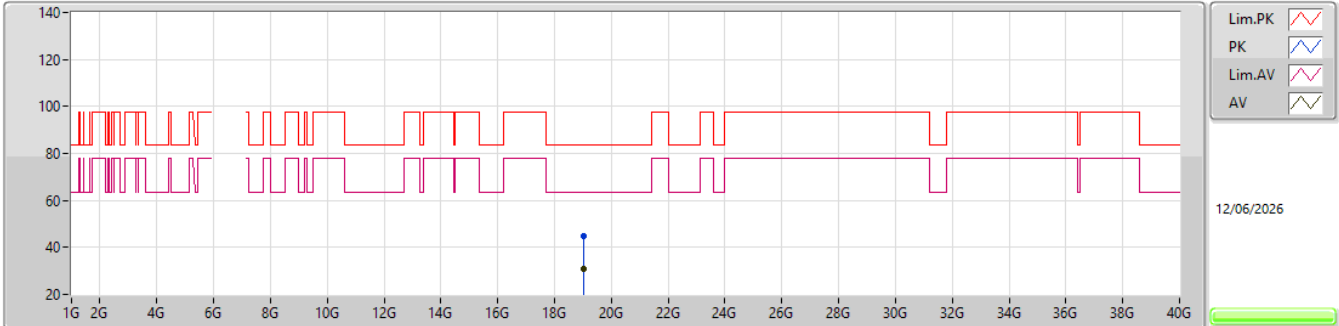


EUT X_4TX
Setting 83
04-C-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.03504G	44.64	83.54	-38.90	39.80	1	Vertical	25	1.50	-	37.77	15.96	48.89			
AV	19.0365G	30.72	63.54	-32.82	25.88	1	Vertical	25	1.50	-	37.77	15.96	48.89			

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6345MHz_TX

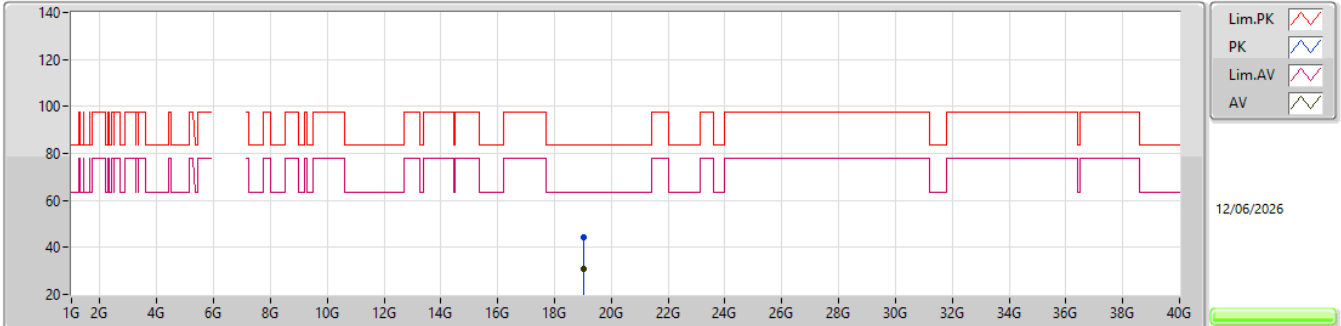


EUT X_4TX
Setting 83
04-C-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.03363G	44.48	83.54	-39.06	39.65	1	Horizontal	237	2.09	-	37.77	15.95	48.89			
AV	19.03411G	30.71	63.54	-32.83	25.88	1	Horizontal	237	2.09	-	37.77	15.95	48.89			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6435MHz_TX

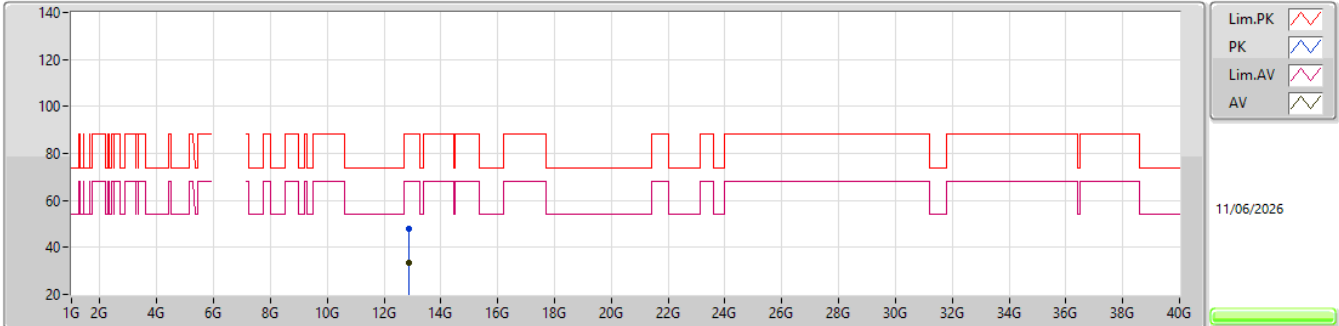


EUT X_4TX
Setting 45
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.86934G	47.73	88.20	-40.47	37.72	3	Vertical	105	2.03	-	39.10	14.41	43.50			
RMS	12.8692G	33.66	68.20	-34.54	23.65	3	Vertical	105	2.03	-	39.10	14.41	43.50			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6435MHz_TX

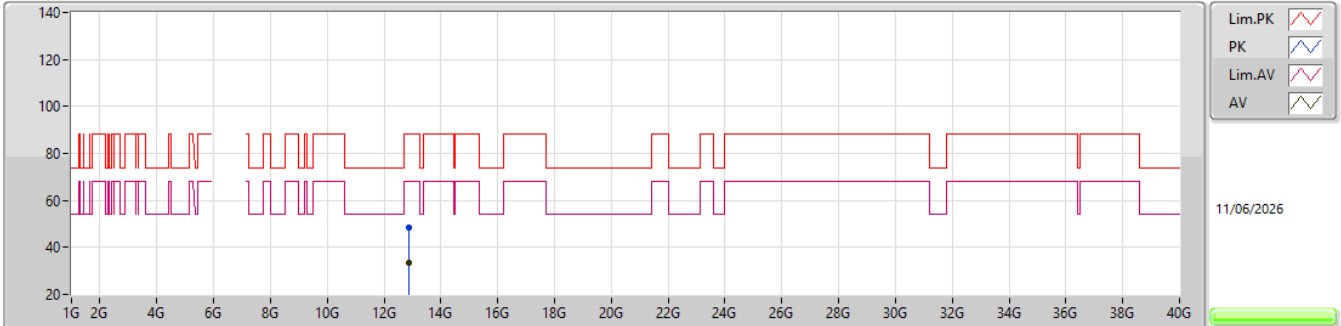


EUT X_4TX
Setting 45
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.86924G	48.49	88.20	-39.71	38.48	3	Horizontal	357	2.78	-	39.10	14.41	43.50			
RMS	12.86934G	33.69	68.20	-34.51	23.68	3	Horizontal	357	2.78	-	39.10	14.41	43.50			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6435MHz_TX

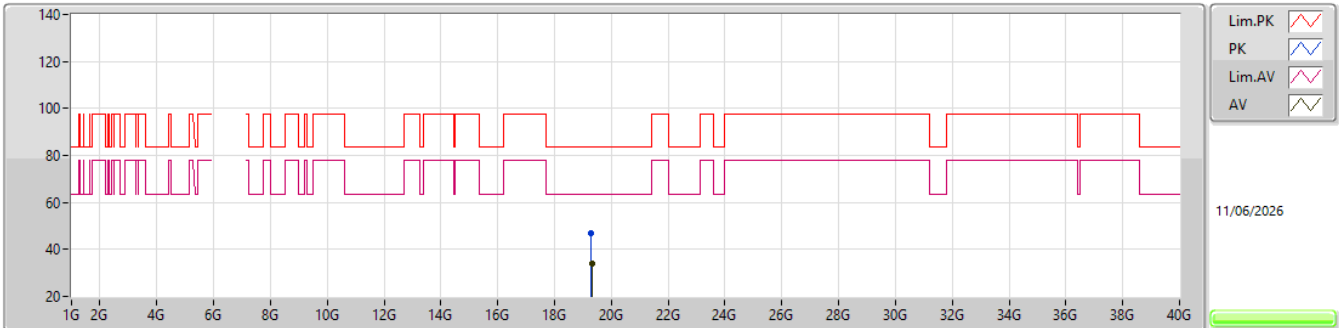


EUT X_4TX
Setting 45
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.29048G	46.89	83.54	-36.65	42.01	1	Vertical	147	2.18	-	37.66	16.06	48.84			
AV	19.31424G	33.95	63.54	-29.59	29.08	1	Vertical	147	2.18	-	37.63	16.08	48.84			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6435MHz_TX

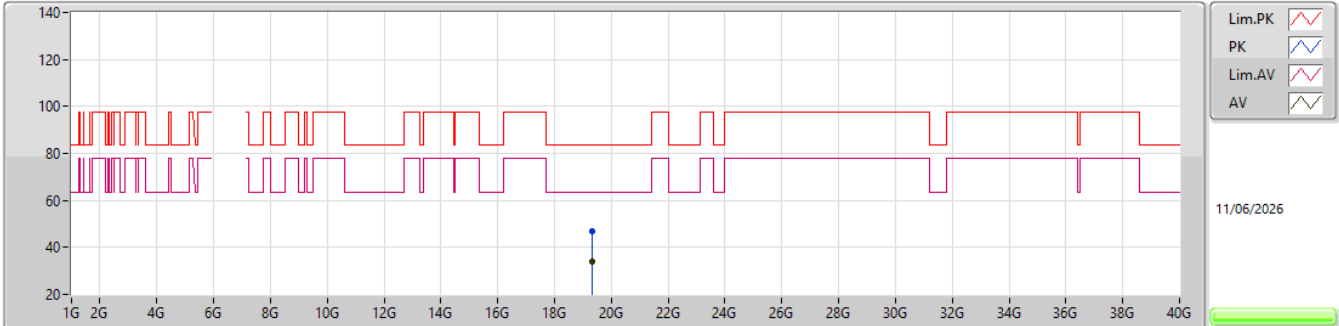


EUT X_4TX
Setting 45
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.30572G	46.69	83.54	-36.85	41.85	1	Horizontal	147	1.65	-	37.61	16.07	48.84			
AV	19.31034G	33.92	63.54	-29.62	29.07	1	Horizontal	147	1.65	-	37.62	16.07	48.84			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6475MHz_TX

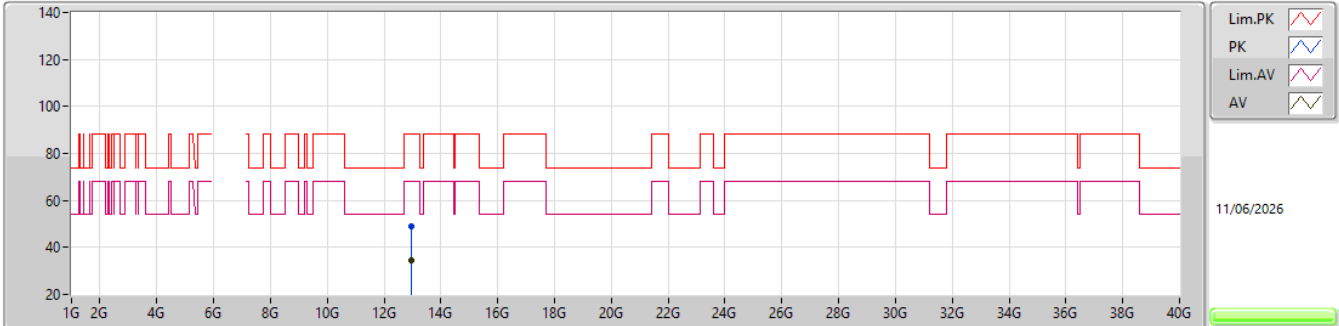


EUT X_4TX
Setting 48
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.94914G	49.14	88.20	-39.06	38.94	3	Vertical	212	1.91	-	39.20	14.49	43.49			
RMS	12.95098G	34.31	68.20	-33.89	24.11	3	Vertical	212	1.91	-	39.20	14.49	43.49			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6475MHz_TX

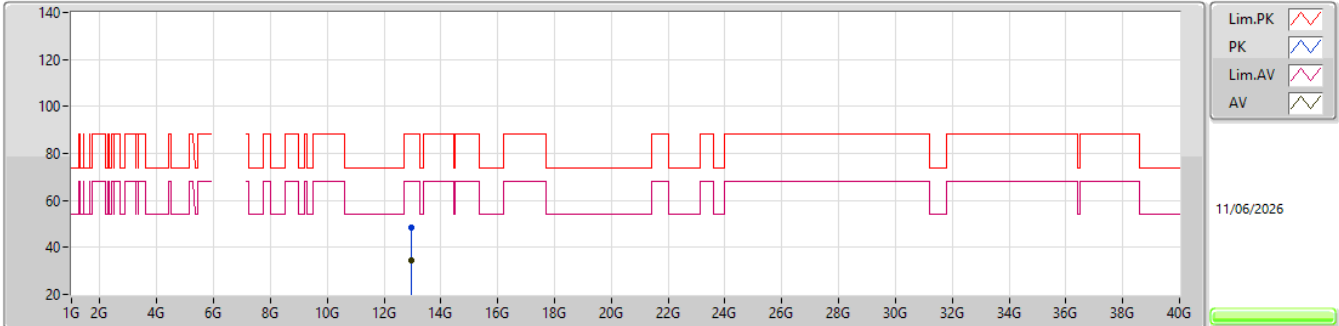


EUT_X_4TX
Setting 48
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.94902G	48.38	88.20	-39.82	38.18	3	Horizontal	352	2.72	-	39.20	14.49	43.49			
RMS	12.95094G	34.33	68.20	-33.87	24.13	3	Horizontal	352	2.72	-	39.20	14.49	43.49			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6475MHz_TX

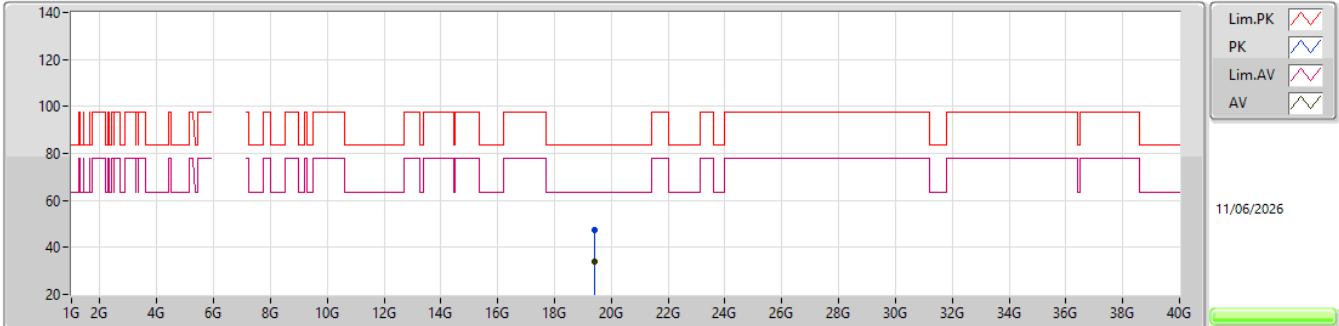


EUT X_4TX
Setting 48
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.41162G	47.40	83.54	-36.14	42.42	1	Vertical	245	2.46	-	37.68	16.12	48.82			
AV	19.42158G	33.94	63.54	-29.60	28.98	1	Vertical	245	2.46	-	37.66	16.12	48.82			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6475MHz_TX

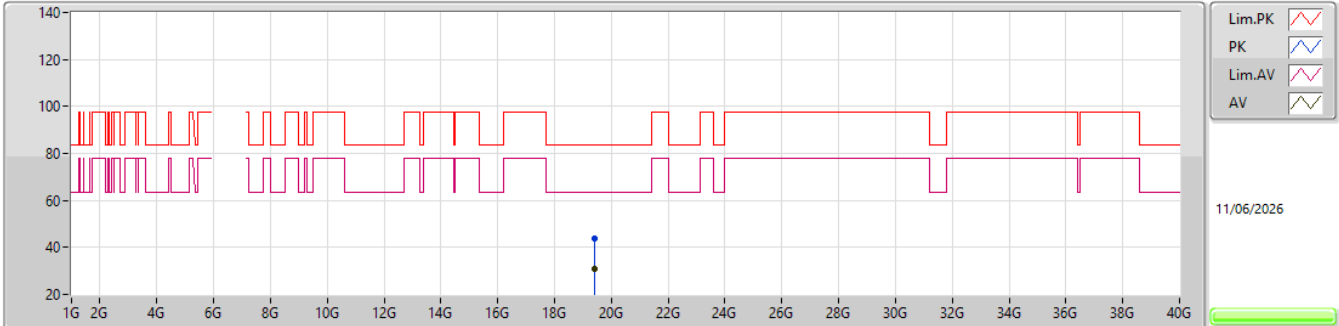


EUT X_4TX
Setting 48
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.4136G	44.00	83.54	-39.54	39.03	1	Horizontal	341	1.72	-	37.67	16.12	48.82			
AV	19.41618G	30.92	63.54	-32.62	25.95	1	Horizontal	341	1.72	-	37.67	16.12	48.82			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6515MHz_TX

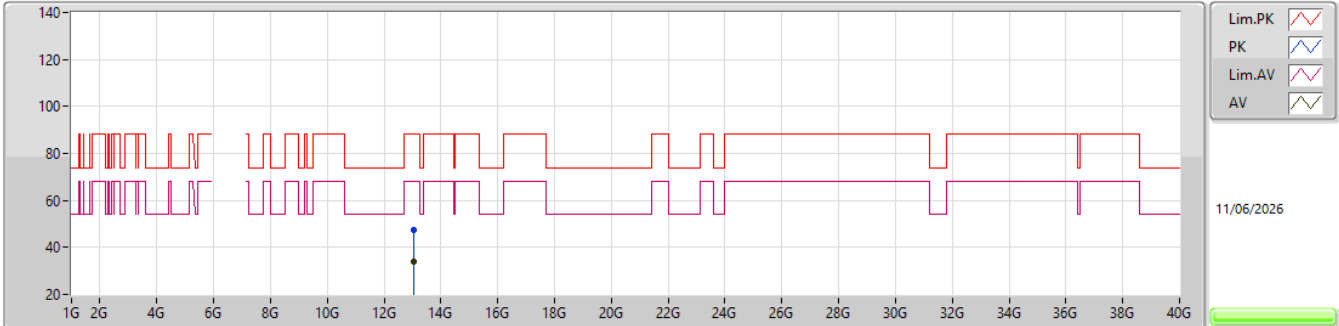


EUT X_4TX
Setting 49
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.03054G	47.58	88.20	-40.62	37.52	3	Vertical	160	1.64	-	38.98	14.57	43.49			
RMS	13.02908G	33.95	68.20	-34.25	23.89	3	Vertical	160	1.64	-	38.98	14.57	43.49			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6515MHz_TX

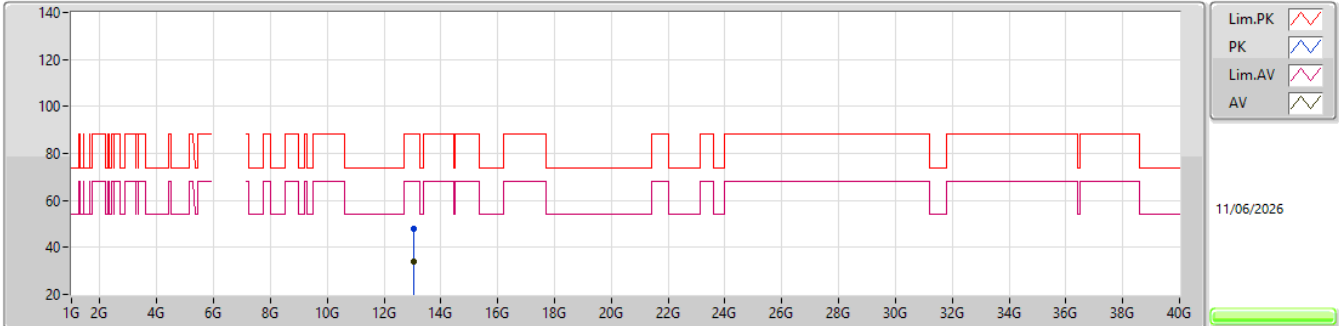


EUT X_4TX
Setting 49
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.02907G	47.83	88.20	-40.37	37.77	3	Horizontal	240	2.75	-	38.98	14.57	43.49			
RMS	13.02914G	33.99	68.20	-34.21	23.93	3	Horizontal	240	2.75	-	38.98	14.57	43.49			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6515MHz_TX

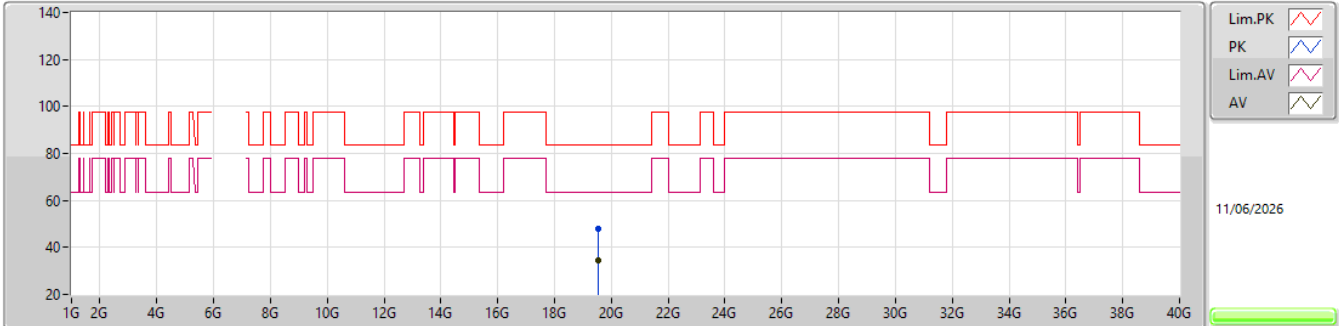


EUT_X_4TX
Setting 49
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.53822G	47.96	83.54	-35.58	43.03	1	Vertical	343	2.16	-	37.58	16.17	48.82			
AV	19.5543G	34.35	63.54	-29.19	29.39	1	Vertical	343	2.16	-	37.60	16.18	48.82			

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6515MHz_TX

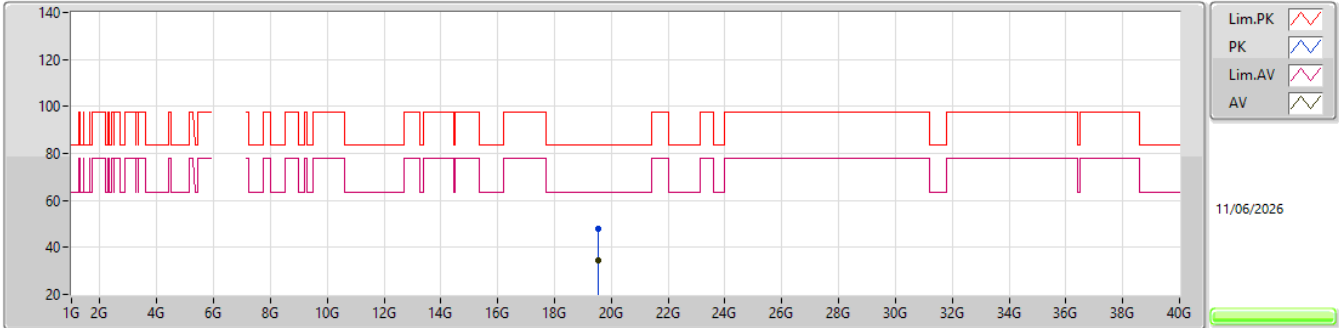


EUT_X_4TX
Setting 49
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.53432G	47.72	83.54	-35.82	42.79	1	Horizontal	342	1.06	-	37.57	16.17	48.81			
AV	19.5507G	34.37	63.54	-29.17	29.41	1	Horizontal	342	1.06	-	37.60	16.18	48.82			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6445MHz_TX

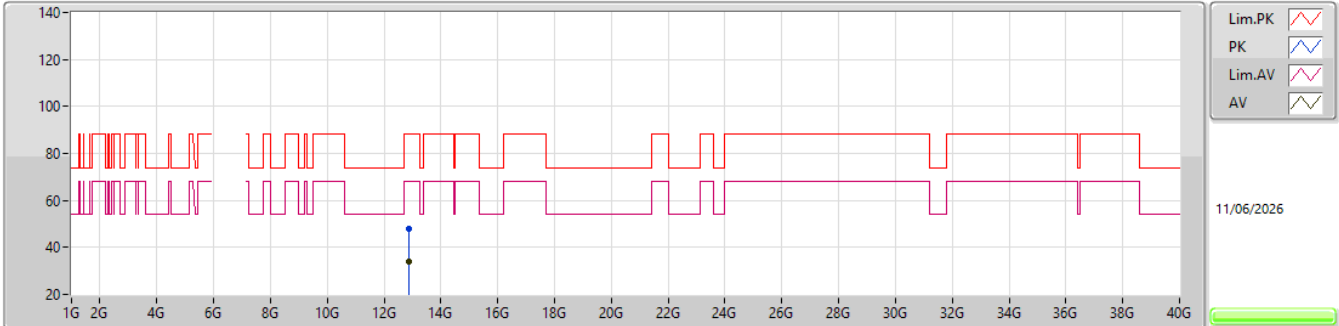


EUT X_4TX
Setting 57
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.89059G	47.76	88.20	-40.44	37.72	3	Vertical	327	1.76	-	39.10	14.43	43.49			
RMS	12.89066G	33.81	68.20	-34.39	23.77	3	Vertical	327	1.76	-	39.10	14.43	43.49			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6445MHz_TX

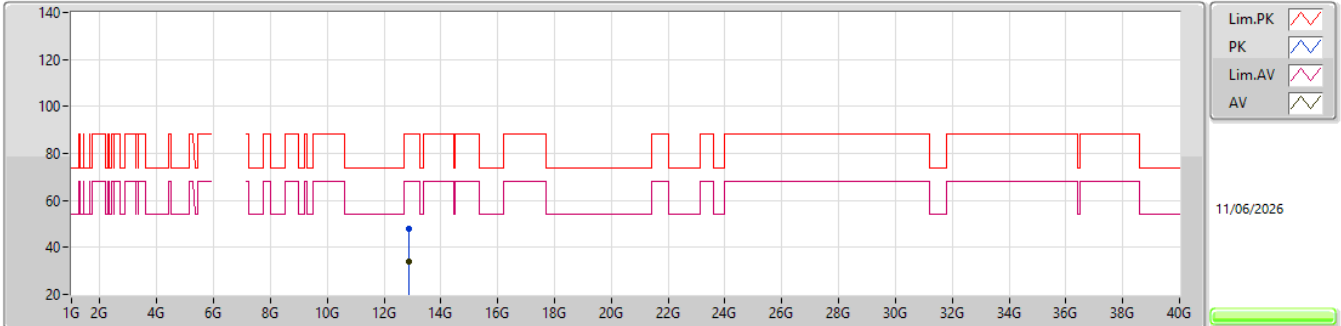


EUT X_4TX
Setting 57
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.88942G	47.82	88.20	-40.38	37.78	3	Horizontal	290	2.85	-	39.10	14.43	43.49			
RMS	12.89089G	33.82	68.20	-34.38	23.78	3	Horizontal	290	2.85	-	39.10	14.43	43.49			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6445MHz_TX

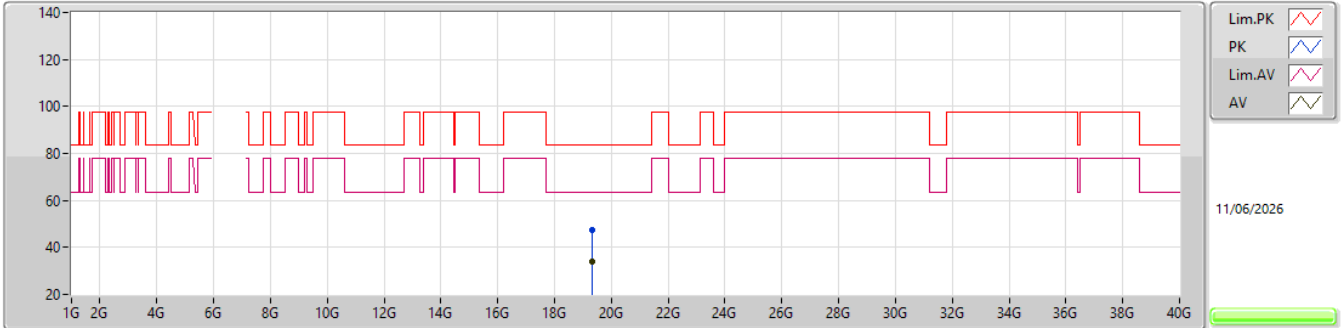


EUT X_4TX
Setting 57
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.3349G	47.31	83.54	-36.23	42.39	1	Vertical	162	1.03	-	37.67	16.08	48.83			
AV	19.33364G	33.81	63.54	-29.73	28.89	1	Vertical	162	1.03	-	37.67	16.08	48.83			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6445MHz_TX

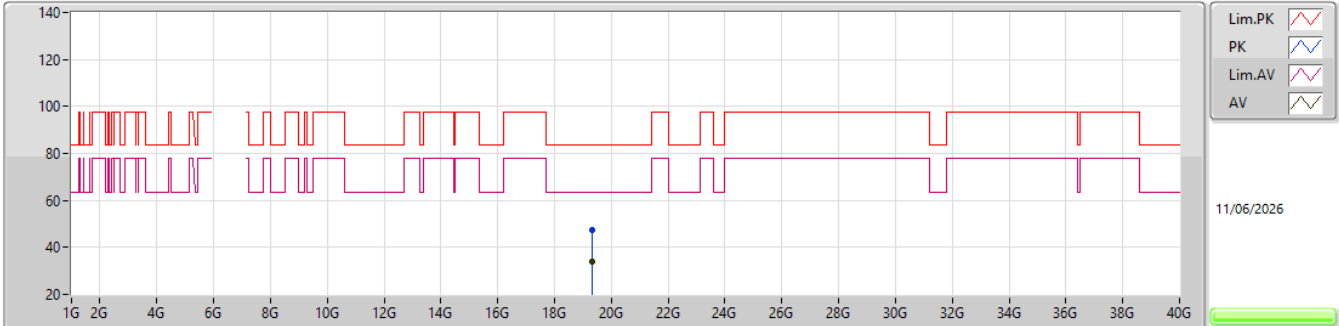


EUT X_4TX
Setting 57
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.3338G	47.60	83.54	-35.94	42.68	1	Horizontal	116	1.35	-	37.67	16.08	48.83			
AV	19.33509G	33.84	63.54	-29.70	28.92	1	Horizontal	116	1.35	-	37.67	16.08	48.83			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6485MHz_TX

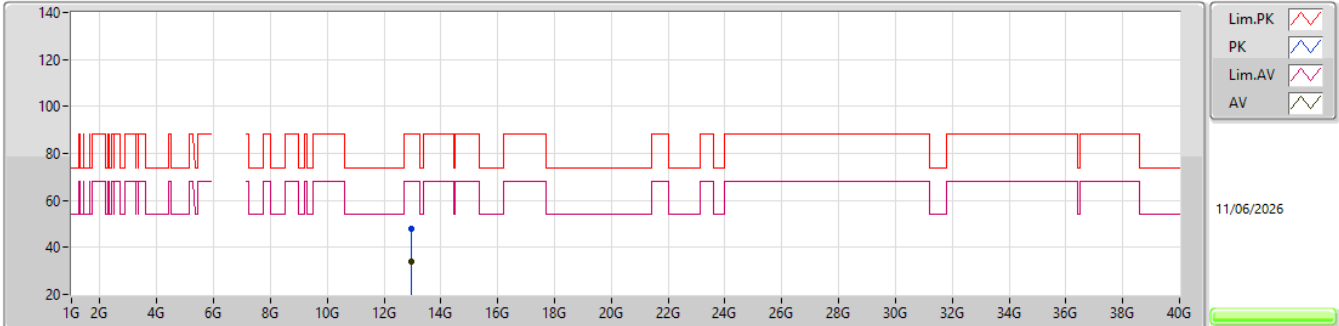


EUT X_4TX
Setting 58
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.96984G	48.07	88.20	-40.13	37.89	3	Vertical	313	2.67	-	39.16	14.51	43.49			
RMS	12.9706G	34.13	68.20	-34.07	23.95	3	Vertical	313	2.67	-	39.16	14.51	43.49			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6485MHz_TX

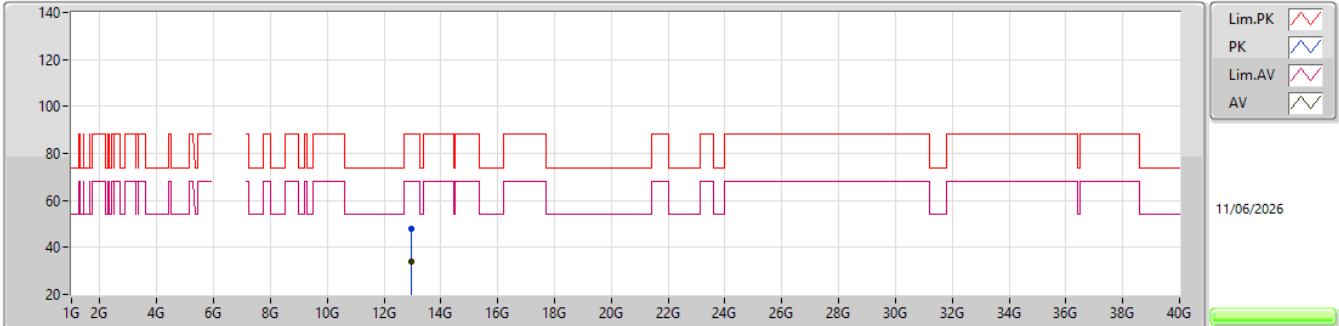


EUT X_4TX
Setting 58
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.96943G	47.91	88.20	-40.29	37.73	3	Horizontal	309	2.54	-	39.16	14.51	43.49			
RMS	12.97076G	34.14	68.20	-34.06	23.96	3	Horizontal	309	2.54	-	39.16	14.51	43.49			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6485MHz_TX

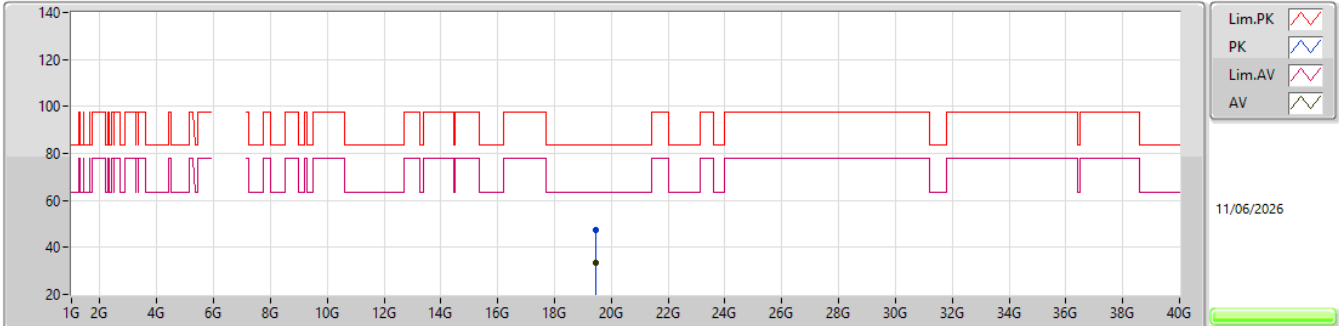


EUT X_4TX
Setting 58
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.45526G	47.19	83.54	-36.35	42.27	1	Vertical	229	1.76	-	37.59	16.14	48.81			
AV	19.45535G	33.64	63.54	-29.90	28.72	1	Vertical	229	1.76	-	37.59	16.14	48.81			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6485MHz_TX

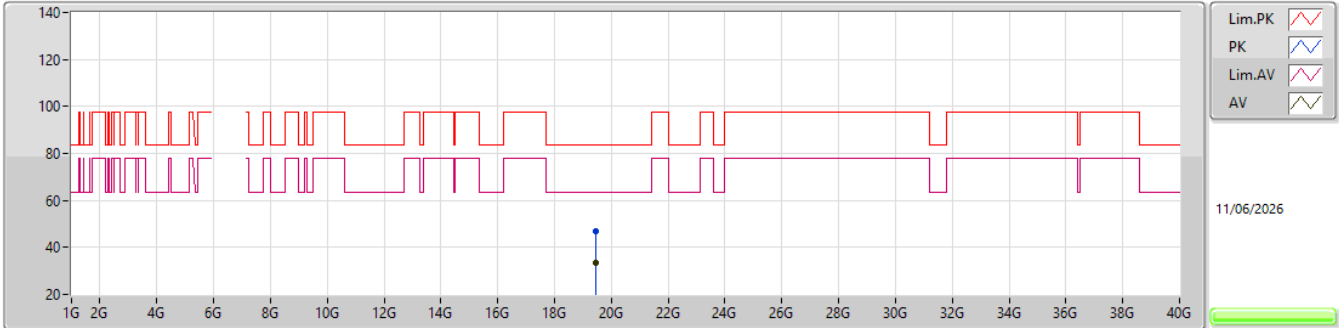


EUT X_4TX
Setting 58
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.45537G	47.09	83.54	-36.45	42.17	1	Horizontal	58	1.32	-	37.59	16.14	48.81			
AV	19.45595G	33.61	63.54	-29.93	28.69	1	Horizontal	58	1.32	-	37.59	16.14	48.81			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6525MHz_TX

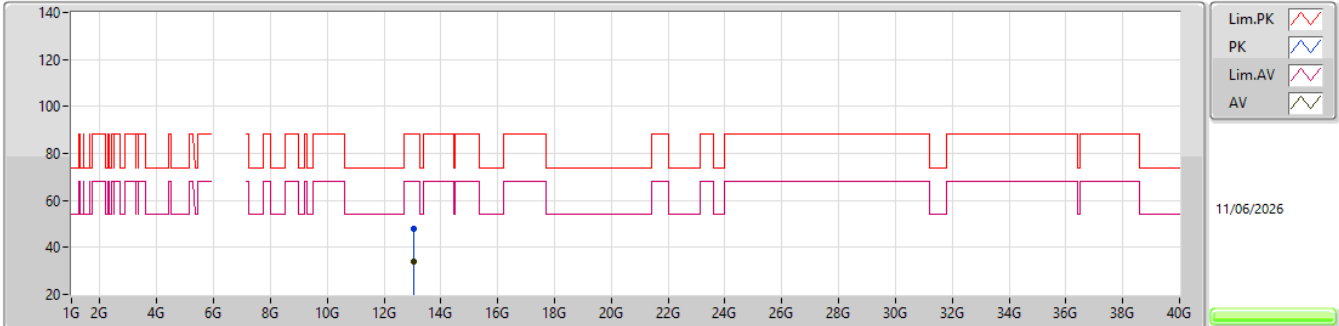


EUT X_4TX
Setting 58
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.04992G	48.02	88.20	-40.18	38.02	3	Vertical	38	2.21	-	38.90	14.59	43.49			
RMS	13.04906G	33.79	68.20	-34.41	23.79	3	Vertical	38	2.21	-	38.90	14.59	43.49			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6525MHz_TX

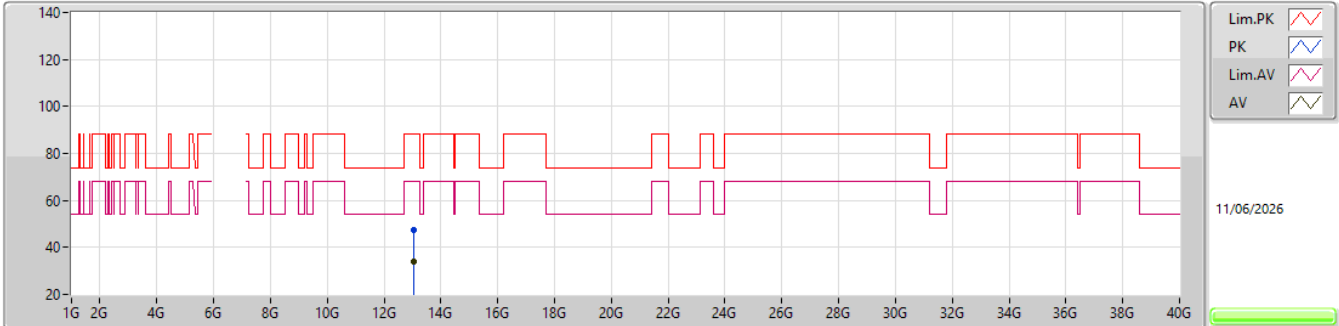


EUT X_4TX
Setting 58
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.04928G	47.40	88.20	-40.80	37.40	3	Horizontal	130	2.20	-	38.90	14.59	43.49			
RMS	13.05097G	33.78	68.20	-34.42	23.78	3	Horizontal	130	2.20	-	38.90	14.59	43.49			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6525MHz_TX

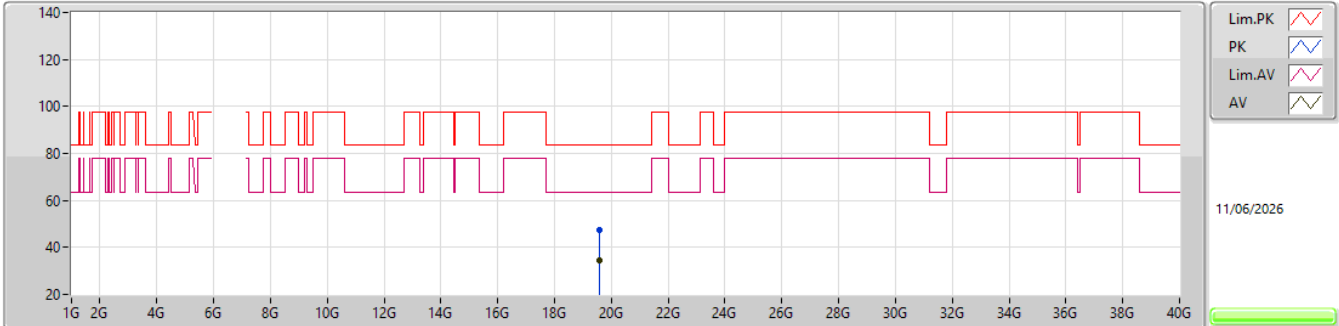


EUT X_4TX
Setting 58
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.57564G	47.56	83.54	-35.98	42.60	1	Vertical	88	2.63	-	37.60	16.19	48.83			
AV	19.57645G	34.25	63.54	-29.29	29.29	1	Vertical	88	2.63	-	37.60	16.19	48.83			

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6525MHz_TX

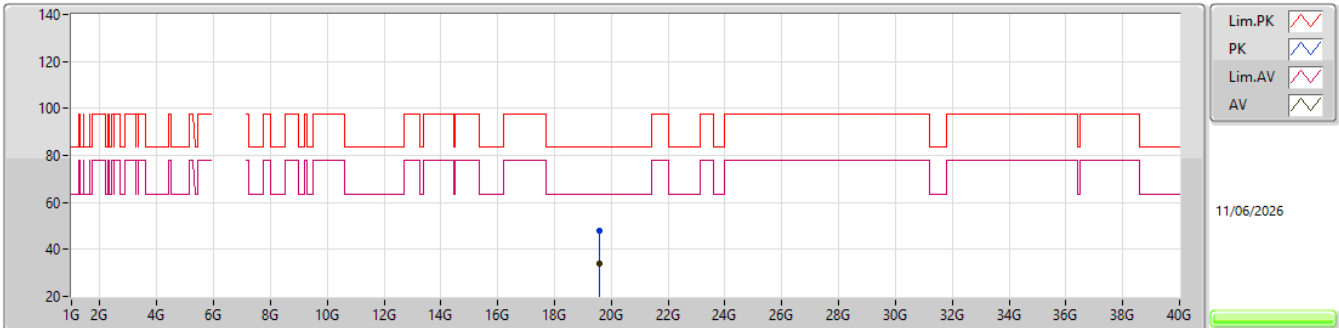


EUT X_4TX
Setting 58
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.57649G	47.69	83.54	-35.85	42.73	1	Horizontal	131	1.50	-	37.60	16.19	48.83			
AV	19.5743G	34.10	63.54	-29.44	29.14	1	Horizontal	131	1.50	-	37.60	16.19	48.83			

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6465MHz_TX

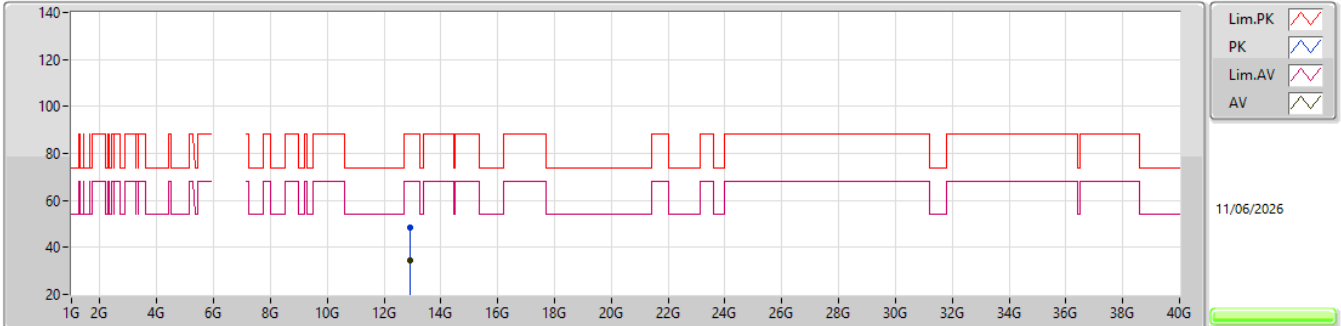


EUT X_4TX
Setting 71
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.92997G	48.44	88.20	-39.76	38.30	3	Vertical	318	1.26	-	39.16	14.47	43.49			
RMS	12.93036G	34.30	68.20	-33.90	24.16	3	Vertical	318	1.26	-	39.16	14.47	43.49			

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6465MHz_TX

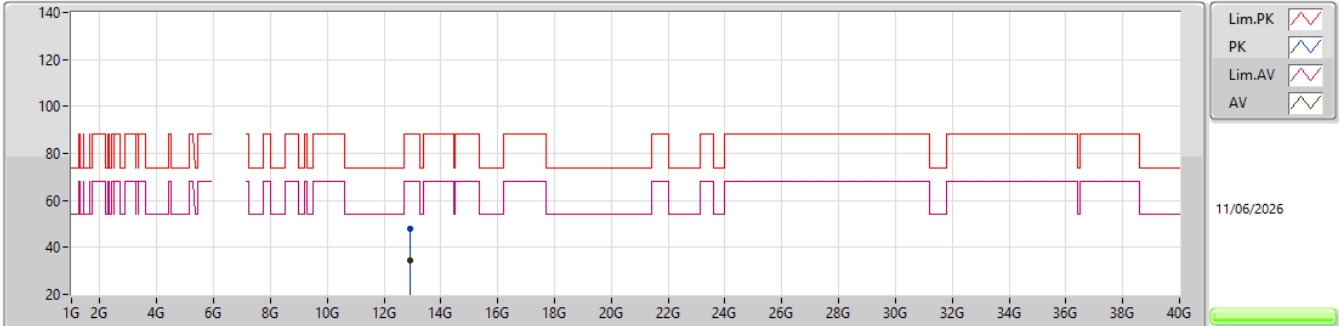


EUT_X_4TX
Setting 71
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.92948G	47.95	88.20	-40.25	37.81	3	Horizontal	171	2.69	-	39.16	14.47	43.49			
RMS	12.931G	34.32	68.20	-33.88	24.18	3	Horizontal	171	2.69	-	39.16	14.47	43.49			

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6465MHz_TX

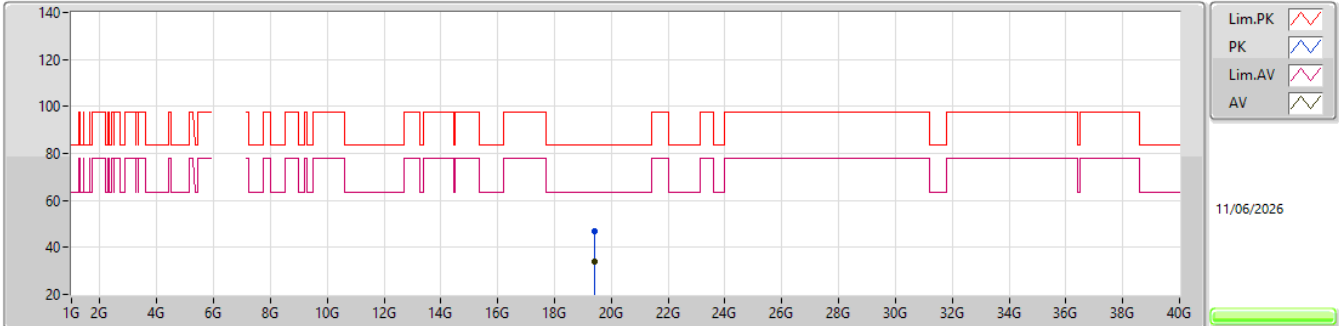


EUT X_4TX
Setting 71
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.39463G	47.13	83.54	-36.41	42.14	1	Vertical	185	2.91	-	37.70	16.11	48.82			
AV	19.39621G	33.77	63.54	-29.77	28.78	1	Vertical	185	2.91	-	37.70	16.11	48.82			

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6465MHz_TX

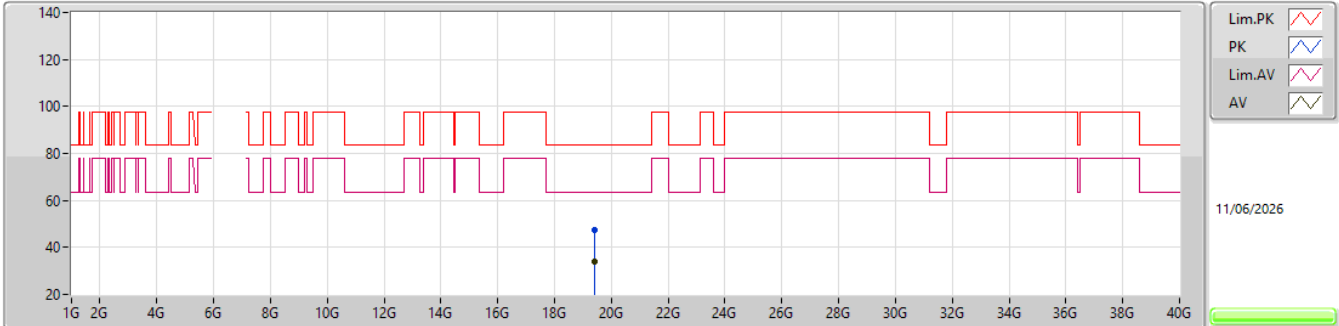


EUT X_4TX
Setting 71
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.39433G	47.33	83.54	-36.21	42.34	1	Horizontal	291	1.66	-	37.70	16.11	48.82			
AV	19.39365G	33.72	63.54	-29.82	28.73	1	Horizontal	291	1.66	-	37.70	16.11	48.82			

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6545MHz_TX

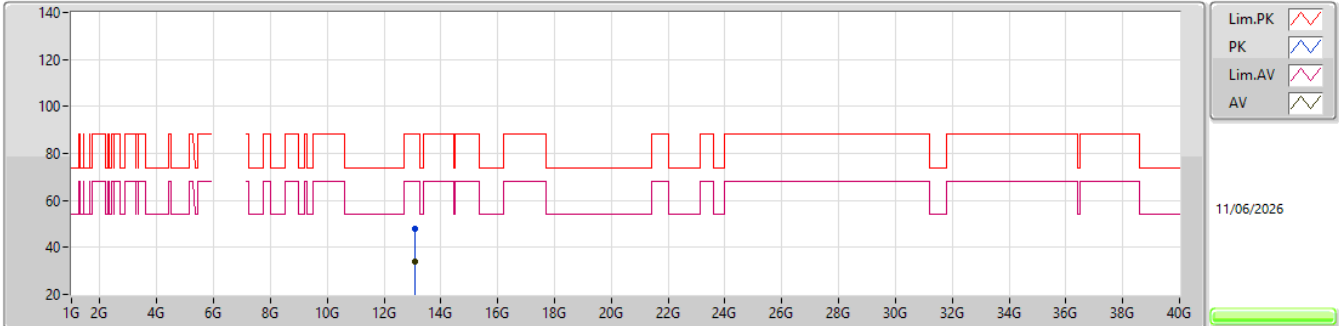


EUT_X_4TX
Setting 69
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.09021G	48.09	88.20	-40.11	38.06	3	Vertical	343	1.88	-	38.90	14.63	43.50			
RMS	13.09086G	34.10	68.20	-34.10	24.07	3	Vertical	343	1.88	-	38.90	14.63	43.50			

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6545MHz_TX

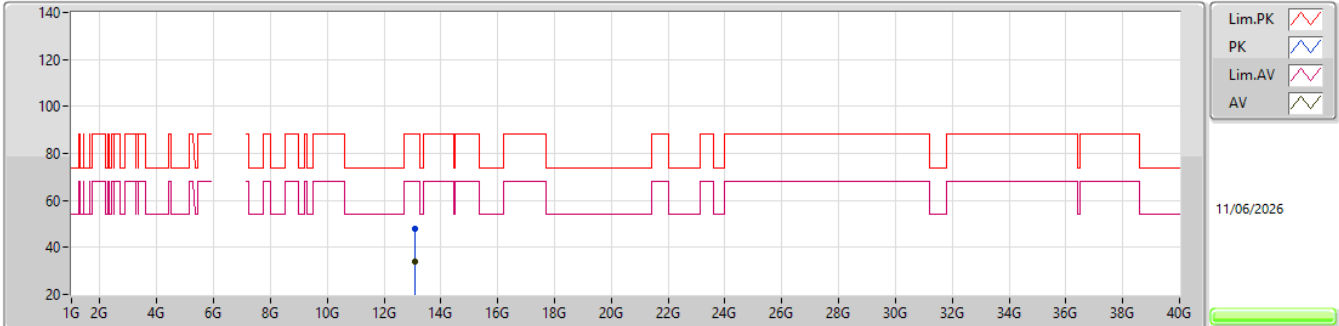


EUT X_4TX
Setting 69
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.09032G	48.14	88.20	-40.06	38.11	3	Horizontal	289	2.06	-	38.90	14.63	43.50			
RMS	13.09022G	34.11	68.20	-34.09	24.08	3	Horizontal	289	2.06	-	38.90	14.63	43.50			

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6545MHz_TX

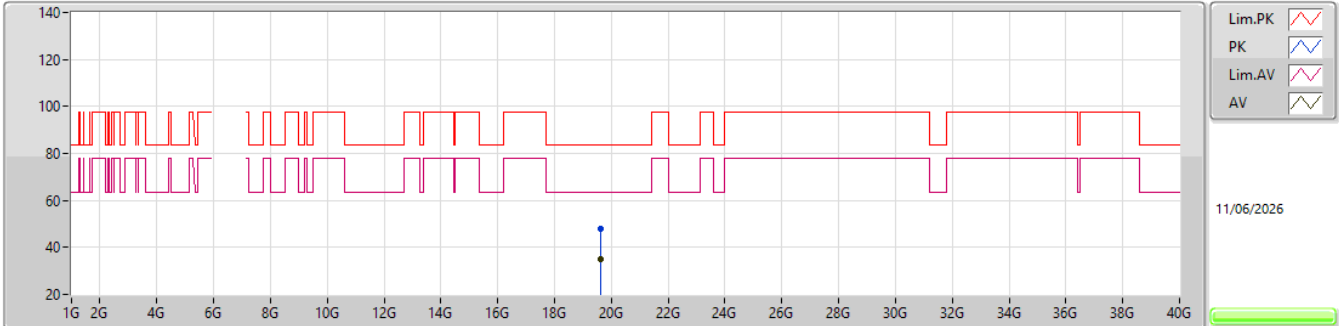


EUT X_4TX
Setting 69
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.63535G	48.13	83.54	-35.41	43.24	1	Vertical	279	1.14	-	37.53	16.21	48.85			
AV	19.63396G	34.76	63.54	-28.78	29.87	1	Vertical	279	1.14	-	37.53	16.21	48.85			

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6545MHz_TX

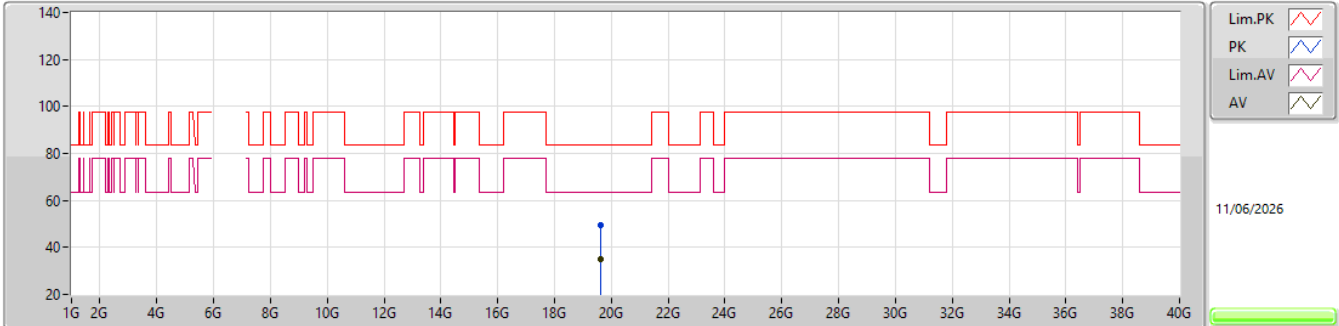


EUT X_4TX
Setting 69
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.63517G	49.27	83.54	-34.27	44.38	1	Horizontal	111	1.76	-	37.53	16.21	48.85			
AV	19.63538G	34.79	63.54	-28.75	29.90	1	Horizontal	111	1.76	-	37.53	16.21	48.85			

6.425-6.525GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6505MHz_TX

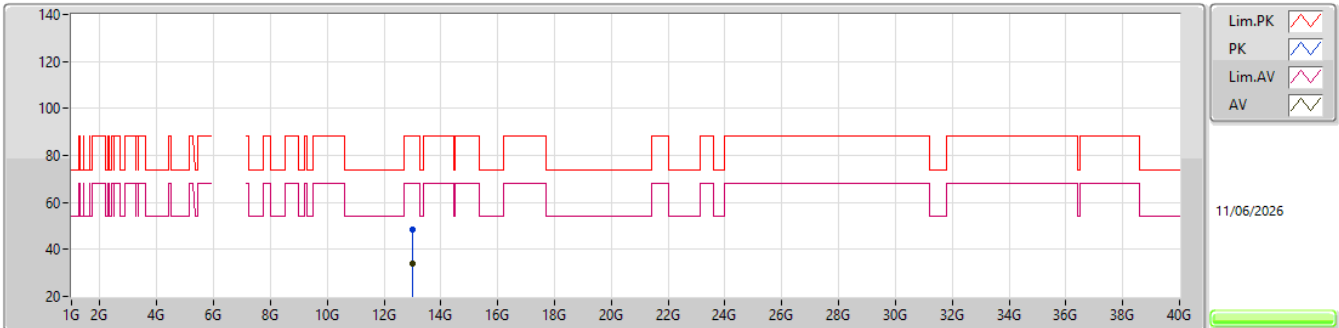


EUT_X_4TX
Setting 76
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.00914G	48.50	88.20	-39.70	38.38	3	Vertical	310	2.42	-	39.06	14.55	43.49			
RMS	13.01034G	34.03	68.20	-34.17	23.91	3	Vertical	310	2.42	-	39.06	14.55	43.49			

6.425-6.525GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6505MHz_TX

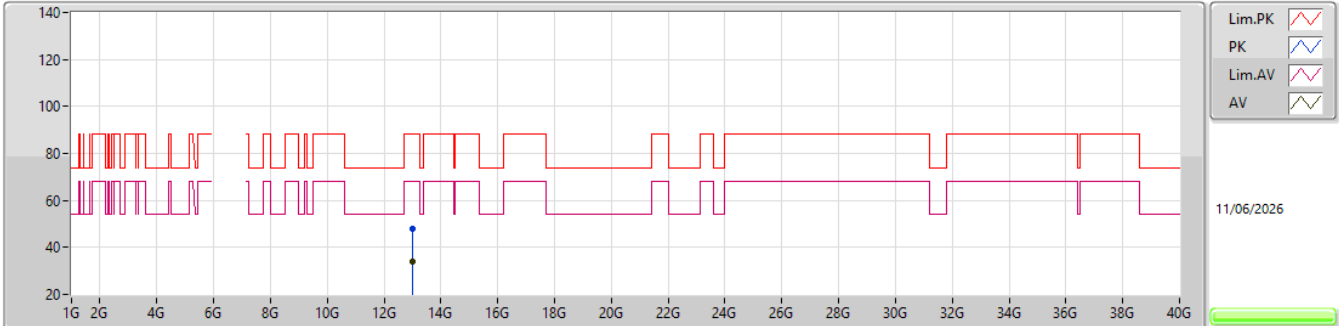


EUT_X_4TX
Setting 76
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.01041G	47.79	88.20	-40.41	37.67	3	Horizontal	18	1.39	-	39.06	14.55	43.49			
RMS	13.00995G	34.05	68.20	-34.15	23.93	3	Horizontal	18	1.39	-	39.06	14.55	43.49			

6.425-6.525GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6505MHz_TX

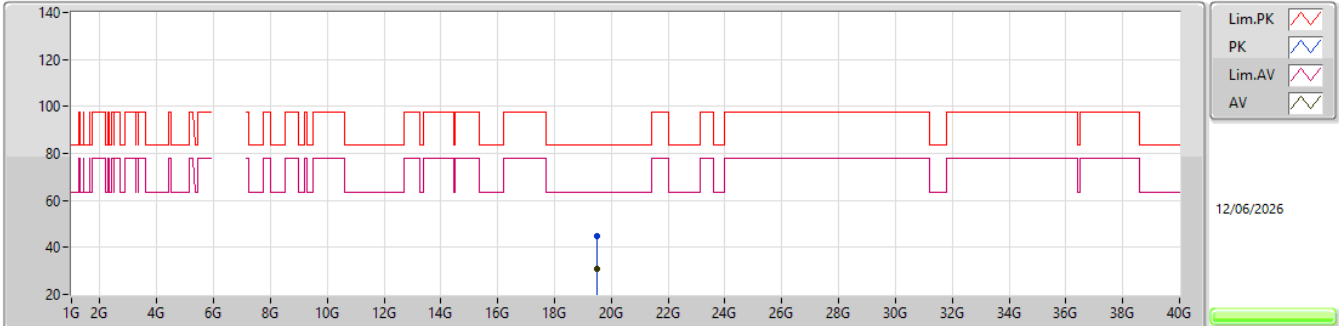


EUT_X_4TX
Setting 76
04-C-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.51614G	44.81	83.54	-38.73	39.93	1	Vertical	221	1.71	-	37.53	16.16	48.81			
AV	19.51589G	31.05	63.54	-32.49	26.17	1	Vertical	221	1.71	-	37.53	16.16	48.81			

6.425-6.525GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6505MHz_TX

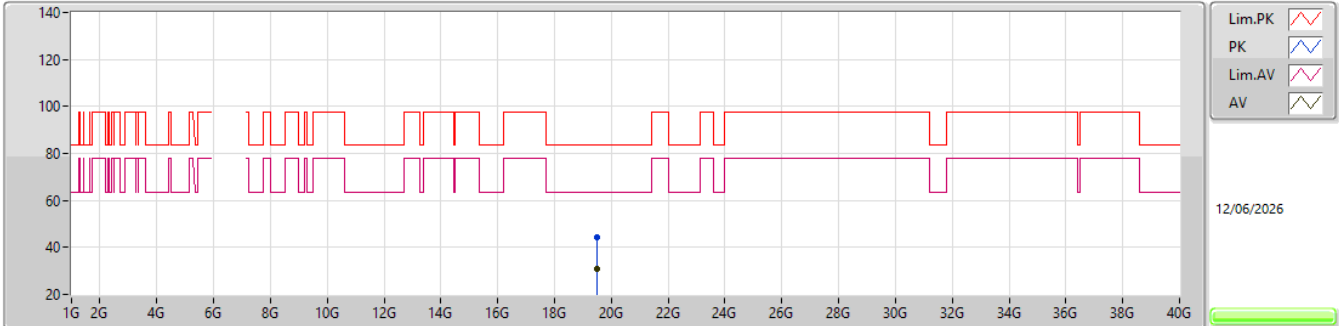


EUT X_4TX
Setting 76
04-C-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.51438G	44.47	83.54	-39.07	39.59	1	Horizontal	248	1.73	-	37.53	16.16	48.81			
AV	19.51594G	31.07	63.54	-32.47	26.19	1	Horizontal	248	1.73	-	37.53	16.16	48.81			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6535MHz_TX

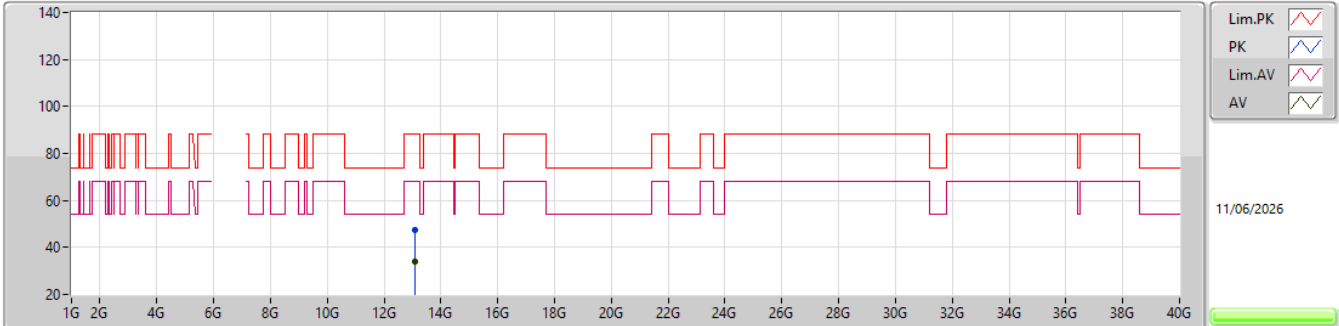


EUT X_4TX
Setting 48
04-H-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.06982G	47.44	88.20	-40.76	37.42	3	Vertical	319	1.85	-	38.90	14.61	43.49			
RMS	13.06917G	33.72	68.20	-34.48	23.70	3	Vertical	319	1.85	-	38.90	14.61	43.49			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6535MHz_TX

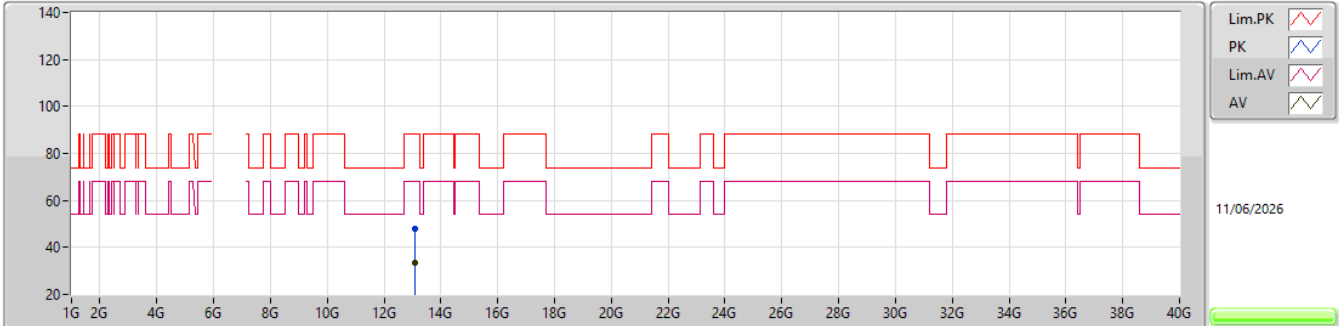


EUT_X_4TX
Setting 48
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.06974G	47.75	88.20	-40.45	37.73	3	Horizontal	162	2.50	-	38.90	14.61	43.49			
RMS	13.06906G	33.69	68.20	-34.51	23.67	3	Horizontal	162	2.50	-	38.90	14.61	43.49			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6535MHz_TX

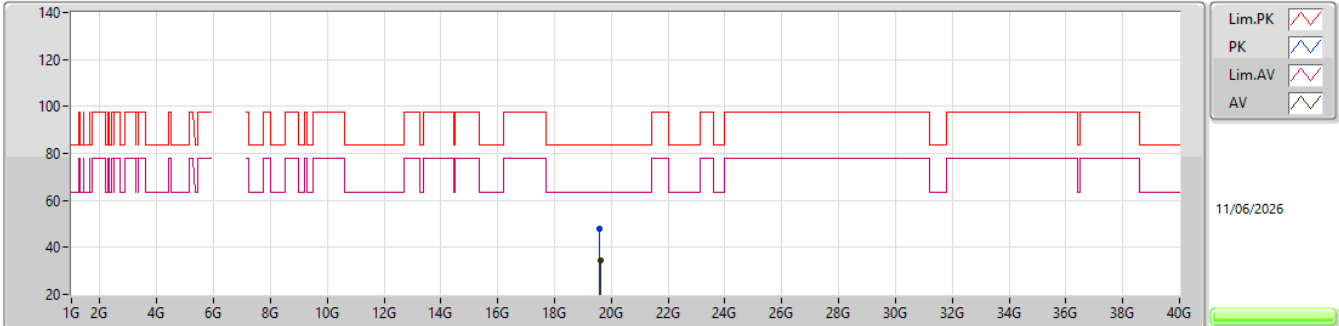


EUT X_4TX
Setting 48
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60098G	48.01	83.54	-35.53	43.05	1	Vertical	33	1.49	-	37.60	16.20	48.84			
AV	19.61658G	34.74	63.54	-28.80	29.81	1	Vertical	33	1.49	-	37.57	16.21	48.85			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6535MHz_TX

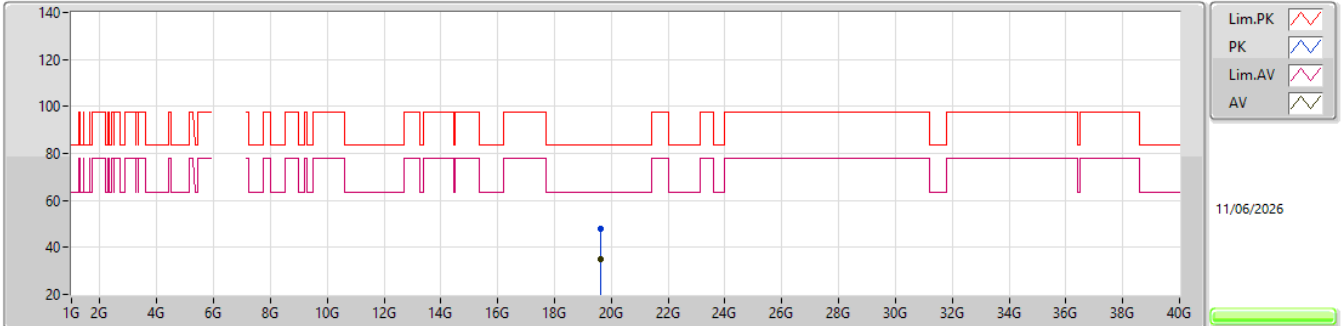


EUT_X_4TX
Setting 48
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.60422G	47.71	83.54	-35.83	42.76	1	Horizontal	52	1.41	-	37.59	16.20	48.84			
AV	19.61904G	34.80	63.54	-28.74	29.88	1	Horizontal	52	1.41	-	37.56	16.21	48.85			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6695MHz_TX

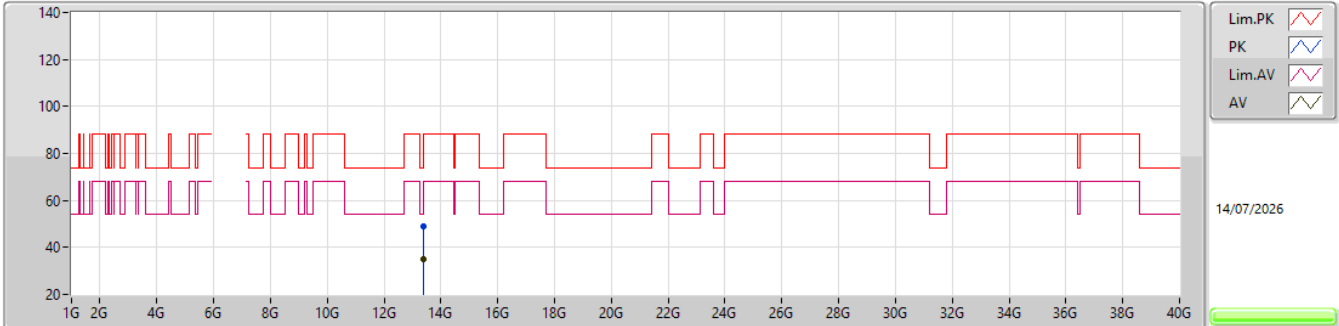


EUT_X_4TX
Setting 38
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.3908G	49.19	74.00	-24.81	38.30	3	Vertical	121	1.92	-	39.48	14.92	43.51			
AV	13.39073G	34.93	54.00	-19.07	24.04	3	Vertical	121	1.92	-	39.48	14.92	43.51			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6695MHz_TX

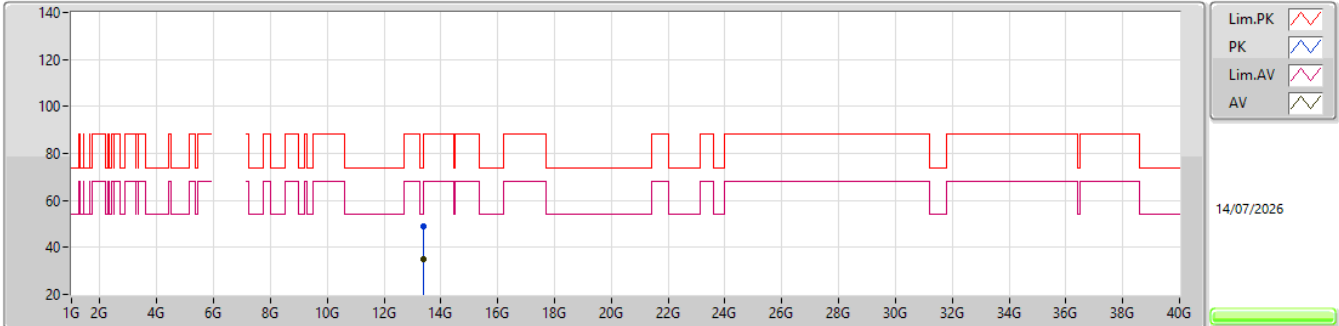


EUT_X_4TX
Setting 38
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.39061G	48.84	74.00	-25.16	37.95	3	Horizontal	64	2.98	-	39.48	14.92	43.51			
AV	13.39034G	34.91	54.00	-19.09	24.02	3	Horizontal	64	2.98	-	39.48	14.92	43.51			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6695MHz_TX

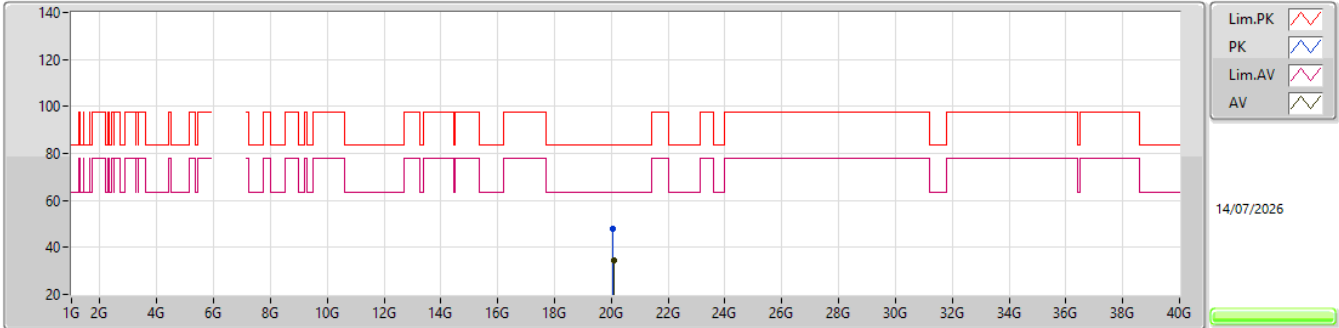


EUT_X_4TX
Setting 38
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.07276G	47.96	83.54	-35.58	43.30	1	Vertical	272	2.83	-	37.25	16.40	48.99			
AV	20.09976G	34.58	63.54	-28.96	29.84	1	Vertical	272	2.83	-	37.30	16.42	48.98			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6695MHz_TX

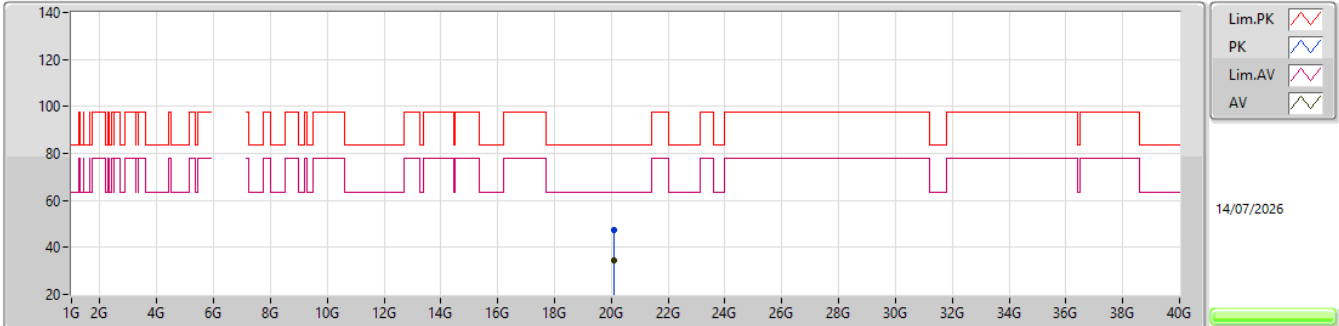


EUT_X_4TX
Setting 38
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.07408G	47.33	83.54	-36.21	42.67	1	Horizontal	322	1.76	-	37.25	16.40	48.99			
AV	20.09856G	34.55	63.54	-28.99	29.81	1	Horizontal	322	1.76	-	37.30	16.42	48.98			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6855MHz_TX

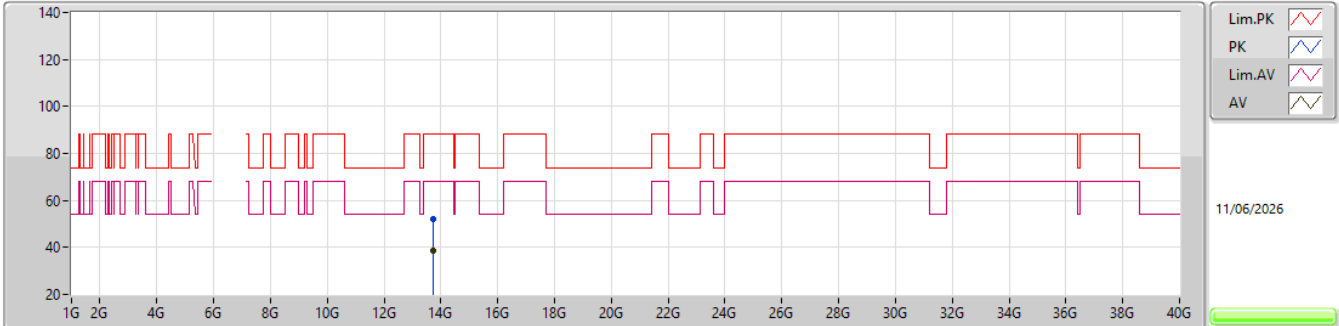


EUT X_4TX
Setting 41
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.70912G	52.19	88.20	-36.01	40.40	3	Vertical	81	1.47	-	40.16	15.23	43.60			
RMS	13.70931G	38.40	68.20	-29.80	26.61	3	Vertical	81	1.47	-	40.16	15.23	43.60			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6855MHz_TX

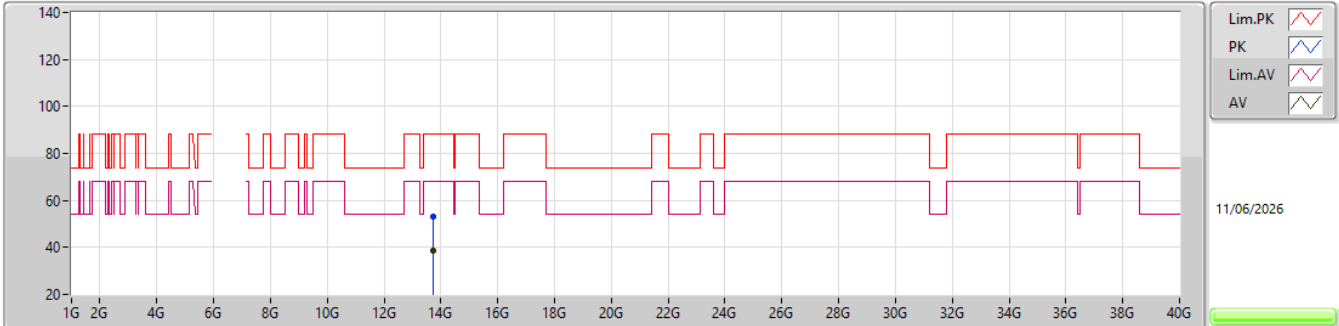


EUT X_4TX
Setting 41
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.7098G	52.94	88.20	-35.26	41.15	3	Horizontal	127	1.47	-	40.16	15.23	43.60			
RMS	13.71058G	38.44	68.20	-29.76	26.65	3	Horizontal	127	1.47	-	40.16	15.23	43.60			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6855MHz_TX

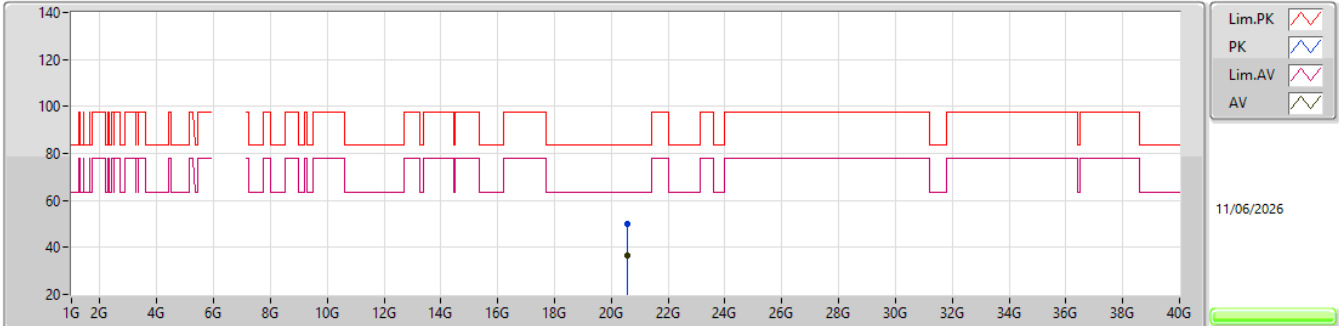


EUT_X_4TX
Setting 41
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.57886G	50.08	83.54	-33.46	44.72	1	Vertical	16	2.15	-	37.62	16.64	48.90			
AV	20.5749G	36.62	63.54	-26.92	31.28	1	Vertical	16	2.15	-	37.60	16.64	48.90			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6855MHz_TX

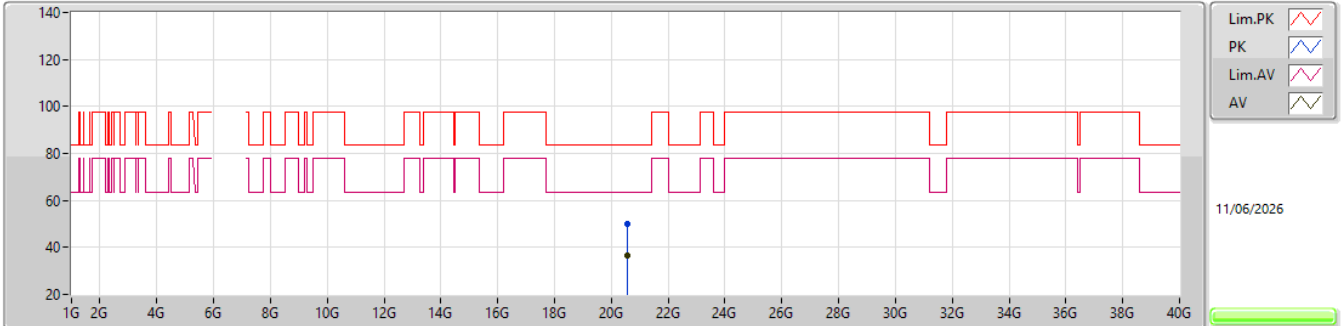


EUT X_4TX
Setting 41
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.55816G	50.15	83.54	-33.39	44.89	1	Horizontal	240	2.98	-	37.53	16.63	48.90			
AV	20.57712G	36.61	63.54	-26.93	31.26	1	Horizontal	240	2.98	-	37.61	16.64	48.90			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6875MHz_TX

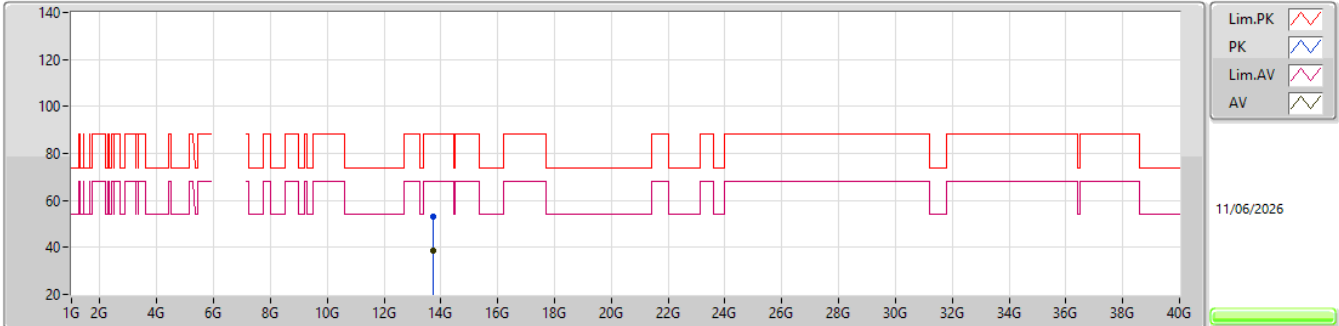


EUT_X_4TX
Setting 37
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.7494G	52.86	88.20	-35.34	41.20	3	Vertical	272	2.23	-	40.00	15.27	43.61			
RMS	13.74984G	38.68	68.20	-29.52	27.02	3	Vertical	272	2.23	-	40.00	15.27	43.61			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_4TX


6875MHz_TX

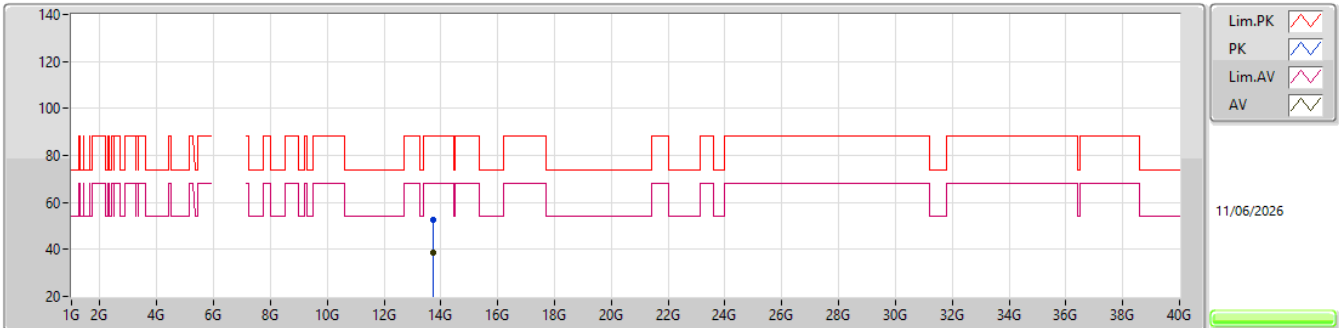
EUT X_4TX
Setting 37
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.75026G	52.54	88.20	-35.66	40.88	3	Horizontal	308	2.40	-	40.00	15.27	43.61			
RMS	13.74942G	38.69	68.20	-29.51	27.03	3	Horizontal	308	2.40	-	40.00	15.27	43.61			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6875MHz_TX

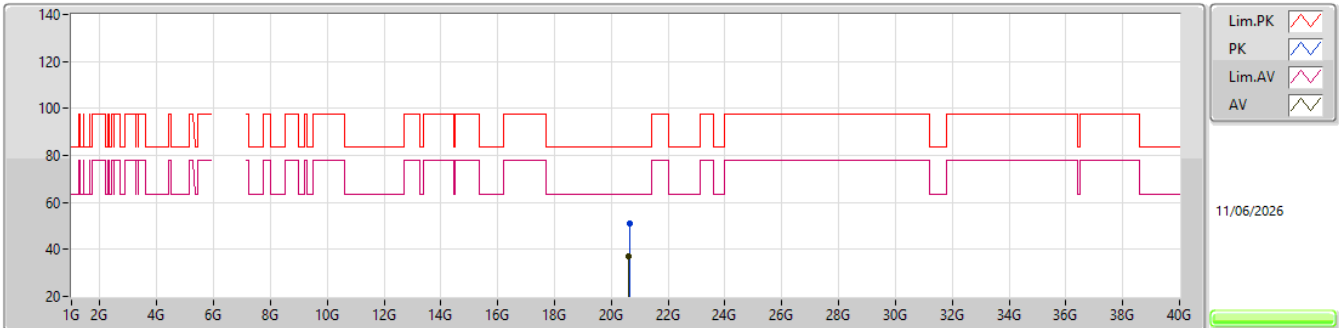


EUT X_4TX
Setting 37
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.63544G	50.79	83.54	-32.75	45.39	1	Vertical	255	2.13	-	37.63	16.67	48.90			
AV	20.62578G	37.11	63.54	-26.43	31.70	1	Vertical	255	2.13	-	37.65	16.66	48.90			

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_4TX


6875MHz_TX

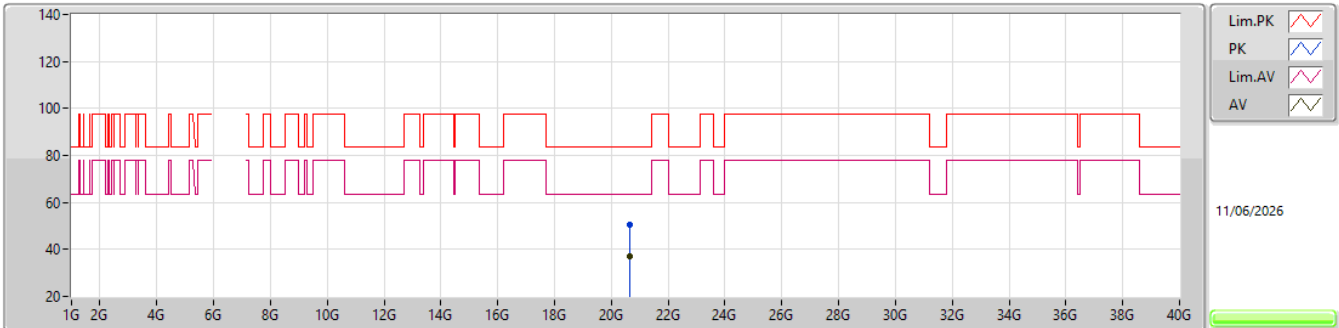EUT X_4TX
Setting 37
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.63112G	50.71	83.54	-32.83	45.30	1	Horizontal	80	2.02	-	37.64	16.67	48.90			
AV	20.63826G	37.09	63.54	-26.45	31.70	1	Horizontal	80	2.02	-	37.62	16.67	48.90			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6565MHz_TX

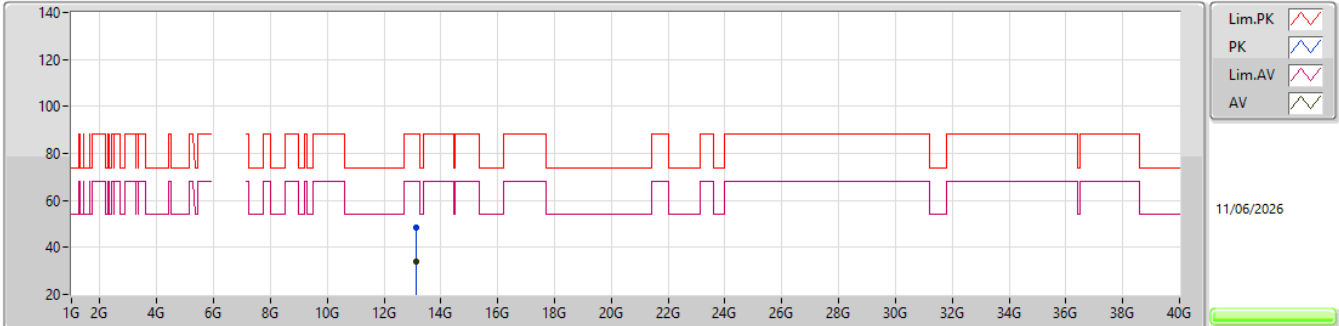


EUT X_4TX
Setting 59
04-H-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.13081G	48.27	88.20	-39.93	38.02	3	Vertical	140	2.90	-	39.08	14.67	43.50			
RMS	13.12934G	34.15	68.20	-34.05	23.90	3	Vertical	140	2.90	-	39.08	14.67	43.50			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6565MHz_TX

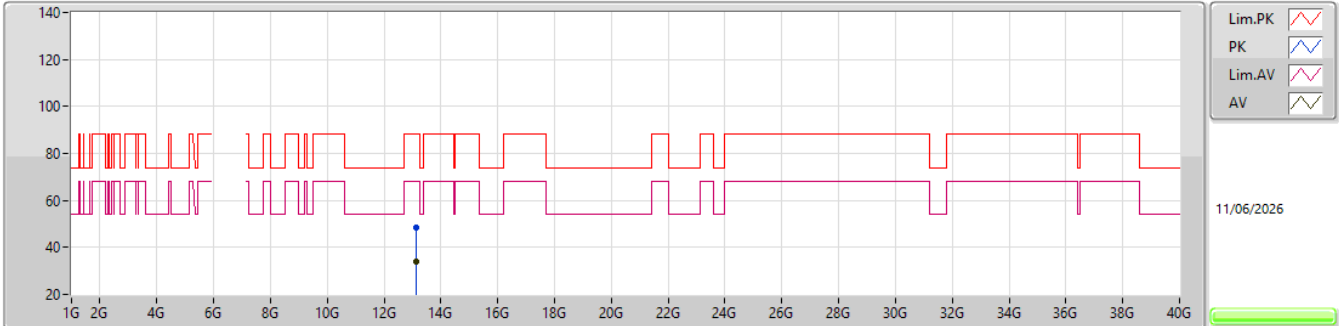


EUT X_4TX
Setting 59
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.12967G	48.62	88.20	-39.58	38.37	3	Horizontal	33	2.99	-	39.08	14.67	43.50			
RMS	13.12927G	34.18	68.20	-34.02	23.93	3	Horizontal	33	2.99	-	39.08	14.67	43.50			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6565MHz_TX

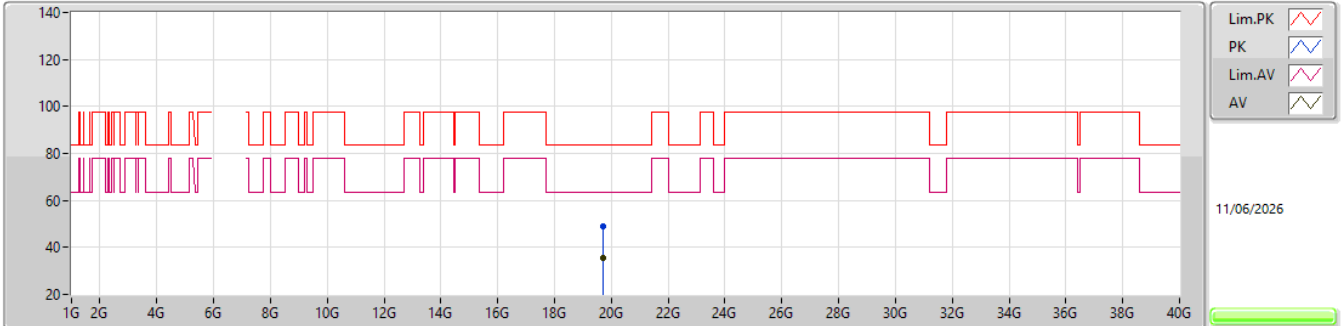


EUT X_4TX
Setting 59
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.69598G	48.99	83.54	-34.55	43.95	1	Vertical	228	2.66	-	37.68	16.24	48.88			
AV	19.69531G	35.43	63.54	-28.11	30.39	1	Vertical	228	2.66	-	37.68	16.24	48.88			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6565MHz_TX

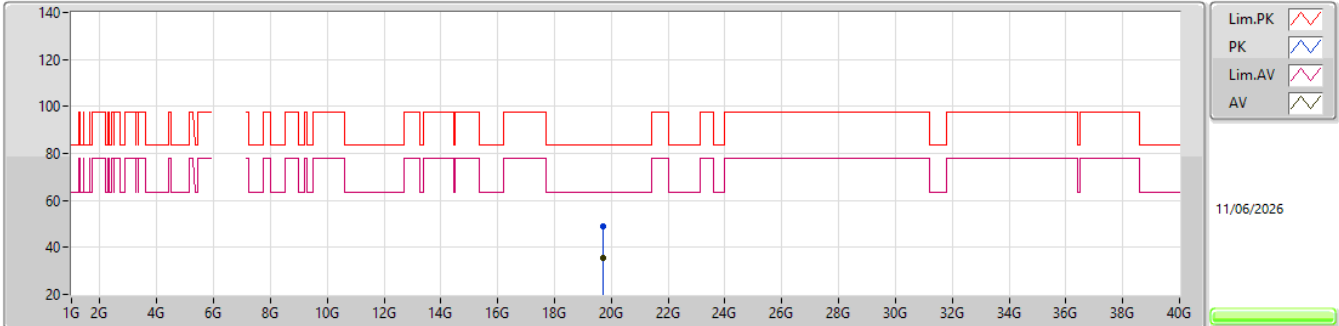


EUT X_4TX
Setting 59
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.69552G	49.12	83.54	-34.42	44.08	1	Horizontal	298	1.75	-	37.68	16.24	48.88			
AV	19.69438G	35.33	63.54	-28.21	30.29	1	Horizontal	298	1.75	-	37.68	16.24	48.88			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6685MHz_TX

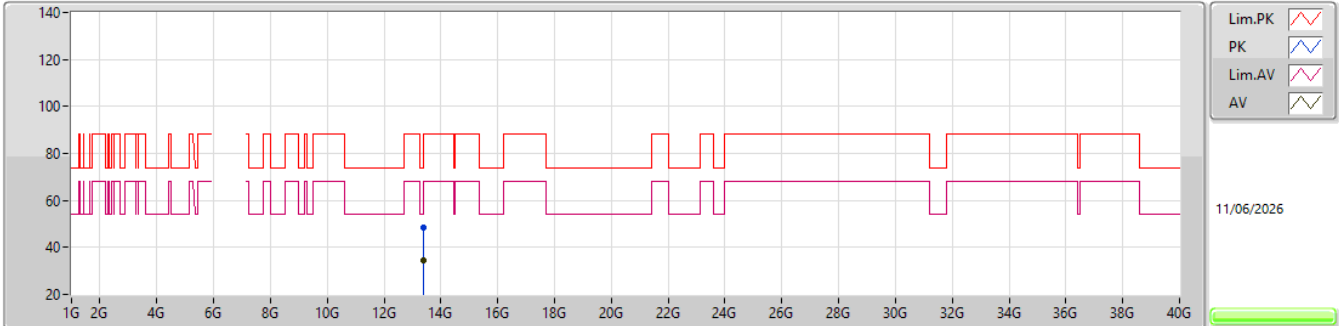


EUT X_4TX
Setting 48
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.37026G	48.63	74.00	-25.37	37.80	3	Vertical	304	2.93	-	39.44	14.90	43.51			
AV	13.3709G	34.67	54.00	-19.33	23.84	3	Vertical	304	2.93	-	39.44	14.90	43.51			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6685MHz_TX

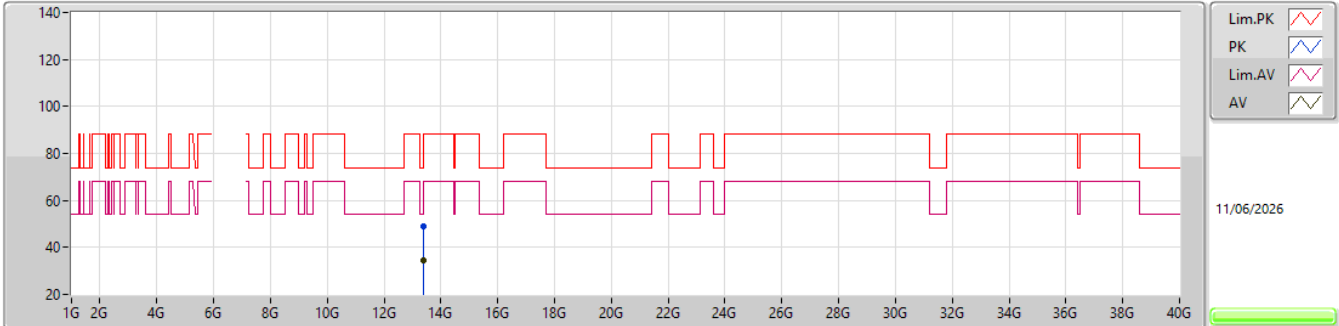


EUT X_4TX
Setting 48
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.36962G	48.81	74.00	-25.19	37.98	3	Horizontal	299	2.58	-	39.44	14.90	43.51			
AV	13.37084G	34.64	54.00	-19.36	23.81	3	Horizontal	299	2.58	-	39.44	14.90	43.51			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6685MHz_TX

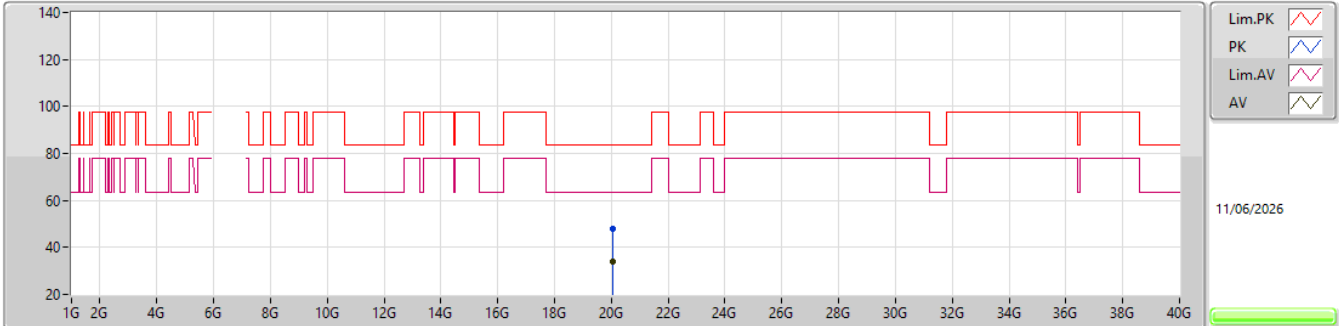


EUT X_4TX
Setting 48
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.05547G	47.89	83.54	-35.65	43.27	1	Vertical	231	1.48	-	37.21	16.40	48.99			
AV	20.05554G	34.08	63.54	-29.46	29.46	1	Vertical	231	1.48	-	37.21	16.40	48.99			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6685MHz_TX

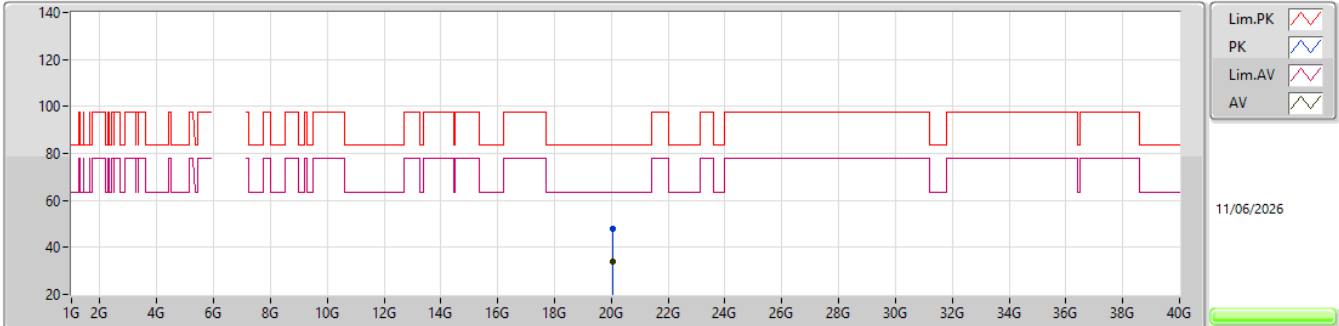


EUT X_4TX
Setting 48
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.05609G	48.10	83.54	-35.44	43.48	1	Horizontal	189	1.89	-	37.21	16.40	48.99			
AV	20.05458G	34.13	63.54	-29.41	29.51	1	Horizontal	189	1.89	-	37.21	16.40	48.99			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6845MHz_TX

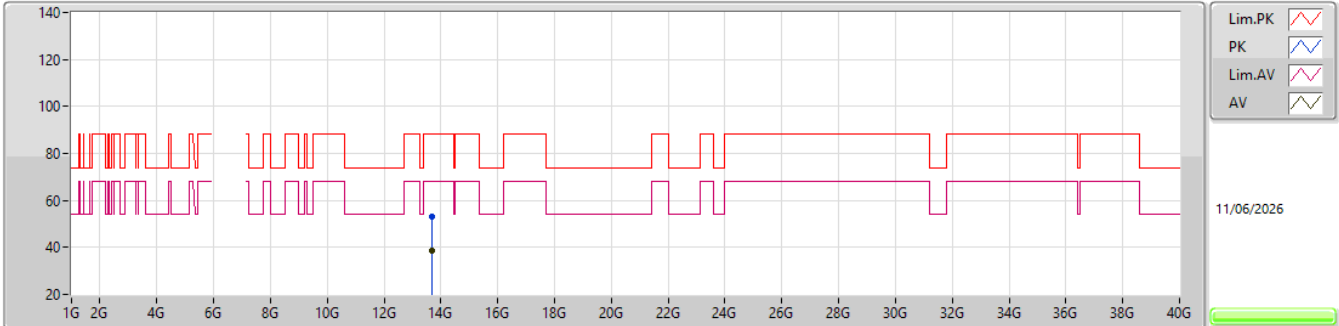


EUT X_4TX
Setting 51
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.69081G	53.11	88.20	-35.09	41.31	3	Vertical	89	1.07	-	40.18	15.21	43.59			
RMS	13.68992G	38.45	68.20	-29.75	26.65	3	Vertical	89	1.07	-	40.18	15.21	43.59			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6845MHz_TX

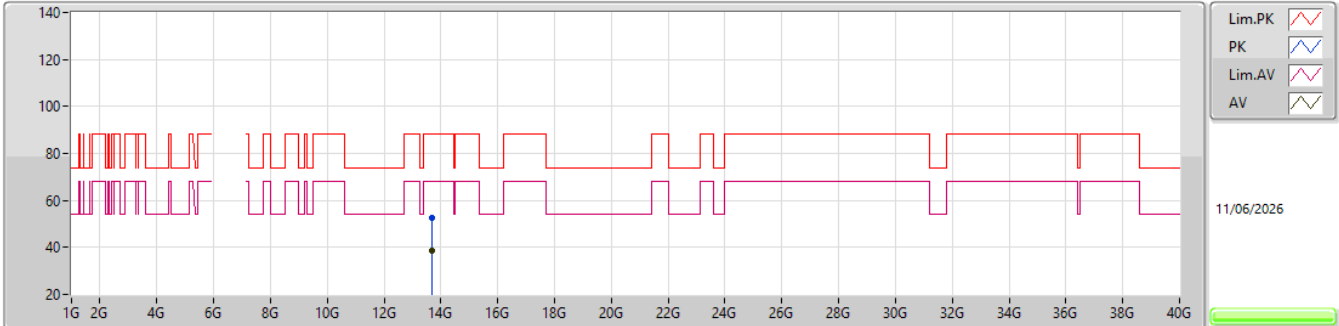


EUT X_4TX
Setting 51
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.68937G	52.80	88.20	-35.40	41.00	3	Horizontal	160	2.48	-	40.18	15.21	43.59			
RMS	13.68953G	38.44	68.20	-29.76	26.64	3	Horizontal	160	2.48	-	40.18	15.21	43.59			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6845MHz_TX

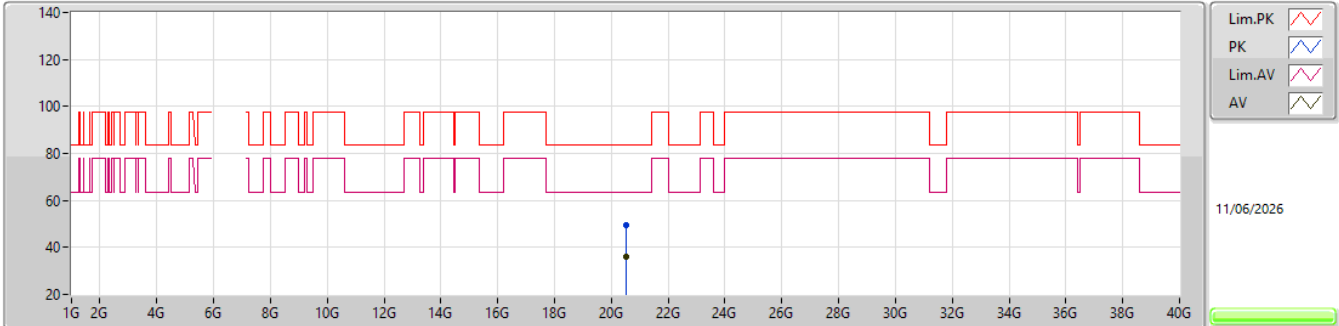


EUT X_4TX
Setting 51
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.53631G	49.58	83.54	-33.96	44.33	1	Vertical	141	1.75	-	37.53	16.62	48.90			
AV	20.53585G	36.15	63.54	-27.39	30.90	1	Vertical	141	1.75	-	37.53	16.62	48.90			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6845MHz_TX

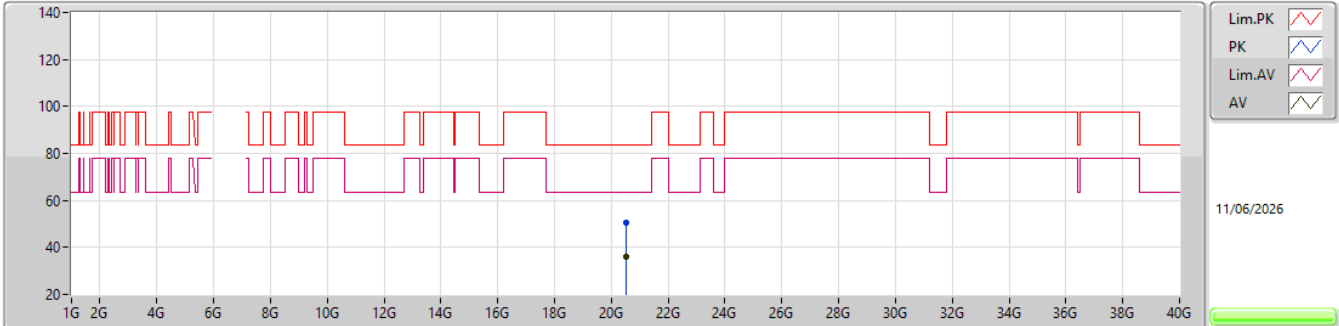


EUT X_4TX
Setting 51
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.53595G	50.54	83.54	-33.00	45.29	1	Horizontal	101	2.98	-	37.53	16.62	48.90			
AV	20.53579G	36.18	63.54	-27.36	30.93	1	Horizontal	101	2.98	-	37.53	16.62	48.90			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6885MHz_TX

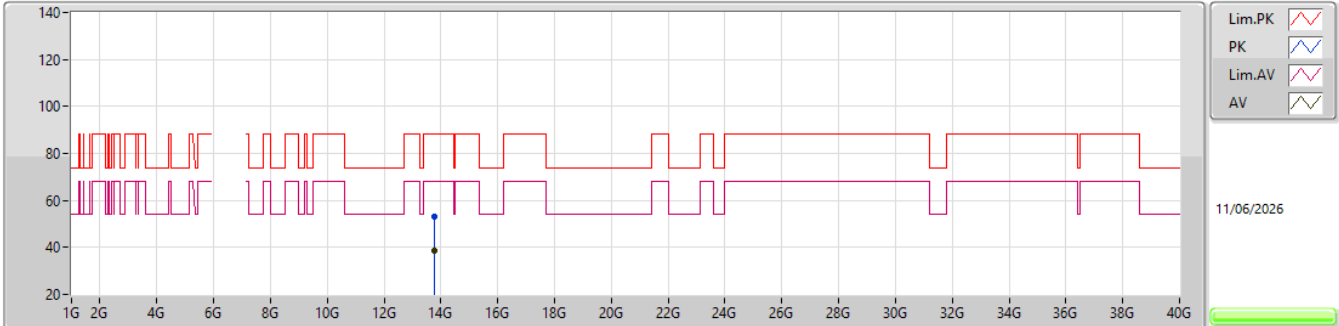


EUT X_4TX
Setting 52
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.76974G	53.04	88.20	-35.16	41.37	3	Vertical	114	1.94	-	40.00	15.29	43.62			
RMS	13.76902G	38.72	68.20	-29.48	27.05	3	Vertical	114	1.94	-	40.00	15.29	43.62			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6885MHz_TX

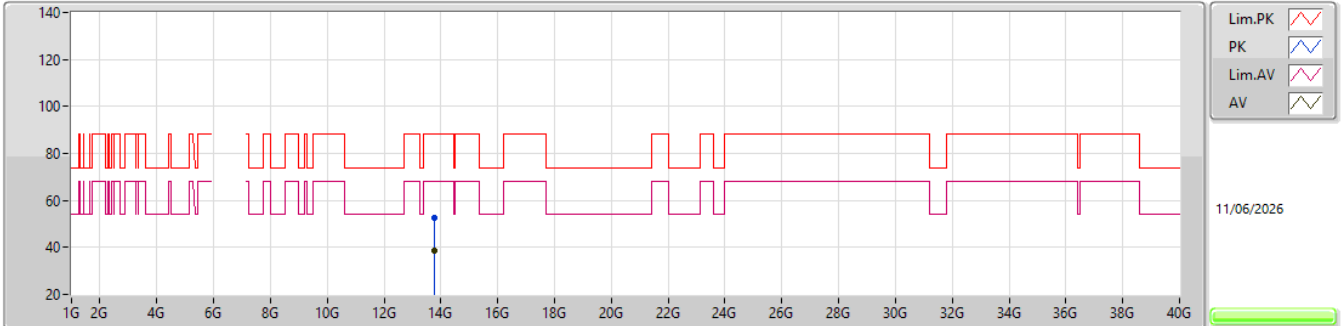


EUT X_4TX
Setting 52
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.77031G	52.64	88.20	-35.56	40.97	3	Horizontal	346	2.97	-	40.00	15.29	43.62			
RMS	13.76928G	38.72	68.20	-29.48	27.05	3	Horizontal	346	2.97	-	40.00	15.29	43.62			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6885MHz_TX

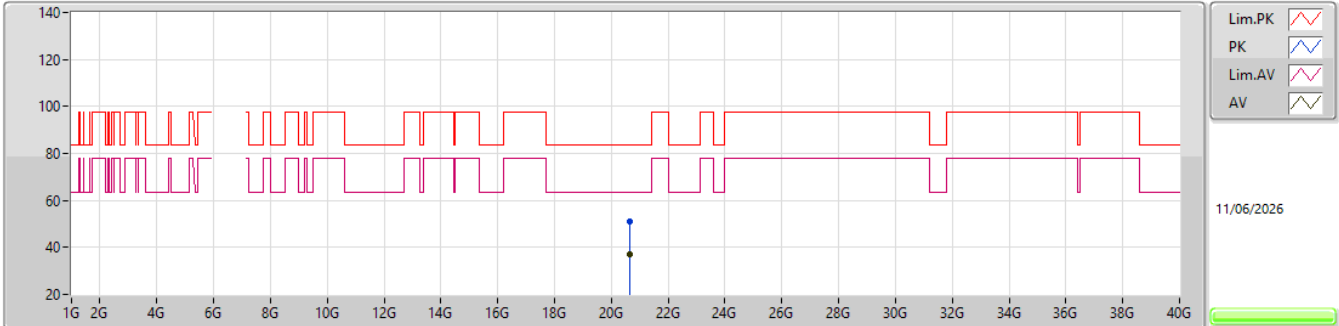


EUT X_4TX
Setting 52
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.65384G	50.92	83.54	-32.62	45.55	1	Vertical	359	2.70	-	37.59	16.68	48.90			
AV	20.65375G	37.00	63.54	-26.54	31.63	1	Vertical	359	2.70	-	37.59	16.68	48.90			

6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

6885MHz_TX

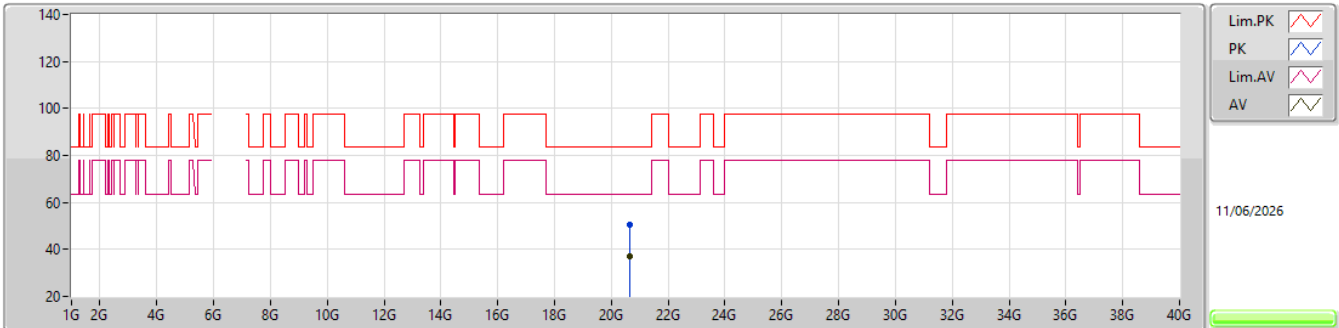


EUT X_4TX
Setting 52
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.65648G	50.47	83.54	-33.07	45.10	1	Horizontal	176	1.24	-	37.59	16.68	48.90			
AV	20.65446G	37.07	63.54	-26.47	31.70	1	Horizontal	176	1.24	-	37.59	16.68	48.90			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6625MHz_TX

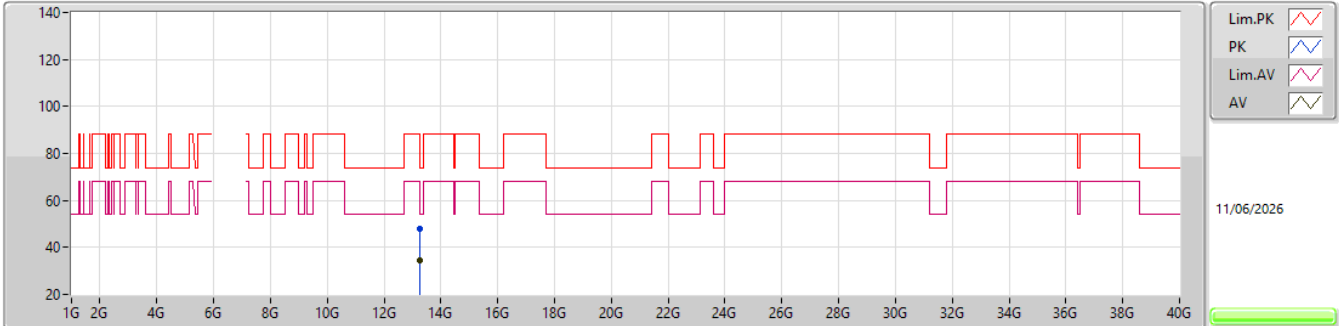


EUT X_4TX
Setting 71
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.25058G	47.76	74.00	-26.24	37.29	3	Vertical	340	1.54	-	39.20	14.78	43.51			
RMS	13.24932G	34.23	68.20	-33.97	23.75	3	Vertical	340	1.54	-	39.20	14.78	43.50			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6625MHz_TX

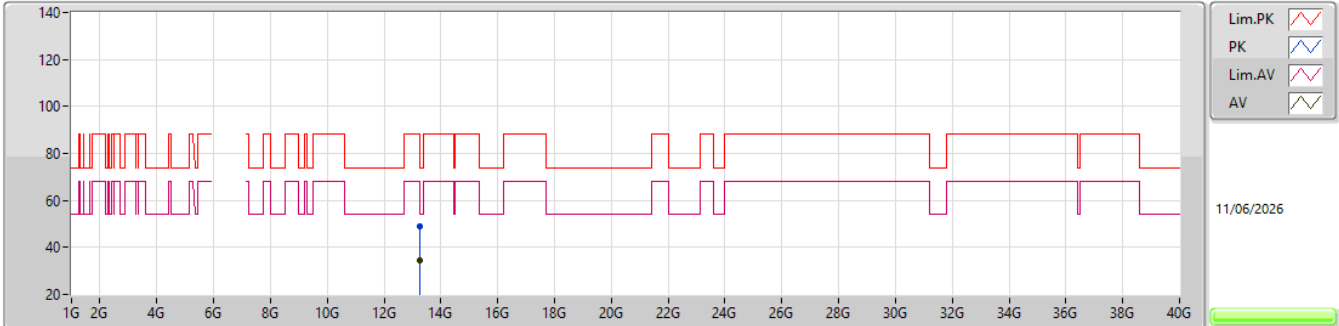


EUT X_4TX
Setting 71
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.24916G	48.93	88.20	-39.27	38.45	3	Horizontal	247	2.72	-	39.20	14.78	43.50			
RMS	13.24946G	34.27	68.20	-33.93	23.79	3	Horizontal	247	2.72	-	39.20	14.78	43.50			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6625MHz_TX

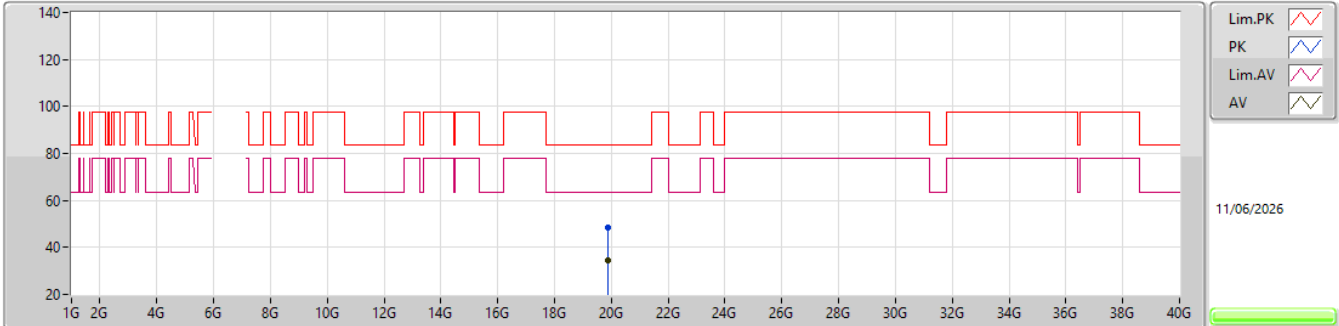


EUT X_4TX
Setting 71
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.87522G	48.58	83.54	-34.96	43.61	1	Vertical	69	2.37	-	37.60	16.32	48.95			
AV	19.87414G	34.57	63.54	-28.97	29.60	1	Vertical	69	2.37	-	37.60	16.32	48.95			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6625MHz_TX

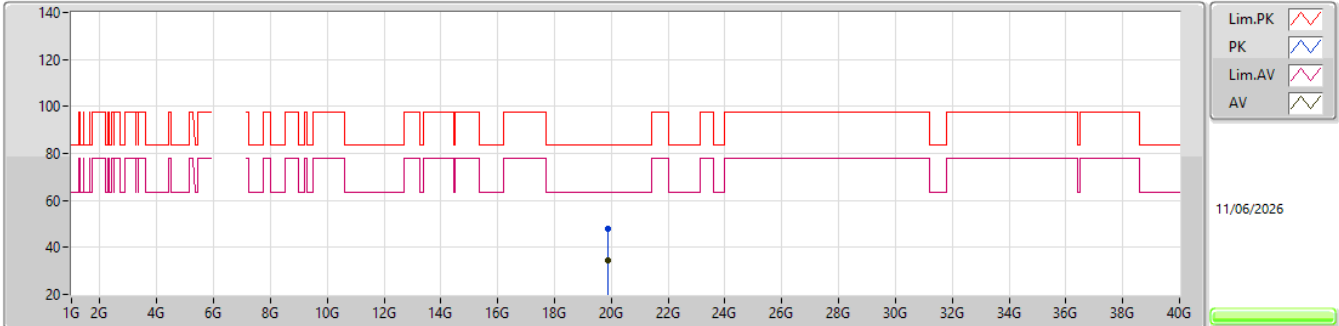


EUT X_4TX
Setting 71
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.87479G	47.96	83.54	-35.58	42.99	1	Horizontal	82	1.79	-	37.60	16.32	48.95			
AV	19.87418G	34.55	63.54	-28.99	29.58	1	Horizontal	82	1.79	-	37.60	16.32	48.95			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6705MHz_TX

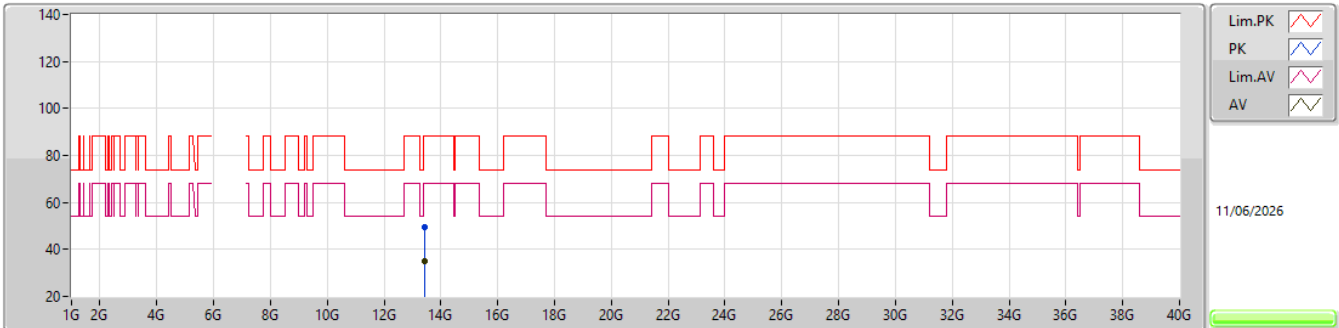


EUT_X_4TX
Setting 57
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.41082G	49.51	88.20	-38.69	38.52	3	Vertical	151	1.11	-	39.56	14.94	43.51			
RMS	13.40989G	35.22	68.20	-32.98	24.23	3	Vertical	151	1.11	-	39.56	14.94	43.51			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_4TX


6705MHz_TX

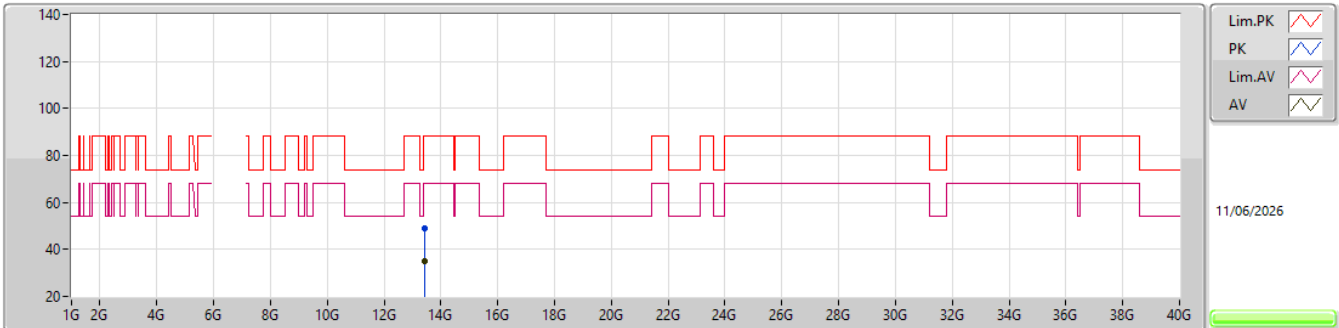EUT X_4TX
Setting 57
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.40952G	49.18	88.20	-39.02	38.19	3	Horizontal	254	1.81	-	39.56	14.94	43.51			
RMS	13.40989G	35.24	68.20	-32.96	24.25	3	Horizontal	254	1.81	-	39.56	14.94	43.51			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6705MHz_TX

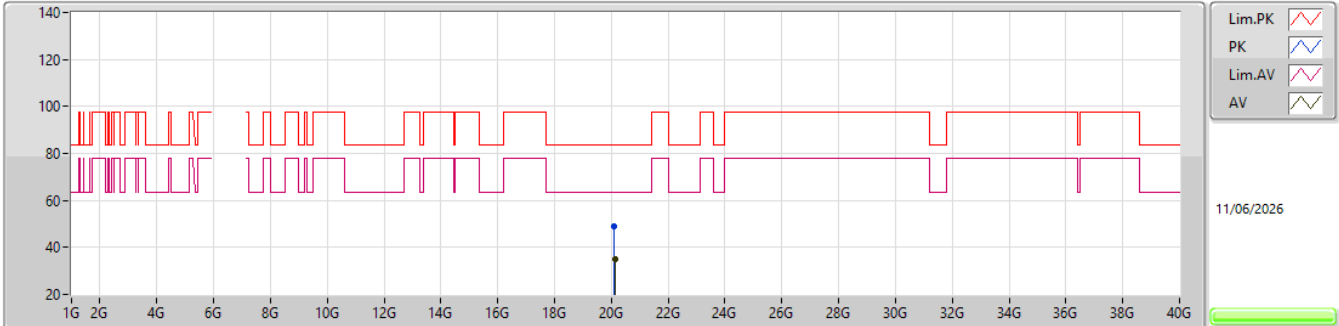


EUT X_4TX
Setting 57
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.11531G	48.94	83.54	-34.60	44.20	1	Vertical	18	1.89	-	37.30	16.42	48.98			
AV	20.11561G	35.21	63.54	-28.33	30.47	1	Vertical	18	1.89	-	37.30	16.42	48.98			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6705MHz_TX

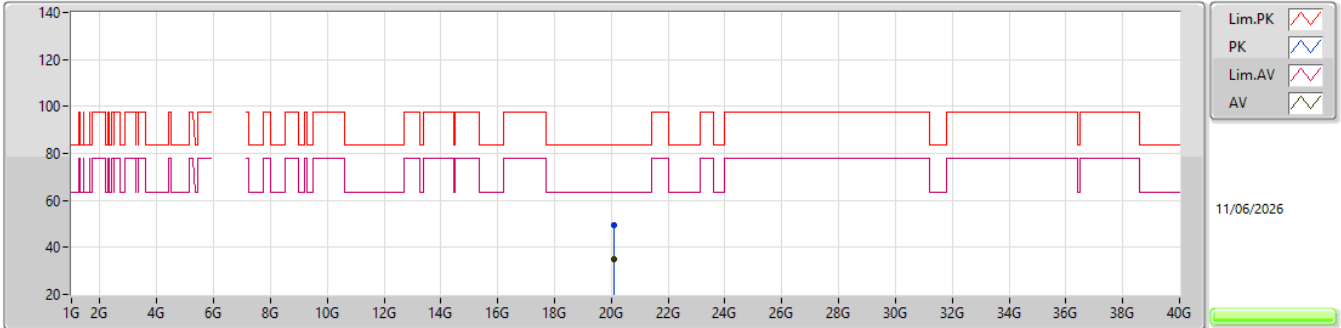


EUT X_4TX
Setting 57
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.11478G	49.64	83.54	-33.90	44.90	1	Horizontal	91	1.56	-	37.30	16.42	48.98			
AV	20.11513G	35.19	63.54	-28.35	30.45	1	Horizontal	91	1.56	-	37.30	16.42	48.98			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6785MHz_TX

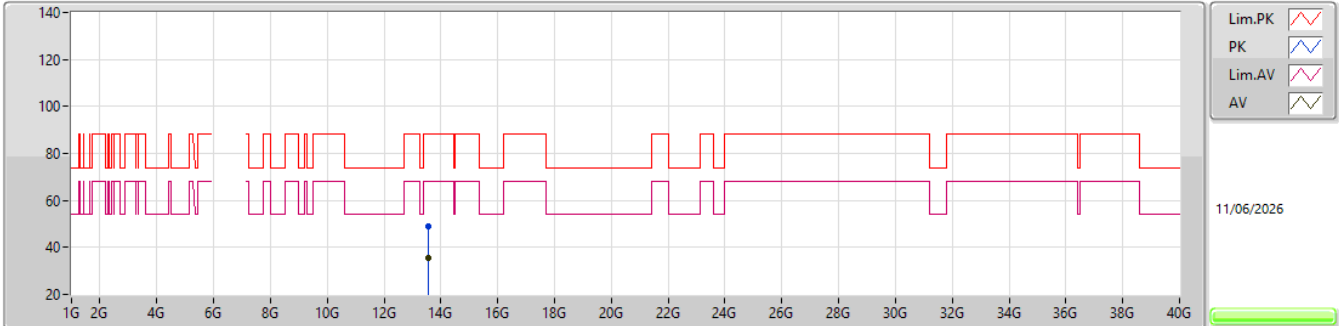


EUT_X_4TX
Setting 57
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.57012G	49.12	88.20	-39.08	37.46	3	Vertical	192	2.36	-	40.12	15.09	43.55			
RMS	13.57073G	35.49	68.20	-32.71	23.83	3	Vertical	192	2.36	-	40.12	15.09	43.55			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6785MHz_TX

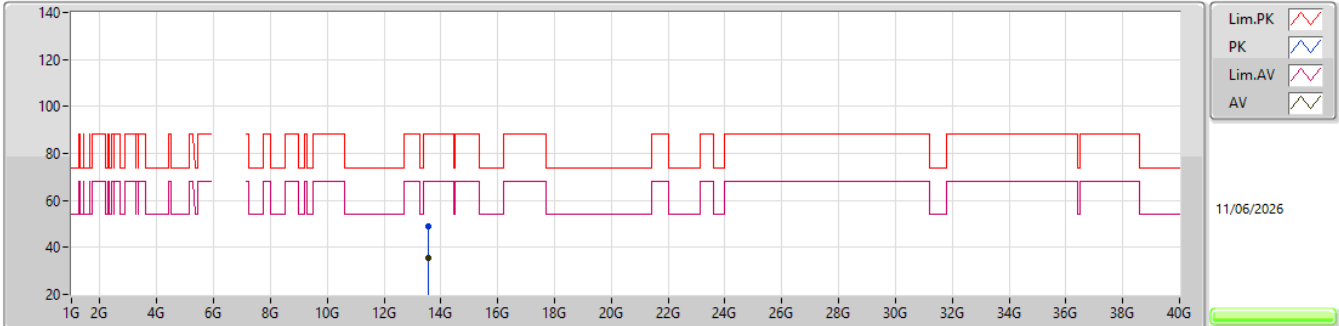


EUT X_4TX
Setting 57
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.5704G	49.21	88.20	-38.99	37.55	3	Horizontal	79	2.02	-	40.12	15.09	43.55			
RMS	13.57025G	35.50	68.20	-32.70	23.84	3	Horizontal	79	2.02	-	40.12	15.09	43.55			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6785MHz_TX

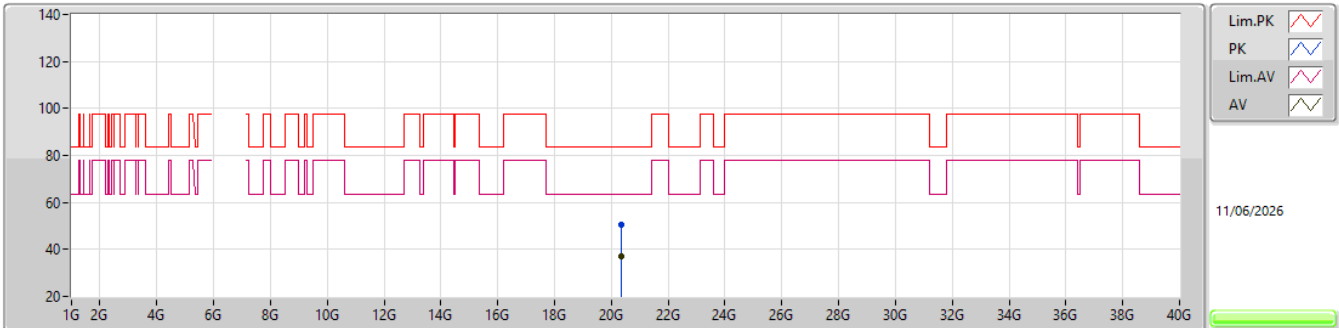


EUT X_4TX
Setting 57
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.35426G	50.77	83.54	-32.77	45.66	1	Vertical	339	2.12	-	37.50	16.54	48.93			
AV	20.35403G	36.85	63.54	-26.69	31.74	1	Vertical	339	2.12	-	37.50	16.54	48.93			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6785MHz_TX

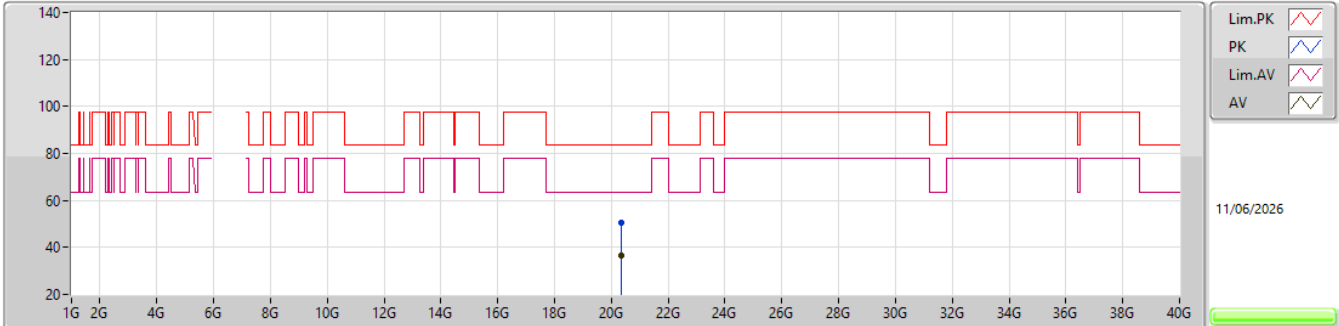


EUT X_4TX
Setting 57
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.35503G	50.28	83.54	-33.26	45.17	1	Horizontal	247	2.50	-	37.50	16.54	48.93			
AV	20.35407G	36.80	63.54	-26.74	31.69	1	Horizontal	247	2.50	-	37.50	16.54	48.93			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6865MHz_TX

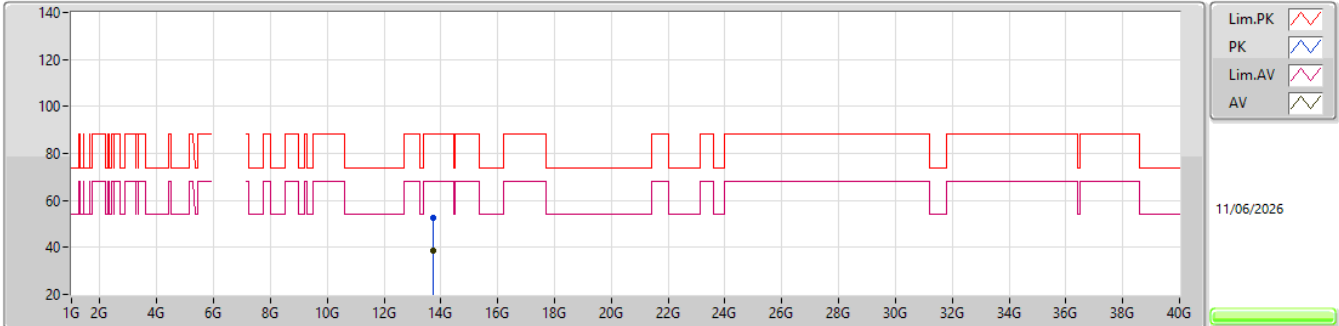


EUT_X_4TX
Setting 60
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.72968G	52.65	88.20	-35.55	40.92	3	Vertical	118	1.05	-	40.08	15.25	43.60			
RMS	13.73086G	38.55	68.20	-29.65	26.82	3	Vertical	118	1.05	-	40.08	15.25	43.60			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6865MHz_TX

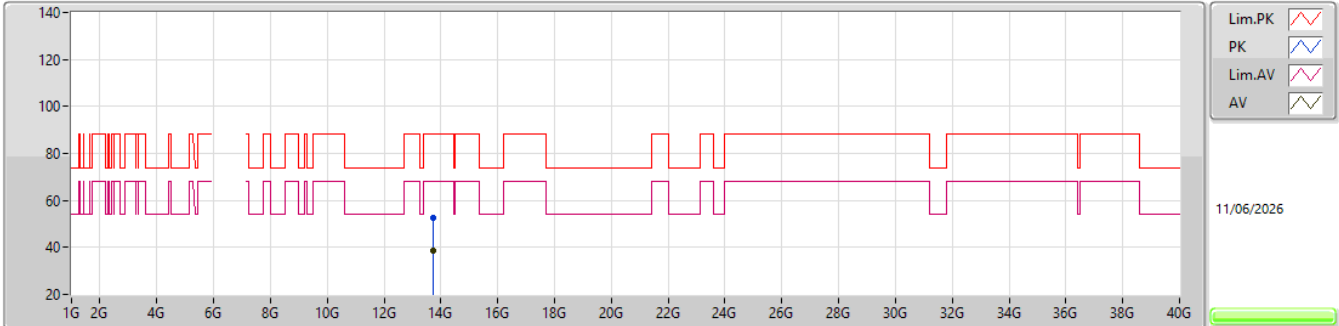


EUT X_4TX
Setting 60
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.73023G	52.59	88.20	-35.61	40.86	3	Horizontal	199	2.11	-	40.08	15.25	43.60			
RMS	13.73028G	38.57	68.20	-29.63	26.84	3	Horizontal	199	2.11	-	40.08	15.25	43.60			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6865MHz_TX

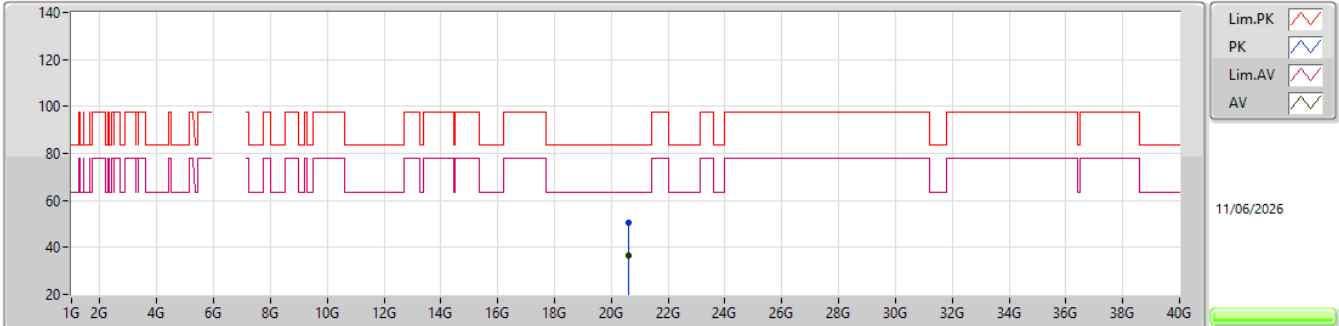


EUT X_4TX
Setting 60
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.59468G	50.58	83.54	-32.96	45.15	1	Vertical	146	2.34	-	37.68	16.65	48.90			
AV	20.59438G	36.50	63.54	-27.04	31.07	1	Vertical	146	2.34	-	37.68	16.65	48.90			

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6865MHz_TX

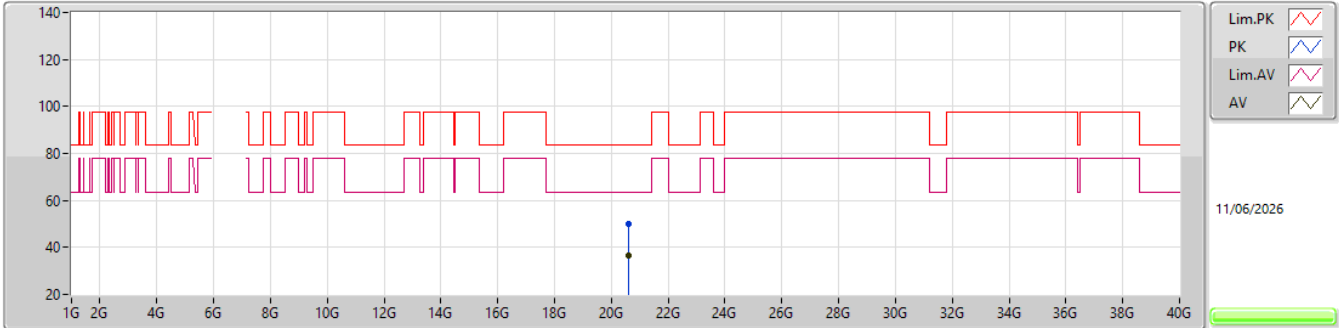


EUT_X_4TX
Setting 60
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.59451G	49.94	83.54	-33.60	44.51	1	Horizontal	68	1.68	-	37.68	16.65	48.90			
AV	20.59594G	36.45	63.54	-27.09	31.02	1	Horizontal	68	1.68	-	37.68	16.65	48.90			

6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6665MHz_TX

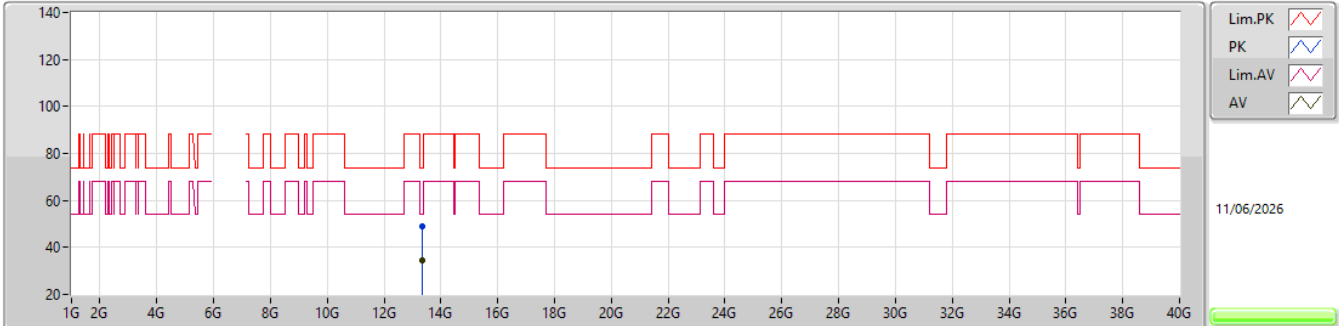


EUT_X_4TX
Setting 82
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.32907G	49.00	74.00	-25.00	38.25	3	Vertical	51	1.11	-	39.40	14.86	43.51			
AV	13.33087G	34.71	54.00	-19.29	23.96	3	Vertical	51	1.11	-	39.40	14.86	43.51			

6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6665MHz_TX

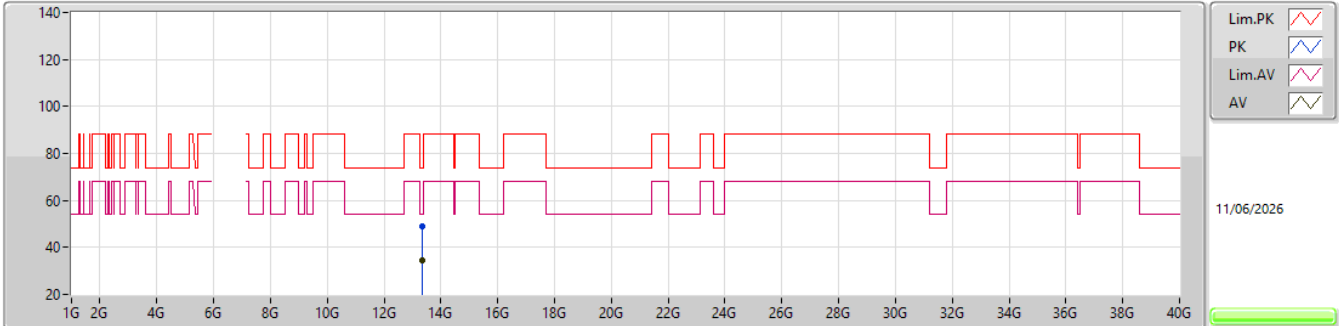


EUT_X_4TX
Setting 82
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.32902G	48.94	74.00	-25.06	38.19	3	Horizontal	275	1.83	-	39.40	14.86	43.51			
AV	13.33072G	34.71	54.00	-19.29	23.96	3	Horizontal	275	1.83	-	39.40	14.86	43.51			

6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6665MHz_TX

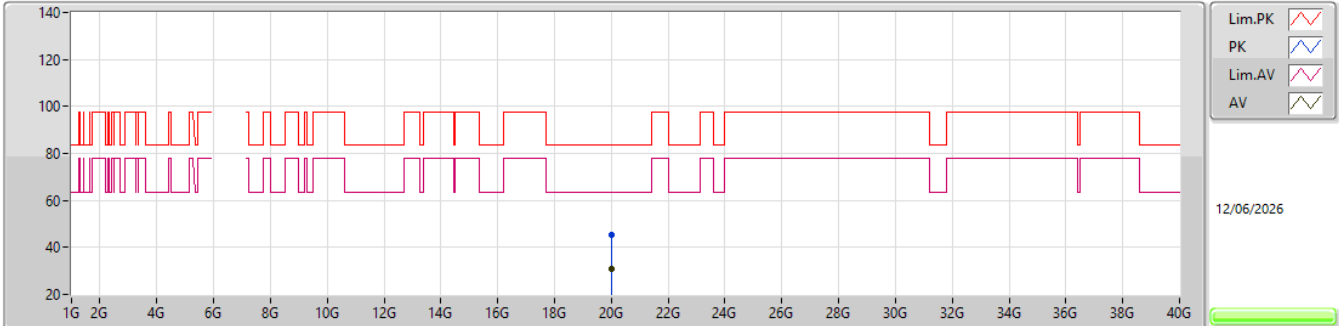


EUT X_4TX
Setting 82
04-C-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.99614G	45.39	83.54	-38.15	40.60	1	Vertical	74	1.46	-	37.42	16.37	49.00			
AV	19.99459G	31.07	63.54	-32.47	26.28	1	Vertical	74	1.46	-	37.42	16.37	49.00			

6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6665MHz_TX

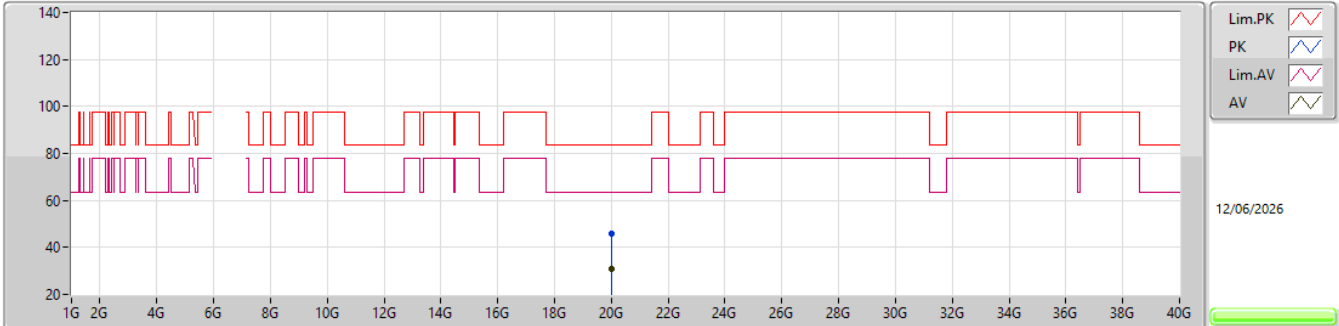


EUT X_4TX
Setting 82
04-C-G-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.99613G	45.73	83.54	-37.81	40.94	1	Horizontal	334	2.93	-	37.42	16.37	49.00			
AV	19.99501G	31.07	63.54	-32.47	26.28	1	Horizontal	334	2.93	-	37.42	16.37	49.00			

6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6825MHz_TX

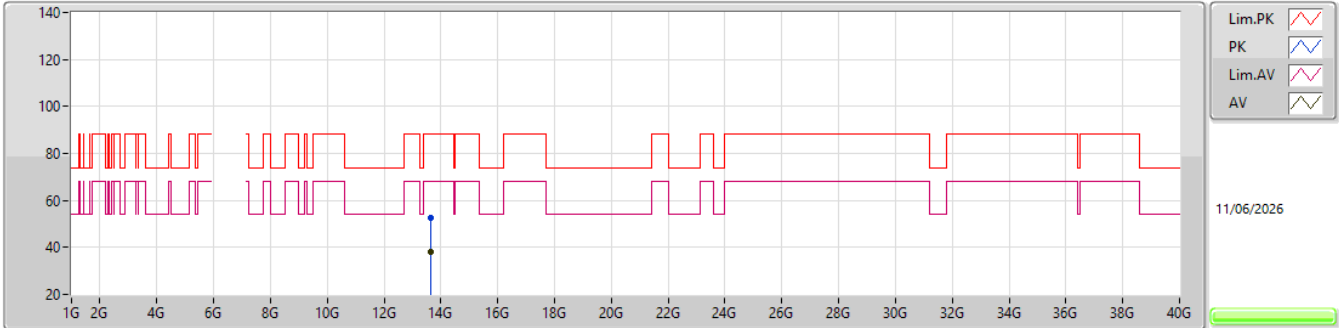


EUT_X_4TX
Setting 71
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.64993G	52.69	88.20	-35.51	40.99	3	Vertical	122	1.59	-	40.10	15.17	43.57			
RMS	13.64979G	38.30	68.20	-29.90	26.60	3	Vertical	122	1.59	-	40.10	15.17	43.57			

6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_4TX


6825MHz_TX

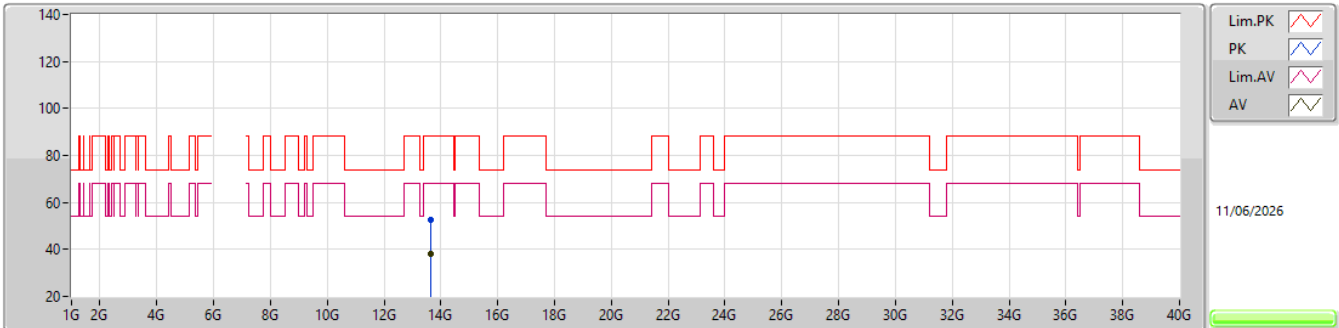EUT_X_4TX
Setting 71
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.65042G	52.37	88.20	-35.83	40.67	3	Horizontal	357	1.19	-	40.10	15.17	43.57			
RMS	13.65044G	38.29	68.20	-29.91	26.59	3	Horizontal	357	1.19	-	40.10	15.17	43.57			

6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6825MHz_TX

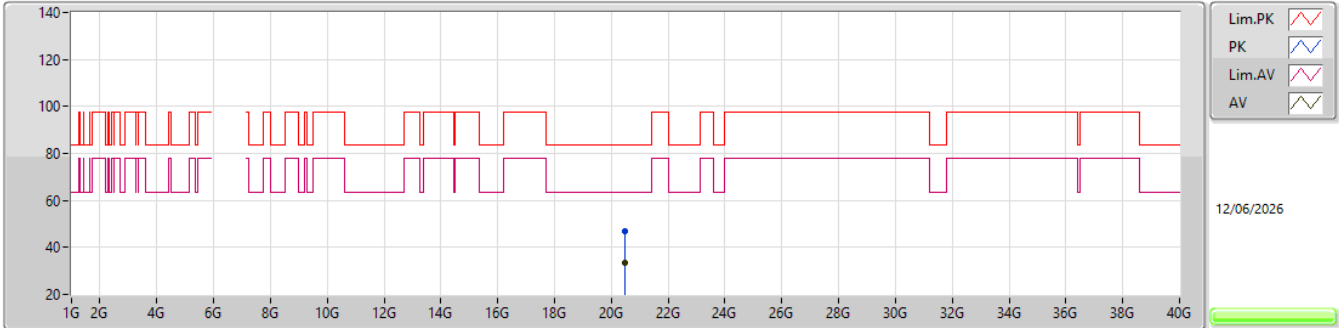


EUT_X_4TX
Setting 71
04-C-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.47495G	47.07	83.54	-36.47	41.89	1	Vertical	209	2.24	-	37.50	16.59	48.91			
AV	20.47631G	33.34	63.54	-30.20	28.14	1	Vertical	209	2.24	-	37.51	16.59	48.90			

6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6825MHz_TX

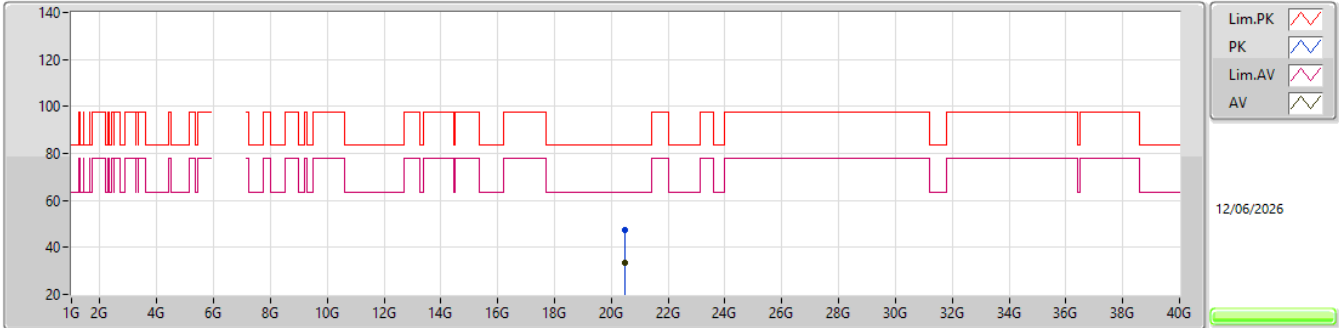


EUT_X_4TX
Setting 71
04-C-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.47401G	47.20	83.54	-36.34	42.02	1	Horizontal	292	1.88	-	37.50	16.59	48.91			
AV	20.47552G	33.28	63.54	-30.26	28.09	1	Horizontal	292	1.88	-	37.50	16.59	48.90			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_4TX


6995MHz_TX

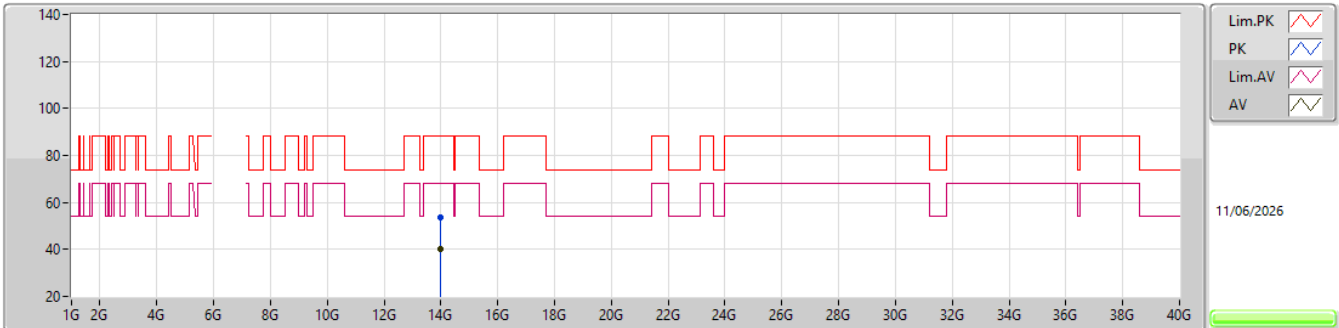EUT X_4TX
Setting 40
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.99042G	53.76	88.20	-34.44	41.22	3	Vertical	264	2.51	-	40.74	15.50	43.70			
RMS	13.98973G	40.03	68.20	-28.17	27.49	3	Vertical	264	2.51	-	40.74	15.50	43.70			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6995MHz_TX

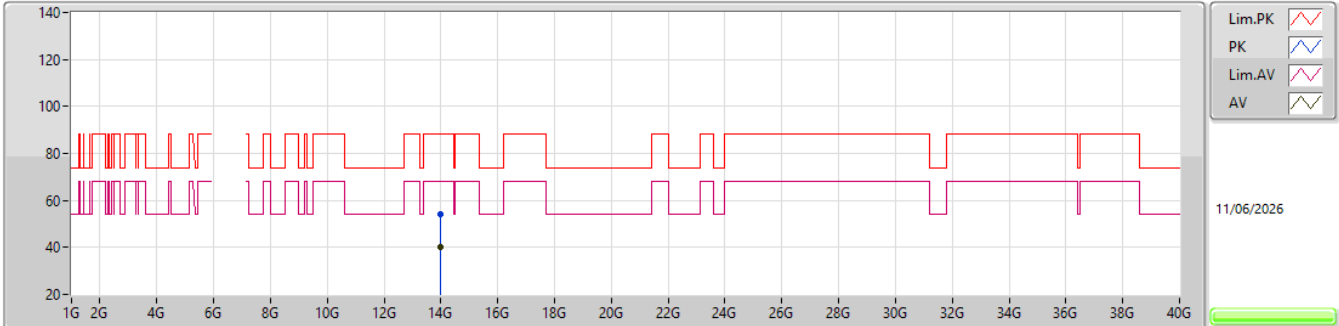


EUT X_4TX
Setting 40
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.99084G	54.23	88.20	-33.97	41.68	3	Horizontal	88	1.51	-	40.75	15.50	43.70			
RMS	13.98962G	40.02	68.20	-28.18	27.48	3	Horizontal	88	1.51	-	40.74	15.50	43.70			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6995MHz_TX

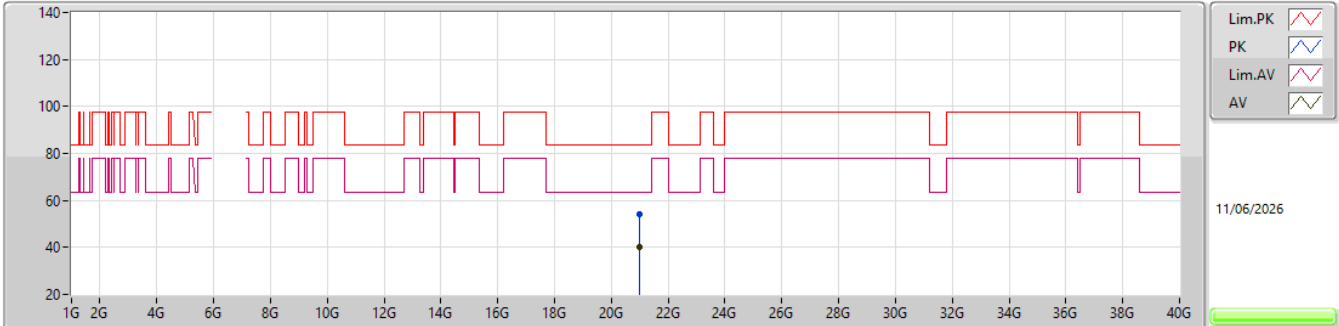


EUT X_4TX
Setting 40
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.9703G	53.98	83.54	-29.56	48.29	1	Vertical	207	2.98	-	37.76	16.83	48.90			
AV	20.99694G	40.11	63.54	-23.43	34.46	1	Vertical	207	2.98	-	37.71	16.84	48.90			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

6995MHz_TX

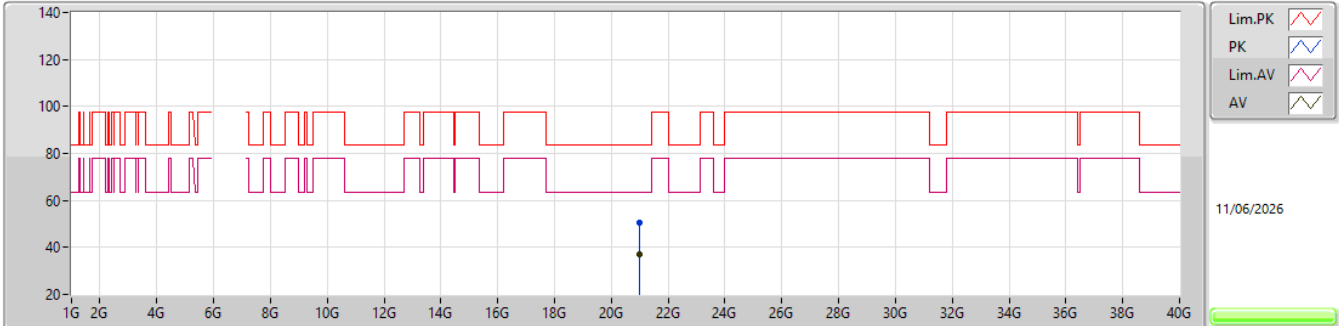


EUT X_4TX
Setting 40
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.98764G	50.35	83.54	-33.19	44.70	1	Horizontal	288	1.43	-	37.72	16.83	48.90			
AV	20.99292G	37.16	63.54	-26.38	31.51	1	Horizontal	288	1.43	-	37.71	16.84	48.90			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

7095MHz_TX

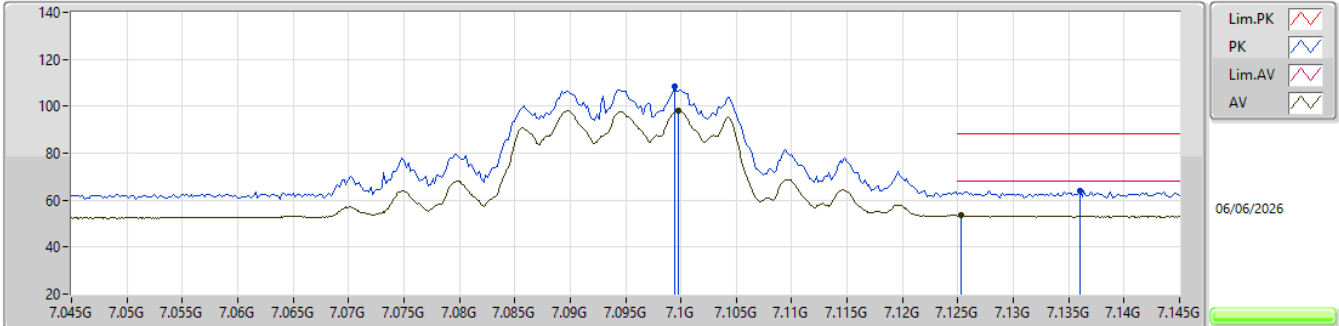


EUT X_4TX
Setting 43
06-E-G-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	7.0994G	108.34	Inf	-Inf	97.35	3	Vertical	289	1.80	-	36.00	8.43	33.44				
RMS	7.0998G	98.24	Inf	-Inf	87.25	3	Vertical	289	1.80	-	36.00	8.43	33.44				
PK	7.136G	63.84	88.20	-24.36	52.72	3	Vertical	289	1.80	-	36.14	8.44	33.46				
RMS	7.1253G	53.37	68.20	-14.83	42.29	3	Vertical	289	1.80	-	36.10	8.44	33.46				

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_4TX


7095MHz_TX

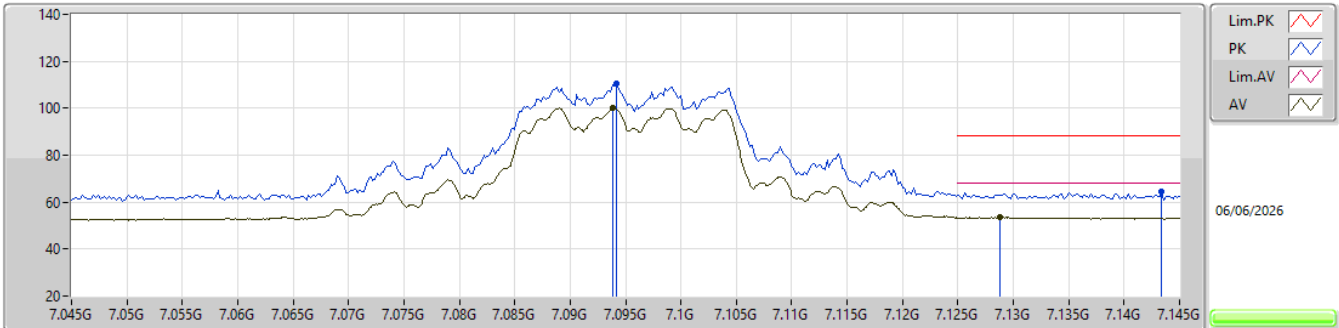EUT_X_4TX
Setting 43
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.0942G	110.27	Inf	-Inf	99.33	3	Horizontal	74	1.96	-	35.95	8.43	33.44			
RMS	7.0939G	100.00	Inf	-Inf	89.06	3	Horizontal	74	1.96	-	35.95	8.43	33.44			
PK	7.1434G	64.37	88.20	-23.83	53.22	3	Horizontal	74	1.96	-	36.17	8.44	33.46			
RMS	7.1288G	53.54	68.20	-14.66	42.44	3	Horizontal	74	1.96	-	36.12	8.44	33.46			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_4TX


7095MHz_TX

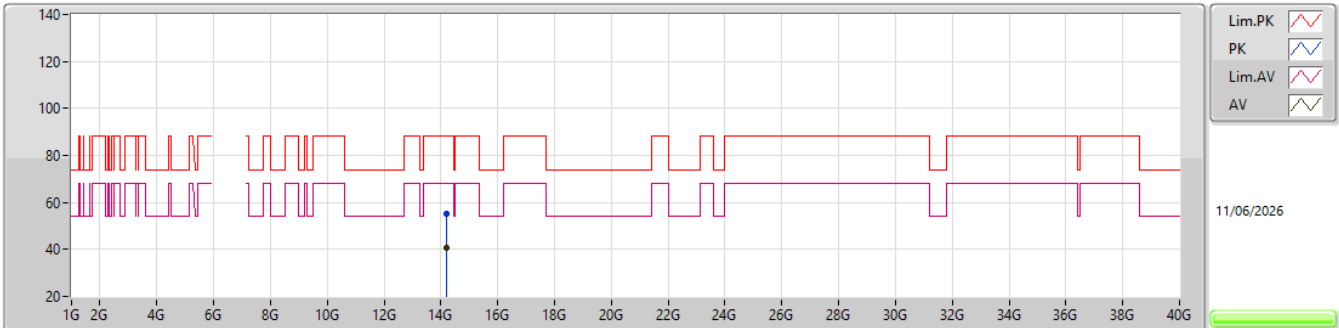EUT X_4TX
Setting 43
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.19004G	55.17	88.20	-33.03	42.07	3	Vertical	284	2.32	-	41.18	15.55	43.63			
RMS	14.1905G	40.75	68.20	-27.45	27.65	3	Vertical	284	2.32	-	41.18	15.55	43.63			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

7095MHz_TX

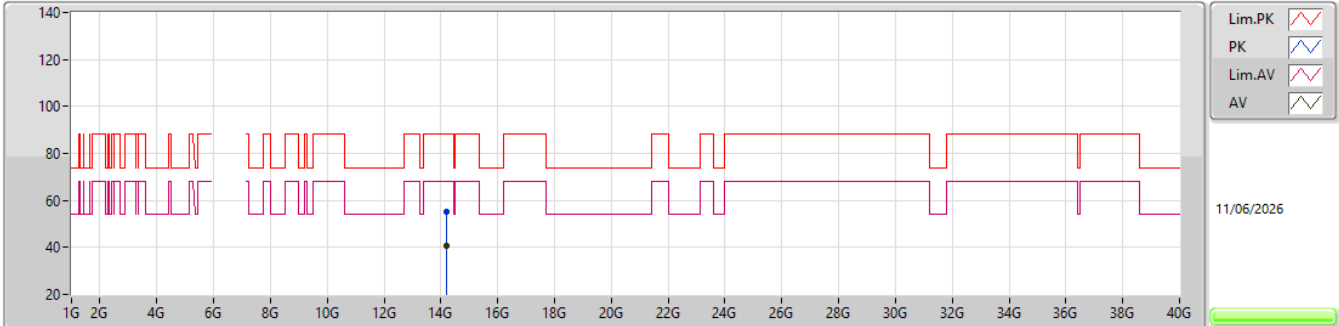


EUT X_4TX
Setting 43
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.19041G	55.21	88.20	-32.99	42.11	3	Horizontal	114	2.92	-	41.18	15.55	43.63			
RMS	14.18935G	40.81	68.20	-27.39	27.71	3	Horizontal	114	2.92	-	41.18	15.55	43.63			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

7095MHz_TX

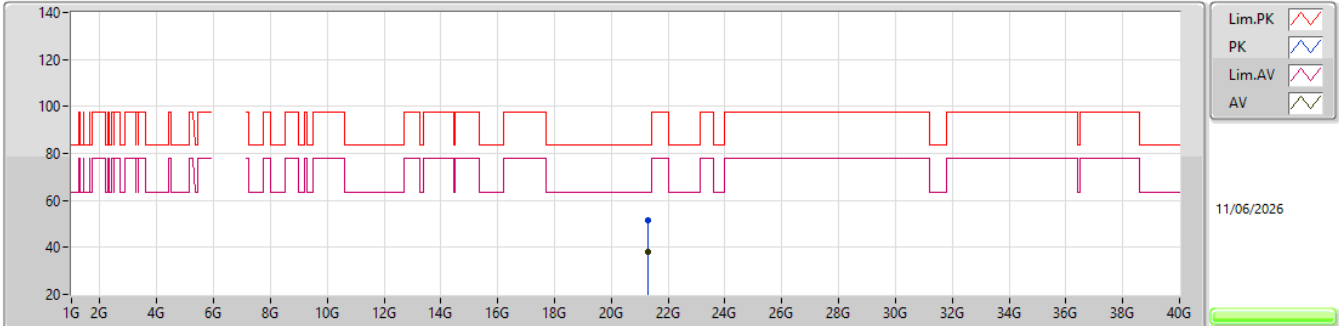


EUT X_4TX
Setting 43
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.27282G	51.38	83.54	-32.16	45.48	1	Vertical	313	2.50	-	37.76	16.93	48.79			
AV	21.27306G	38.28	63.54	-25.26	32.38	1	Vertical	313	2.50	-	37.76	16.93	48.79			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

7095MHz_TX

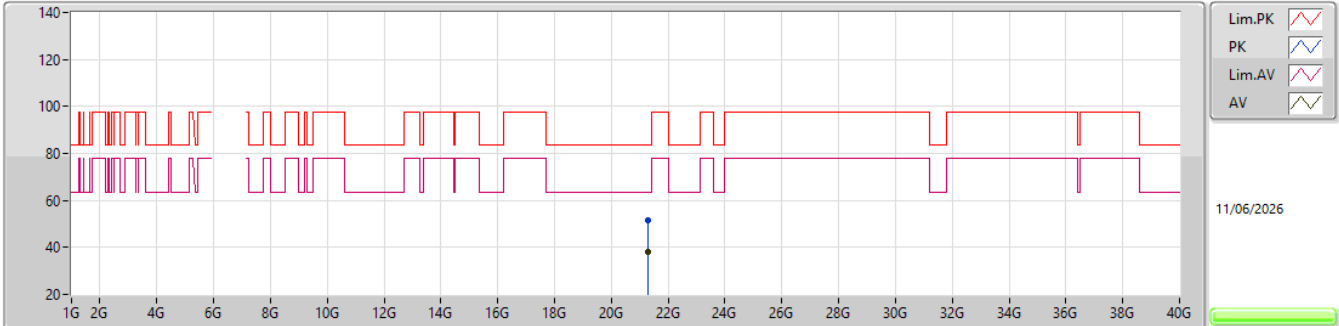


EUT X_4TX
Setting 43
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.28362G	51.65	83.54	-31.89	45.80	1	Horizontal	105	2.01	-	37.70	16.94	48.79			
AV	21.27378G	38.25	63.54	-25.29	32.35	1	Horizontal	105	2.01	-	37.76	16.93	48.79			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_4TX


7115MHz_TX

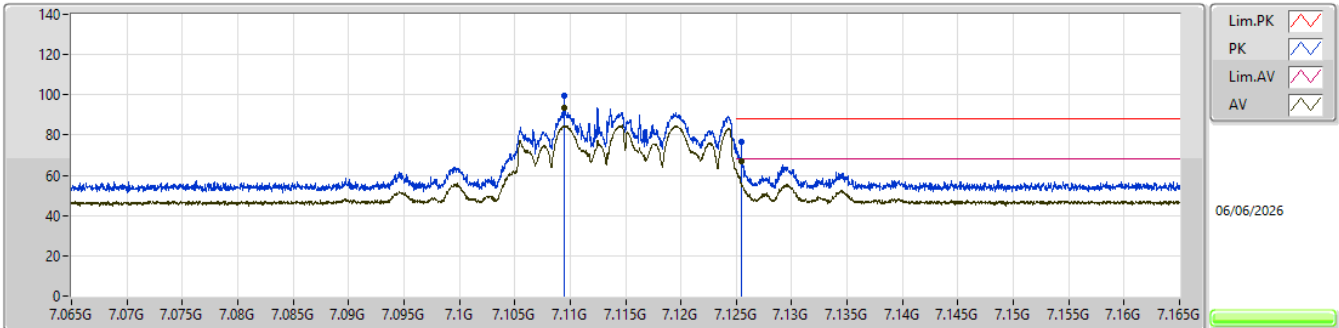EUT_X_4TX
Setting 17
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.1095G	99.30	Inf	-Inf	88.27	3	Vertical	287	1.82	BP 1MHz	36.04	8.44	33.45			
RMS	7.1095G	93.38	Inf	-Inf	82.35	3	Vertical	287	1.82	BP 1MHz	36.04	8.44	33.45			
PK	7.1255G	76.67	88.20	-11.53	65.59	3	Vertical	287	1.82	BP 1MHz	36.10	8.44	33.46			
RMS	7.1255G	66.91	68.20	-1.29	55.83	3	Vertical	287	1.82	BP 1MHz	36.10	8.44	33.46			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

7115MHz_TX

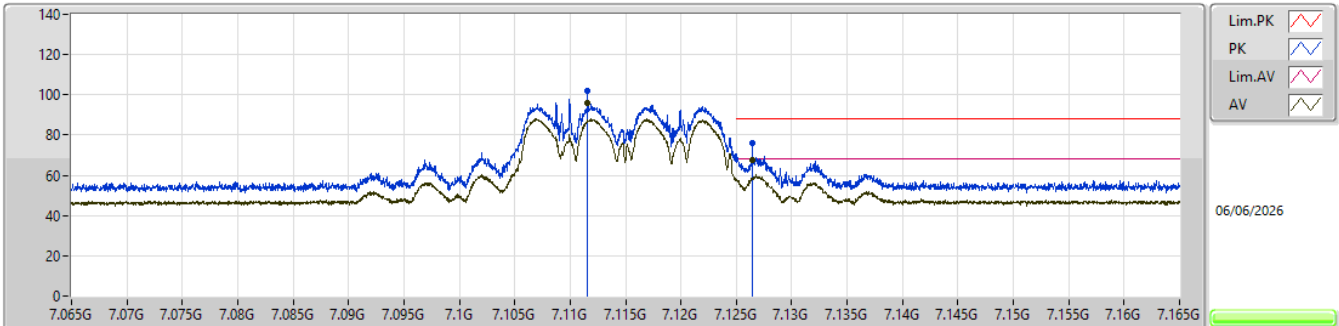


EUT_X_4TX
Setting 17
06-E-G-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.1115G	102.17	Inf	-Inf	91.13	3	Horizontal	50	2.97	BP 1MHz	36.05	8.44	33.45			
RMS	7.1115G	95.81	Inf	-Inf	84.77	3	Horizontal	50	2.97	BP 1MHz	36.05	8.44	33.45			
PK	7.1265G	76.18	88.20	-12.02	65.09	3	Horizontal	50	2.97	BP 1MHz	36.11	8.44	33.46			
RMS	7.1265G	67.84	68.20	-0.36	56.75	3	Horizontal	50	2.97	BP 1MHz	36.11	8.44	33.46			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

7115MHz_TX

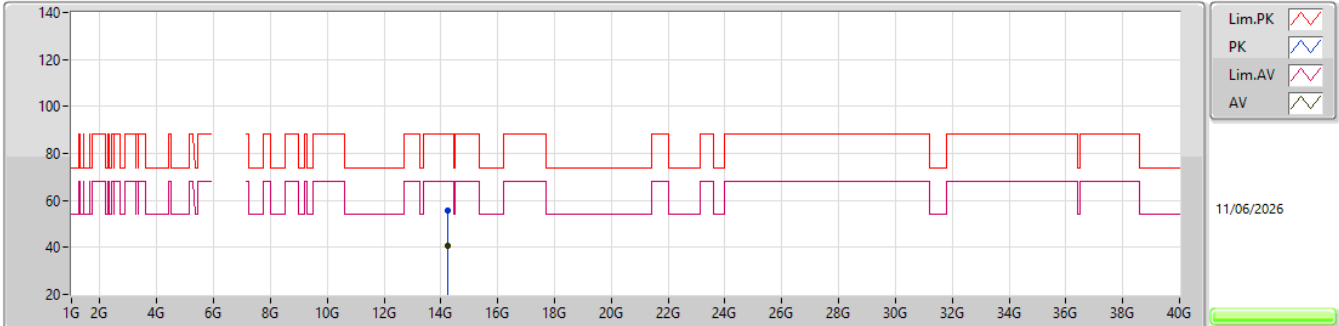


EUT X_4TX
Setting 17
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.2293G	55.75	88.20	-32.45	42.55	3	Vertical	28	2.02	-	41.26	15.56	43.62			
RMS	14.22914G	40.69	68.20	-27.51	27.49	3	Vertical	28	2.02	-	41.26	15.56	43.62			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

7115MHz_TX

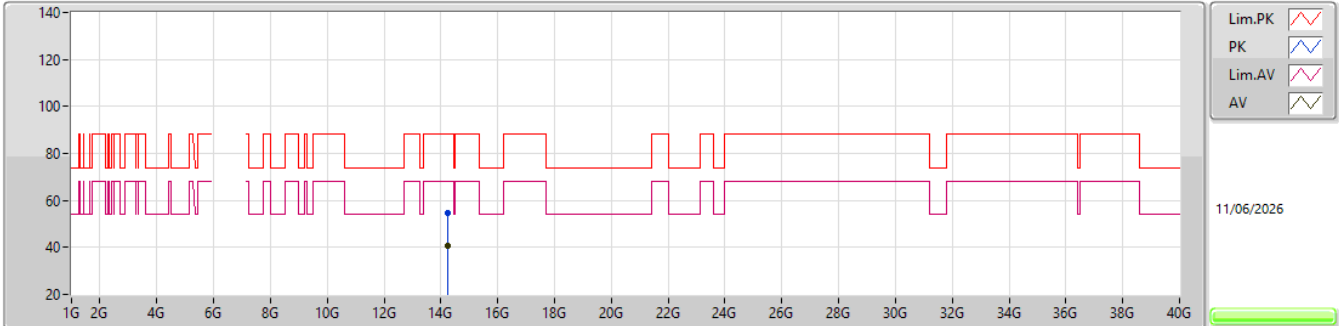


EUT X_4TX
Setting 17
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.22992G	54.57	88.20	-33.63	41.37	3	Horizontal	331	1.89	-	41.26	15.56	43.62			
RMS	14.22951G	40.69	68.20	-27.51	27.49	3	Horizontal	331	1.89	-	41.26	15.56	43.62			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

7115MHz_TX

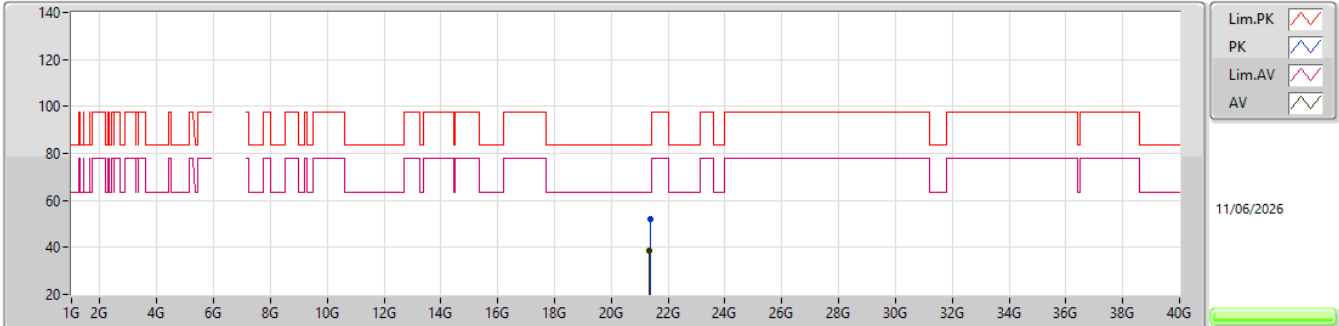


EUT X_4TX
Setting 17
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.35436G	52.09	83.54	-31.45	46.19	1	Vertical	138	2.16	-	37.70	16.96	48.76			
AV	21.33246G	38.75	63.54	-24.79	32.91	1	Vertical	138	2.16	-	37.66	16.95	48.77			

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_4TX

7115MHz_TX

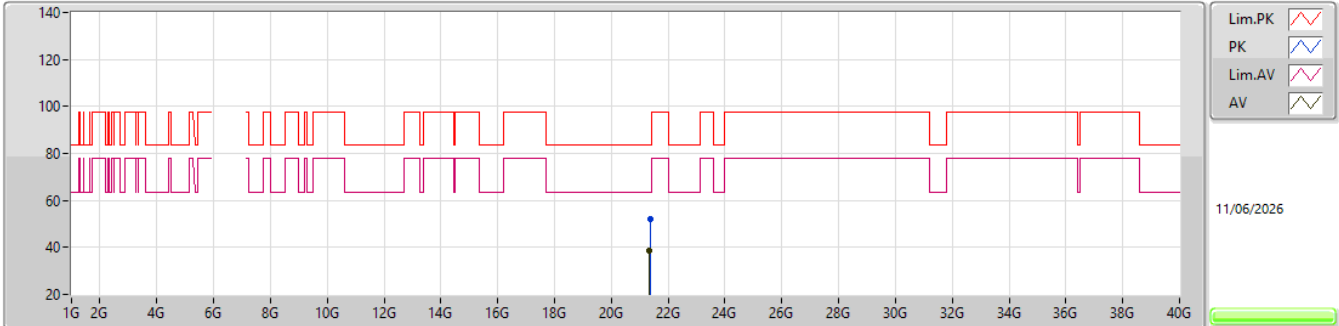


EUT X_4TX
Setting 17
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.35778G	52.21	83.54	-31.33	46.31	1	Horizontal	173	2.36	-	37.70	16.96	48.76			
AV	21.33978G	38.72	63.54	-24.82	32.84	1	Horizontal	173	2.36	-	37.68	16.96	48.76			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

7005MHz_TX

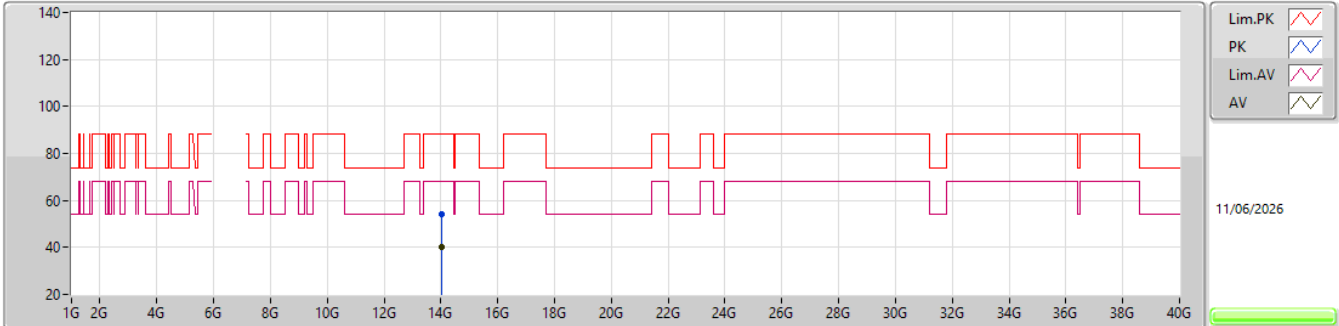


EUT X_4TX
Setting 54
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.01002G	54.01	88.20	-34.19	41.38	3	Vertical	255	2.35	-	40.82	15.51	43.70			
RMS	14.01011G	40.11	68.20	-28.09	27.48	3	Vertical	255	2.35	-	40.82	15.51	43.70			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

7005MHz_TX

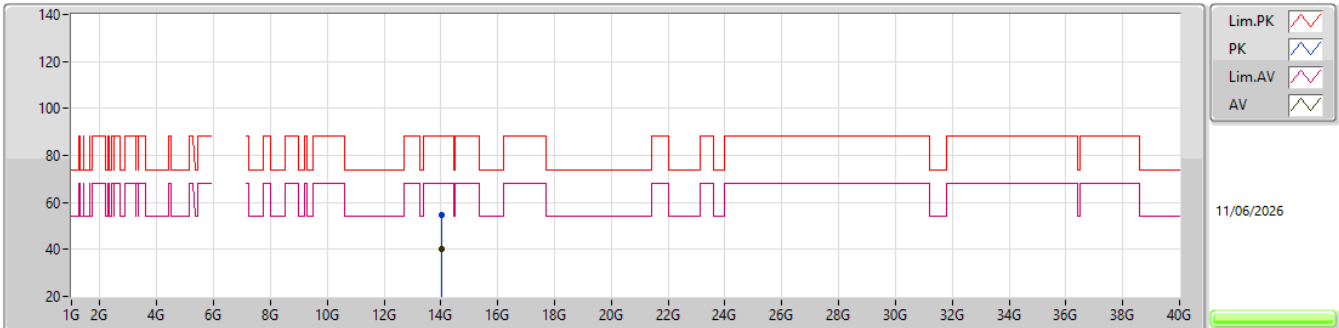


EUT X_4TX
Setting 54
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.00953G	54.48	88.20	-33.72	41.85	3	Horizontal	227	2.19	-	40.82	15.51	43.70			
RMS	14.00906G	40.09	68.20	-28.11	27.46	3	Horizontal	227	2.19	-	40.82	15.51	43.70			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

7005MHz_TX

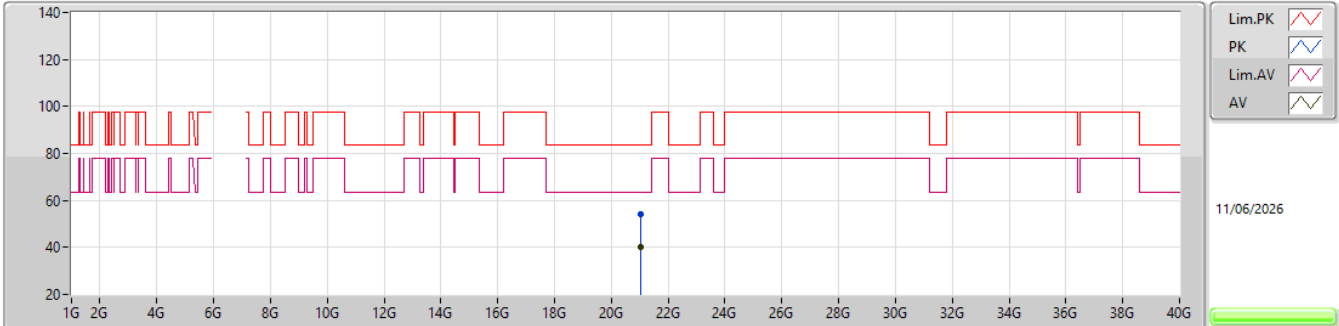


EUT X_4TX
Setting 54
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.01416G	53.99	83.54	-29.55	48.31	1	Vertical	295	1.60	-	37.73	16.84	48.89			
AV	21.01441G	40.05	63.54	-23.49	34.37	1	Vertical	295	1.60	-	37.73	16.84	48.89			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

7005MHz_TX

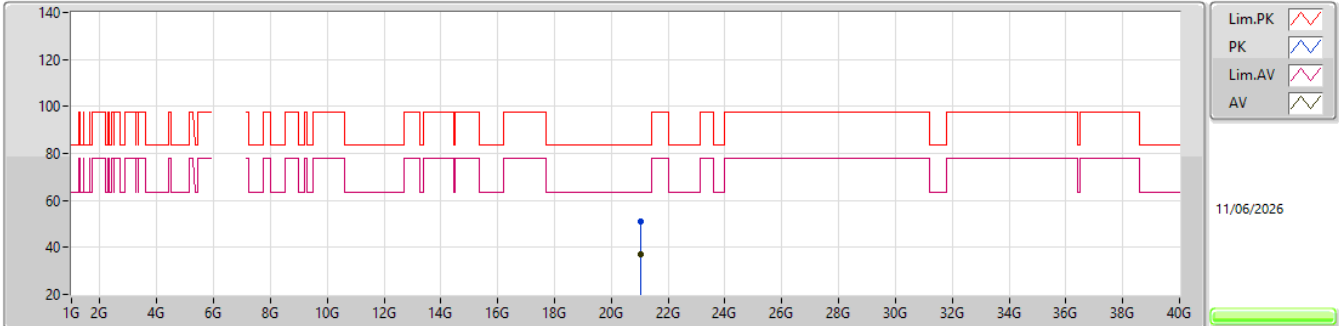


EUT X_4TX
Setting 54
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.01524G	51.12	83.54	-32.42	45.43	1	Horizontal	233	1.10	-	37.73	16.85	48.89			
AV	21.01552G	37.11	63.54	-26.43	31.42	1	Horizontal	233	1.10	-	37.73	16.85	48.89			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_4TX


7085MHz_TX

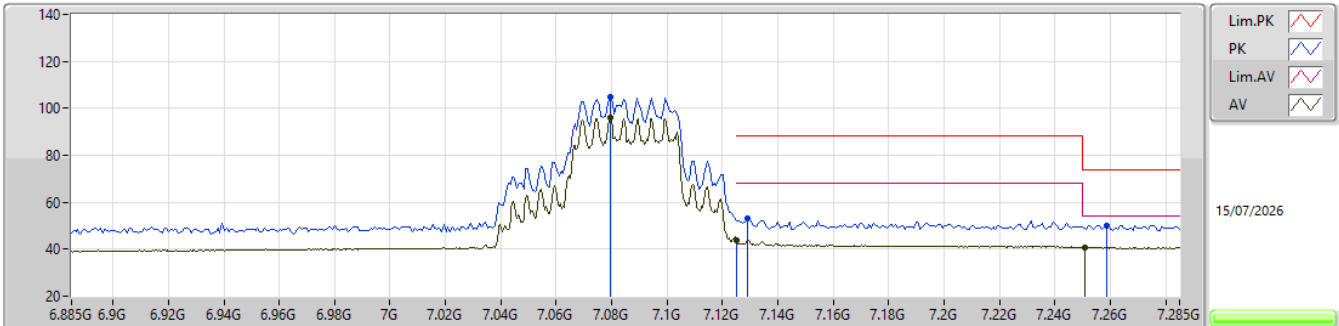EUT_X_4TX
Setting 49
06-X-J-11-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.0794G	104.98	Inf	-Inf	94.14	3	Vertical	287.1	2.10	-	35.84	8.43	33.43			
RMS	7.0794G	96.08	Inf	-Inf	85.24	3	Vertical	287.1	2.10	-	35.84	8.43	33.43			
PK	7.129G	53.28	88.20	-34.92	42.18	3	Vertical	287.1	2.10	-	36.12	8.44	33.46			
RMS	7.125G	43.89	68.20	-24.31	32.80	3	Vertical	287.1	2.10	-	36.10	8.44	33.45			
PK	7.2586G	50.19	74.00	-23.81	38.66	3	Vertical	287.1	2.10	-	36.43	8.61	33.51			
AV	7.251G	40.91	54.00	-13.09	29.43	3	Vertical	287.1	2.10	-	36.40	8.59	33.51			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

7085MHz_TX

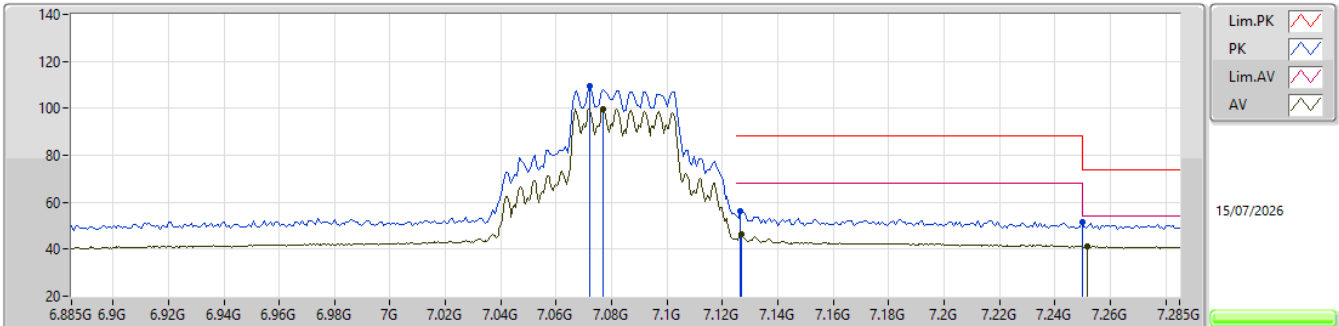


EUT_X_4TX
Setting 49
06-X-J-11-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.0722G	109.46	Inf	-Inf	98.68	3	Horizontal	53.1	2.97	-	35.78	8.43	33.43			
RMS	7.077G	99.84	Inf	-Inf	89.02	3	Horizontal	53.1	2.97	-	35.82	8.43	33.43			
PK	7.1266G	56.42	88.20	-31.78	45.33	3	Horizontal	53.1	2.97	-	36.11	8.44	33.46			
RMS	7.127G	46.55	68.20	-21.65	35.46	3	Horizontal	53.1	2.97	-	36.11	8.44	33.46			
PK	7.25G	51.40	74.00	-22.60	39.93	3	Horizontal	53.1	2.97	-	36.40	8.58	33.51			
AV	7.2518G	41.16	54.00	-12.84	29.67	3	Horizontal	53.1	2.97	-	36.41	8.59	33.51			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_4TX


7085MHz_TX

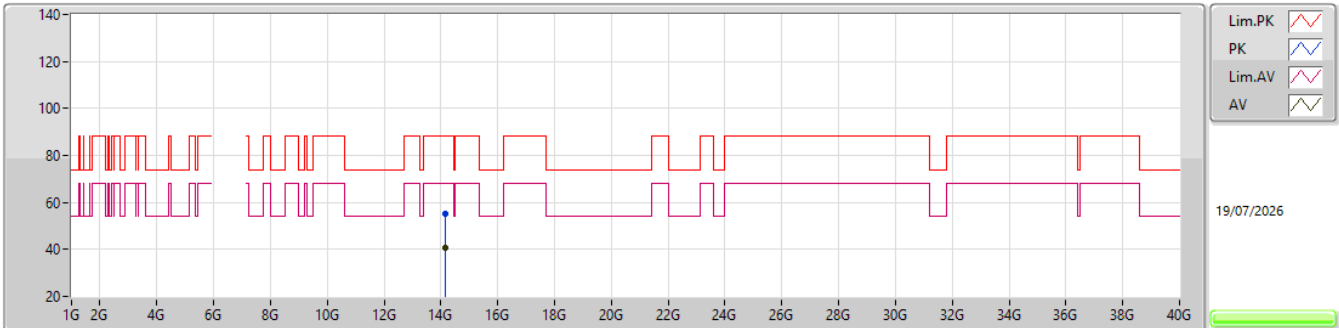EUT_X_4TX
Setting 49
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.17021G	55.36	88.20	-32.84	42.32	3	Vertical	208	1.13	-	41.14	15.54	43.64			
RMS	14.16948G	40.63	68.20	-27.57	27.59	3	Vertical	208	1.13	-	41.14	15.54	43.64			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

7085MHz_TX

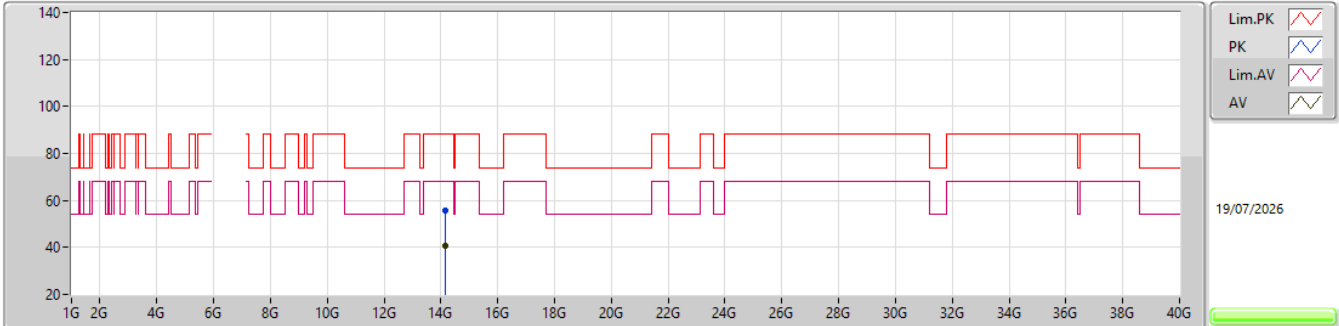


EUT_X_4TX
Setting 49
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.17067G	55.47	88.20	-32.73	42.43	3	Horizontal	172	1.06	-	41.14	15.54	43.64			
RMS	14.16932G	40.62	68.20	-27.58	27.58	3	Horizontal	172	1.06	-	41.14	15.54	43.64			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_4TX


7085MHz_TX

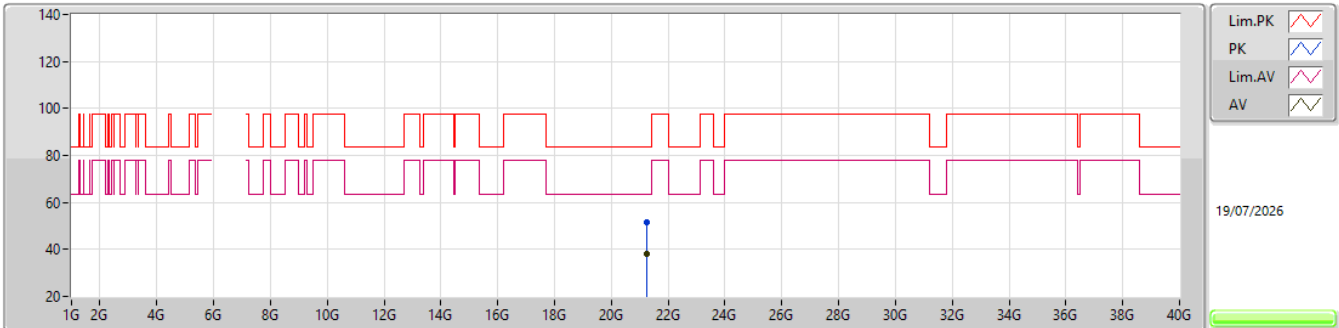EUT_X_4TX
Setting 49
04-C-K-3

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	21.25508G	51.59	83.54	-31.95	45.59	1	Vertical	194	1.50	-	37.87	16.93	48.80			
AV	21.25642G	38.24	63.54	-25.30	32.25	1	Vertical	194	1.50	-	37.86	16.93	48.80			

6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_4TX

7085MHz_TX

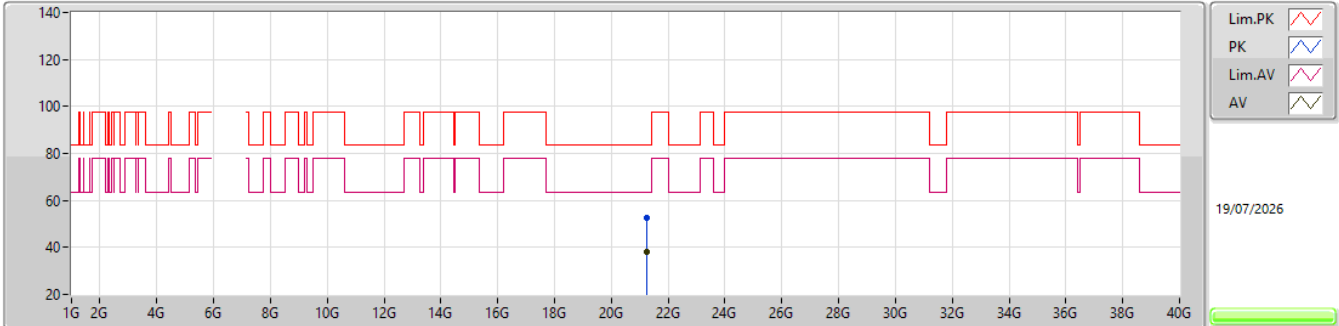


EUT_X_4TX
Setting 49
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.2554G	52.43	83.54	-31.11	46.43	1	Horizontal	163	1.32	-	37.87	16.93	48.80			
AV	21.25368G	38.27	63.54	-25.27	32.26	1	Horizontal	163	1.32	-	37.88	16.93	48.80			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6945MHz_TX

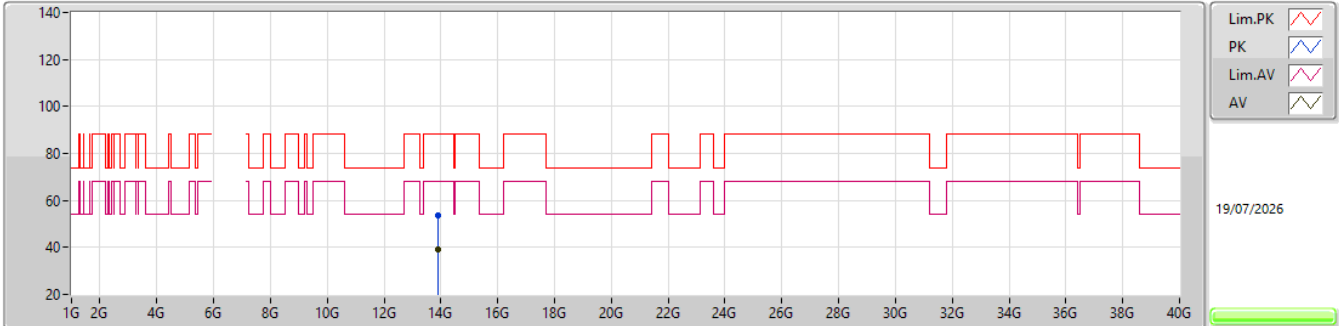


EUT_X_4TX
Setting 62
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.89086G	53.50	88.20	-34.70	41.41	3	Vertical	180	1.45	-	40.35	15.40	43.66			
RMS	13.89081G	39.24	68.20	-28.96	27.16	3	Vertical	180	1.45	-	40.34	15.40	43.66			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6945MHz_TX

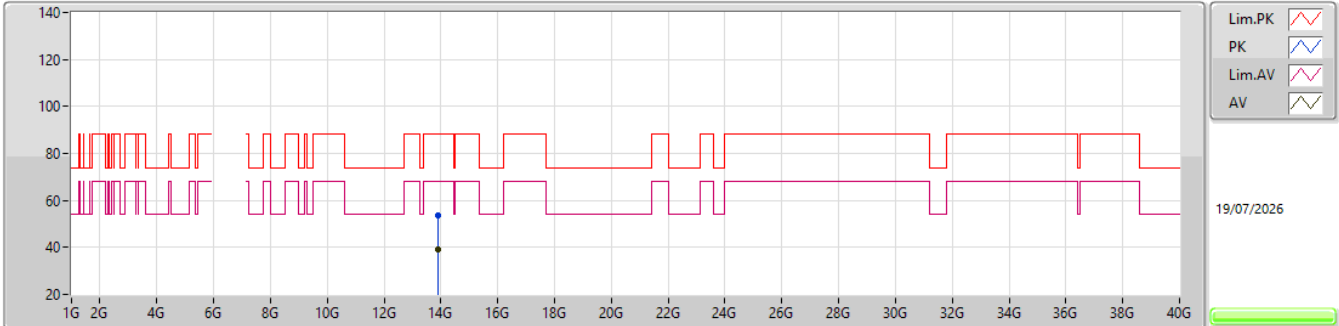


EUT_X_4TX
Setting 62
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.89038G	53.41	88.20	-34.79	41.33	3	Horizontal	219	1.75	-	40.34	15.40	43.66			
RMS	13.89085G	39.25	68.20	-28.95	27.16	3	Horizontal	219	1.75	-	40.35	15.40	43.66			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6945MHz_TX

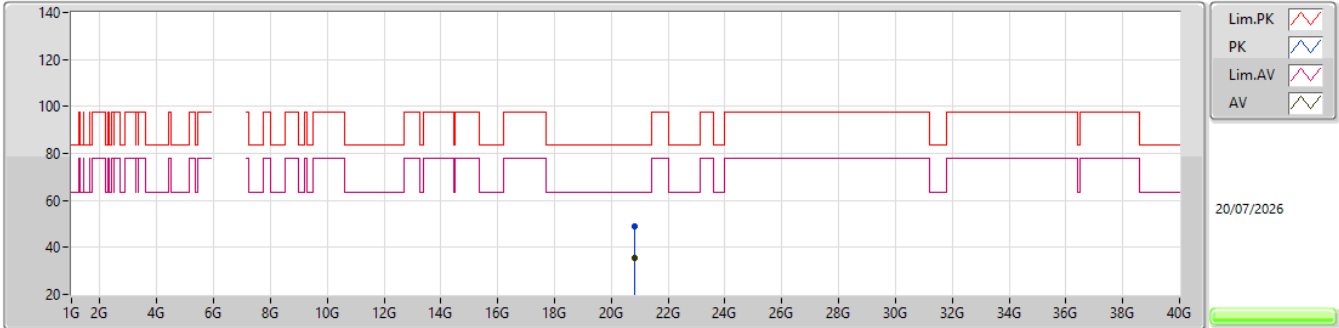


EUT_X_4TX
Setting 62
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.83371G	49.06	83.54	-34.48	43.60	1	Vertical	324	2.50	-	37.60	16.76	48.90			
AV	20.83579G	35.40	63.54	-28.14	29.94	1	Vertical	324	2.50	-	37.60	16.76	48.90			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

6945MHz_TX

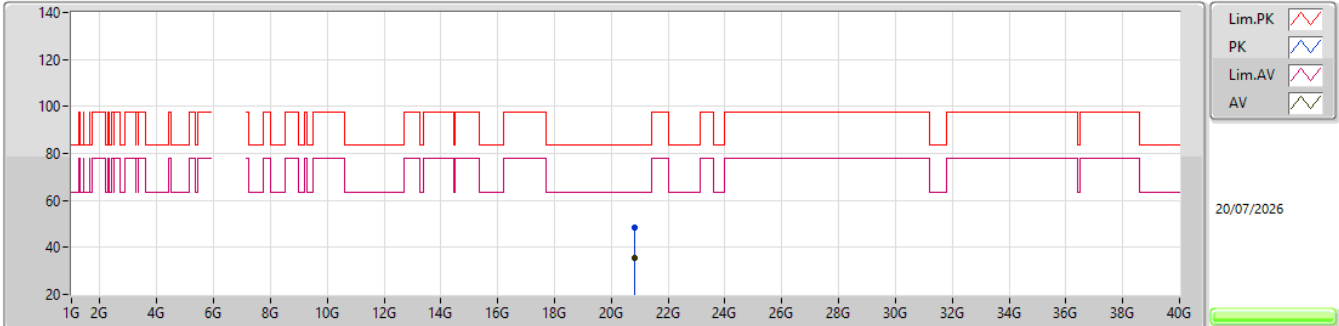


EUT_X_4TX
Setting 62
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.8353G	48.60	83.54	-34.94	43.14	1	Horizontal	348	2.41	-	37.60	16.76	48.90			
AV	20.83524G	35.32	63.54	-28.22	29.86	1	Horizontal	348	2.41	-	37.60	16.76	48.90			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_4TX


7025MHz_TX

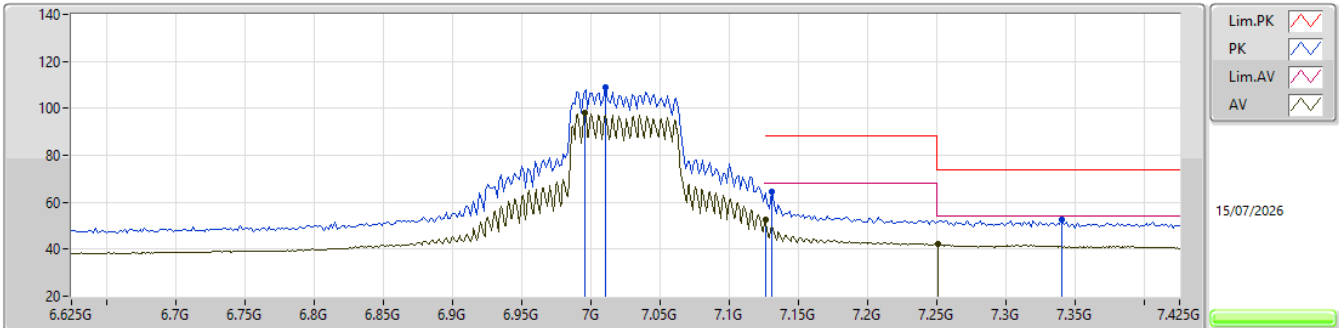EUT_X_4TX
Setting 66
06-X-J-11-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.0106G	108.98	Inf	-Inf	98.60	3	Vertical	4	2.81	-	35.36	8.42	33.40			
RMS	6.9954G	98.06	Inf	-Inf	87.76	3	Vertical	4	2.81	-	35.29	8.41	33.40			
PK	7.1306G	64.67	88.20	-23.53	53.57	3	Vertical	4	2.81	-	36.12	8.44	33.46			
RMS	7.1258G	52.48	68.20	-15.72	41.40	3	Vertical	4	2.81	-	36.10	8.44	33.46			
PK	7.3402G	52.79	74.00	-21.21	41.00	3	Vertical	4	2.81	-	36.52	8.82	33.55			
AV	7.2506G	42.03	54.00	-11.97	30.56	3	Vertical	4	2.81	-	36.40	8.58	33.51			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_4TX


7025MHz_TX

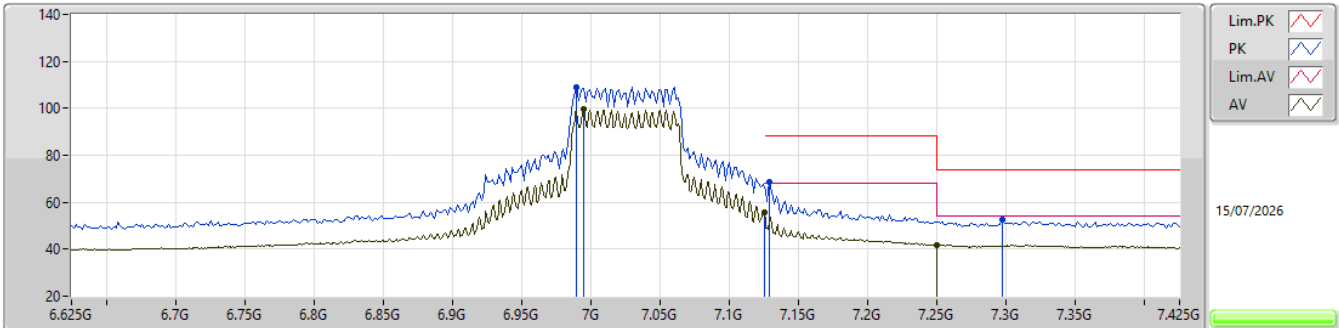EUT_X_4TX
Setting 66
06-X-J-11-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	6.9898G	108.81	Inf	-Inf	98.53	3	Horizontal	14	2.74	-	35.28	8.40	33.40			
RMS	6.9946G	99.52	Inf	-Inf	89.22	3	Horizontal	14	2.74	-	35.29	8.41	33.40			
PK	7.129G	68.38	88.20	-19.82	57.28	3	Horizontal	14	2.74	-	36.12	8.44	33.46			
RMS	7.125G	55.58	68.20	-12.62	44.49	3	Horizontal	14	2.74	-	36.10	8.44	33.45			
PK	7.297G	52.34	74.00	-21.66	40.57	3	Horizontal	14	2.74	-	36.59	8.71	33.53			
AV	7.25G	41.96	54.00	-12.04	30.49	3	Horizontal	14	2.74	-	36.40	8.58	33.51			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_4TX


7025MHz_TX

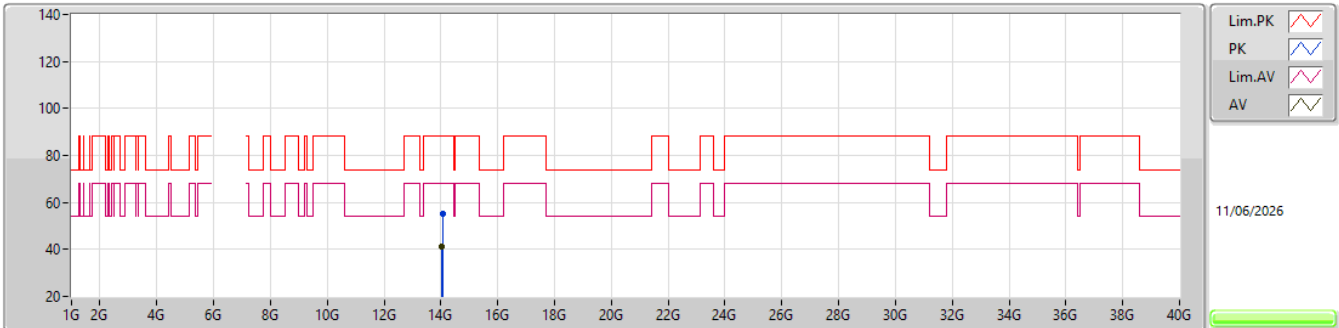EUT_X_4TX
Setting 66
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.04999G	54.94	88.20	-33.26	42.20	3	Vertical	94	1.67	-	40.90	15.52	43.68			
RMS	14.04981G	41.06	68.20	-27.14	28.32	3	Vertical	94	1.67	-	40.90	15.52	43.68			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

7025MHz_TX

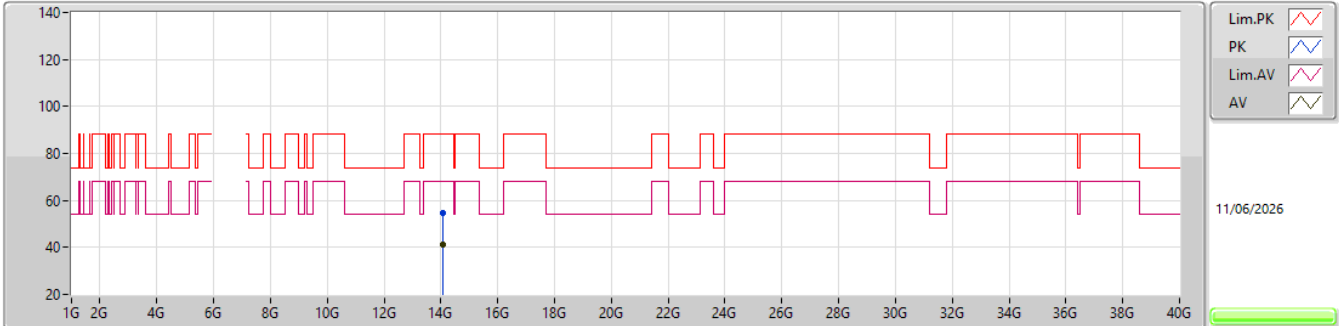


EUT_X_4TX
Setting 66
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.05088G	54.67	88.20	-33.53	41.92	3	Horizontal	320	2.72	-	40.91	15.52	43.68			
RMS	14.05027G	41.07	68.20	-27.13	28.33	3	Horizontal	320	2.72	-	40.90	15.52	43.68			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

7025MHz_TX

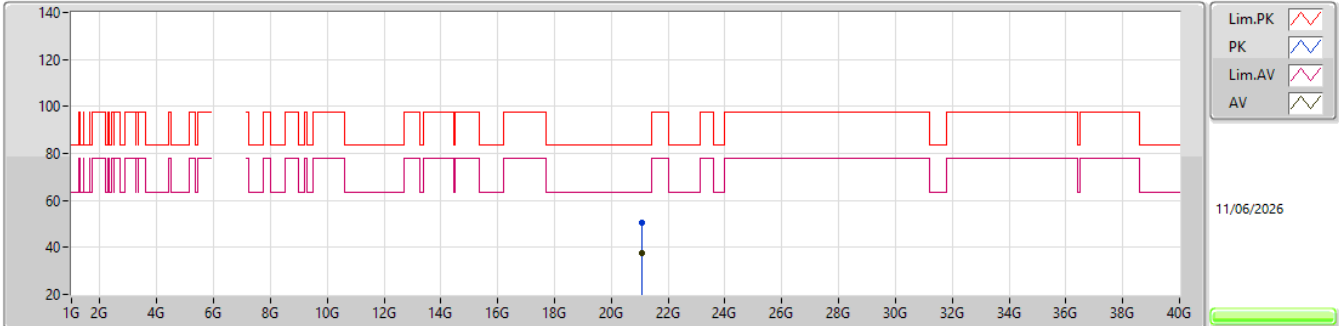


EUT_X_4TX
Setting 66
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.0755G	50.75	83.54	-32.79	45.00	1	Vertical	98	1.21	-	37.75	16.87	48.87			
AV	21.07432G	37.38	63.54	-26.16	31.63	1	Vertical	98	1.21	-	37.75	16.87	48.87			

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_4TX

7025MHz_TX

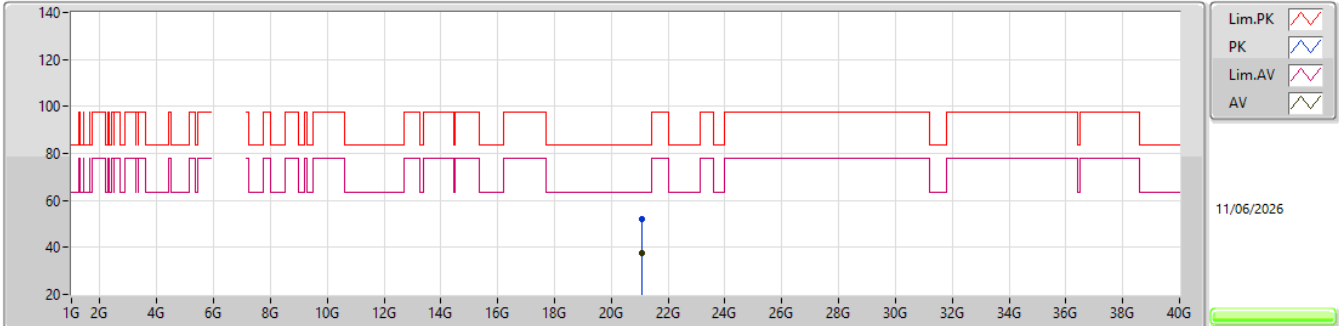


EUT_X_4TX
Setting 66
04-C-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.0755G	51.82	83.54	-31.72	46.07	1	Horizontal	285	2.44	-	37.75	16.87	48.87			
AV	21.0743G	37.43	63.54	-26.11	31.68	1	Horizontal	285	2.44	-	37.75	16.87	48.87			

6.875-7.125GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6985MHz_TX

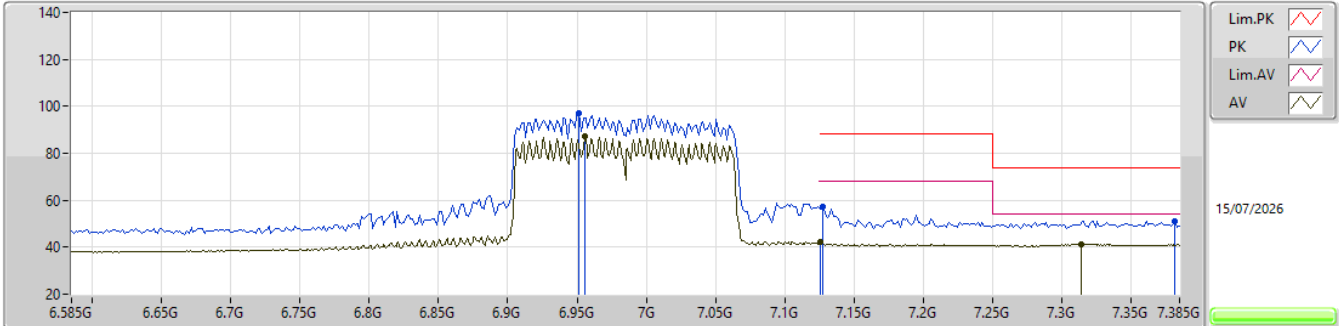


EUT_X_4TX
Setting 71
06-X-J-11-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	6.9514G	97.15	Inf	-Inf	87.01	3	Vertical	4.9	1.91	-	35.20	8.34	33.40			
RMS	6.9554G	87.05	Inf	-Inf	76.89	3	Vertical	4.9	1.91	-	35.21	8.35	33.40			
PK	7.1274G	57.12	88.20	-31.08	46.03	3	Vertical	4.9	1.91	-	36.11	8.44	33.46			
RMS	7.1258G	42.12	68.20	-26.08	31.04	3	Vertical	4.9	1.91	-	36.10	8.44	33.46			
PK	7.3818G	51.19	74.00	-22.81	39.39	3	Vertical	4.9	1.91	-	36.44	8.93	33.57			
AV	7.3138G	41.24	54.00	-12.76	29.46	3	Vertical	4.9	1.91	-	36.57	8.75	33.54			

6.875-7.125GHz_802.11ax HEW160_Nss1,(MCS0)_4TX


6985MHz_TX

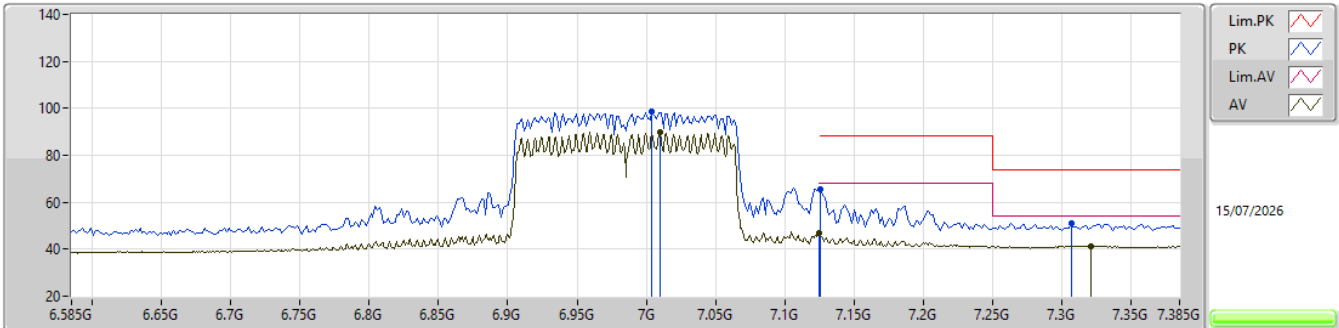EUT_X_4TX
Setting 71
06-X-J-11-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.0042G	98.55	Inf	-Inf	88.20	3	Horizontal	16	2.64	-	35.33	8.42	33.40			
RMS	7.0098G	89.68	Inf	-Inf	79.30	3	Horizontal	16	2.64	-	35.36	8.42	33.40			
PK	7.1258G	65.26	88.20	-22.94	54.18	3	Horizontal	16	2.64	-	36.10	8.44	33.46			
RMS	7.125G	46.73	68.20	-21.47	35.64	3	Horizontal	16	2.64	-	36.10	8.44	33.45			
PK	7.3066G	50.87	74.00	-23.13	39.08	3	Horizontal	16	2.64	-	36.59	8.73	33.53			
AV	7.321G	41.42	54.00	-12.58	29.63	3	Horizontal	16	2.64	-	36.56	8.77	33.54			

6.875-7.125GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6985MHz_TX

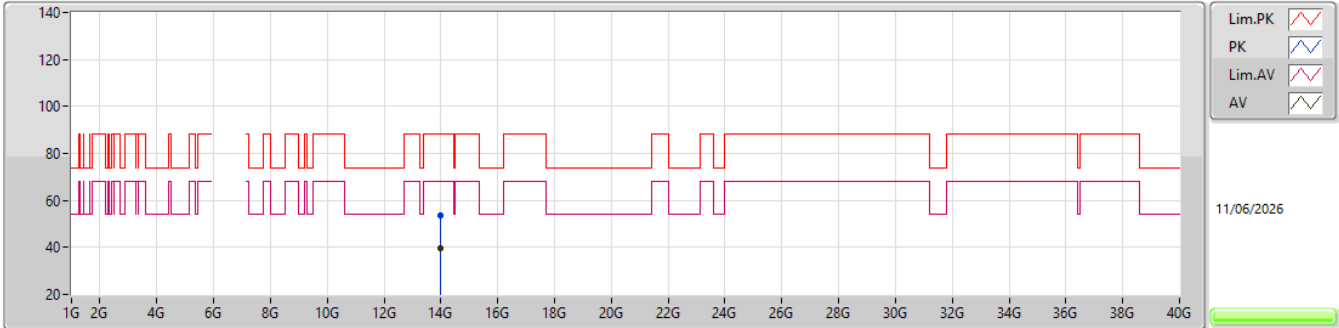


EUT_X_4TX
Setting 71
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.97001G	53.80	88.20	-34.40	41.39	3	Vertical	207	1.05	-	40.62	15.48	43.69			
RMS	13.96918G	39.91	68.20	-28.29	27.50	3	Vertical	207	1.05	-	40.62	15.48	43.69			

6.875-7.125GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6985MHz_TX

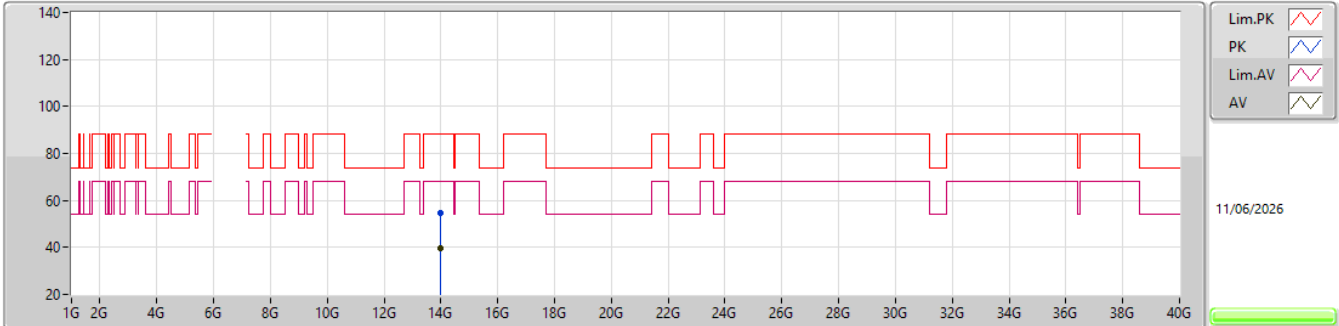


EUT_X_4TX
Setting 71
04-H-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.97025G	54.67	88.20	-33.53	42.26	3	Horizontal	67	1.82	-	40.62	15.48	43.69			
RMS	13.96958G	39.91	68.20	-28.29	27.50	3	Horizontal	67	1.82	-	40.62	15.48	43.69			

6.875-7.125GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6985MHz_TX

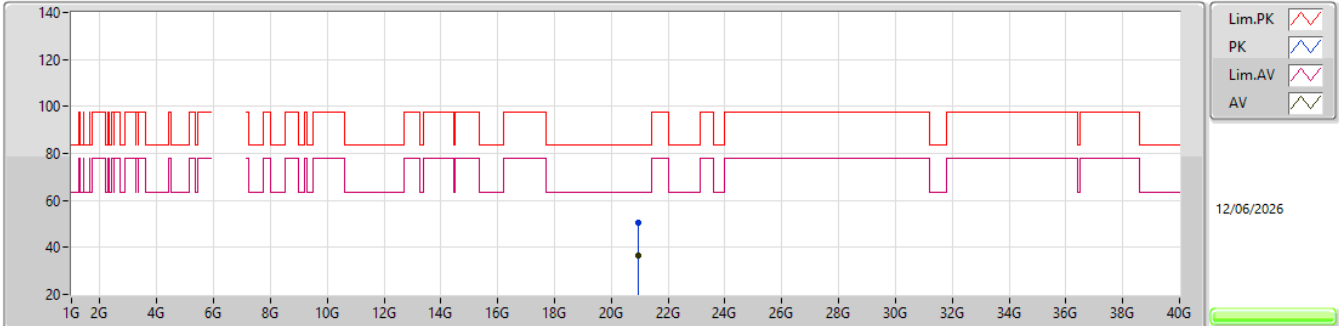


EUT_X_4TX
Setting 71
04-C-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.95564G	50.42	83.54	-33.12	44.71	1	Vertical	75	2.61	-	37.79	16.82	48.90			
AV	20.95486G	36.76	63.54	-26.78	31.05	1	Vertical	75	2.61	-	37.79	16.82	48.90			

6.875-7.125GHz_802.11ax HEW160_Nss1,(MCS0)_4TX

6985MHz_TX

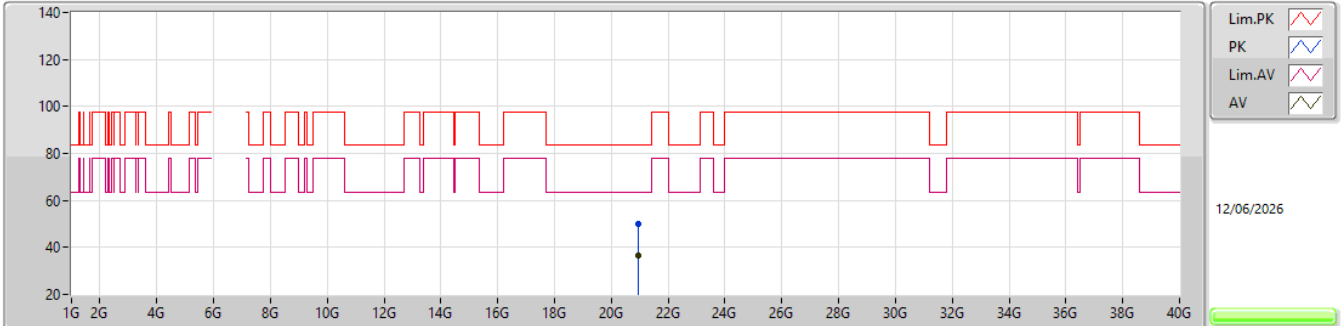

EUT_X_4TX
Setting 71
04-C-G-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	20.95556G	50.21	83.54	-33.33	44.50	1	Horizontal	127	2.81	-	37.79	16.82	48.90				
AV	20.95492G	36.63	63.54	-26.91	30.92	1	Horizontal	127	2.81	-	37.79	16.82	48.90				




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
6.875-7.125GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20-BF_Nss1,(MCS0)_4TX	Pass	RMS	7.1255G	68.10	68.20	-0.10	3	Horizontal	78	1.80	BP 1MHz

5.925-6.425GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

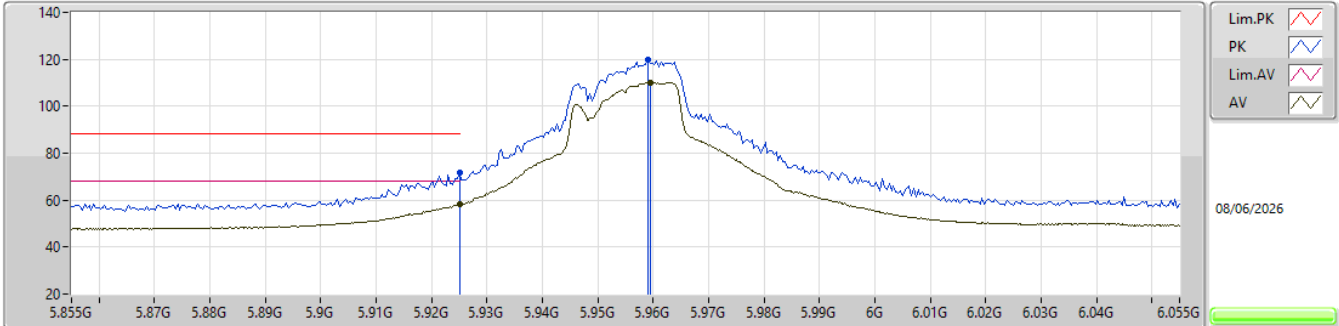


EUT X_4TX
Setting 106
06-E-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.925G	71.47	88.20	-16.73	65.40	3	Vertical	278	2.11	-	32.25	7.58	33.76			
RMS	5.925G	58.53	68.20	-9.67	52.46	3	Vertical	278	2.11	-	32.25	7.58	33.76			
PK	5.959G	119.75	Inf	-Inf	113.54	3	Vertical	278	2.11	-	32.32	7.64	33.75			
RMS	5.9596G	110.01	Inf	-Inf	103.80	3	Vertical	278	2.11	-	32.32	7.64	33.75			

5.925-6.425GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

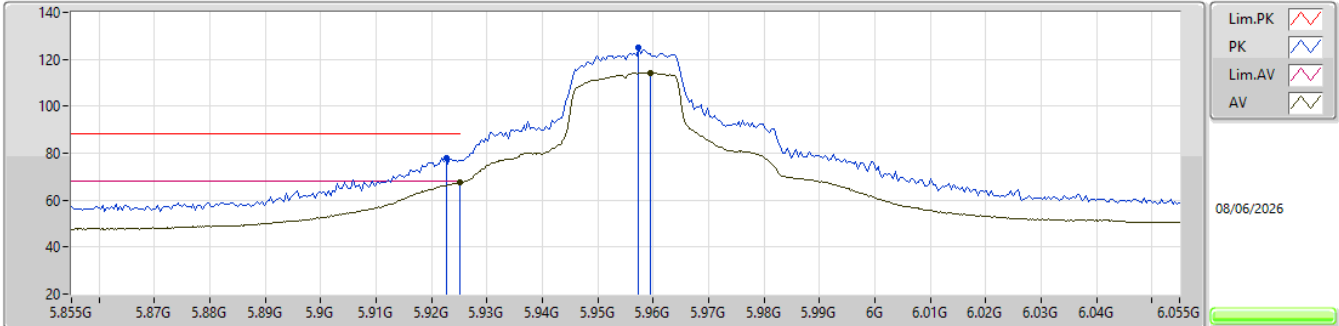


EUT_X_4TX
Setting 106
06-E-V-1-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.9226G	78.06	88.20	-10.14	72.00	3	Horizontal	325	2.29	-	32.25	7.57	33.76				
RMS	5.925G	67.75	68.20	-0.45	61.68	3	Horizontal	325	2.29	-	32.25	7.58	33.76				
PK	5.9574G	124.94	Inf	-Inf	118.76	3	Horizontal	325	2.29	-	32.31	7.63	33.76				
RMS	5.9596G	114.27	Inf	-Inf	108.06	3	Horizontal	325	2.29	-	32.32	7.64	33.75				

5.925-6.425GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

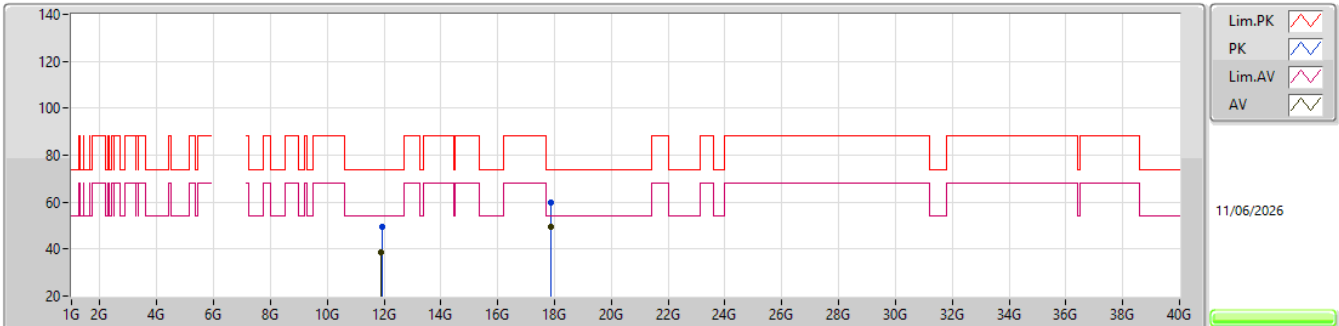


EUT_X_4TX
Setting 106
03-Y-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.91855G	49.47	74.00	-24.53	45.09	3	Vertical	166	2.95	-	39.44	10.88	45.94			
AV	11.90589G	38.44	54.00	-15.56	34.09	3	Vertical	166	2.95	-	39.41	10.88	45.94			
PK	17.86149G	60.07	74.00	-13.93	47.49	3	Vertical	138	1.80	-	44.65	13.21	45.28			
AV	17.86212G	49.57	54.00	-4.43	36.99	3	Vertical	138	1.80	-	44.65	13.21	45.28			

5.925-6.425GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX


5955MHz_TX

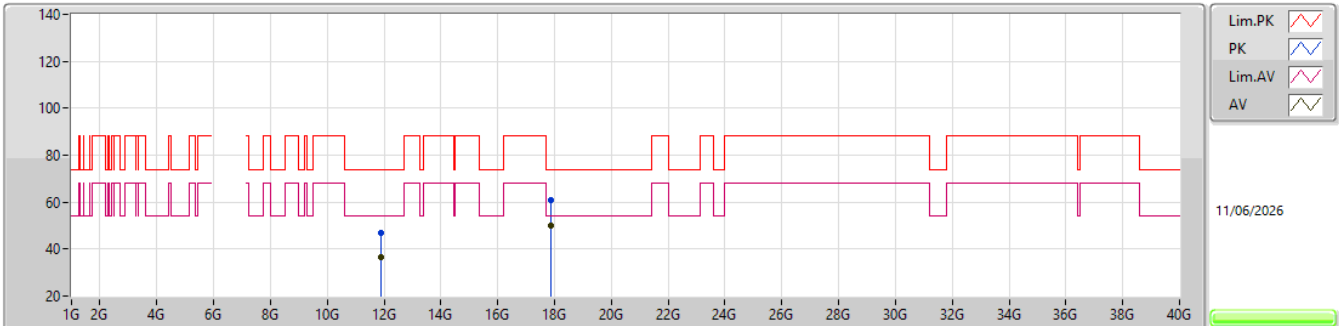EUT_X_4TX
Setting 106
03-Y-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.91399G	47.13	74.00	-26.87	42.76	3	Horizontal	245	1.15	-	39.43	10.88	45.94			
AV	11.91258G	36.53	54.00	-17.47	32.16	3	Horizontal	245	1.15	-	39.43	10.88	45.94			
PK	17.87052G	61.02	74.00	-12.98	48.41	3	Horizontal	5	2.18	-	44.68	13.21	45.28			
AV	17.86212G	49.82	54.00	-4.18	37.24	3	Horizontal	5	2.18	-	44.65	13.21	45.28			

5.925-6.425GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

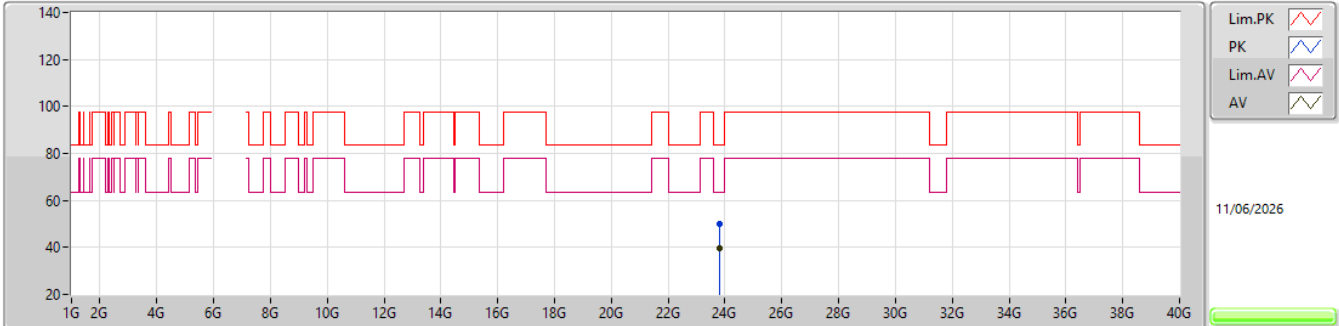


EUT_X_4TX
Setting 106
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.81526G	49.86	74.00	-24.14	39.46	1	Vertical	207	1.50	-	38.74	18.76	47.10			
AV	23.81448G	39.44	63.54	-24.10	29.04	1	Vertical	207	1.50	-	38.74	18.76	47.10			

5.925-6.425GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

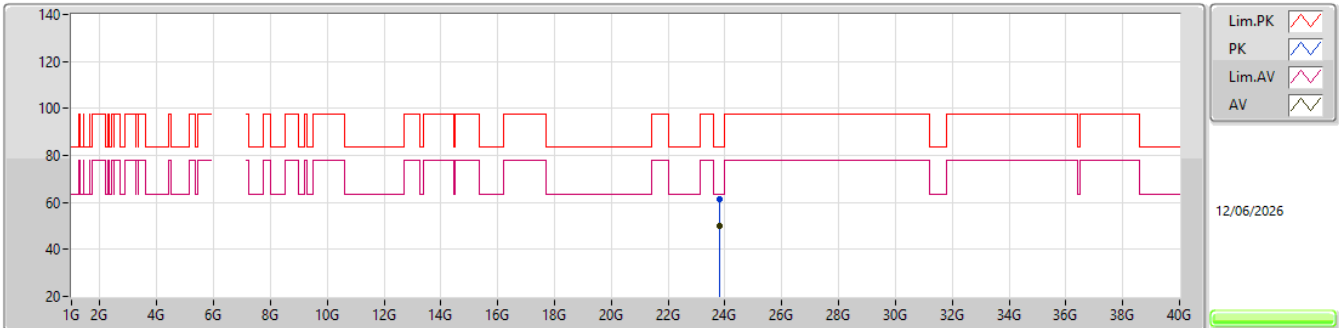


EUT_X_4TX
Setting 106
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.808G	61.29	83.54	-22.25	50.86	1	Horizontal	127	1.84	-	38.77	18.76	47.10			
AV	23.8034G	50.09	63.54	-13.45	39.65	1	Horizontal	127	1.84	-	38.79	18.76	47.11			

5.925-6.425GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

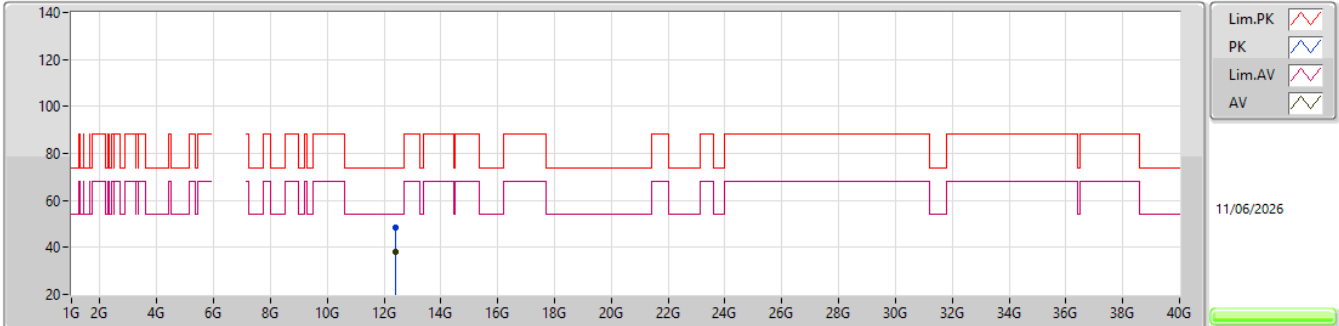


EUT_X_4TX
Setting 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.39992G	48.70	74.00	-25.30	44.33	3	Vertical	170	2.52	-	38.90	11.03	45.56			
AV	12.39612G	38.05	54.00	-15.95	33.70	3	Vertical	170	2.52	-	38.90	11.02	45.57			

5.925-6.425GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

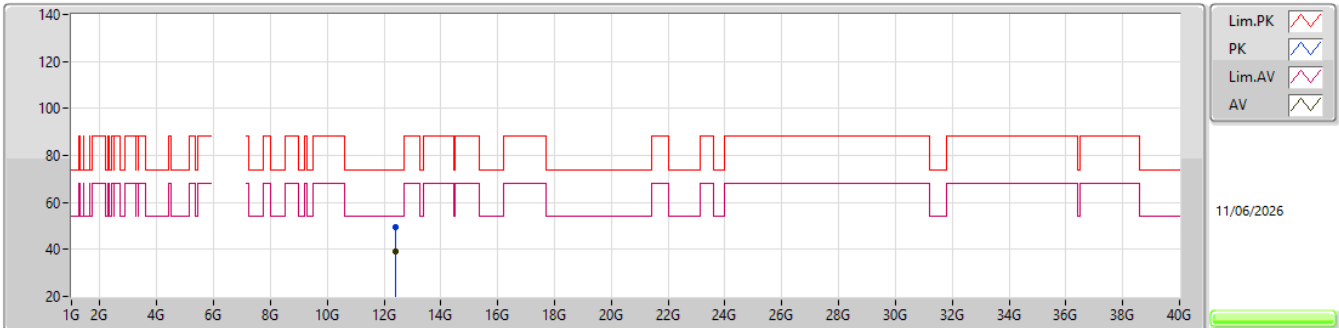


EUT_X_4TX
Setting 108
03-Y-L-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.38972G	49.65	74.00	-24.35	45.30	3	Horizontal	167	1.75	-	38.90	11.02	45.57			
AV	12.38988G	39.10	54.00	-14.90	34.75	3	Horizontal	167	1.75	-	38.90	11.02	45.57			

5.925-6.425GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

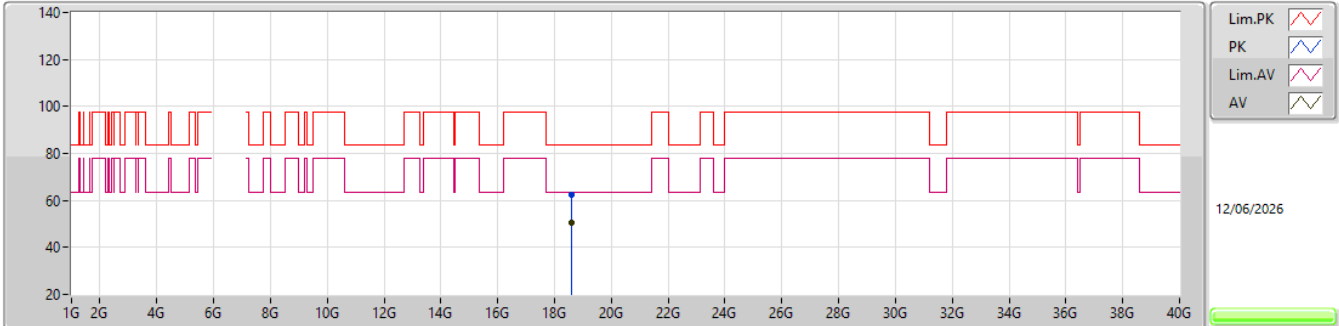


EUT X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.5787G	62.61	83.54	-20.93	58.06	1	Vertical	128.9	1.89	-	37.66	16.58	49.69			
AV	18.57828G	50.54	63.54	-13.00	46.00	1	Vertical	128.9	1.89	-	37.66	16.57	49.69			

5.925-6.425GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

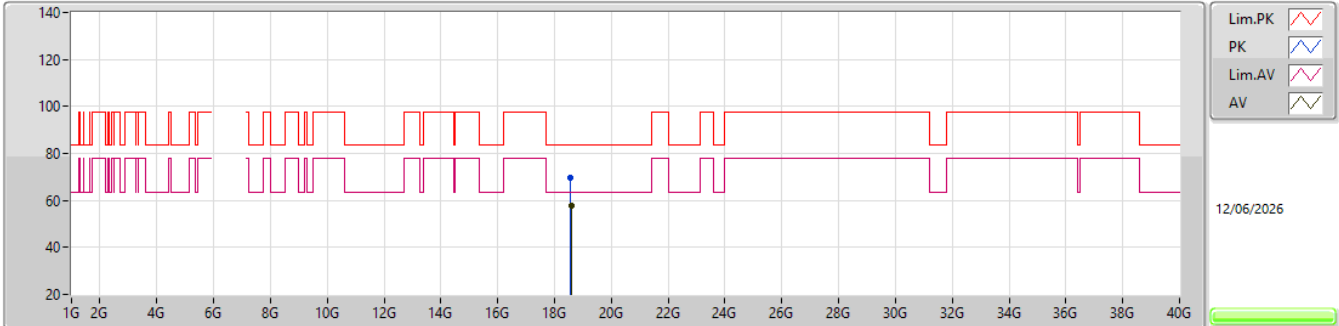


EUT X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.57609G	69.68	83.54	-13.86	65.15	1	Horizontal	129	1.66	-	37.65	16.57	49.69			
AV	18.58227G	57.66	63.54	-5.88	53.11	1	Horizontal	129	1.66	-	37.66	16.58	49.69			

5.925-6.425GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6415MHz_TX

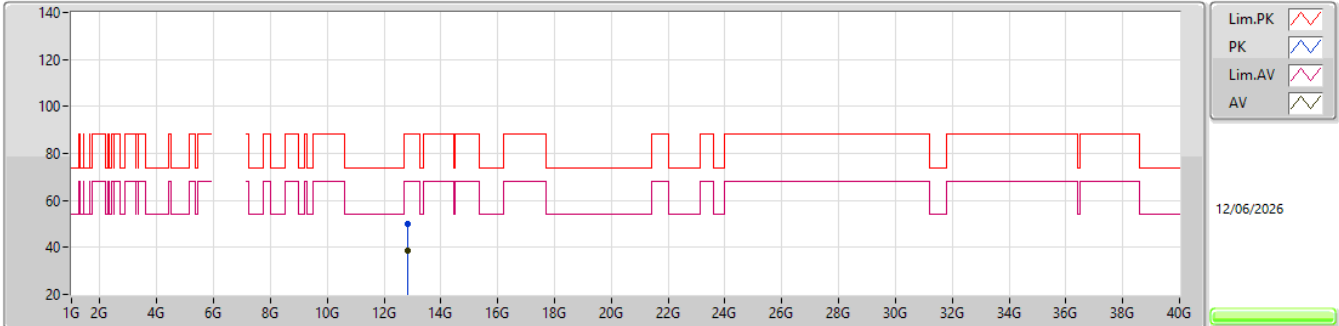


EUT_X_4TX
SET 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.83755G	49.81	88.20	-38.39	45.08	3	Vertical	190	1.80	-	39.35	11.15	45.77			
RMS	12.8375G	38.47	68.20	-29.73	33.74	3	Vertical	190	1.80	-	39.35	11.15	45.77			

5.925-6.425GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6415MHz_TX

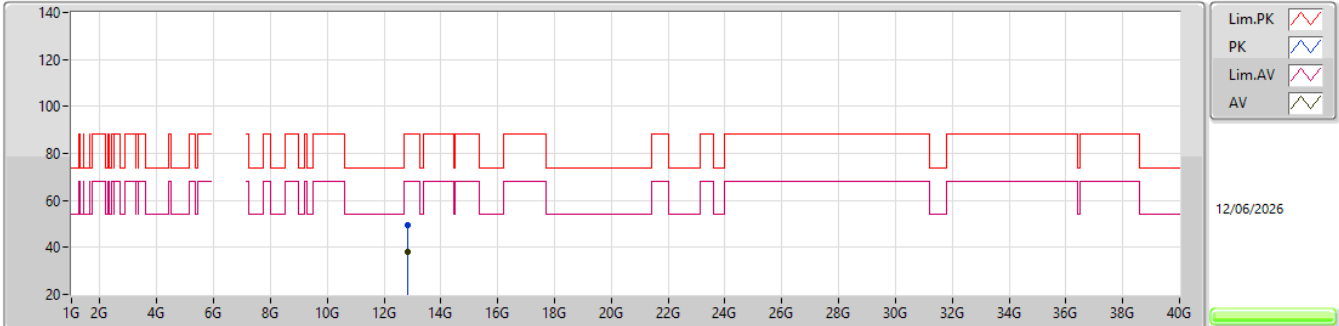


EUT_X_4TX
SET 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8376G	49.37	88.20	-38.83	44.64	3	Horizontal	158	1.80	-	39.35	11.15	45.77			
RMS	12.82825G	38.04	68.20	-30.16	33.34	3	Horizontal	158	1.80	-	39.31	11.15	45.76			

5.925-6.425GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6415MHz_TX

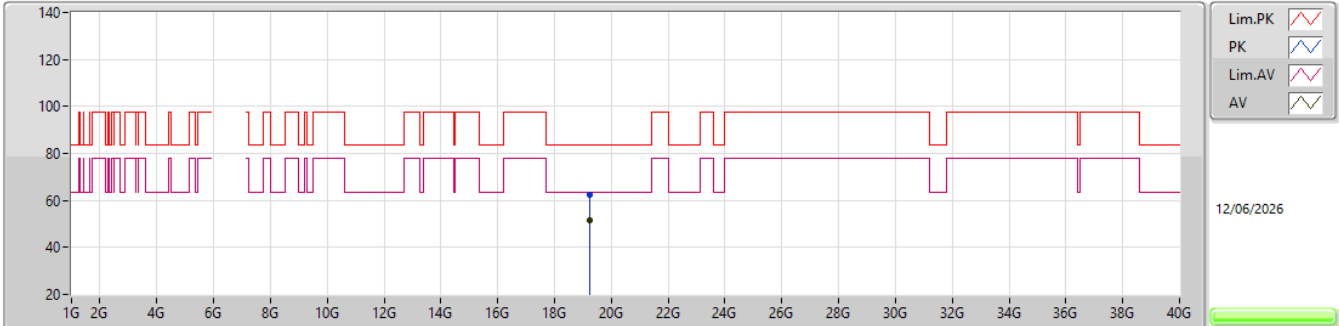


EUT X_4TX
Setting 108
03-Y-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.23501G	62.36	83.54	-21.18	57.06	1	Vertical	181.3	1.68	-	37.84	16.93	49.47			
AV	19.23936G	51.38	63.54	-12.16	46.06	1	Vertical	181.3	1.68	-	37.86	16.93	49.47			

5.925-6.425GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6415MHz_TX

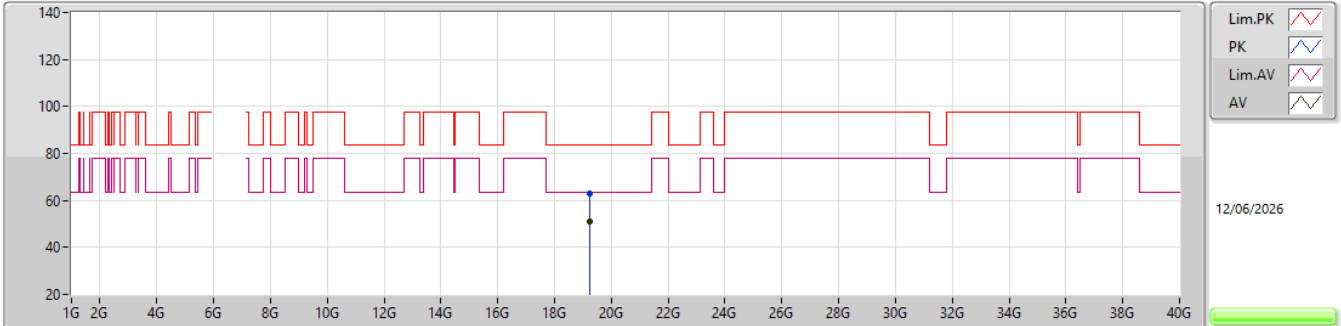


EUT X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.23702G	63.18	83.54	-20.36	57.87	1	Horizontal	134	1.66	-	37.85	16.93	49.47			
AV	19.25334G	51.20	63.54	-12.34	45.85	1	Horizontal	134	1.66	-	37.89	16.94	49.48			

6.425-6.525GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6435MHz_TX

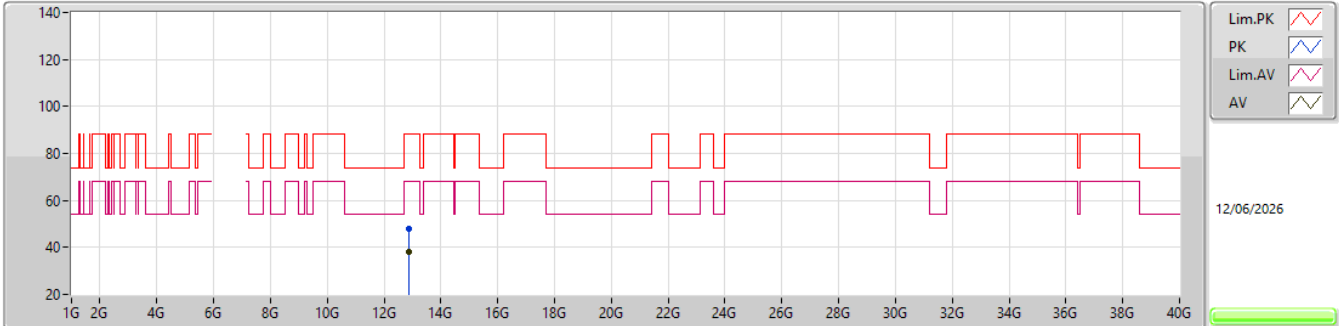


EUT_X_4TX
SET 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.86475G	48.00	88.20	-40.20	43.21	3	Vertical	192	1.92	-	39.43	11.16	45.80			
RMS	12.86385G	38.13	68.20	-30.07	33.33	3	Vertical	192	1.92	-	39.43	11.16	45.79			

6.425-6.525GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6435MHz_TX

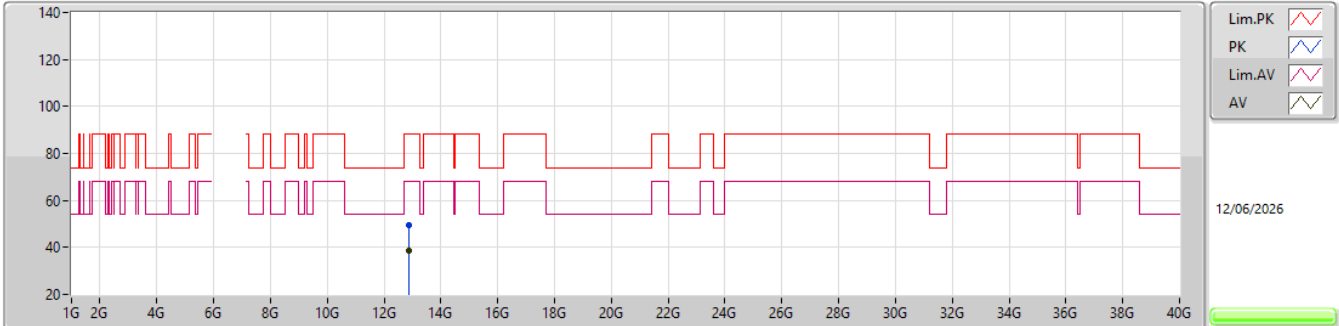


EUT_X_4TX
SET 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.8846G	49.24	88.20	-38.96	44.41	3	Horizontal	159	1.80	-	39.47	11.17	45.81			
RMS	12.88495G	38.53	68.20	-29.67	33.70	3	Horizontal	159	1.80	-	39.47	11.17	45.81			

6.425-6.525GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6435MHz_TX

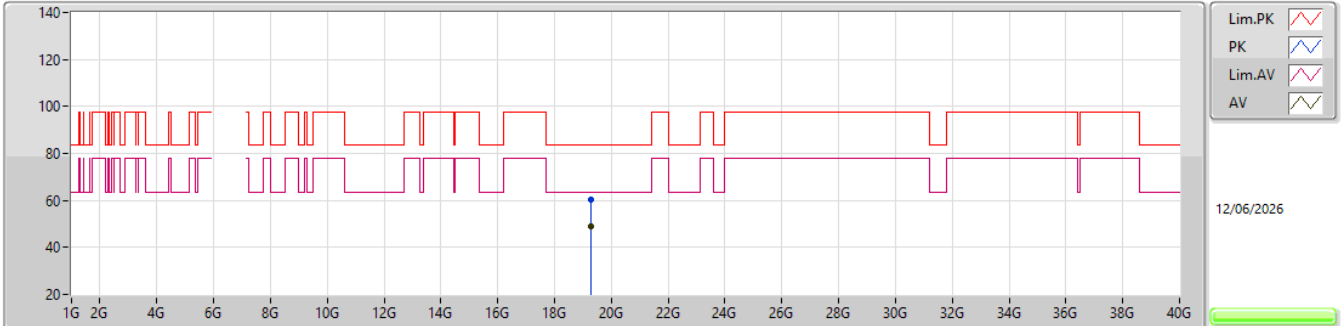


EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	19.30017G	60.18	83.54	-23.36	55.02	1	Vertical	178	2.02	-	37.70	16.96	49.50			
AV	19.30191G	48.80	63.54	-14.74	43.63	1	Vertical	178	2.02	-	37.70	16.97	49.50			

6.425-6.525GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6435MHz_TX

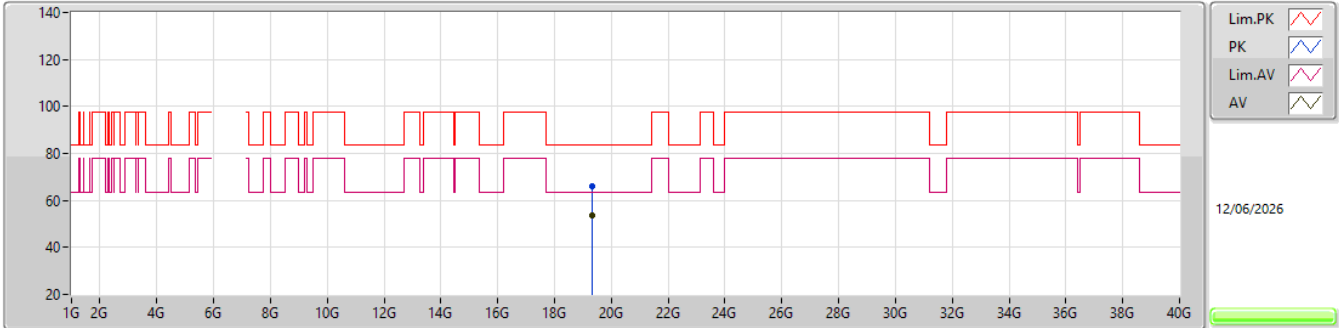


EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.31823G	65.84	83.54	-17.70	60.64	1	Horizontal	229	1.54	-	37.74	16.97	49.51			
AV	19.31151G	53.86	63.54	-9.68	48.68	1	Horizontal	229	1.54	-	37.72	16.97	49.51			

6.425-6.525GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX


6475MHz_TX

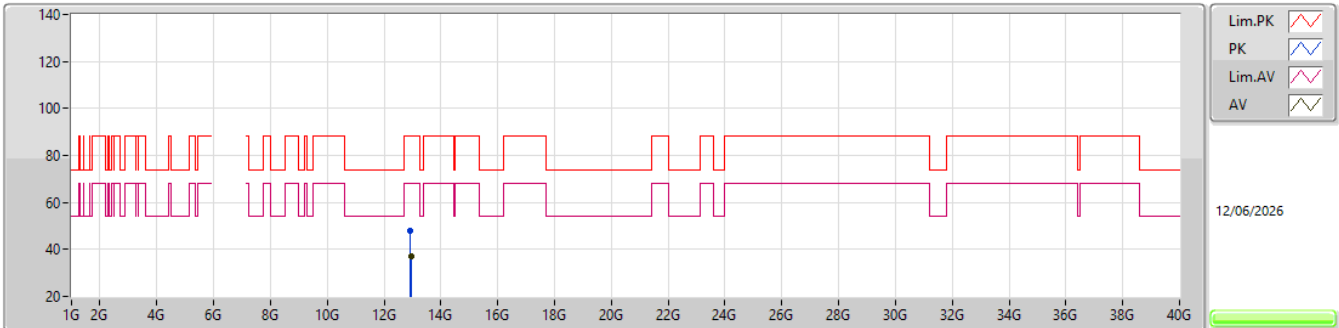EUT_X_4TX
Setting 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.9392G	48.00	88.20	-40.20	43.18	3	Vertical	198	1.80	-	39.50	11.18	45.86			
RMS	12.9401G	37.00	68.20	-31.20	32.18	3	Vertical	198	1.80	-	39.50	11.18	45.86			

6.425-6.525GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6475MHz_TX

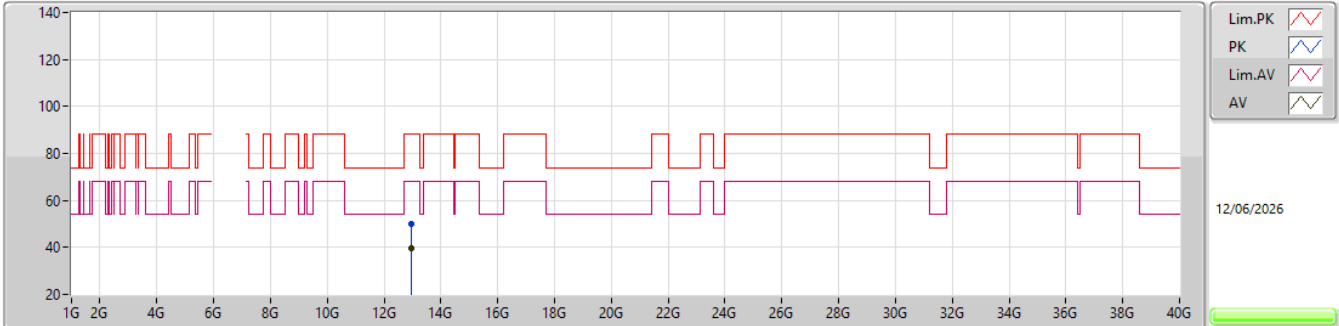


EUT_X_4TX
Setting 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.95205G	49.82	88.20	-38.38	45.01	3	Horizontal	174	1.80	-	39.50	11.19	45.88			
RMS	12.94865G	39.65	68.20	-28.55	34.83	3	Horizontal	174	1.80	-	39.50	11.19	45.87			

6.425-6.525GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6475MHz_TX

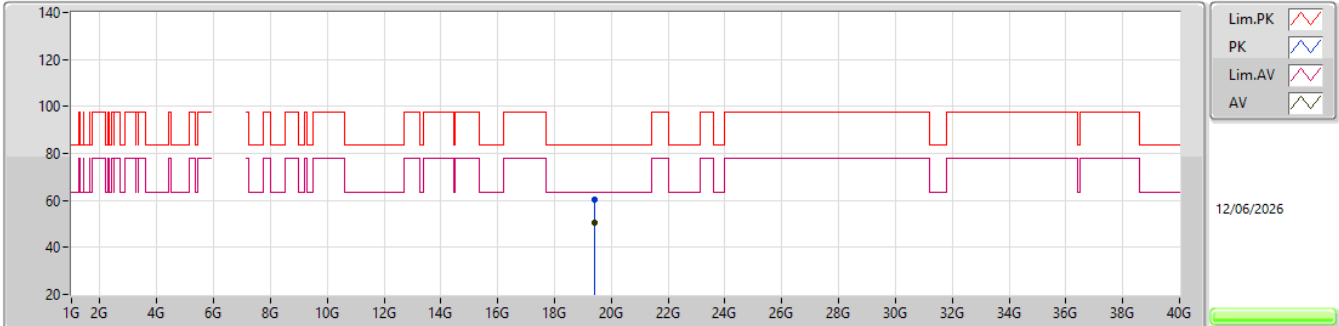


EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.4046G	60.10	83.54	-23.44	54.75	1	Vertical	162	1.72	-	37.88	17.02	49.55			
AV	19.4216G	50.31	63.54	-13.23	45.03	1	Vertical	162	1.72	-	37.81	17.03	49.56			

6.425-6.525GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6475MHz_TX

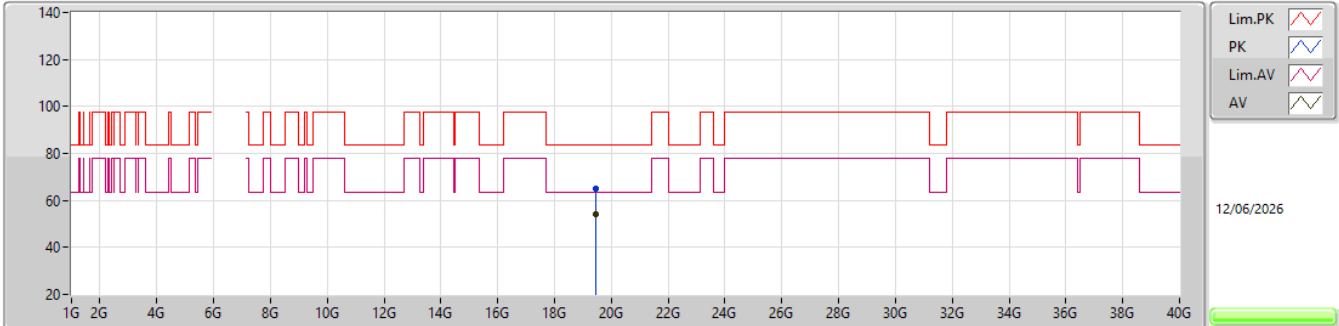


EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.4522G	64.98	83.54	-18.56	59.81	1	Horizontal	229.9	1.55	-	37.70	17.05	49.58			
AV	19.4437G	54.29	63.54	-9.25	49.08	1	Horizontal	229.9	1.55	-	37.73	17.05	49.57			

6.425-6.525GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6515MHz_TX

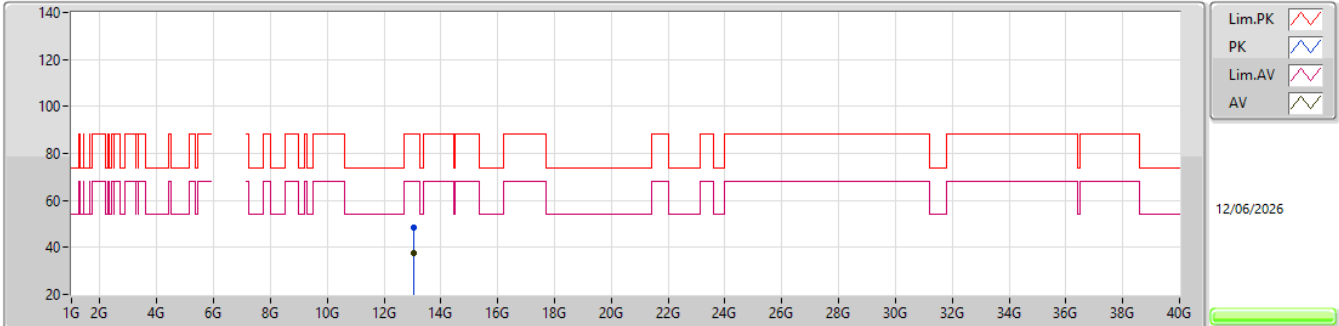


EUT_X_4TX
SET 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0373G	48.24	88.20	-39.96	43.21	3	Vertical	327	2.01	-	39.67	11.21	45.85			
RMS	13.02975G	37.81	68.20	-30.39	32.81	3	Vertical	327	2.01	-	39.66	11.21	45.87			

6.425-6.525GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6515MHz_TX

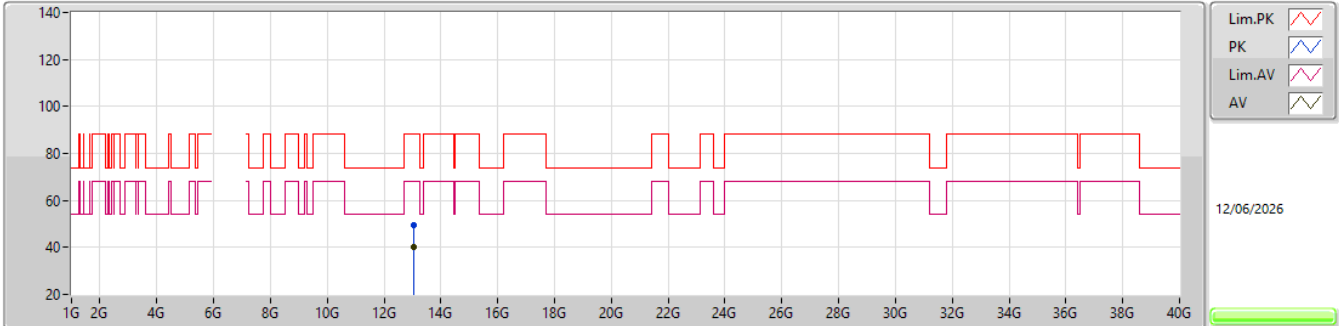


EUT_X_4TX
SET 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0374G	49.65	88.20	-38.55	44.62	3	Horizontal	141	1.80	-	39.67	11.21	45.85			
RMS	13.0297G	39.97	68.20	-28.23	34.97	3	Horizontal	141	1.80	-	39.66	11.21	45.87			

6.425-6.525GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6515MHz_TX

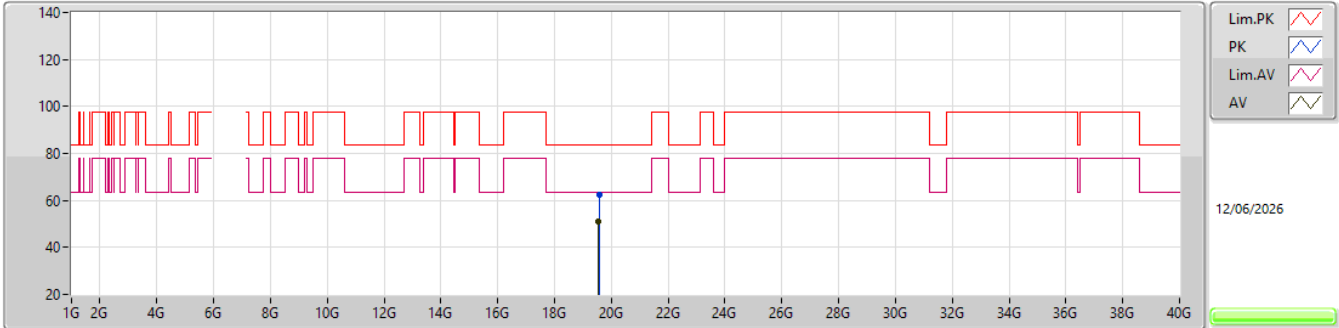


EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.5708G	62.43	83.54	-21.11	57.16	1	Vertical	143	1.62	-	37.70	17.12	49.55			
AV	19.5545G	50.92	63.54	-12.62	45.67	1	Vertical	143	1.62	-	37.70	17.11	49.56			

6.425-6.525GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6515MHz_TX

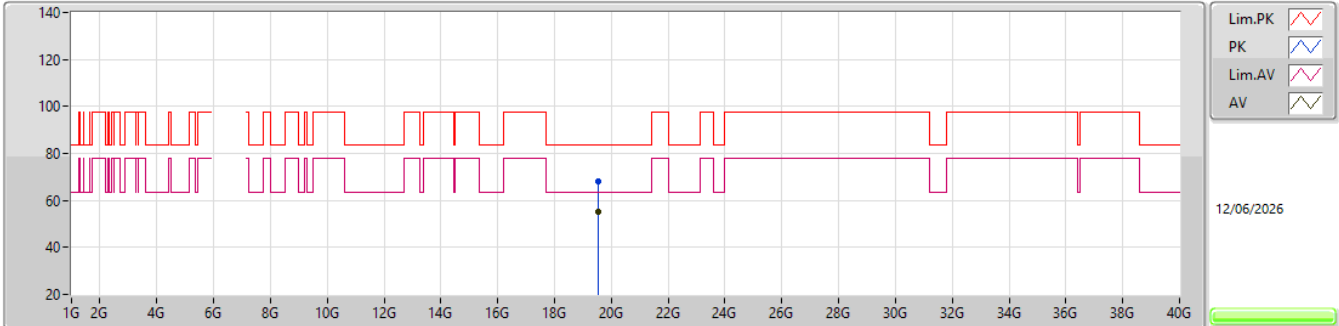


EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.5539G	68.28	83.54	-15.26	63.03	1	Horizontal	231	1.54	-	37.70	17.11	49.56			
AV	19.5483G	54.92	63.54	-8.62	49.68	1	Horizontal	231	1.54	-	37.70	17.11	49.57			

6.525-6.875GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6535MHz_TX

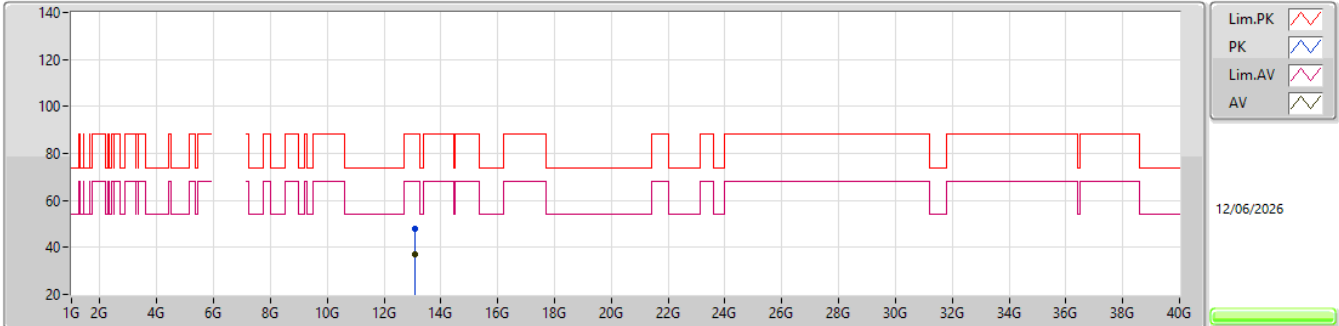


EUT_X_4TX
SET 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.06995G	47.79	88.20	-40.41	42.62	3	Vertical	192	2.22	-	39.74	11.22	45.79			
RMS	13.06965G	37.21	68.20	-30.99	32.04	3	Vertical	192	2.22	-	39.74	11.22	45.79			

6.525-6.875GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6535MHz_TX

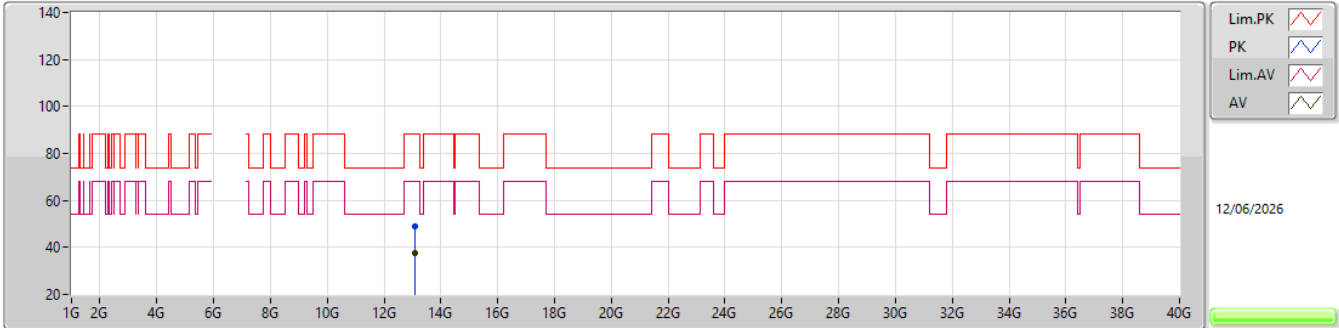

EUT_X_4TX
SET 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.073G	48.87	88.20	-39.33	43.69	3	Horizontal	145	2.30	-	39.75	11.22	45.79			
RMS	13.0699G	37.84	68.20	-30.36	32.67	3	Horizontal	145	2.30	-	39.74	11.22	45.79			

6.525-6.875GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6535MHz_TX




EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.596G	64.38	83.54	-19.16	59.07	1	Vertical	142	1.60	-	37.70	17.14	49.53			
AV	19.5927G	53.66	63.54	-9.88	48.36	1	Vertical	142	1.60	-	37.70	17.13	49.53			

6.525-6.875GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6535MHz_TX

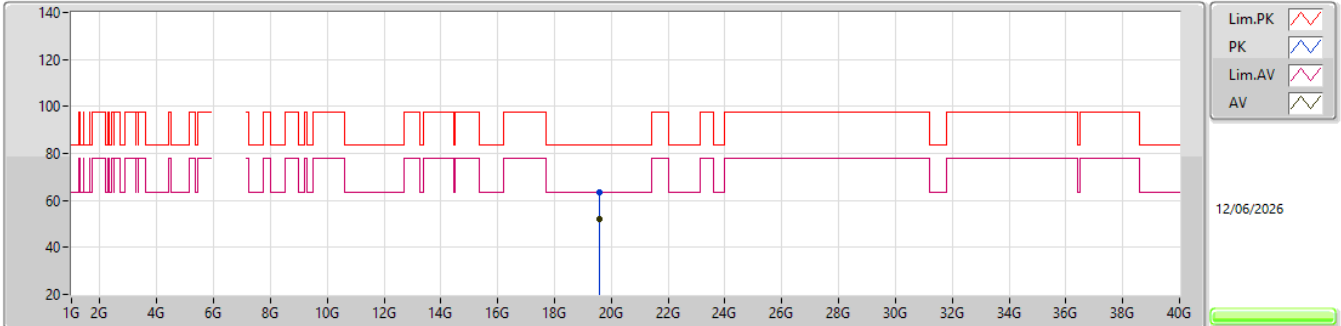


EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.6011G	63.23	83.54	-20.31	57.92	1	Horizontal	218.5	1.50	-	37.70	17.14	49.53			
AV	19.6027G	52.09	63.54	-11.45	46.79	1	Horizontal	218.5	1.50	-	37.69	17.14	49.53			

6.525-6.875GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6695MHz_TX

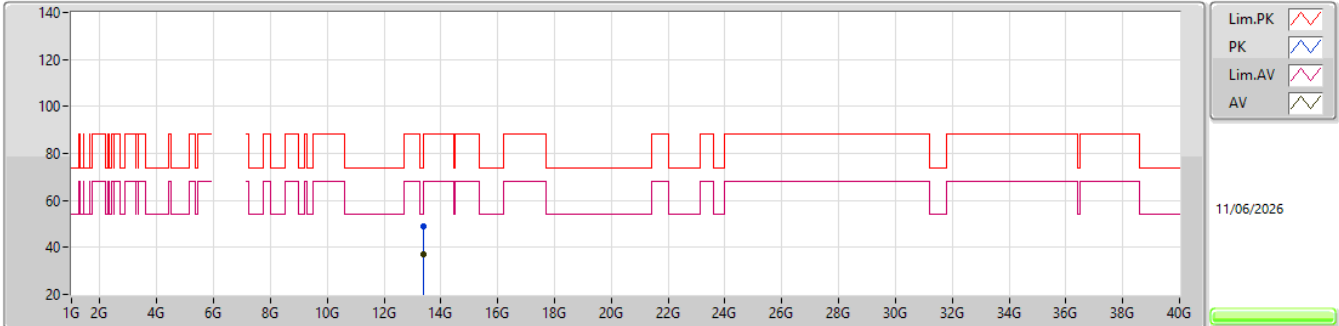


EUT X_4TX
SET 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.39715G	48.73	74.00	-25.27	42.22	3	Vertical	2	2.43	-	40.39	11.32	45.20			
AV	13.3953G	36.87	54.00	-17.13	30.38	3	Vertical	2	2.43	-	40.38	11.31	45.20			

6.525-6.875GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6695MHz_TX

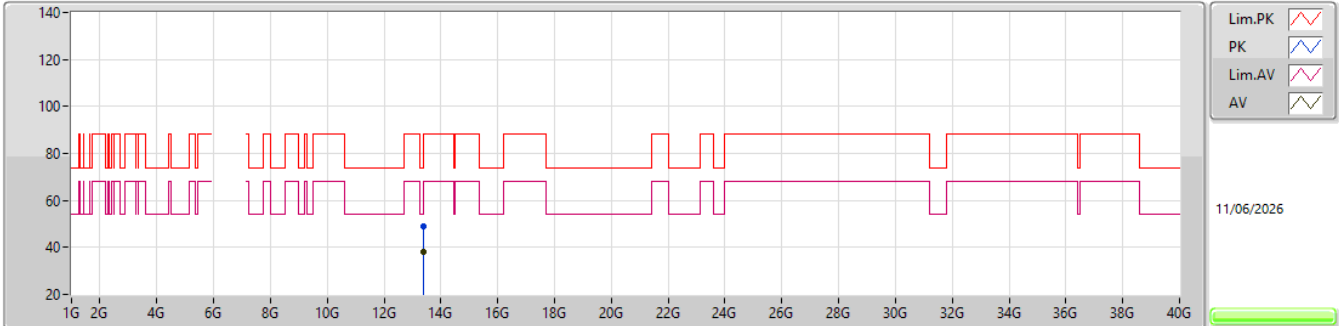


EUT_X_4TX
SET 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.397G	48.82	74.00	-25.18	42.31	3	Horizontal	123	1.80	-	40.39	11.32	45.20			
AV	13.39785G	37.91	54.00	-16.09	31.40	3	Horizontal	123	1.80	-	40.39	11.32	45.20			

6.525-6.875GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6695MHz_TX

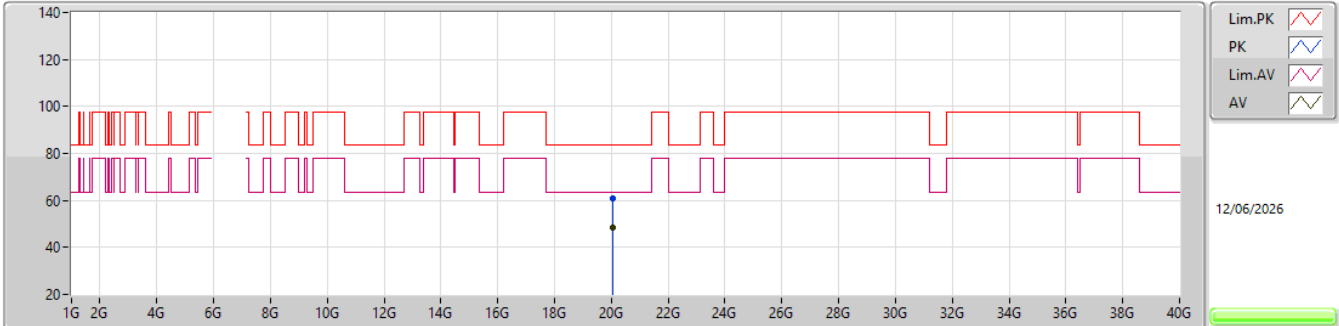


EUT X_4TX
Setting 108
03-Y-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.0653G	60.70	83.54	-22.84	54.93	1	Vertical	217	1.74	-	37.63	17.38	49.24			
AV	20.0633G	48.37	63.54	-15.17	42.60	1	Vertical	217	1.74	-	37.63	17.38	49.24			

6.525-6.875GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6695MHz_TX

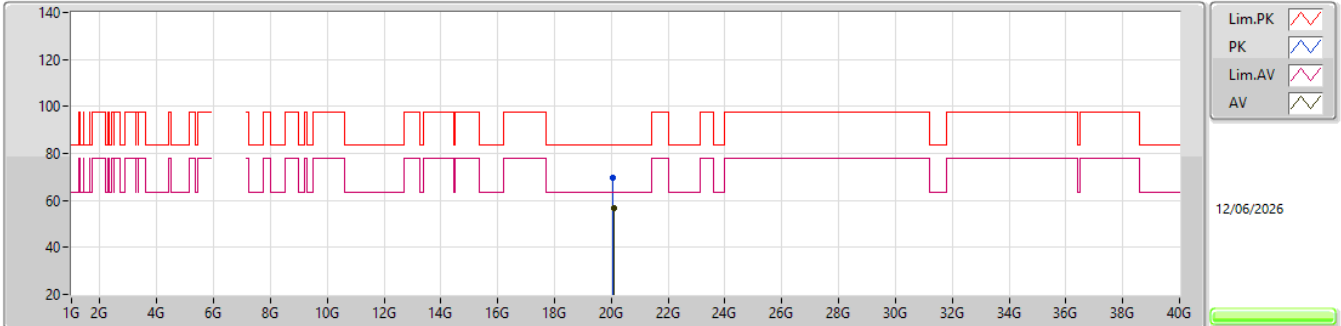


EUT X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.0663G	69.72	83.54	-13.82	63.95	1	Horizontal	237	1.57	-	37.63	17.38	49.24			
AV	20.0803G	56.67	63.54	-6.87	50.87	1	Horizontal	237	1.57	-	37.66	17.38	49.24			

6.525-6.875GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6855MHz_TX

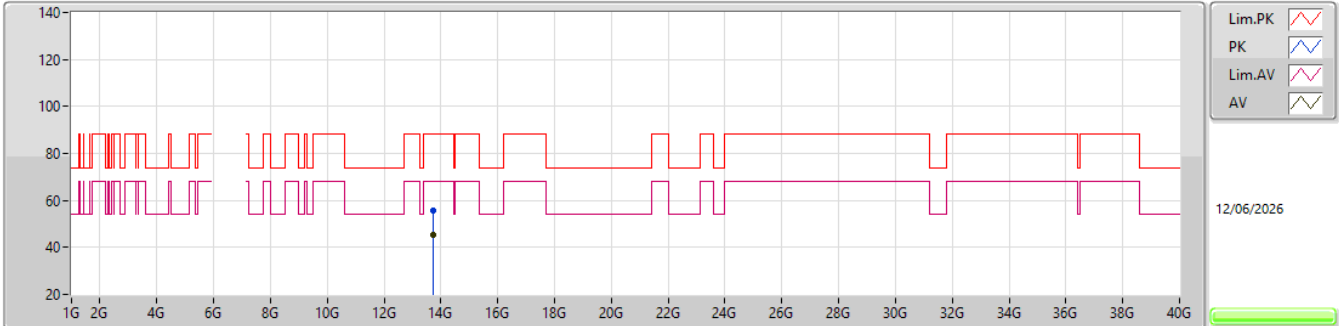


EUT X_4TX
SET 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.70915G	55.73	88.20	-32.47	48.56	3	Vertical	127	1.80	-	40.82	11.41	45.06			
RMS	13.7093G	45.47	68.20	-22.73	38.30	3	Vertical	127	1.80	-	40.82	11.41	45.06			

6.525-6.875GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6855MHz_TX

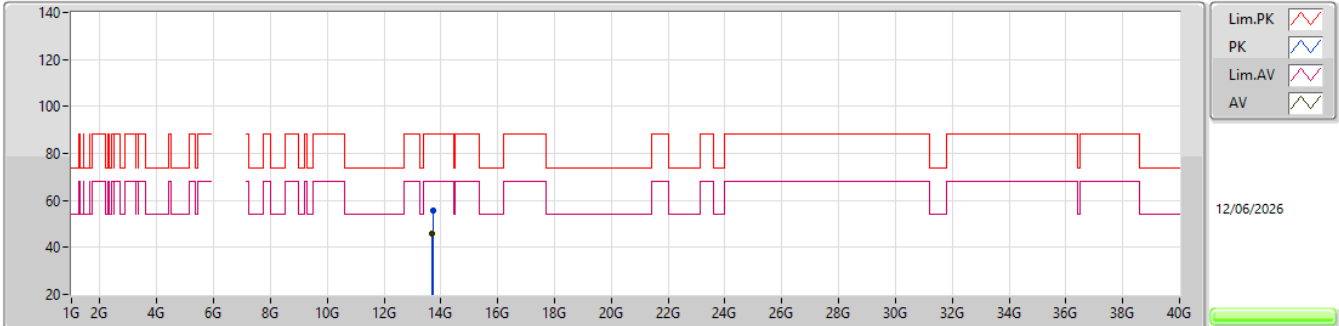


EUT X_4TX
SET 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.71125G	55.82	88.20	-32.38	48.65	3	Horizontal	219	1.80	-	40.82	11.41	45.06			
RMS	13.70725G	45.70	68.20	-22.50	38.54	3	Horizontal	219	1.80	-	40.81	11.41	45.06			

6.525-6.875GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6855MHz_TX

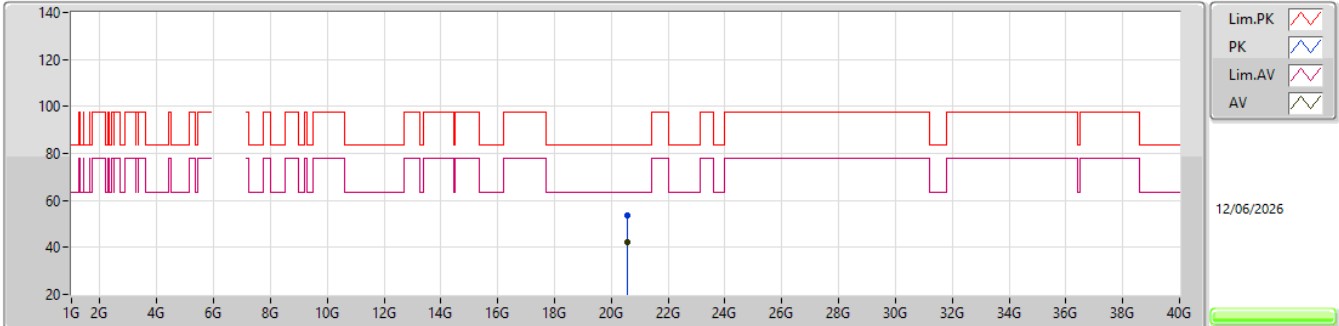


EUT X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.5554G	53.81	83.54	-29.73	47.84	1	Vertical	164	1.68	-	37.71	17.45	49.19			
AV	20.5738G	42.26	63.54	-21.28	36.24	1	Vertical	164	1.68	-	37.75	17.45	49.18			

6.525-6.875GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6855MHz_TX

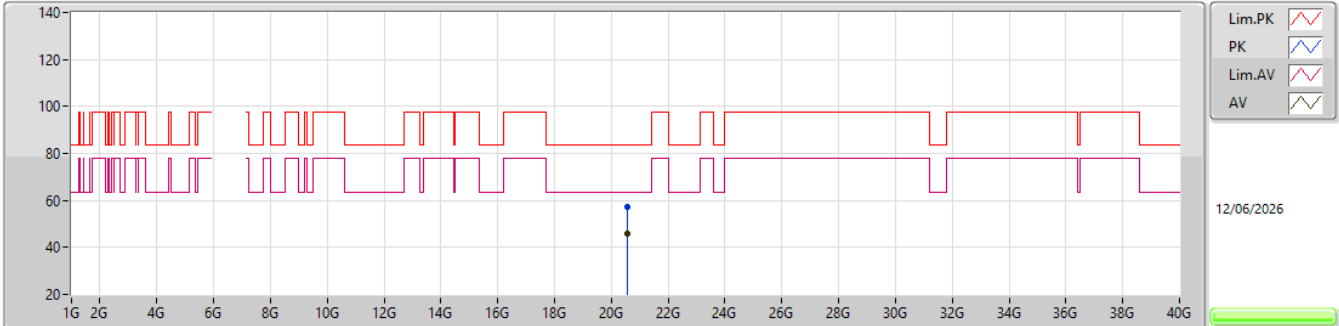


EUT X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.583G	57.08	83.54	-26.46	51.04	1	Horizontal	140	1.54	-	37.77	17.45	49.18			
AV	20.5666G	46.03	63.54	-17.51	40.03	1	Horizontal	140	1.54	-	37.73	17.45	49.18			

6.525-6.875GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX


6875MHz_TX

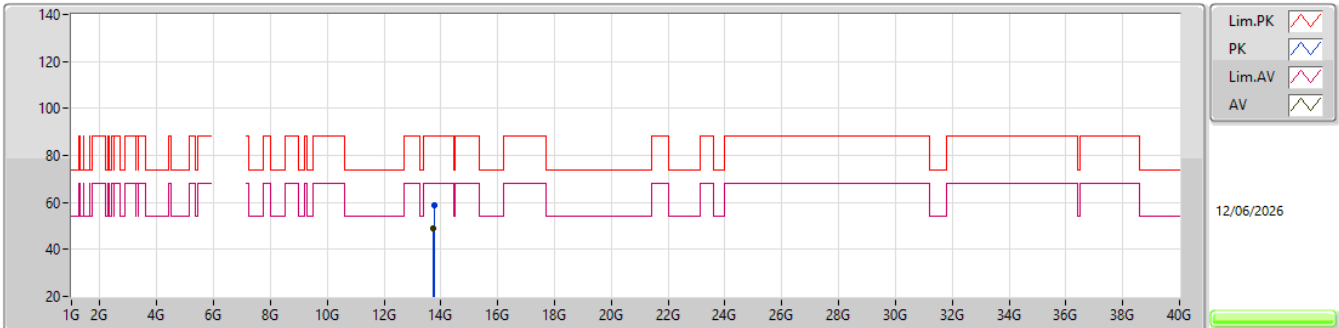EUT_X_4TX
SET 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.76345G	59.04	88.20	-29.16	51.79	3	Vertical	221	2.12	-	40.90	11.42	45.07			
RMS	13.74835G	49.09	68.20	-19.11	41.83	3	Vertical	221	2.12	-	40.90	11.42	45.06			

6.525-6.875GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6875MHz_TX

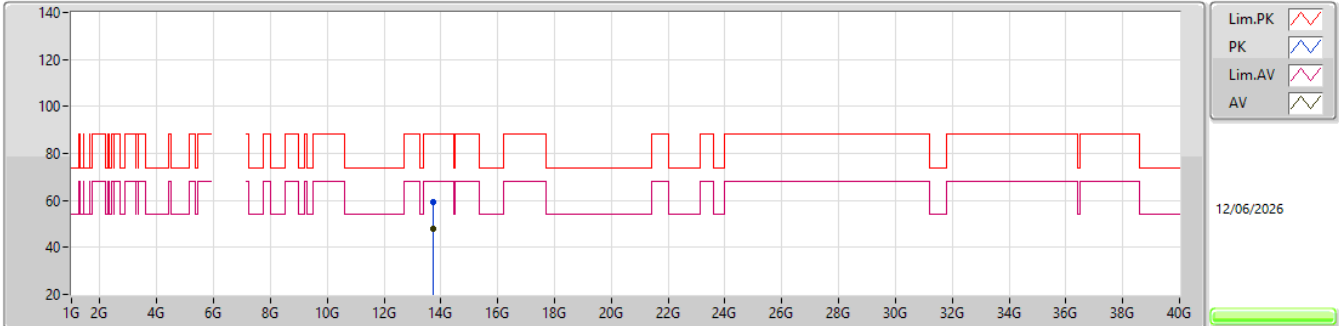


EUT_X_4TX
SET 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.7492G	59.53	88.20	-28.67	52.27	3	Horizontal	218	2.66	-	40.90	11.42	45.06			
RMS	13.74955G	48.04	68.20	-20.16	40.78	3	Horizontal	218	2.66	-	40.90	11.42	45.06			

6.525-6.875GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6875MHz_TX

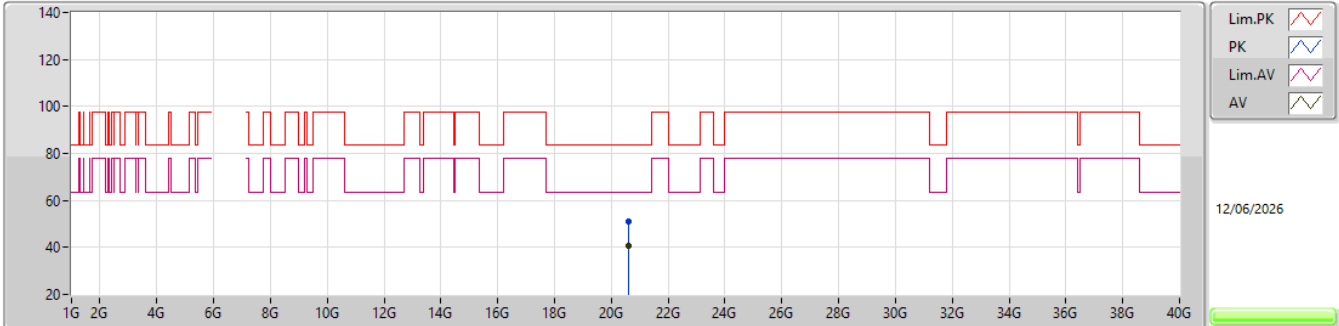


EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.6202G	51.15	83.54	-32.39	45.01	1	Vertical	148	1.73	-	37.84	17.46	49.16			
AV	20.6228G	40.59	63.54	-22.95	34.43	1	Vertical	148	1.73	-	37.85	17.46	49.15			

6.525-6.875GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX


6875MHz_TX

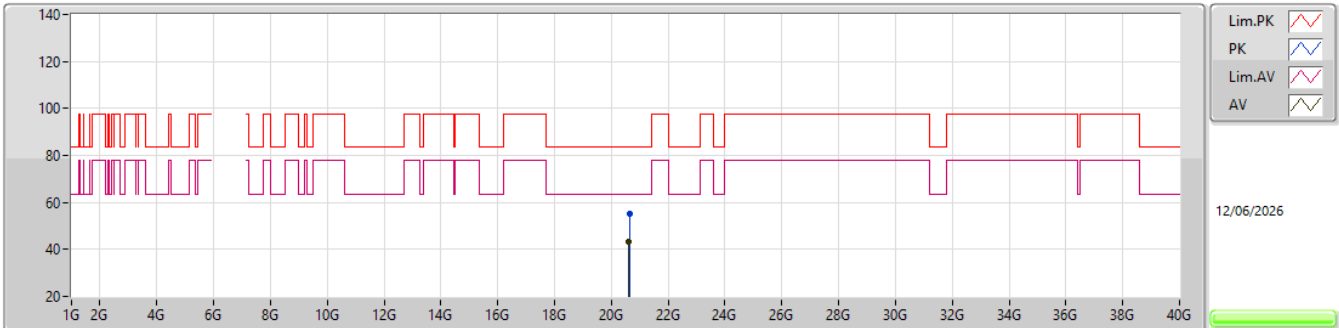EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.6306G	55.06	83.54	-28.48	48.89	1	Horizontal	116	1.57	-	37.86	17.46	49.15			
AV	20.6242G	43.09	63.54	-20.45	36.93	1	Horizontal	116	1.57	-	37.85	17.46	49.15			

6.875-7.125GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6995MHz_TX

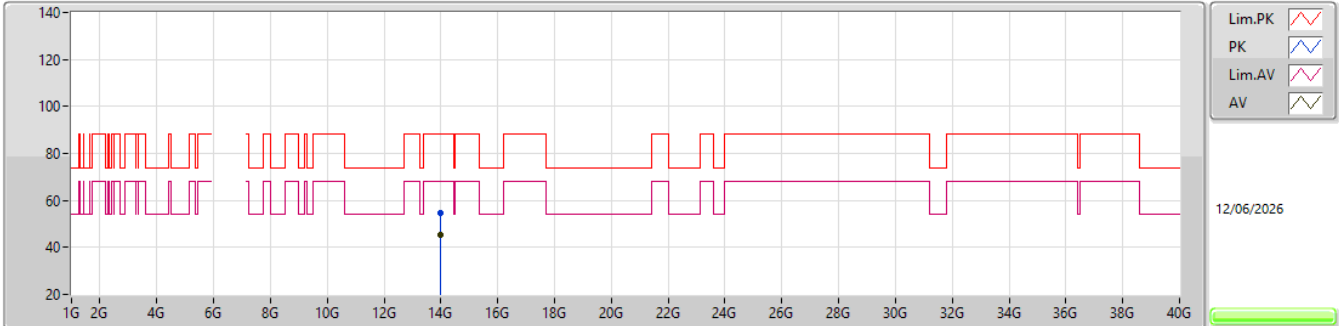


EUT_X_4TX
Setting 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.9767G	54.64	88.20	-33.56	47.06	3	Vertical	91	1.68	-	41.21	11.48	45.11			
RMS	13.9785G	45.17	68.20	-23.03	37.60	3	Vertical	91	1.68	-	41.21	11.48	45.12			

6.875-7.125GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6995MHz_TX

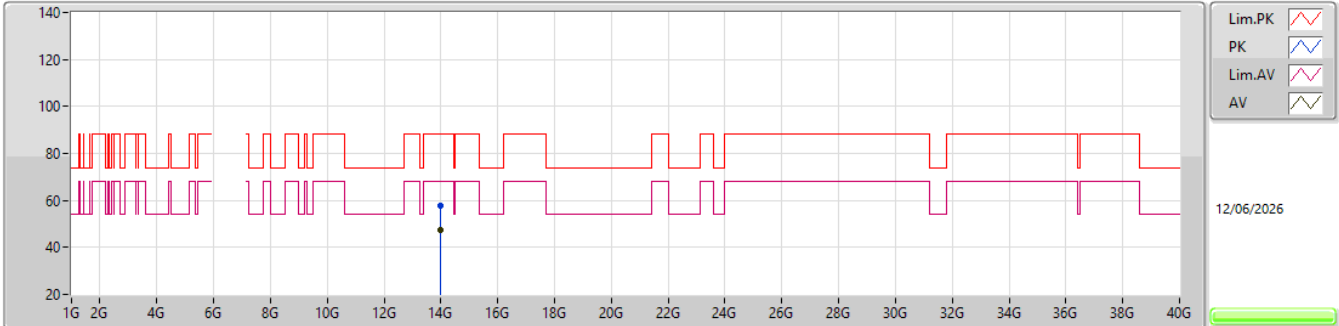


EUT_X_4TX
Setting 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.99505G	57.57	88.20	-30.63	49.92	3	Horizontal	140	2.95	-	41.28	11.49	45.12			
RMS	13.97935G	47.51	68.20	-20.69	39.93	3	Horizontal	140	2.95	-	41.22	11.48	45.12			

6.875-7.125GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6995MHz_TX

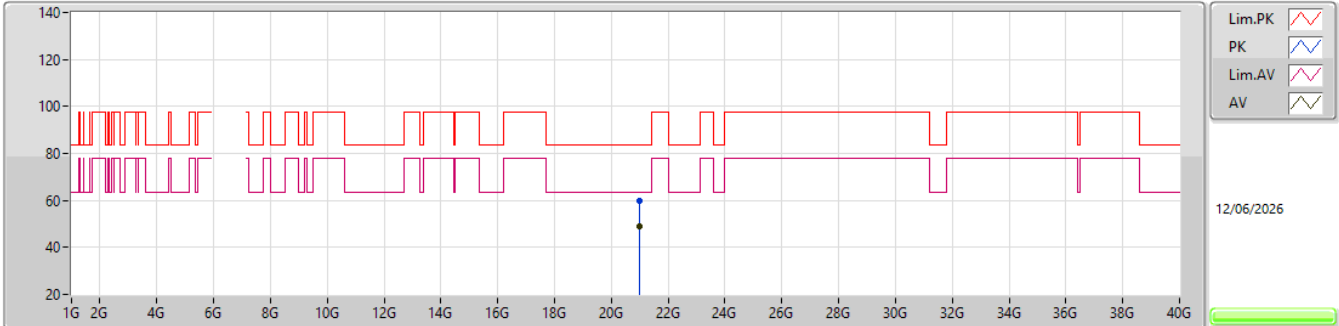


EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	20.9718G	59.64	83.54	-23.90	53.16	1	Vertical	185	1.65	-	37.94	17.51	48.97			
AV	20.9824G	48.89	63.54	-14.65	42.38	1	Vertical	185	1.65	-	37.96	17.51	48.96			

6.875-7.125GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

6995MHz_TX

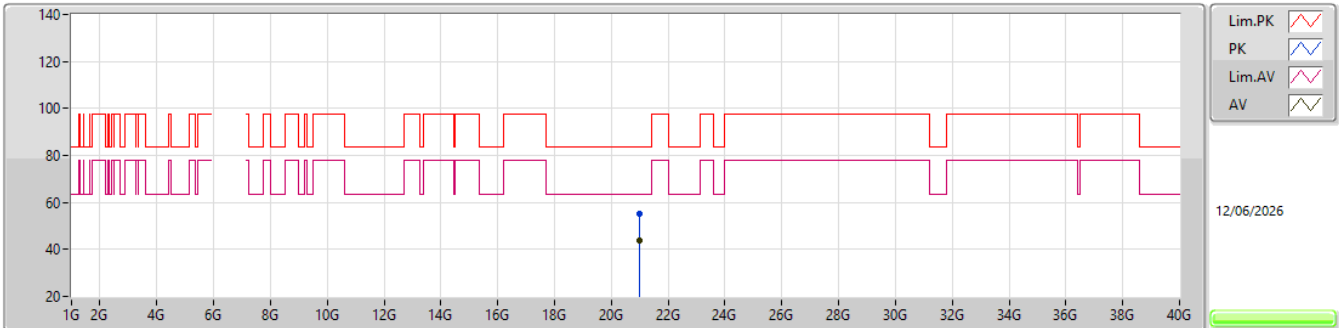


EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	20.9846G	55.23	83.54	-28.31	48.71	1	Horizontal	174	1.50	-	37.97	17.51	48.96			
AV	20.9924G	44.04	63.54	-19.50	37.50	1	Horizontal	174	1.50	-	37.98	17.51	48.95			

6.875-7.125GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

7095MHz_TX

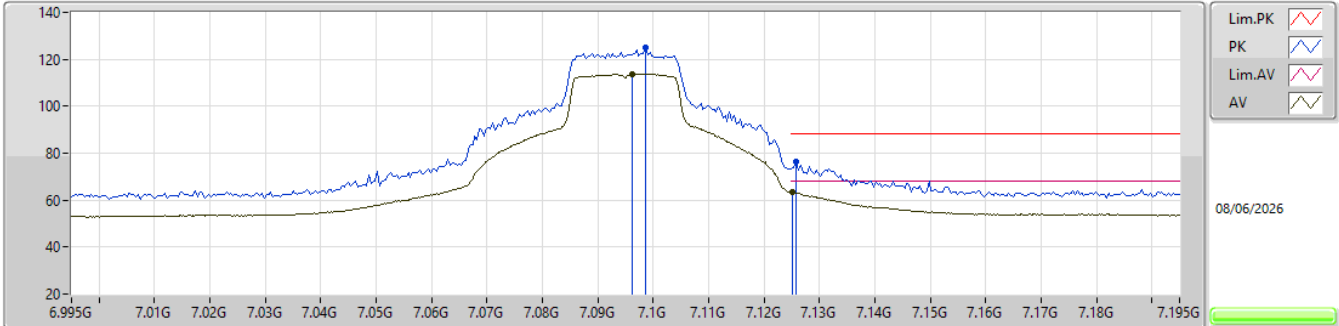


EUT_X_4TX
Setting 102
06-E-G-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.0986G	124.85	Inf	-Inf	113.87	3	Vertical	38	2.00	-	35.99	8.43	33.44			
RMS	7.0962G	113.74	Inf	-Inf	102.78	3	Vertical	38	2.00	-	35.97	8.43	33.44			
PK	7.1258G	76.38	88.20	-11.82	65.30	3	Vertical	38	2.00	-	36.10	8.44	33.46			
RMS	7.1252G	63.24	68.20	-4.96	52.16	3	Vertical	38	2.00	-	36.10	8.44	33.46			

6.875-7.125GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

7095MHz_TX

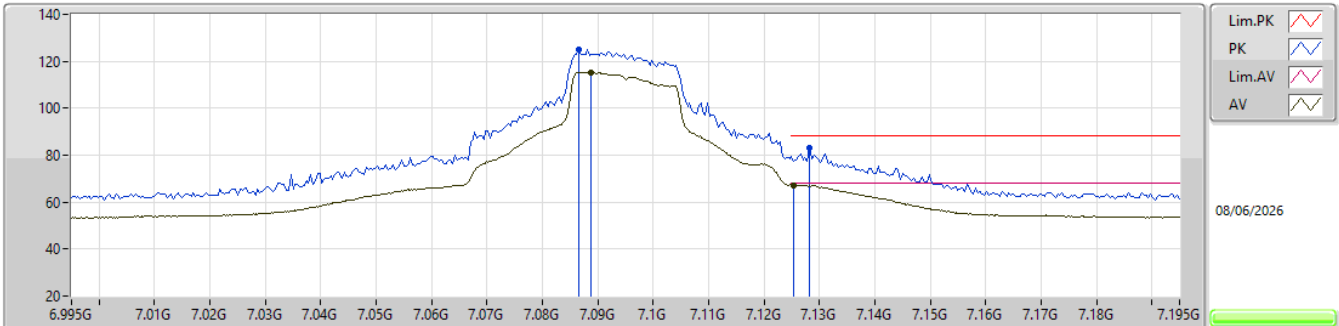


EUT_X_4TX
Setting 102
06-E-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	7.0866G	124.97	Inf	-Inf	114.09	3	Horizontal	324	1.99	-	35.89	8.43	33.44			
RMS	7.0888G	115.30	Inf	-Inf	104.40	3	Horizontal	324	1.99	-	35.91	8.43	33.44			
PK	7.1282G	83.11	88.20	-5.09	72.02	3	Horizontal	324	1.99	-	36.11	8.44	33.46			
RMS	7.1254G	67.31	68.20	-0.89	56.23	3	Horizontal	324	1.99	-	36.10	8.44	33.46			

6.875-7.125GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

7095MHz_TX

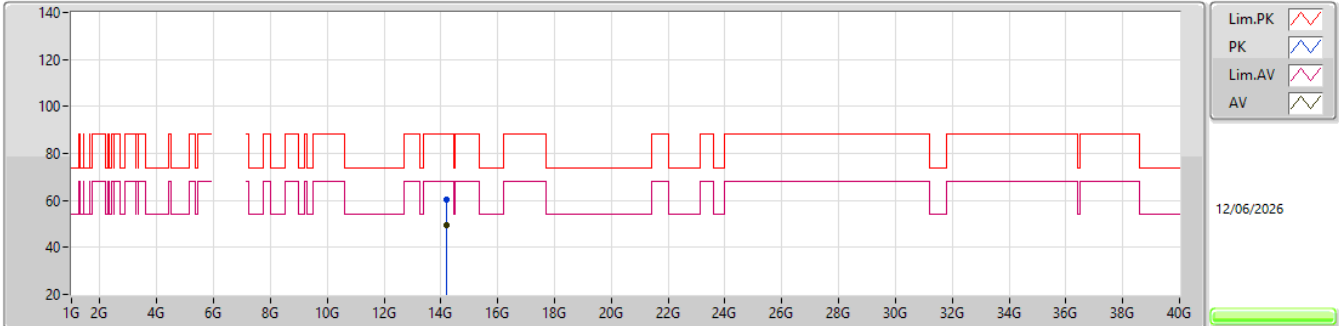


EUT_X_4TX
Setting 102
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.1963G	60.58	88.20	-27.62	52.20	3	Vertical	211	1.80	-	41.79	11.58	44.99			
RMS	14.1886G	49.65	68.20	-18.55	41.32	3	Vertical	211	1.80	-	41.75	11.58	45.00			

6.875-7.125GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

7095MHz_TX

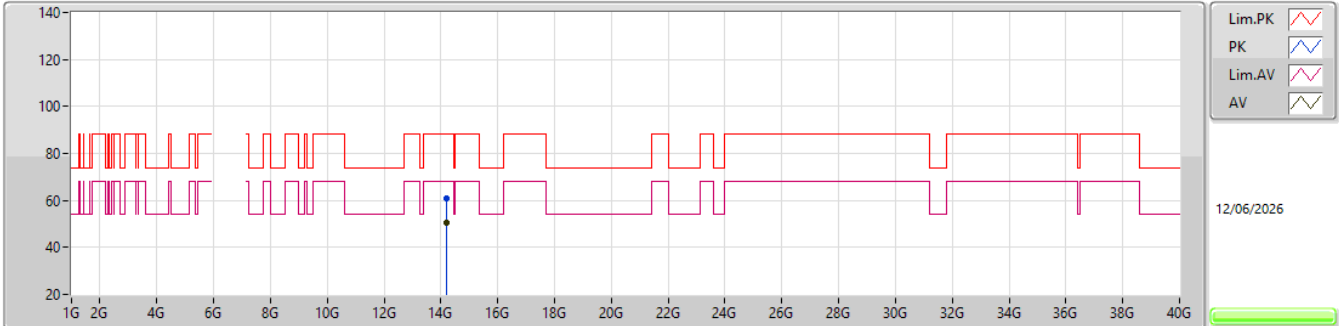


EUT_X_4TX
Setting 102
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.2038G	61.02	88.20	-27.18	52.63	3	Horizontal	221	2.08	-	41.80	11.58	44.99			
RMS	14.1973G	50.57	68.20	-17.63	42.19	3	Horizontal	221	2.08	-	41.79	11.58	44.99			

6.875-7.125GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

7095MHz_TX

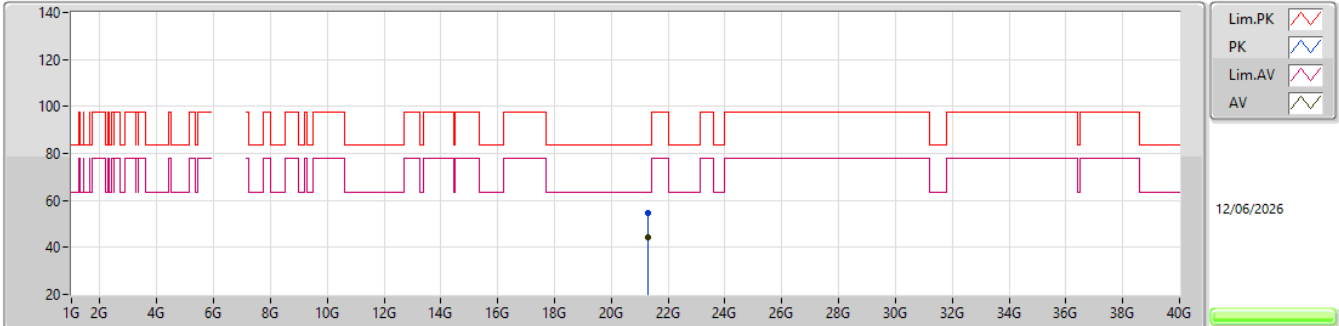


EUT_X_4TX
Setting 102
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.2816G	54.88	83.54	-28.66	48.14	1	Vertical	191.7	1.69	-	37.96	17.61	48.83			
AV	21.2948G	44.50	63.54	-19.04	37.71	1	Vertical	191.7	1.69	-	37.99	17.62	48.82			

6.875-7.125GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

7095MHz_TX

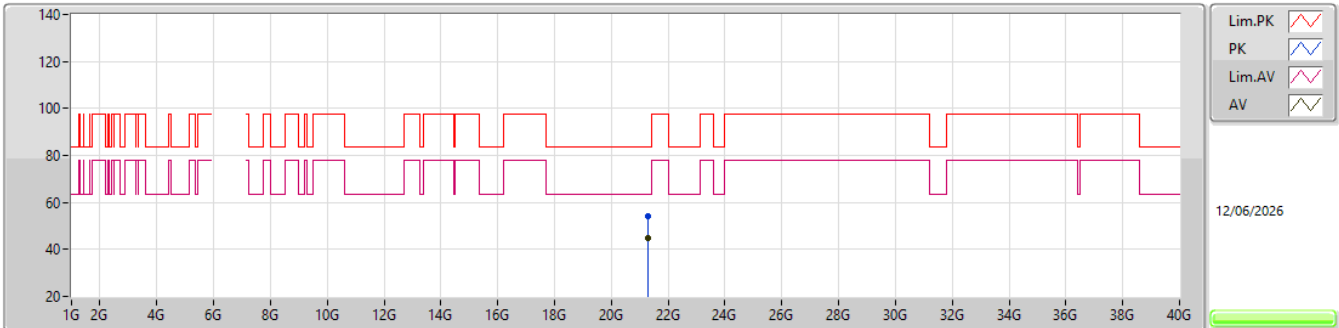


EUT_X_4TX
Setting 102
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.291G	54.25	83.54	-29.29	47.48	1	Horizontal	174	1.50	-	37.98	17.61	48.82			
AV	21.291G	45.05	63.54	-18.49	38.28	1	Horizontal	174	1.50	-	37.98	17.61	48.82			

6.875-7.125GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

7115MHz_TX

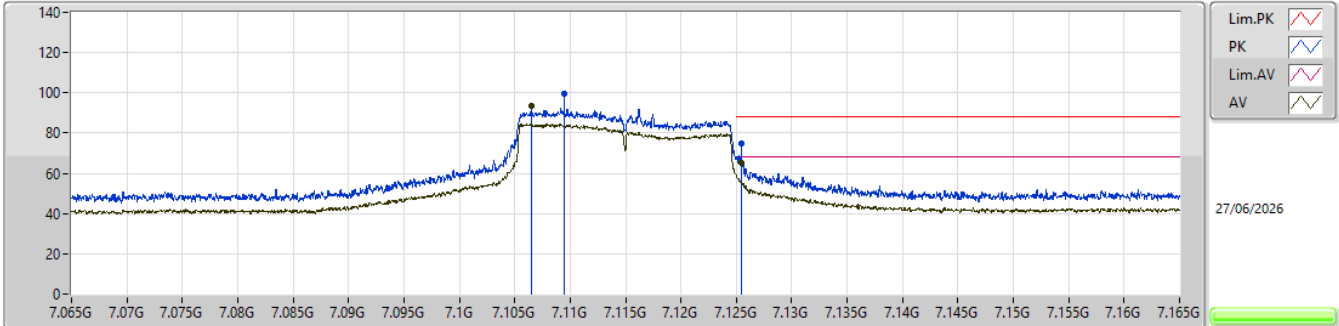


EUT X_4TX
Setting 20
04-Y-5-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.1095G	99.80	Inf	-Inf	96.86	3	Vertical	46	1.58	BP 1MHz	35.64	10.08	42.78			
RMS	7.1065G	93.57	Inf	-Inf	90.64	3	Vertical	46	1.58	BP 1MHz	35.63	10.08	42.78			
PK	7.1255G	74.97	88.20	-13.23	71.93	3	Vertical	46	1.58	BP 1MHz	35.70	10.11	42.77			
RMS	7.1255G	65.27	68.20	-2.93	62.23	3	Vertical	46	1.58	BP 1MHz	35.70	10.11	42.77			

6.875-7.125GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

7115MHz_TX

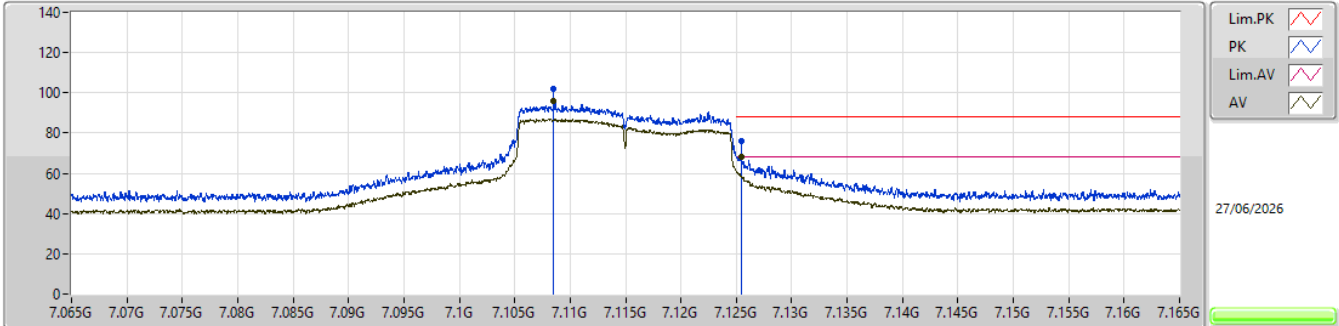


EUT X_4TX
Setting 20
04-Y-5-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	7.1085G	101.97	Inf	-Inf	99.04	3	Horizontal	78	1.80	BP 1MHz	35.63	10.08	42.78			
RMS	7.1085G	96.15	Inf	-Inf	93.22	3	Horizontal	78	1.80	BP 1MHz	35.63	10.08	42.78			
PK	7.1255G	75.90	88.20	-12.30	72.86	3	Horizontal	78	1.80	BP 1MHz	35.70	10.11	42.77			
RMS	7.1255G	68.10	68.20	-0.10	65.06	3	Horizontal	78	1.80	BP 1MHz	35.70	10.11	42.77			

6.875-7.125GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

7115MHz_TX

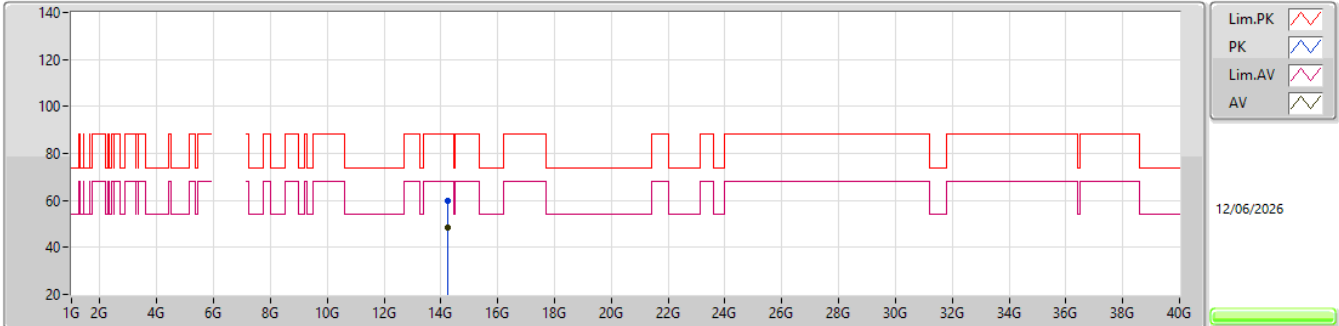


EUT X_4TX
Setting 20
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	14.22875G	59.69	88.20	-28.51	51.27	3	Vertical	210	1.80	-	41.80	11.59	44.97			
RMS	14.2304G	48.66	68.20	-19.54	40.24	3	Vertical	210	1.80	-	41.80	11.59	44.97			

6.875-7.125GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX


7115MHz_TX

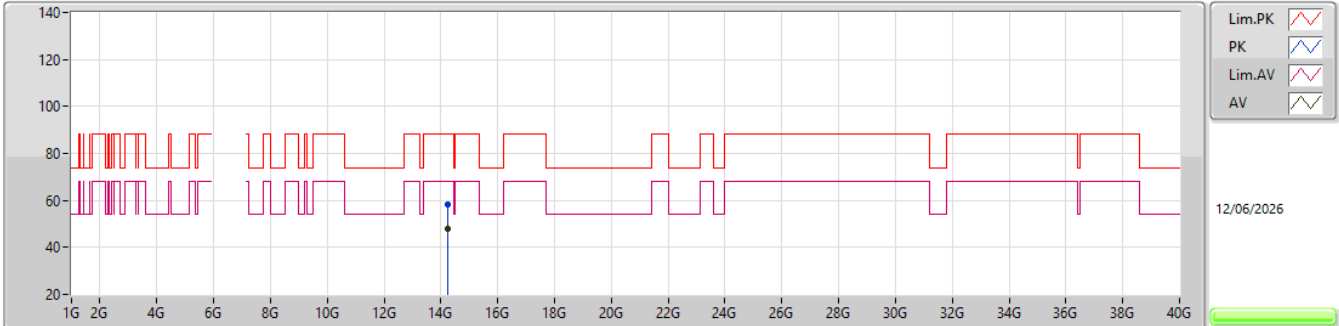EUT X_4TX
Setting 20
03-Y-L-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	14.24165G	58.14	88.20	-30.06	49.71	3	Horizontal	103	1.80	-	41.80	11.60	44.97			
RMS	14.2348G	48.09	68.20	-20.11	39.66	3	Horizontal	103	1.80	-	41.80	11.60	44.97			

6.875-7.125GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

7115MHz_TX

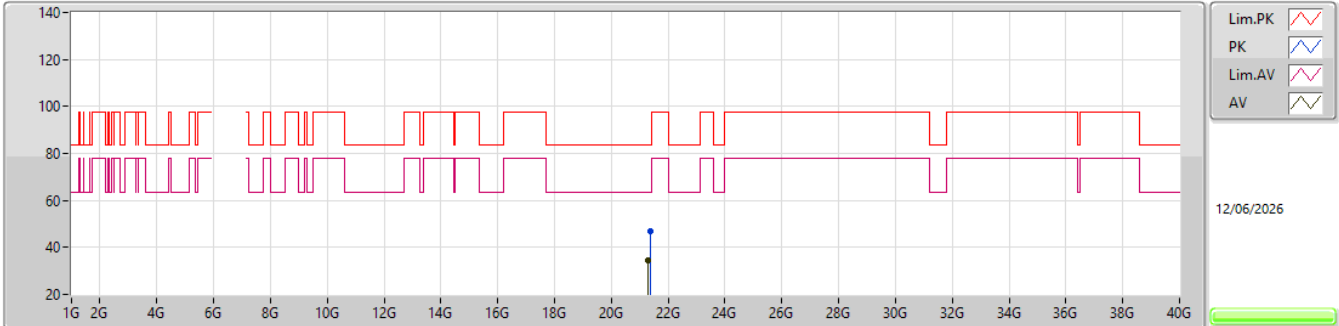


EUT X_4TX
Setting 20
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.378G	46.64	83.54	-36.90	39.76	1	Vertical	350	1.80	-	38.01	17.65	48.78			
AV	21.3034G	34.64	63.54	-28.90	27.85	1	Vertical	350	1.80	-	37.99	17.62	48.82			

6.875-7.125GHz_802.11ax HEW20-BF_Nss1,(MCS0)_4TX

7115MHz_TX

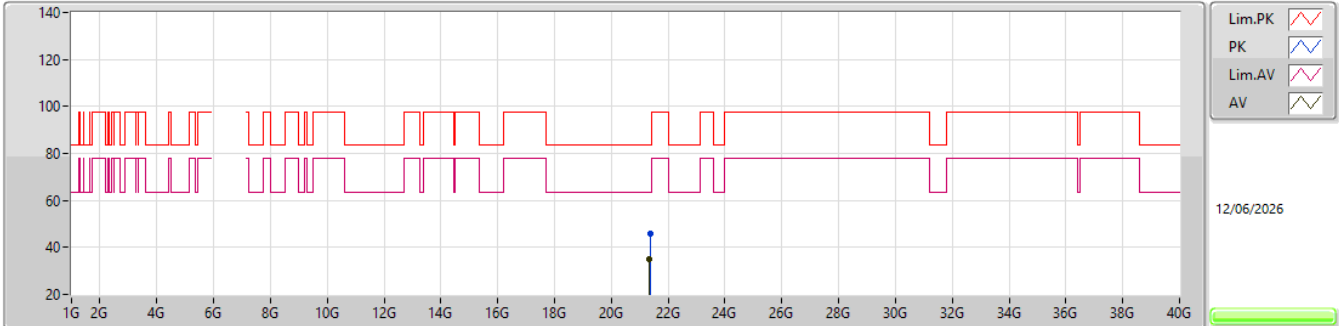


EUT X_4TX
Setting 20
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	21.3906G	45.99	83.54	-37.55	39.06	1	Horizontal	114	2.17	-	38.06	17.65	48.78			
AV	21.317G	34.76	63.54	-28.78	27.98	1	Horizontal	114	2.17	-	37.97	17.62	48.81			

5.925-6.425GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

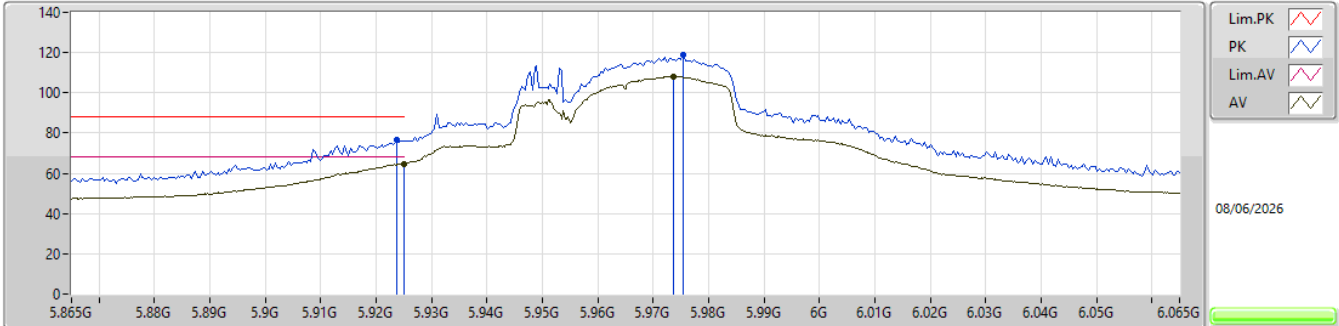


EUT X_4TX
Setting 97
06-E-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9238G	76.42	88.20	-11.78	70.36	3	Vertical	333	2.93	-	32.25	7.57	33.76			
RMS	5.925G	64.70	68.20	-3.50	58.63	3	Vertical	333	2.93	-	32.25	7.58	33.76			
PK	5.9754G	119.02	Inf	-Inf	112.75	3	Vertical	333	2.93	-	32.35	7.67	33.75			
RMS	5.9736G	108.08	Inf	-Inf	101.82	3	Vertical	333	2.93	-	32.35	7.66	33.75			

5.925-6.425GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

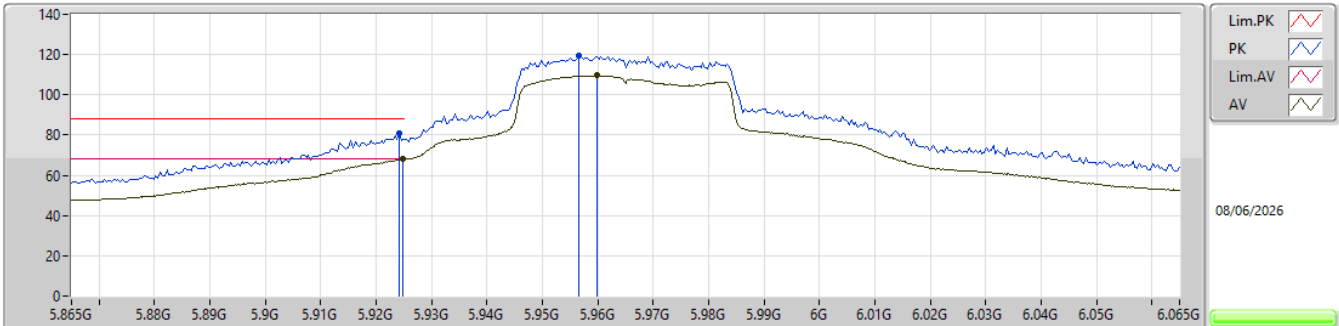


EUT X_4TX
Setting 97
06-E-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.9242G	80.88	88.20	-7.32	74.82	3	Horizontal	320	2.32	-	32.25	7.57	33.76			
RMS	5.9248G	68.01	68.20	-0.19	61.95	3	Horizontal	320	2.32	-	32.25	7.57	33.76			
PK	5.9566G	119.39	Inf	-Inf	113.21	3	Horizontal	320	2.32	-	32.31	7.63	33.76			
RMS	5.9598G	109.62	Inf	-Inf	103.41	3	Horizontal	320	2.32	-	32.32	7.64	33.75			

5.925-6.425GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

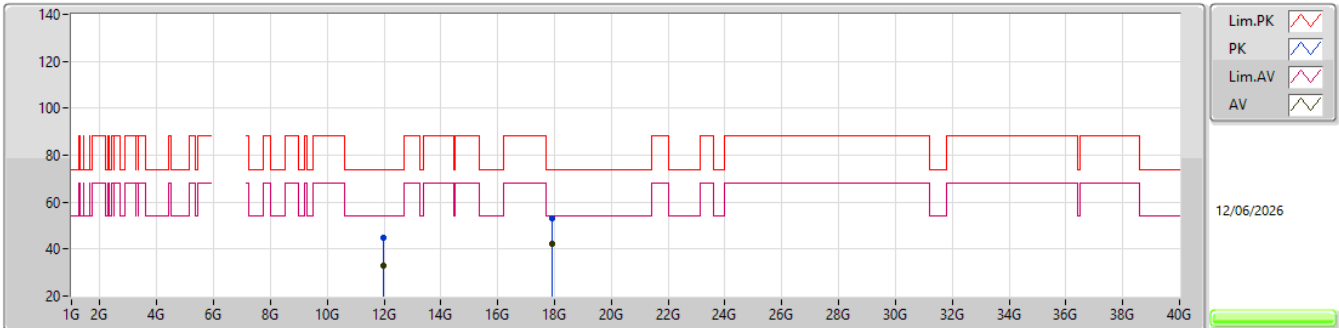


EUT X_4TX
Setting 97
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.9624G	45.03	74.00	-28.97	40.64	3	Vertical	341	1.33	-	39.45	10.90	45.96			
AV	11.9751G	33.07	54.00	-20.93	28.73	3	Vertical	341	1.33	-	39.40	10.90	45.96			
PK	17.8975G	52.97	74.00	-21.03	40.23	3	Vertical	297	2.89	-	44.79	13.23	45.28			
AV	17.9111G	42.20	54.00	-11.80	29.43	3	Vertical	297	2.89	-	44.82	13.23	45.28			

5.925-6.425GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

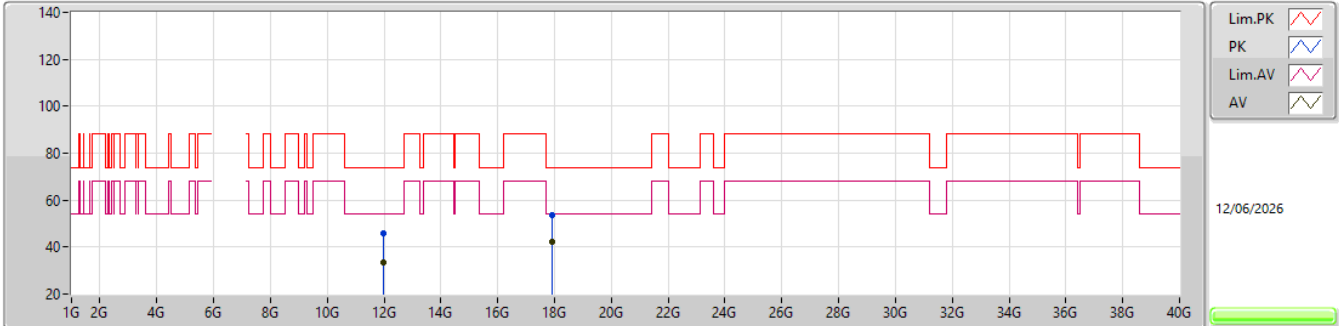


EUT X_4TX
Setting 97
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.9671G	45.85	74.00	-28.15	41.48	3	Horizontal	219	1.08	-	39.43	10.90	45.96				
AV	11.9741G	33.19	54.00	-20.81	28.85	3	Horizontal	219	1.08	-	39.40	10.90	45.96				
PK	17.9218G	53.73	74.00	-20.27	40.93	3	Horizontal	10	2.18	-	44.84	13.24	45.28				
AV	17.9133G	42.34	54.00	-11.66	29.56	3	Horizontal	10	2.18	-	44.83	13.23	45.28				

5.925-6.425GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX


5965MHz_TX

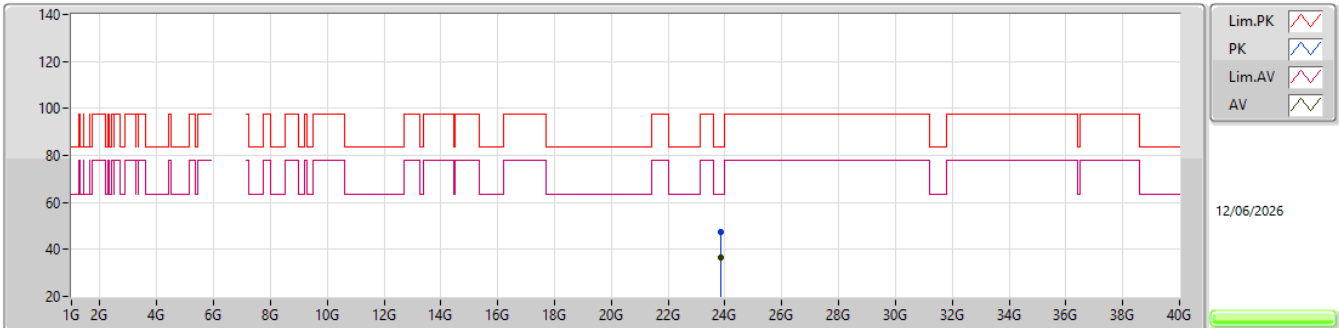EUT X_4TX
Setting 97
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.8624G	47.25	83.54	-36.29	36.95	1	Vertical	356	1.50	-	38.62	18.76	47.08			
AV	23.8598G	36.70	63.54	-26.84	26.40	1	Vertical	356	1.50	-	38.62	18.76	47.08			

5.925-6.425GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

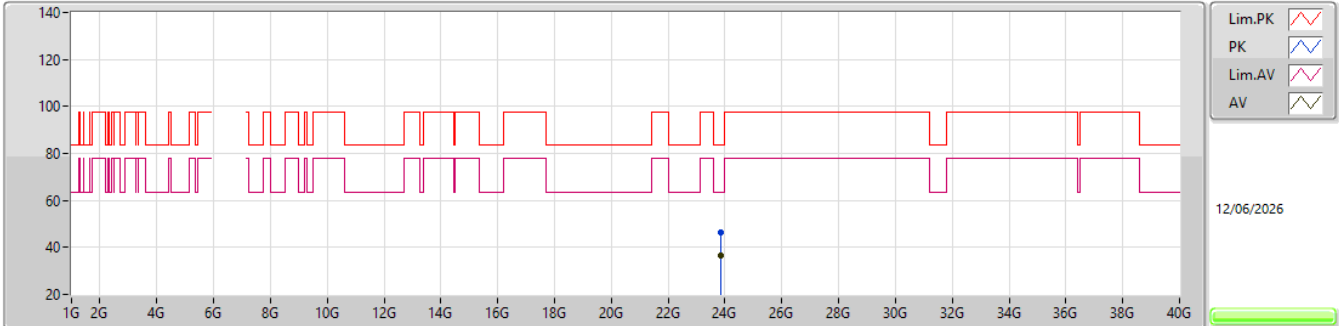


EUT X_4TX
Setting 97
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	23.8538G	46.30	83.54	-37.24	36.01	1	Horizontal	278	2.92	-	38.61	18.76	47.08			
AV	23.8598G	36.52	63.54	-27.02	26.22	1	Horizontal	278	2.92	-	38.62	18.76	47.08			

5.925-6.425GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

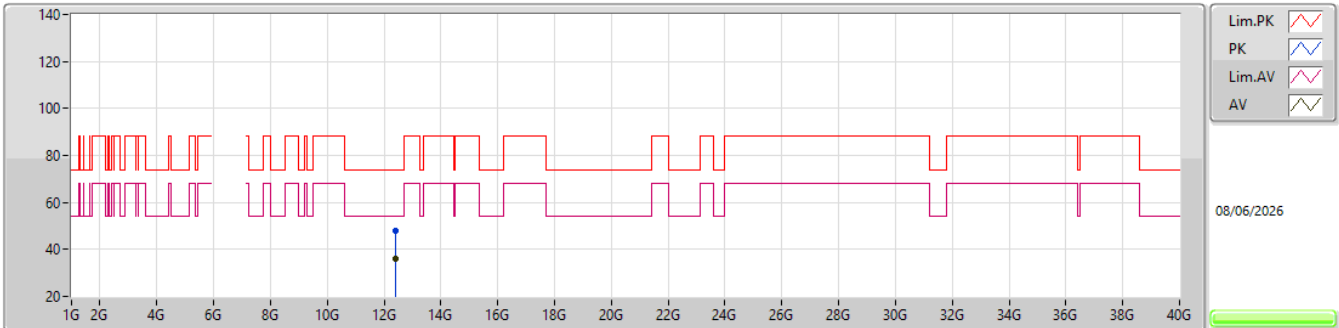


EUT X_4TX
Setting 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.42525G	47.72	74.00	-26.28	43.33	3	Vertical	190	2.62	-	38.90	11.03	45.54			
AV	12.422G	36.04	54.00	-17.96	31.65	3	Vertical	190	2.62	-	38.90	11.03	45.54			

5.925-6.425GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

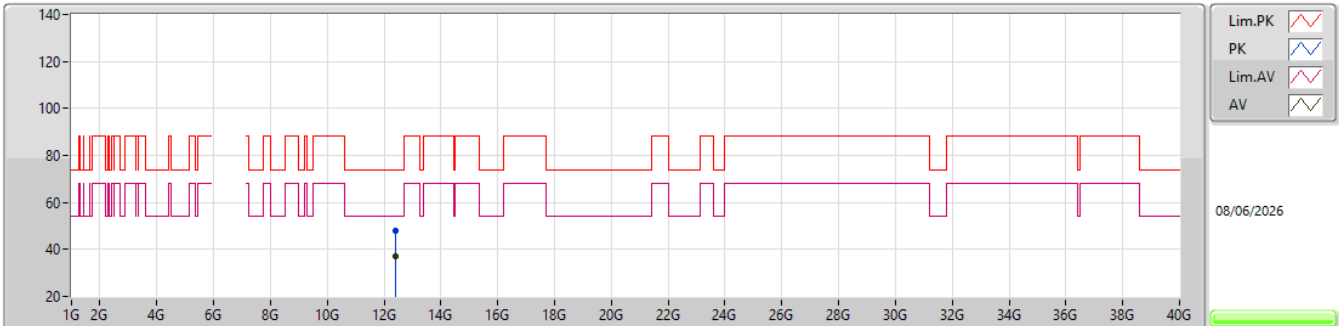


EUT X_4TX
Setting 108
03-Y-L-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	12.40905G	48.11	74.00	-25.89	43.73	3	Horizontal	162	1.67	-	38.90	11.03	45.55			
AV	12.4101G	37.32	54.00	-16.68	32.94	3	Horizontal	162	1.67	-	38.90	11.03	45.55			

5.925-6.425GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

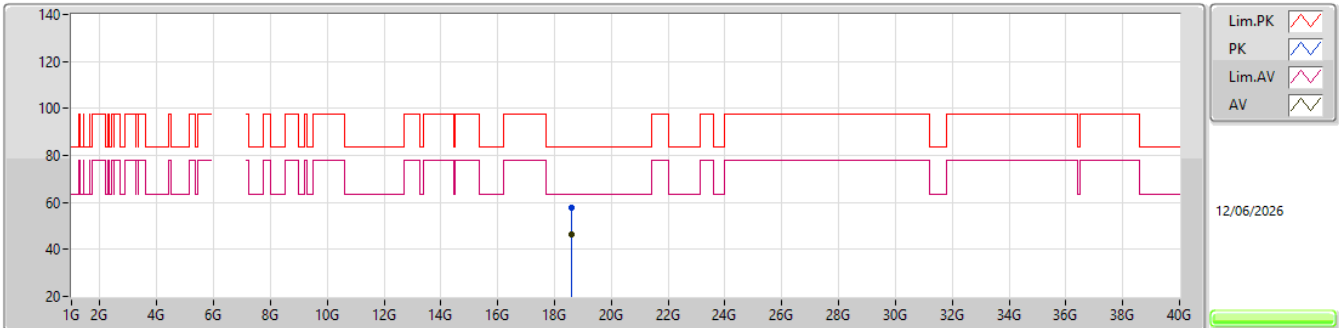


EUT X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.5967G	57.98	83.54	-25.56	53.38	1	Vertical	169	1.44	-	37.69	16.58	49.67			
AV	18.5856G	46.46	63.54	-17.08	41.89	1	Vertical	169	1.44	-	37.67	16.58	49.68			

5.925-6.425GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

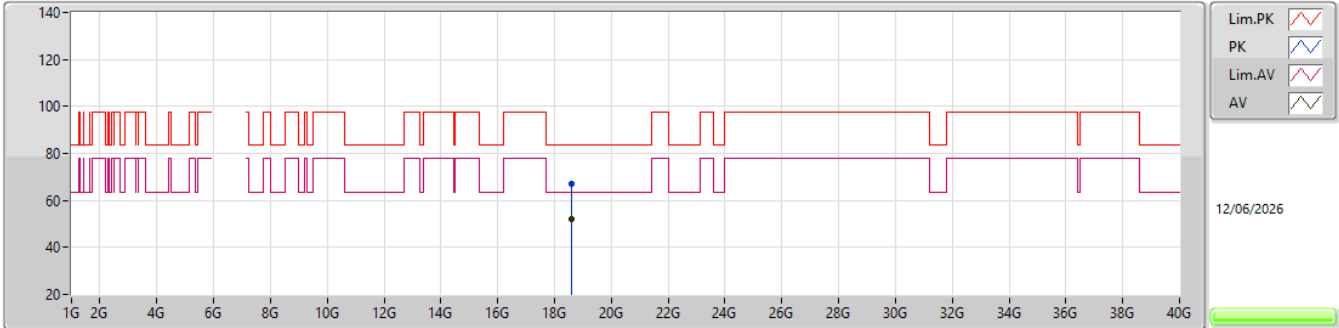


EUT X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	18.5822G	66.82	83.54	-16.72	62.27	1	Horizontal	143	1.71	-	37.66	16.58	49.69			
AV	18.5852G	52.22	63.54	-11.32	47.65	1	Horizontal	143	1.71	-	37.67	16.58	49.68			

5.925-6.425GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6405MHz_TX

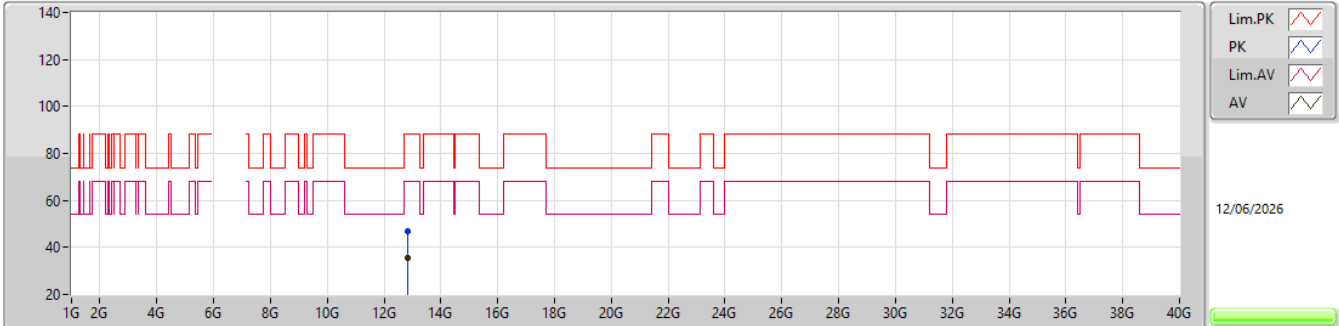


EUT X_4TX
Setting 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.83005G	47.07	88.20	-41.13	42.36	3	Vertical	185	1.20	-	39.32	11.15	45.76			
RMS	12.83205G	35.42	68.20	-32.78	30.71	3	Vertical	185	1.20	-	39.33	11.15	45.77			

5.925-6.425GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6405MHz_TX

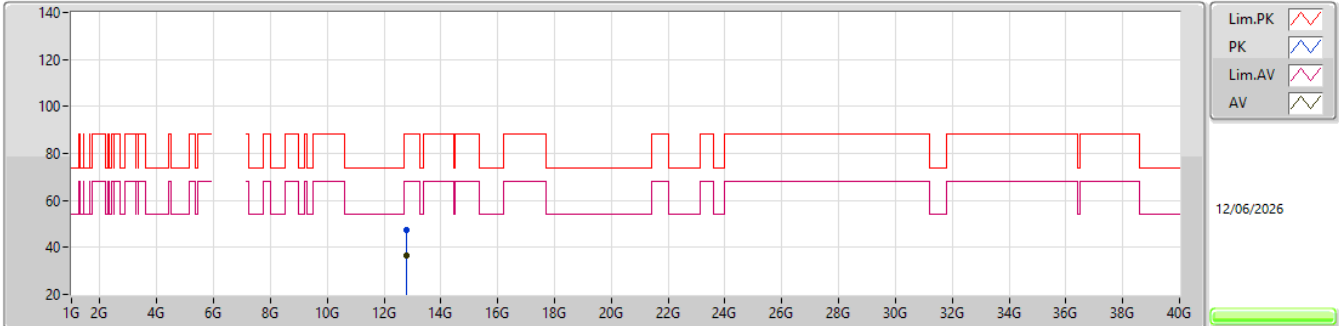


EUT X_4TX
Setting 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.80975G	47.50	88.20	-40.70	42.86	3	Horizontal	154	1.87	-	39.24	11.14	45.74			
RMS	12.79635G	36.59	68.20	-31.61	31.99	3	Horizontal	154	1.87	-	39.19	11.14	45.73			

5.925-6.425GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6405MHz_TX

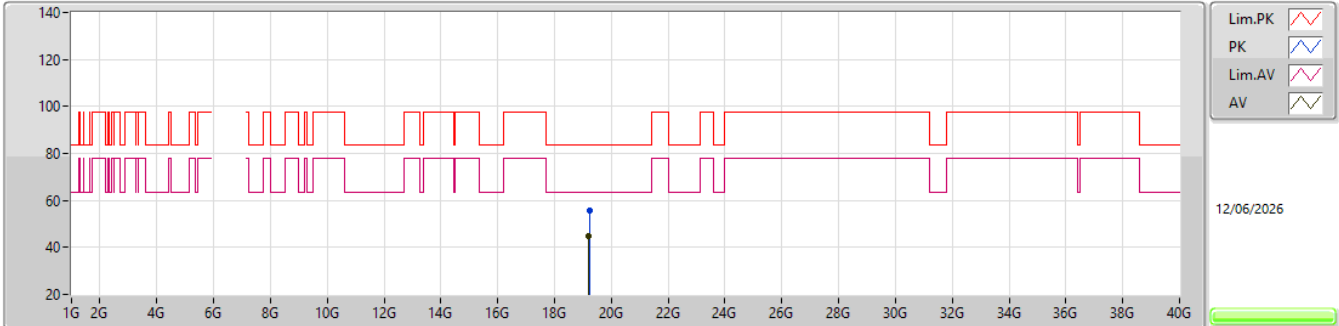


EUT X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.2342G	55.76	83.54	-27.78	50.46	1	Vertical	126	1.95	-	37.84	16.93	49.47			
AV	19.1788G	44.84	63.54	-18.70	39.62	1	Vertical	126	1.95	-	37.78	16.89	49.45			

5.925-6.425GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6405MHz_TX

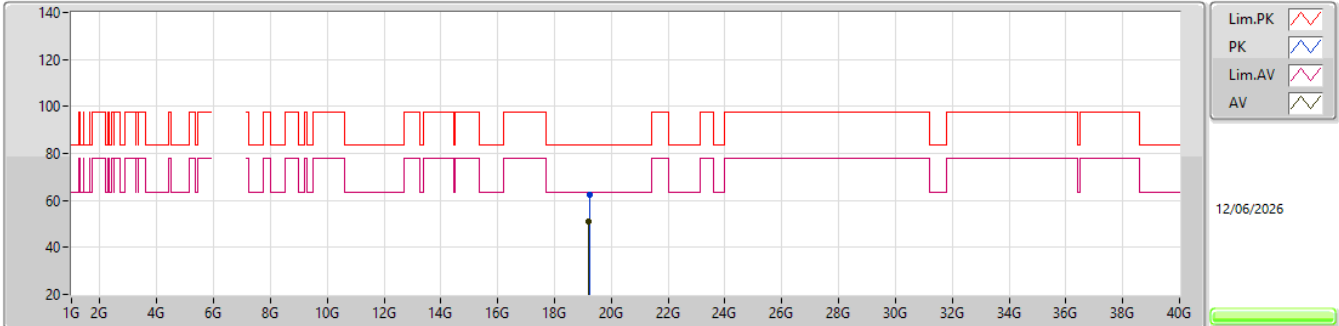


EUT X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.2266G	62.67	83.54	-20.87	57.41	1	Horizontal	151	1.84	-	37.81	16.92	49.47			
AV	19.2168G	51.07	63.54	-12.47	45.84	1	Horizontal	151	1.84	-	37.77	16.92	49.46			

6.425-6.525GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6445MHz_TX

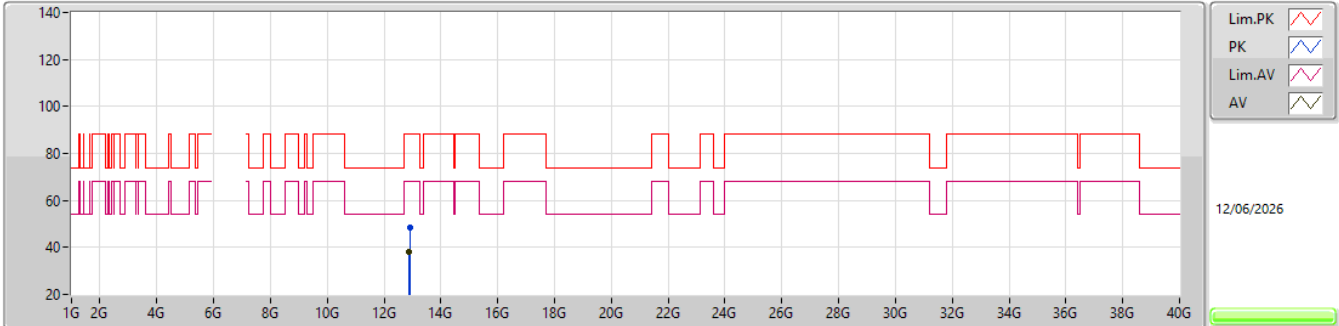


EUT_X_4TX
Setting 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.90225G	48.21	88.20	-39.99	43.37	3	Vertical	194	2.25	-	39.50	11.17	45.83			
RMS	12.8763G	37.90	68.20	-30.30	33.10	3	Vertical	194	2.25	-	39.45	11.16	45.81			

6.425-6.525GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6445MHz_TX

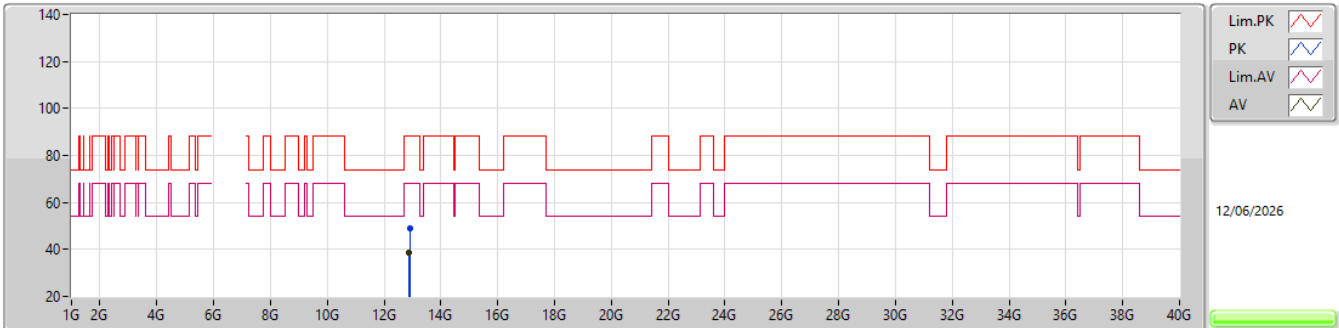


EUT_X_4TX
Setting 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.89745G	48.85	88.20	-39.35	44.02	3	Horizontal	156	1.81	-	39.49	11.17	45.83			
RMS	12.8764G	38.41	68.20	-29.79	33.61	3	Horizontal	156	1.81	-	39.45	11.16	45.81			

6.425-6.525GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6445MHz_TX

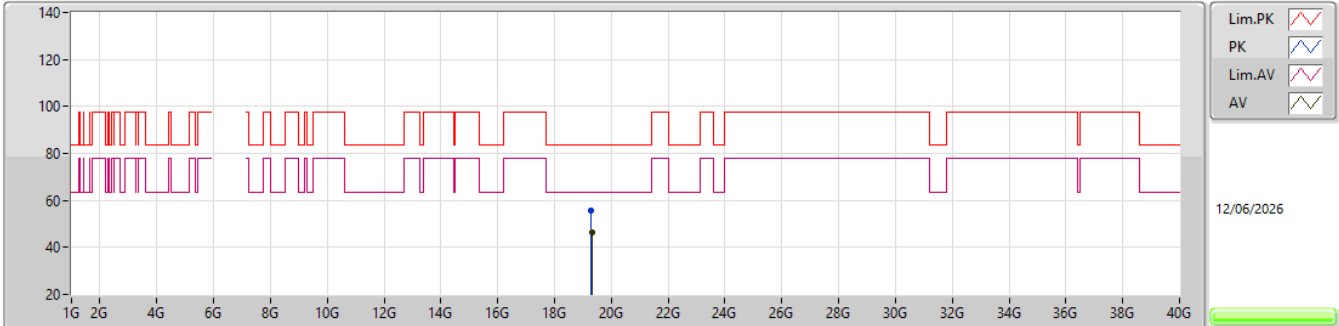


EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.2994G	55.86	83.54	-27.68	50.70	1	Vertical	140	1.50	-	37.70	16.96	49.50			
AV	19.3078G	46.33	63.54	-17.21	41.15	1	Vertical	140	1.50	-	37.72	16.97	49.51			

6.425-6.525GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6445MHz_TX

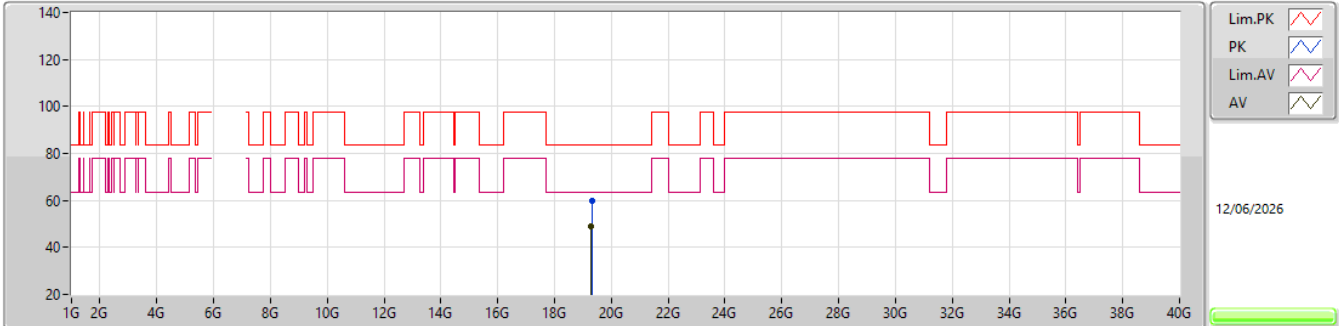


EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.3366G	59.71	83.54	-23.83	54.47	1	Horizontal	142	1.79	-	37.77	16.99	49.52			
AV	19.3006G	48.86	63.54	-14.68	43.70	1	Horizontal	142	1.79	-	37.70	16.96	49.50			

6.425-6.525GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX


6485MHz_TX

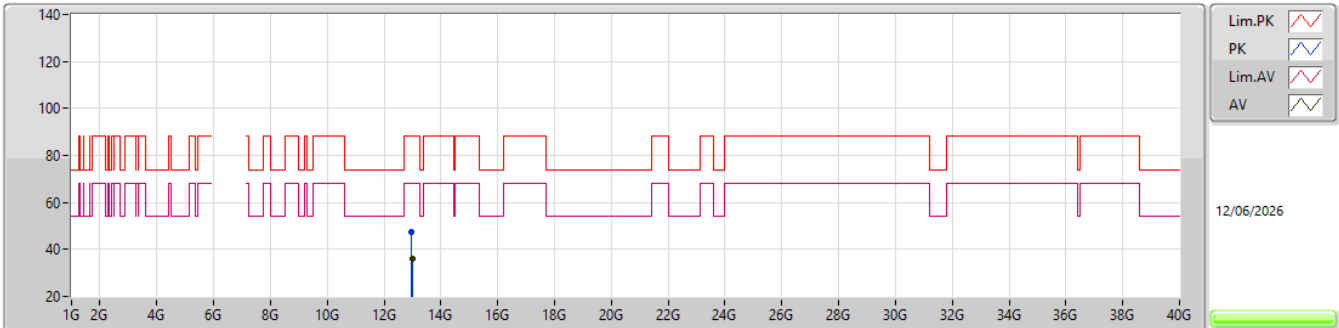EUT_X_4TX
Setting 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.96815G	47.50	88.20	-40.70	42.66	3	Vertical	195	1.30	-	39.54	11.19	45.89			
RMS	12.992G	36.05	68.20	-32.15	31.18	3	Vertical	195	1.30	-	39.58	11.20	45.91			

6.425-6.525GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6485MHz_TX

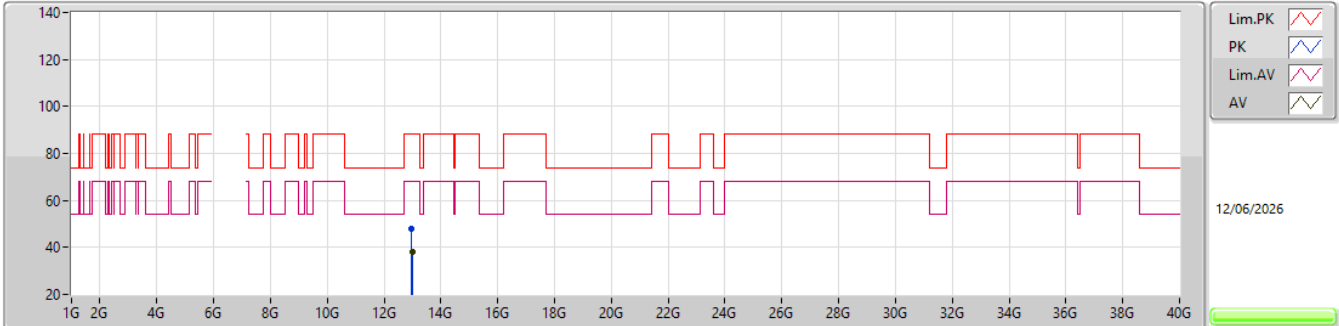


EUT_X_4TX
Setting 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	12.97485G	48.12	88.20	-40.08	43.28	3	Horizontal	313	1.11	-	39.55	11.19	45.90			
RMS	12.99475G	37.96	68.20	-30.24	33.09	3	Horizontal	313	1.11	-	39.59	11.20	45.92			

6.425-6.525GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6485MHz_TX

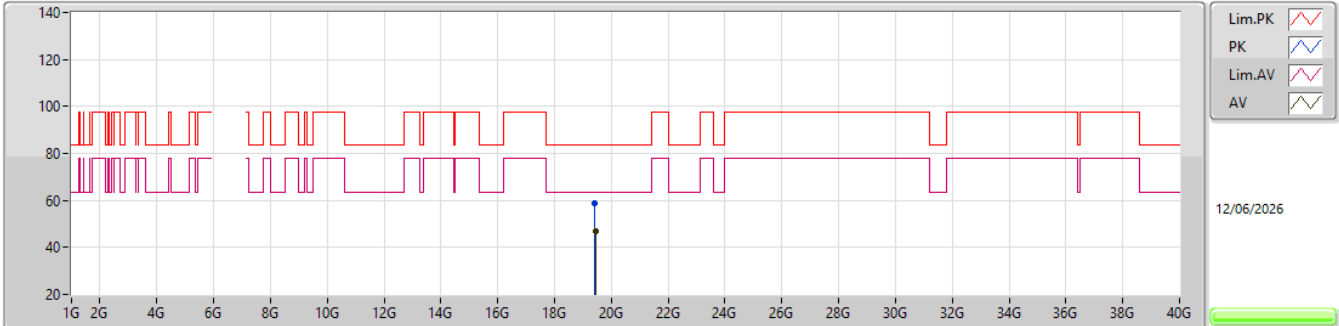


EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.41975G	58.61	83.54	-24.93	53.32	1	Vertical	142	1.50	-	37.82	17.03	49.56			
AV	19.47165G	46.79	63.54	-16.75	41.62	1	Vertical	142	1.50	-	37.70	17.06	49.59			

6.425-6.525GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6485MHz_TX

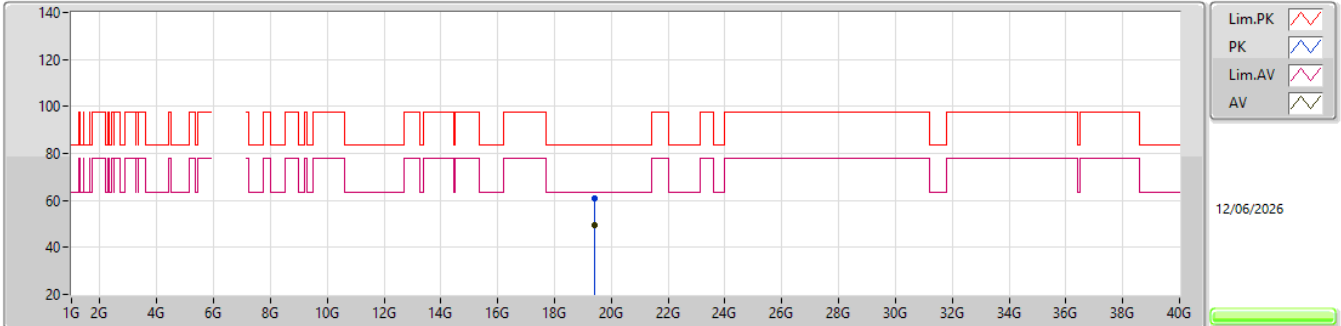


EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.4235G	60.97	83.54	-22.57	55.68	1	Horizontal	152.1	1.53	-	37.81	17.04	49.56			
AV	19.42245G	49.25	63.54	-14.29	43.96	1	Horizontal	152.1	1.53	-	37.81	17.04	49.56			

6.425-6.525GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6525MHz_TX

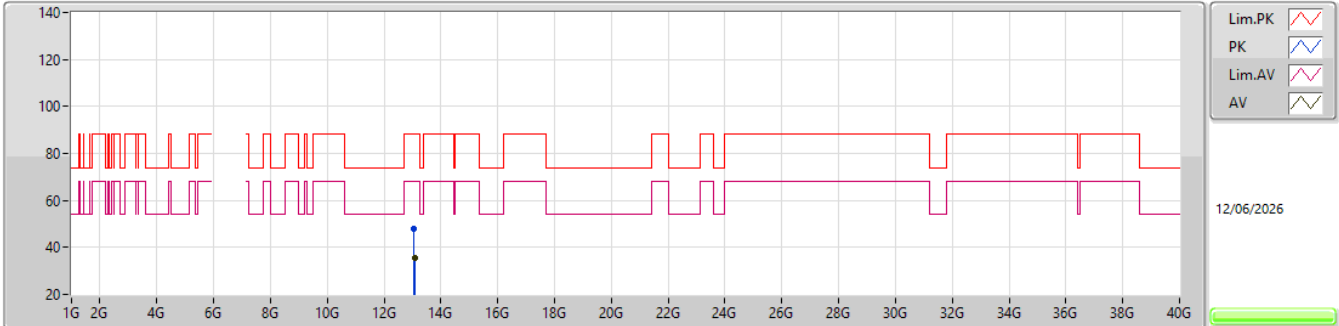


EUT_X_4TX
Setting 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0525G	47.85	88.20	-40.35	42.74	3	Vertical	20	1.16	-	39.71	11.22	45.82			
RMS	13.07385G	35.28	68.20	-32.92	30.10	3	Vertical	20	1.16	-	39.75	11.22	45.79			

6.425-6.525GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6525MHz_TX

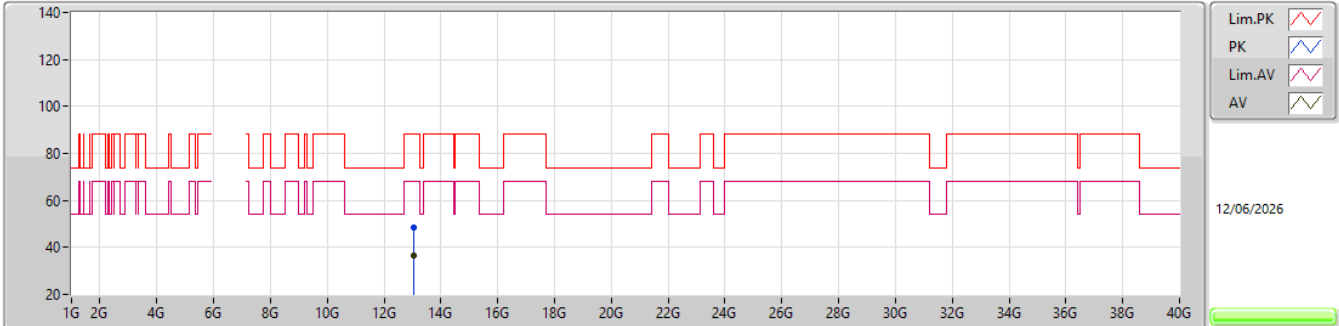


EUT_X_4TX
Setting 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.0289G	48.34	88.20	-39.86	43.34	3	Horizontal	212	1.10	-	39.66	11.21	45.87			
RMS	13.04355G	36.38	68.20	-31.82	31.32	3	Horizontal	212	1.10	-	39.69	11.21	45.84			

6.425-6.525GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6525MHz_TX

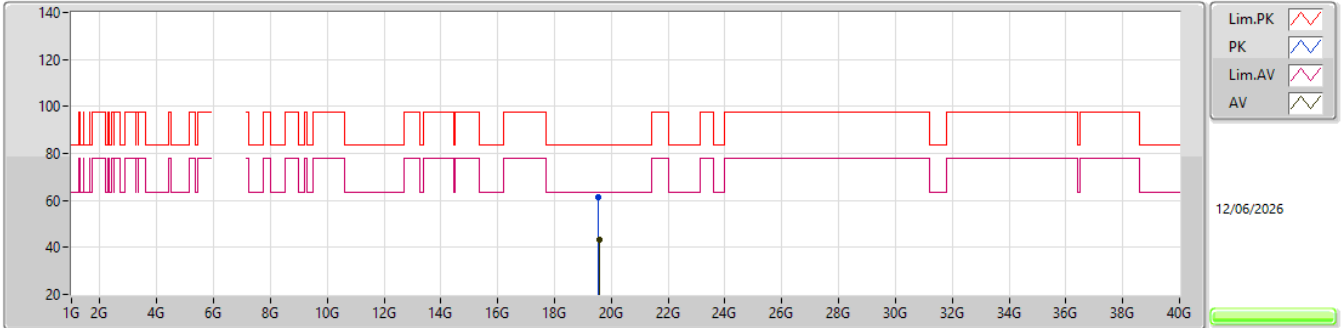


EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.5507G	61.17	83.54	-22.37	55.92	1	Vertical	177	1.52	-	37.70	17.11	49.56			
AV	19.5792G	43.20	63.54	-20.34	37.91	1	Vertical	177	1.52	-	37.70	17.13	49.54			

6.425-6.525GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6525MHz_TX

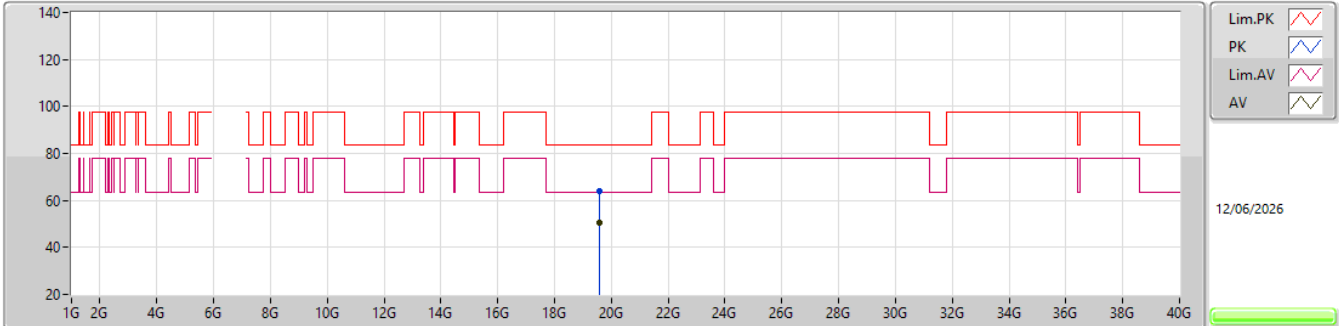


EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.5981G	64.00	83.54	-19.54	58.69	1	Horizontal	133	1.63	-	37.70	17.14	49.53			
AV	19.5855G	50.47	63.54	-13.07	45.18	1	Horizontal	133	1.63	-	37.70	17.13	49.54			

6.525-6.875GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6565MHz_TX

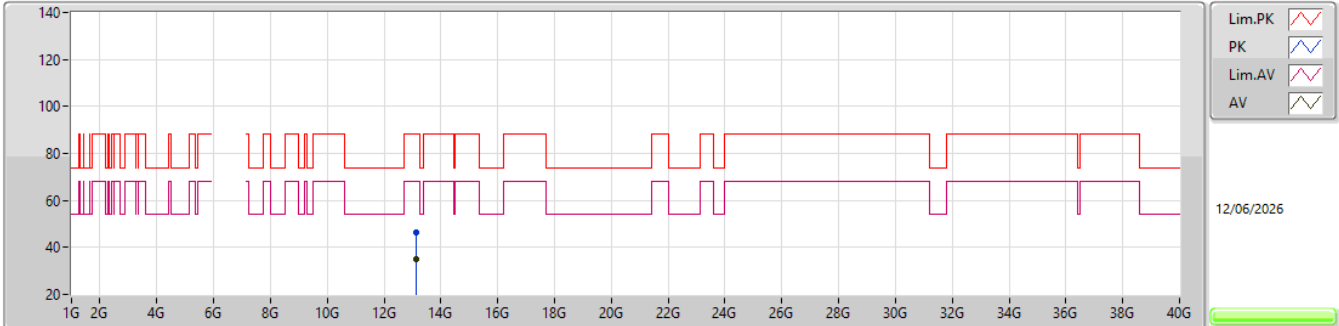


EUT_X_4TX
Setting 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.15235G	46.24	88.20	-41.96	40.84	3	Vertical	197	2.41	-	39.80	11.24	45.64			
RMS	13.1299G	34.99	68.20	-33.21	29.63	3	Vertical	197	2.41	-	39.80	11.24	45.68			

6.525-6.875GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6565MHz_TX

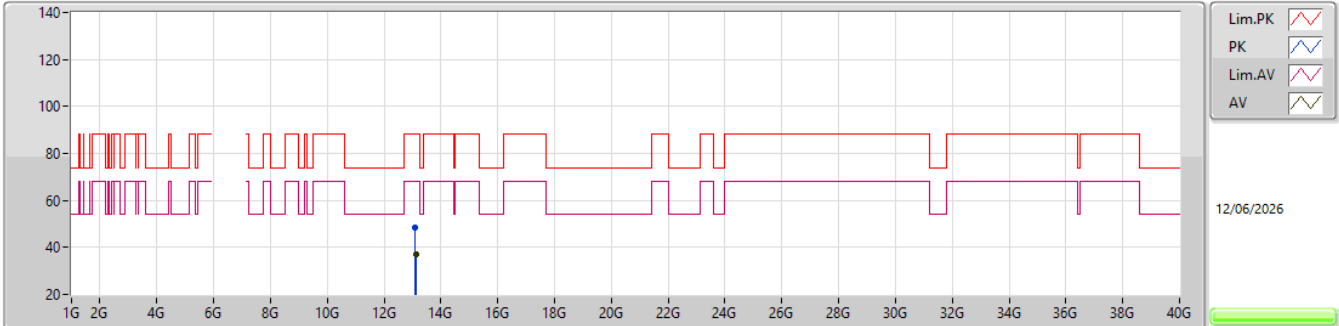


EUT_X_4TX
Setting 108
03-Y-L-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	13.10555G	48.26	88.20	-39.94	42.96	3	Horizontal	143	1.82	-	39.80	11.23	45.73			
RMS	13.11645G	37.18	68.20	-31.02	31.86	3	Horizontal	143	1.82	-	39.80	11.23	45.71			

6.525-6.875GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6565MHz_TX

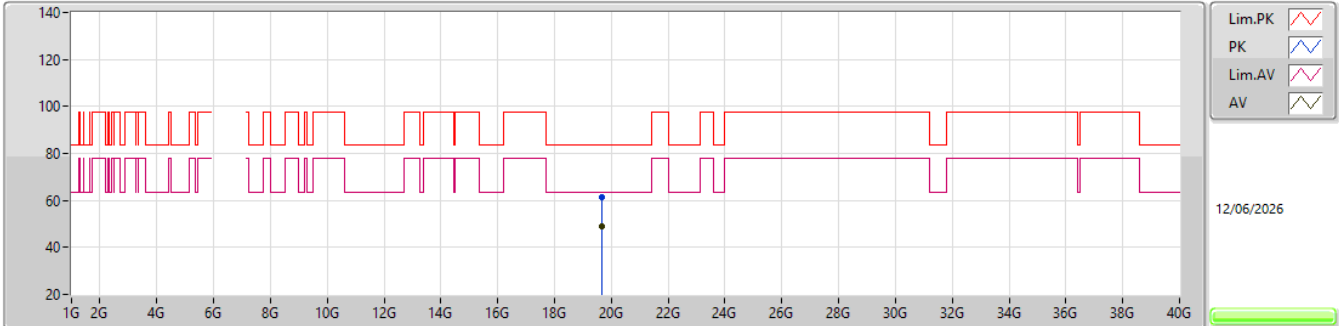


EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.6815G	61.24	83.54	-22.30	55.79	1	Vertical	145.1	1.50	-	37.73	17.19	49.47			
AV	19.6848G	48.96	63.54	-14.58	43.50	1	Vertical	145.1	1.50	-	37.74	17.19	49.47			

6.525-6.875GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6565MHz_TX

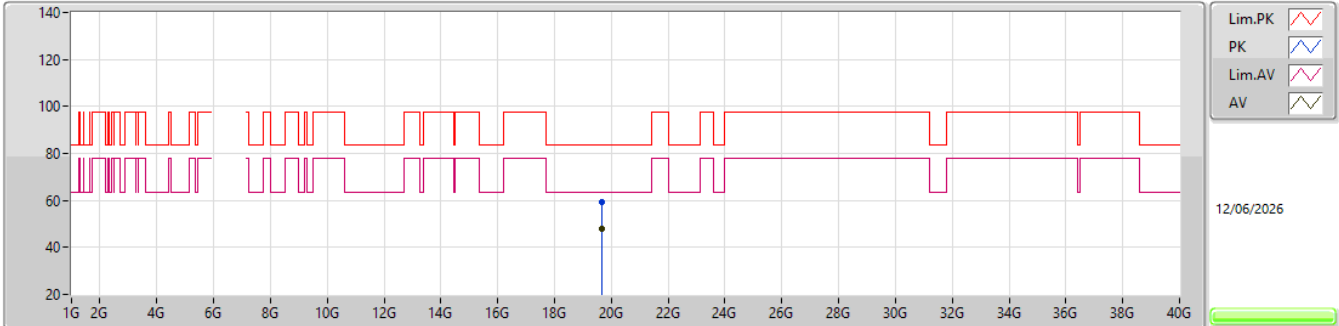


EUT_X_4TX
Setting 108
03-Y-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	19.6647G	59.47	83.54	-24.07	54.11	1	Horizontal	227	1.50	-	37.66	17.18	49.48			
AV	19.6638G	48.15	63.54	-15.39	42.79	1	Horizontal	227	1.50	-	37.66	17.18	49.48			

6.525-6.875GHz_802.11ax HEW40-BF_Nss1,(MCS0)_4TX

6685MHz_TX

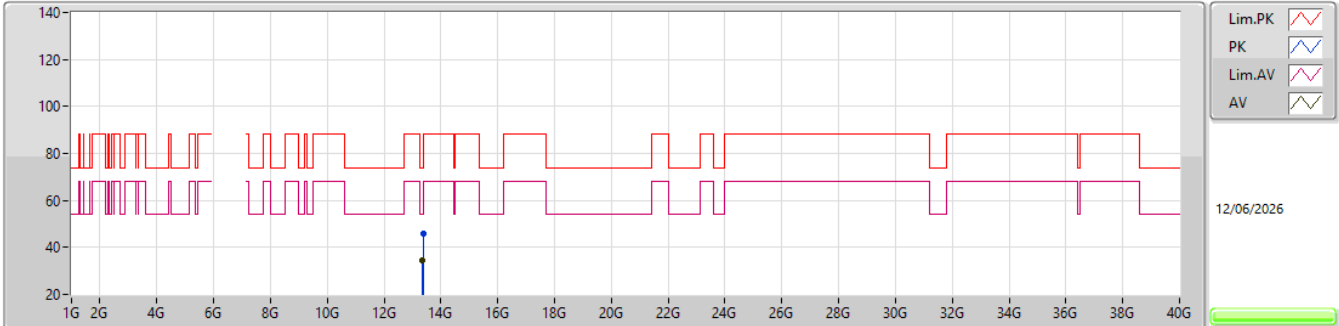

EUT_X_4TX
Setting 108
03-Y-L-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	13.38505G	45.61	74.00	-28.39	39.18	3	Vertical	135	2.86	-	40.34	11.31	45.22			
RMS	13.34595G	34.23	54.00	-19.77	28.01	3	Vertical	135	2.86	-	40.21	11.30	45.29			