



EMC Measurement/Technical Report

on

Motorola Bluetooth™ Development Kit
BTDVK100

Report Reference: 4_DIGI_0502_ERF_FCCa

7 Layers AG
Borsigstr. 11
40880 Ratingen
Germany

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the testing laboratory.

Registergericht - registered in:
Ratingen, HRB 3264
Aufsichtsratsvorsitzende -
Chairman of the Supervisory Board:
Dr. Sabine Grobecker

Vorstand - Board of Directors:
Dr. Wolfgang Dahm
Dr. Hans-Jürgen Meckelburg

7 layers AG, Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
<http://www.7Layers.com>



Table of Contents

0. Summary	3
0.1 Technical Report Summary	3
0.2 Measurement Summary	4
1. Administrative Data	6
1.1 Testing Laboratory	6
1.2 Project Data	6
1.3 Applicant Data	6
1.4 Manufacturer Data	6
2. Product Labeling	7
2.1 FCC ID Label	7
2.2 Location of Label on the EUT	7
3. Testobject Data	8
3.1 General EUT Description	8
3.2 EUT Main Components	9
3.3 Ancillary Equipment	9
3.4 EUT Setups	9
3.5 Operating Modes	10
4. Measurement Results	11
Conducted Emissions	
4.1 Occupied Bandwidth	11
4.2 Output Power	14
4.3 Spurious Emissions Conducted	17
4.4 Spurious Emissions Radiated	19
4.5 Dwell Time	23
4.6 Power Density	25
4.7 Channel Separation	27
4.8 Processing Gain	28
5. Testequipment	29
6. Foto Report	31
7. Setup Drawings	33
8. Annex	34
Measurement plots	25 Pages



0 Summary

0.1 Technical Report Summary

Type of Authorization:

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum)

Applicable FCC Rules:

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 0 to 19 (10-1-98 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification Sections

Part 15, Subpart C - Intentional Radiators

- § 15.201 Equipment authorization requirement

- § 15.203 Antenna requirements

- § 15.207 Conducted limits

- § 15.209 Radiated emission limits; general requirements

- § 15.247 Operation within the bands 902-928 MHz, 2400-2483,5 MHz
and 5725-5850 MHz

Note:

The tests were selected and performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000

Summary Test Results:

The equipment under test fulfilled the requirements of the applied FCC rules.



0.2 Measurement Summary

FCC Part 15, Subpart C § 15.247 (a) (1) (ii)

Occupied Bandwidth

The measurement was performed according to ANSI C63.4 1992

OP Mode	Setup	Port	Final Result
op-mode 1	setup 1	temporary antenna connector	passed
op-mode 2	setup 1	temporary antenna connector	passed
op-mode 3	setup 1	temporary antenna connector	passed
op-mode 4	setup 1	temporary antenna connector	passed
op-mode 5	setup 1	temporary antenna connector	passed

FCC Part 15, Subpart C § 15.247 (b) (1)

Peak Power Output

The measurement was performed according to FCC §15.31 10-1-1998

OP Mode	Setup	Port	Final Result
op-mode 1	setup 1	temporary antenna connector	passed
op-mode 2	setup 1	temporary antenna connector	passed
op-mode 3	setup 1	temporary antenna connector	passed
op-mode 4	setup 1	temporary antenna connector	passed
op-mode 5	setup 1	temporary antenna connector	passed

FCC Part 15, Subpart C § 15.247 (c)

Spurious RF Conducted Emissions

The measurement was performed according to FCC §15.31 10-1-1998

OP Mode	Setup	Port	Final Result
op-mode 1	setup 1	temporary antenna connector	passed
op-mode 2	setup 1	temporary antenna connector	passed
op-mode 3	setup 1	temporary antenna connector	passed

FCC Part 15, Subpart C § 15.247 (c), §15.35 (b), § 15.209

Spurious Radiated Emissions

The measurement was performed according to ANSI C63.4 1992

OP Mode	Setup	Port	Final Result
op-mode 1	setup 2	enclosure	passed
op-mode 2	setup 2	enclosure	passed
op-mode 3	setup 2	enclosure	passed

FCC Part 15, Subpart C § 15.247 (g)

Dwell Time

The measurement was performed according to FCC §15.31 10-1-1998

OP Mode	Setup	Port	Final Result
op-mode 4	setup 1	temporary antenna connector	passed
op-mode 5	setup 1	temporary antenna connector	passed

FCC Part 15, Subpart C § 15.247 (g)

Power Density

The measurement was performed according to FCC §15.31 10-1-1998

OP Mode	Setup	Port	Final Result
op-mode 4	setup 1	temporary antenna connector	passed
op-mode 5	setup 1	temporary antenna connector	passed

FCC Part 15, Subpart C § 15.247 (a) (1)**Channel Separation**

The measurement was performed according to FCC §15.31 10-1-1998

OP Mode	Setup	Port	Final Result
op-mode 6	setup 1	temporary antenna connector	passed

FCC Part 15, Subpart C § 15.247 (f)**Processing Gain**

The measurement was performed according to FCC §15.31 10-1-1998

OP Mode	Setup	Port	Final Result
see annex	see annex	temporary antenna connector	passed

Responsible for
Accreditation Scope: _____

Responsible
for Test Report: _____

1. Administrative Data

1.1 Testing Laboratory

Company Name: 7 Layers AG
Address: Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted in a letter dated February 07, 2000 under the registration number 96716.

The test facility is also accredited by the following accreditation organisation:

- Deutscher Akkreditierungs Rat DAR-Registration no. TTI-P-G 178/99-10

Responsible for Accreditation Scope: Dipl.-Ing Bernhard Retka
Dipl.-Ing Arndt Stöcker

1.2 Project Data

Responsible for Test Report: Dipl. Ing. Thomas Hoell
Receipt of EUT: 03.06.2002
Date of Test(s): 03.06.-11.06.2002
Date of Report: 13.06.2002

1.3 Applicant Data

Company Name: Digianswer A/S
Address: Skalhuse 5

DK-9240 Nibe
Denmark
Contact Person: Tom Ringtved

1.4 Manufacturer Data

Company Name: please see Applicant data
Address:

Contact Person:

2.0 Product Labeling

2.1 FCC ID Label:

At the time of the test report there was no FCC label available.

2.2 Location of Label on the EUT:

see above

3. Testobject Data

3.1 General EUT Description

Equipment under Test:	Motorola Bluetooth™ Development Kit
Type Designation:	BTDVK100
Kind of Device: (optional)	Bluetooth transceiver
Voltage Type:	DC
Voltage level:	5 V

General product description:

Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices.

Bluetooth operates in the unlicensed ISM Band at 2.4 GHz. In the US a band of 83.5 MHz width is available. In this band, 79 RF channels spaced 1MHz apart are defined. The channel is represented by a pseudo-random hopping sequence through the 79 channels. The channel is divided into time slots, with a nominal slot length of 625µs, where each slot corresponds to different RF hop frequencies. The nominal hop rate is 1600 hops/s. All frequencies are equally used. The average time of occupancy is 0.3797 s within a 30 second period. The symbol rate on the channel is 1 Ms/s.

The EUT provides the following ports:

Ports

temporary antenna connector
Enclosure

The main components of EUT are listed and described in Chapter 3.2

3.2 EUT Main components:

Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	Date of Receipt
EUT A	Bluetooth Development Kit	BTDVK100	EUT code 34070a01	DIG488-5		03.06.2002
EUT A is equipped with an internal antenna.						
EUT B	Bluetooth Development Kit	BTDVK100	EUT code 34070b01	DIG488-5		03.06.2002
EUT B is equipped with a temporary antenna connector.						

NOTE: The short description is used to simplify the identification of the EUT in this test report

3.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide additional operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it.

Short Description	Equipment under Test	Type Designation	HW Status	SW Status	Serial No.	FCC Id
AE 1	power supply	Egston N1EFS	-	-	-	-

3.4 EUT Setups

This chapter describes the combination of EUT's and ancillary equipment used for testing.

Setup No.	Combination of EUTs	Description
setup 1	EUT A + AE 1	
setup 2	EUT B + AE 1	

3.5 Operating Modes

This chapter describes the operating modes of the EUT's used for testing.

Op. Mode	Description of Operating Modes		Remarks
op-mode 1	TX mode, the EUT transmits continuously on 2402 MHz		
op-mode 2	TX mode, the EUT transmits continuously on 2441 MHz		
op-mode 3	TX mode, the EUT transmits continuously on 2480 MHz		
op-mode 4	inquiry		
op-mode 5	paging		
op-mode 6	10 neighbouring channels	The EUT is set to transmit on ten neighbouring channels one after the other to see the channel separation.	
see annex	see annex	setup for processing gain test	

4. Test Results

4. 1 Occupied Bandwidth

Standard FCC Part 15, 10-1-98
Subpart C

The test was performed according to: ANSI C63.4 1992

4. 1 .1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4-1992.

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) occupied bandwidth.

The resolution bandwidth for measuring the reference level and the occupied bandwidth was 10 kHz.

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

4. 1 .2 Test Limits

- FCC Part 15, Subpart C, §15.247 (a) (1) (ii)
- (1) Frequency hopping systems operating in the 2400 - 2483.5 MHz band should use at least 75 hopping frequencies.
 - (2) The average time of occupancy on any frequency should not be greater than 0.4 seconds within a 30 second period.
 - (3) The maximum 20 dB bandwidth of the hopping channel is 1MHz.

4. 1 .3 Test Protocol

Temperature: 26 °C
Air Pressure: 1015 hPa
Humidity: 35 %

Op. Mode	Setup	Port	Test Parameter
op-mode 1	setup 1	temporary antenna connector	

20 dB Bandwidth MHz	Remarks
0,924	none

Remark: Please see annex for the measurement plot.

Temperature: 26 °C
Air Pressure: 1015 hPa
Humidity: 35 %

Op. Mode	Setup	Port	Test Parameter
op-mode 2	setup 1	temporary antenna connector	

20 dB Bandwidth MHz	Remarks
0,924	none

Remark: Please see annex for the measurement plot.

Temperature: 26 °C
Air Pressure: 1015 hPa
Humidity: 35 %

Op. Mode	Setup	Port	Test Parameter
op-mode 3	setup 1	temporary antenna connector	

20 dB Bandwidth MHz	Remarks
0,924	none

Remark: Please see annex for the measurement plot.

Temperature: 25 °C
Air Pressure: 1020 hPa
Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 4	setup 1	temporary antenna connector	

20 dB Bandwidth MHz	Remarks
0,618	none

Remark: Please see annex for the measurement plot.

Temperature: 25 °C
Air Pressure: 1020 hPa
Humidity: 25 %

Op. Mode	Setup	Port	Test Parameter
op-mode 5	setup 1	temporary antenna connector	

20 dB Bandwidth MHz	Remarks
0,718	none

Remark: Please see annex for the measurement plot.

4.1 .4 Test result: Occupied Bandwidth

FCC Part 15, Subpart (	Op. Mode	Setup	Port	Result
	op-mode 1	setup 1	temporary antenna connector	passed
	op-mode 2	setup 1	temporary antenna connector	passed
	op-mode 3	setup 1	temporary antenna connector	passed
	op-mode 4	setup 1	temporary antenna connector	passed
	op-mode 5	setup 1	temporary antenna connector	passed

4. 2 Peak Power Output

Standard FCC Part 15, 10-1-98
Subpart C

The test was performed according to: FCC §15.31 10-1-1998

4. 2 .1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The resolution bandwidth for measuring the output power was 1 MHz.

The reference level of the spectrum analyser was set equal to the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

4. 2 .2 Test Limits

FCC Part 15, Subpart C, §15.247 (b) (1)
(1) For frequency hopping systems operating in the band 2400 - 2483,5 MHz or 5725 - 5850 MHz and for all direct sequence systems: 1 Watt

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

==> Maximum Output Power: 30 dBm

4. 2 .3 Test Protocol

Temperature: 25 °C

Air Pressure: 1015 hPa

Humidity: 36 %

Op. Mode	Setup	Port	Test Parameter
op-mode 1	setup 1	temporary antenna connector	

Output Power dBm	Remarks
0,86	The EIRP including antenna gain (3.5 dBi) is 4,36 dBm

Remark: Please see annex for the measurement plot.

Temperature: 25 °C
Air Pressure: 1015 hPa
Humidity: 36 %

Op. Mode	Setup	Port	Test Parameter
op-mode 2	setup 1	temporary antenna connector	

Output Power dBm	Remarks
1,14	The EIRP including antenna gain (3.5 dBi) is 4,64 dBm

Remark: Please see annex for the measurement plot.

Temperature: 25 °C
Air Pressure: 1015 hPa
Humidity: 36 %

Op. Mode	Setup	Port	Test Parameter
op-mode 3	setup 1	temporary antenna connector	

Output Power dBm	Remarks
0,52	The EIRP including antenna gain (3.5 dBi) is 4,02 dBm

Remark: Please see annex for the measurement plot.

Temperature: 25 °C
Air Pressure: 1020 hPa
Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 4	setup 1	temporary antenna connector	

Output Power dBm	Remarks
-24,39	The EIRP including antenna gain (3.5 dBi) is -20,89 dBm

Remark: Please see annex for the measurement plot.

Temperature: 25 °C
Air Pressure: 1020 hPa
Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 5	setup 1	temporary antenna connector	

Output Power dBm	Remarks
-24,11	The EIRP including antenna gain (3.5 dBi) is -20,61 dBm

Remark: Please see annex for the measurement plot.

4.2 .4 Test result: Peak Power Output

FCC Part 15, Subpart (	Op. Mode	Setup	Port	Result
	op-mode 1	setup 1	temporary antenna connector	passed
	op-mode 2	setup 1	temporary antenna connector	passed
	op-mode 3	setup 1	temporary antenna connector	passed
	op-mode 4	setup 1	temporary antenna connector	passed
	op-mode 5	setup 1	temporary antenna connector	passed

4. 3 Spurious RF Conducted Emissions

Standard FCC Part 15, 10-1-98
Subpart C

The test was performed according to: FCC §15.31 10-1-1998

4. 3 .1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements

The EUT was connected to spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

Analyser settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 100 kHz
- Sweep Time: Coupled

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

4. 3 .2 Test Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

4. 3 .3 Test Protocol

Temperature: 25 °C

Air Pressure: 1015 hPa

Humidity: 36 %

Op. Mode	Setup	Port	Test Parameter
op-mode 1	setup 1	temporary antenna connector	

Frequency MHz	Measured Value dBm	Correction Factor dB	Corrected Value dBm	Reference Value dBm	Limit dBm	Delta to Limit dB
4783,80			-52,13	-0,15	-20,15	31,98
6935,50			-57,54	-0,15	-20,15	37,39
9587,60			-56,94	-0,15	-20,15	36,79

Remark: No further spurious emissions were found. Please see annex for the measurement plot.

Temperature: 25°C
Air Pressure: 1015 hPa
Humidity: 36 %

Op. Mode Setup Port Test Parameter

op-mode 2 setup 1 temporary
antenna
connector

Frequency MHz	Measured Value dBm	Correction Factor dB	Corrected Value dBm	Reference Value dBm	Limit dBm	Delta to Limit dB
4883,80			-46,91	1,03	-18,97	31,82
6935,50			-57,62	1,03	-18,97	38,65

Remark: No further spurious emissions were found. Please see annex for the measurement plot.

Temperature: 25 °C
Air Pressure: 1015 hPa
Humidity: 36 %

Op. Mode Setup Port Test Parameter

op-mode 3 setup 1 temporary
antenna
connector

Frequency MHz	Measured Value dBm	Correction Factor dB	Corrected Value dBm	Reference Value dBm	Limit dBm	Delta to Limit dB
4933,90			-45,63	0,37	-19,63	26,00
6935,50			-58,23	0,37	-19,63	38,60

Remark: No further spurious emissions were found. Please see annex for the measurement plot.

4.3 .4 Test result: Spurious RF Conducted Emissions

FCC Part 15, Subpart (				Op. Mode	Setup	Port	Result
				op-mode 1	setup 1	temporary antenna connector	passed
				op-mode 2	setup 1	temporary antenna connector	passed
				op-mode 3	setup 1	temporary antenna connector	passed

4. 4 **Spurious Radiated Emissions**

Standard FCC Part 15, 10-1-98
 Subpart C

The test was performed according to: ANSI C63.4 1992

4. 4 .1 **Test Description**

The test set-up was made in accordance to the general provisions of ANSI C63.4-1992.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The test was performed at an EUT to receiving antenna distance of 3m.

The radiated emissions measurements was made in a typical installation configuration.

The measurement procedure consists of four steps. It is implemented into EMI test software ES-K1 from R&S.

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 µs
- Turntable angle range: –180 to 180 °
- Turntable stepsize: 90°
- Height variation range: 1 – 3m
- Height variation stepsize: 2m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. With this data, the test system performs (to reduce the number of final measurements) a data reduction with the following parameters:

- Offset for acceptance analysis: Limit line – 10 dB
- Maximum number of final measurements: 12

Step 2:

With the frequencies determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

Settings for step 2:

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: –180 to 180 °
- Turntable stepsize: 45°
- Height variation range: 1 – 4m
- Height variation stepsize: 0,5m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0,5m

Step 3:

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency the turntable azimuth and antenna height, which was determined in step 3, will be adjusted.

The turntable azimuth will be slowly varied by +/- 22,5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/- 25 cm around the antenna height determined in step 3. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

Settings for step 3:

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: -22,5° to + 22,5 ° around the value determined in step 2
- Height variation range: -0,25m to + 0,25m around the value determined in step 2

Step 4:

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak(< 1GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1s

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1m. The results were extrapolated by the extrapolation factor of 20 dB/decade (invers linear-distance for field strength measurements, invers linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18-25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

Detector: Peak, Average

RBW = VBW = 1 MHz, above 7 GHz 100 kHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

4. 4 .2 Test Limits

FCC Part 15, Subpart C, §15.247 (c)

(2) A radiated emission test applies to harmonic/spurs that fall in the restricted bands as listed in § 15.205(a). The maximum permitted QP (< 1GHz; and average (> 1GHz) field strength is listed in § 15.209(a).

(3)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency Range (MHz): Class B Limit (dBµV/m)

30 – 88 40,0

88 – 216 43,5

216 – 960 46,0

above 960 54,0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)

4. 4 .3 Test Protocol

Temperature: 26 °C

Air Pressure: 1015 hPa

Humidity: 36 %

Op. Mode	Setup	Port	Test Parameter					
op-mode 1	setup 2	enclosure						
Polarisation	Frequency MHz	Corrected Value dBµV/m			Limit QP/AV dBµV/m	Limit Peak dBµV/m	Delta to AV/QP Limit/dB	Delta to Peak Limit dB
		QP	Peak	AV				
Vertical	4806,00		55,88	34,65	54,00	74,00	19,35	18,12

Remark: No further spurious emission in the range 20 dB below the limit found.

Temperature: 26 °C
Air Pressure: 1020 hPa
Humidity: 36 %

Op. Mode **Setup** **Port** **Test Parameter**
op-mode 2 setup 2 enclosure

Polarisation	Frequency MHz	Corrected Value dBµV/m			Limit QP/AV dBµV/m	Limit Peak dBµV/m	Delta to AV/QP Limit/dB	Delta to Peak Limit dB
		QP	Peak	AV				
Vertical	4882,00		56,14	35,10	54,00	74,00	18,90	17,86
Vertical	7323,00		53,91	33,82	54,00	74,00	20,18	20,09
Vertical	12206,00		51,64	33,56	54,00	74,00	20,44	22,36
Vertical	14483,00		50,34	36,50	54,00	74,00	17,50	23,66

Remark: No further spurious emission in the range 20 dB below the limit found.

Temperature: 26 °C
Air Pressure: 1020 hPa
Humidity: 36 %

Op. Mode **Setup** **Port** **Test Parameter**
op-mode 3 setup 2 enclosure

Polarisation	Frequency MHz	Corrected Value dBµV/m			Limit QP/AV dBµV/m	Limit Peak dBµV/m	Delta to AV/QP Limit/dB	Delta to Peak Limit dB
		QP	Peak	AV				
Horizontal	4960,00		53,42	33,00	54,00	74,00	21,00	20,58
Horizontal	7440,00		51,24	32,04	54,00	74,00	21,96	22,76
Horizontal	12400,00		50,24	33,00	54,00	74,00	21,00	23,76

Remark: No further spurious emission in the range 20 dB below the limit found.

4.4 .4 Test result: Spurious Radiated Emissions

FCC Part 15, Subpart (					Op. Mode	Setup	Port	Result
					op-mode 1	setup 2	enclosure	passed
					op-mode 2	setup 2	enclosure	passed
					op-mode 3	setup 2	enclosure	passed

4. 5 Dwell Time

Standard FCC Part 15, 10-1-98
Subpart C

The test was performed according to: FCC §15.31 10-1-1998

4. 5 .1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements.

The reference level of the spectrum analyser was set equal to the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

To determine the dwell time, 3 single measurements are necessary.

The first plot shows the activity for an complete inquiry/paging on one channel.

The second plot shows the repetition rate on one channel, and the third plot shows the duration of the burst used in inquiry/paging.

With this 3 single values the dwell time of the channel can be calculated.

4. 5 .2 Test Limits

FCC Part 15, Subpart C, §15.247 (g)

The dwell time of the channel shall be less than 400 ms in a 30 s period

4. 5 .3 Test Protocol

Temperature: 25 °C

Air Pressure: 1020 hPa

Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 4	setup 1	temporary antenna connector	

Dwell time ms	Remarks
53,7	$((2,55s+2,55s)/10ms)*105,4\mu s$

Remark: Please see annex for the measurement plot.

Temperature: 25 °C
 Air Pressure: 1020 hPa
 Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 5	setup 1	temporary antenna connector	

Dwell time ms	Remarks
26,9	5,1s/20ms*105,4µs

Remark: Please see annex for the measurement plot.

4.5 .4 Test result: Dwell Time

FCC Part 15, Subpart (	Op. Mode	Setup	Port	Result
	op-mode 4	setup 1	temporary antenna connector	passed
	op-mode 5	setup 1	temporary antenna connector	passed

4. 6 Power Density

Standard FCC Part 15, 10-1-98
Subpart C

The test was performed according to: FCC §15.31 10-1-1998

4. 6 .1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements

The EUT was connected to spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

The Analyser settings are according 15.247 (d):

- Detector: Peak-Maxhold
- Span: 2 MHz
- Resolution Bandwidth (RBW): 3 kHz
- Video Bandwidth (VBW): 3 kHz
- Sweep Time: Coupled

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

4. 6 .2 Test Limits

FCC Part 15, Subpart C, §15.247 (g)

The power density shall be below 8 dBm measured with a resolution bandwidth of 3 kHz.

4. 6 .3 Test Protocol

Temperature: 25 °C

Air Pressure: 1020 hPa

Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 4	setup 1	temporary antenna connector	

Power Density dBm/3 kHz	Remarks
-37,37	none

Remark: Please see annex for the measurement plot.

Temperature: 25 °C
 Air Pressure: 1020 hPa
 Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 5	setup 1	temporary antenna connector	

Power Density dBm/3 kHz	Remarks
-40,33	none

Remark: Please see annex for the measurement plot.

4.6 .4 Test result: Power Density

FCC Part 15, Subpart (	Op. Mode	Setup	Port	Result
	op-mode 4	setup 1	temporary antenna connector	passed
	op-mode 5	setup 1	temporary antenna connector	passed

4. 7 Channel Separation

Standard FCC Part 15, 10-1-98
Subpart C

The test was performed according to: FCC §15.31 10-1-1998

4. 7 .1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements

The EUT was connected to spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

Analyser settings:

- Detector: Peak-Maxhold
- Span: 10 MHz
- Resolution Bandwidth (RBW): 300 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: Coupled

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

4. 7 .2 Test Limits

FCC Part 15, Subpart C, § 15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

4. 7 .3 Test Protocol

Temperature: 25 °C

Air Pressure: 1020 hPa

Humidity: 34 %

Op. Mode	Setup	Port	Test Parameter
op-mode 6	setup 1	temporary antenna connector	

Channel Separation MHz	Remarks
1	none

Remark: Please see annex for the measurement plot.

4. 7 .4 Test result: Channel Separation

FCC Part 15, Subpart C	Op. Mode	Setup	Port	Result
	op-mode 6	setup 1	temporary antenna connector	passed

4. 8 Processing Gain

Standard FCC Part 15, 10-1-98
Subpart C

The test was performed according to: FCC §15.31 10-1-1998

4. 8 .1 Test Description

See additional test report.

4. 8 .2 Test Limits

FCC Part 15, Subpart C, §15.247 (f)

The processing gain shall be greater than 17 dB.

4. 8 .3 Test Protocol

Temperature: 26 °C

Air Pressure: 1015 hPa

Humidity: 36 %

Op. Mode	Setup	Port	Test Parameter
see annex	see annex	temporary antenna connector	

Processing gain dB	Remarks
24,5	please see annex for the documentation

Remark: none

4. 8 .4 Test result: Processing Gain

FCC Part 15, Subpart C	Op. Mode	Setup	Port	Result
	see annex	see annex	temporary antenna connector	passed

5. Testequipment

EUT Digital Signalling System

Equipment	Type	Serial No.	Manufacturer	Cal due
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz	17.06.02

EMI Test System

Equipment	Type	Serial No.	Manufacturer	Cal due
Signal Generator	SMR 20	846834/008	Rohde & Schwarz	26.07.02
EMI Analyzer	ESI 26	830482/004	Rohde & Schwarz	27.09.03
Comparison Noise Emitter	CNE III	99/016	York	

EMI Radiated Auxiliary Equipment

Equipment	Type	Serial No.	Manufacturer	Cal due
Cable "ESI to Horn Antenna"	RTK 081	W18.04+3599/001	Rosenberger	25.07.02
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz	16.06.02
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz	04.10.02
Biconical dipole	VUBA 9117	9117108	Schwarzbeck	03.07.02
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz	18.07.02
Cable "ESI to EMI Antenna"	RTK081+Aircell7	W18.01+W38.01a	Huber+Suhner	25.07.02
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz	18.07.02


EMI Conducted Auxiliary Equipment

Equipment	Type	Serial No.	Manufacturer	Cal due
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz	22.06.02


Auxiliary Test Equipment

Equipment	Type	Serial No.	Manufacturer	Cal due
Broadband Resist. Power Divider SMA	1515 / 93459	LN673	Weinschel	
Digital Multimeter 02	Voltcraft M-3860M	IJ095955	Conrad	18.07.02
Digital Multimeter 01	Voltcraft M-3860M	IJ096055	Conrad	18.07.02
Digital Oscilloscope	TDS 784C	B021311	Tektronix	26.07.02
Fibre optic link Satellite	FO RS232 Link	181-018	Pontis	
Notch Filter ultra stable	WRCA800/960-6EE	24	Wainwright	03.02.03
Broadband Resist. Power Divider N	1506A / 93459	LM390	Weinschel	
I/Q Modulation Generator	AMIQ-B1	832085/018	Rohde & Schwarz	27.10.02
Temperature Chamber	VT 4002	58566002150010	Vötsch	
Temperature Chamber	S-1.2C-B	393/25-1389-27RF	Thermotron	
ThermoHygro_01	430202		Fischer	15.12.02
Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz	09.11.02
Temperature Chamber	KWP 120/70	59226012190010	Weiss	
Fibre optic link Transceiver	FO RS232 Link	182-018	Pontis	


6. Foto Report

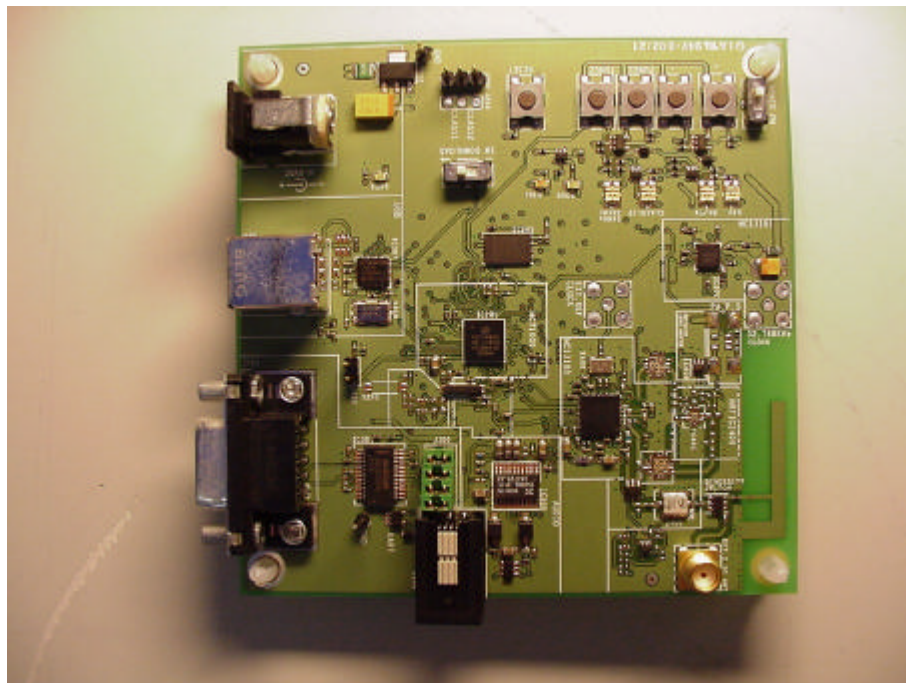

Picture 1 : Top side of the EUT

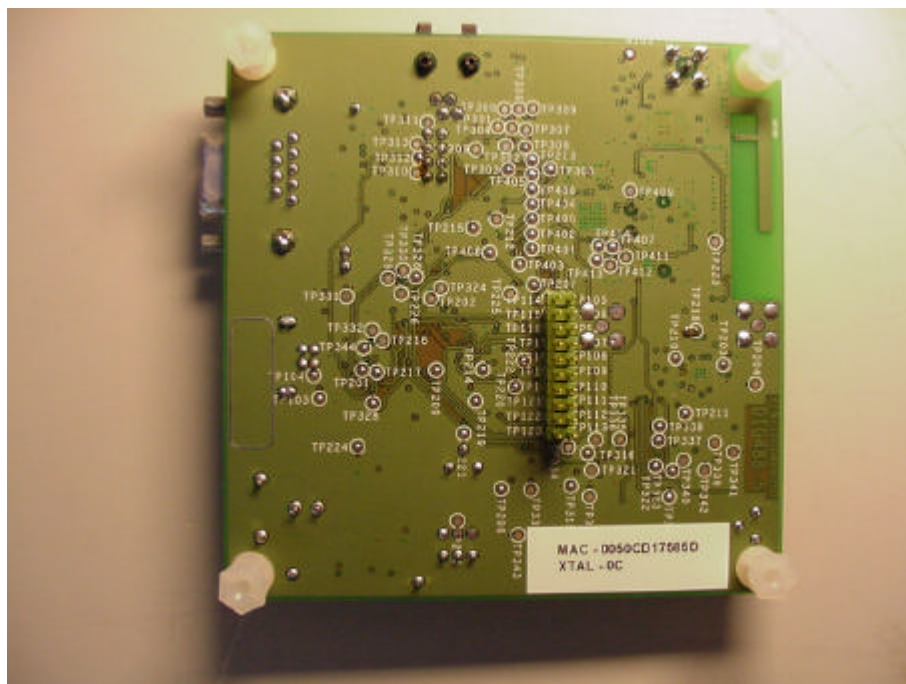


Picture 2 : Bottom side of the EUT

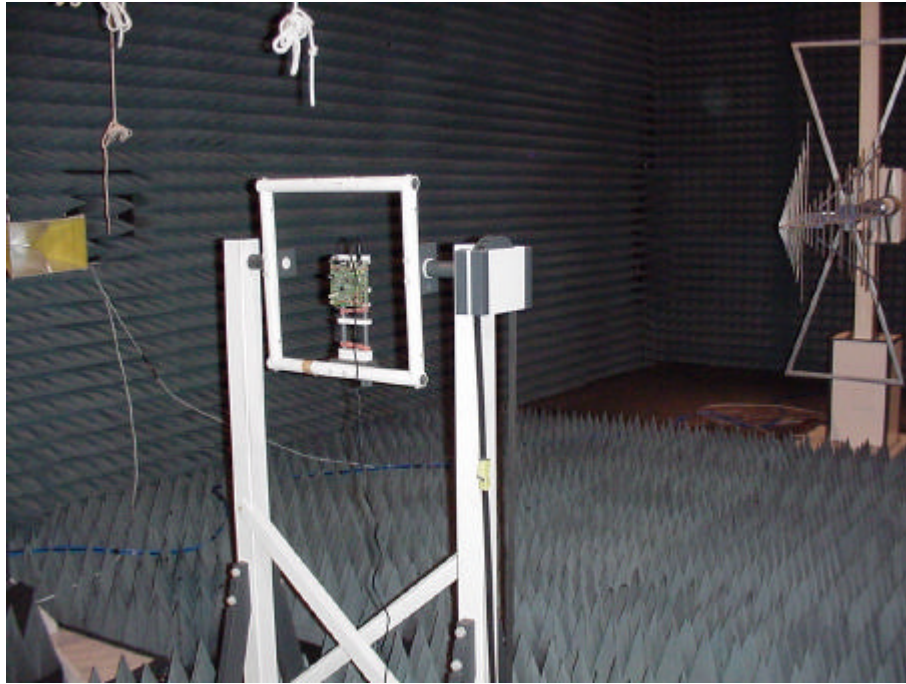

Picture 3 : Setup for radiated emission measurements

7. Setup Drawings

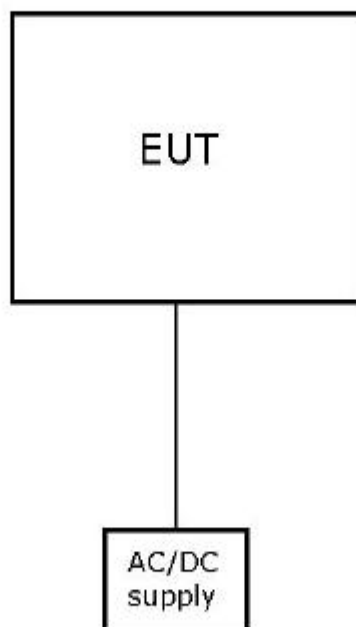


Drawing 1 : General test setup

8. Annex

Measurement plots

Occupied Bandwidth


Op. Mode **Setup** **Port**
op-mode 1 setup 1 temporary
 antenna
 connector

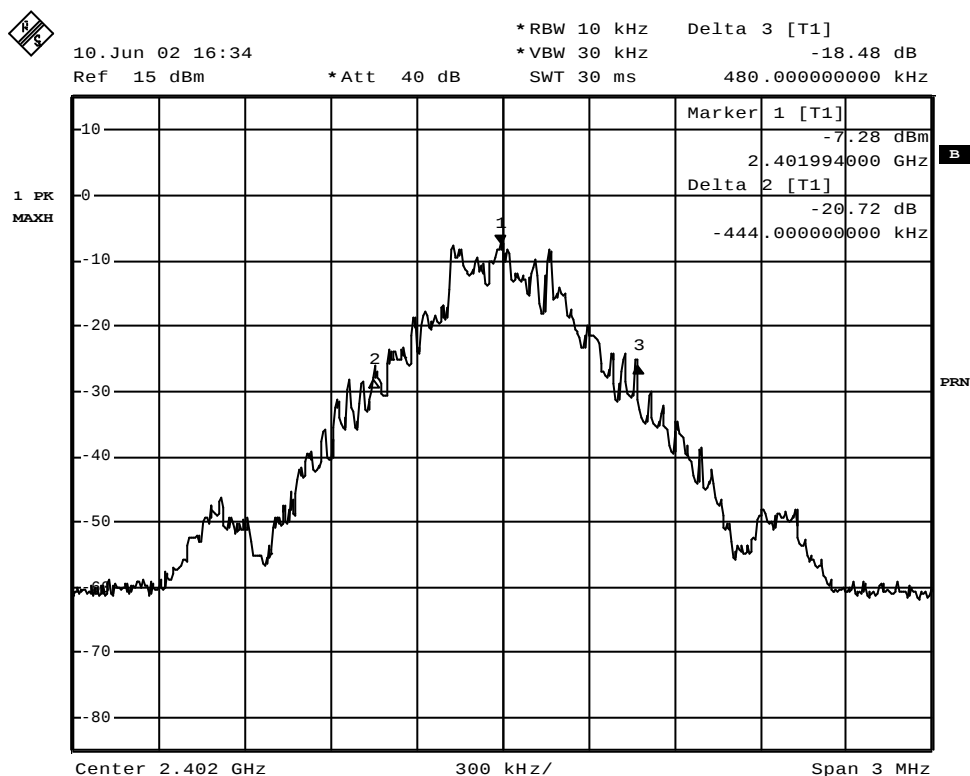

Date: 10.JUN.2002 16:34:07

Occupied Bandwidth


Op. Mode **Setup** **Port**
 op-mode 2 setup 1 temporary
 antenna
 connector

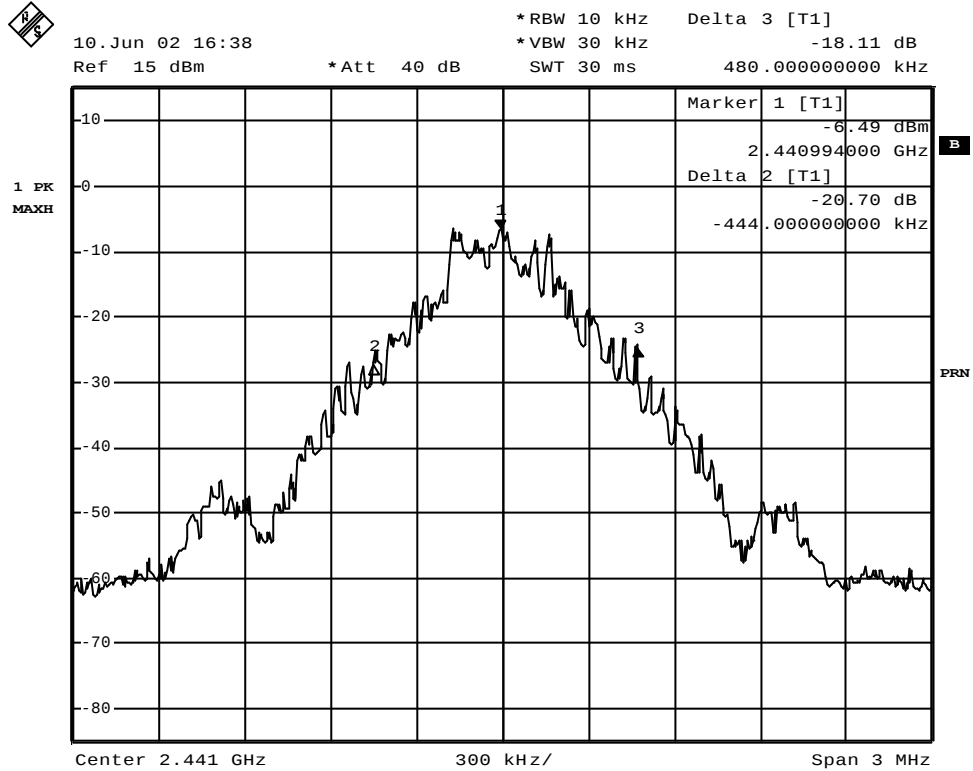

Date: 10.JUN.2002 16:38:25

Occupied Bandwidth

Op. Mode **Setup** **Port**
op-mode 3 setup 1 temporary
antenna
connector

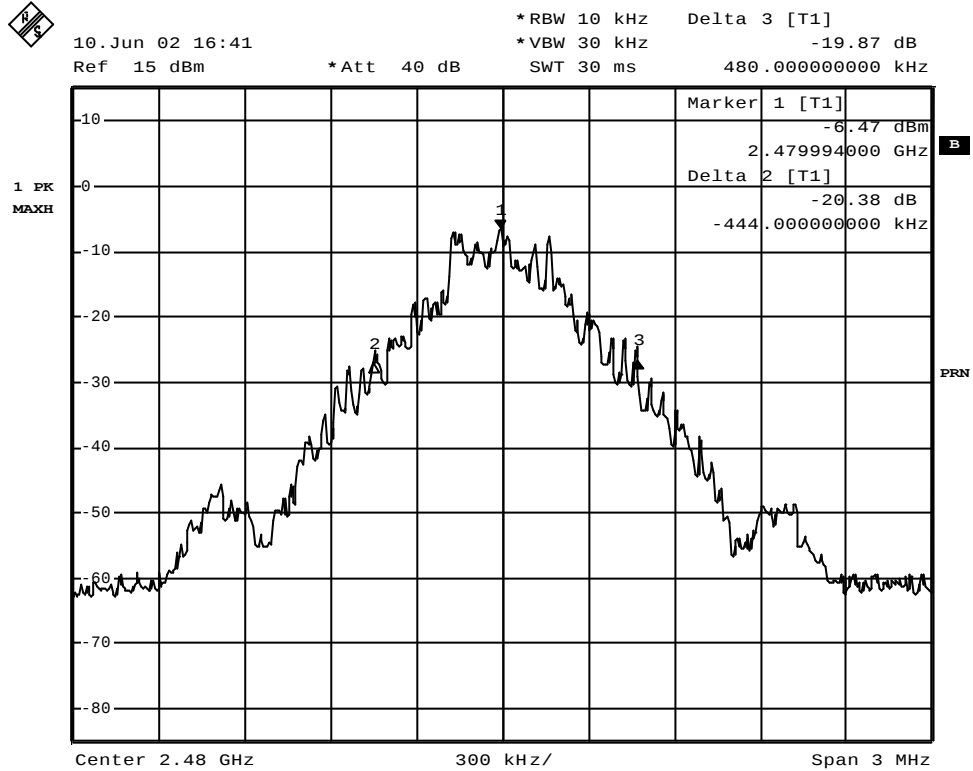

Date: 10.JUN.2002 16:41:09


Occupied Bandwidth



Op. Mode
op-mode 4

Setup
setup 1

Port
temporary
antenna
connector

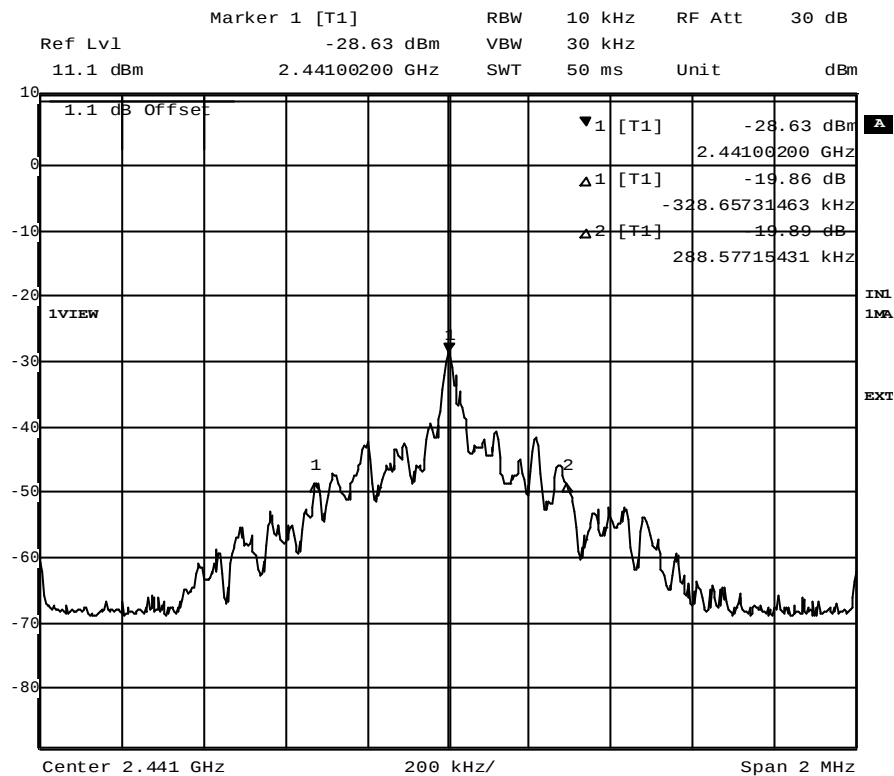


Title: FCC 15.247
Comment A: 20dB bandwidth inquiry
Date: 4.JUN.2002 10:30:41

Occupied Bandwidth



Op. Mode **Setup** **Port**
op-mode 5 setup 1 temporary
 antenna
 connector

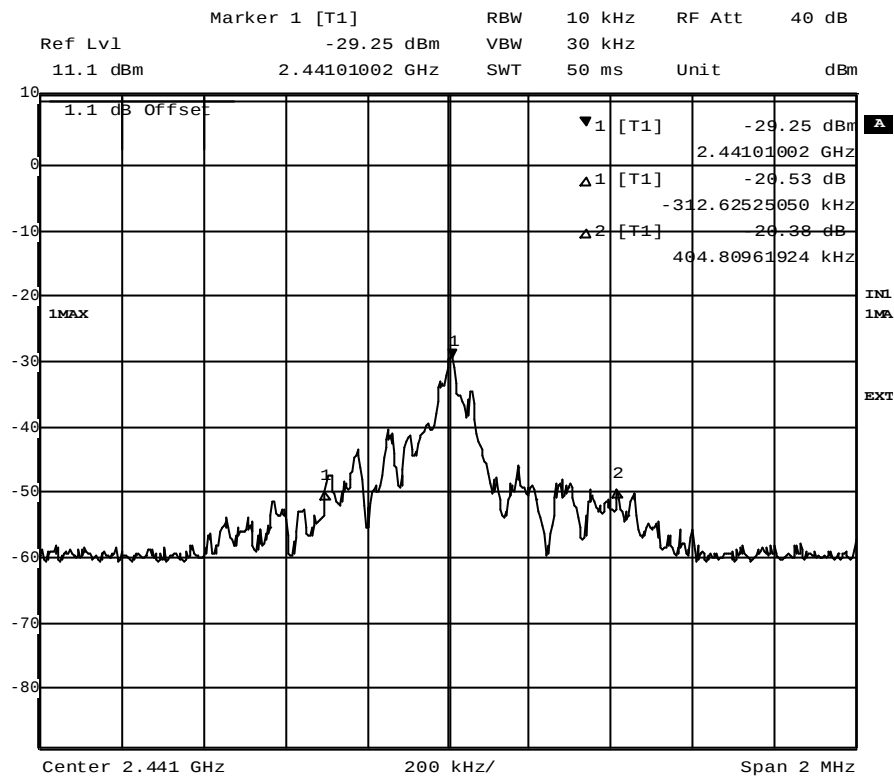


Title: FCC 15.247
Comment A: 20dB bandwidth paging
Date: 4.JUN.2002 09:17:21

Occupied Bandwidth

Peak Power Output


Op. Mode	Setup	Port
op-mode 1	setup 1	temporary antenna connector

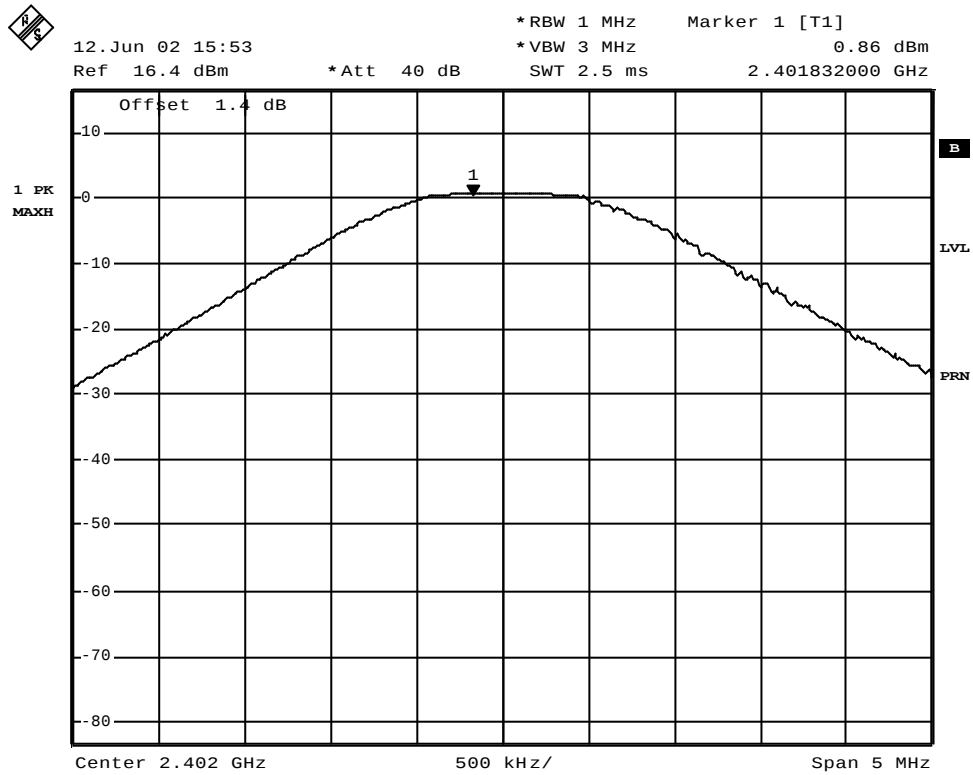

Date: 12.JUN.2002 15:53:29


Peak Power Output

Op. Mode **Setup** **Port**
 op-mode 2 setup 1 temporary
 antenna
 connector

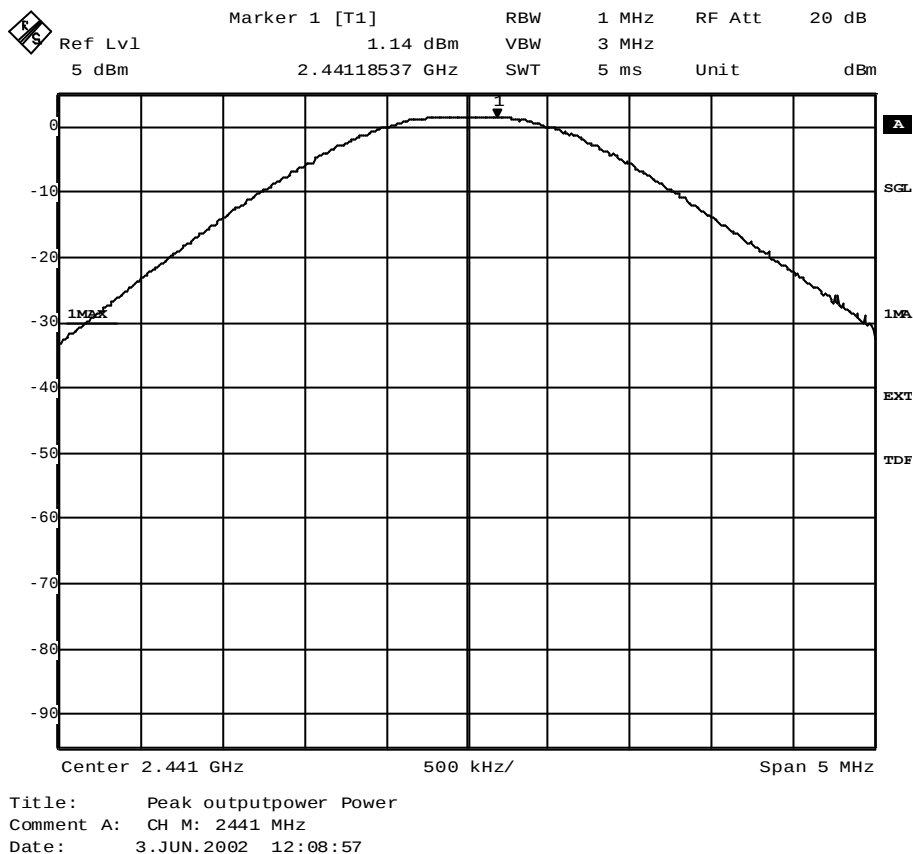


Peak Power Output

Op. Mode **Setup** **Port**
 op-mode 3 setup 1 temporary
 antenna
 connector

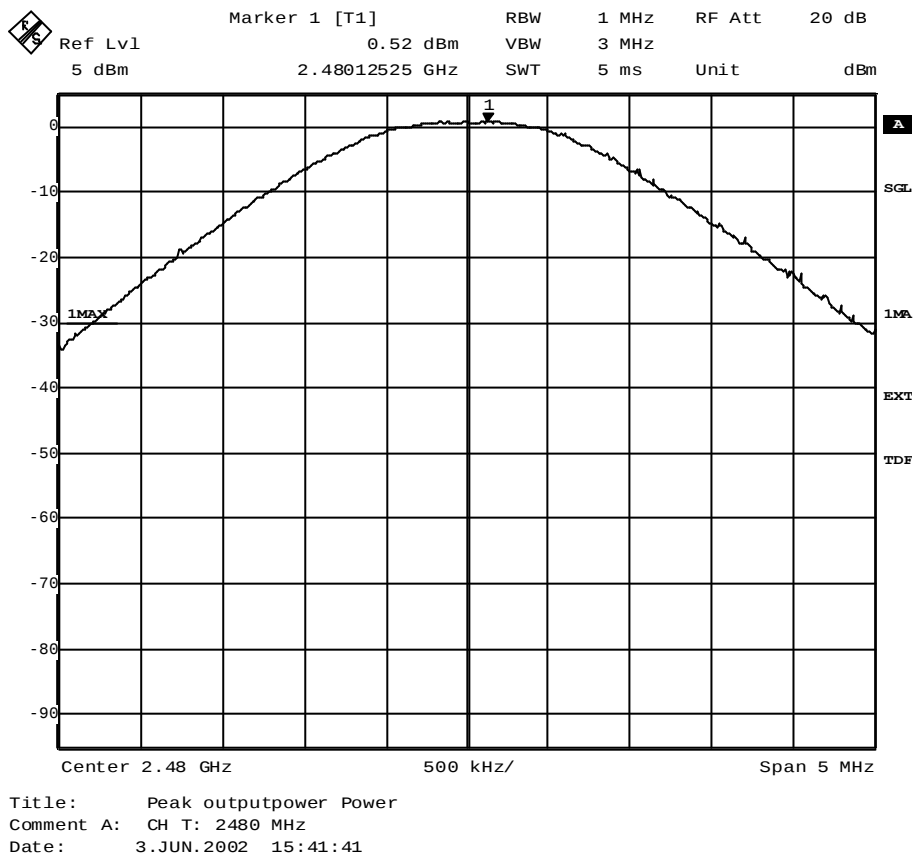

Peak Power Output


Op. Mode **Setup** **Port**
 op-mode 4 setup 1 temporary
 antenna
 connector

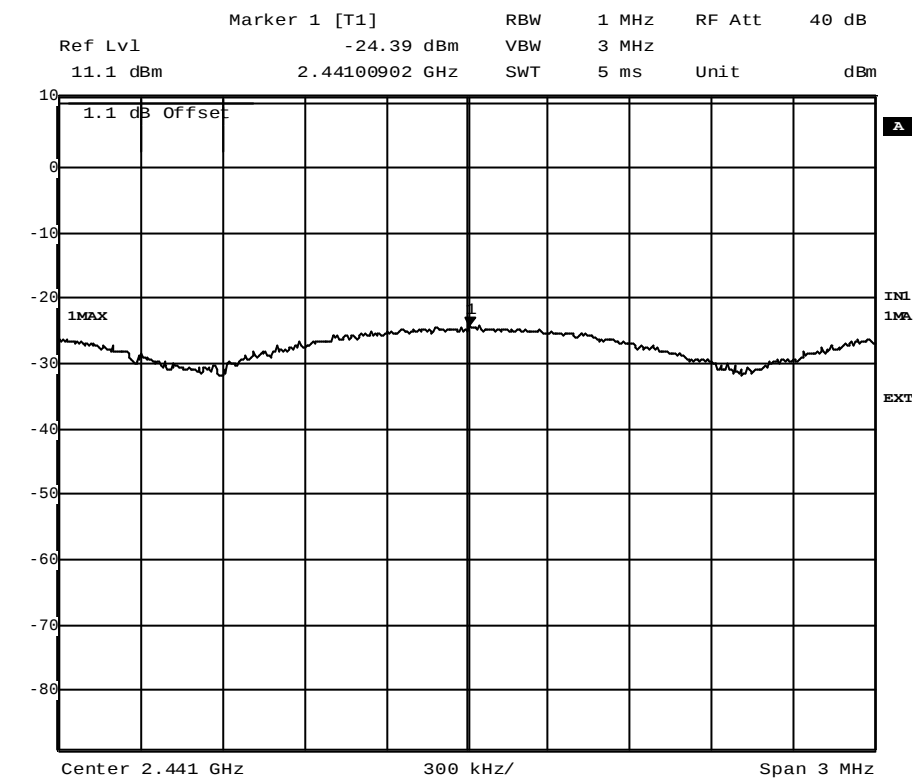

Title: FCC 15.247
 Comment A: Peak Power Output inquiry
 Date: 4.JUN.2002 08:39:40

Peak Power Output

Op. Mode **Setup** **Port**
 op-mode 5 setup 1 temporary
 antenna
 connector

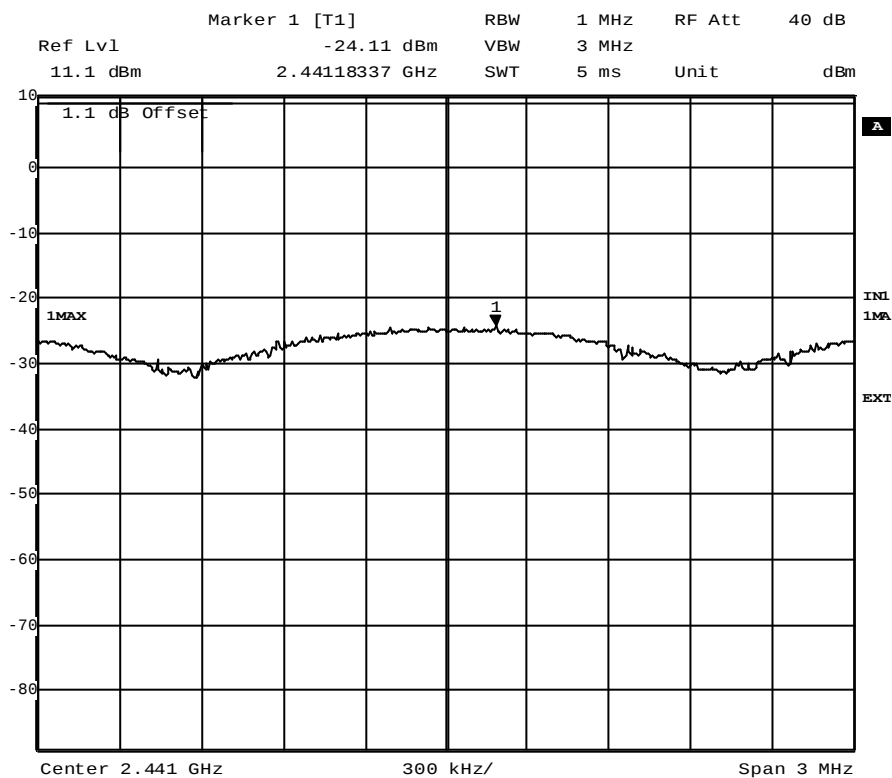


Title: FCC 15.247
 Comment A: Peak Power Output paging
 Date: 4.JUN.2002 09:03:01

Peak Power Output


Spurious RF Conducted Emissions

Op. Mode **Setup** **Port**
op-mode 1 setup 1 temporary
 antenna
 connector

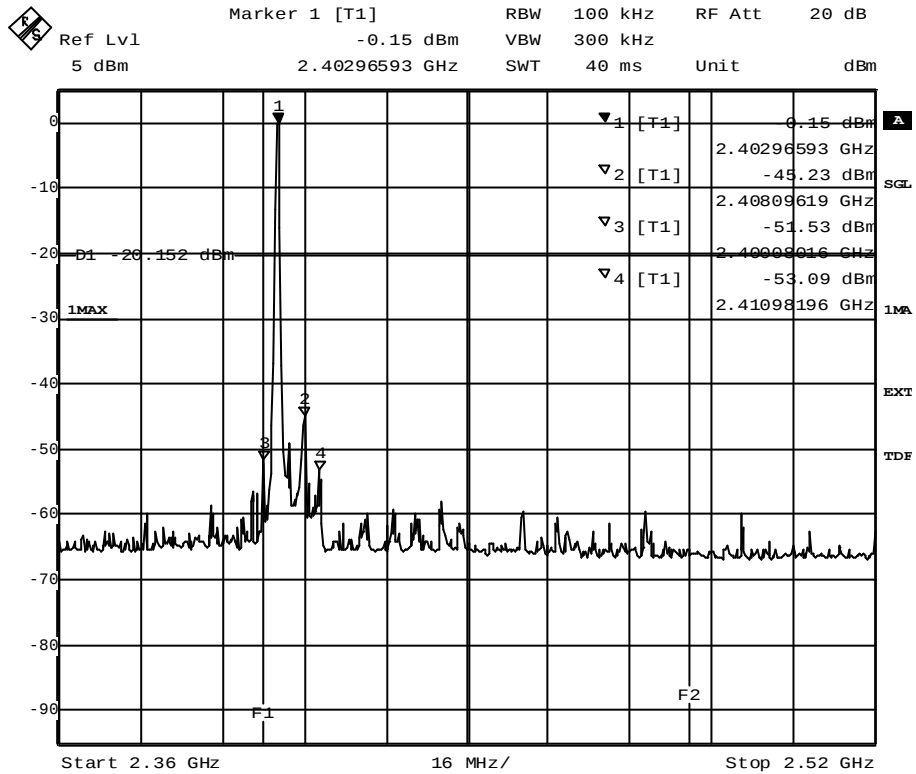

Title: Band Edge Compliance
Comment A: CH B: 2402 MHz
Date: 3.JUN.2002 11:04:45


band edge compliance

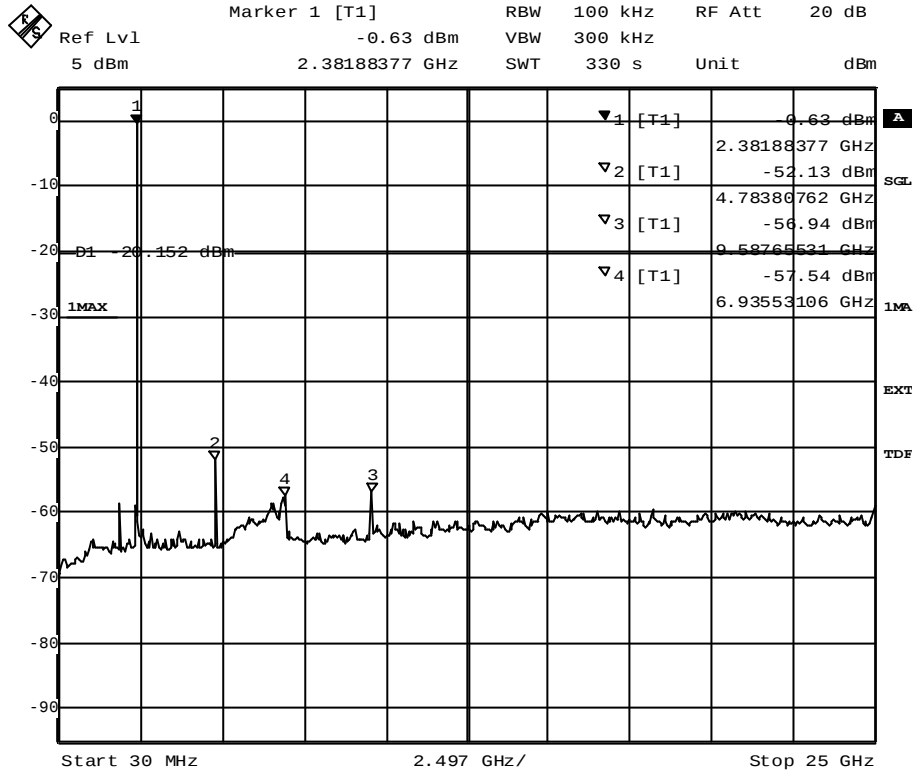


Title: spurious emissions
 Comment A: CH B: 2402 MHz
 Date: 3.JUN.2002 11:16:22

spurious emissions conducted

Op. Mode **Setup** **Port**
op-mode 2 setup 1 temporary
antenna
connector

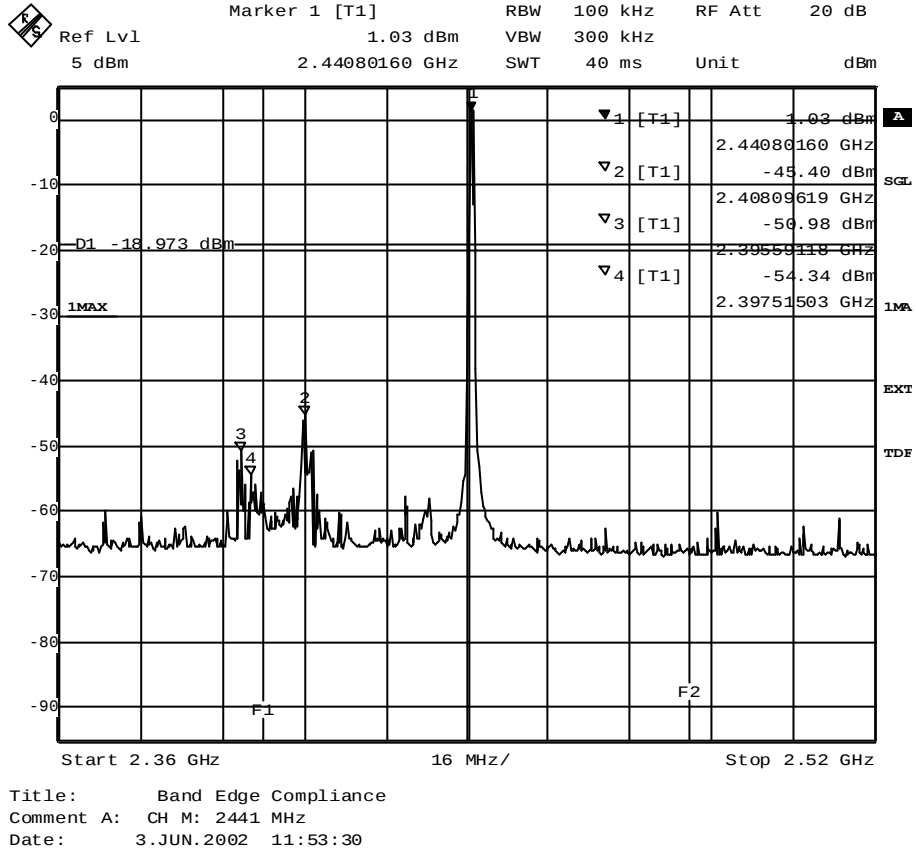

band edge compliance

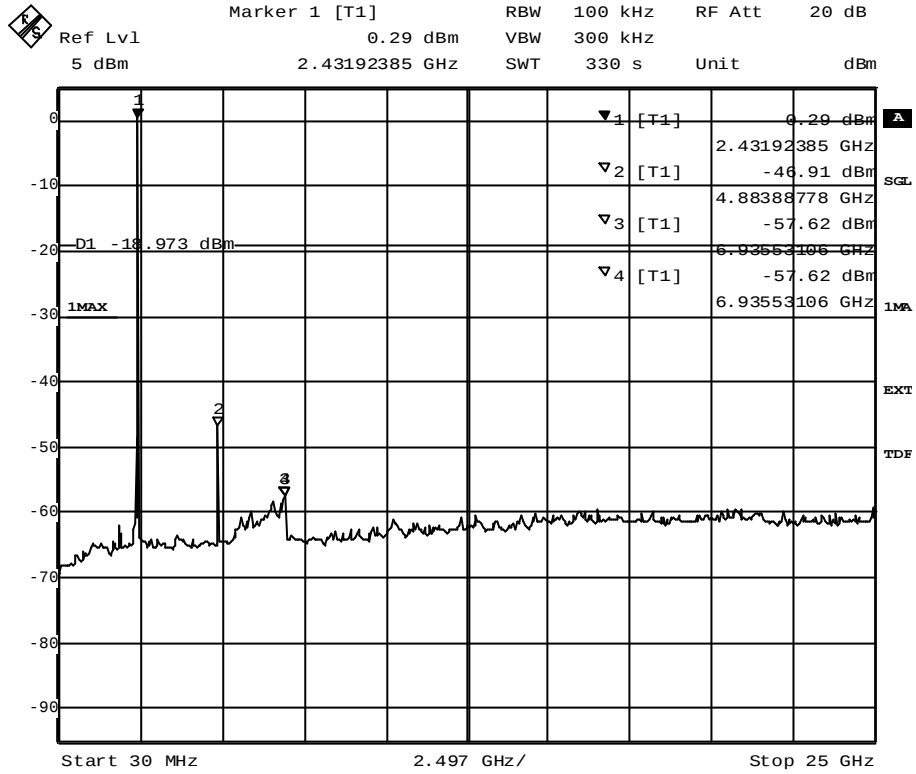


Title: spurious emissions
 Comment A: CH M: 2441 MHz
 Date: 3.JUN.2002 12:05:07

spurious emissions conducted

Op. Mode
op-mode 3


Setup
setup 1

Port
temporary
antenna
connector

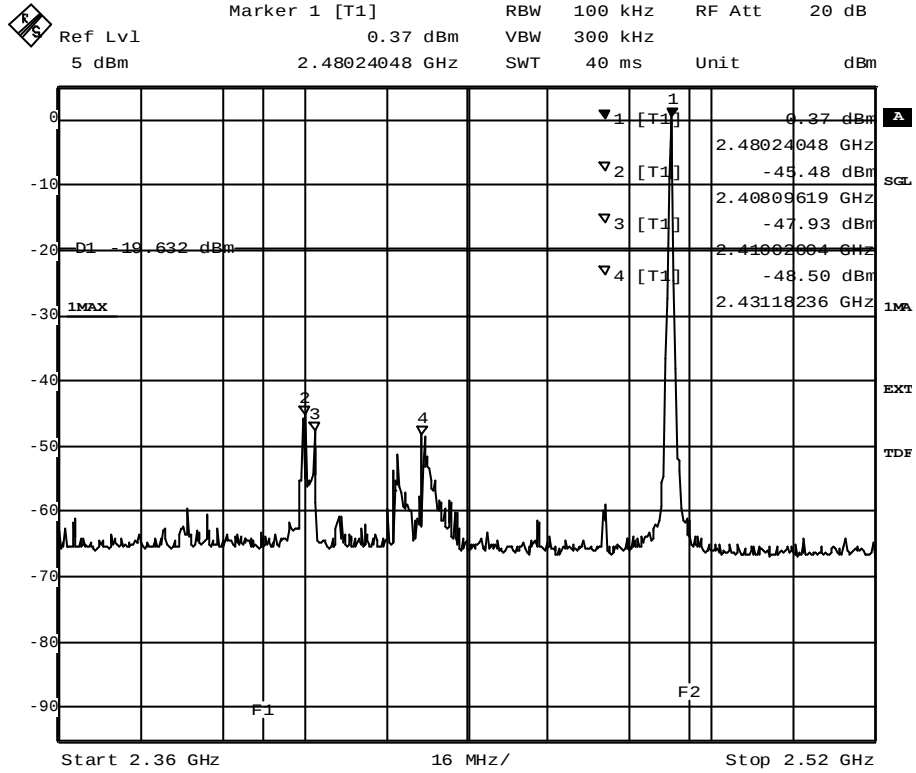

Title: Band Edge Compliance
Comment A: CH T: 2480 MHz
Date: 3.JUN.2002 15:26:06

band edge compliance

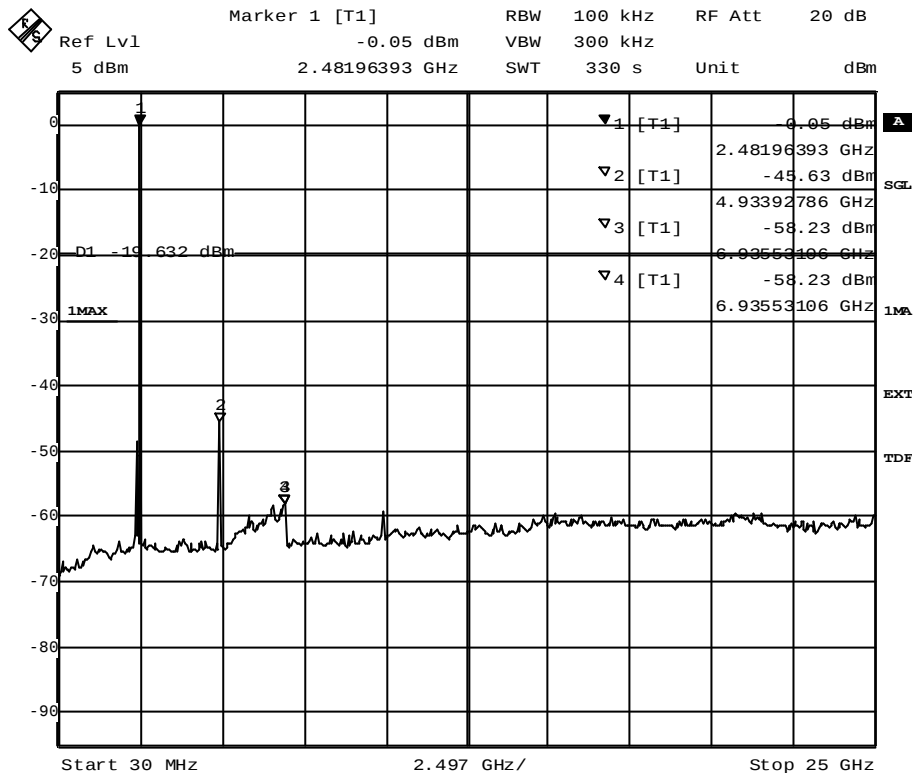


Title: spurious emissions
 Comment A: CH T: 2480 MHz
 Date: 3.JUN.2002 15:37:43

spurious emissions conducted


Dwell Time

Op. Mode **Setup** **Port**
op-mode 4 setup 1 temporary
 antenna
 connector

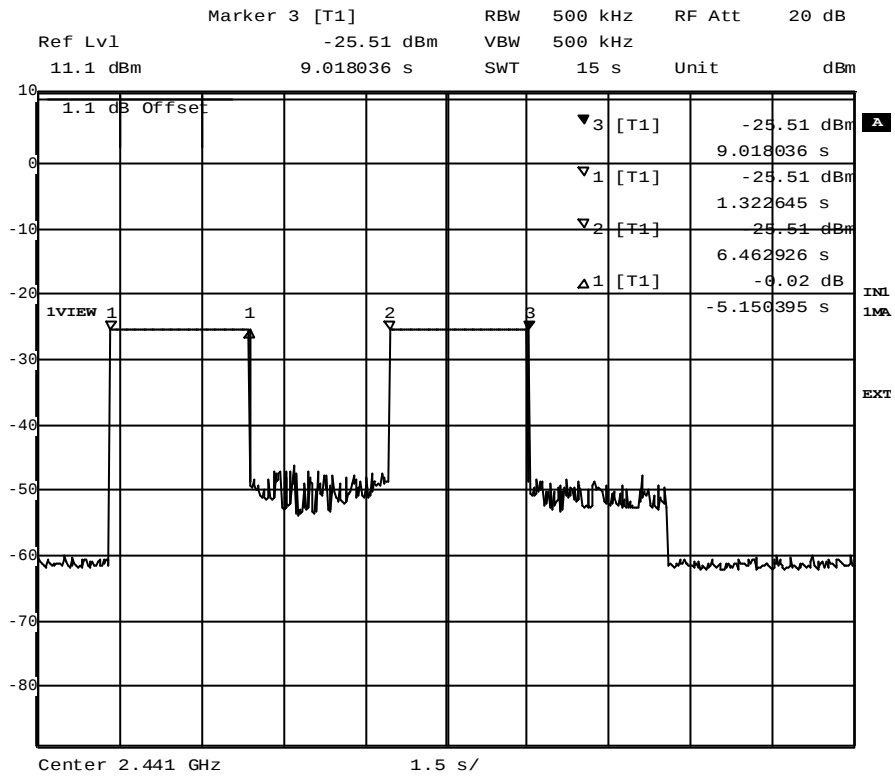


Title: FCC 15.247
Comment A: Dwell time inquiry
Date: 4.JUN.2002 09:44:33

15 seconds sweep for a complete inquiry

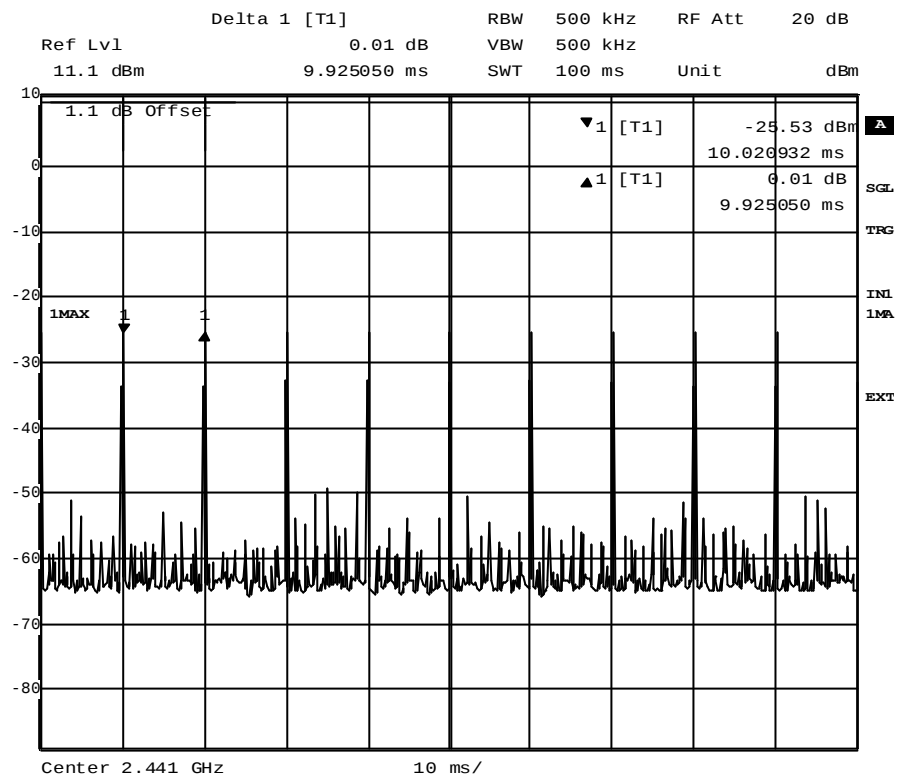

Title: FCC 15.247
 Comment A: Dwell time inquiry
 Date: 4.JUN.2002 09:40:42

100 ms sweep of a channel to determine the repetition frequency

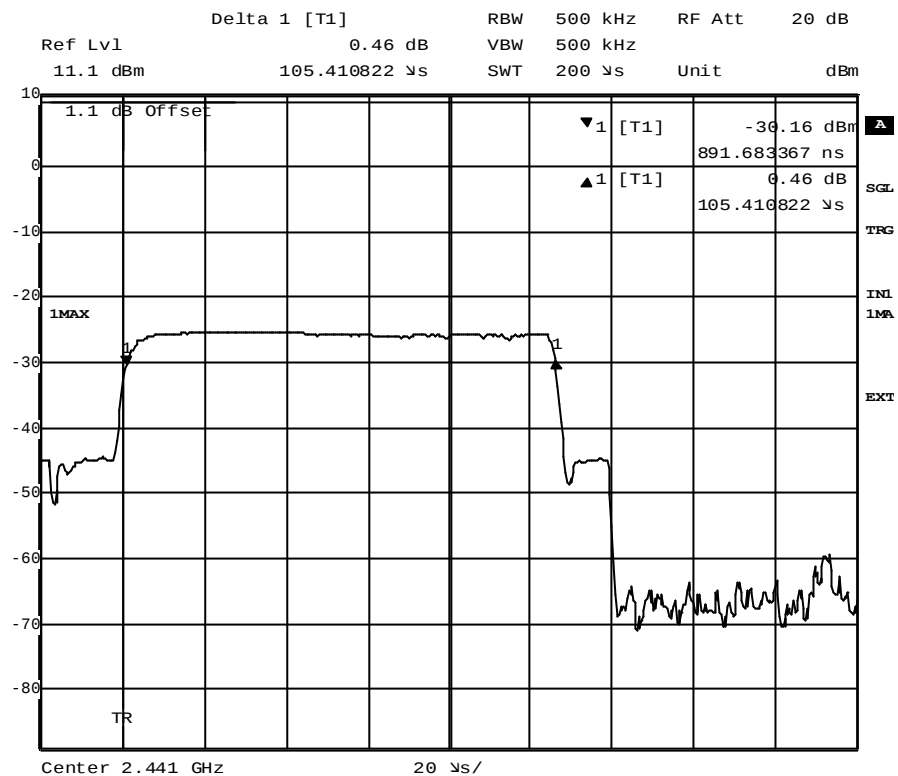


Title: FCC 15.247
 Comment A: Dwell time inquiry
 Date: 4.JUN.2002 09:37:21

200 μ s sweep for a complete burst

Op. Mode
op-mode 5


Setup
setup 1

Port
temporary
antenna
connector

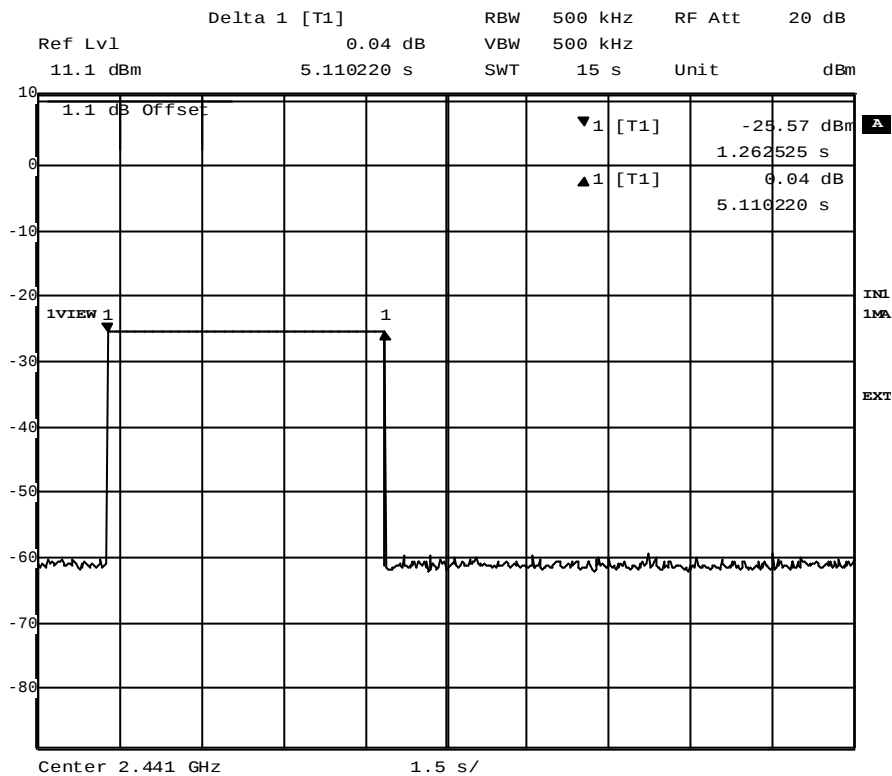


Title: FCC 15.247
Comment A: Dwell time paging
Date: 4.JUN.2002 09:22:44

15 seconds sweep for a complete paging

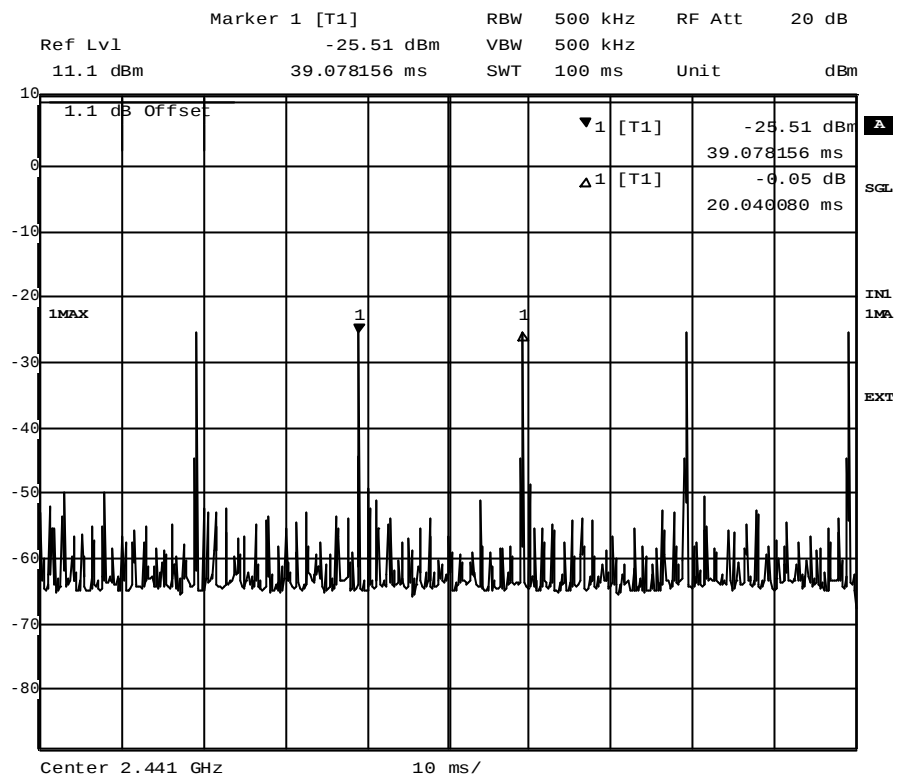

Title: FCC 15.247
 Comment A: Dwell time paging
 Date: 4.JUN.2002 09:25:36

100 ms sweep of a channel to determine the repetition frequency

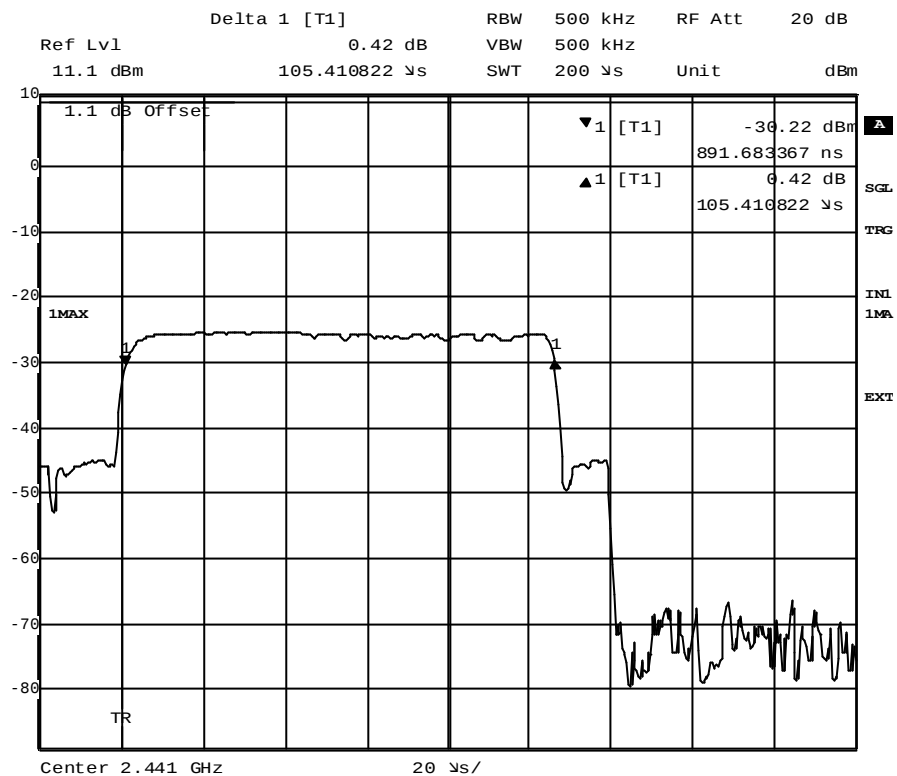


Title: FCC 15.247
 Comment A: Dwell time paging
 Date: 4.JUN.2002 09:30:15

200 μ s sweep for a complete burst

Power Density


Op. Mode	Setup	Port
op-mode 4	setup 1	temporary antenna connector

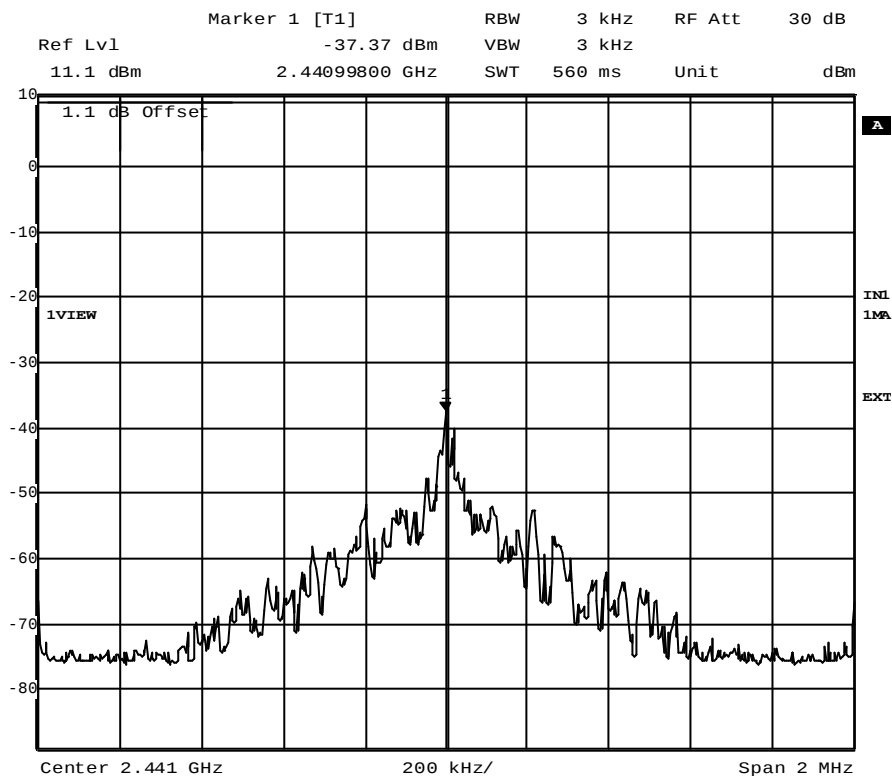

Title: FCC 15.247
 Comment A: Power density inquiry
 Date: 4.JUN.2002 09:51:08

power density (inquiry)

Op. Mode **Setup** **Port**
 op-mode 5 setup 1 temporary
 antenna
 connector

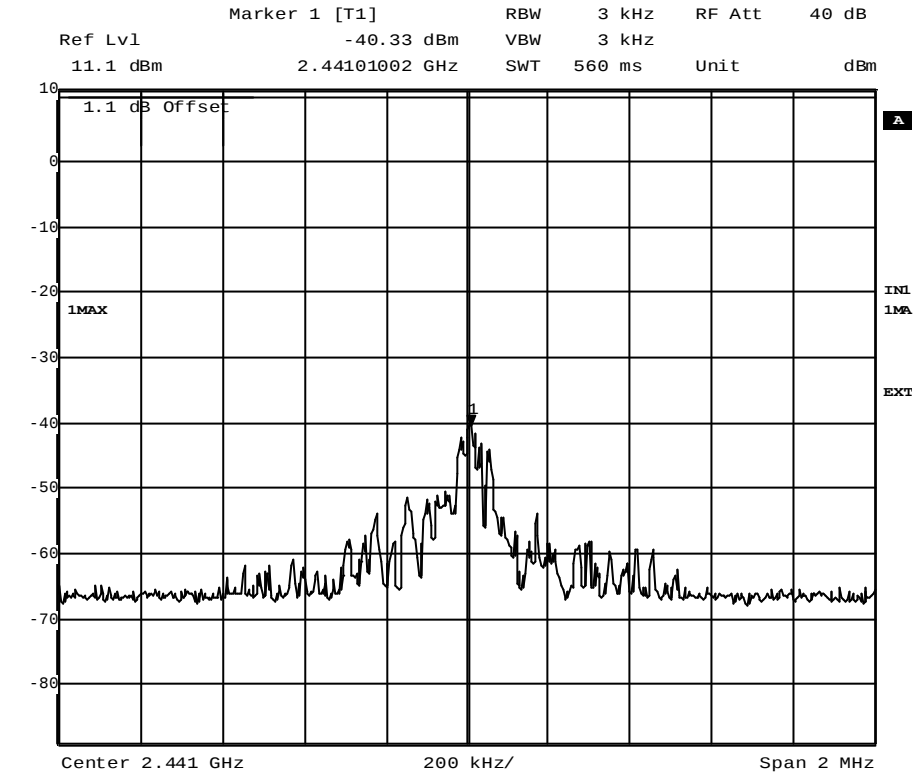


Title: FCC 15.247
 Comment A: Power density paging
 Date: 4.JUN.2002 09:11:32

power density (paging)

Channel Separation

Op. Mode **Setup** **Port**
 op-mode 6 setup 1 temporary
 antenna
 connector

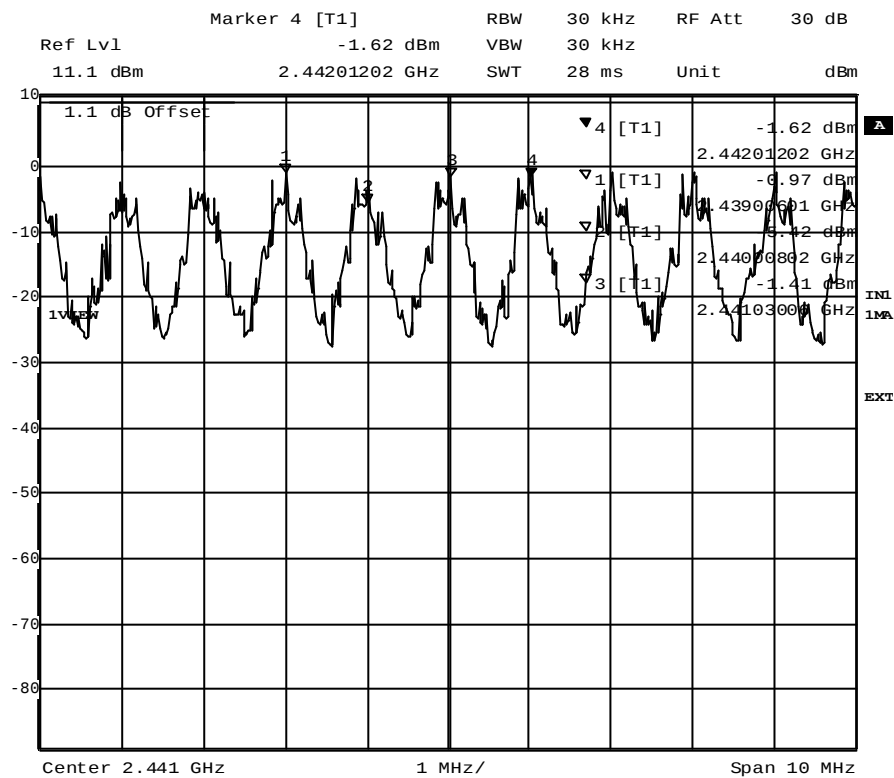

Title: FCC 15.247
 Comment A: Channel separation
 Date: 4.JUN.2002 10:07:32

channel separation