



EMC Test Report

Report No.: STS2512102E01

Issued for

SWAGTEK

10205 NW 19th Street, STE 101, Miami, FL33172.USA

Product Name: 4G Smart Phone

Brand Name: LOGIC, UNONU, iSWAG

Model Name: G2L

Series Model(s): UG2L, Gamer2

FCC ID: O55244725

Test Standards: FCC 47 CFR Part 15: Subpart B

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

TEST REPORT**Applicant's Name**: SWAGTEK

Address: 10205 NW 19th Street, STE 101, Miami, FL33172.USA

Manufacturer's Name: SWAGTEK

Address: 10205 NW 19th Street, STE 101, Miami, FL33172.USA

Product description

Product Name: 4G Feature Phone

Brand Name: LOGIC, UNONU, iSWAG

Model Name: FIXO 240L

Series Model(s): HEAT 240L

Test Standards: FCC 47 CFR Part 15: Subpart B

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test

Date of Receipt of Test Item: 29 Sep., 2025

Date (s) of performance of Tests: 30 Sep., to 02 Dec., 2025

Date of Issue: 03 Dec., 2025

Test Result: **Pass**

Testing Engineer :

Star Deng

(Star Deng)

Technical Manager :

Brave Wu

(Brave Wu)

Authorized Signatory :

Bovey Yang

(Bovey Yang)



TABLE OF CONTENTS

1. TEST SUMMARY	5
1.1 TEST FACTORY	5
1.2 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 DESCRIPTION OF TEST SETUP	8
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	8
2.5 MEASUREMENT INSTRUMENTS LIST	9
3. EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.2 RADIATED EMISSION MEASUREMENT	14

Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	03 Dec., 2025	STS2512102E01	ALL	Initial Issue

1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission			
Standard	Test Item	Result	Remark
FCC 47 CFR Part 15: Subpart B	Conducted Emission	PASS	Meet Class B limit
	Radiated Emissions	PASS	Meet Class B limit

Note:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACTORY

Company Name:	Shenzhen STS Test Services Co. Ltd.
Address:	101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China
Telephone:	+86-755 3688 6288
Fax:	+86-755 3688 6277
Registration No.:	FCC test Firm Registration Number: 625569
	IC test Firm Registration Number: 12108A
	A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	$\pm 2.32\text{dB}$
2	Conducted Emission (150KHz-30MHz)	$\pm 3.06\text{dB}$
3	All emissions, radiated(<1G) 30MHz-1000MHz	$\pm 4.23\text{dB}$
4	All emissions, radiated(>1G) 1GHz-6GHz	$\pm 5.13\text{dB}$
5	All emissions, radiated(>1G) 6GHz-18GHz	$\pm 5.37\text{dB}$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name	4G Feature Phone	
Brand Name	LOGIC, iSWAG, UNONU	
Model Name	FIXO 240L	
Series Model(s)	HEAT 240L	
Model Difference	FIXO 240L, HEAT 240L were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name and trade mark.	
Product Description	The EUT is a 4G Feature Phone ITE equipment having a primary function of either (or a combination of) entry, storage, display, retrieval, transmission, processing, switching, or control of data and/or telecommunication messages and which may be equipped with one or more ports typically for information transfer.	
Frequency Bands	Bluetooth	2402~2480 MHz
	2.4G WLAN	802.11b/g/n(20MHz): 2412~2462MHz 802.11n(40MHz):2422~2452MHz
Modulation Mode	Bluetooth	BT(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8DPSK
	2.4G WLAN	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM
Battery	Rechargeable Li-ion Battery DC3.87V, 4900mAh	
Adapter	Model: FIXO 240L Input: AC100-240V, 50/60Hz, 0.15A Output: DC 5.0V, 500mA	
Base:	Model: FIXO 240L Input: DC 5.0V, 500mA Output: DC 5.0V, 500mA	
Hardware version number	N/A	
Software version number	N/A	

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	PC mode
Mode 2	Charging+Recording mode
Mode 3	Charging+Playing mode
Mode 4	FM receiver mode
Mode 5	GPS receiver mode

For Conducted Test	
Final Test Mode	Description
Mode 2	Charging+Recording mode

For Radiated Test	
Final Test Mode	Description
Mode 1	Charging+Recording mode

Note:

1. In the conducted disturbance test, Mode 2 is the minimum margin mode, and this report only shows the minimum margin mode test data.
2. In the radiation disturbance test, Mode 2 is the minimum margin mode, and this report only shows the minimum margin mode test data.
3. We tested for all available U.S. voltage and frequencies (For 120Vac, 50/60Hz) for which the device is capable of operation.

2.3 DESCRIPTION OF TEST SETUP

2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Note
1	Laptop	Lenovo	ThinkPad T14 Gen 1	DoC
2	Printer	HP	HP LaserJet P1007	DoC

Item	Equipment	Ferrite Core	Length	Note
1	Detached USB Cable	Shielding	1.0m	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in『Length』column.

2.5 MEASUREMENT INSTRUMENTS LIST

2.5.1 CONDUCTED TEST SITE

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
EMI Test Receiver	R&S	ESCI	101427	2025.9.25	2026.9.24
LISN	R&S	ENV216	101242	2025.9.25	2026.9.24
LISN	R&S	3810/2NM	00023625	2025.9.25	2026.9.24
Limiter	CYBERTEK	EM5010	N/A	2025.9.25	2026.9.24
Absorbing Clamp	R&S	MDS-21	100668	2025.2.24	2026.2.23
CE Cable	N/A	C01	N/A	2025.9.24	2026.9.23
Clamp Cable	N/A	C02	N/A	2025.9.24	2026.9.23
Loops Cable	N/A	C03	N/A	2025.9.24	2026.9.23
ISN	SCHWARZBECK	CAT 6	NTFM 8158#153	2025.9.25	2026.9.24
Temperature & Humidity	topris	TP502V4-P	6900000422137	2025.8.26	2026.8.25
Testing Software	EZ-EMC(Ver.STSLAB-03A1 CE)				

2.5.2 RADIATED TEST SITE

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
EMI Test Receiver	R&S	ESCI	101427	2025.9.25	2026.9.24
Bi-log Antenna	TESEQ	CBL6111D	45873	2025.9.21	2026.9.20
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1343	2025.9.27	2026.9.26
Pre-amplifier(1G-26.5G)	Agilent	HP8449B	3008A02383	2025.2.22	2026.2.21
Pre-amplifier(0.1M-3GHz)	EM	EM330	060665	2025.2.22	2026.2.21
Spectrum Analyzer	Agilent	N9020A	MY49100060	2025.9.24	2026.9.23
RE Cable (9K-1G)	N/A	R01	N/A	2025.9.24	2026.9.23
RE Cable (1G-26G)	N/A	R02	N/A	2025.9.24	2026.9.23
Temperature & Humidity	topris	TP502V4-P	6900000422328	2025.8.26	2026.8.25
SAC	ChengYu	9*6*6	N/A	2025.8.13	2028.8.12
Testing Software	EZ-EMC(Ver.STSLAB-03A1 RE)				

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	☐ Class A (dBμV)		☒ Class B (dBμV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.5 ~ 5	73.00	60.00	56.00	46.00
5 ~ 30	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

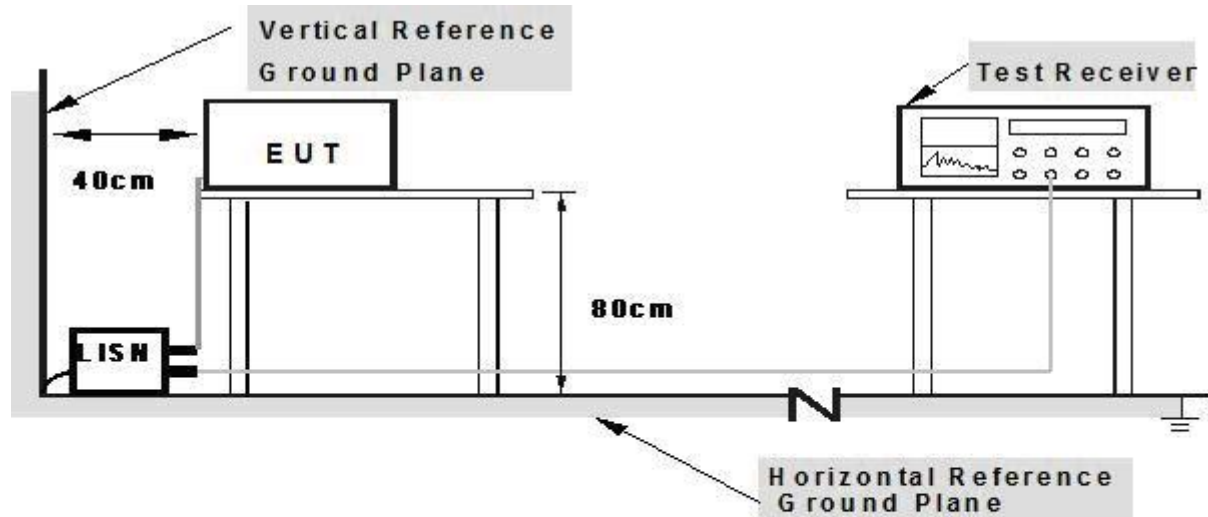

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

Temperature:	24.6°C	Relative Humidity:	44%
Phase:	L	Test Mode:	Mode 2
Test Voltage:	AC 120V/60Hz	Test Date:	2025.10.28

	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.154	31.19	0.10	0.00	9.88	0.00	41.17	55.78	-14.61	Average
2	0.154	46.76	0.10	0.00	9.88	0.00	56.74	65.78	-9.04	QP
3	0.202	33.71	0.10	0.00	9.88	0.00	43.69	53.54	-9.85	Average
4	0.202	46.42	0.10	0.00	9.88	0.00	56.40	63.54	-7.14	QP
5	0.270	39.42	0.10	0.00	9.88	0.00	49.40	61.12	-11.72	QP
6	0.282	25.65	0.10	0.00	9.88	0.00	35.63	50.76	-15.13	Average
7	0.337	35.25	0.10	0.00	9.88	0.00	45.23	59.27	-14.04	QP
8	0.350	21.85	0.10	0.00	9.88	0.00	31.83	48.96	-17.13	Average
9	0.415	32.13	0.10	0.00	9.88	0.00	42.11	57.55	-15.44	QP
10	0.474	19.09	0.10	0.00	9.88	0.00	29.07	46.45	-17.38	Average
11	2.371	15.51	0.20	0.00	9.88	0.00	25.59	46.00	-20.41	Average
12	2.540	28.82	0.20	0.00	9.88	0.00	38.90	56.00	-17.10	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) - Limit.
3. Factor = Insertion loss + Cable loss.

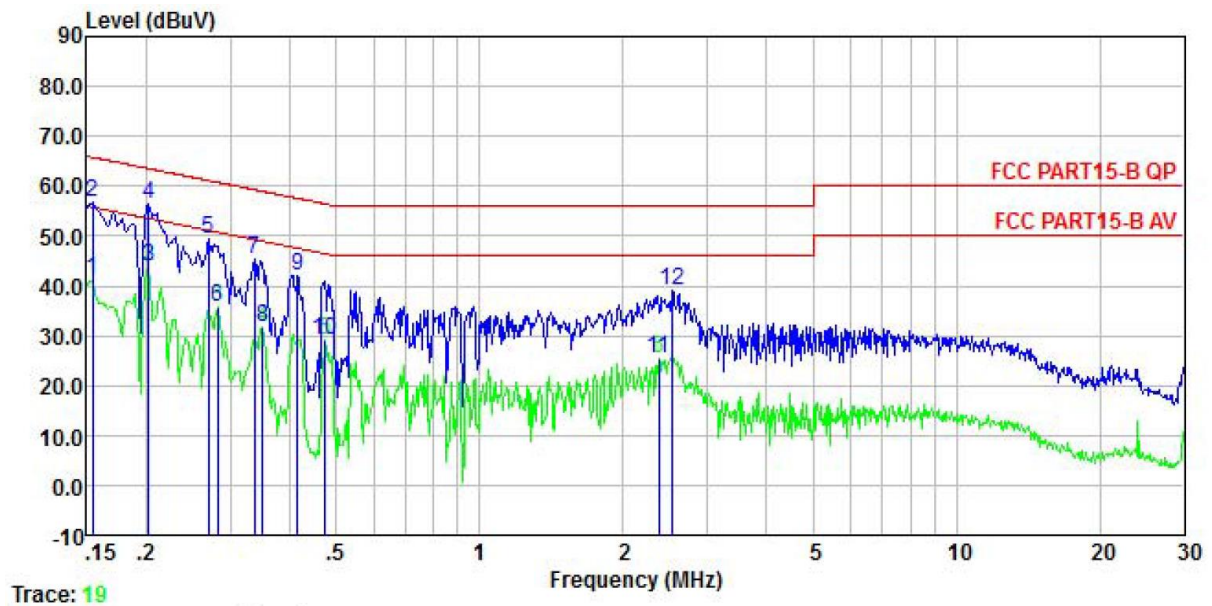


Temperature:	24.6°C	Relative Humidity:	44%
Phase:	N	Test Mode:	Mode 2
Test Voltage:	AC 120V/60Hz	Test Date:	2025.10.28

	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.158	33.30	0.10	0.00	9.88	0.00	43.28	55.56	-12.28	Average
2	0.158	47.58	0.10	0.00	9.88	0.00	57.56	65.56	-8.00	QP
3	0.206	35.67	0.10	0.00	9.88	0.00	45.65	53.36	-7.71	Average
4	0.211	44.60	0.10	0.00	9.88	0.00	54.58	63.18	-8.60	QP
5	0.277	27.52	0.10	0.00	9.88	0.00	37.50	50.90	-13.40	Average
6	0.277	42.46	0.10	0.00	9.88	0.00	52.44	60.90	-8.46	QP
7	0.402	36.88	0.10	0.00	9.88	0.00	46.86	57.81	-10.95	QP
8	0.417	26.02	0.10	0.00	9.88	0.00	36.00	47.51	-11.51	Average
9	0.486	22.37	0.10	0.00	9.88	0.00	32.35	46.23	-13.88	Average
10	0.489	34.22	0.10	0.00	9.88	0.00	44.20	56.19	-11.99	QP
11	2.309	14.97	0.20	0.00	9.88	0.00	25.05	46.00	-20.95	Average
12	2.594	30.74	0.20	0.00	9.88	0.00	40.82	56.00	-15.18	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit.
3. Factor = Insertion loss + Cable loss.

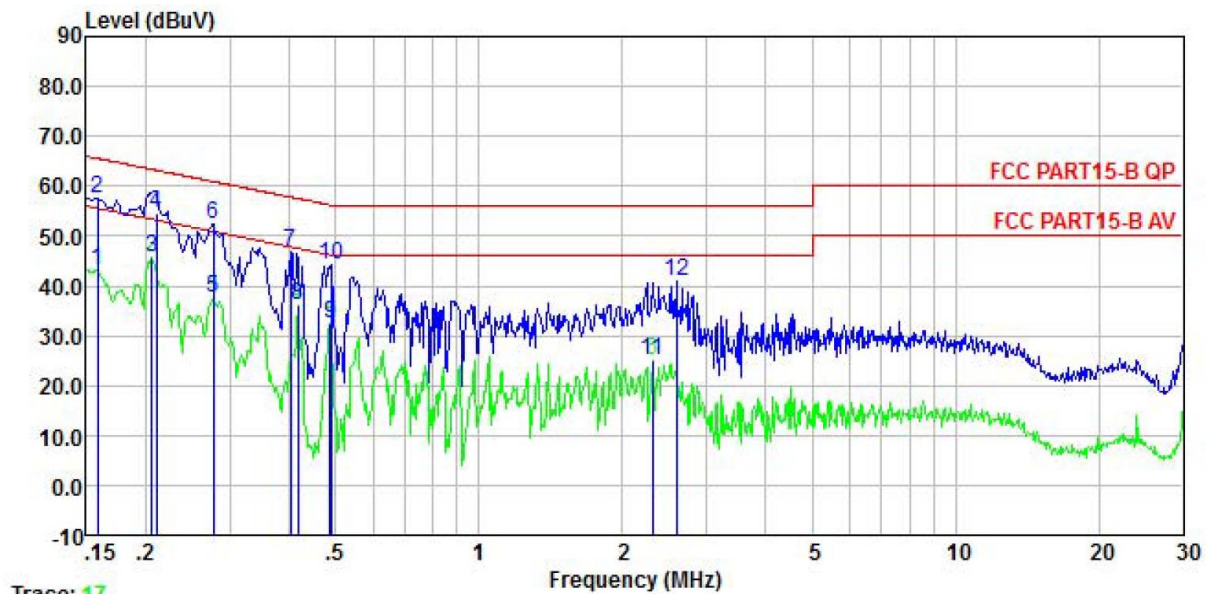

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	☐ Class A	☒ Class B	
	Field strength (dBuV/m) (at 3m)	Field strength (dBuV/m) (at 10m)	Field strength (dBuV/m) (at 3m)
30 ~ 88	49.5	30	40
88 ~ 216	54	33.5	43.5
216 ~ 960	56.9	36	46
Above 960	60	44	54

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	☐ Class A		☒ Class B			
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	64	44	74	54

Frequency Range of Radiated Disturbance Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 ~ 108	1000
108 ~ 500	2000
500 ~ 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

Note:

- (1) The limit for radiated test was performed in the following: FCC PART 15B.
- (2) The tighter limit applies at the band edges
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

3.2.2 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. EUT as the center to the edge of the auxiliary device, the distance from the maximum edge to the center of the antenna is 3 meter.
- c. The height of antenna is varied from 1 meter to 4 meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meter and the rotatable table was turned from 0 degrees to 360 degree to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

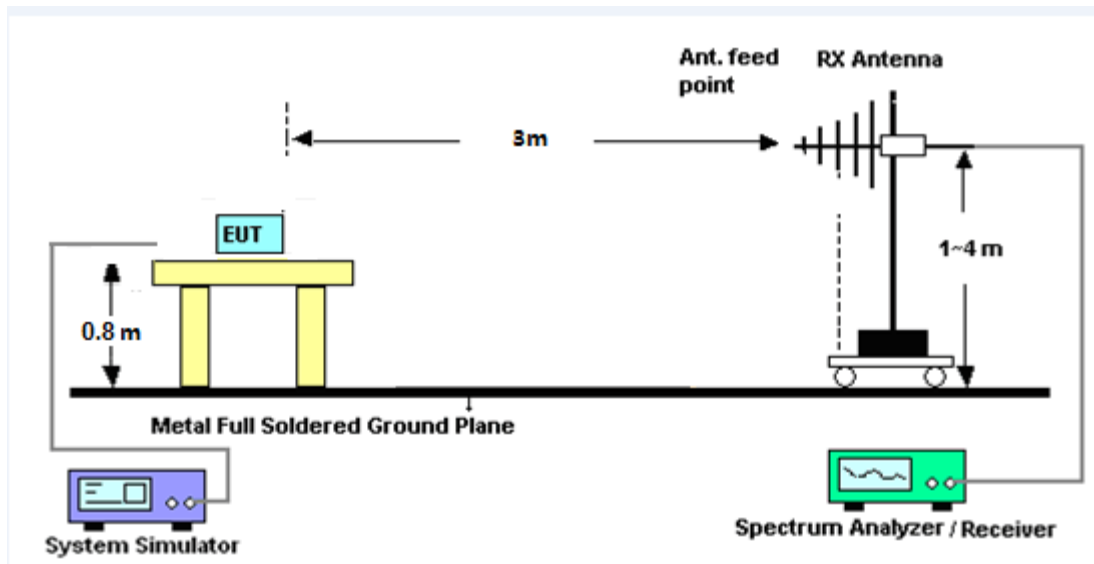

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

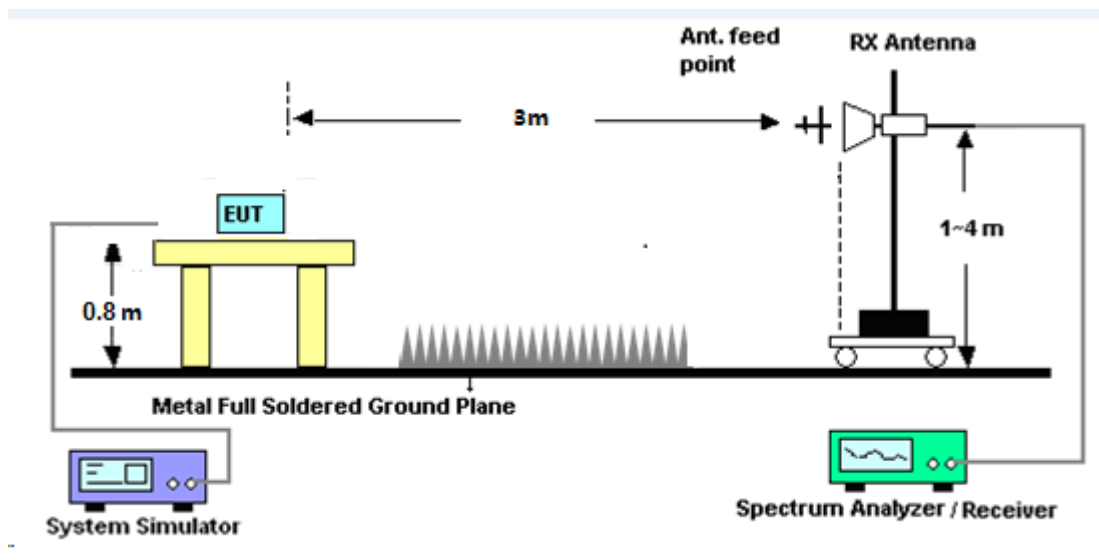

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 described unless otherwise a special operating condition is specified in the following during the testing.

3.2.6 TEST RESULTS (30MHz-1000MHz)


Temperature:	23.6°C	Relative Humidity:	47%
Phase:	Horizontal	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz	Test Date:	2025.10.27

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	53.8632	35.83	-12.90	22.93	40.00	17.07	PK	Vertical
2	154.020	42.75	-17.51	25.24	43.50	18.26	PK	Vertical
3	273.676	42.72	-12.85	29.87	46.00	16.13	PK	Vertical
4	479.957	42.64	-7.90	34.74	46.00	11.26	PK	Vertical
5	770.874	35.28	-1.81	33.47	46.00	12.53	PK	Vertical
6	959.985	35.72	1.20	36.92	46.00	9.08	PK	Vertical

Remark:


1. All readings are Quasi-Peak.
2. Margin = Result (Result = Reading + Factor)–Limit.
3. Factor= Cable Loss +Antenna Factor-Amplifier Gain.

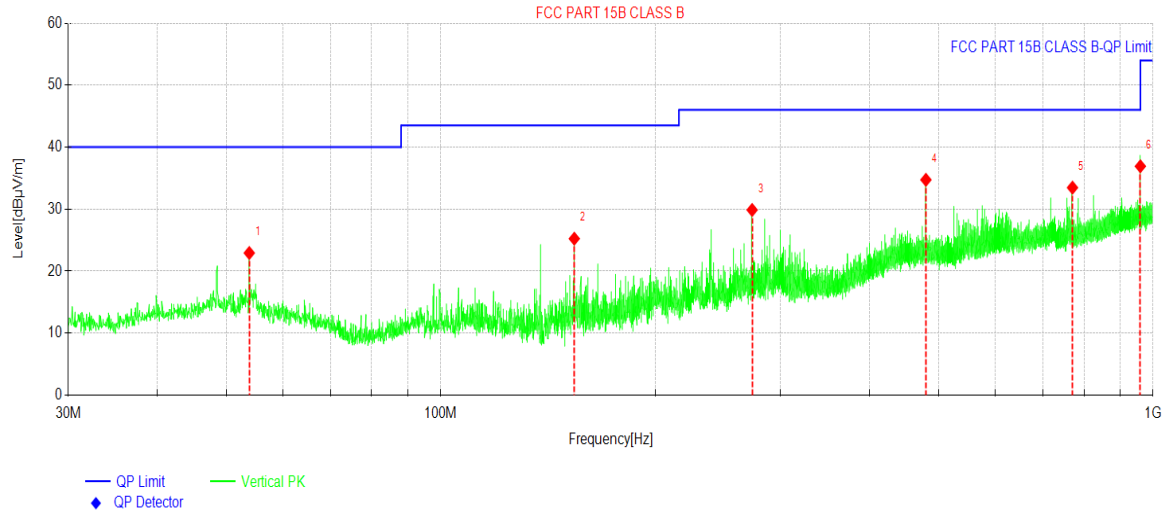

Temperature:	23.6℃	Relative Humidity:	47%
Phase:	Vertical	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz	Test Date:	2025.10.27

Suspected Data List								
NO.	Freq. [MHz]	Reading[dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	48.5764	32.89	-12.67	20.22	40.00	19.78	PK	Horizontal
2	240.0640	45.81	-13.48	32.33	46.00	13.67	PK	Horizontal
3	302.8261	47.02	-12.14	34.88	46.00	11.12	PK	Horizontal
4	479.9570	43.07	-7.90	35.17	46.00	10.83	PK	Horizontal
5	719.9470	38.35	-2.78	35.57	46.00	10.43	PK	Horizontal
6	959.9855	41.31	1.20	42.51	46.00	3.49	PK	Horizontal

- Remark:
1. All readings are Quasi-Peak.
 2. Margin = Result (Result =Reading + Factor)–Limit.
 3. Factor= Cable Loss +Antenna Factor-Amplifier Gain.

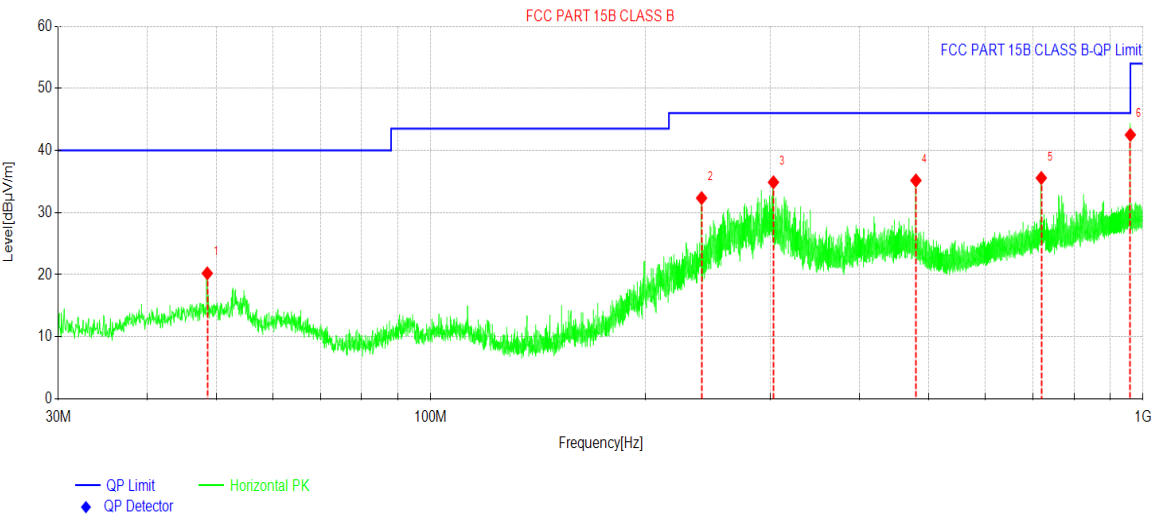

3.2.7 TEST RESULT (1000-18000 MHz)


Temperature:	24.3℃	Relative Humidity:	52%
Phase:	Horizontal	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz	Test Date:	2025.10.16

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1539.00	51.65	29.30	-22.35	54.00	24.70	AV	Horizontal
2	1541.75	64.42	42.06	-22.36	74.00	31.94	PK	Horizontal
3	2707.75	59.83	42.00	-17.83	74.00	32.00	PK	Horizontal
4	2765.50	49.61	31.96	-17.65	54.00	22.04	AV	Horizontal
5	3840.75	48.17	33.90	-14.27	54.00	20.10	AV	Horizontal
6	3902.62	59.60	45.57	-14.03	74.00	28.43	PK	Horizontal
7	5599.37	56.44	51.86	-4.58	74.00	22.14	PK	Horizontal
8	5602.12	46.27	41.68	-4.59	54.00	12.32	AV	Horizontal
9	7880.50	45.05	44.72	-0.33	54.00	9.28	AV	Horizontal
10	8030.37	56.22	56.06	-0.16	74.00	17.94	PK	Horizontal
11	11360.6	55.21	61.18	5.97	74.00	12.82	PK	Horizontal
12	11404.6	44.59	50.67	6.08	54.00	3.33	AV	Horizontal

Remark:

1. All readings are Quasi-Peak.
2. Margin = Result (Result = Reading + Factor)–Limit.
3. Factor= Cable Loss +Antenna Factor-Amplifier Gain.
4. Test Frequency up to 18GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

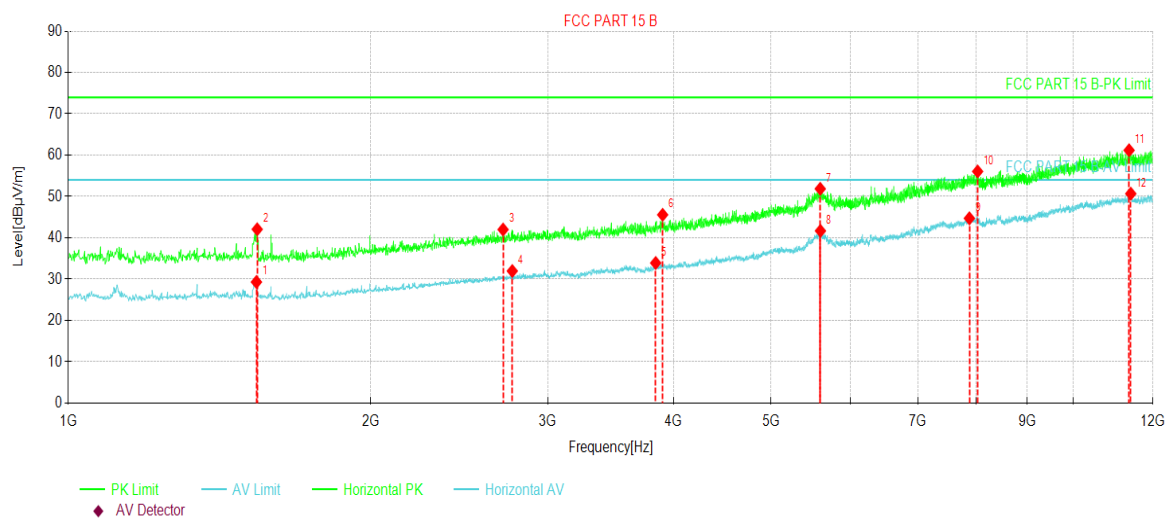


Temperature:	24.5°C	Relative Humidity:	54%
Phase:	Vertical	Test Mode:	Mode 1
Test Voltage:	AC 120V/60Hz	Test Date:	2025.07.16

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1475.75	64.58	42.37	-22.21	74.00	31.63	PK	Vertical
2	1475.75	54.08	31.87	-22.21	54.00	22.13	AV	Vertical
3	1680.62	52.03	29.81	-22.22	54.00	24.19	AV	Vertical
4	1680.62	63.43	41.21	-22.22	74.00	32.79	PK	Vertical
5	3101.00	48.85	32.21	-16.64	54.00	21.79	AV	Vertical
6	3106.50	59.86	43.24	-16.62	74.00	30.76	PK	Vertical
7	5602.12	56.78	52.19	-4.59	74.00	21.81	PK	Vertical
8	5626.87	46.14	41.31	-4.83	54.00	12.69	AV	Vertical
9	7879.12	44.92	44.59	-0.33	54.00	9.41	AV	Vertical
10	7898.37	55.93	55.63	-0.30	74.00	18.37	PK	Vertical
11	11278.1	55.40	61.10	5.70	74.00	12.90	PK	Vertical
12	11417.0	44.36	50.40	6.04	54.00	3.60	AV	Vertical

Remark:

1. All readings are Quasi-Peak.
2. Margin = Result (Result = Reading + Factor)–Limit.
3. Factor= Cable Loss +Antenna Factor-Amplifier Gain.
4. Test Frequency up to 18GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

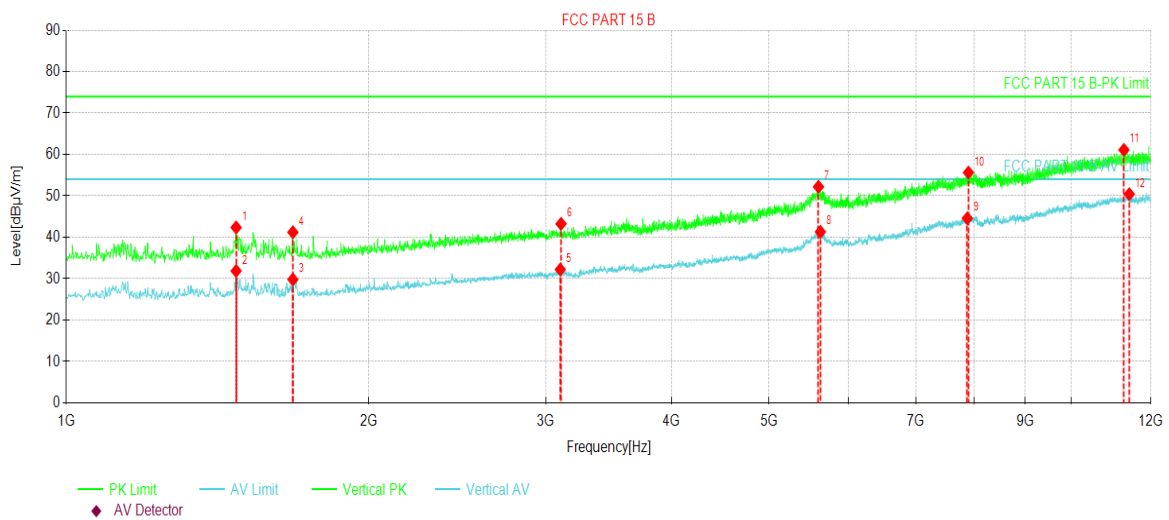

Notes:

1. Measuring frequencies from 1 GHz to 18GHz
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak and average detector mode of the emission shown in Actual FS column.
3. The frequency emission of 18-25GHz is at least 20dB lower than the limit, and the frequency emission mainly comes from environmental noise.

SAMPLE OF THE LABEL



Brand Name

Model Name

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference. And (2) this device must accept any interference received, including interference that may cause undesired operation.

*****END OF THE REPORT*****