


Change: C27 to C20, R57 to 10M, R42 to 220, R45 to 10, C29 to 12p, C36 to .001, R27 to 27K, C34 to 24pF, R26 to 47K, HP to 12 pin, R49 to 110K-1%
Add: COUT = 5pF, C79 = .22uF, R16 = 47K, C15A = .022uF, DL1 & DL2 = MMBD6050LT1



Remote
REMRVCRC.SCH

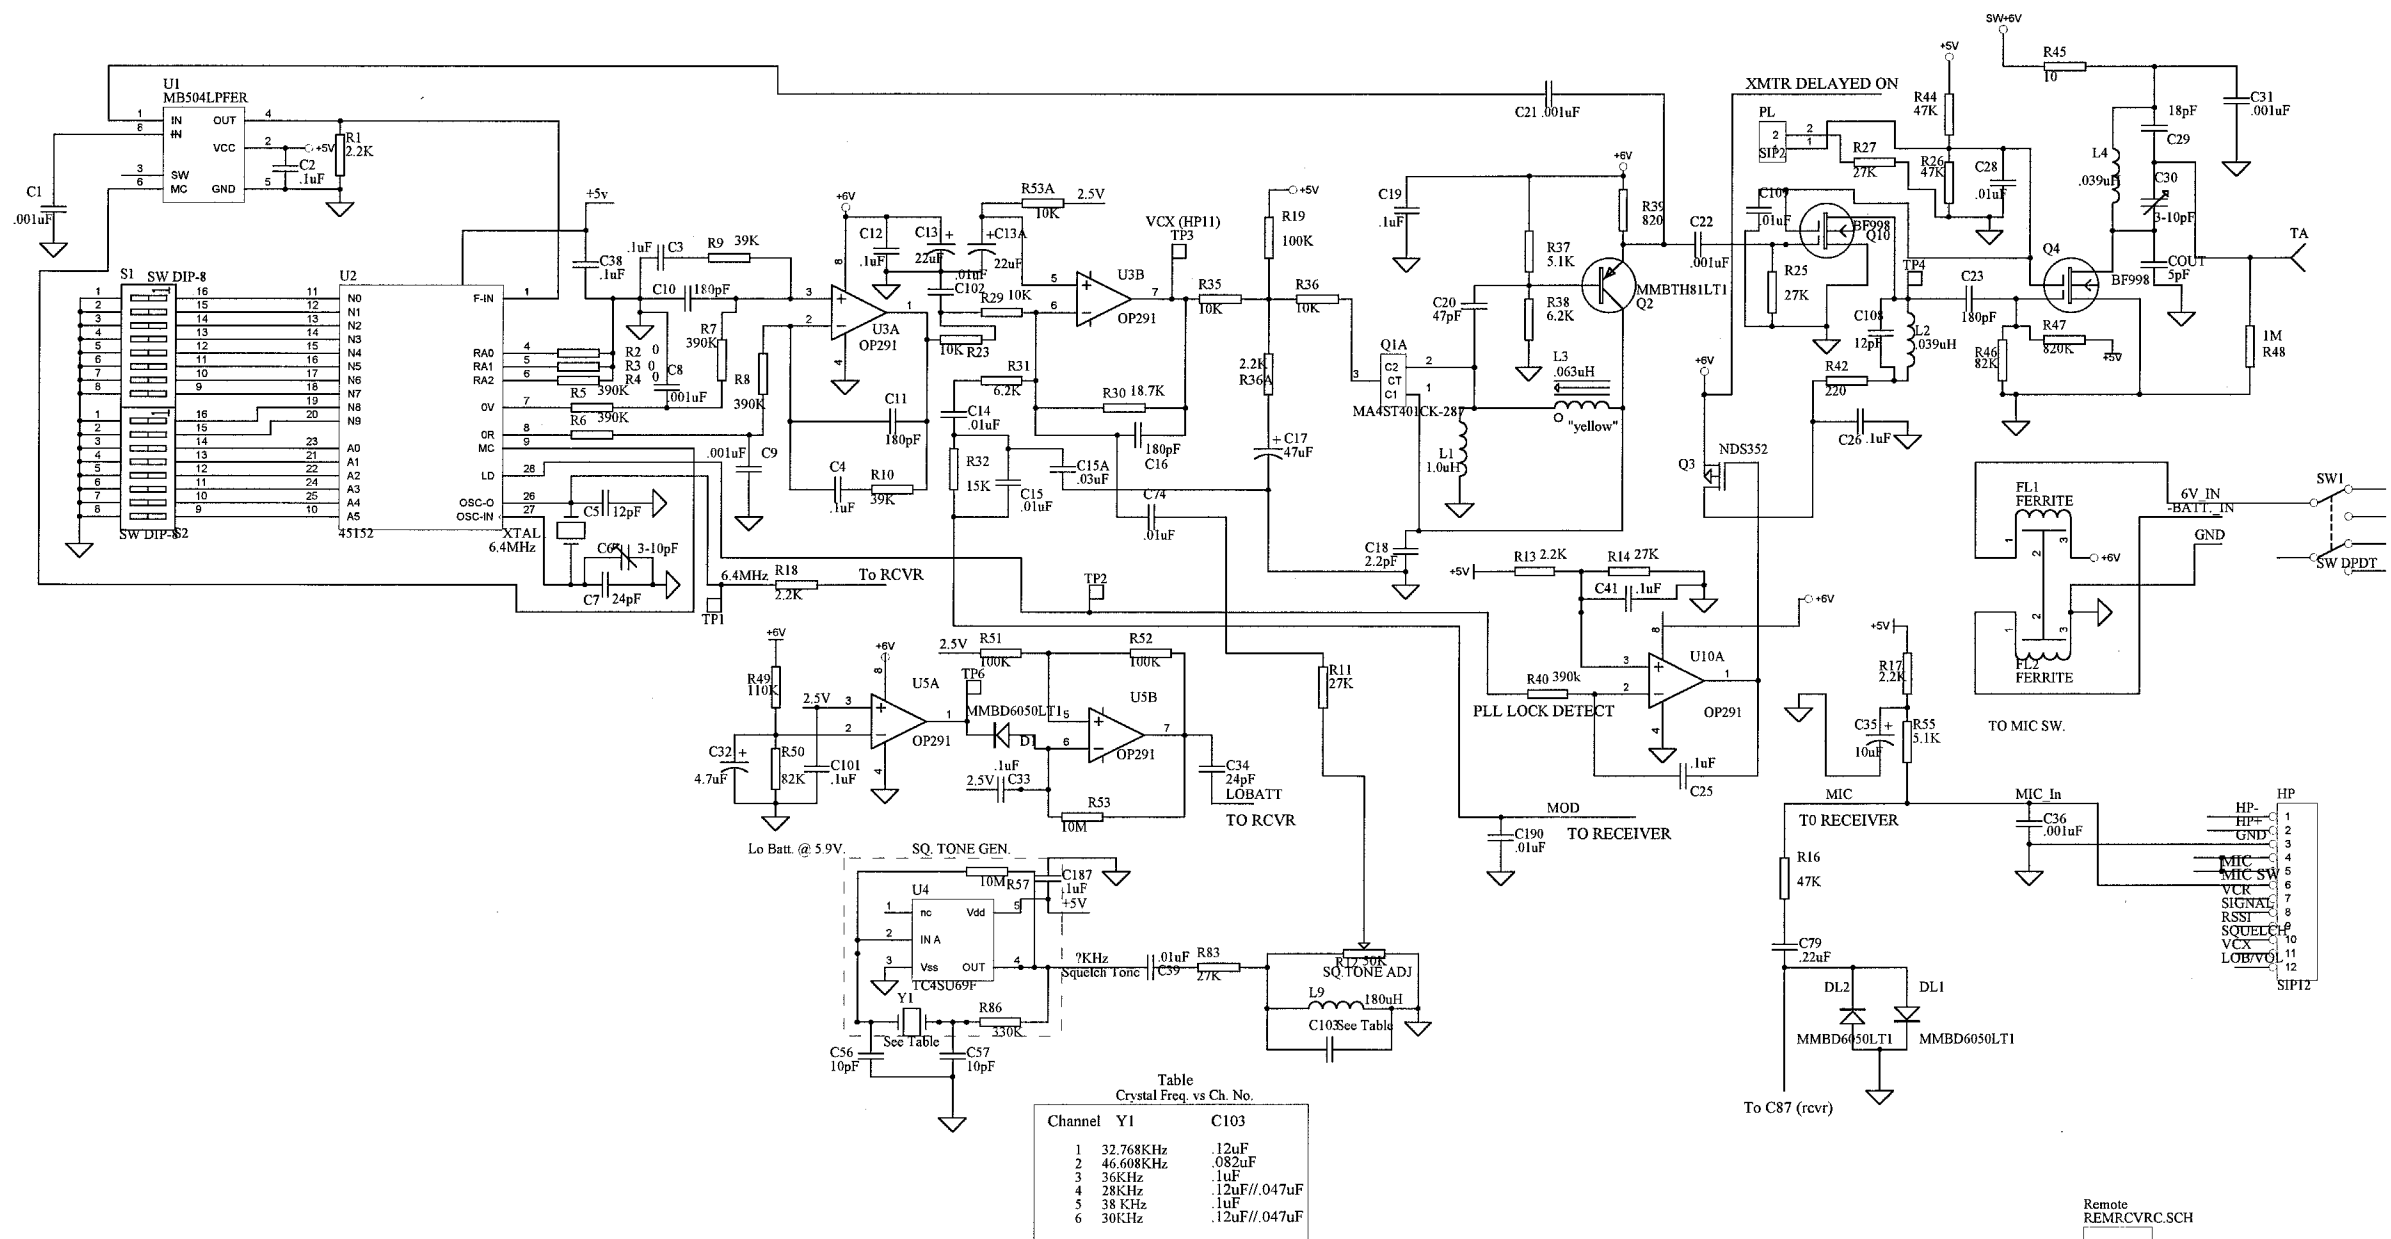