



AnyDATA
*AnyTime AnyPlace Any Wireless
Data Solutions*

EMII-800 User Manual Application Information

*EMII-800-V1.0
February 15, 2002*

AnyDATA.NET Inc.
Hanvit Bank B/D 6F
Byulyang-dong Kwachon
KOREA

Tel) 82-2-504-3360

Fax) 82-2-504-3362

AnyDATA.NET Inc.
Hanvit Bank B/D 6F
Byulyang-dong Kwachon
KOREA

Copyright © 2001 **AnyDATA.NET Inc.**
All rights reserved. Printed in the Republic Of KOREA.

All data and information contained in or disclosed by this document are confidential and proprietary information of **AnyDATA.NET Inc.**, and all rights therein are expressly reserved. By accepting this material, the recipient agrees that this material and the information contained therein are held in confidence and in trust and will not be used, copied, reproduced in whole or in part, nor its contents revealed in any manner to others without the express written permission of **AnyDATA.NET Inc.**

AnyDATA.NET Proprietary : Restricted Distribution. This document contains critical information about **AnyDATA.NET** products and may not be distributed to anyone without permission of **AnyDATA.NET** Inc. All data and information contained in this document are proprietary and confidential information of **AnyDATA.NET** Inc. No part of this document may be reproduced, in any form or any means without written permission of **AnyDATA.NET** Inc.

Although the information in this document has been carefully reviewed and its believed to be reliable. **AnyDATA.NET** Inc. does not assume any liability arising out of the application or use of any product described herein, Neither does it convey any license under its patent rights nor rights of others.

Send Technical Questions to :
paiton@AnyDATA.NET

EMII-800 User Manual Application Information
EMII-800-V1.0
February 15, 2002

*Restricted Distribution
DO NOT COPY*

Introduction

The EMI-800 is designed for the test and simulation of the CDMA wireless data communications. User can connect the EMI-800 to your PC or Notebook and easily test the wireless communications. User can use this to develop your applications software even before user's own hardware is ready. It also can be used as a debugging during user's hardware test.

Disclaimer and Limitation of Liability

AnyDATA.NET Inc. assumes no responsibility for any damage or loss resulting from the misuse of its products. AnyDATA.NET Inc. assumes no responsibility for any loss or claims by third parties, which may arise through the use of its products.

AnyDATA.NET Inc. assumes no responsibility for any damage or loss caused by the deletion or loss of data as a result of malfunctions or repairs.

The information disclosed herein is the exclusive property of AnyDATA.NET Inc. and no part of this publication may be reproduced or transmitted in any form or by any means including electronic storage, reproduction, execution or transmission without the prior written consent of AnyDATA.NET Inc. The information contained in this document is subject to change without notice.

Reproduction, adaptation or translation of this document is prohibited without prior written permission of AnyDATA.NET Inc.

FCC RF Exposure Information

Warning! Read this information before using this device.



In August 1996 the Federal Communications Commission (FCC) of the United States with its action in Report and Order FCC 96-326 adopted an updated safety standard for human exposure to radio frequency electromagnetic energy emitted by FCC regulated transmitters. Those guidelines are consistent with the safety standard previously set by both U.S. and international standards bodies. The design of this device complies with the FCC guidelines and these international standards.



CAUTION

Operating Requirements

- ▶ The user can not make any changes or modifications not expressly approved by the party responsible for compliance, otherwise it could void the user's authority to operate the equipment.
- ▶ To satisfy FCC RF exposure compliance requirements for a mobile transmitting device, this device and its antenna should generally maintain a separation distance of 20cm or more from a person's body.

Special accessories

In order to ensure this device in compliance with FCC regulation, the special accessories are provided with this device and must be used with the device only. The user is not allowed to use any other accessories than the special accessories given with this device

Contents

- 1 Introduction**
 - 1.1 Purpose**
 - 1.2 Organization**
 - 1.3 Revision History**

- 2 Overview**
 - 2.1 Application Description**
 - 2.2 Technical Specifications**
 - 2.2.1 General Specification**
 - 2.2.2 Receive Specification**
 - 2.2.3 Transmit Specification**
 - 2.2.4 Standards**
 - 2.3 Interface Diagram**
 - 2.4 EMII-800 General Features**
 - 2.5 Internal Modem Features**

- 3 PIN Description**
 - 3.1 8-Pin Connector (RS232 Standard)**
 - 3.2 8-Pin Connector (Debugging)**
 - 3.3 DC Power Connector**

- 4 Interface Descriptions**
 - 4.1 Overview**
 - 4.2 RS232 Interface (Standard)**

5 Electrical Specifications

5.1 Absolute Maximum Ratings

5.2 Recommended Operating Conditions

5.3 Power Consumption

5.4 Serial Interface Electrical Specifications

6 Mechanical Dimension

6.1 EMII-800 Outline

7 FCC Notice

1. Introduction

1.1 Purpose

This Manual provides hardware interface and programming information for EMI-800 CDMA Wireless Data Modem.

1.2 Organization

The interface and operation section is organized into the following subsections:

- n** Section 2 – Introduces users to the EMI-800 CDMA Wireless Data Modem basic features and general specifications.
- n** Section 3 – Contains EMI-800 Pin description - DC12V Input Port, 8pin Serial Port and Debugging Port.
- n** Section 4 – Describes the UART Interface.
- n** Section 5 – Specifies the recommended operating conditions, DC voltage characteristics, I/O timing, and power estimations for the modem.
- n** Section 6 – Provides package dimensions and outlook features for the modem.
- n** Section 7 – Describes the FCC Notice.

1.3 Revision History

The revision history for this document is shown in Table 1-1.

Table 1-1 Revision History

Version	Date	Description
V1.0	Feb. 2002	Initial Release

2. Overview

2.1 Application Descriptions

The CDMA Wireless Data Modem is a complex consumer communications instrument that relies heavily on both digital signal and embedded processor technologies. The Wireless Data Modem manufactured by AnyDATA.NET supports Code-Division-Multiple-Access(CDMA). This operates in PCS spectrum.

In a continuing effort to simplify the design and to reduce the production cost of the Wireless Data Modem, AnyDATA.NET has successfully developed the EMII-800. The EMII-800 is AnyDATA.NET's latest compact Wireless Data Modem operating in PCS spectrum, also contains complete digital modulation and demodulation system for CDMA standards as specified in IS-95 A/B and IS-2000.

The subsystem within the EMII-800 includes a CDMA processor (MSM5100), an integrated CODEC with an ear piece and microphone amplifiers, and an RS-232 serial interface supporting forward link data communications of a rate of 153.6kbps.

The EMII-800 provides external interface. External interface includes the standard RS-232, Digital Audio, and External On/Off control.

The EMII-800 has the capability to power down unused circuits in order to dynamically minimize power consumption.

2.2 Technical Specifications

2.2.1 General Specifications

PARAMETERS	DESCRIPTIONS
External Access	Code-Division-Multiple-Access (CDMA)
CDMA Protocol	IS-95A/B/C, IS-98A, IS-126, IS-637A, IS-707A
Data Rate	153.6Kbps
Transmit/Receive Frequency Interval	45MHz
Band Width	1.23MHz
Operating Voltage	DC 6V ~ 12V
Current Consumption	Stand by mode : Idle (55mA) , Busy mode : 280mA (Max) at 12V
Operating Temperature	-30℃ ~ +60℃
Frequency Stability	±300Hz
Antenna	Whip Antenna, 50ohm
Size	57 X 121 X 24mm with case
Weight	About 112g
External Interface	RS-232, Digital/Analog Audio, LCD, Keypad, Ringer External On/Off Control

Restricted Distribution
DO NOT COPY

2.2.2 Receive Specifications

PARAMETERS	DESCRIPTIONS
Frequency Range	869.04 ~ 893.97 MHz
Sensitivity	Below -104 dBm
Interference Rejection	Single tone (-30dBm @900KHz) : Below -101dBm Two tone (-43 dBm @900KHz and 1700KHz) : Below -101dBm Two tone (-32 dBm @900KHz and 1700KHz) : Below -90dBm Two tone (-21 dBm @900KHz and 1700KHz) : Below -79dBm
Spurious Wave Suppression	Below -80dBc
Input Dynamic Range	-25 dBm ~ -104dBm

2.2.3 Transmit Specifications

PARAMETERS	DESCRIPTIONS
Frequency Range	824.04 ~ 848.97 MHz
Nominal Power	0.32 W
Minimum Controlled Output Power	Below -50dBm
Max Power Spurious	Below -42dBc/30KHz @ 900KHz Below -54dBc/30KHz @ 1.98MHz

2.2.4 Standards

IS-95A/B/C : Protocol Between MS & BTS
 IS-96A : Voice Signal Coding
 IS-98A : Base MS Function
 IS-126 : Voice Loop-Back
 IS-637 : Short Message Service
 IS-707 : Data Service

*Restricted Distribution
DO NOT COPY*

2.3 Interface Diagram

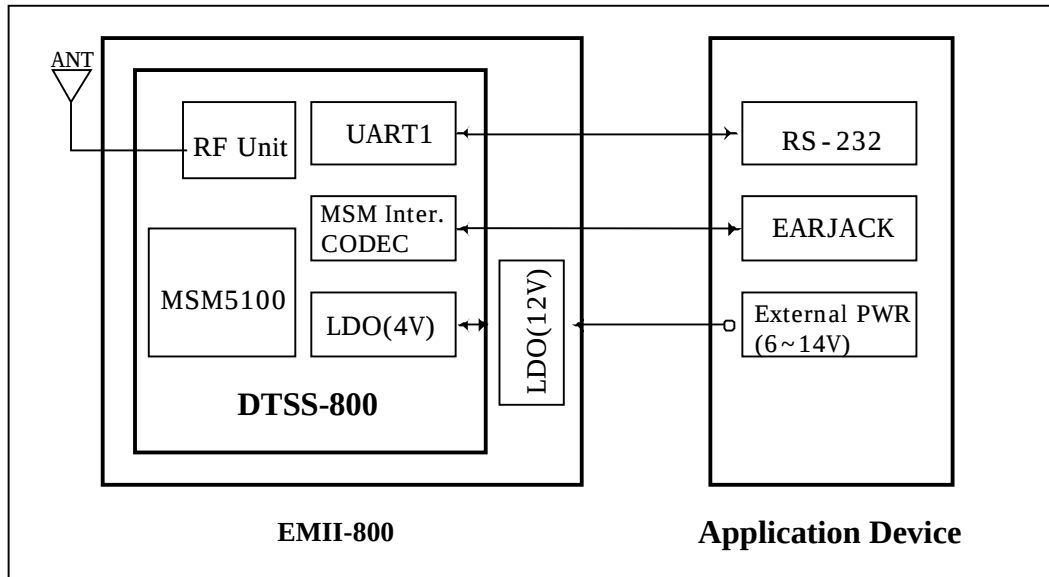


Figure 2-1 Interface Block Diagram

2.4 EMII-800 General Features



Figure 2-2 EMII-800 General Features

2.5 Internal Modem Features

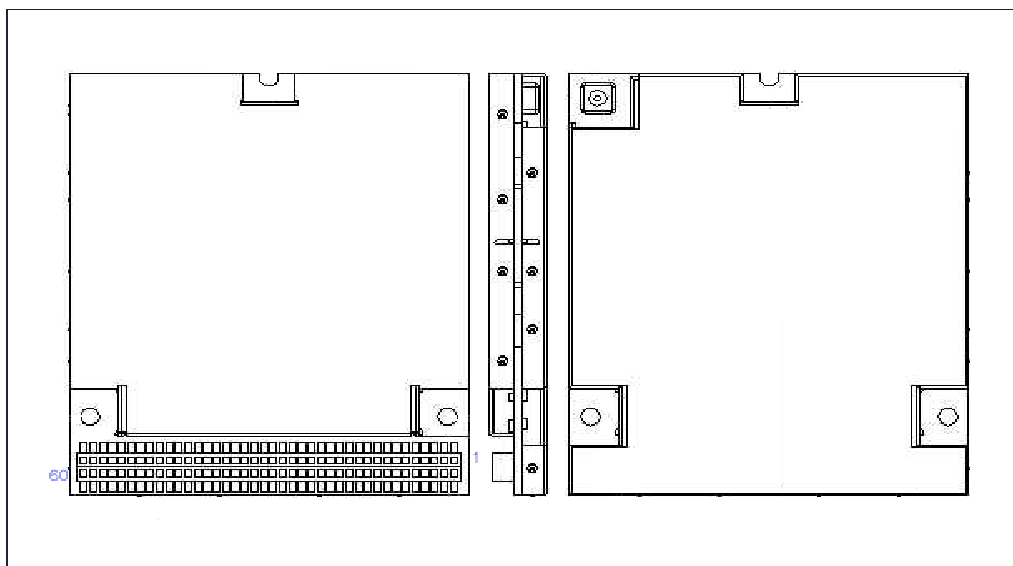


Figure 2-3 Internal Modem General Features (DTSS-800)

3. PIN Description

3.1 8-Pin Male Modular Jacks(RS232 Standard)

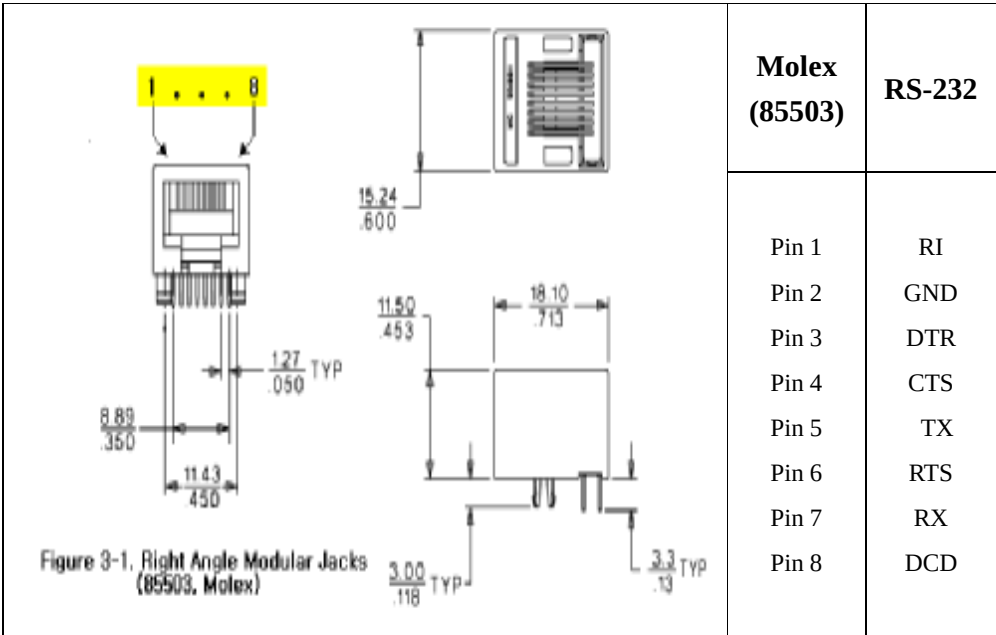


Figure 3-1 Right Angle Modular Jacks Pin Description (85503,Molex 8P)

3.2 3-Pin Connector (Debugging)




Figure 3-2 Debugging Connector (5268,Molex 3P)

3.3 DC Power Connector




Figure 3-3 DC 12V Power Connector (5268, Molex 2P)

4. Interface Descriptions

4.1 Overview

This chapter covers information required to design the EMI-800 into a subscriber unit application. In addition, the internal signals that are necessary for complete understanding of the UART interfaces are described below.

4.2 RS232 Interface (Standard)

The Universal Asynchronous Receiver Transmitter (UART) communicates with serial data that conforms the RS-232 Interface protocol. The modem provides 3.0V CMOS level outputs and 3.0V CMOS switching input level. And all inputs have 5.0V tolerance but 3.0V or 3.3VCMOS logic compatible signals are highly recommended.

All the control signals of the RS-232 signals are active low, but data signals of RXD, and TXD Are active high. The UART has a 64byte transmit (TX) FIFO and a 64byte receive (RX) FIFO. The UART Features hardware handshaking, programmable data sizes, programmable stop bits, and odd, even, no parity. The UART operates at a 115.2kbps maximum bit rate.

NAME	DESCRIPTION	CHARACTERISTIC
DP_DCD/	Data Carrier Detect	Network connected from the modem
DP_RI/	Ring Indicator	Output to host indicating coming call
DP_RTS/	Request to Send	Ready for receive from host
DP_TXD	Transmit Data	Output data from the modem
DP_DTR/	Data Terminal Ready	Host ready signal
DP_RXD	Receive Data	Input data to the modem
DP_CTS/	Clear to Send	Modem output signal
GND	Signal Ground	Signal ground

Figure 4-1 UART Interface Pinouts

*Restricted Distribution
DO NOT COPY*

5. Electrical Specifications

5.1 Absolute Maximum Ratings

Operating the modem under conditions that exceed those listed in the Absolute Maximum. The Ratings table may result in damage to the modem.

Absolute Maximum Ratings may be considered as limiting values, and are considered individually. While all other parameters are within their specified operating ranges, the functional operation of the modem under any of the conditions in the Absolute Maximum Ratings table is not implied.

Table 5-1 Absolute Maximum Ratings

PARAMETER	MIN	MAX	UNITS
Storage Temperature	-40	+100	°C
Voltage On Any Input or Output Pin	-	+5.0	V
Supply Voltage	-	+15	V
Initializing Current	100		mA
Drop	No damages after 60-Inch drop over concrete floor		

5.2 Recommended Operating Conditions

PARAMETER	MIN	MAX	UNITS
Supply Voltage	6	12	V
Operating Temperature	-30	+60	°C
Operating Humidity	95%(50°C) Relative Humidity		

5.3 Power Consumption


CONVERSATION	STANDBY	
	Idle	Sleep
280 mA (MAX)	55 mA	18 mA

5.4 Serial Interface Electrical Specifications

PARAMETER	MIN	MAX	UNITS
Input High Voltage	+2.0	+3.7	V
Input Low Voltage	-0.5	+0.8	V
Output High Voltage	+2.4		V
Output Low Voltage		+0.4	V

6. Mechanical Dimensions

6.1 EMII-800 Outline

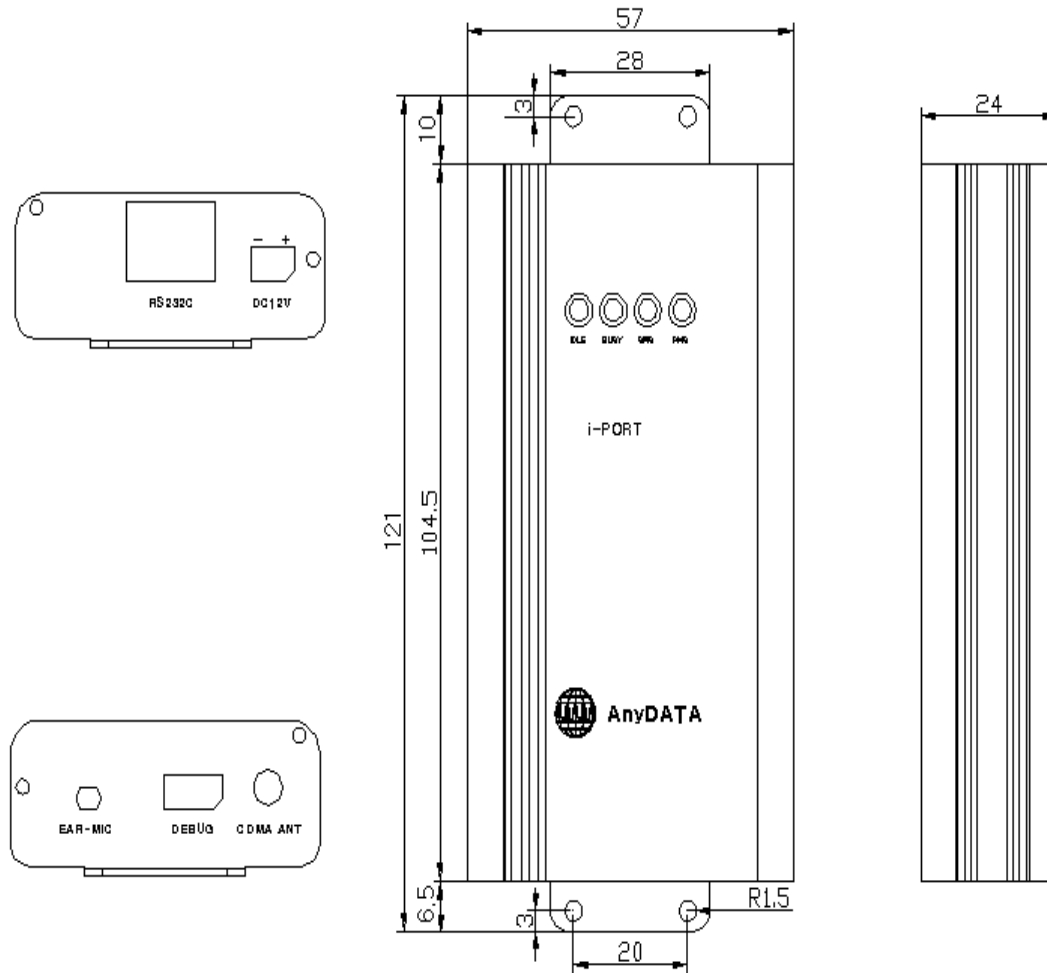

Restricted Distribution
DO NOT COPY

7. FCC Notice

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- n** Reorient or relocate the receiving antenna.
- n** Increase the separation between the equipment and receiver.
- n** Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- n** Consult the dealer or an experienced radio/TV technician for help.

*Restricted Distribution
DO NOT COPY*