



深圳市福祥电子有限公司

Shenzhen Fuxiang Electronics Co., LTD

No. 88, Langbei Industrial Zone Road, Tongde Community, Baolong Street,
Longgang District, Shenzhen

Antenna specification

天线规格书

Model/型号: 1PL33 VER: 1.0

Prepared By/Date 于位华 /2022. 11. 15
编制/日期

Checked By/Date 吴国玺 /2022. 11. 15
审核/日期

Approved By/Date 赖胜雄/2022. 11. 15
批准/日期

Company Name

Customer Approval

1. Mode name: Wire antenna

Technical requirements:

- There should be no damage, line damage and other phenomena.
- There should be no slit after dipping tin.
- OD: $\varnothing 1.3 \pm 0.1$, Copper wire OD: 0.15 ± 0.01 , 17core

2. PHOTO




3. Size: Length 33mm, Diameter 1.3mm

Antenna gain


2.4GHz Antenna			
Frequency (MHz)	Efficiency (dB)	Efficiency (%)	Gain (dBi)
2400	-5.00	31.59	-0.47
2402	-4.98	31.80	-0.45
2412	-4.75	33.46	-0.28
2420	-4.57	34.94	-0.19
2430	-4.27	37.41	0.09
2435	-4.17	38.25	0.09
2437	-4.10	38.87	0.16
2440	-3.98	39.97	0.30
2441	-3.95	40.30	0.33
2442	-3.92	40.53	0.34
2445	-3.86	41.07	0.32
2450	-3.75	42.13	0.39
2455	-3.60	43.68	0.52
2462	-3.46	45.06	0.50
2465	-3.40	45.71	0.56
2472	-3.29	46.84	0.52
2475	-3.26	47.20	0.50
2480	-3.17	48.22	0.58
2482	-3.12	48.72	0.58
2485	-3.08	49.25	0.52

4. APPENDIX A S - Parameter & Antenna Radiation Patterns


4.1. 2-D Antenna Pattern (**Theta=90°**)

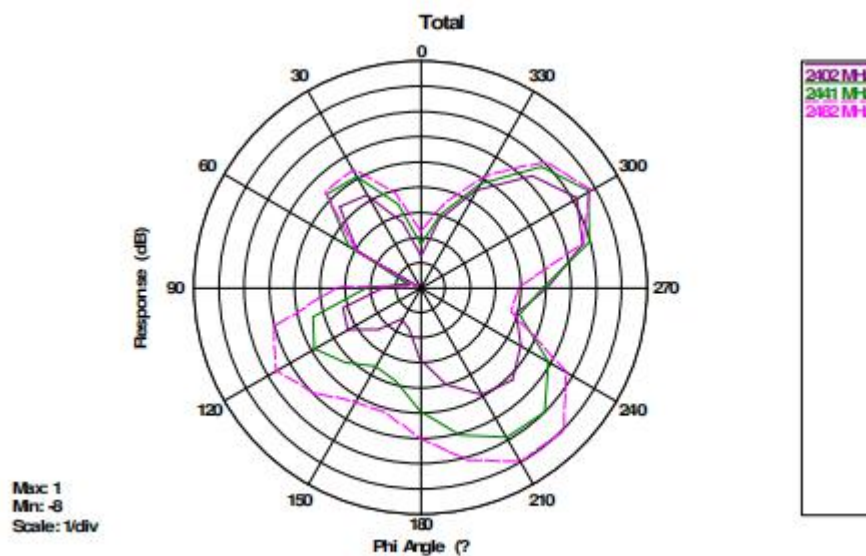

4.2. 3-D Antenna Pattern

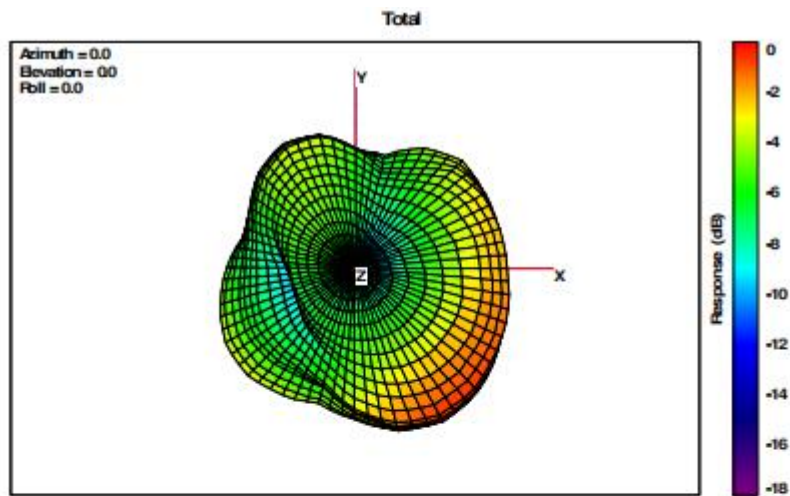


Front View

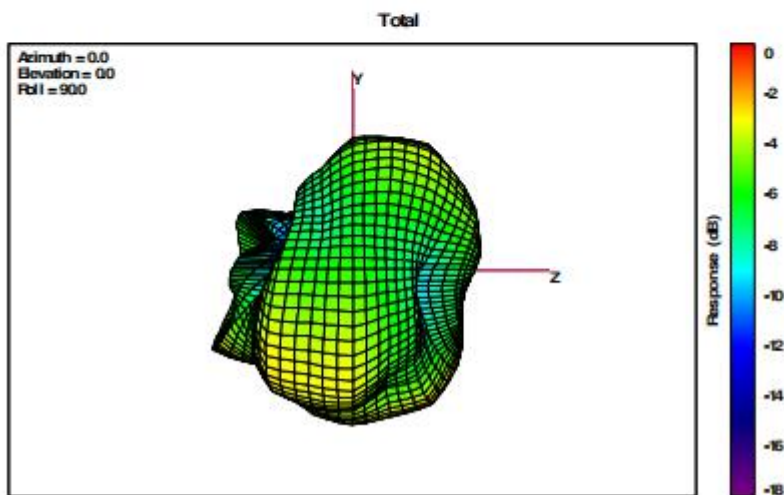

Side View

版本	变更标志	变更内容	制定	日期	BCN. NO
A					

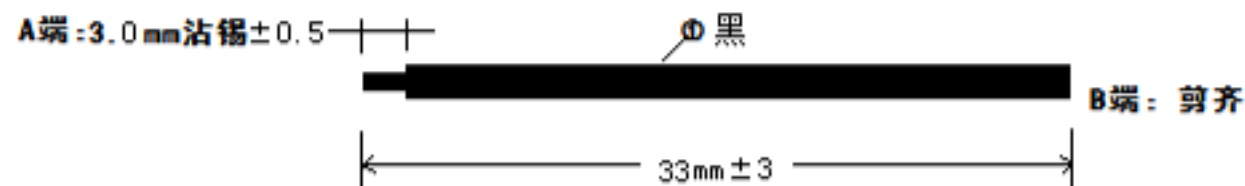

技术要求:

- 1、沾锡后不能有开叉现象;
- 2、B端不可有露铜现象;
- 3、外径OD: $1.3\text{mm} \pm 0.1$, 铜丝OD: 0.15 ± 0.01 ;
- 4、符合ROHS要求;

 深圳市福祥电子有限公司				客户: A94			
品名规格		导线-L=33mm-单边开口3mm			绘 图		于卫华
产品料号					审 核		吴国玺
客户料号		R47100-00316			核 准		赖胜雄
REV	B		单位	MM	日 期	2023.02.28	
			比例	NTS	图 号		

①	电线	PVC 17/0.15*1.3 黑	mm	33
序号	名称	规格描述		用量