


Modottel Co., Ltd. FCC ID: POQWPE-2300

SAM Phantom; Flat Section; Position: (270°,270°)
Probe: ET3DV6 - SN1590; ConvF(5.36,5.36,5.36); Crest factor: 1.0
1880 MHz Muscle: $\sigma = 1.61 \text{ mho/m}$ $\epsilon_r = 53.2$ $\rho = 1.00 \text{ g/cm}^3$
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Cube 5x5x7; Powerdrift: -0.19 dB
SAR (1g): 0.371 mW/g, SAR (10g): 0.220 mW/g


Ambient Temperature: 24.4°C Fluid Temperature: 23°C
Body SAR at 1.5 cm Separation Distance
Antenna In
Model: WPE-2300
PCS CDMA Mode
Extended Battery
Channel 600 [1880.00 MHz]
Conducted Power: 24.51 dBm
Date Tested: January 30, 2002

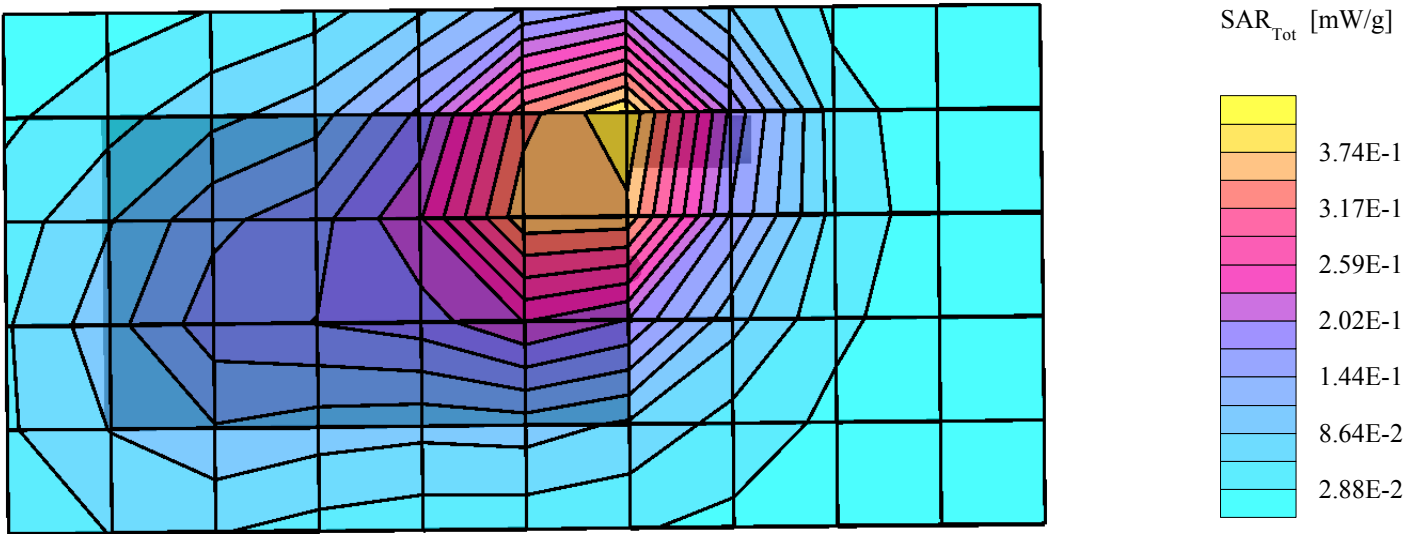

Modottel Co., Ltd. FCC ID: POQWPE-2300

SAM Phantom; Flat Section; Position: (270°,270°)
Probe: ET3DV6 - SN1590; ConvF(5.36,5.36,5.36); Crest factor: 1.0
1880 MHz Muscle: $\sigma = 1.61 \text{ mho/m}$ $\epsilon_r = 53.2$ $\rho = 1.00 \text{ g/cm}^3$
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Cube 5x5x7; Powerdrift: -0.15 dB
SAR (1g): 0.976 mW/g, SAR (10g): 0.566 mW/g


Ambient Temperature: 24.4°C Fluid Temperature: 23°C
Body SAR at 1.5 cm Separation Distance
Antenna out
Model: WPE-2300
PCS CDMA Mode
Extended Battery
Channel 600 [1880.00 MHz]
Conducted Power: 24.51 dBm
Date Tested: January 30, 2002

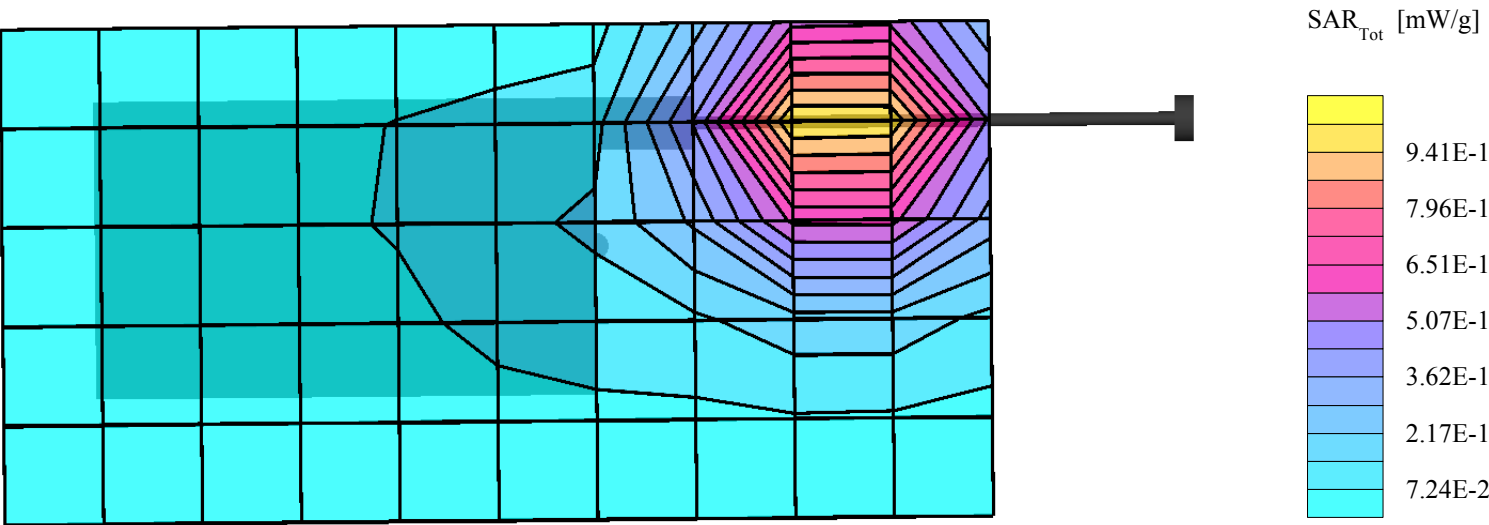

Modottel Co., Ltd. FCC ID: POQWPE-2300

SAM Phantom; Flat Section; Position: (270°,270°)
Probe: ET3DV6 - SN1590; ConvF(5.36,5.36,5.36); Crest factor: 1.0
1880 MHz Muscle: $\sigma = 1.61 \text{ mho/m}$ $\epsilon_r = 53.2$ $\rho = 1.00 \text{ g/cm}^3$
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Cube 5x5x7; Powerdrift: -0.17 dB
SAR (1g): 0.410 mW/g, SAR (10g): 0.239 mW/g


Ambient Temperature: 24.4°C Fluid Temperature: 23°C
Body SAR at 1.5 cm Separation Distance
Antenna In
Model: WPE-2300
PCS CDMA Mode
Standard Battery
Channel 600 [1880.00 MHz]
Conducted Power: 24.51 dBm
Date Tested: January 30, 2002

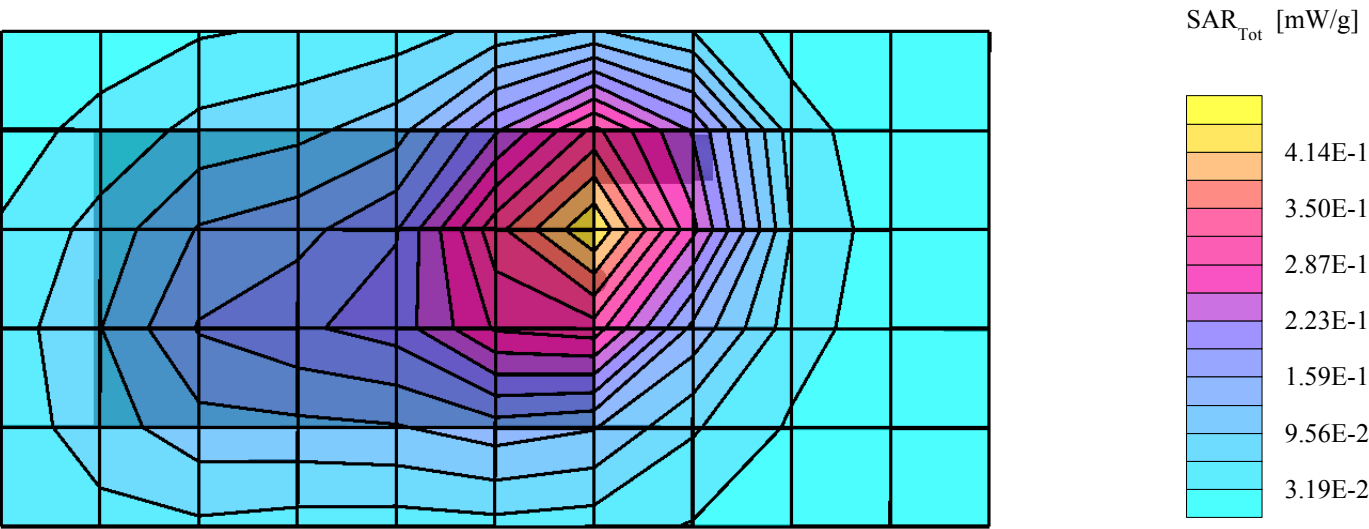

Modottel Co., Ltd. FCC ID: POQWPE-2300

SAM Phantom; Flat Section; Position: (270°,270°)
Probe: ET3DV6 - SN1590; ConvF(5.36,5.36,5.36); Crest factor: 1.0
1880 MHz Muscle: $\sigma = 1.61 \text{ mho/m}$ $\epsilon_r = 53.2$ $\rho = 1.00 \text{ g/cm}^3$
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Cube 5x5x7; Powerdrift: -0.06 dB
SAR (1g): 1.41 mW/g, SAR (10g): 0.800 mW/g

Ambient Temperature: 24.4°C Fluid Temperature: 23°C
Body SAR at 1.5 cm Separation Distance
Antenna out
Model: WPE-2300
PCS CDMA Mode
Standard Battery
Channel 600 [1880.00 MHz]
Conducted Power: 24.52 dBm
Date Tested: January 30, 2002

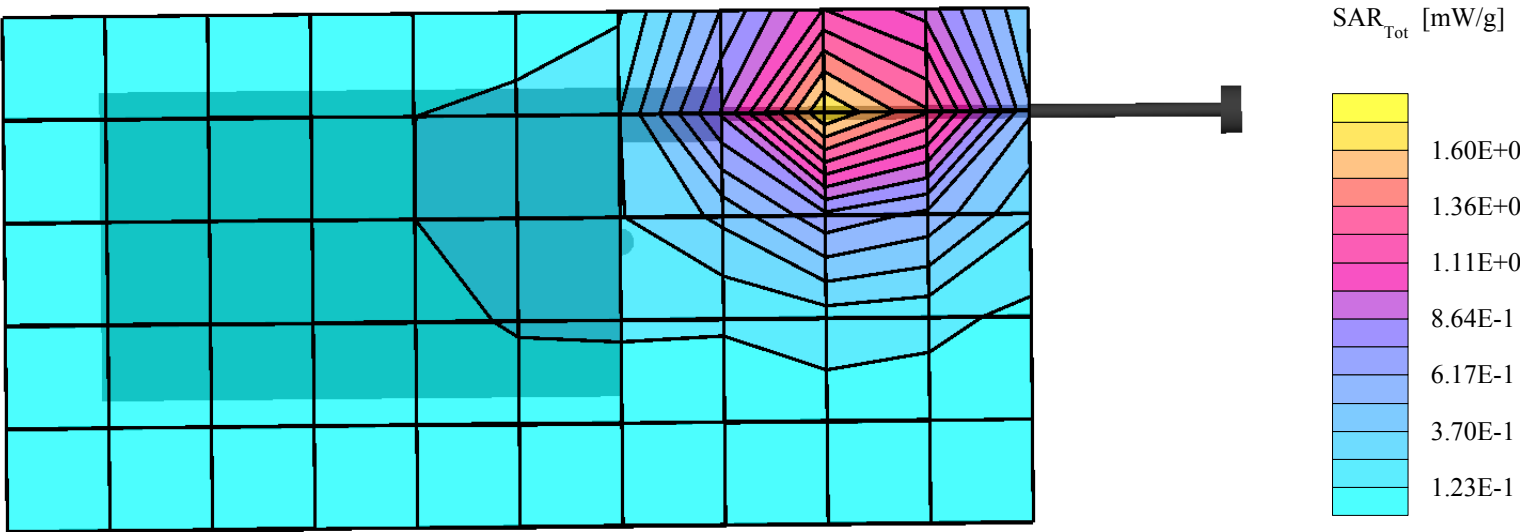

Modotell Co., Ltd. FCC ID: POQWPE-2300

SAM Phantom; Flat Section

Probe: ET3DV6 - SN1590; ConvF(5.36,5.36,5.36); Crest factor: 1.0

1880 MHz Muscle: $\sigma = 1.61$ mho/m $\epsilon_r = 53.2$ $\rho = 1.00$ g/cm³

Z-Axis Extrapolation at Peak SAR Location

Ambient Temperature: 24.4°C Fluid Temperature: 23°C

Body SAR at 1.5 cm Separation Distance

Antenna out

Model: WPE-2300


PCS CDMA Mode

Standard Battery

Channel 600 [1880.00 MHz]

Conducted Power: 24.52 dBm


Date Tested: January 30, 2002

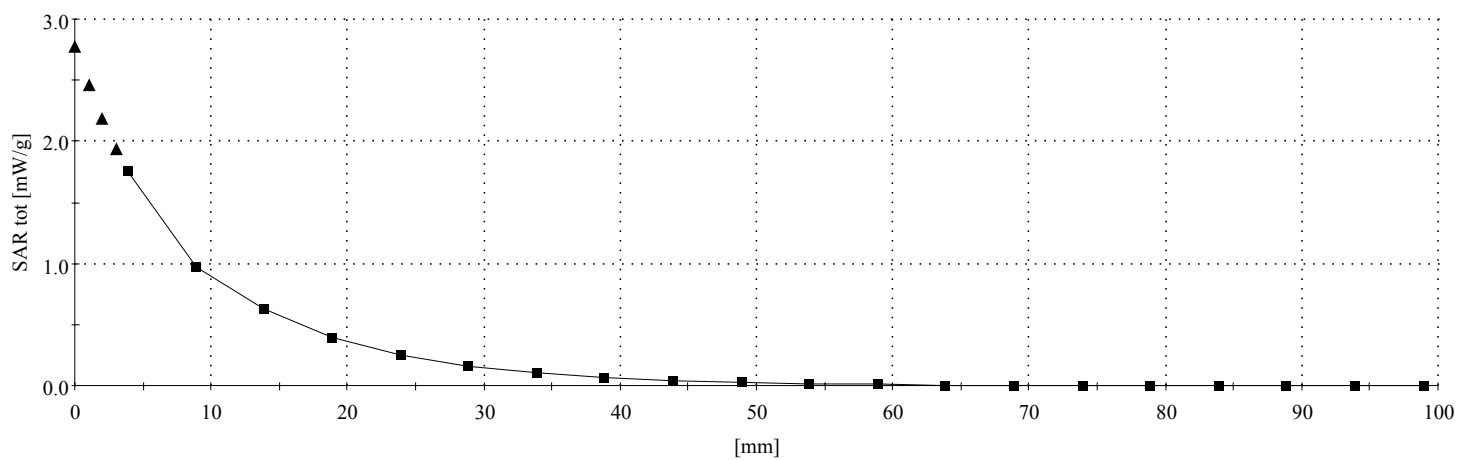

Modottel Co., Ltd. FCC ID: POQWPE-2300

SAM Phantom; Flat Section; Position: (270°,270°)
Probe: ET3DV6 - SN1590; ConvF(5.36,5.36,5.36); Crest factor: 1.0
1880 MHz Muscle: $\sigma = 1.61 \text{ mho/m}$ $\epsilon_r = 53.2$ $\rho = 1.00 \text{ g/cm}^3$
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Cube 5x5x7; Powerdrift: 0.00 dB
SAR (1g): 0.973 mW/g, SAR (10g): 0.505 mW/g

Ambient Temperature: 24.4°C Fluid Temperature: 23°C
Body SAR at 1.5 cm Separation Distance
Antenna out
Model: WPE-2300
PCS CDMA Mode
Standard Battery
Channel 25 [1851.25 MHz]
Conducted Power: 24.52 dBm
Date Tested: January 30, 2002

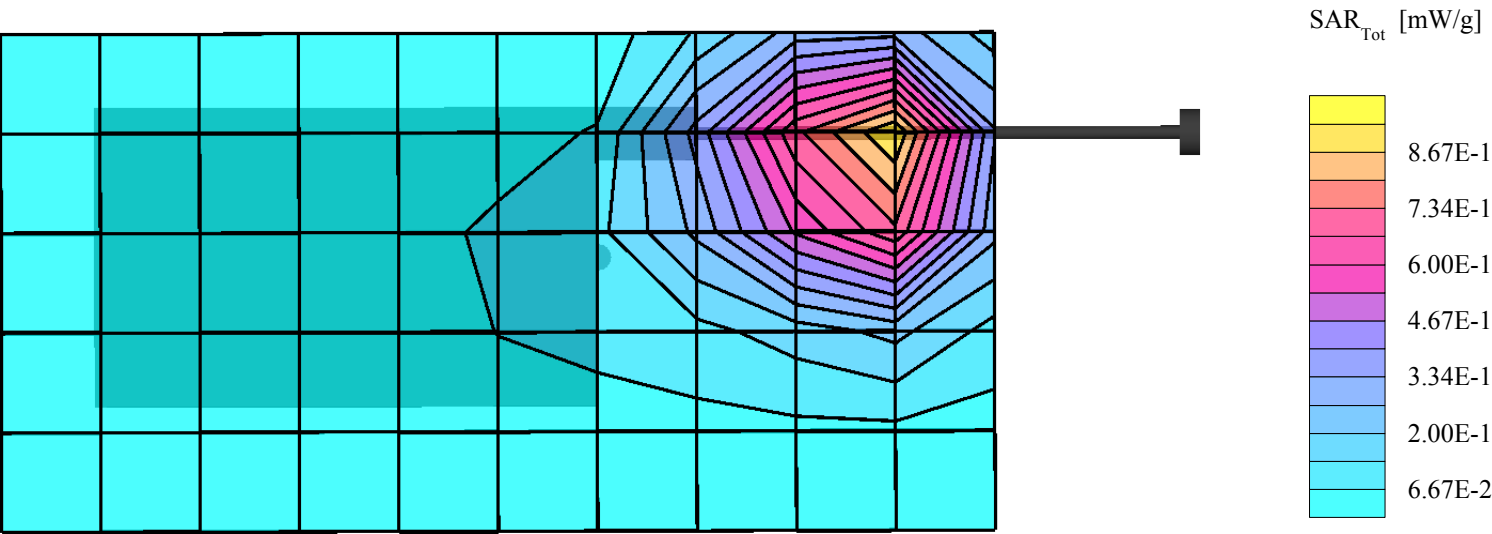

Modottel Co., Ltd. FCC ID: POQWPE-2300

SAM Phantom; Flat Section; Position: (270°,270°)
Probe: ET3DV6 - SN1590; ConvF(5.36,5.36,5.36); Crest factor: 1.0
1880 MHz Muscle: $\sigma = 1.61 \text{ mho/m}$ $\epsilon_r = 53.2$ $\rho = 1.00 \text{ g/cm}^3$
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Cube 5x5x7; Powerdrift: -0.20 dB
SAR (1g): 0.972 mW/g, SAR (10g): 0.552 mW/g

Ambient Temperature: 24.4°C Fluid Temperature: 23°C
Body SAR at 1.5 cm Separation Distance
Antenna out
Model: WPE-2300
PCS CDMA Mode
Standard Battery
Channel 1175 [1908.75 MHz]
Conducted Power: 24.52 dBm
Date Tested: January 30, 2002

