
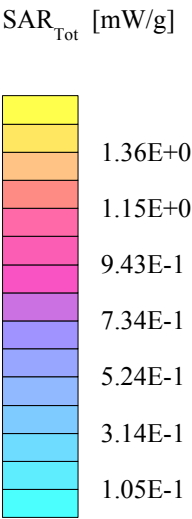


Modottel Co., Ltd. FCC ID: POQWPE-2300

SAM Phantom; Right Hand Section; Position: (75°,230°)
Probe: ET3DV6 - SN1590; ConvF(5.78,5.78,5.78); Crest factor: 1.0
1880 MHz Brain: $\sigma = 1.48 \text{ mho/m}$ $\epsilon_r = 39.7$ $\rho = 1.00 \text{ g/cm}^3$
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Cube 5x5x7; Powerdrift: -0.16 dB
SAR (1g): 1.51 mW/g, SAR (10g): 0.818 mW/g

Ambient Temperature: 22.6°C Fluid Temperature: 23°C
Head SAR - Right Cheek/Touch Position
Antenna In
Model: WPE-2300
PCS CDMA Mode
Standard Battery
Channel 25 [1851.25 MHz]
Conducted Power: 24.56 dBm
Date Tested: January 29, 2002

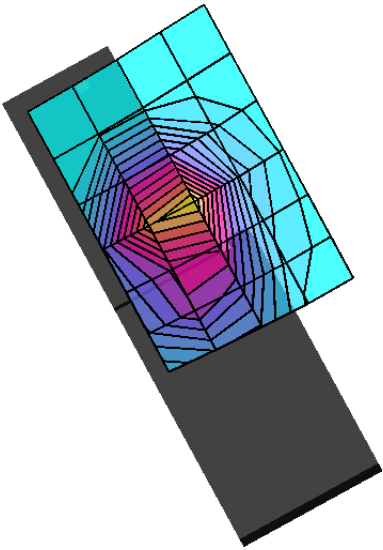

Modottel Co., Ltd. FCC ID: POQWPE-2300

SAM Phantom; Right Hand Section

Probe: ET3DV6 - SN1590; ConvF(5.78,5.78,5.78); Crest factor: 1.0

1880 MHz Brain: $\sigma = 1.48$ mho/m $\epsilon_r = 39.7$ $\rho = 1.00$ g/cm³

Z-Axis Extrapolation at Peak SAR Location

Ambient Temperature: 22.6°C Fluid Temperature: 23°C

Head SAR - Right Cheek/Touch Position

Antenna In

Model: WPE-2300


PCS CDMA Mode

Standard Battery

Channel 25 [1851.25 MHz]

Conducted Power: 24.56 dBm


Date Tested: January 29, 2002

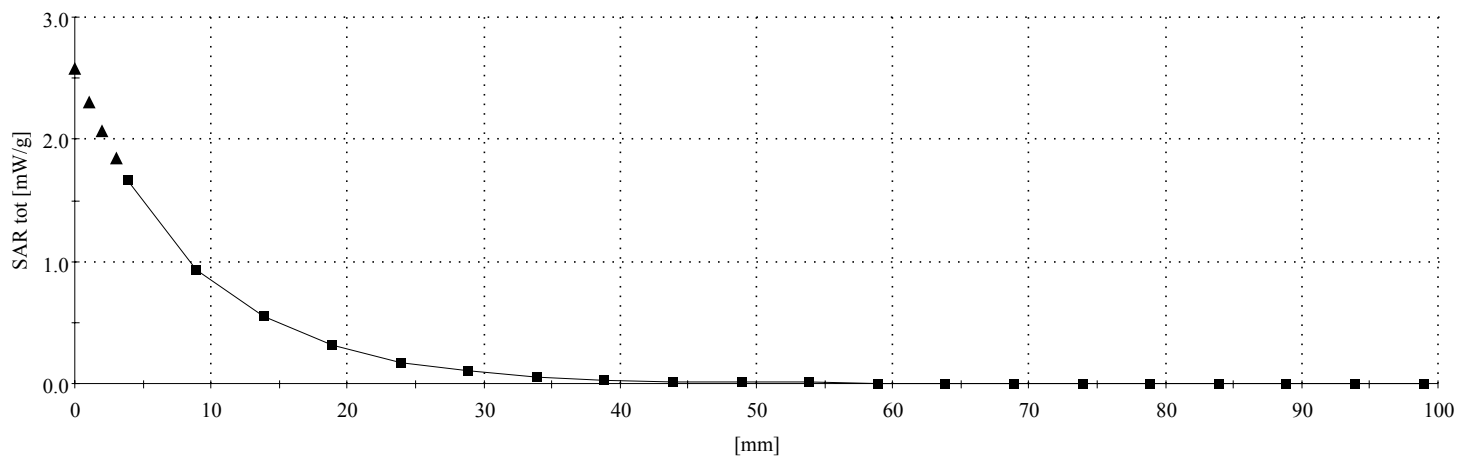

Modottel Co., Ltd. FCC ID: POQWPE-2300

SAM Phantom; Right Hand Section; Position: (75°,230°)
Probe: ET3DV6 - SN1590; ConvF(5.78,5.78,5.78); Crest factor: 1.0
1880 MHz Brain: $\sigma = 1.48 \text{ mho/m}$ $\epsilon_r = 39.7$ $\rho = 1.00 \text{ g/cm}^3$
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Cube 5x5x7; Powerdrift: -0.13 dB
SAR (1g): 0.417 mW/g, SAR (10g): 0.235 mW/g


Ambient Temperature: 22.6°C Fluid Temperature: 23°C
Head SAR - Right Cheek/Touch Position
Antenna Out
Model: WPE-2300
PCS CDMA Mode
Standard Battery
Channel 25 [1851.25 MHz]
Conducted Power: 24.50 dBm
Date Tested: January 29, 2002

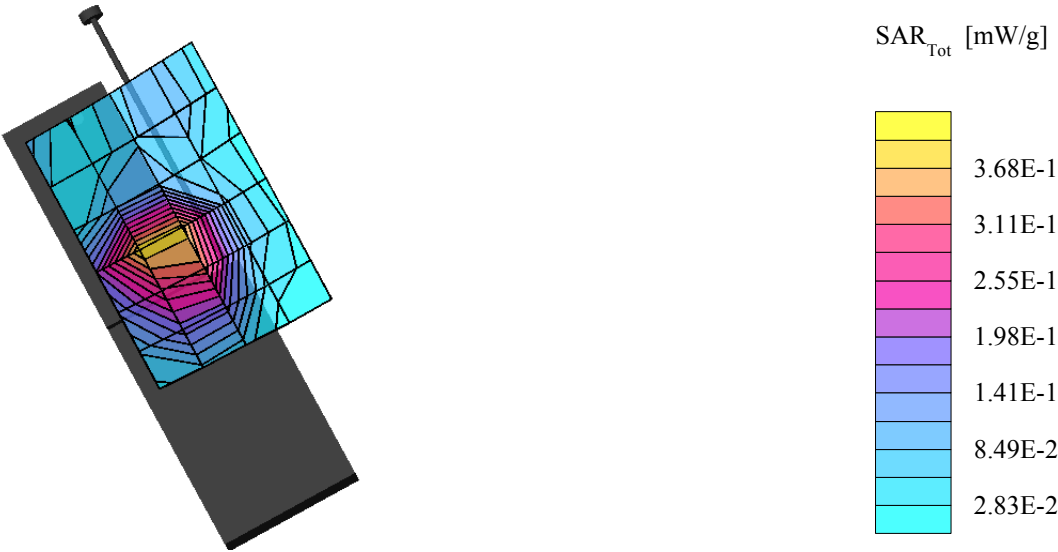

Modottel Co., Ltd. FCC ID: POQWPE-2300

SAM Phantom; Right Hand Section; Position: (75°,230°)
Probe: ET3DV6 - SN1590; ConvF(5.78,5.78,5.78); Crest factor: 1.0
1880 MHz Brain: $\sigma = 1.48 \text{ mho/m}$ $\epsilon_r = 39.7$ $\rho = 1.00 \text{ g/cm}^3$
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Cube 5x5x7; Powerdrift: -0.19 dB
SAR (1g): 1.24 mW/g, SAR (10g): 0.667 mW/g


Ambient Temperature: 22.6°C Fluid Temperature: 23°C
Head SAR - Right Cheek/Touch Position
Antenna In
Model: WPE-2300
PCS CDMA Mode
Standard Battery
Channel 600 [1880.00 MHz]
Conducted Power: 24.54 dBm
Date Tested: January 29, 2002

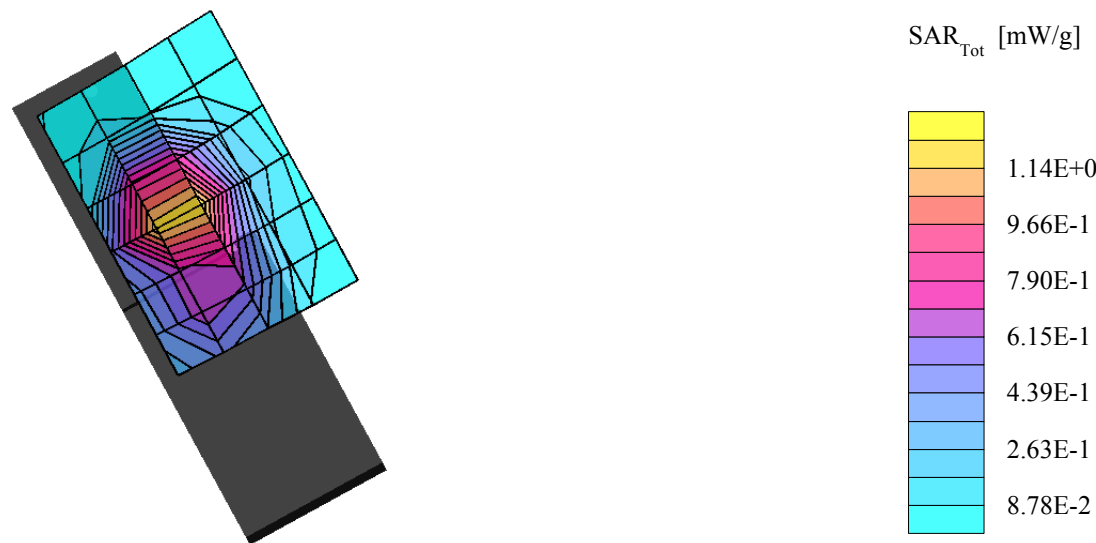

Modottel Co., Ltd. FCC ID: POQWPE-2300

SAM Phantom; Right Hand Section; Position: (75°,230°)
Probe: ET3DV6 - SN1590; ConvF(5.78,5.78,5.78); Crest factor: 1.0
1880 MHz Brain: $\sigma = 1.48 \text{ mho/m}$ $\epsilon_r = 39.7$ $\rho = 1.00 \text{ g/cm}^3$
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Cube 5x5x7; Powerdrift: -0.17 dB
SAR (1g): 0.699 mW/g, SAR (10g): 0.400 mW/g


Ambient Temperature: 22.6°C Fluid Temperature: 23°C
Head SAR - Right Cheek/Touch Position
Antenna Out
Model: WPE-2300
PCS CDMA Mode
Standard Battery
Channel 600 [1880.05 MHz]
Conducted Power: 24.51 dBm
Date Tested: January 29, 2002

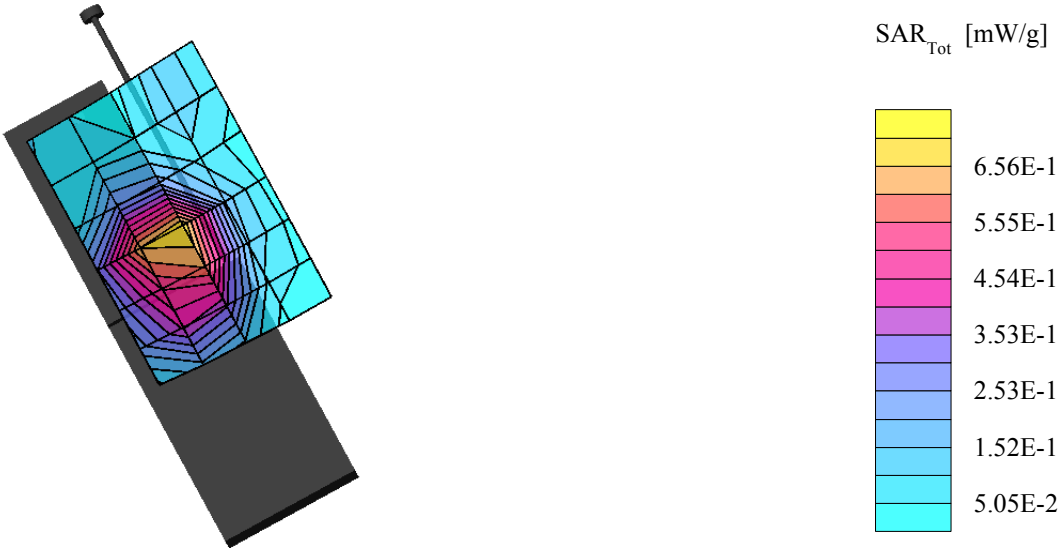

Modottel Co., Ltd. FCC ID: POQWPE-2300

SAM Phantom; Right Hand Section; Position: (75°,230°)
Probe: ET3DV6 - SN1590; ConvF(5.78,5.78,5.78); Crest factor: 1.0
1880 MHz Brain: $\sigma = 1.48 \text{ mho/m}$ $\epsilon_r = 39.7$ $\rho = 1.00 \text{ g/cm}^3$
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Cube 5x5x7; Powerdrift: -0.07 dB
SAR (1g): 1.24 mW/g, SAR (10g): 0.667 mW/g


Ambient Temperature: 22.6°C Fluid Temperature: 23°C
Head SAR - Right Cheek/Touch Position
Antenna In
Model: WPE-2300
PCS CDMA Mode
Standardl Battery
Channel 1175 [1908.75 MHz]
Conducted Power: 24.55 dBm
Date Tested: January 29, 2002

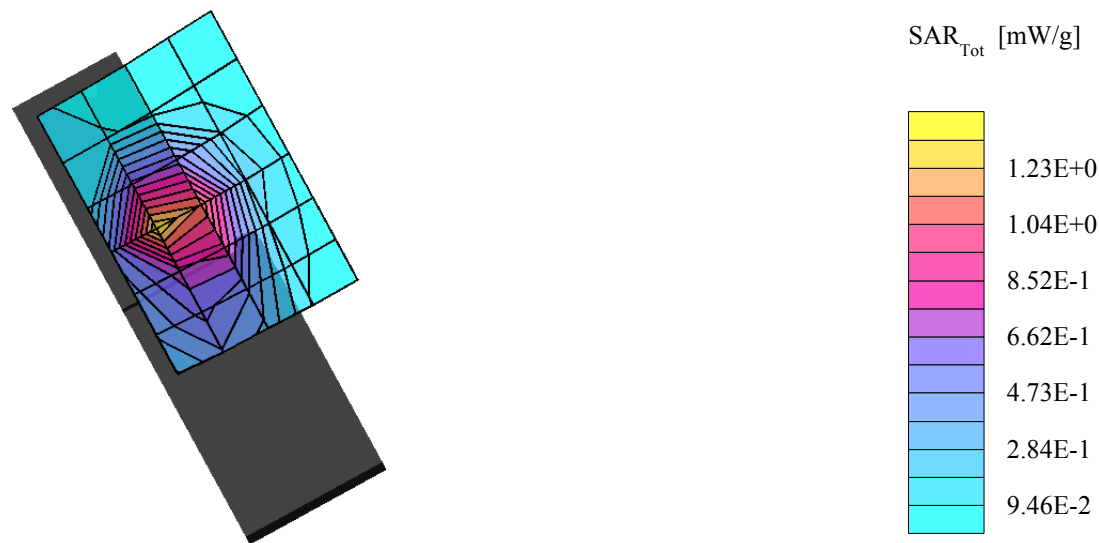

Modottel Co., Ltd. FCC ID: POQWPE-2300

SAM Phantom; Right Hand Section; Position: (75°,230°)
Probe: ET3DV6 - SN1590; ConvF(5.78,5.78,5.78); Crest factor: 1.0
1880 MHz Brain: $\sigma = 1.48 \text{ mho/m}$ $\epsilon_r = 39.7$ $\rho = 1.00 \text{ g/cm}^3$
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Cube 5x5x7; Powerdrift: -0.01 dB
SAR (1g): 0.532 mW/g, SAR (10g): 0.288 mW/g


Ambient Temperature: 22.6°C Fluid Temperature: 23°C
Head SAR - Right Cheek/Touch Position
Antenna Out
Model: WPE-2300
PCS CDMA Mode
Standard Battery
Channel 1175 [1908.75 MHz]
Conducted Power: 24.51 dBm
Date Tested: January 29, 2002

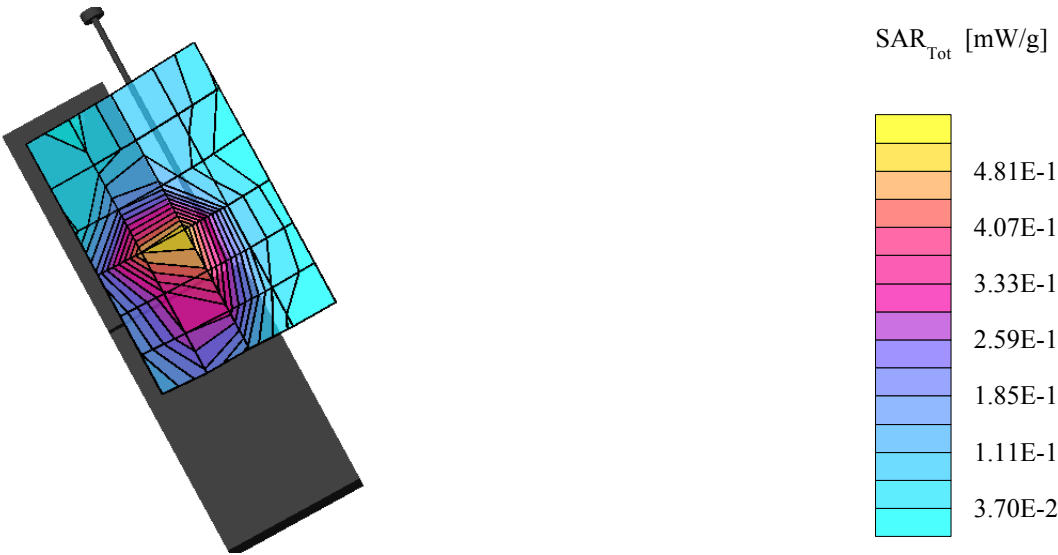

Modottel Co., Ltd. FCC ID: POQWPE-2300

SAM Phantom; Right Hand Section; Position: (90°,230°)
Probe: ET3DV6 - SN1590; ConvF(5.78,5.78,5.78); Crest factor: 1.0
1880 MHz Brain: $\sigma = 1.48 \text{ mho/m}$ $\epsilon_r = 39.7$ $\rho = 1.00 \text{ g/cm}^3$
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Cube 5x5x7; Powerdrift: -0.14 dB
SAR (1g): 0.197 mW/g, SAR (10g): 0.117 mW/g

Ambient Temperature: 22.6°C Fluid Temperature: 23°C
Head SAR - Right Ear/Tilt Position
Antenna In
Model: WPE-2300
PCS CDMA Mode
Standard Battery
Channel 600 [1880.00 MHz]
Conducted Power: 24.55 dBm
Date Tested: January 29, 2002

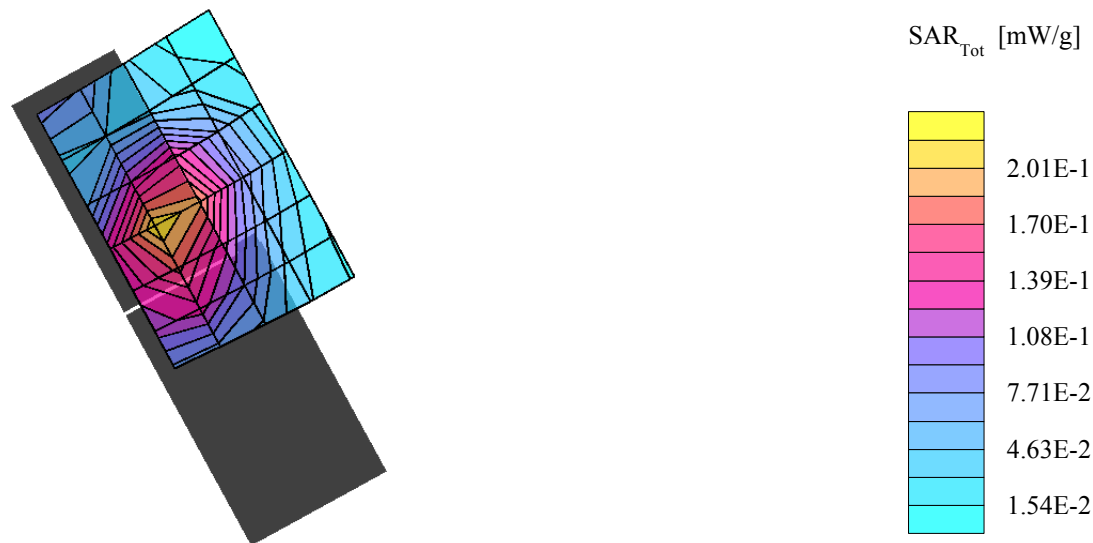

Modottel Co., Ltd. FCC ID: POQWPE-2300

SAM Phantom; Right Hand Section; Position: (90°,230°)
Probe: ET3DV6 - SN1590; ConvF(5.78,5.78,5.78); Crest factor: 1.0
1880 MHz Brain: $\sigma = 1.48 \text{ mho/m}$ $\epsilon_r = 39.7$ $\rho = 1.00 \text{ g/cm}^3$
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Cube 5x5x7; Powerdrift: -0.09 dB
SAR (1g): 0.132 mW/g, SAR (10g): 0.0805 mW/g

Ambient Temperature: 22.6°C Fluid Temperature: 23°C
Head SAR - Right Ear/Tilt Position
Antenna Out
Model: WPE-2300
PCS CDMA Mode
Standard Battery
Channel 600 [1880.00 MHz]
Conducted Power: 24.50 dBm
Date Tested: January 29, 2002

