

FCC Test Report

Product Name	“Chiline” Pulse Oximeter and Respiratory Monitoring System
Model No.	S68
FCC ID	POTS68

Applicant	Inventec Appliances Corp.
Address	37 Wugong 5th road, New Taipei Industrial Park, Wugu District, New Taipei City, Taiwan

Date of Receipt	Feb. 02, 2021
Issue Date	Sep. 11, 2021
Report No.	2120100R-E3032110113
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report

Issue Date: Sep. 11, 2021

Report No.: 2120100R-E3032110113



Product Name	"Chiline" Pulse Oximeter and Respiratory Monitoring System
Applicant	Inventec Appliances Corp.
Address	37 Wugong 5th road, New Taipei Industrial Park, Wugu District, New Taipei City, Taiwan
Manufacturer	Inventec Appliances Corp.
Model No.	S68
FCC ID	POTS68
EUT Rated Voltage	DC 5V by USB or DC 3.7V by battery
EUT Test Voltage	DC 5V by USB
Trade Name	Chiline
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By


:



(Senior Project Specialist / Joanne Lin)

Tested By


:



(Senior Engineer / Ivan Chuang)

Approved By

:



(Senior Engineer / Jack Hsu)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	6
1.1. EUT Description	6
1.2. Tested System Details	8
1.3. Configuration of Tested System	9
1.4. EUT Exercise Software	9
1.5. Test Facility	10
1.6. List of Test Item and Equipment	11
1.7. Uncertainty	12
2. Conducted Emission.....	13
2.1. Test Setup	13
2.2. Limits	13
2.3. Test Procedure	13
2.4. Test Result of Conducted Emission.....	14
3. Peak Power Output	18
3.1. Test Setup	18
3.2. Limits	18
3.3. Test Procedure	18
3.4. Test Result of Peak Power Output.....	19
4. Radiated Emission.....	22
4.1. Test Setup	22
4.2. Limits	23
4.3. Test Procedure	24
4.4. Test Result of Radiated Emission.....	26
5. RF antenna conducted test	32
5.1. Test Setup	32
5.2. Limits	32
5.3. Test Procedure	32
5.4. Test Result of RF antenna conducted test	33
6. Band Edge.....	36
6.1. Test Setup	36
6.2. Limits	37
6.3. Test Procedure	37
6.4. Test Result of Band Edge	39
7. 6dB Bandwidth	45
7.1. Test Setup	45
7.2. Limits	45
7.3. Test Procedure	45
7.4. Test Result of 6dB Bandwidth	46
8. Power Density	52
8.1. Test Setup	52

8.2.	Limits	52
8.3.	Test Procedure	52
8.4.	Test Result of Power Density	53
9.	Duty Cycle.....	59
9.1.	Test Setup	59
9.2.	Test Procedure	59
9.3.	Test Result of Duty Cycle	60
10.	EMI Reduction Method During Compliance Testing	62
Appendix 1: EUT Test Photographs		
Appendix 2: EUT Detailed Photographs		

Revision History

Report No.	Version	Description	Issued Date
2120100R-E3032110113	V1.0	Initial issue of report.	Sep. 11, 2021

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	“Chiline” Pulse Oximeter and Respiratory Monitoring System
Trade Name	Chiline
Model No.	S68
FCC ID	POTS68
Frequency Range	2412-2462MHz for 802.11b/g/n-20BW
Number of Channels	802.11b/g/n-20MHz: 11CH
Data Speed	802.11b: 1-11Mbps, 802.11g: 6-54Mbps, 802.11n: up to 72.2Mbps
Channel separation	802.11b/g/n: 5 MHz
Type of Modulation	802.11b:DSSS (DBPSK, DQPSK, CCK) 802.11g/n:OFDM (BPSK, QPSK, 16QAM, 64QAM)
Antenna Type	Chip
Channel Control	Auto
Antenna Gain	Refer to the Antenna List
Power Adapter	MFR: ADAPTER TECH., M/N: ATM012T-W050VU Input: AC 100-240V~50-60Hz, 0.32-0.19A Output: 5.0V=2.0A, 10.0W
USB Cable (Optional)	UTE / 61401.12A40, Non-shielded, 1m
L-Size SpO ₂ Probe (Optional)	Chiline / PA68
XS-Size SpO ₂ Probe (Optional)	Chiline / PB68
S-Size SpO ₂ Probe (Optional)	Chiline / PC68

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	YAGEO	ANT3216LL11R2400A	Chip	3.68 dBi for 2.4 GHz

Note: The antenna of EUT is conforming to FCC 15.203.

802.11b/g/n-20MHz Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01:	2412 MHz	Channel 02:	2417 MHz	Channel 03:	2422 MHz	Channel 04:	2427 MHz
Channel 05:	2432 MHz	Channel 06:	2437MHz	Channel 07:	2442 MHz	Channel 08:	2447 MHz
Channel 09:	2452 MHz	Channel 10:	2457 MHz	Channel 11:	2462MHz		

Note:

1. The EUT is a “Chiline” Pulse Oximeter and Respiratory Monitoring System with a built-in 2.4 GHz WLAN and Bluetooth V5.1 transceiver, this report for 2.4GHz WLAN.
2. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report.
5. These tests are conducted on a sample for the purpose of demonstrating compliance of 802.11b/g/n transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices.

Test Mode	Mode 1: Transmit (802.11b 1Mbps)
	Mode 2: Transmit (802.11g 6Mbps)
	Mode 3: Transmit (802.11n 7.2Mbps 20M-BW)
	Mode 4: Charge Mode

1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:


For Transmit					
Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	Latitude E5440	HG26TZ1	N/A
2	Test Fixture	Chiline	CP2102 USB to TTL	N/A	N/A

For Charge Mode					
Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Power Adapter	ADAPTER TECH	ATM012T-W050VU	N/A	N/A

For Transmit	
Signal Cable Type	
A	USB Cable
Signal cable Description	
Non-shielded, 1.55m	

For Charge Mode	
Signal Cable Type	
A	USB Cable
Signal cable Description	
Non-shielded, 1m	

1.3. Configuration of Tested System

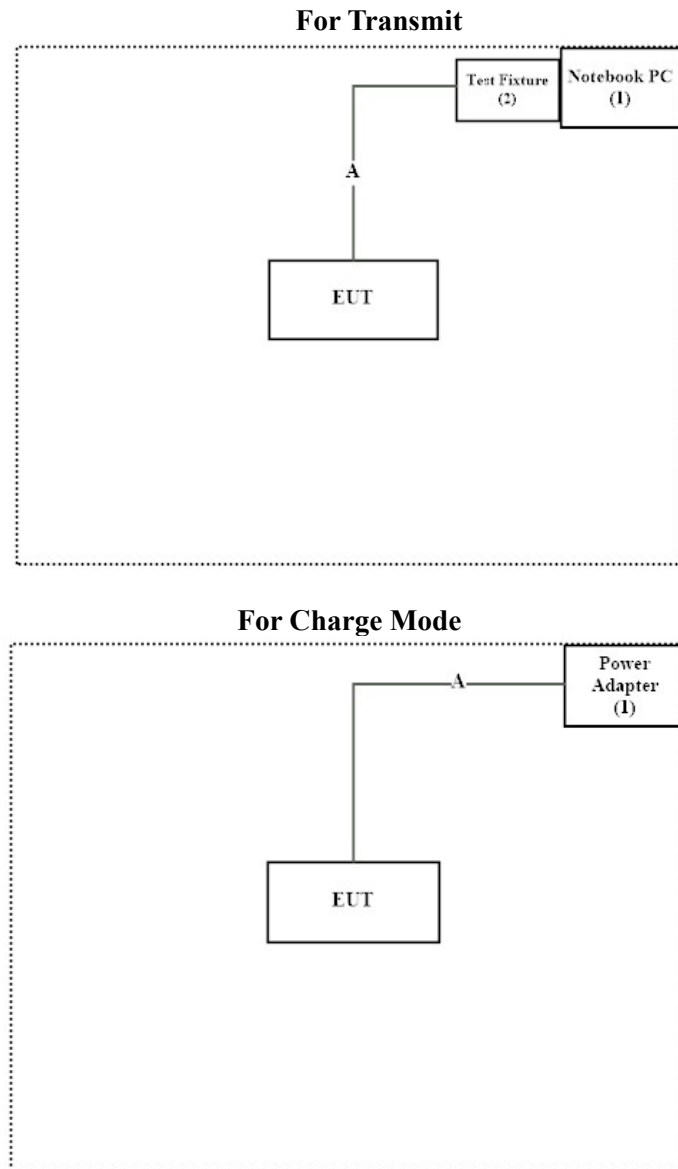

1.4. EUT Exercise Software

1. Setup the EUT as shown in Section 1.3.
2. Execute software “Windows PowerShell V0.0” on the EUT.
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous Transmit.
5. Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	24.7 °C
	Humidity (%RH)	10~90 %	54.7 %
Radiated Emission	Temperature (°C)	10~40 °C	25 °C
	Humidity (%RH)	10~90 %	64 %
Conductive	Temperature (°C)	10~40 °C	24.7 °C
	Humidity (%RH)	10~90 %	54.7 %

USA : FCC Registration Number: TW1134

Canada : CAB Identifier Number: TW3023 / Company Number: 26930

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
Address : No. 5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan
Performed Location : No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.
Phone number : +886-3-275-7255
Fax number : +886-3-327-8031
Email address : info.tw@dekra.com
Website : <http://www.dekra.com.tw>

1.6. List of Test Item and Equipment

For Conduction measurements / SH1

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	EMI Test Receiver	R&S	ESR7	101601	2021.06.19	2022.06.18
X	Two-Line V-Network	R&S	ENV216	101306	2021.04.08	2022.04.07
X	Two-Line V-Network	R&S	ENV216	101307	2021.05.04	2022.05.03
X	Coaxial Cable	DEKRA	RG400_BNC	RF001	2021.05.24	2022.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0.

For Conducted measurements / SH2

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	Spectrum Analyzer	R&S	FSV30	103466	2020.12.28	2021.12.27
X	Peak Power Analyzer	KEYSIGHT	8900B	MY51000539	2021.06.07	2022.06.06
X	Power Sensor	KEYSIGHT	N1923A	MY59240002	2021.05.17	2022.05.16
X	Power Sensor	KEYSIGHT	N1923A	MY59240003	2021.05.17	2022.05.16

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Conduction Test System V9.0.5.

For Radiated measurements / 966-3

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due. Date
X	Loop Antenna	AMETEK	HLA6121	56736	2021.04.14	2022.04.13
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-678	2020.09.04	2021.09.03
X	Horn Antenna	ETS-Lindgren	3117	00203761	2020.11.23	2021.11.22
	Horn Antenna	Com-Power	AH-840	101087	2021.06.16	2022.06.15
X	Pre-Amplifier	EMCI	EMC001330	980302	2021.07.26	2022.07.25
X	Pre-Amplifier	EMCI	EMC051835SE	980312	2021.02.24	2022.02.23
X	Pre-Amplifier	EMCI	EMC05820SE	980308	2020.09.18	2021.09.17
	Pre-Amplifier	EMCI	EMC184045SE	980369	2021.04.27	2022.04.26
X	Filter	MICRO TRONICS	BRM50702	G251	2020.09.17	2021.09.16
	Filter	MICRO TRONICS	BRM50716	G188	2020.09.17	2021.09.16
X	EMI Test Receiver	R&S	ESR	102793	2020.12.17	2021.12.16
X	Spectrum Analyzer	R&S	FSV3044	101113	2021.02.03	2022.02.02
X	Coaxial Cable	SGH, EMCI	HA800, SGH18	HY2103-001C	2021.03.03	2022.03.02
X	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2021.06.25	2022.06.24

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : AUDIX e3 V9

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document, and is described in each test chapter of this report.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty	
Conducted Emission	$\pm 3.42\text{dB}$	
Peak Power Output	Power Meter $\pm 0.89\text{dB}$	Spectrum Analyzer $\pm 2.06\text{dB}$
Radiated Emission	Under 1GHz $\pm 4.05\text{ dB}$	Above 1GHz $\pm 3.73\text{ dB}$
RF antenna conducted test	$\pm 2.06\text{dB}$	
Band Edge	Under 1GHz $\pm 4.05\text{ dB}$	Above 1GHz $\pm 3.73\text{ dB}$
6dB Bandwidth	$\pm 1544.74\text{Hz}$	
Power Density	$\pm 2.06\text{dB}$	
Duty Cycle	$\pm 2.31\text{msec}$	

2. Conducted Emission

2.1. Test Setup

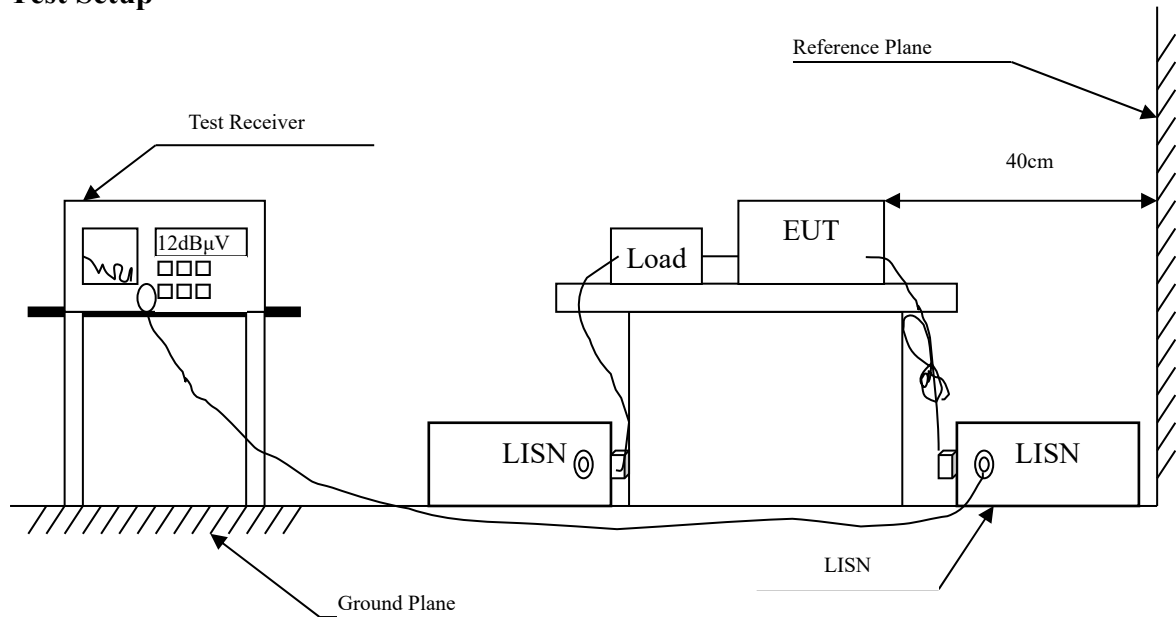

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AVG
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

2.3. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)


Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.4. Test Result of Conducted Emission

Product : "Chiline" Pulse Oximeter and Respiratory Monitoring System
 Test Item : Conducted Emission Test
 Test Mode : Mode 3: Transmit (802.11n 7.2Mbps 20M-BW) (2437MHz)
 Test Date : 2021/06/17

L1

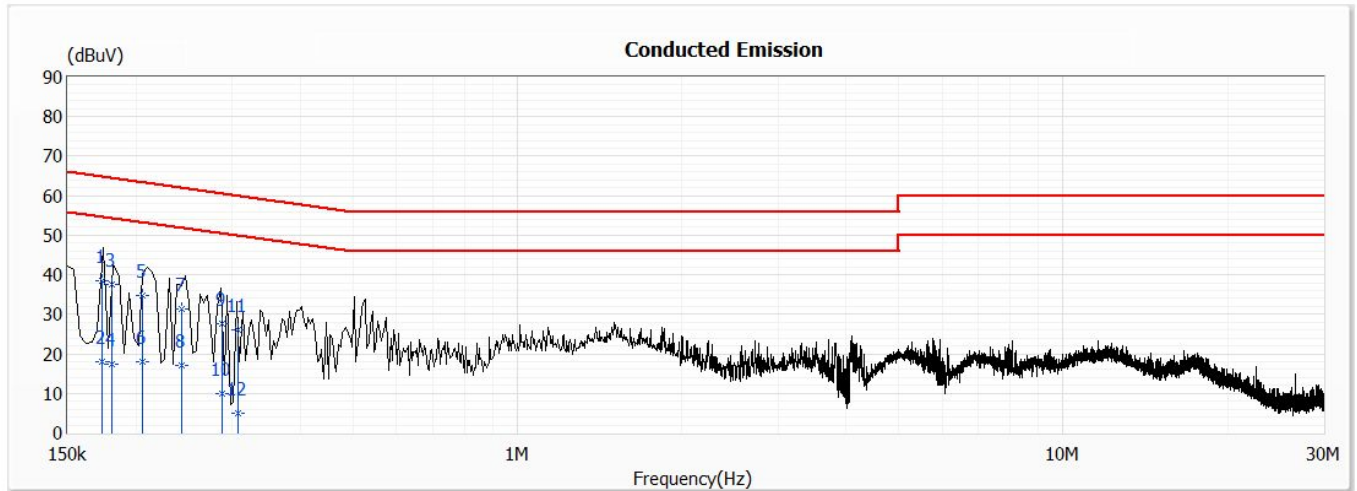


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
*1	0.173	38.35	64.80	-26.45	28.69	9.66	QP
2	0.173	18.06	54.80	-36.74	8.40	9.66	AV
3	0.181	37.59	64.44	-26.85	27.94	9.65	QP
4	0.181	17.49	54.44	-36.95	7.84	9.65	AV
5	0.206	34.75	63.38	-28.63	25.10	9.65	QP
6	0.206	18.01	53.38	-35.37	8.36	9.65	AV
7	0.242	31.23	62.02	-30.79	21.58	9.65	QP
8	0.242	16.98	52.02	-35.04	7.33	9.65	AV
9	0.288	27.57	60.59	-33.02	17.92	9.65	QP
10	0.288	9.88	50.59	-40.71	0.23	9.65	AV
11	0.308	26.09	60.03	-33.94	16.44	9.65	QP
12	0.308	4.86	50.03	-45.17	-4.79	9.65	AV

Remark:

1. "*" means this data is the worst emission level; "!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=LISN Factor+Cable Loss).
3. Margin=Emission Level-Limit

Product : "Chiline" Pulse Oximeter and Respiratory Monitoring System
 Test Item : Conducted Emission Test
 Test Mode : Mode 3: Transmit (802.11n 7.2Mbps 20M-BW) (2437MHz)
 Test Date : 2021/06/17

N

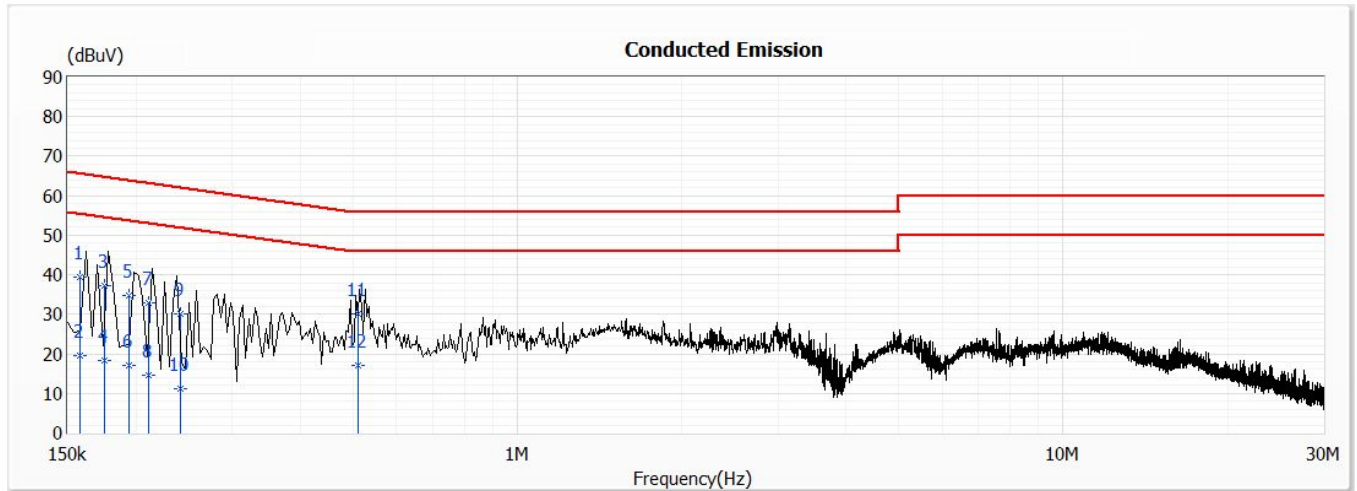


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.158	39.37	65.57	-26.20	29.70	9.67	QP
2	0.158	19.56	55.57	-36.01	9.89	9.67	AV
3	0.175	37.31	64.72	-27.41	27.64	9.67	QP
4	0.175	18.20	54.72	-36.52	8.53	9.67	AV
5	0.194	34.62	63.84	-29.22	24.95	9.67	QP
6	0.194	16.99	53.84	-36.85	7.32	9.67	AV
7	0.211	32.97	63.15	-30.18	23.30	9.67	QP
8	0.211	14.65	53.15	-38.50	4.98	9.67	AV
9	0.241	30.08	62.05	-31.97	20.41	9.67	QP
10	0.241	11.16	52.05	-40.89	1.49	9.67	AV
*11	0.510	30.09	56.00	-25.91	20.42	9.67	QP
12	0.510	17.08	46.00	-28.92	7.41	9.67	AV

Remark:

1. "*" means this data is the worst emission level; "!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=LISN Factor+Cable Loss).
3. Margin=Emission Level-Limit

Product : "Chiline" Pulse Oximeter and Respiratory Monitoring System
 Test Item : Conducted Emission Test
 Test Mode : Mode 4: Charge Mode
 Test Date : 2021/06/17

L1

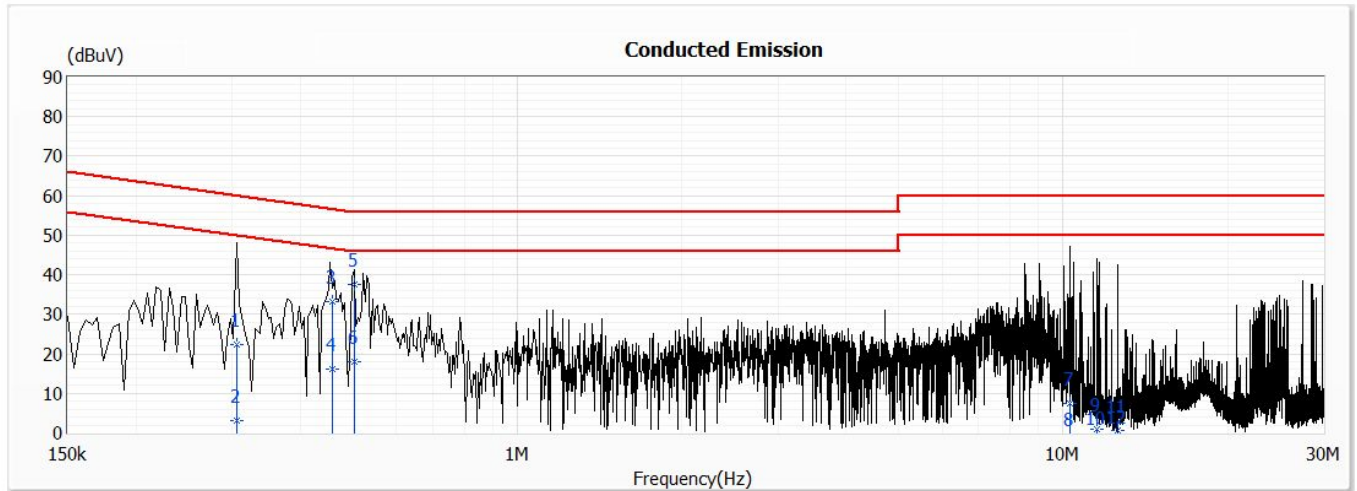


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.306	22.37	60.09	-37.72	12.72	9.65	QP
2	0.306	3.07	50.09	-47.02	-6.58	9.65	AV
3	0.459	33.17	56.71	-23.54	23.51	9.66	QP
4	0.459	16.19	46.71	-30.52	6.53	9.66	AV
*5	0.503	37.65	56.00	-18.35	27.99	9.66	QP
6	0.503	18.15	46.00	-27.85	8.49	9.66	AV
7	10.276	7.37	60.00	-52.63	-2.52	9.89	QP
8	10.276	-2.68	50.00	-52.68	-12.57	9.89	AV
9	11.529	1.03	60.00	-58.97	-8.88	9.91	QP
10	11.529	-2.38	50.00	-52.38	-12.29	9.91	AV
11	12.612	0.69	60.00	-59.31	-9.23	9.92	QP
12	12.612	-2.27	50.00	-52.27	-12.19	9.92	AV

Remark:

1. "*" means this data is the worst emission level; "!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=LISN Factor+Cable Loss).
3. Margin=Emission Level-Limit

Product : "Chiline" Pulse Oximeter and Respiratory Monitoring System
 Test Item : Conducted Emission Test
 Test Mode : Mode 4: Charge Mode
 Test Date : 2021/06/17

N

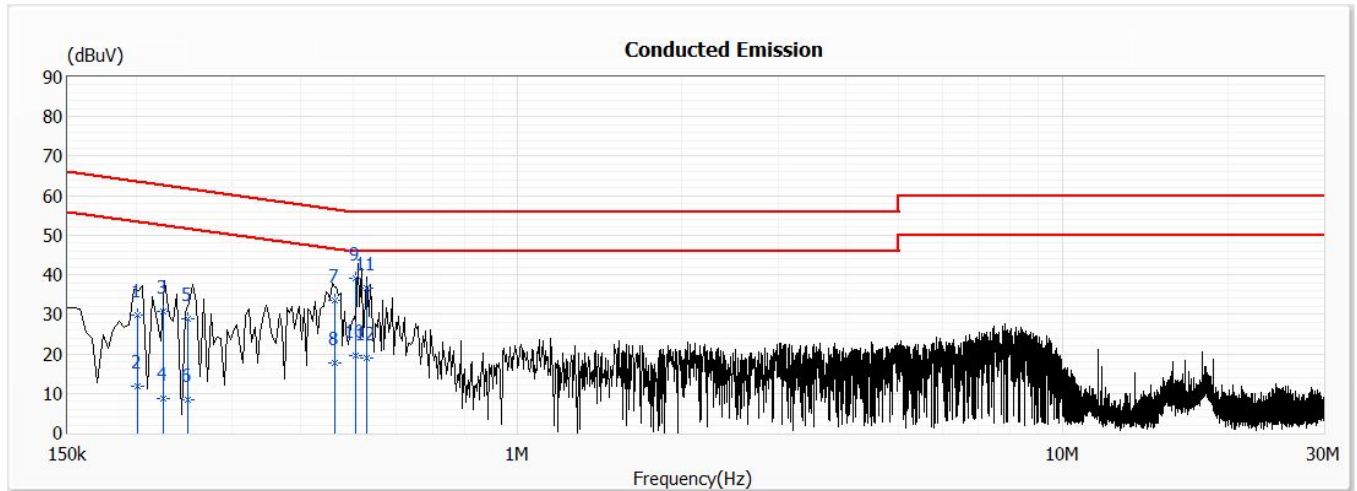


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.201	29.69	63.56	-33.87	20.02	9.67	QP
2	0.201	11.86	53.56	-41.70	2.19	9.67	AV
3	0.224	30.61	62.67	-32.06	20.94	9.67	QP
4	0.224	8.60	52.67	-44.07	-1.07	9.67	AV
5	0.249	29.01	61.78	-32.77	19.34	9.67	QP
6	0.249	8.36	51.78	-43.42	-1.31	9.67	AV
7	0.463	33.64	56.64	-23.00	23.97	9.67	QP
8	0.463	17.70	46.64	-28.94	8.03	9.67	AV
*9	0.506	39.07	56.00	-16.93	29.40	9.67	QP
10	0.506	19.62	46.00	-26.38	9.95	9.67	AV
11	0.528	36.57	56.00	-19.43	26.90	9.67	QP
12	0.528	19.04	46.00	-26.96	9.37	9.67	AV

Remark:

1. "*" means this data is the worst emission level; "!" means this data is over limit.
2. Emission Level=Reading Level + Correct Factor(Correct Factor=LISN Factor+Cable Loss).
3. Margin=Emission Level-Limit

3. Peak Power Output

3.1. Test Setup

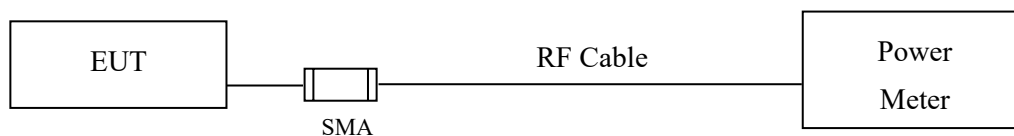

3.2. Limits

The maximum peak power shall be less 1 Watt.

3.3. Test Procedure

The EUT was tested according to C63.10:2013 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using C63.10:2013 Section 11.9.1.3 PKPM1 Peak power meter method. The maximum average conducted output power using C63.10:2013 Section 11.9.2.3 Measurement using a power meter (PM). (Measurement using a gated RF average-reading power meter).

3.4. Test Result of Peak Power Output

Product : “Chiline” Pulse Oximeter and Respiratory Monitoring System
 Test Item : Peak Power Output Data
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)
 Test Date : 2021/08/24

Channel No.	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Peak Power	Required Limit	Result
		1	2	5.5	11	1		
		Measurement Level (dBm)						
01	2412	18.26	--	--	--	20.39	<30dBm	Pass
06	2437	20.11	20.04	19.96	19.91	21.77	<30dBm	Pass
11	2462	18.58	--	--	--	20.42	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

Product : "Chiline" Pulse Oximeter and Respiratory Monitoring System
 Test Item : Peak Power Output Data
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)
 Test Date : 2021/08/24

Channel No.	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		6	9	12	18	24	36	48	54			
		Measurement Level (dBm)										
01	2412	16.56	--	--	--	--	--	--	--	22.57	<30dBm	Pass
06	2437	18.5	18.44	18.41	18.36	18.31	18.25	18.19	18.12	22.79	<30dBm	Pass
11	2462	15.62	--	--	--	--	--	--	--	21.91	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss

Product : "Chiline" Pulse Oximeter and Respiratory Monitoring System
 Test Item : Peak Power Output Data
 Test Mode : Mode 3: Transmit (802.11n 7.2Mbps 20M-BW)
 Test Date : 2021/08/24


Channel No.	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		7.2	14.4	21.7	28.9	43.3	57.8	65	72.2	7.2		
		Measurement Level (dBm)										
01	2412	14.95	--	--	--	--	--	--	--	22.07	<30dBm	Pass
06	2437	18.63	18.58	18.53	18.49	18.42	18.37	18.32	18.28	22.73	<30dBm	Pass
11	2462	14.86	--	--	--	--	--	--	--	21.74	<30dBm	Pass

Note: Peak Power Output Value = Reading value on power meter + cable loss


4. Radiated Emission

4.1. Test Setup


Radiated Emission Under 30MHz

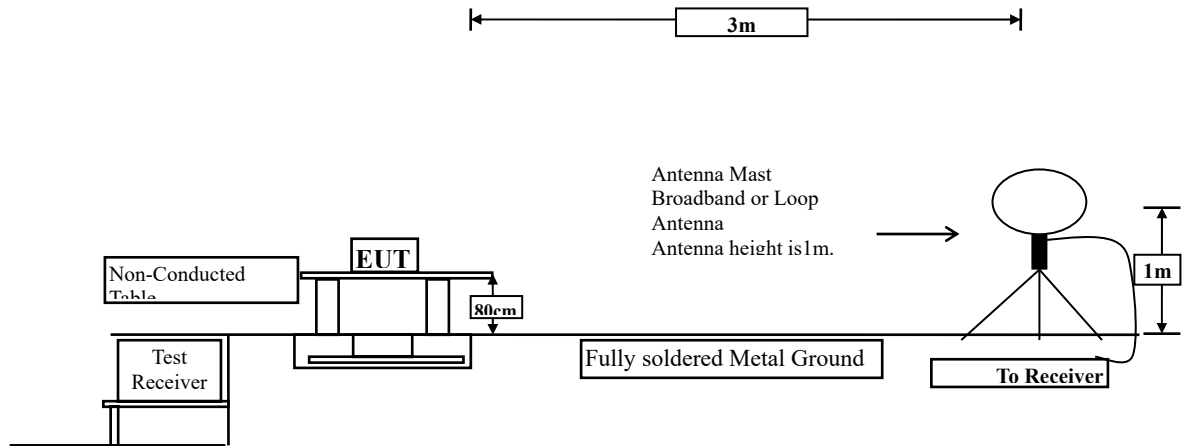

Radiated Emission Below 1GHz

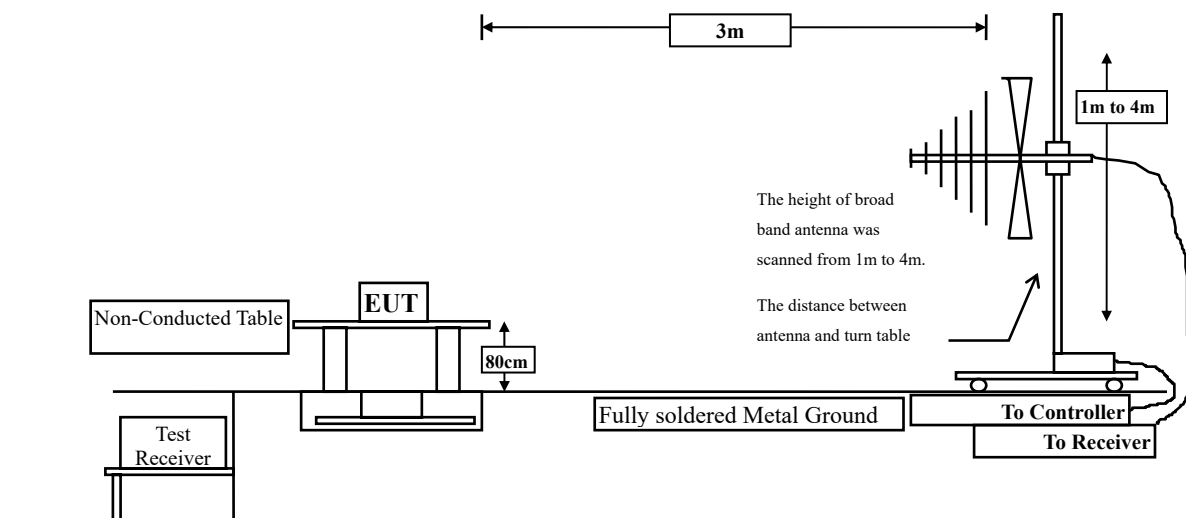

Radiated Emission Above 1GHz

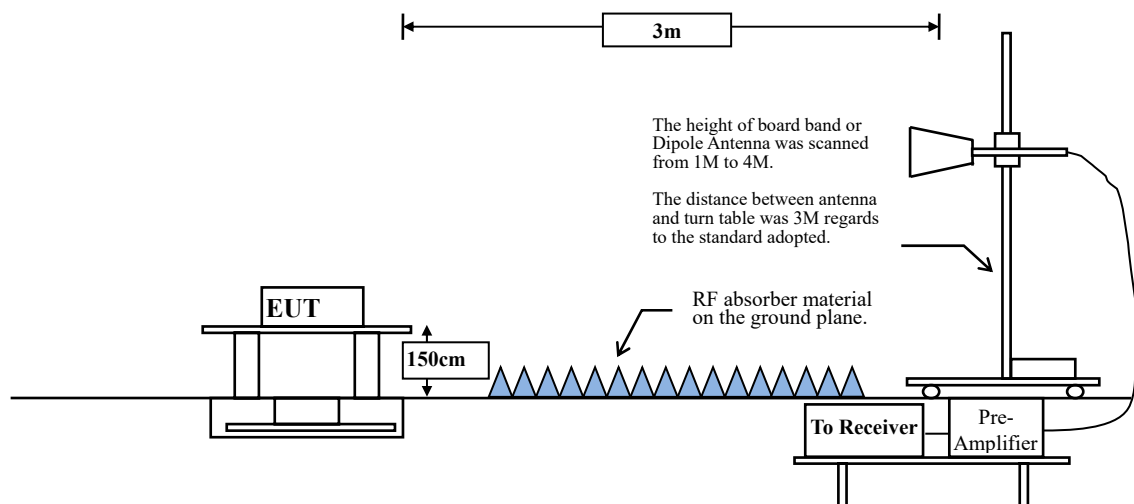

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna. The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

$VBW = 10\text{Hz}$, when duty cycle $\geq 98\%$

$VBW \geq 1/T$, when duty cycle $< 98\%$


(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11b	100.00	1.0000	1000	10
802.11g	95.72	2.0754	482	500
802.11n20	94.85	1.9246	520	1000

Note: Duty Cycle Refer to Section 9.

4.4. Test Result of Radiated Emission


Site :966-1
Condition :3m ,HORIZONTAL
EUT :568
Mode :TX_b_2462MHz
TEST BY :Carlos Chen

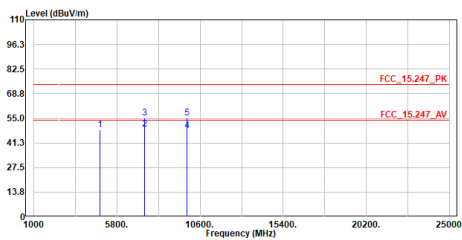

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	48.39	74.00	-25.61	51.69	-3.30	Peak
2	7386.000	49.01	54.00	-4.99	48.32	0.69	Average
3	7386.000	55.08	74.00	-18.92	54.39	0.69	Peak
4	9848.000	48.28	54.00	-5.72	45.63	2.65	Average
5	9848.000	55.36	74.00	-18.64	52.71	2.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,VERTICAL
EUT :568
Mode :TX_b_2462MHz
TEST BY :Carlos Chen

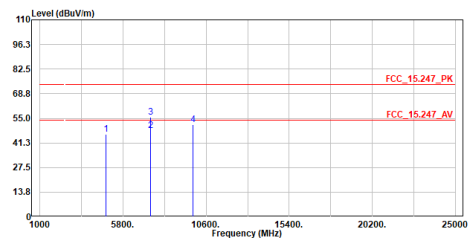

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	45.89	74.00	-28.11	49.18	-3.29	Peak
2	7386.000	48.21	54.00	-5.79	47.52	0.69	Average
3	7386.000	55.45	74.00	-18.55	54.76	0.69	Peak
4	9848.000	51.68	74.00	-22.32	49.03	2.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,HORIZONTAL
EUT :568
Mode :TX_g_2412MHz
TEST BY :Carlos Chen

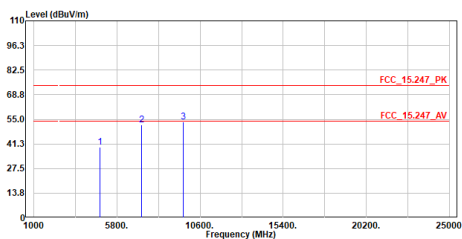

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	39.39	74.00	-34.61	42.80	-3.41	Peak
2	7236.000	52.07	74.00	-21.93	51.47	0.60	Peak
3	9648.000	53.49	74.00	-20.51	50.96	2.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,VERTICAL
EUT :568
Mode :TX_g_2412MHz
TEST BY :Carlos Chen

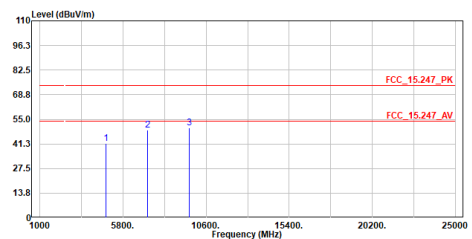

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	41.55	74.00	-32.45	44.96	-3.41	Peak
2	7236.000	49.11	74.00	-24.89	48.51	0.60	Peak
3	9648.000	50.28	74.00	-23.72	47.75	2.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,HORIZONTAL
EUT :568
Mode :TX_g_2437MHz
TEST BY :Carlos Chen

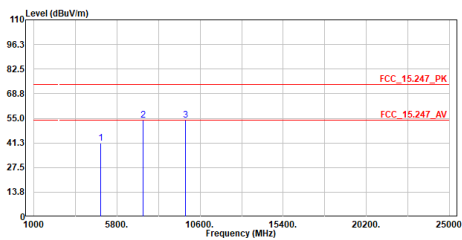

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4874.000	41.00	74.00	-33.00	44.36	-3.36	Peak
2	7311.000	53.76	74.00	-20.24	53.12	0.64	Peak
3	9748.000	53.81	74.00	-20.19	51.19	2.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,VERTICAL
EUT :568
Mode :TX_g_2437MHz
TEST BY :Carlos Chen

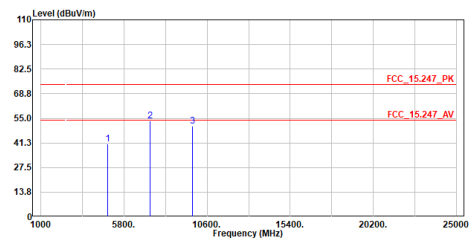

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4874.000	40.60	74.00	-33.40	43.96	-3.36	Peak
2	7311.000	53.72	74.00	-20.28	53.08	0.64	Peak
3	9748.000	50.61	74.00	-23.39	47.99	2.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,HORIZONTAL
EUT :568
Mode :TX_g_2462MHz
TEST BY :Carlos Chen

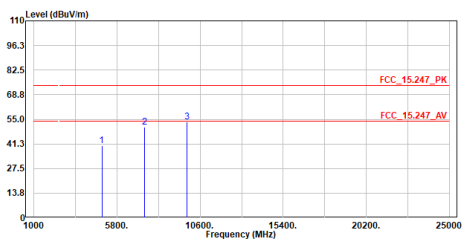

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4924.000	40.39	74.00	-33.61	43.68	-3.29	Peak
2	7386.000	50.84	74.00	-23.16	50.15	0.69	Peak
3	9848.000	53.35	74.00	-20.65	50.70	2.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,VERTICAL
EUT :568
Mode :TX_g_2462MHz
TEST BY :Carlos Chen

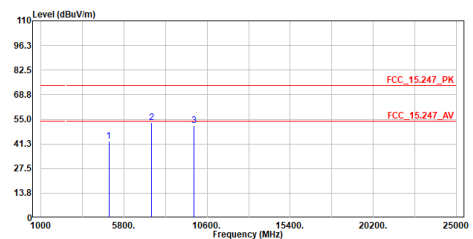

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	4924.000	42.76	74.00	-31.24	46.05	-3.29	Peak
2	7386.000	53.13	74.00	-20.87	52.44	0.69	Peak
3	9848.000	51.52	74.00	-22.48	48.87	2.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,HORIZONTAL
EUT :568
Mode :TX_n20_2412MHz
TEST BY :Carlos Chen

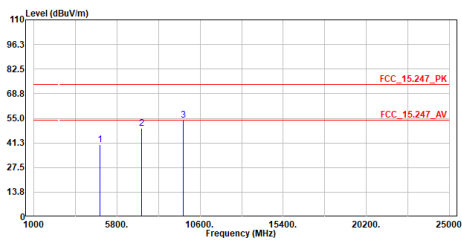

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	4824.000	40.44	74.00	-33.56	43.85	-3.41	Peak
2	7236.000	49.43	74.00	-24.57	48.83	0.60	Peak
3	9648.000	53.93	74.00	-20.07	51.40	2.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,VERTICAL
EUT :568
Mode :TX_n20_2412MHz
TEST BY :Carlos Chen

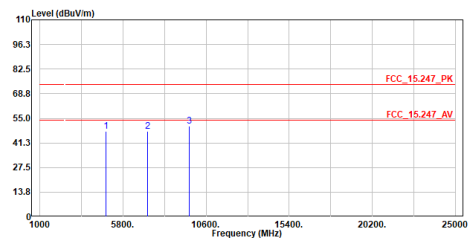

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	4824.000	47.62	74.00	-26.38	47.02	0.60	Peak
2	7236.000	47.62	74.00	-26.38	47.02	0.60	Peak
3	9648.000	50.73	74.00	-23.27	48.20	2.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,HORIZONTAL
EUT :568
Mode :TX_n20_2437MHz
TEST BY :Carlos Chen

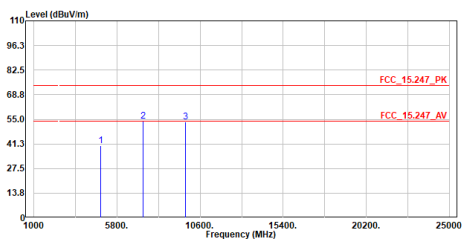

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	4874.000	40.44	74.00	-33.56	43.80	-3.36	Peak
2	7311.000	53.90	74.00	-20.10	53.27	0.63	Peak
3	9748.000	53.71	74.00	-20.29	51.09	2.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,VERTICAL
EUT :568
Mode :TX_n20_2437MHz
TEST BY :Carlos Chen

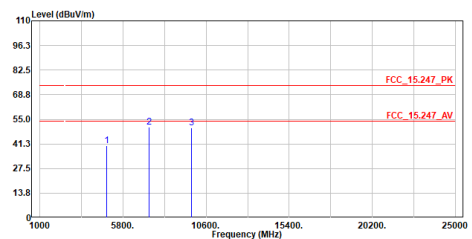

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	4874.000	40.36	74.00	-33.64	43.65	-3.29	Peak
2	7311.000	50.54	74.00	-23.46	49.91	0.63	Peak
3	9748.000	50.29	74.00	-23.71	47.67	2.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,HORIZONTAL
EUT :568
Mode :TX_n20_2462MHz
TEST BY :Carlos Chen

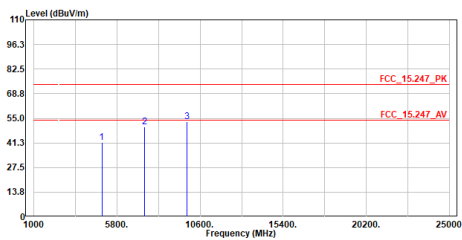

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	41.66	74.00	-32.34	44.95	-3.29	Peak
2	7386.000	50.19	74.00	-23.81	49.50	0.69	Peak
3	9848.000	53.25	74.00	-20.75	50.60	2.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,VERTICAL
EUT :568
Mode :TX_n20_2462MHz
TEST BY :Carlos Chen

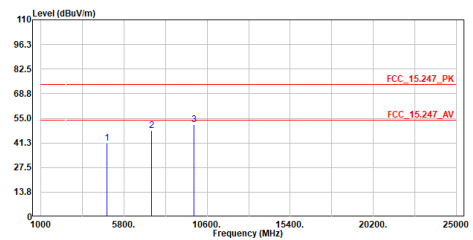

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	40.98	74.00	-33.02	44.27	-3.29	Peak
2	7386.000	48.29	74.00	-25.71	47.60	0.69	Peak
3	9848.000	51.58	74.00	-22.42	48.93	2.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-3
Condition :3m ,HORIZONTAL
EUT :568
Mode :TX_n20_2437MHz
TEST BY :Carlos Chen

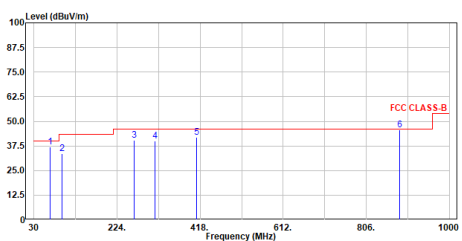

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	67.830	37.16	40.00	-2.84	50.11	-12.95	QP
2	94.990	33.68	43.50	-9.82	50.56	-16.88	QP
3	264.740	40.50	46.00	-5.50	51.47	-10.97	QP
4	313.240	40.17	46.00	-5.83	49.62	-9.45	QP
5	409.270	41.72	46.00	-4.28	48.86	-7.14	QP
6	883.600	45.78	46.00	-0.22	45.15	0.63	QP


Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-3
Condition :3m ,VERTICAL
EUT :568
Mode :TX_n20_2437MHz
TEST BY :Carlos Chen

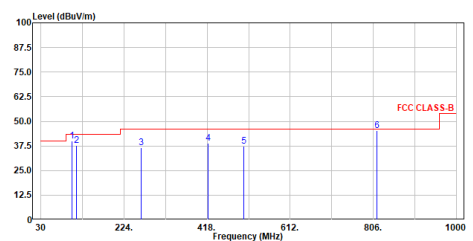

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	102.750	40.13	43.50	-3.37	55.32	-15.19	QP
2	113.420	37.79	43.50	-5.71	51.51	-13.72	QP
3	264.740	36.43	46.00	-9.57	47.40	-10.97	QP
4	419.940	38.97	46.00	-7.03	45.77	-6.80	QP
5	504.330	37.38	46.00	-8.62	42.53	-5.15	QP
6	813.760	45.45	46.00	-0.55	45.58	-0.13	QP


Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

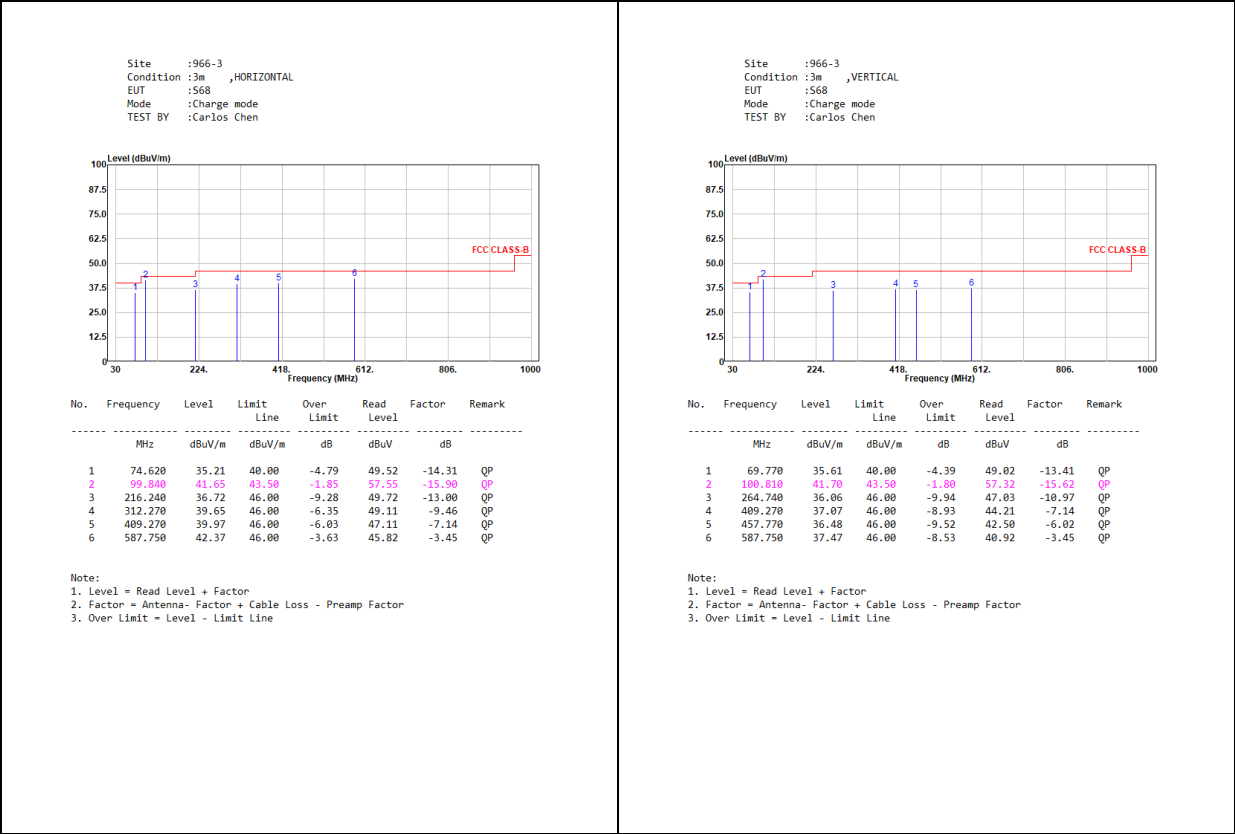

5. RF antenna conducted test

5.1. Test Setup

RF antenna Conducted Measurement:

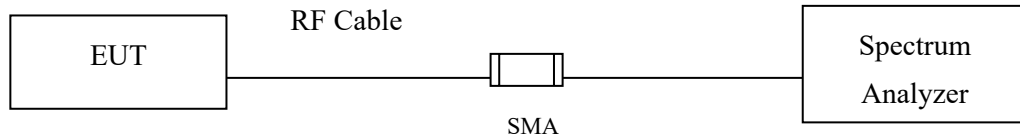

5.2. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.3. Test Procedure


The EUT was tested according to C63.10:2013 Section 11.11 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.


5.4. Test Result of RF antenna conducted test

Product : “Chiline” Pulse Oximeter and Respiratory Monitoring System
Test Item : RF antenna conducted test
Test Mode : Mode 1: Transmit (802.11b 1Mbps)
Test Date : 2021/08/24


Channel 01 (2412MHz)

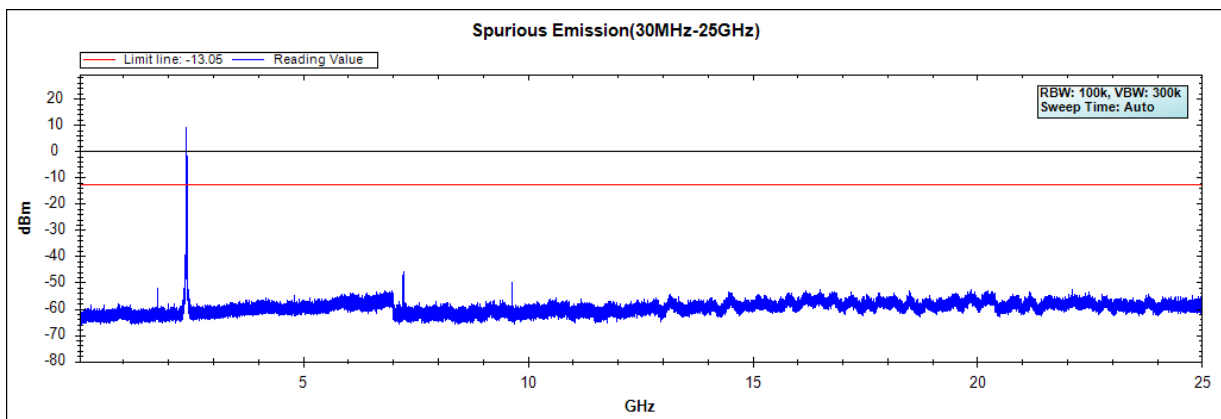

Channel 06 (2437MHz)



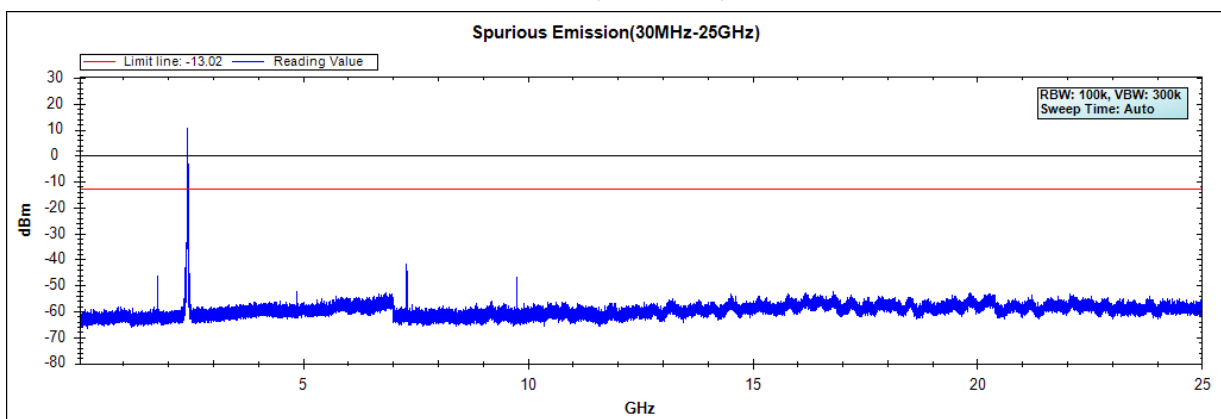


Channel 11 (2462MHz)

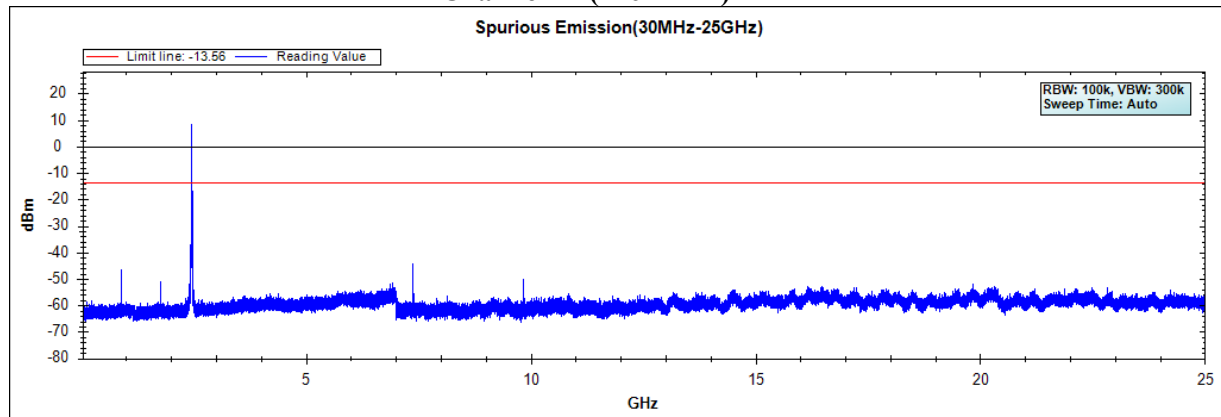




Note: The above test pattern is synthesized by multiple of the frequency range.

Product : "Chiline" Pulse Oximeter and Respiratory Monitoring System
Test Item : RF Antenna Conducted Spurious
Test Mode : Mode 2: Transmit (802.11g 6Mbps)
Test Date : 2021/08/24

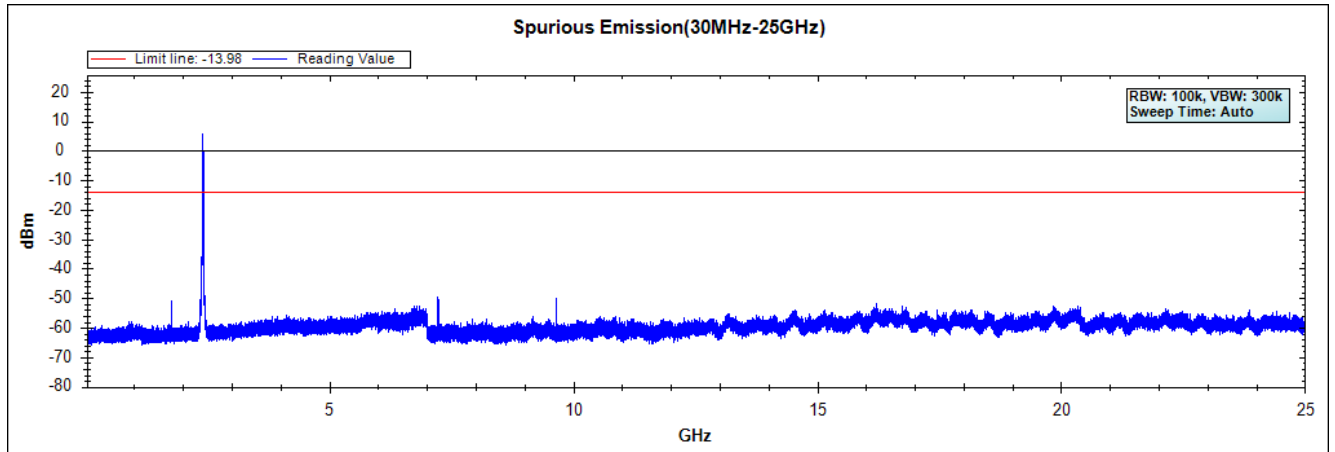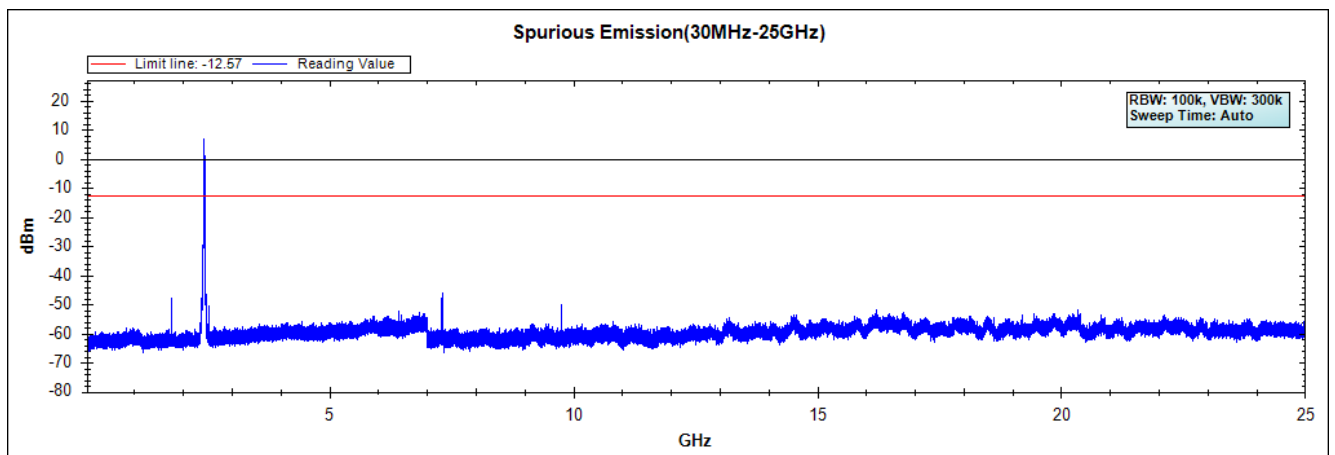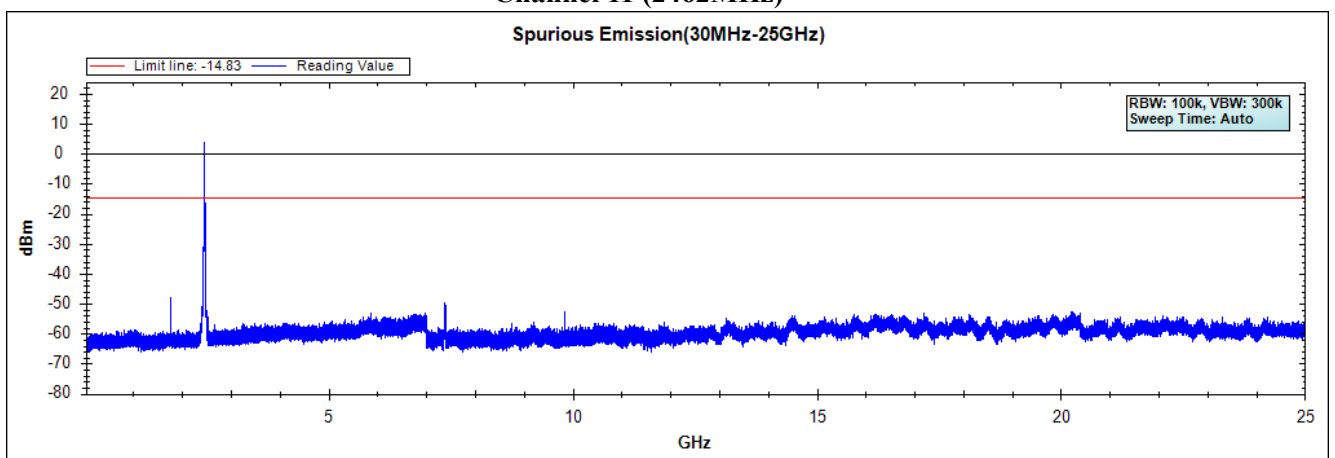Channel 01 (2412MHz)**Channel 06 (2437MHz)****Channel 11 (2462MHz)**

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : "Chiline" Pulse Oximeter and Respiratory Monitoring System
Test Item : RF Antenna Conducted Spurious
Test Mode : Mode 3: Transmit (802.11n 7.2Mbps 20M-BW)
Test Date : 2021/08/24

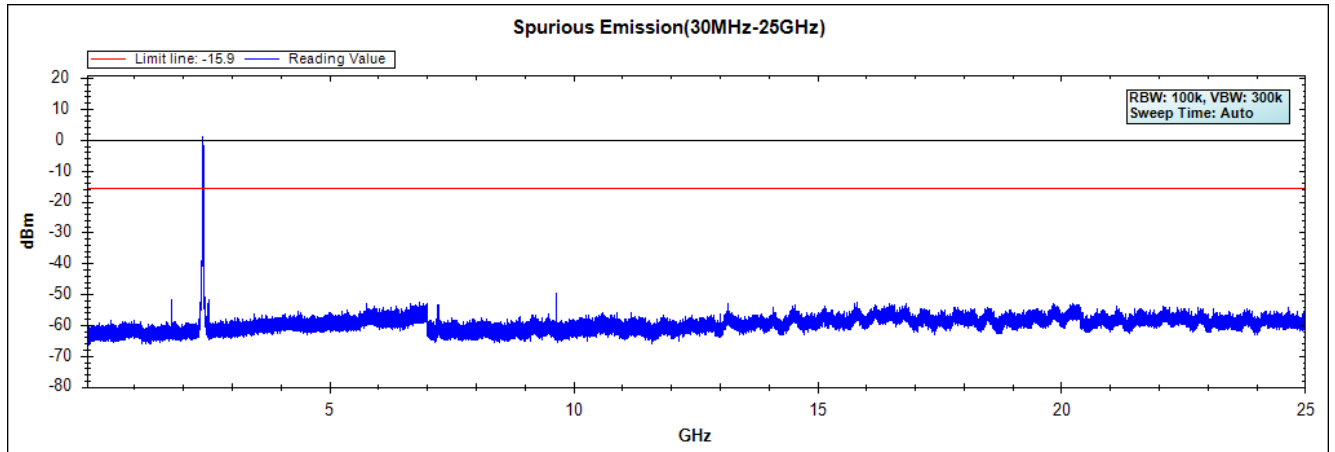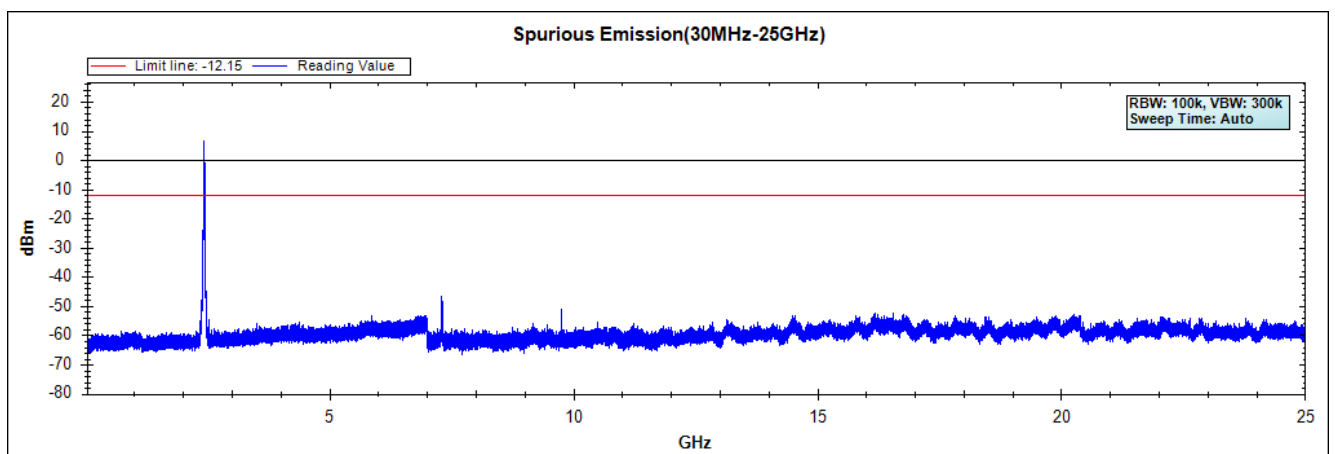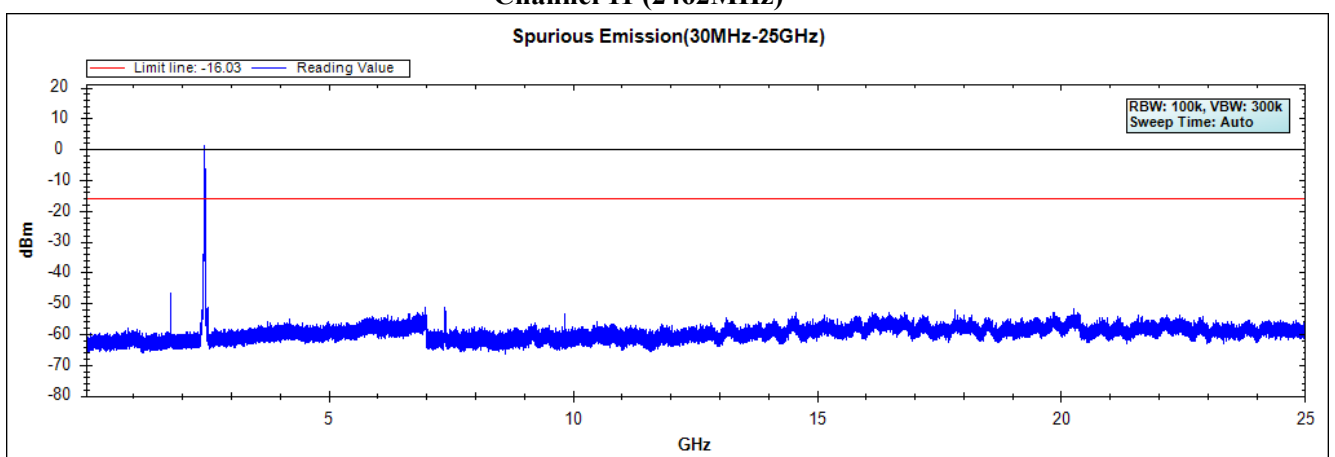
Channel 01 (2412MHz)**Channel 06 (2437MHz)****Channel 11 (2462MHz)**

Note: The above test pattern is synthesized by multiple of the frequency range.

6. Band Edge


6.1. Test Setup

RF Conducted Measurement

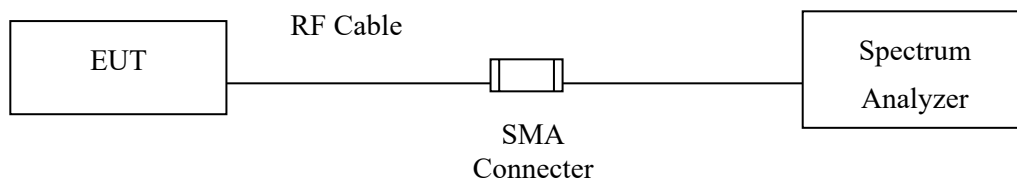

RF Radiated Measurement:

Above 1GHz

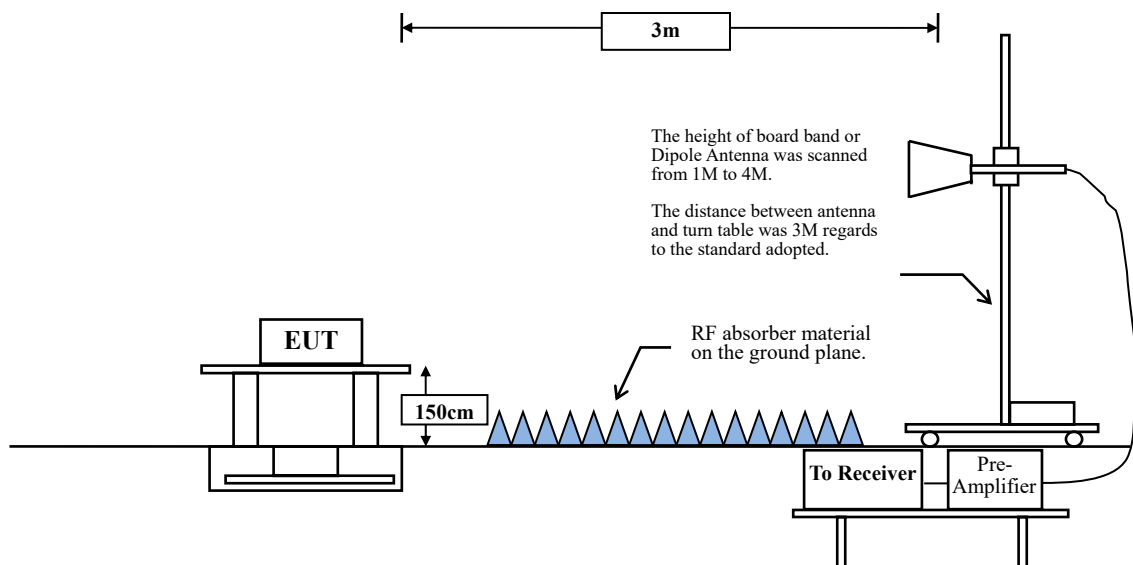

6.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 - RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

$VBW = 10\text{Hz}$, when duty cycle $\geq 98\%$


$VBW \geq 1/T$, when duty cycle $< 98\%$





(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11b	100.00	1.0000	1000	10
802.11g	95.72	2.0754	482	500
802.11n20	94.85	1.9246	520	1000


Note: Duty Cycle Refer to Section 9.

6.4. Test Result of Band Edge

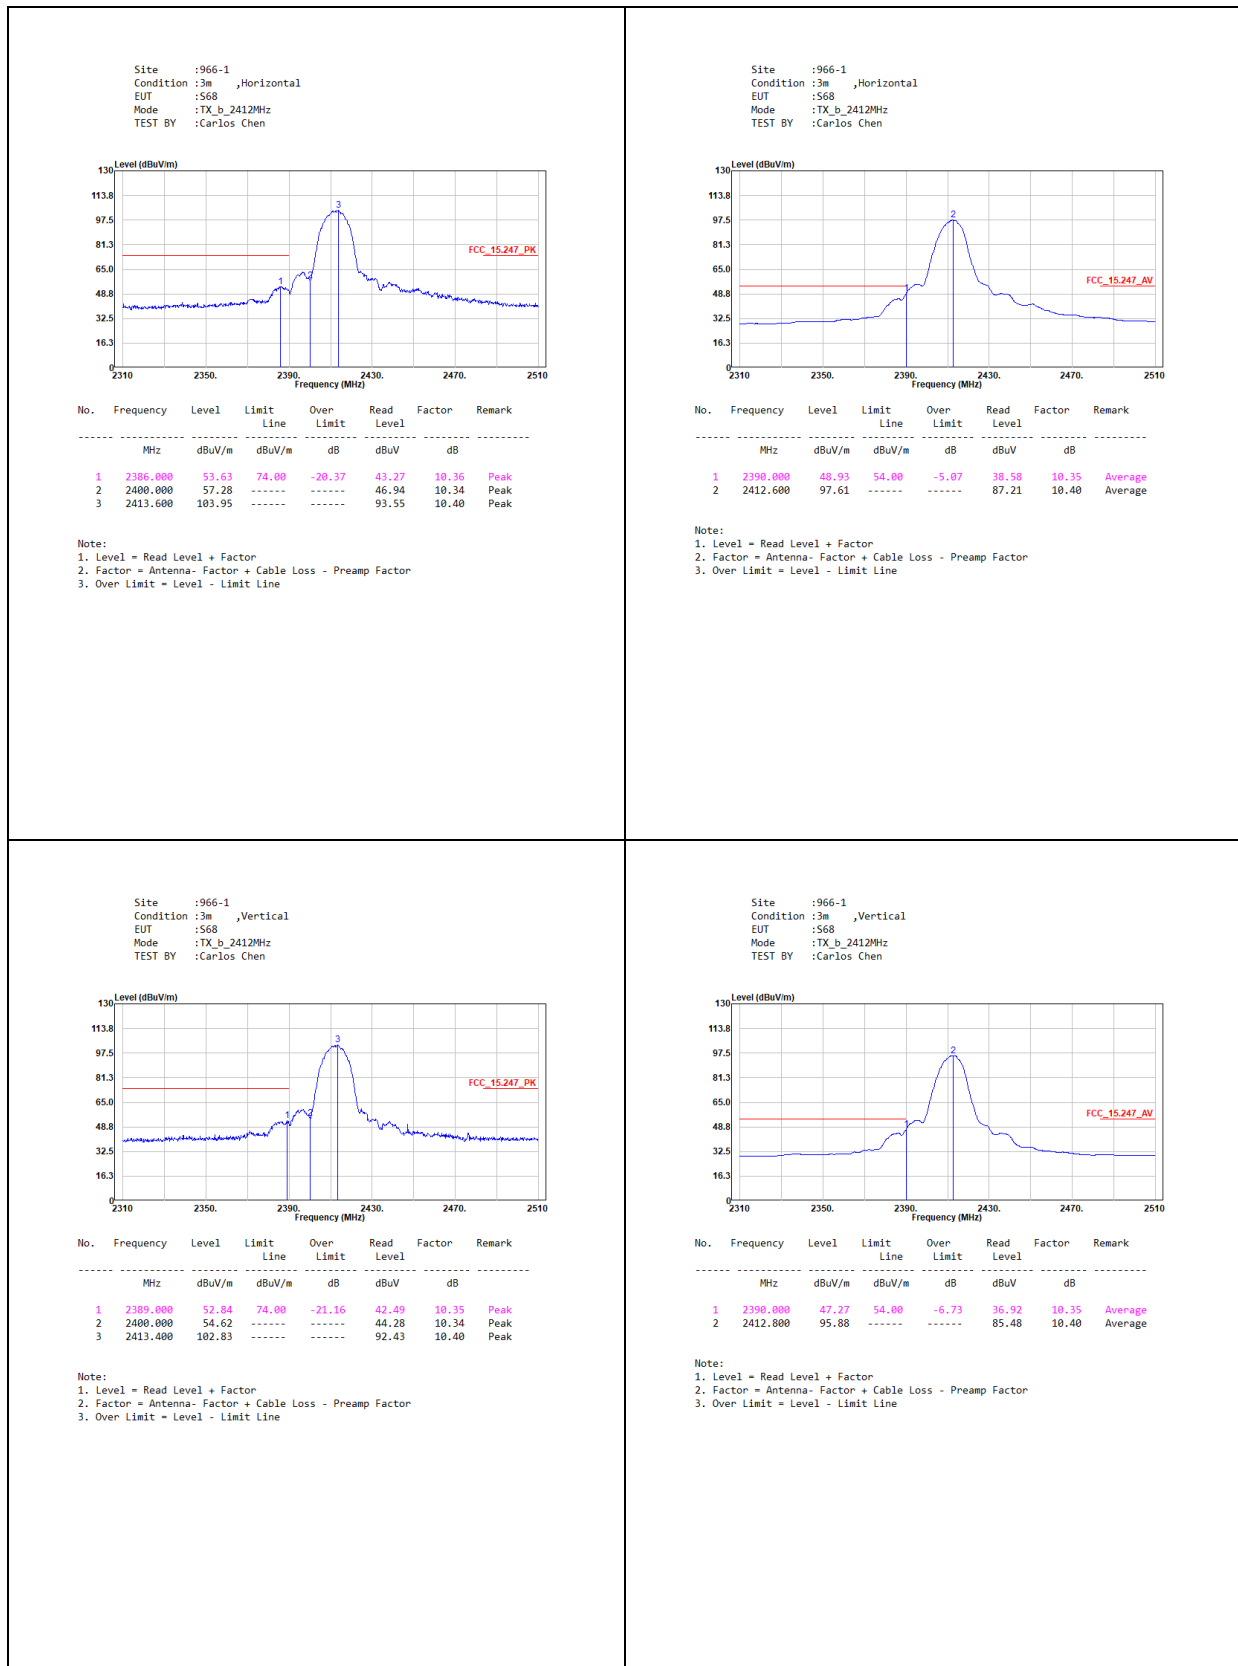

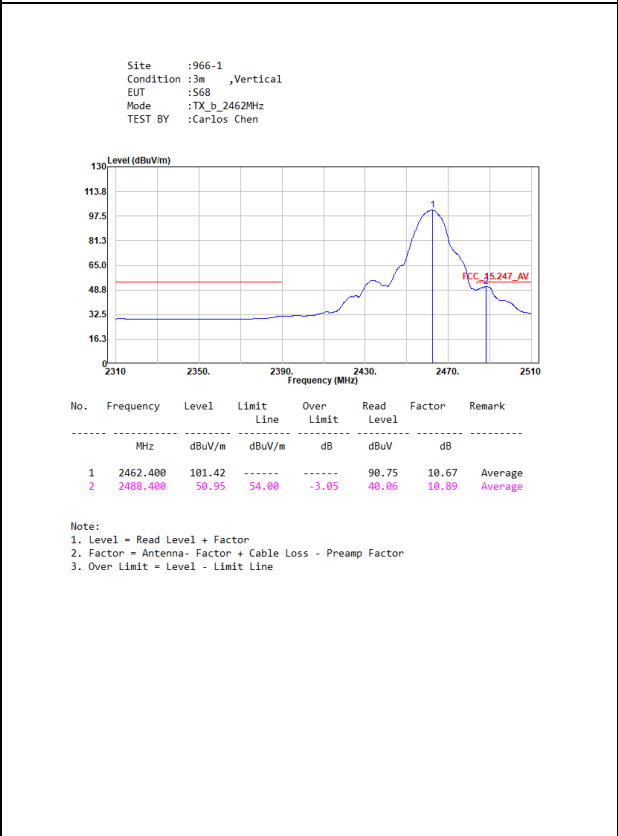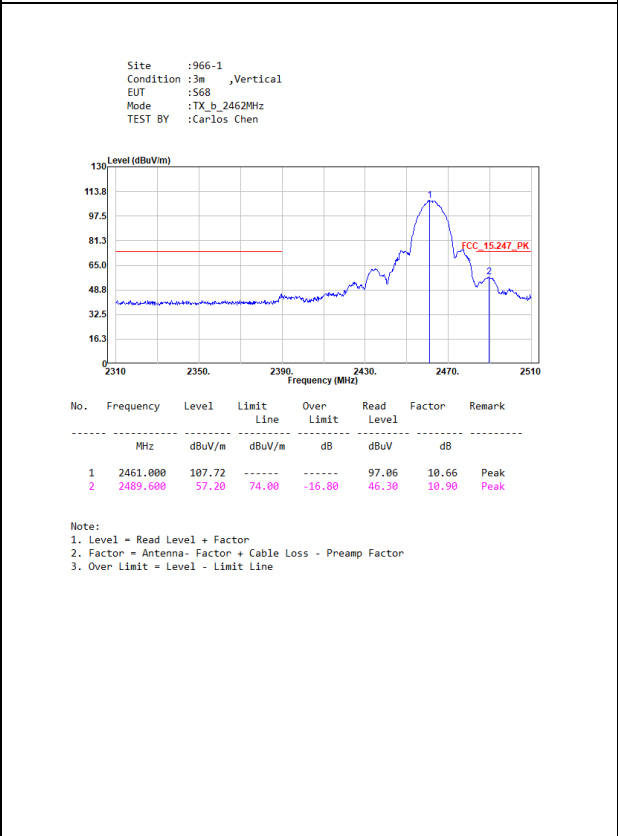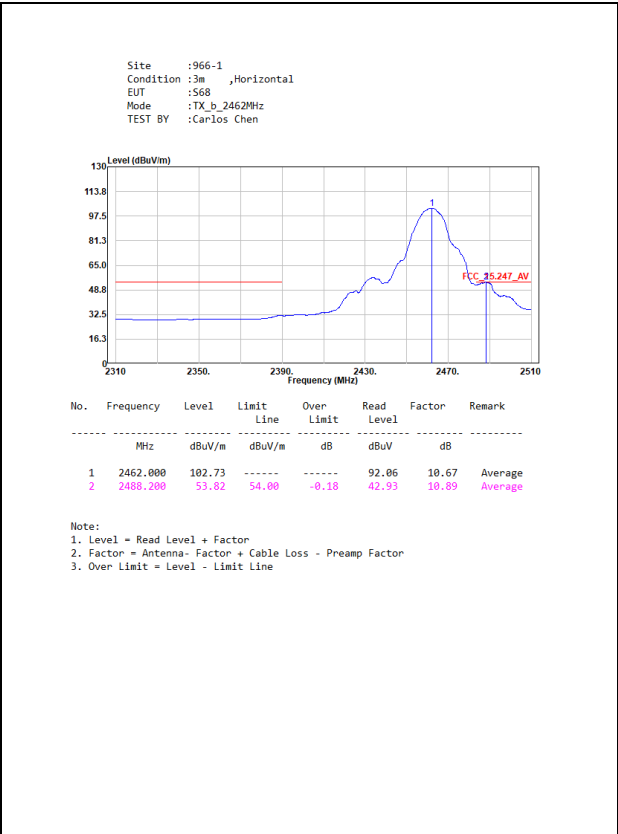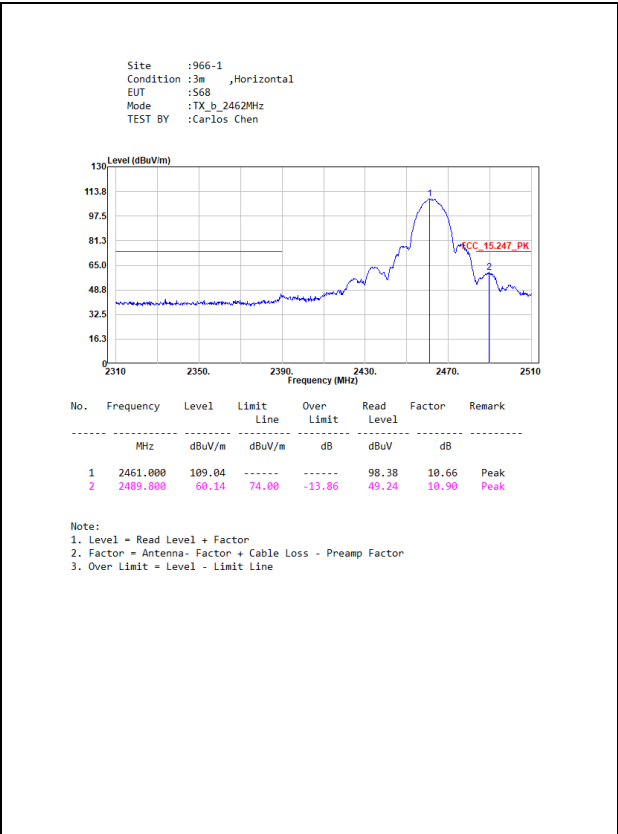


Site :966-1
Condition :3m ,Horizontal
EUT :568
Mode :TX_g_2412MHz
TEST BY :Carlos Chen

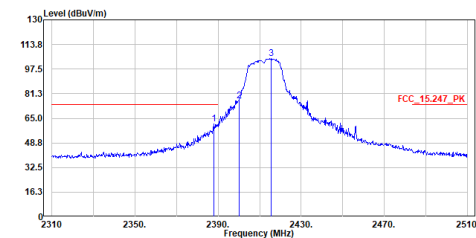

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2388.000	61.15	74.00	-12.85	50.80	10.35	Peak
2	2400.000	76.69	-----	-----	66.35	10.34	Peak
3	2415.400	104.49	-----	-----	94.08	10.41	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,Horizontal
EUT :568
Mode :TX_g_2412MHz
TEST BY :Carlos Chen

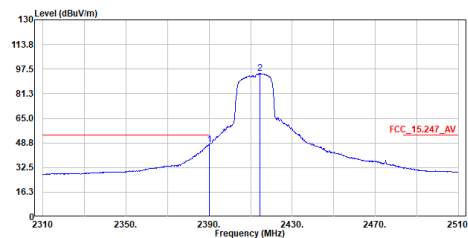

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2390.000	47.55	54.00	-6.45	37.20	10.35	Average
2	2414.600	94.52	-----	-----	84.11	10.41	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,Vertical
EUT :568
Mode :TX_g_2412MHz
TEST BY :Carlos Chen

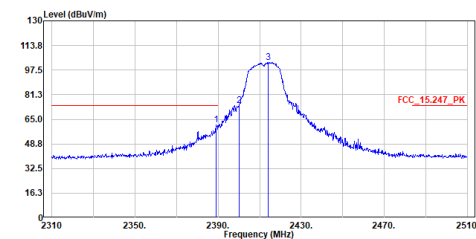

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2389.000	61.19	74.00	-12.81	50.84	10.35	Peak
2	2400.000	74.24	-----	-----	63.90	10.34	Peak
3	2414.200	102.71	-----	-----	92.30	10.41	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,Vertical
EUT :568
Mode :TX_g_2412MHz
TEST BY :Carlos Chen

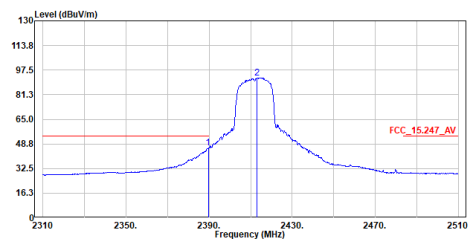

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2389.600	46.29	54.00	-7.71	35.94	10.35	Average
2	2413.200	92.47	-----	-----	82.07	10.40	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-1
Condition :3m ,Horizontal
EUT :568
Mode :TX_g_2462MHz
TEST BY :Carlos Chen

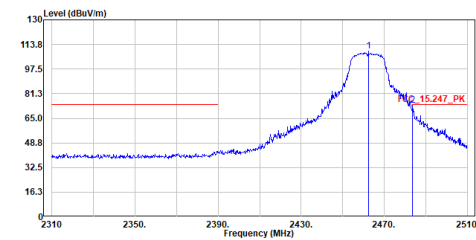


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2462.400	109.47	-----	-----	98.80	10.67	Peak
2	2483.600	73.59	74.00	-0.41	62.75	10.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-1
Condition :3m ,Horizontal
EUT :568
Mode :TX_g_2462MHz
TEST BY :Carlos Chen

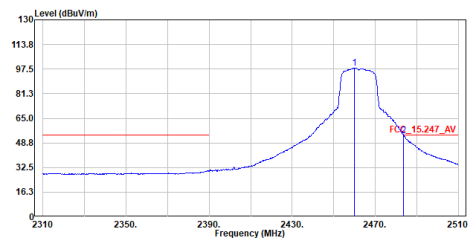


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2460.000	98.16	-----	-----	87.51	10.65	Average
2	2483.600	53.68	54.00	-0.32	42.84	10.84	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-1
Condition :3m ,Vertical
EUT :568
Mode :TX_g_2462MHz
TEST BY :Carlos Chen

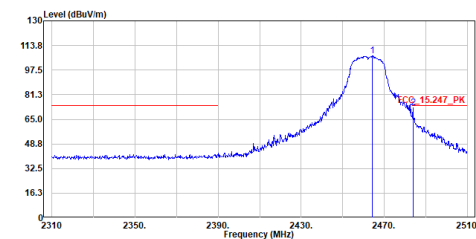


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2464.400	107.14	-----	-----	96.45	10.69	Peak
2	2483.800	72.47	74.00	-1.53	61.63	10.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-1
Condition :3m ,Vertical
EUT :568
Mode :TX_g_2462MHz
TEST BY :Carlos Chen

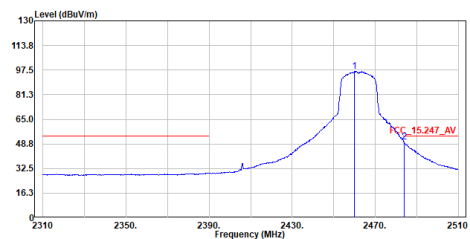


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2460.000	96.53	-----	-----	85.88	10.65	Average
2	2483.800	50.19	54.00	-3.81	39.35	10.84	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,Horizontal
EUT :568
Mode :TX_n20_2412MHz
TEST BY :Carlos Chen

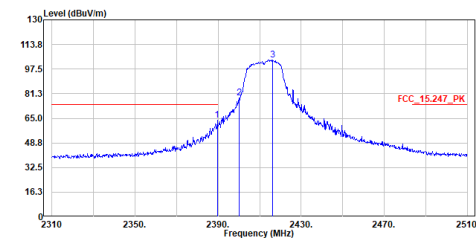

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2389.600	63.75	74.00	-10.25	53.40	10.35	Peak
2	2400.000	78.54	-----	-----	68.20	10.34	Peak
3	2416.200	103.64	-----	-----	93.23	10.41	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,Horizontal
EUT :568
Mode :TX_n20_2412MHz
TEST BY :Carlos Chen

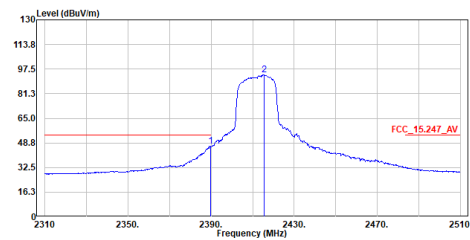

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2389.800	46.75	54.00	-7.25	36.40	10.35	Average
2	2415.400	93.68	-----	-----	83.27	10.41	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :966-1
Condition :3m ,Vertical
EUT :568
Mode :TX_n20_2412MHz
TEST BY :Carlos Chen

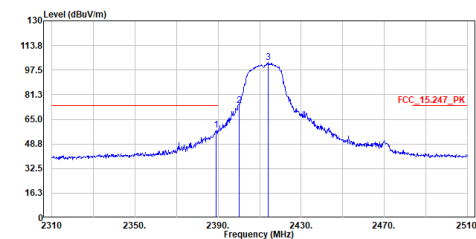

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2389.200	57.70	74.00	-16.30	47.35	10.35	Peak
2	2400.000	74.05	-----	-----	63.71	10.34	Peak
3	2414.200	102.37	-----	-----	91.96	10.41	Peak




Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :966-1
Condition :3m ,Vertical
EUT :568
Mode :TX_n20_2412MHz
TEST BY :Carlos Chen

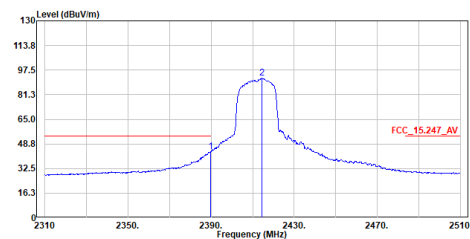


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2389.800	43.74	54.00	-10.26	33.39	10.35	Average
2	2414.400	92.01	-----	-----	81.60	10.41	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

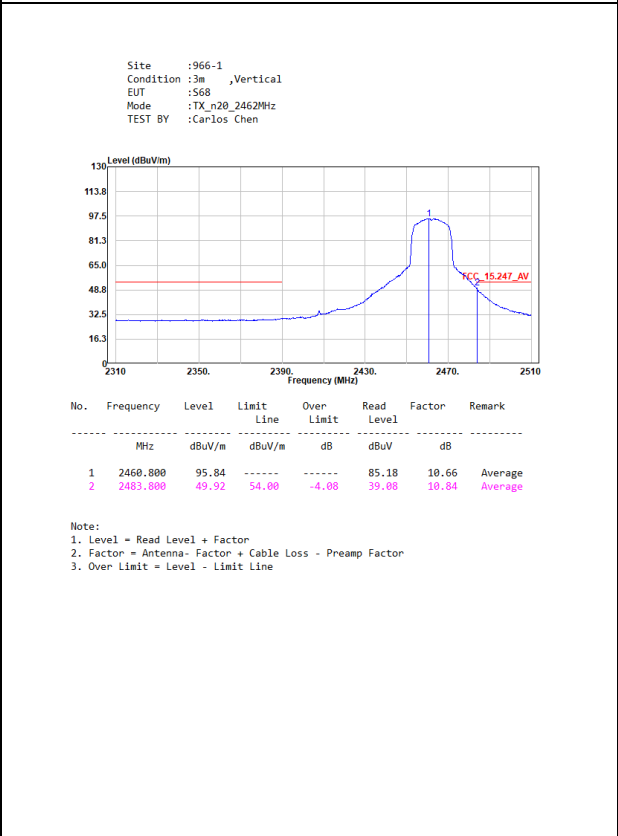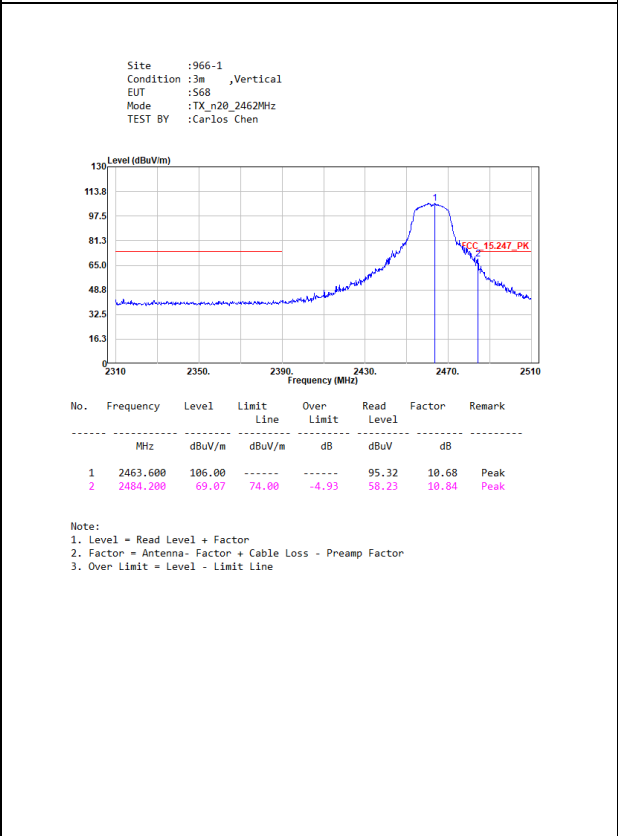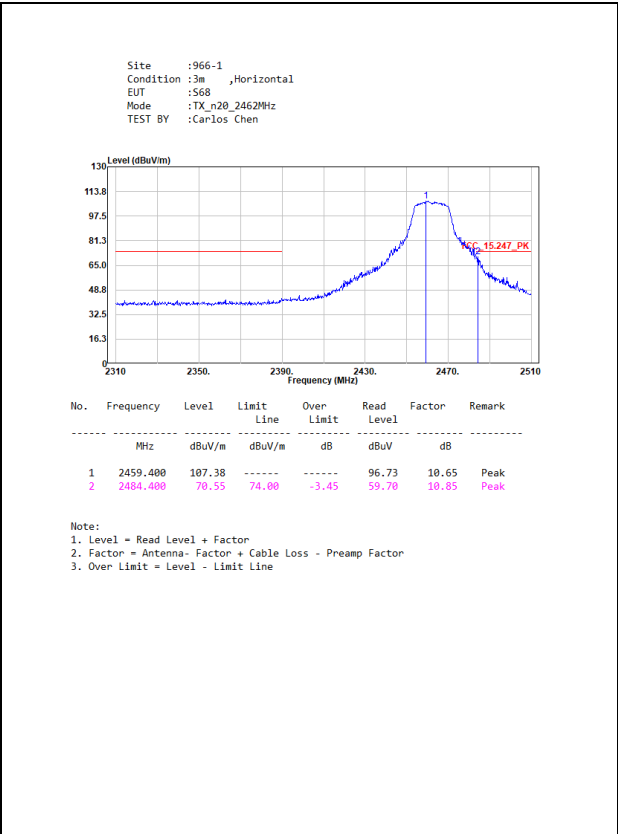

7. 6dB Bandwidth

7.1. Test Setup

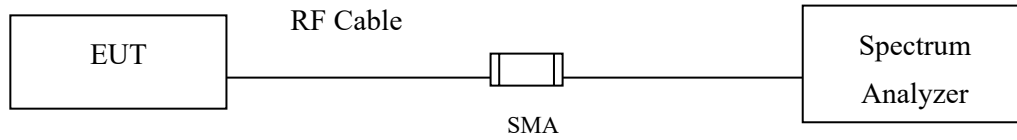

7.2. Limits

The minimum bandwidth shall be at least 500 kHz.

7.3. Test Procedure


The EUT was setup according to ANSI C63.4, 2014; tested according to ANSI C63.10 Section 11.8 for compliance to FCC 47CFR 15.247 requirements.

7.4. Test Result of 6dB Bandwidth

Product : “Chiline” Pulse Oximeter and Respiratory Monitoring System
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	9100	>500	Pass
06	2437	10150	>500	Pass
11	2462	9600	>500	Pass

Figure Channel 01:

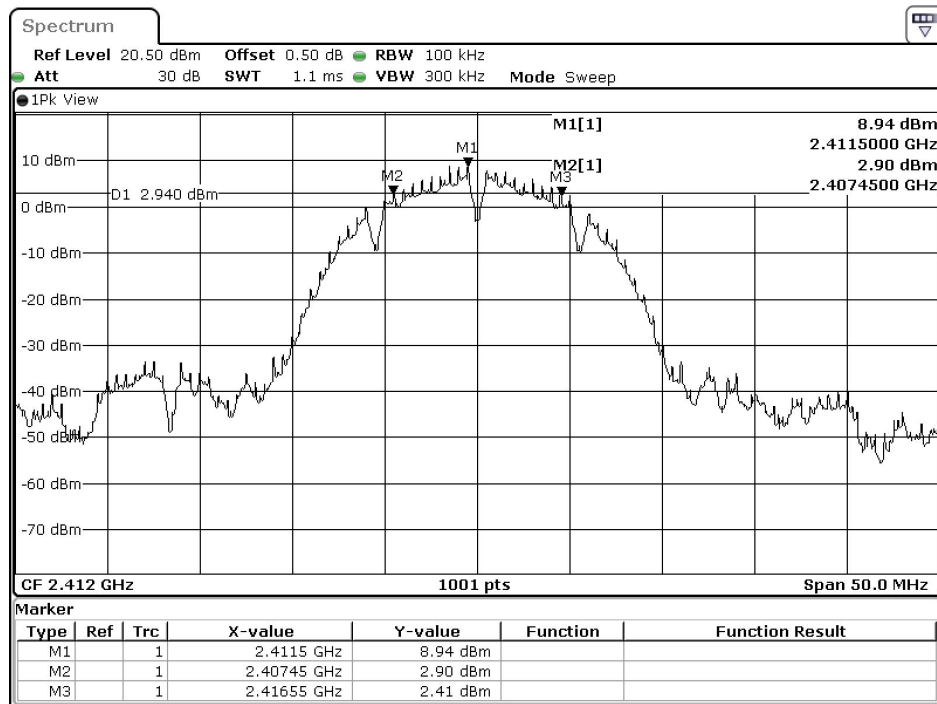


Date: 24.AUG.2021 07:27:58

Figure Channel 06:

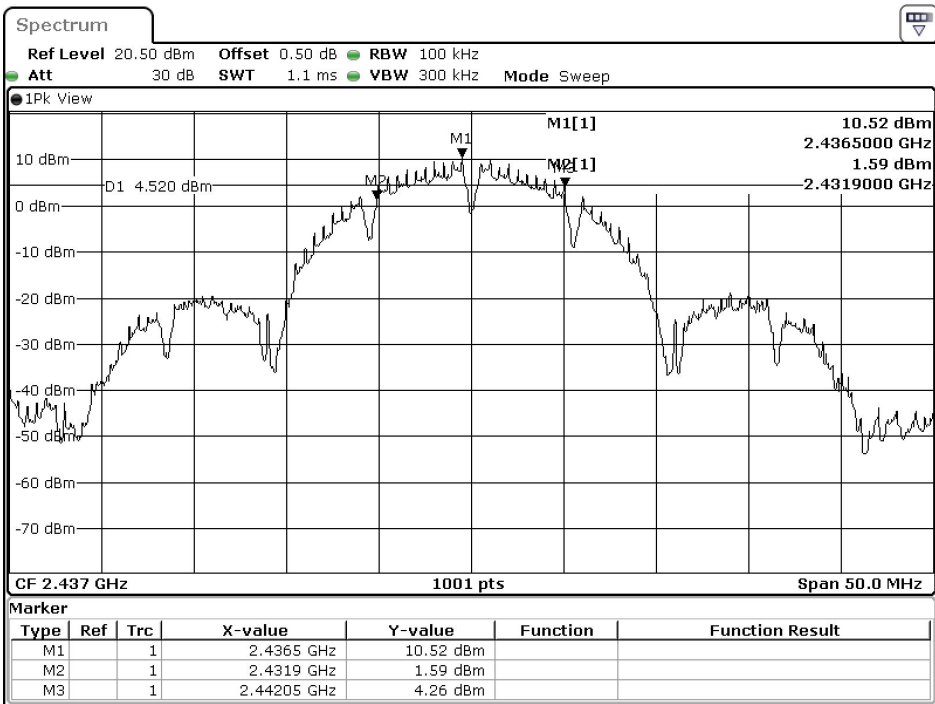

Date: 24.AUG.2021 07:32:09

Figure Channel 11:

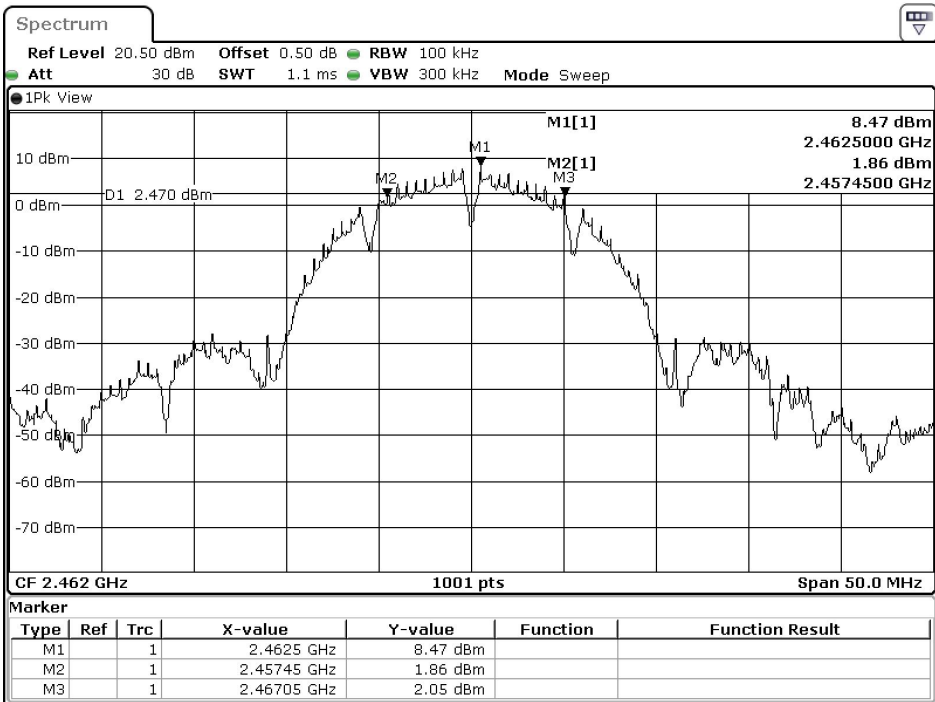


Date: 24.AUG.2021 07:37:08

Product : “Chiline” Pulse Oximeter and Respiratory Monitoring System
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	14450	>500	Pass
06	2437	15200	>500	Pass
11	2462	15150	>500	Pass

Figure Channel 01:

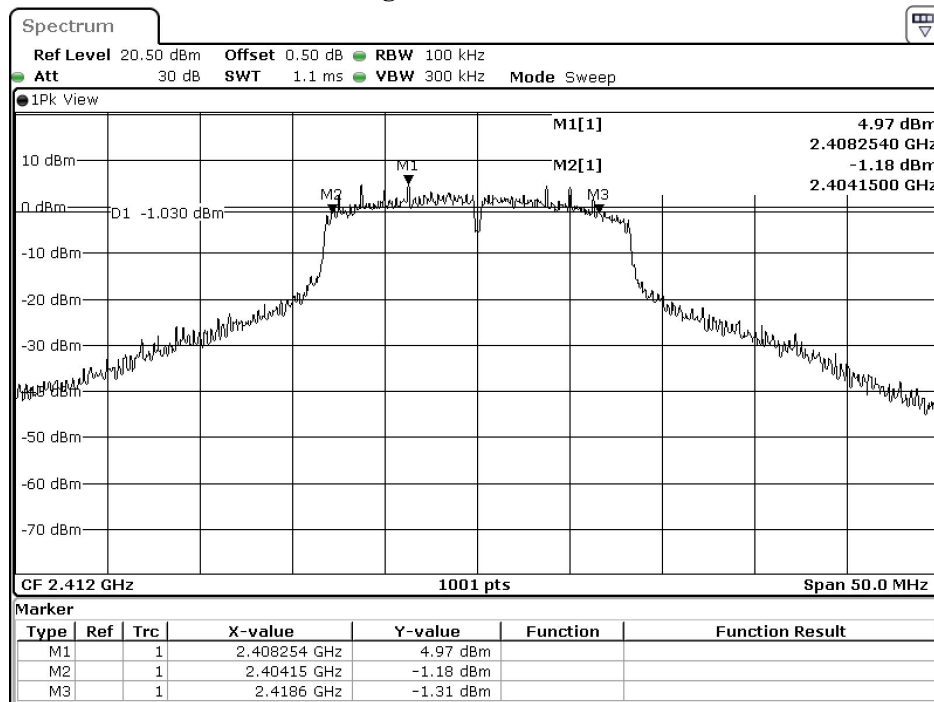


Date: 24.AUG.2021 07:40:45

Figure Channel 06:

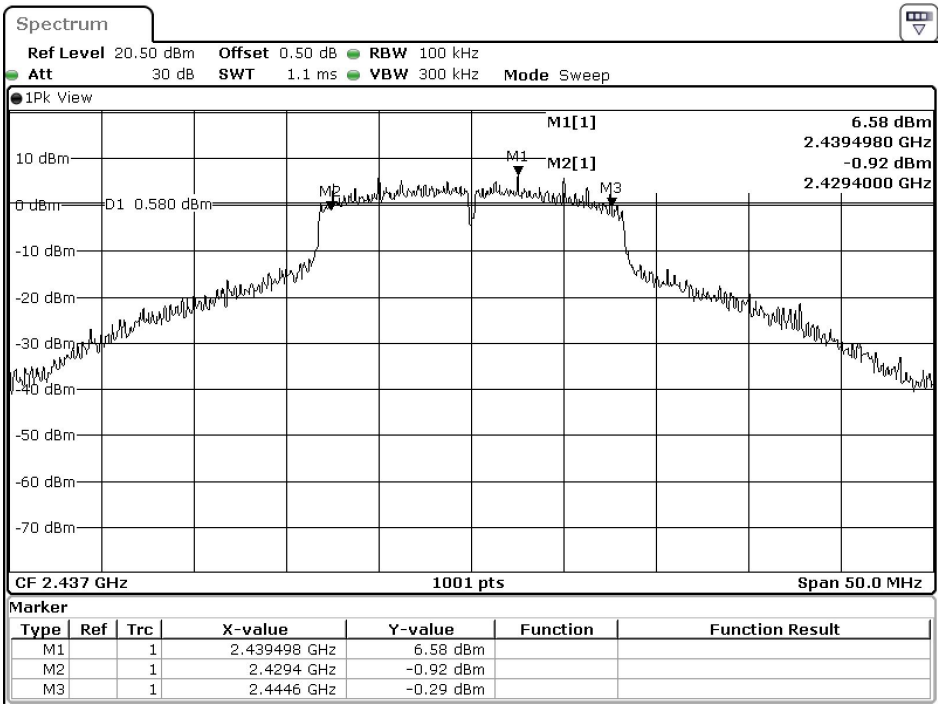

Date: 24.AUG.2021 07:43:33

Figure Channel 11:

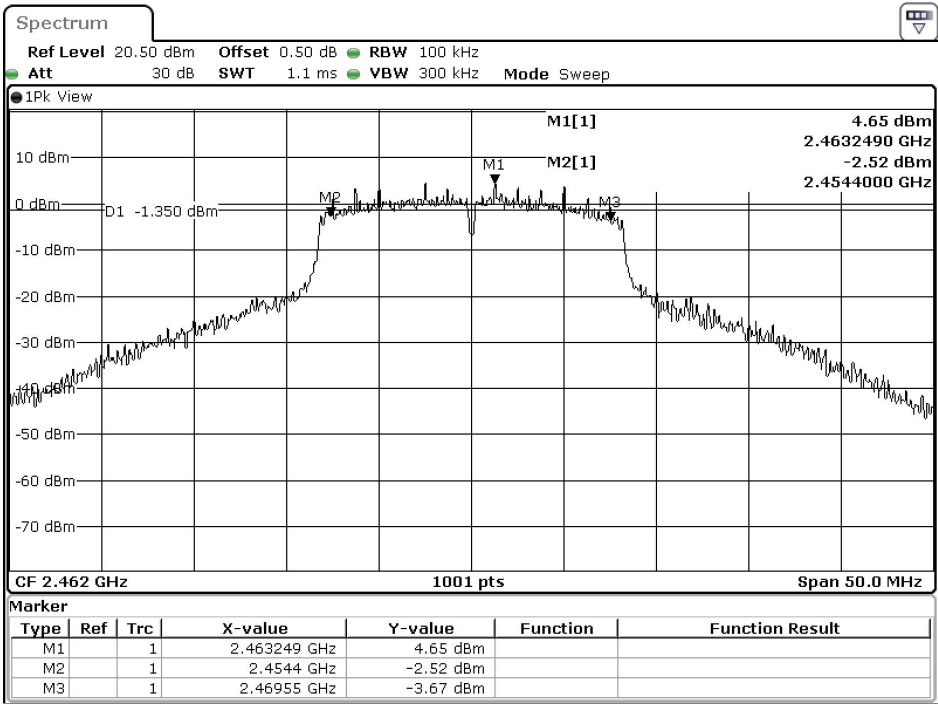


Date: 24.AUG.2021 07:46:25

Product : “Chiline” Pulse Oximeter and Respiratory Monitoring System
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 3: Transmit (802.11n 7.2Mbps 20M-BW)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	15200	>500	Pass
06	2437	15150	>500	Pass
11	2462	15200	>500	Pass

Figure Channel 01:

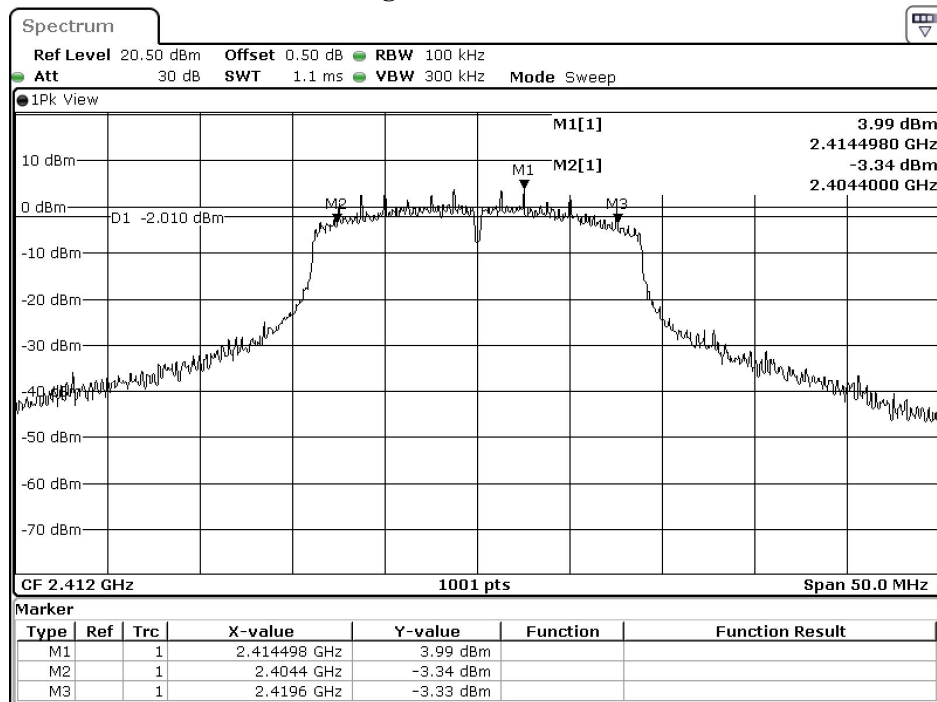


Date: 24.AUG.2021 07:49:11

Figure Channel 06:

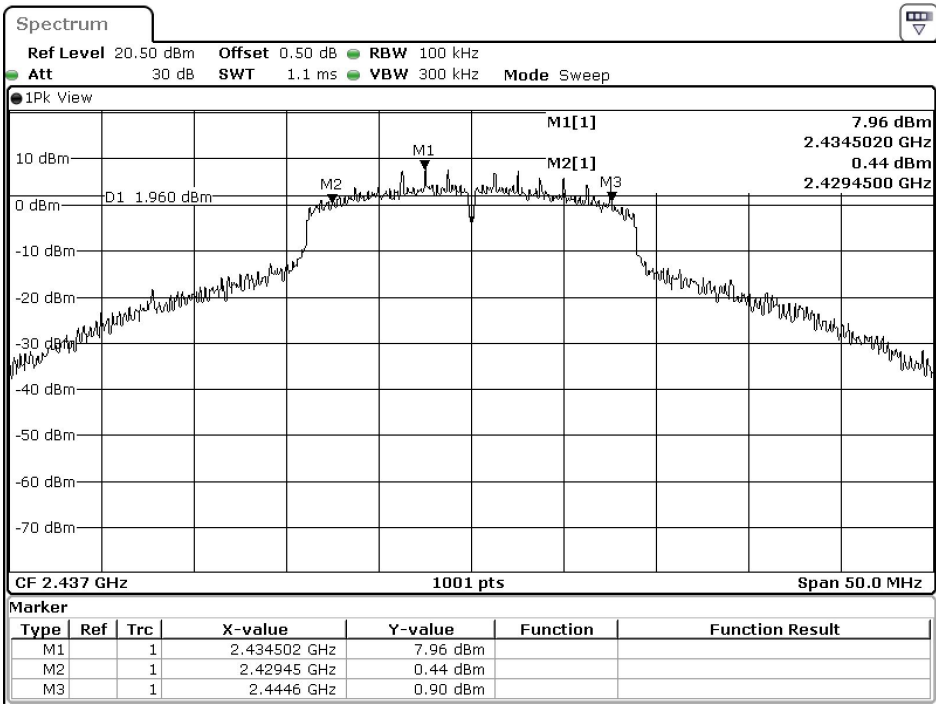

Date: 24.AUG.2021 07:51:59


Figure Channel 11:

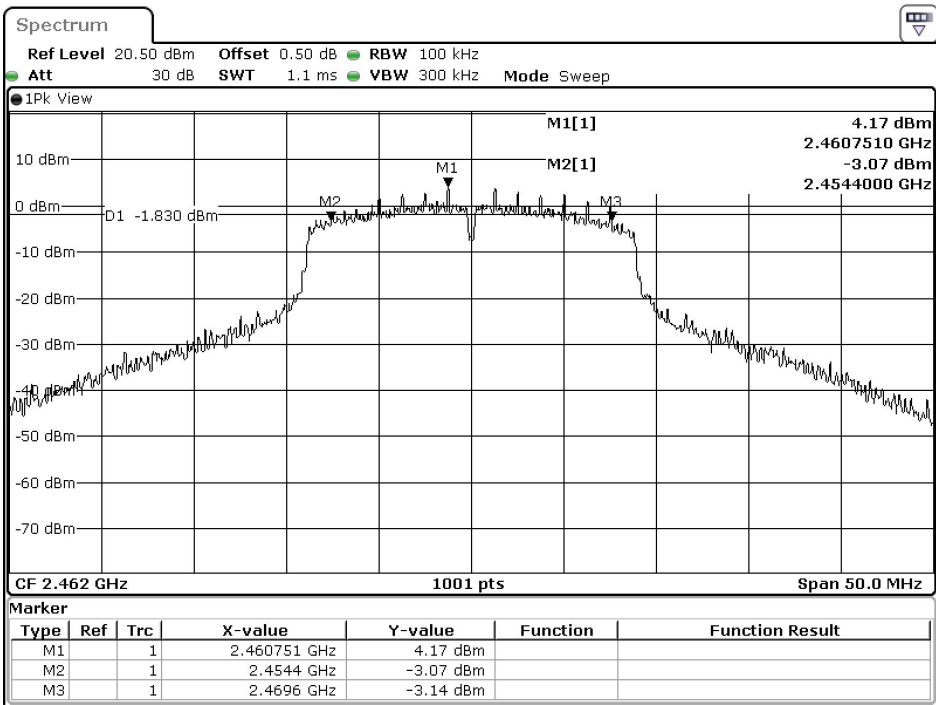

Date: 24.AUG.2021 07:55:24

8. Power Density

8.1. Test Setup

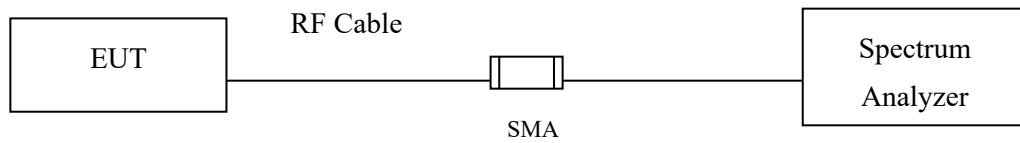

8.2. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.


The maximum power spectral density using C63.10 Section 11.10.2 Method PKPSD (peak PSD)

8.4. Test Result of Power Density

Product : "Chiline" Pulse Oximeter and Respiratory Monitoring System
 Test Item : Power Density Data
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)


Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
01	2412	6.950	$\leq 8\text{dBm}$	Pass
06	2437	6.980	$\leq 8\text{dBm}$	Pass
11	2462	6.440	$\leq 8\text{dBm}$	Pass

Figure Channel 01:

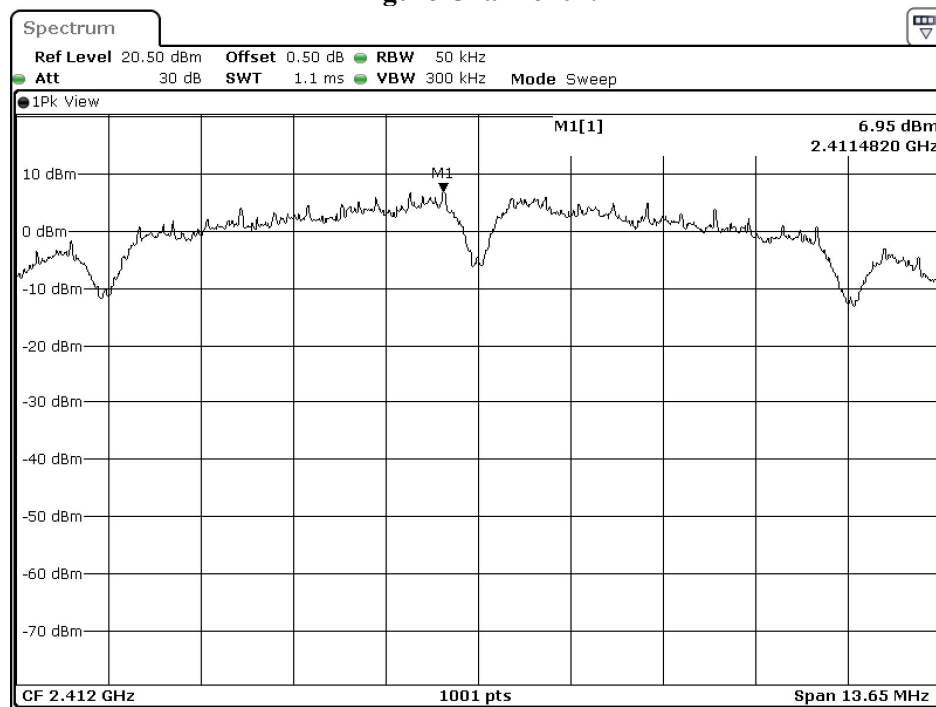


Date: 24.AUG.2021 07:29:08

Figure Channel 06:

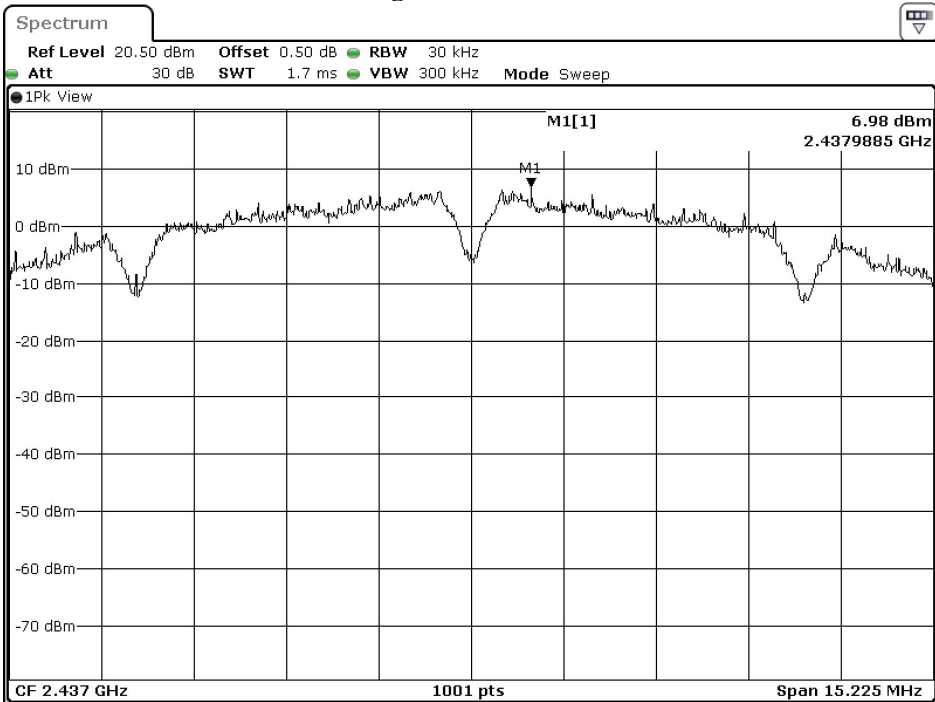

Date: 24.AUG.2021 07:34:24

Figure Channel 11:

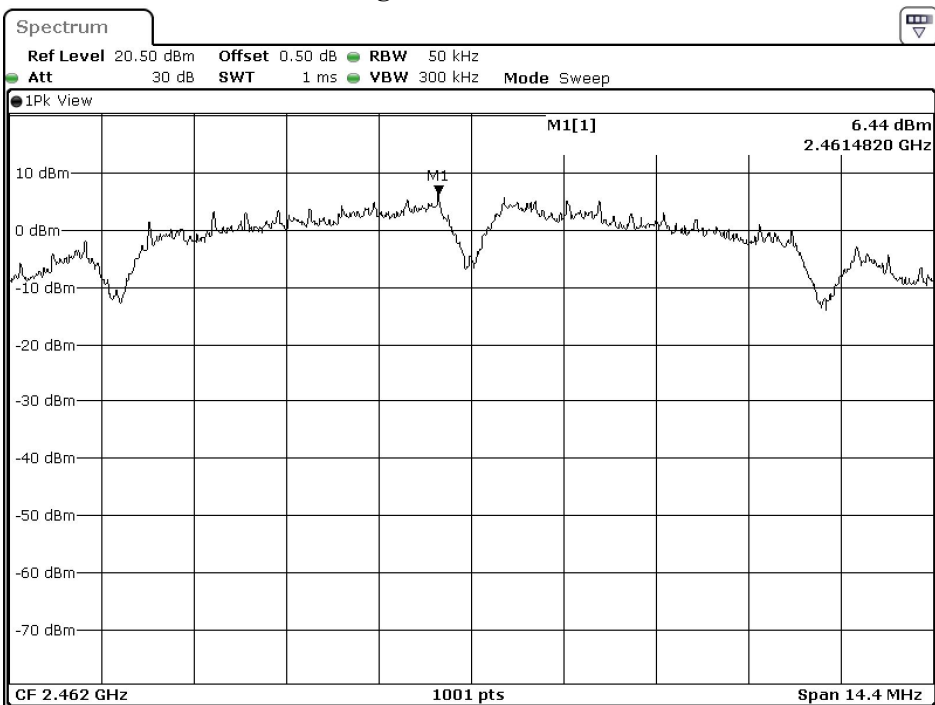


Date: 24.AUG.2021 07:38:18

Product : "Chiline" Pulse Oximeter and Respiratory Monitoring System
 Test Item : Power Density Data
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)


Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
01	2412	6.020	$\leq 8\text{dBm}$	Pass
06	2437	7.430	$\leq 8\text{dBm}$	Pass
11	2462	5.170	$\leq 8\text{dBm}$	Pass

Figure Channel 01:

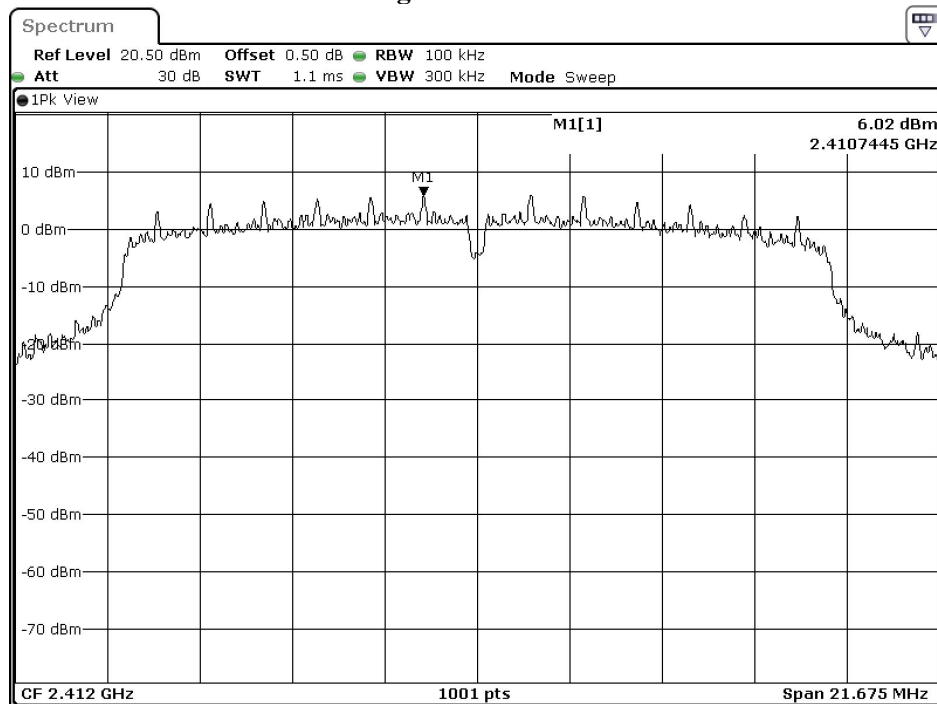


Date: 24.AUG.2021 07:41:07

Figure Channel 06:

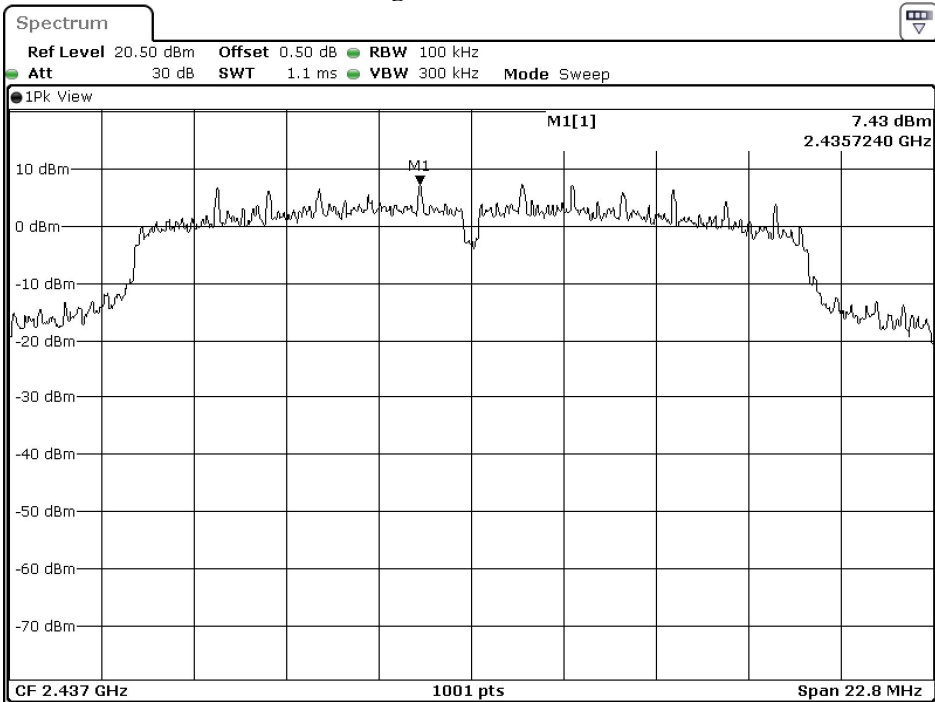

Date: 24.AUG.2021 07:43:55

Figure Channel 11:

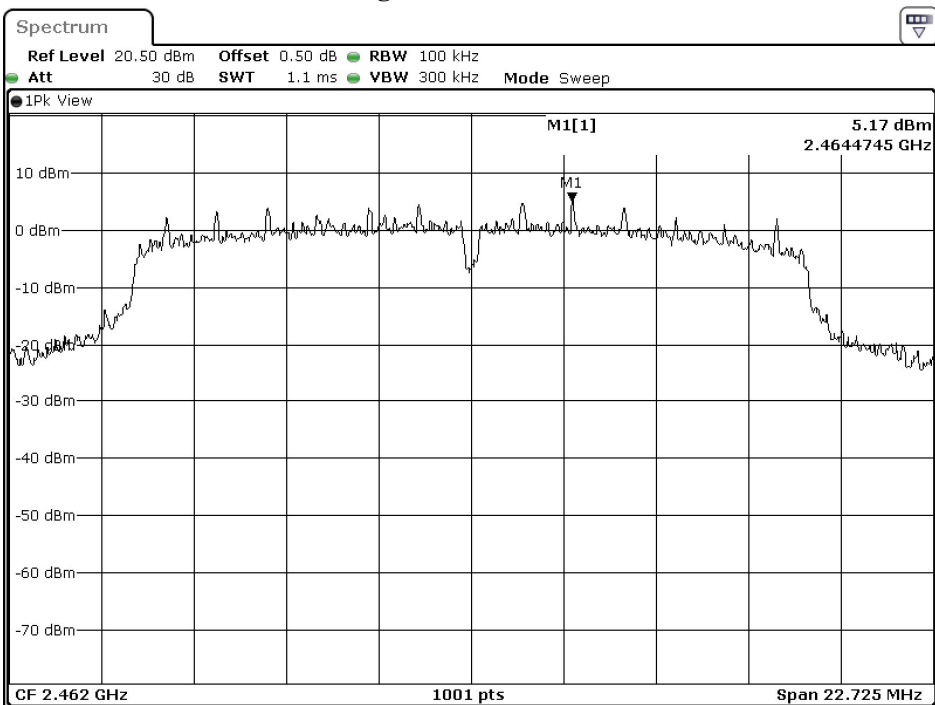


Date: 24.AUG.2021 07:46:46

Product : “Chiline” Pulse Oximeter and Respiratory Monitoring System
 Test Item : Power Density Data
 Test Mode : Mode 3: Transmit (802.11n 7.2Mbps 20M-BW)


Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
01	2412	4.100	≤ 8 dBm	Pass
06	2437	7.850	≤ 8 dBm	Pass
11	2462	3.970	≤ 8 dBm	Pass

Figure Channel 01:

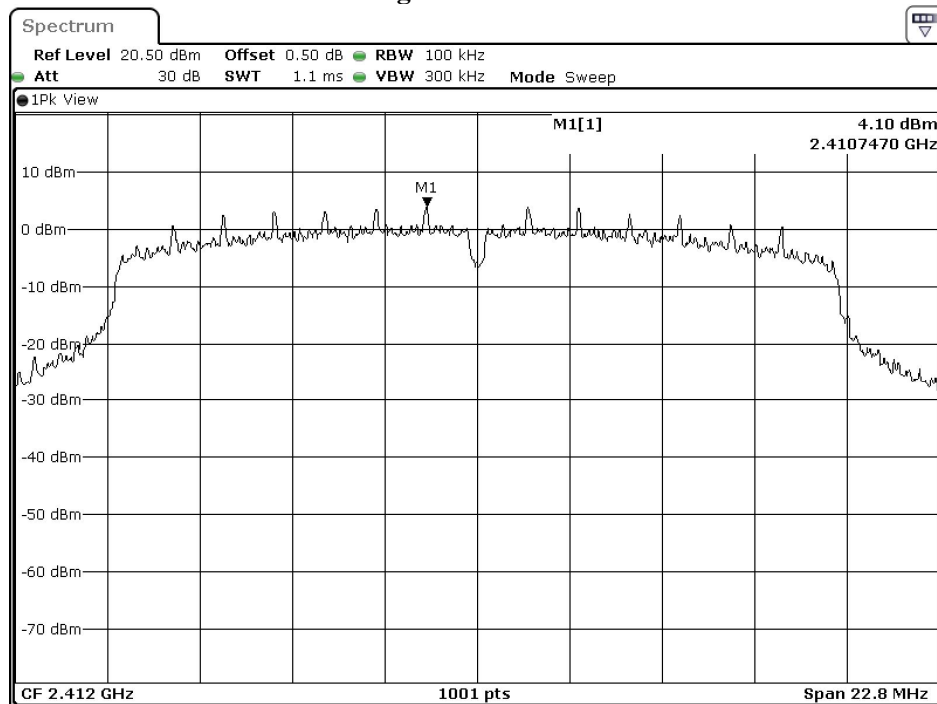


Date: 24.AUG.2021 07:49:32

Figure Channel 06:

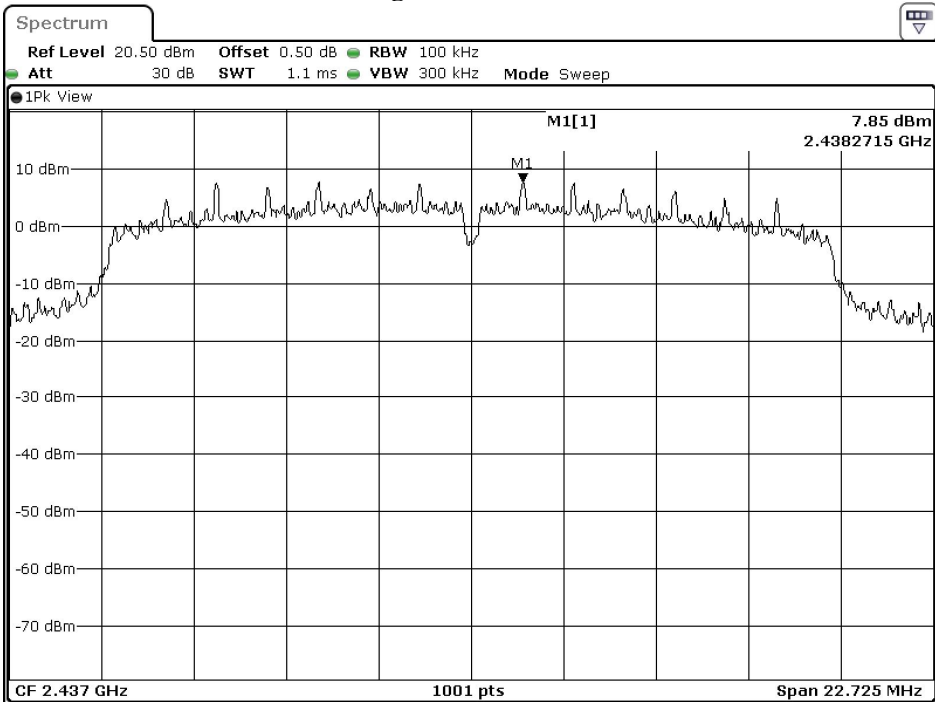

Date: 24.AUG.2021 07:52:53


Figure Channel 11:

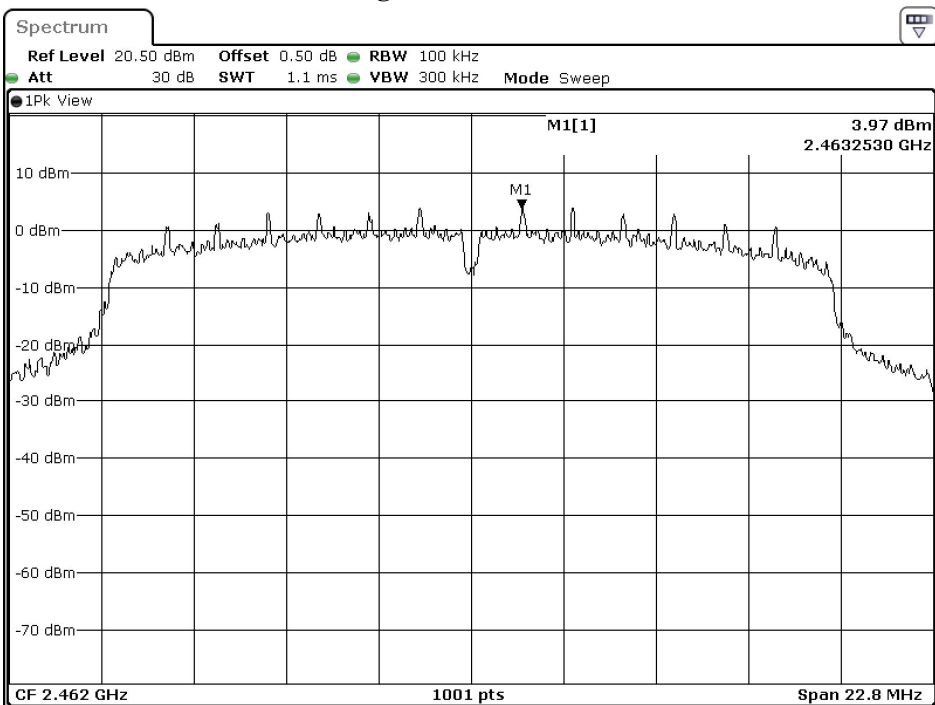

Date: 24.AUG.2021 07:55:45

9. Duty Cycle

9.1. Test Setup

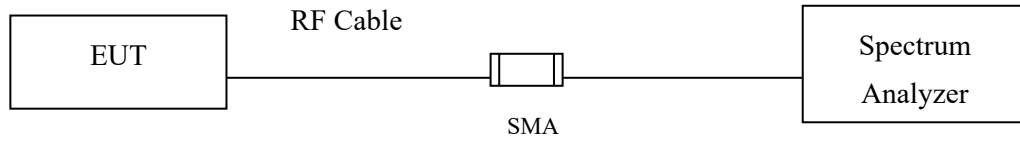

9.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to ANSI C63.10 2013 for compliance to FCC 47CFR 15.247 requirements.

9.3. Test Result of Duty Cycle

Product : “Chiline” Pulse Oximeter and Respiratory Monitoring System
 Test Item : Duty Cycle
 Test Mode : Transmit

Duty Cycle Formula:


Duty Cycle = Ton / (Ton + Toff)

Duty Factor = 10 Log (1/Duty Cycle)

Results:


2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11b	1.0000	1.0000	100.00	0.00
802.11g	2.0754	2.1681	95.72	0.19
802.11n20	1.9246	2.0290	94.85	0.23

802.11b

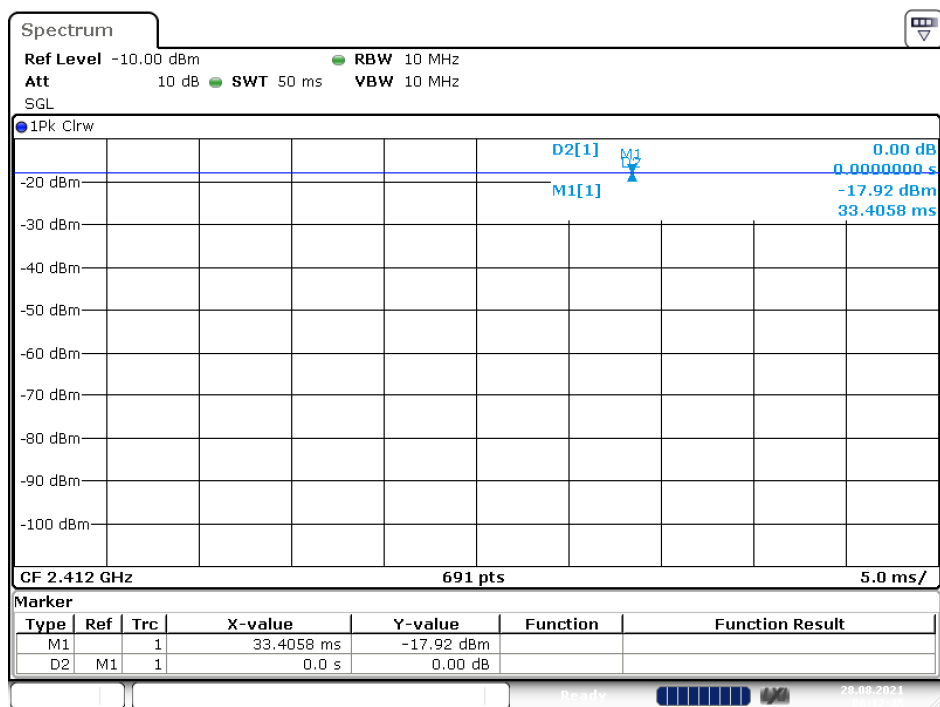


Date: 28.AUG.2021 06:12:49

802.11g

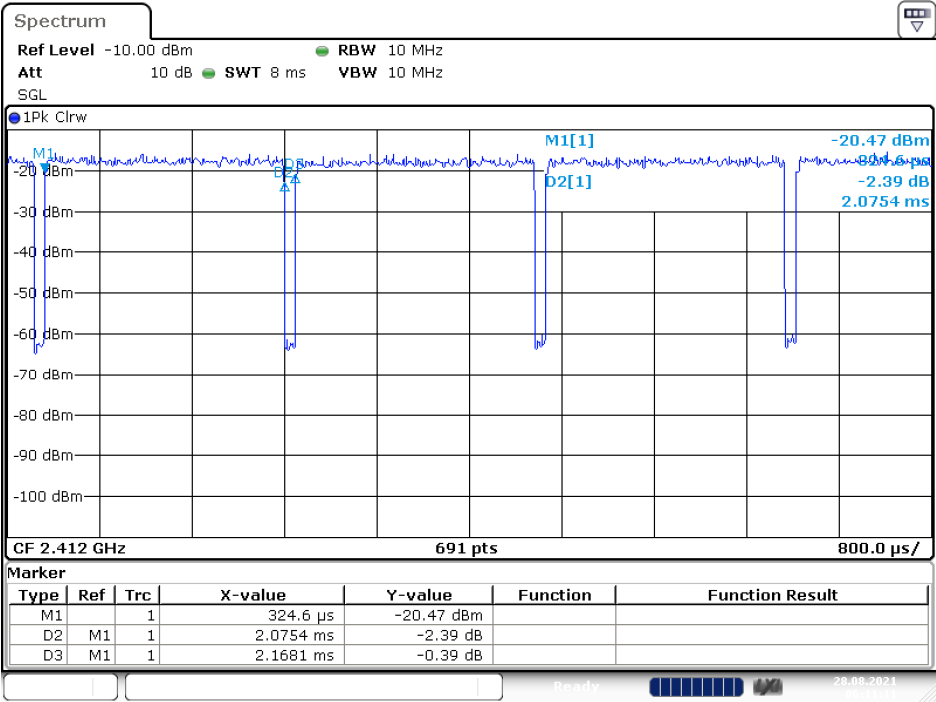

Date: 28.AUG.2021 06:11:11

802.11n20

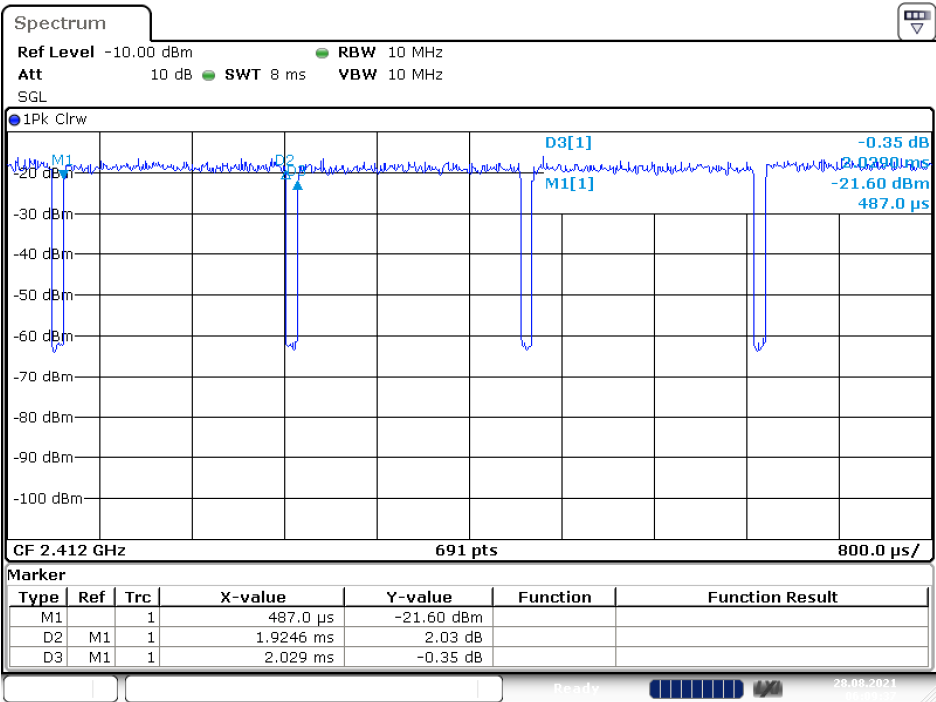

Date: 28.AUG.2021 06:09:37

10. EMI Reduction Method During Compliance Testing

No modification was made during testing.