



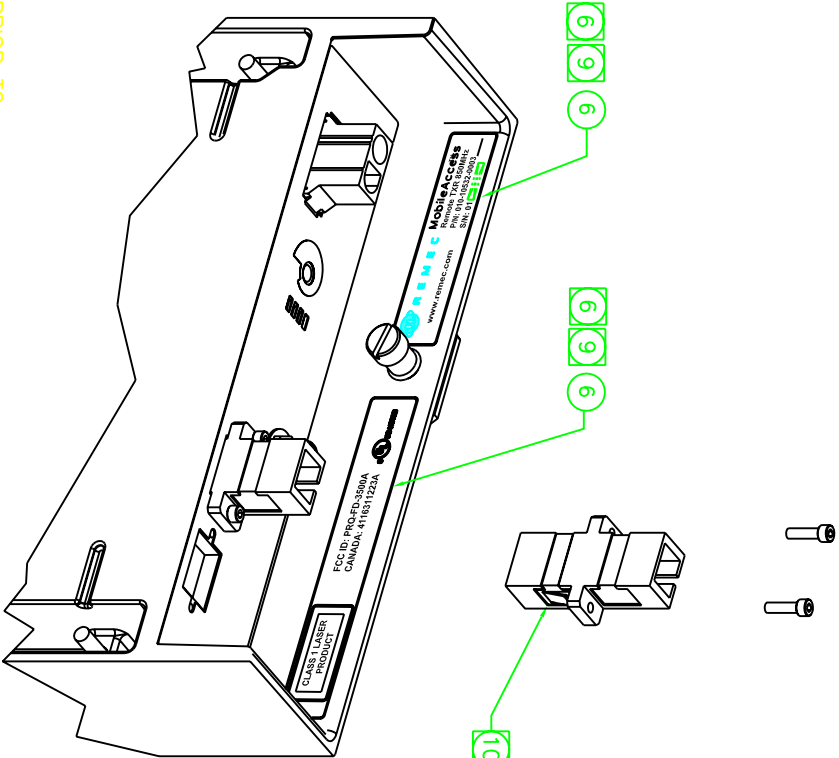

NOTES:

- 1 TIGHTEN NUT TO RF CONNECTOR PRIOR TO TIGHTENING MOUNTING SCREWS TO PCB.
- 2 INCLUDED WITH HOUSING
- 3 NUT AND WASHER INCLUDED WITH ASSY 187-1004-01; INSTALL AT THIS LEVEL; BODY TORQUE NOT TO EXCEED X LB-IN
- 4 NUTS AND WASHERS INCLUDED WITH ASSY 700-13245-0001; INSTALL AT THIS LEVEL
- 5 OBSERVE WIRING POLARITY; RED TO +; BLACK TO -
- 6 CLEAN SURFACE WITH ALCOHOL PRIOR TO AFFIXING LABEL
- 7 FIBER OPTIC CABLE; ADD AT THIS LEVEL (CLEAN CONNECTORS WITH ALCOHOL BEFORE INSERTING INTO OPTICAL ADAPTER).
- 8 TAPE FIBER OPTIC CABLES TO HOUSING; ALLOW SUFFICIENT PLAY FOR DISSASSEMBLY; DO NOT STRESS CABLE
- 9 ORIENT LABELS AS SHOWN
- 10 ORIENT OPTICAL SC CONNECTORS AS SHOWN SO THAT METAL CLIP IS INSERTED INTO CASTING
- 11 ORIENT MOLEX CONNECTOR AS SHOWN SO THAT POLARITY OF CABLE ASSEMBLY MATCHES POLARITY MARKINGS ON CASTING

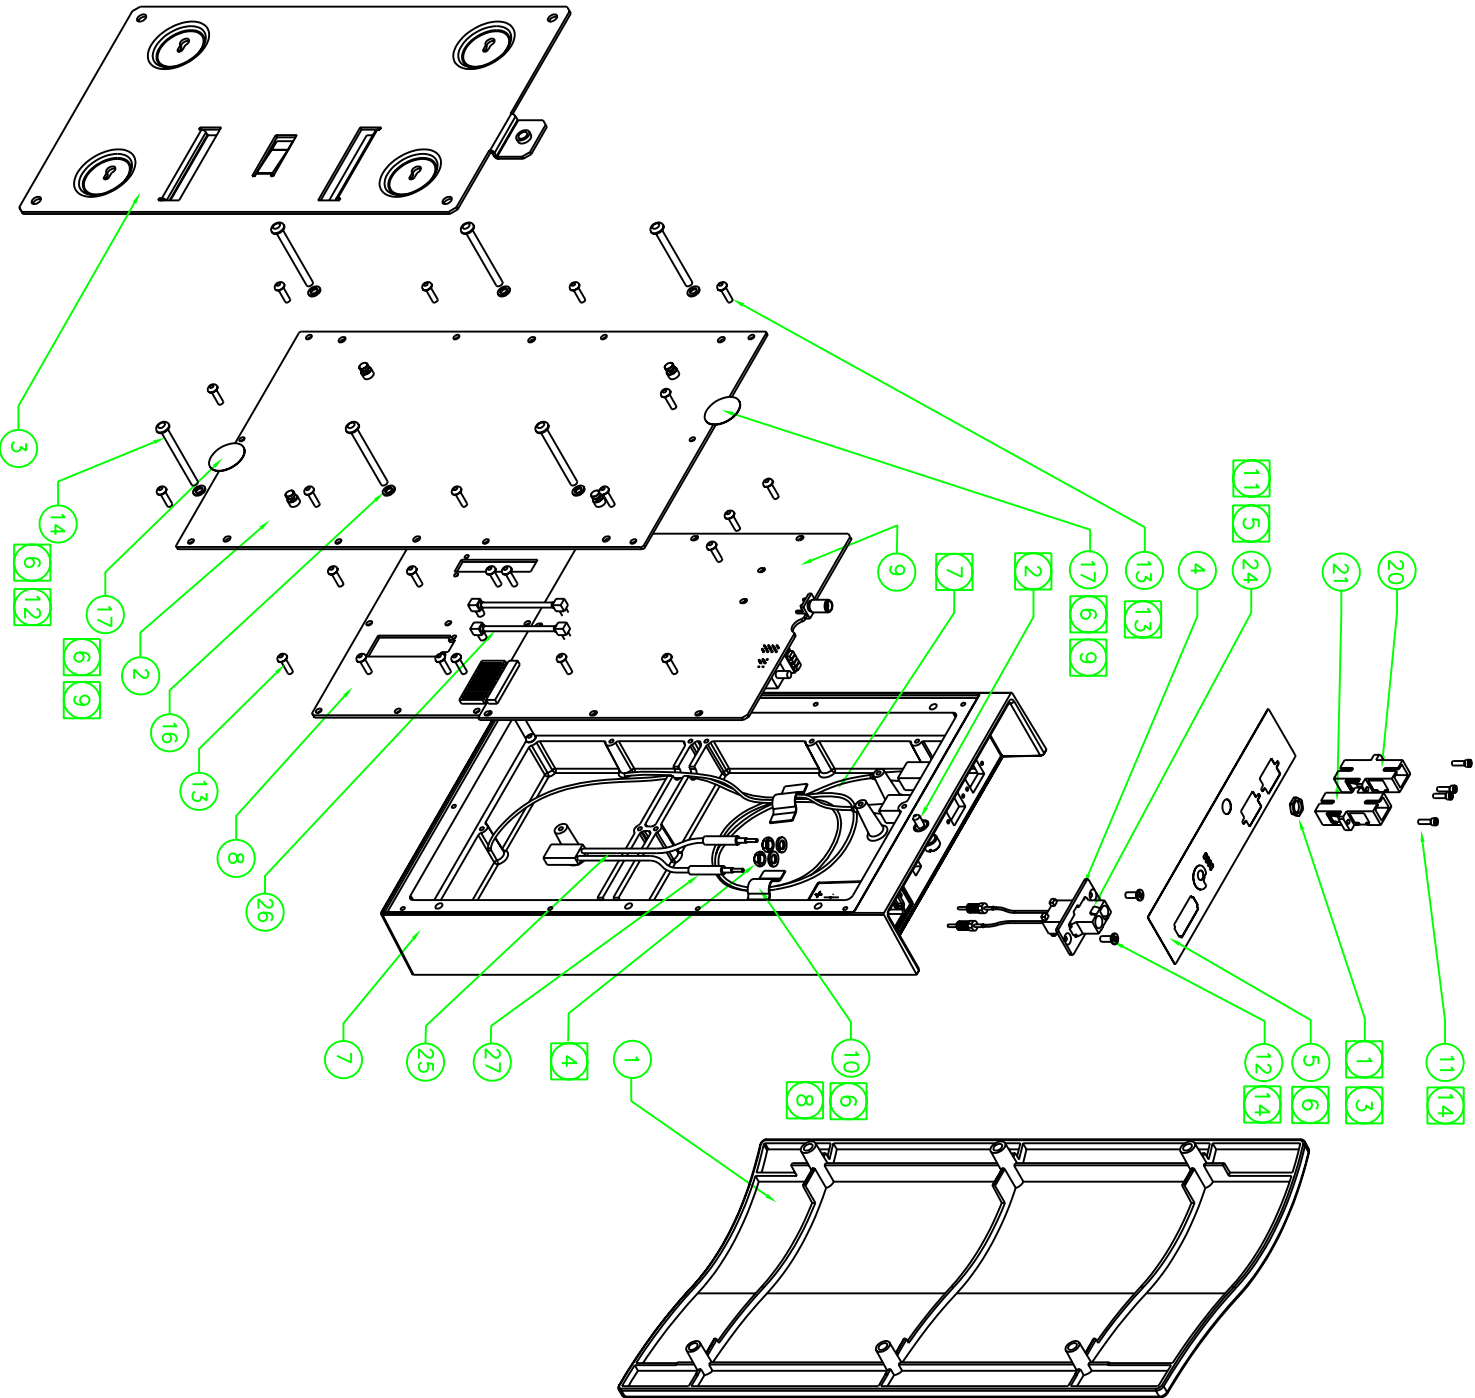

3RD ANGLE PROJECTION		SPECIFICATIONS: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.	
TORQUE SPECIFICATION: 0000067		TOLERANCES:	
MATERIAL: N/A		FINISH: N/A	
FINAL ASSEMBLY		APPLICATION	
NEXT ASSY		USED ON	
DO NOT SCALE DRAWING		ALL SURFACES: ✓ EXCEPT AS NOTED	
C. W. SMITH		DATE: 3/30/02	
CHECKED: C. W. SMITH		DATE: 3/30/02	
PROJECT: 850		DATE: 3/30/02	
PRODUCTION: 00		DATE: 3/30/02	
SIZE: D		SCALE: N/A	
ASSY DWG: REMOTE TRANSCIEVER 850 MHZ HP		DRAWING NUMBER: 010-10532-0003	
REV: A		SHEET: 1 OF 1	

PROPRIETARY INFORMATION

THE INFORMATION CONTAINED IN THE DRAWING IS THE SOLE PROPERTY OF REMEC. REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN PERMISSION OF REMEC IS PROHIBITED

300 S. HARBOR BLVD. SUITE 900, ANAHEIM, CALIFORNIA 92805

ASSY DWG: REMOTE TRANSCIEVER 850 MHZ HP

DRAWING NUMBER: 010-10532-0003

REV: A

SHEET: 1 OF 1