



Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5720		
	MHz		
Polarization:	Vertical		
Remark:			

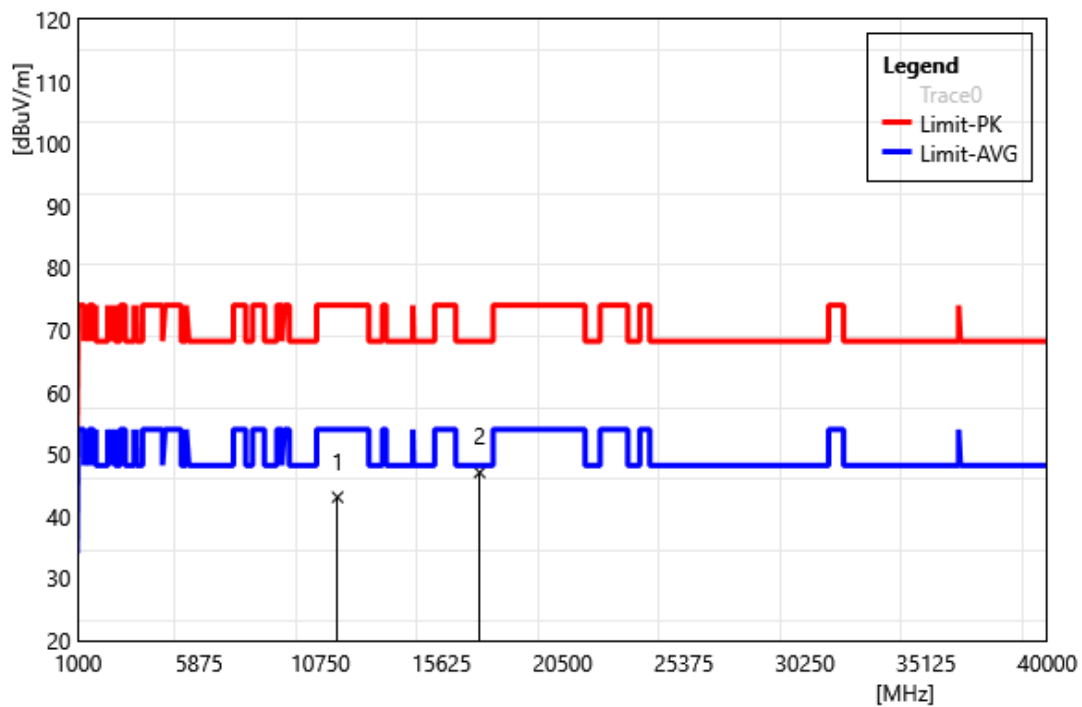


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11440.00	34.09	8.99	43.08	74.00	-30.92	PEAK
2	17160.00	39.14	7.91	47.05	68.20	-21.15	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5745		
	MHz		
Polarization:	Horizontal		
Remark:			

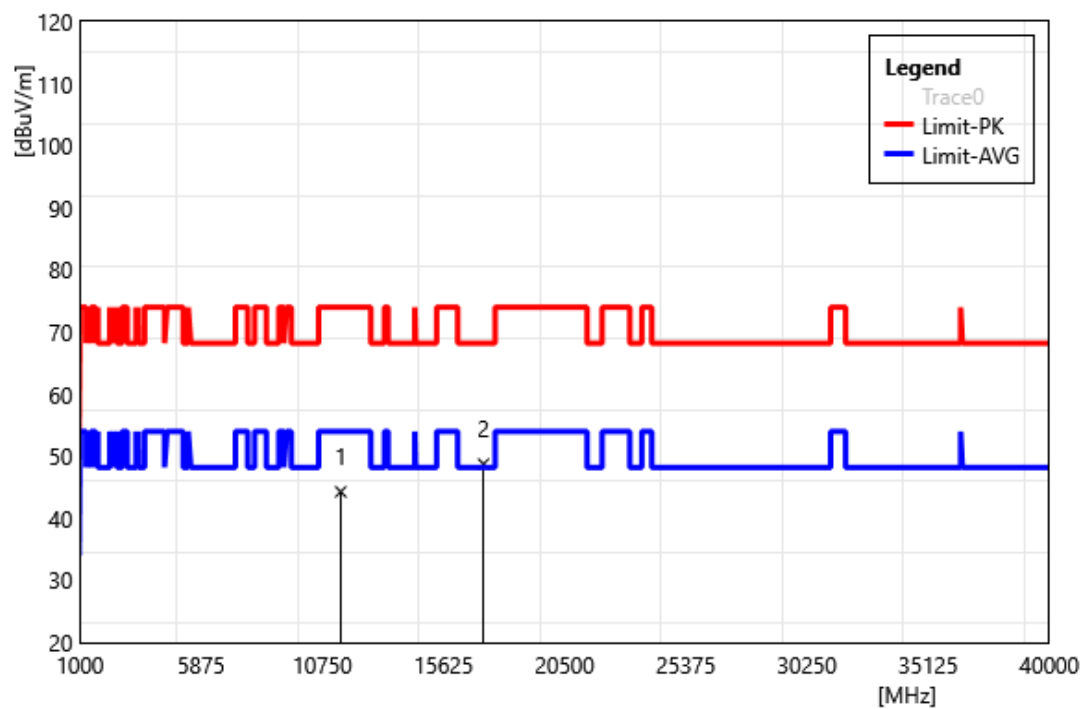


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11490.00	35.27	9.02	44.29	74.00	-29.71	PEAK
2	17235.00	40.80	7.95	48.75	68.20	-19.45	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5745		
	MHz		
Polarization:	Vertical		
Remark:			

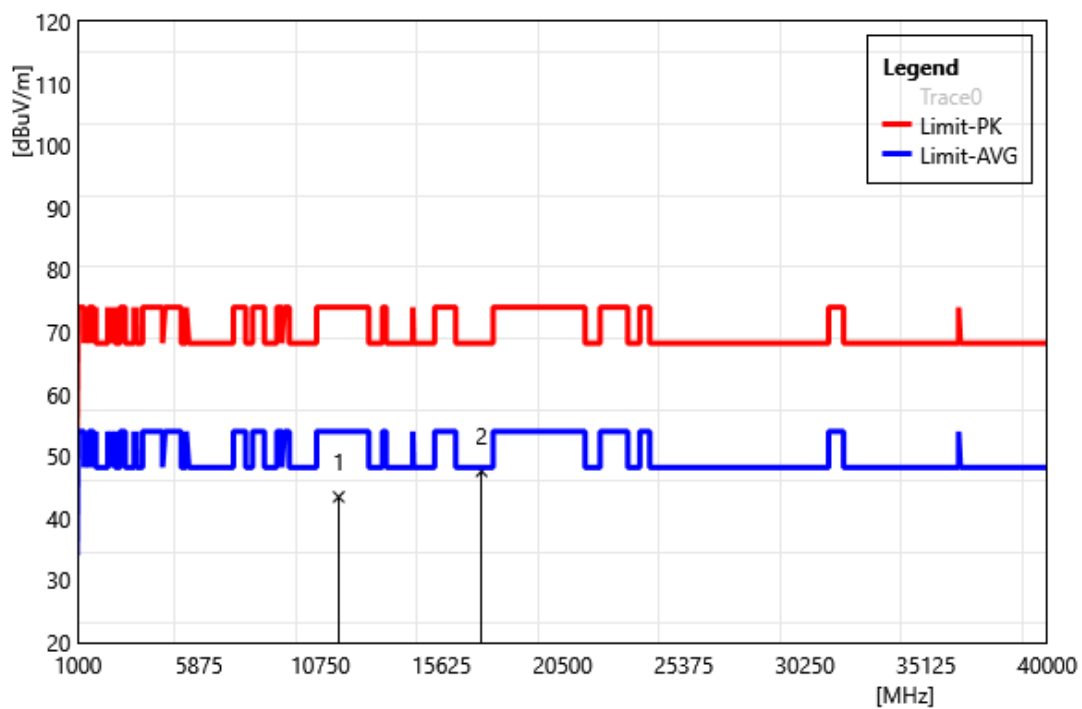


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11490.00	34.43	9.02	43.45	74.00	-30.55	PEAK
2	17235.00	39.63	7.95	47.58	68.20	-20.62	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5785		
	MHz		
Polarization:	Horizontal		
Remark:			

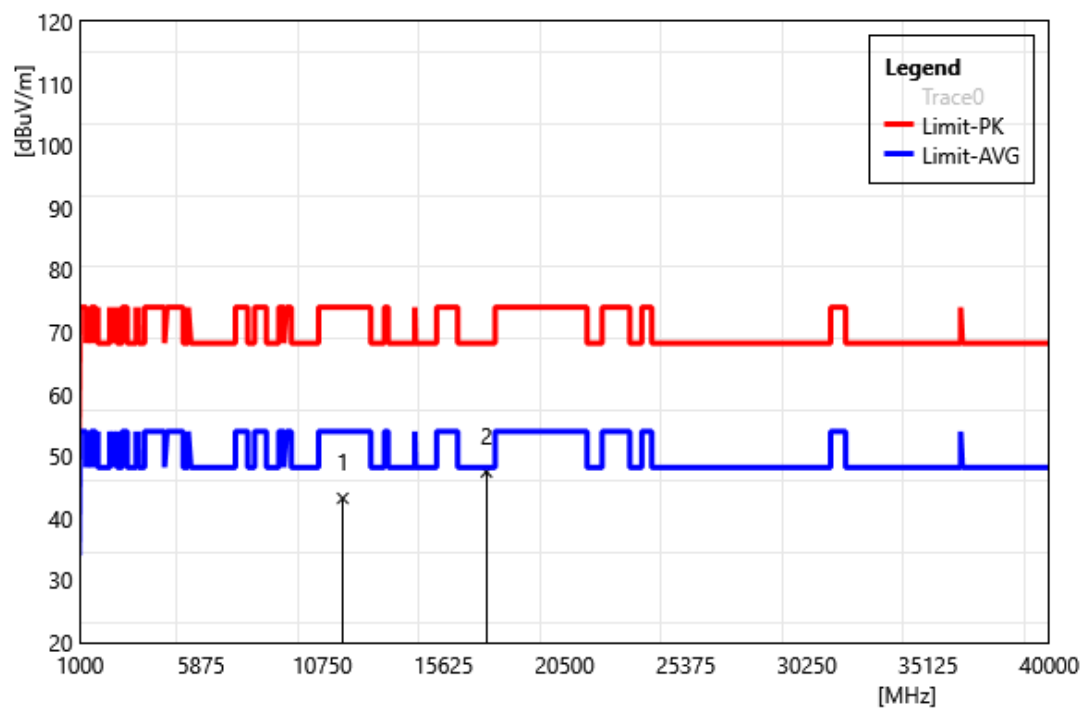


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11570.00	34.12	9.10	43.22	74.00	-30.78	PEAK
2	17355.00	39.50	7.99	47.49	68.20	-20.71	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5785		
	MHz		
Polarization:	Vertical		
Remark:			

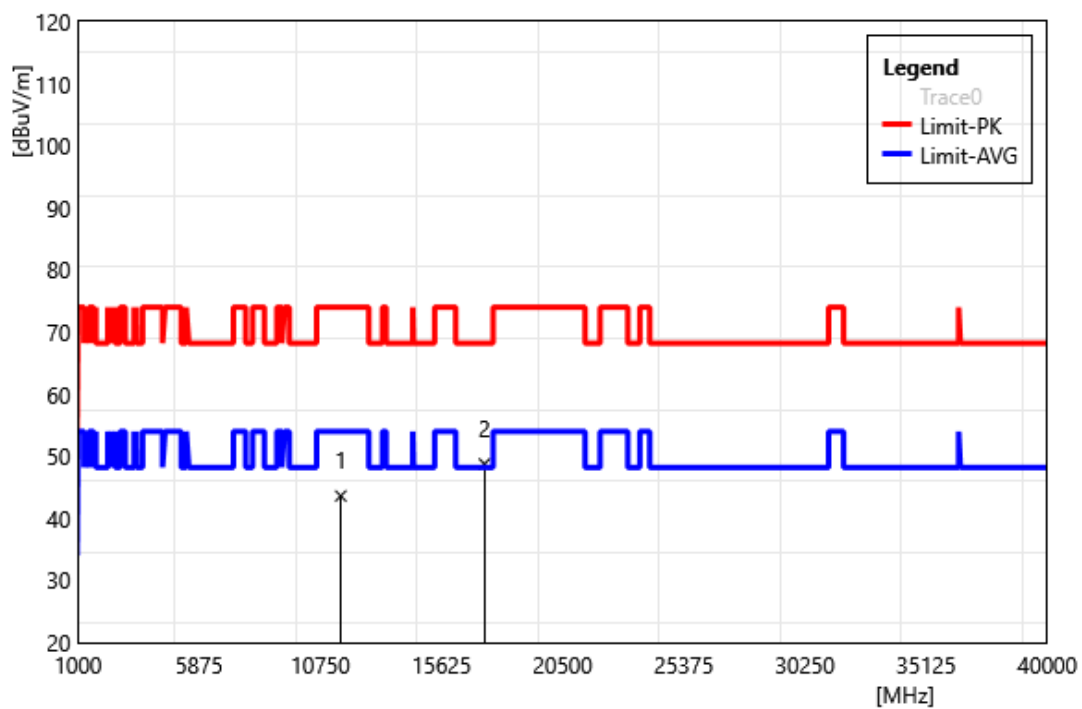


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11570.00	34.50	9.10	43.60	74.00	-30.40	PEAK
2	17355.00	40.76	7.99	48.75	68.20	-19.45	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5825		
	MHz		
Polarization:	Horizontal		
Remark:			

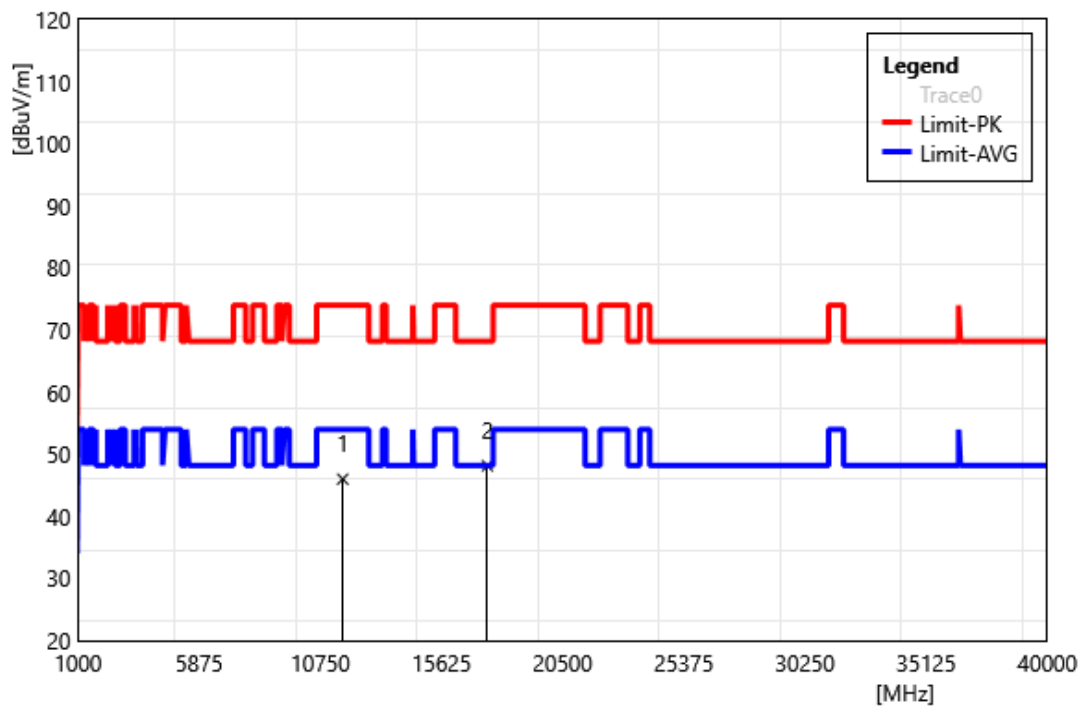


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11650.00	36.85	9.14	45.99	74.00	-28.01	PEAK
2	17475.00	39.86	8.29	48.15	68.20	-20.05	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5825		
	MHz		
Polarization:	Vertical		
Remark:			

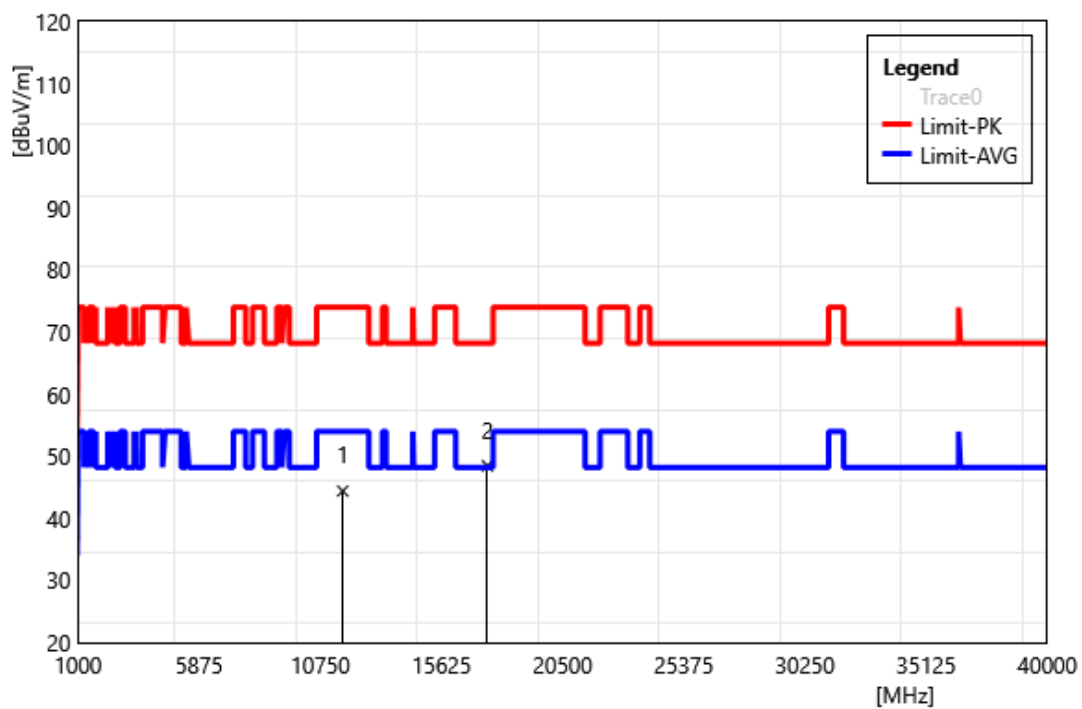


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11650.00	35.26	9.14	44.40	74.00	-29.60	PEAK
2	17475.00	40.17	8.29	48.46	68.20	-19.74	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

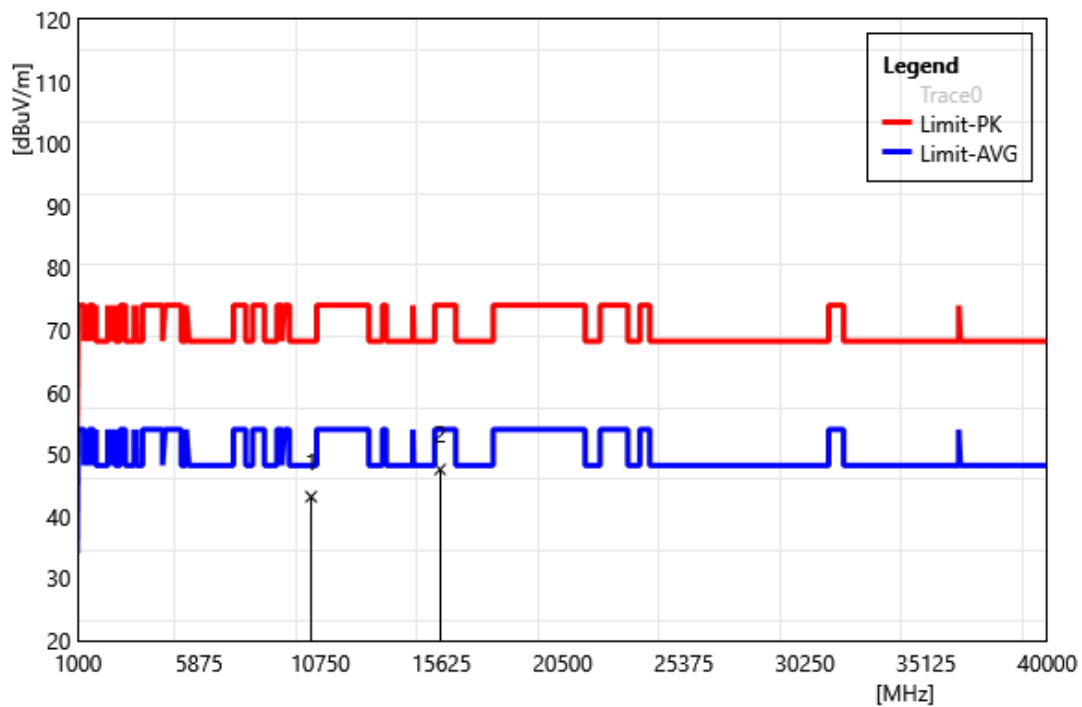


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10380.00	33.96	9.19	43.15	68.20	-25.05	PEAK
2	15570.00	37.09	10.46	47.55	74.00	-26.45	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

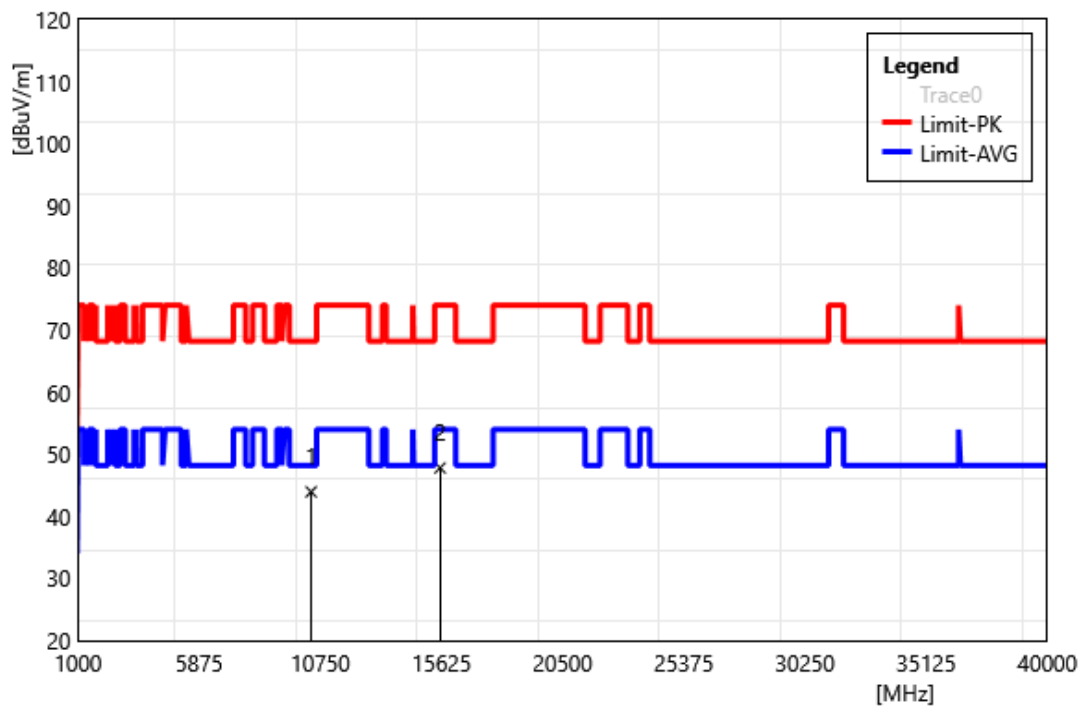


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10380.00	34.76	9.19	43.95	68.20	-24.25	PEAK
2	15570.00	37.33	10.46	47.79	74.00	-26.21	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

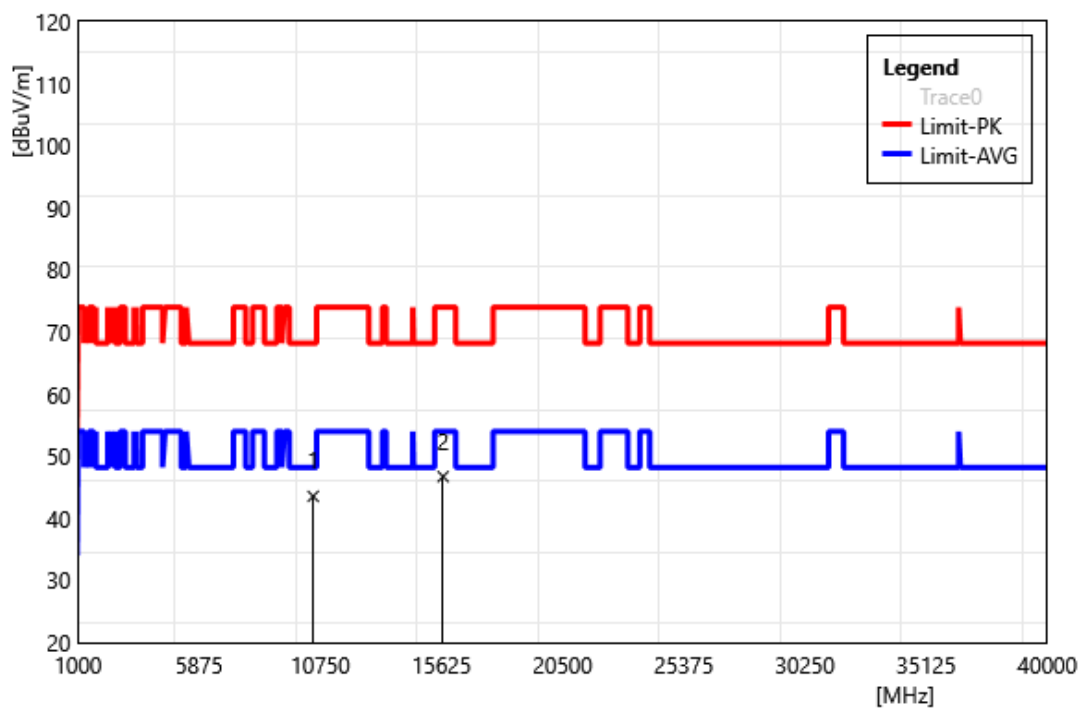


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10460.00	34.24	9.31	43.55	68.20	-24.65	PEAK
2	15690.00	36.27	10.44	46.71	74.00	-27.29	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

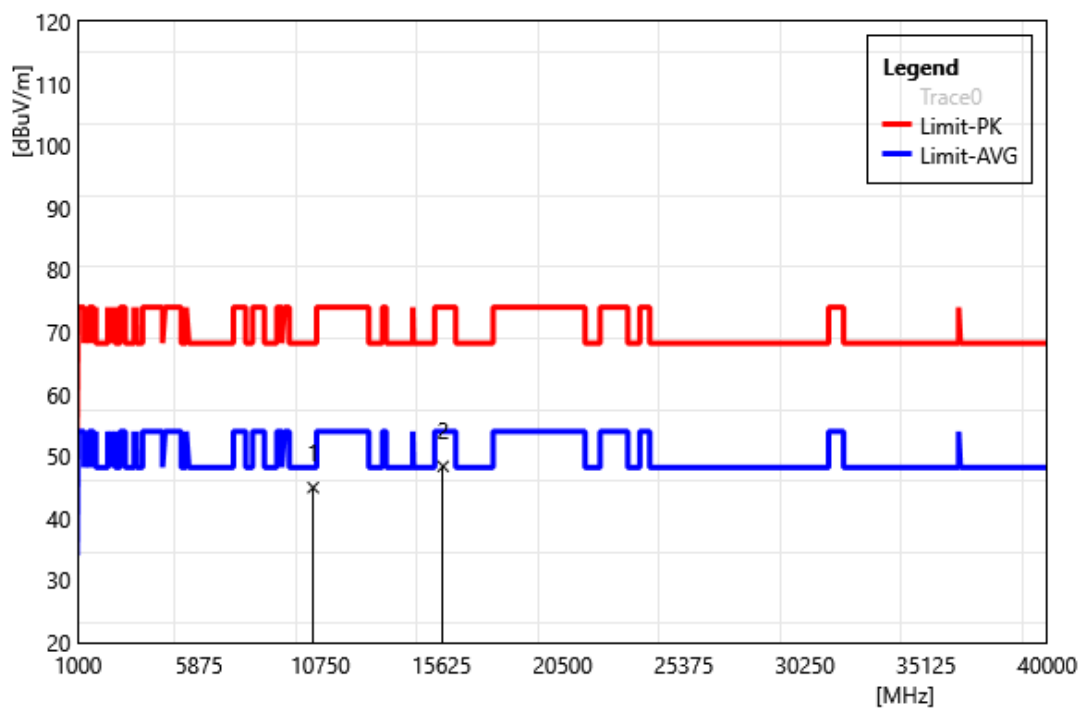


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10460.00	35.64	9.31	44.95	68.20	-23.25	PEAK
2	15690.00	37.93	10.44	48.37	74.00	-25.63	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5270		
	MHz		
Polarization:	Horizontal		
Remark:			

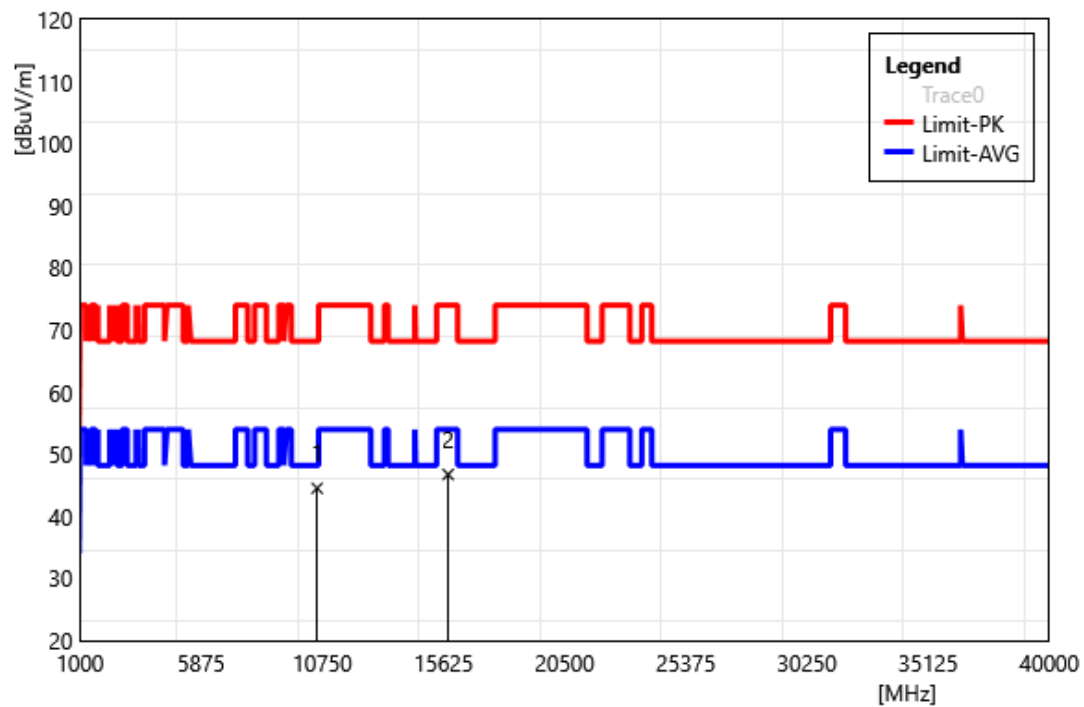


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10540.00	35.24	9.29	44.53	68.20	-23.67	PEAK
2	15810.00	36.12	10.63	46.75	74.00	-27.25	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5270		
	MHz		
Polarization:	Vertical		
Remark:			

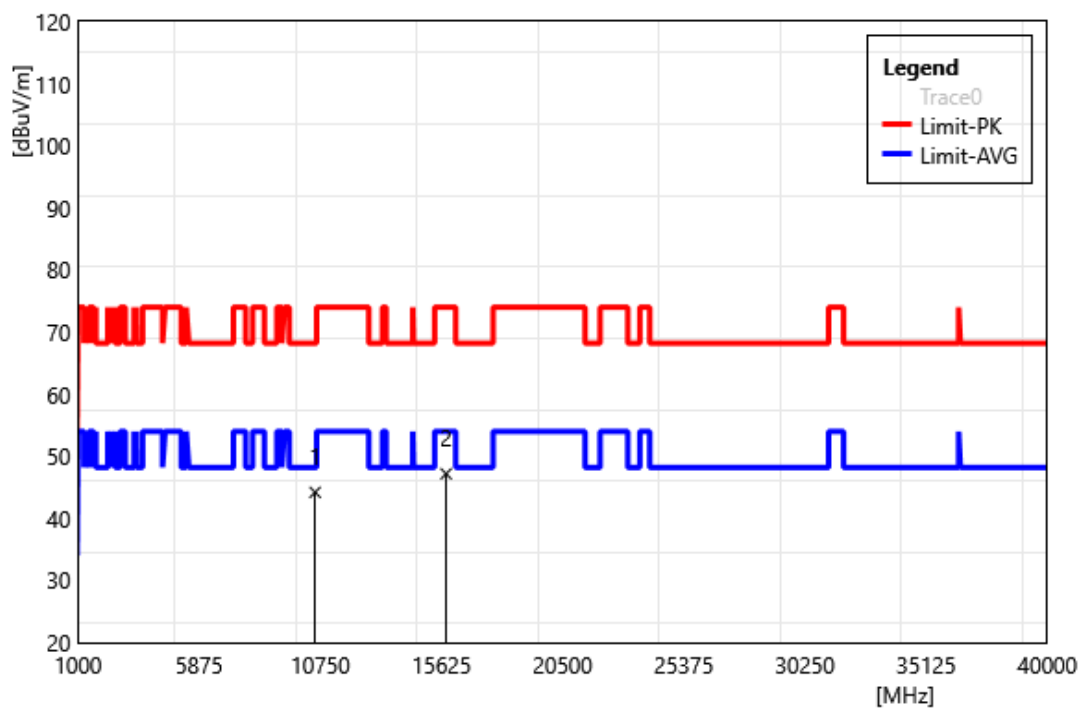


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10540.00	34.90	9.29	44.19	68.20	-24.01	PEAK
2	15810.00	36.56	10.63	47.19	74.00	-26.81	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

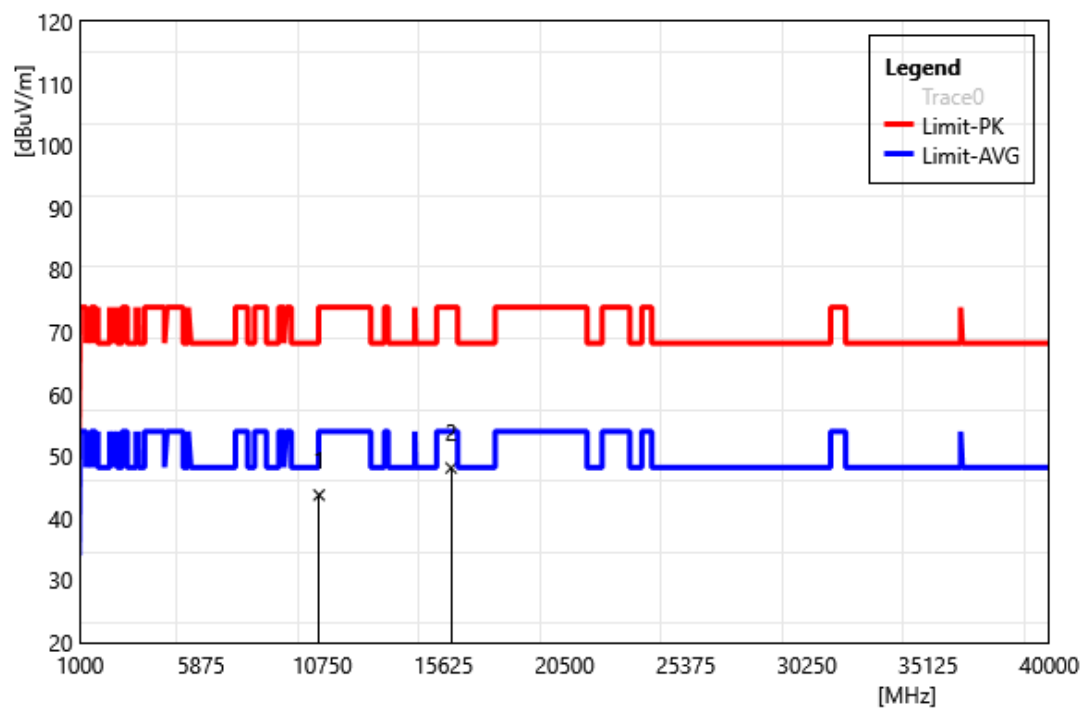


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10620.00	34.65	9.10	43.75	74.00	-30.25	PEAK
2	15930.00	37.95	10.16	48.11	74.00	-25.89	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

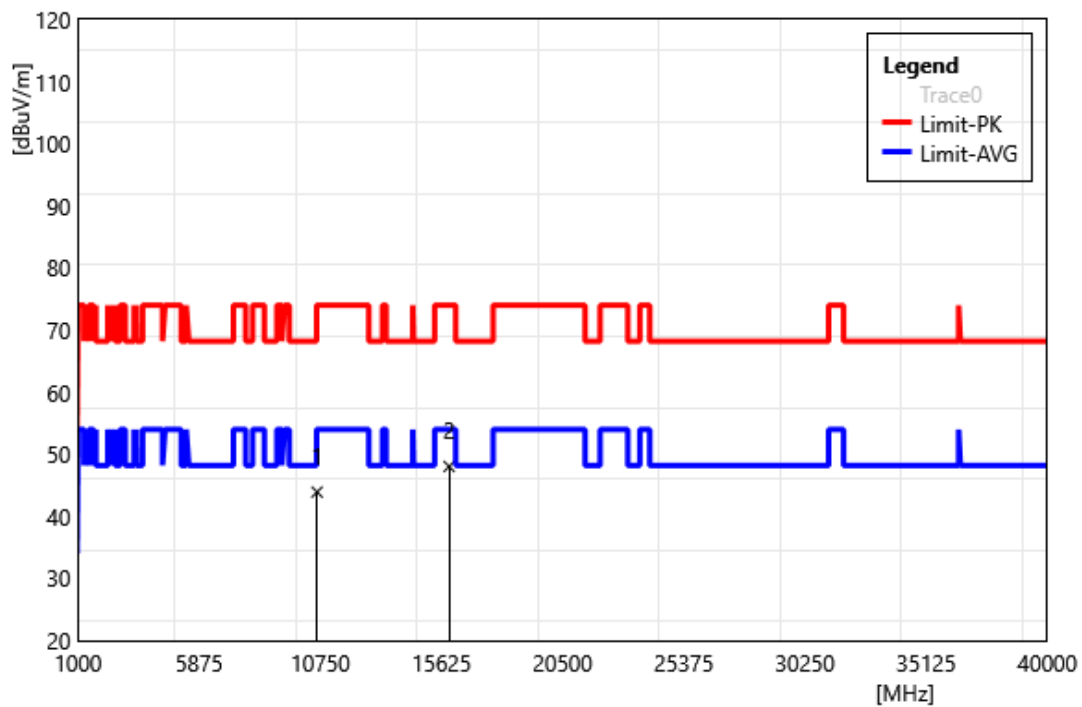


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10620.00	34.80	9.10	43.90	74.00	-30.10	PEAK
2	15930.00	37.87	10.16	48.03	74.00	-25.97	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

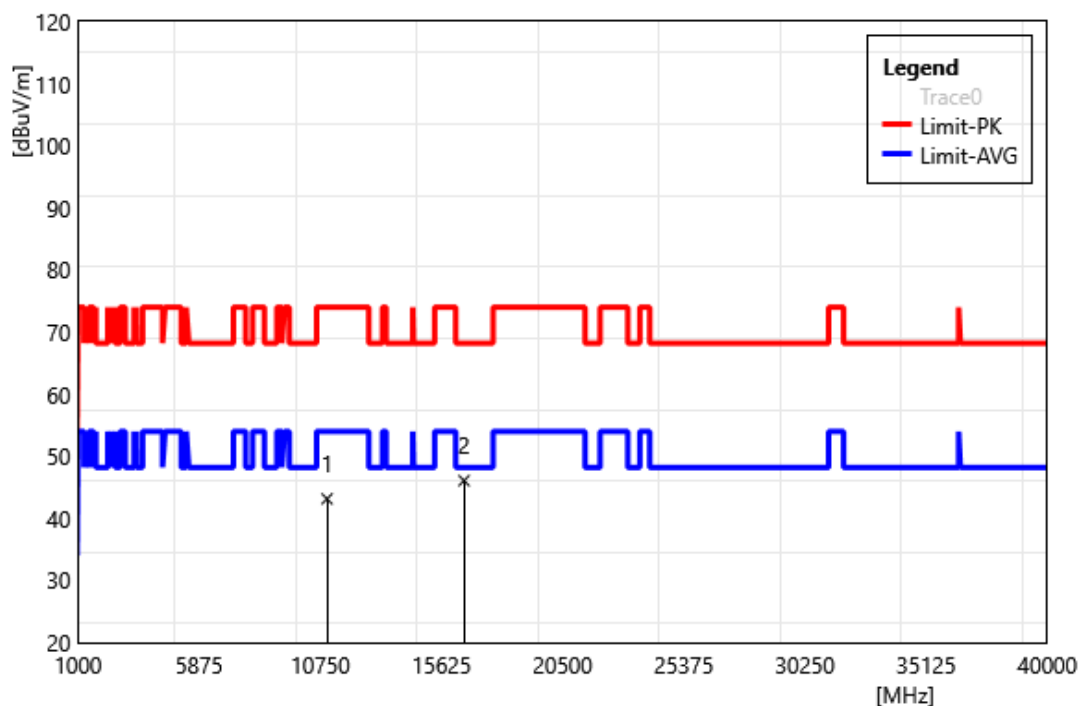


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11020.00	34.80	8.34	43.14	74.00	-30.86	PEAK
2	16530.00	36.08	10.00	46.08	68.20	-22.12	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

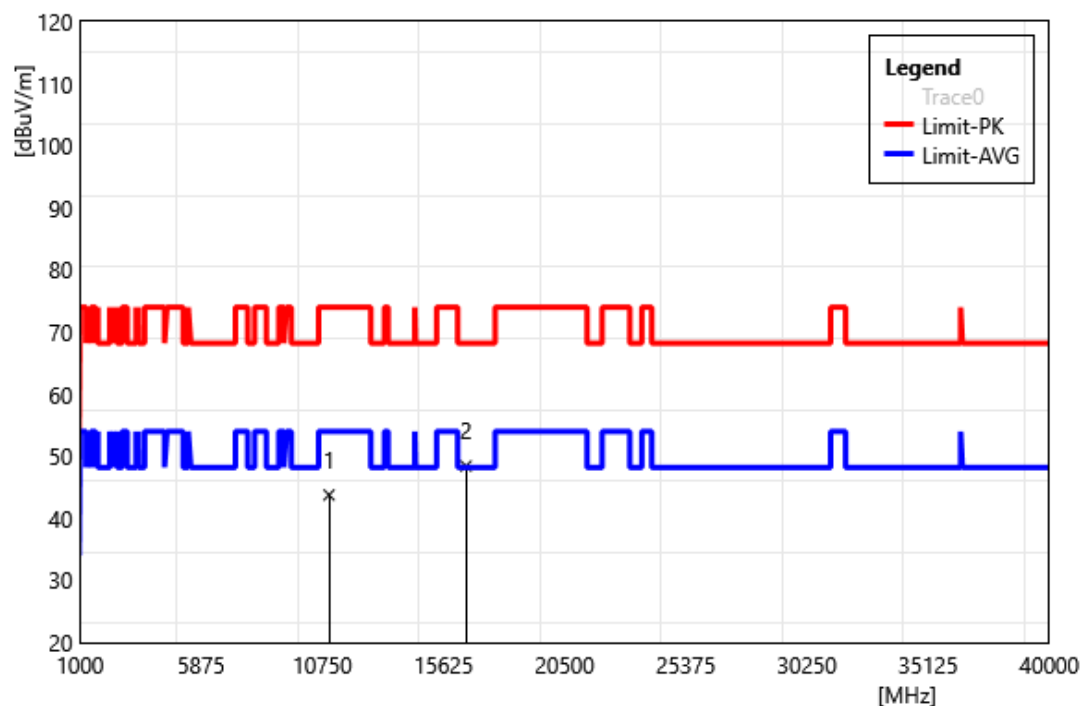


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11020.00	35.43	8.34	43.77	74.00	-30.23	PEAK
2	16530.00	38.43	10.00	48.43	68.20	-19.77	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5550		
	MHz		
Polarization:	Horizontal		
Remark:			

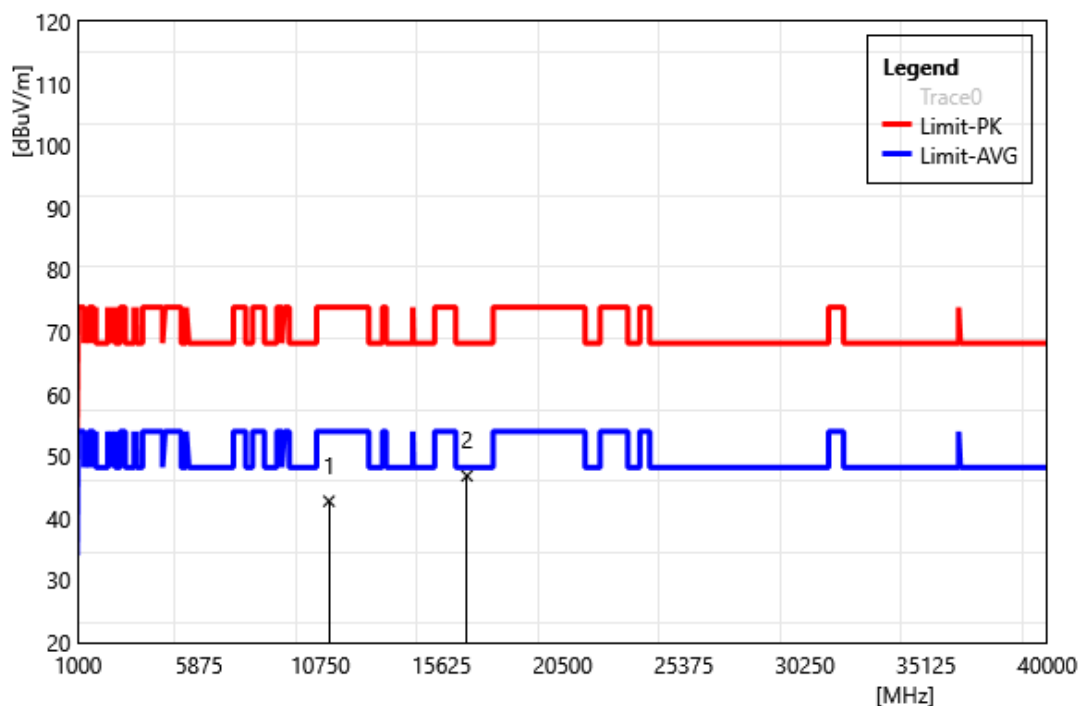


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11100.00	34.22	8.55	42.77	74.00	-31.23	PEAK
2	16650.00	37.31	9.53	46.84	68.20	-21.36	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5550		
	MHz		
Polarization:	Vertical		
Remark:			

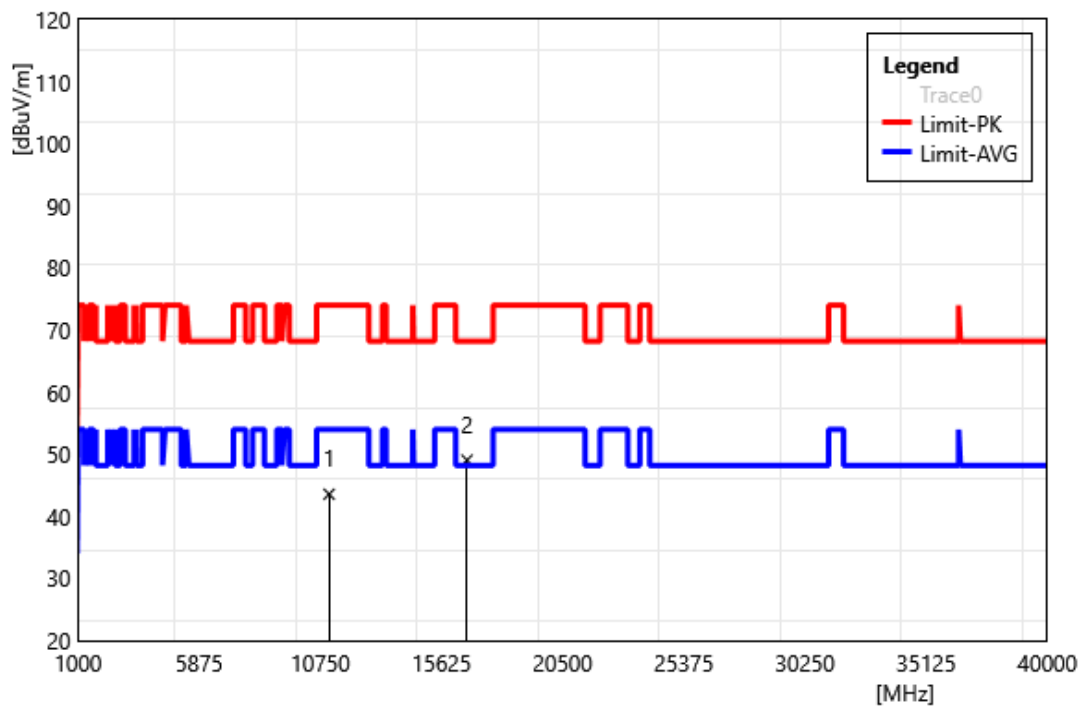


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11100.00	35.02	8.55	43.57	74.00	-30.43	PEAK
2	16650.00	39.53	9.53	49.06	68.20	-19.14	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5670		
	MHz		
Polarization:	Horizontal		
Remark:			

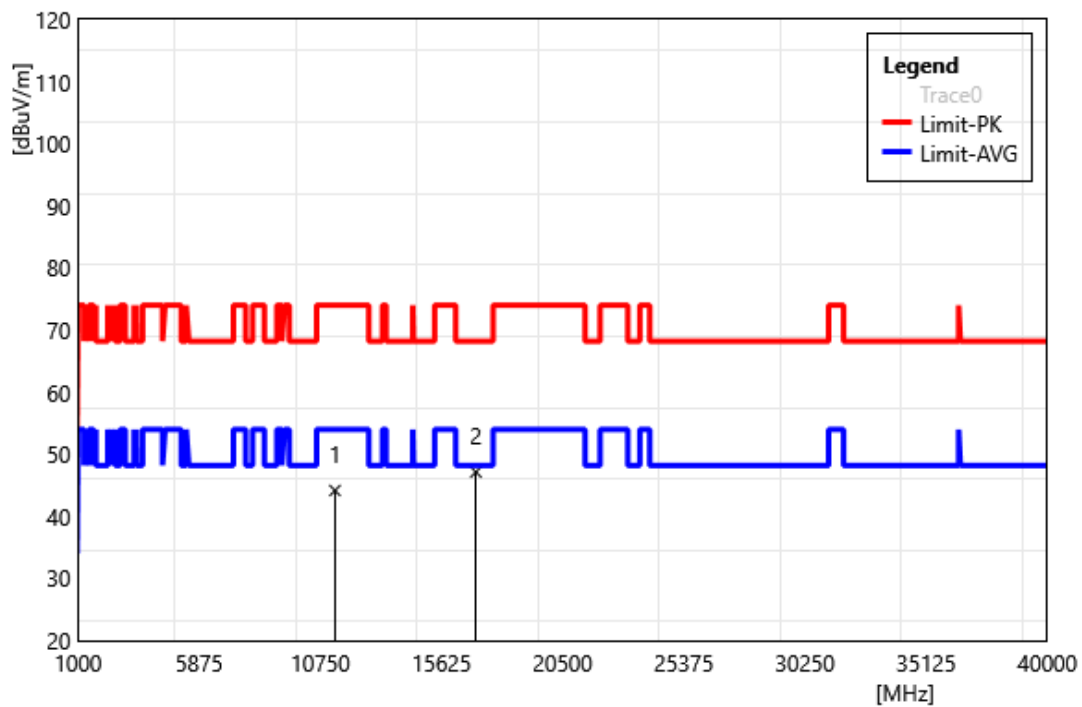


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11340.00	35.25	8.92	44.17	74.00	-29.83	PEAK
2	17010.00	39.16	7.96	47.12	68.20	-21.08	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5670		
	MHz		
Polarization:	Vertical		
Remark:			

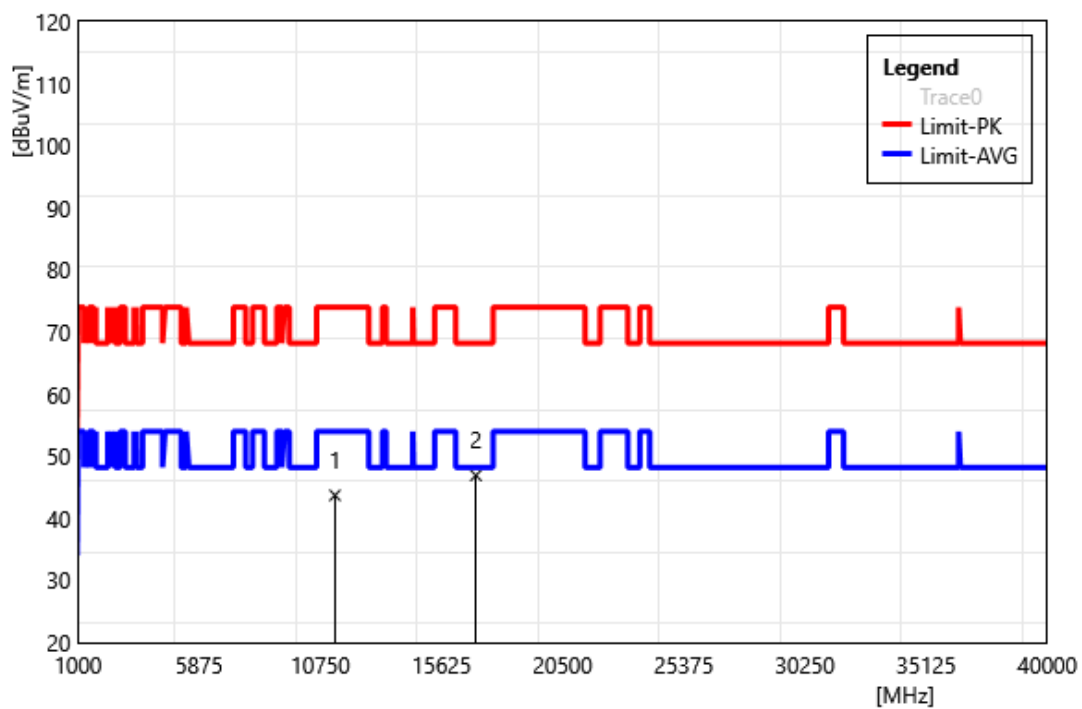


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11340.00	34.78	8.92	43.70	74.00	-30.30	PEAK
2	17010.00	38.94	7.96	46.90	68.20	-21.30	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

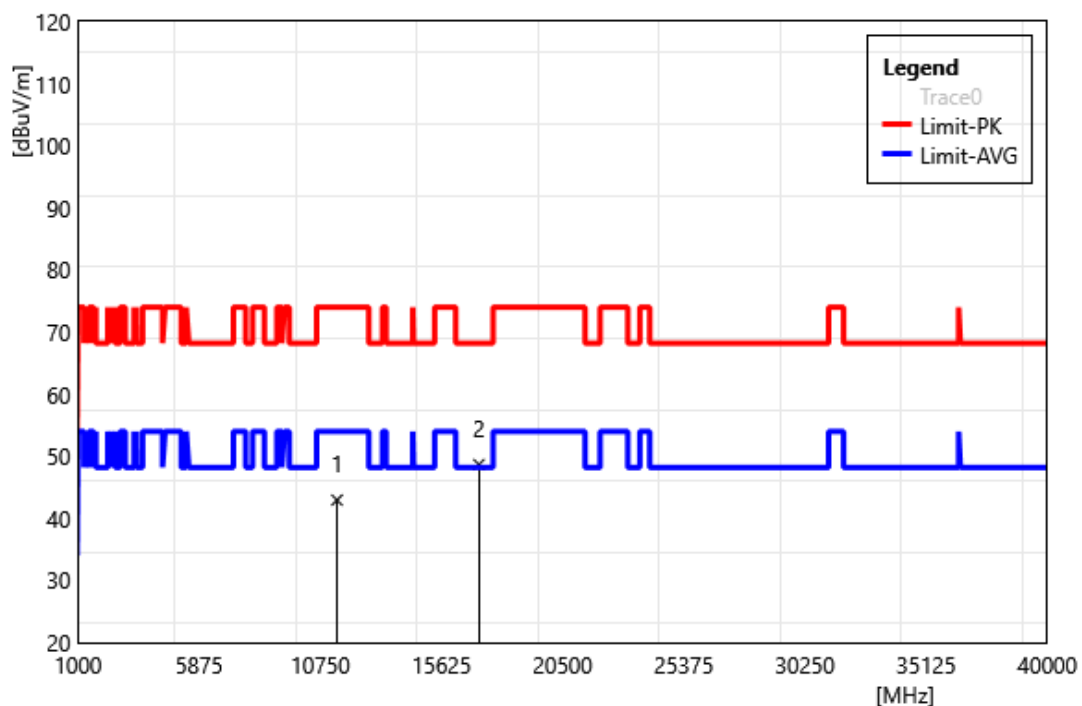


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11420.00	33.97	8.97	42.94	74.00	-31.06	PEAK
2	17130.00	40.72	7.94	48.66	68.20	-19.54	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

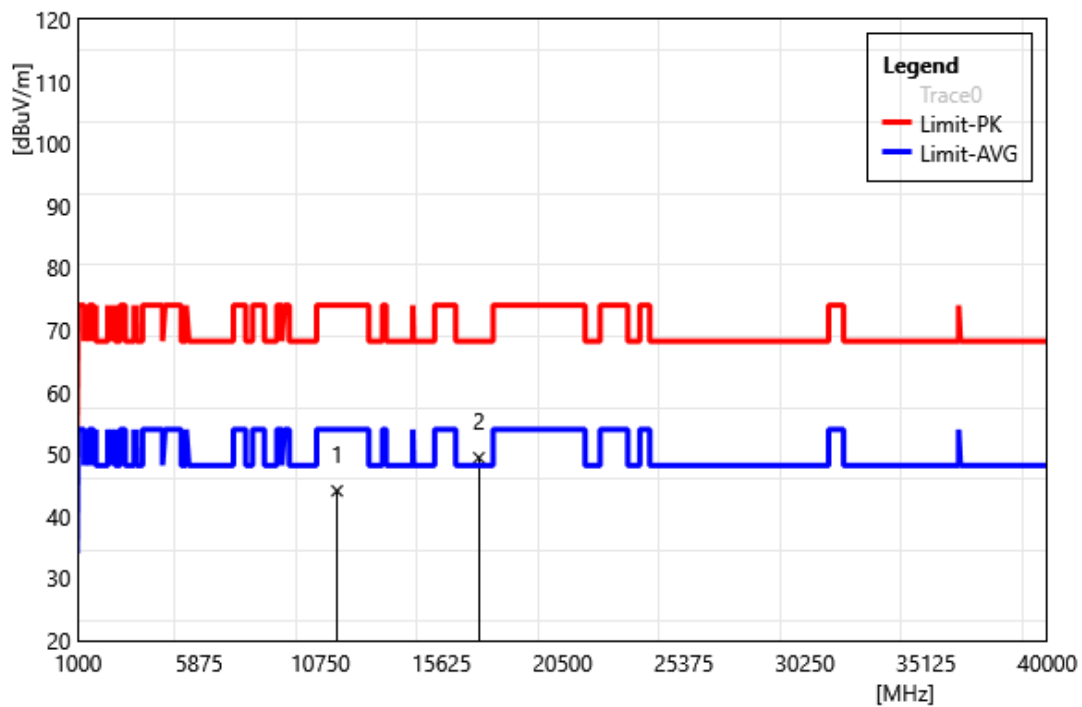


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11420.00	35.14	8.97	44.11	74.00	-29.89	PEAK
2	17130.00	41.50	7.94	49.44	68.20	-18.76	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5755		
	MHz		
Polarization:	Horizontal		
Remark:			

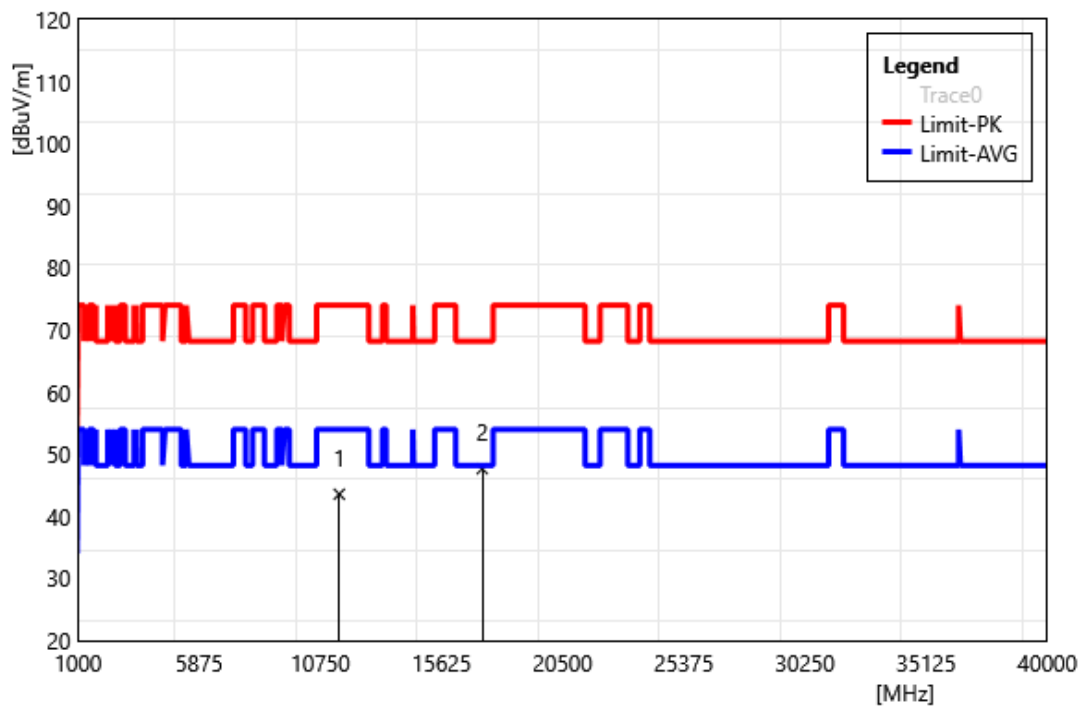


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	34.52	9.04	43.56	74.00	-30.44	PEAK
2	17265.00	39.65	8.02	47.67	68.20	-20.53	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5755		
	MHz		
Polarization:	Vertical		
Remark:			

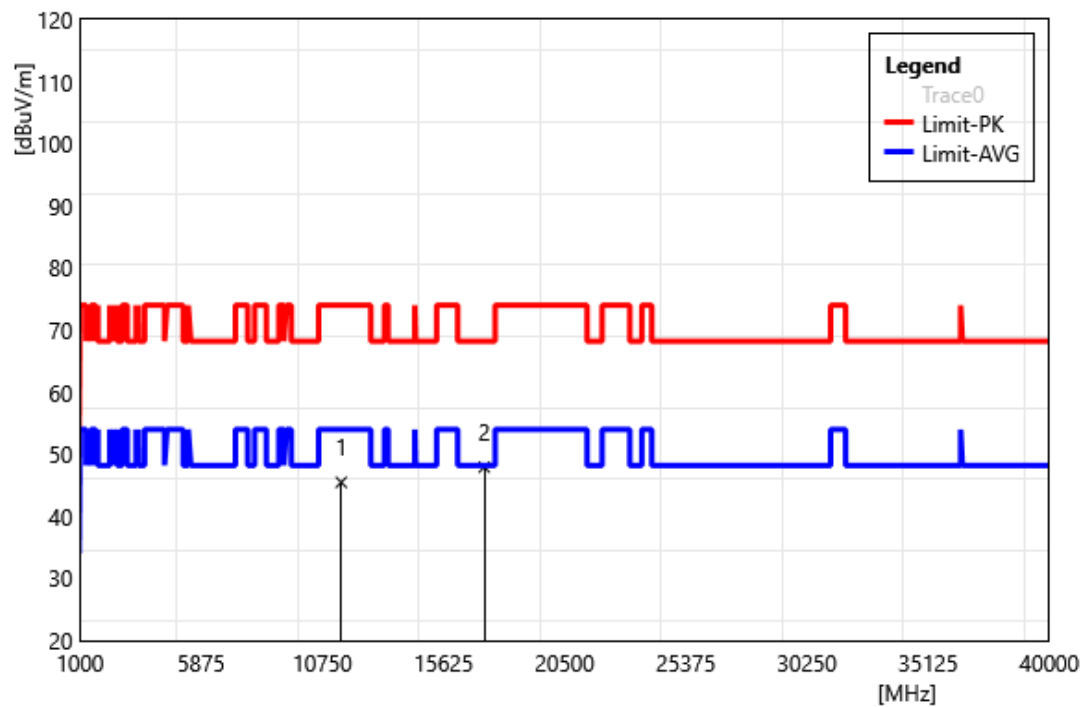


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	36.43	9.04	45.47	74.00	-28.53	PEAK
2	17265.00	39.90	8.02	47.92	68.20	-20.28	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5795		
	MHz		
Polarization:	Horizontal		
Remark:			

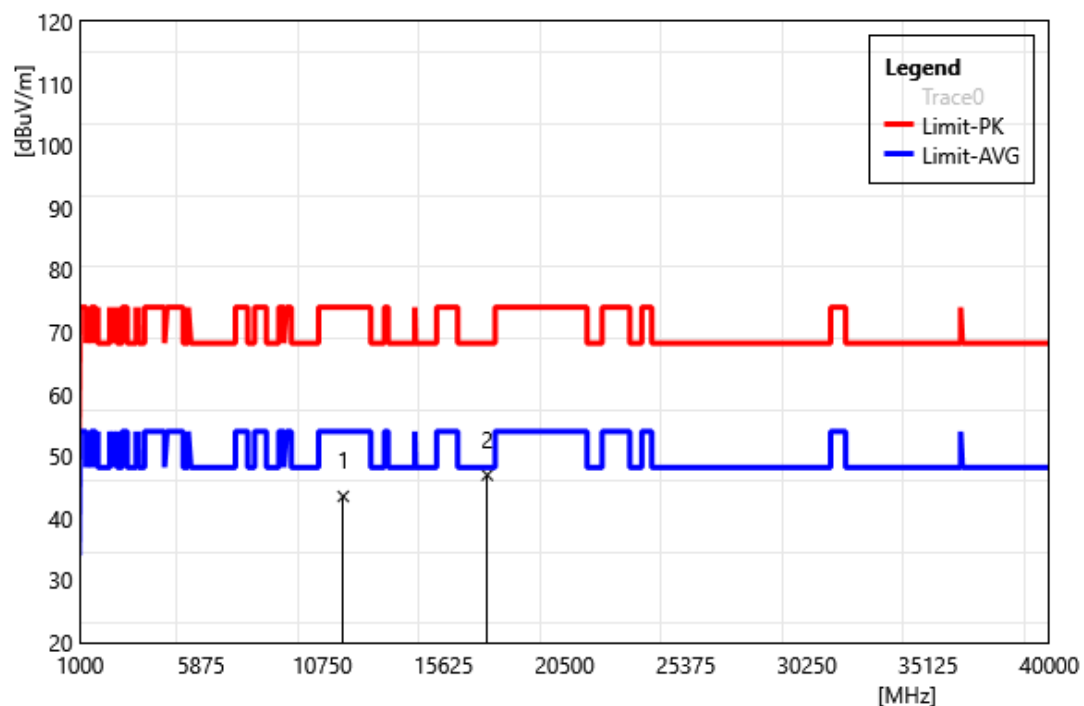


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	34.41	9.12	43.53	74.00	-30.47	PEAK
2	17385.00	39.03	7.93	46.96	68.20	-21.24	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5795		
	MHz		
Polarization:	Vertical		
Remark:			

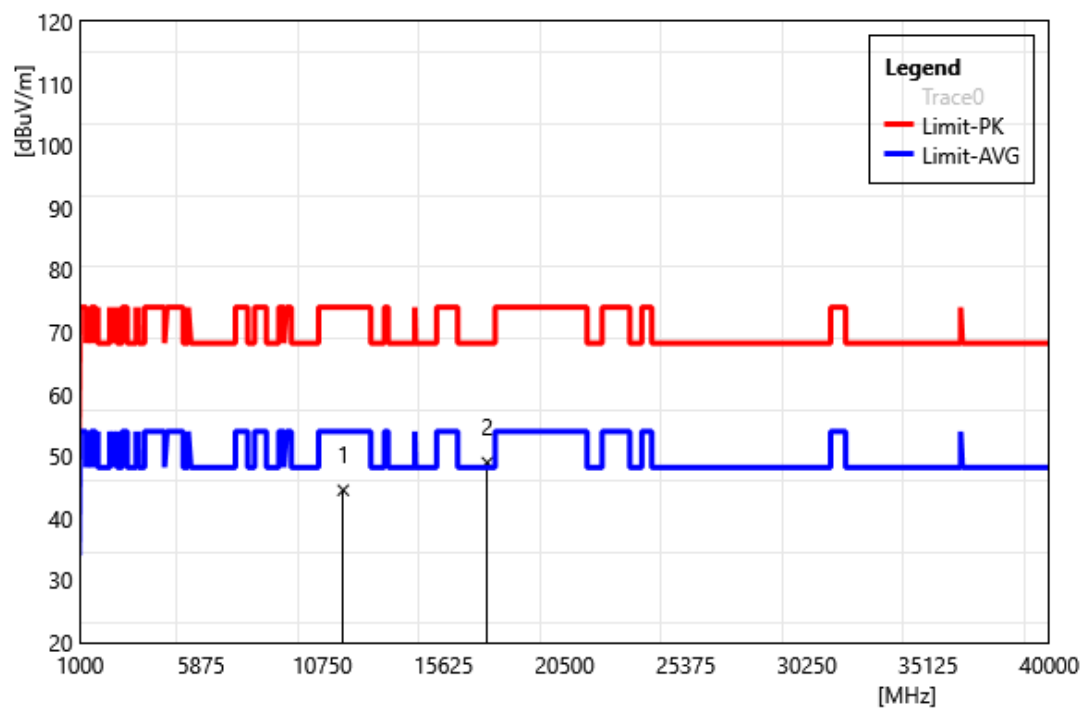


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	35.41	9.12	44.53	74.00	-29.47	PEAK
2	17385.00	41.04	7.93	48.97	68.20	-19.23	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

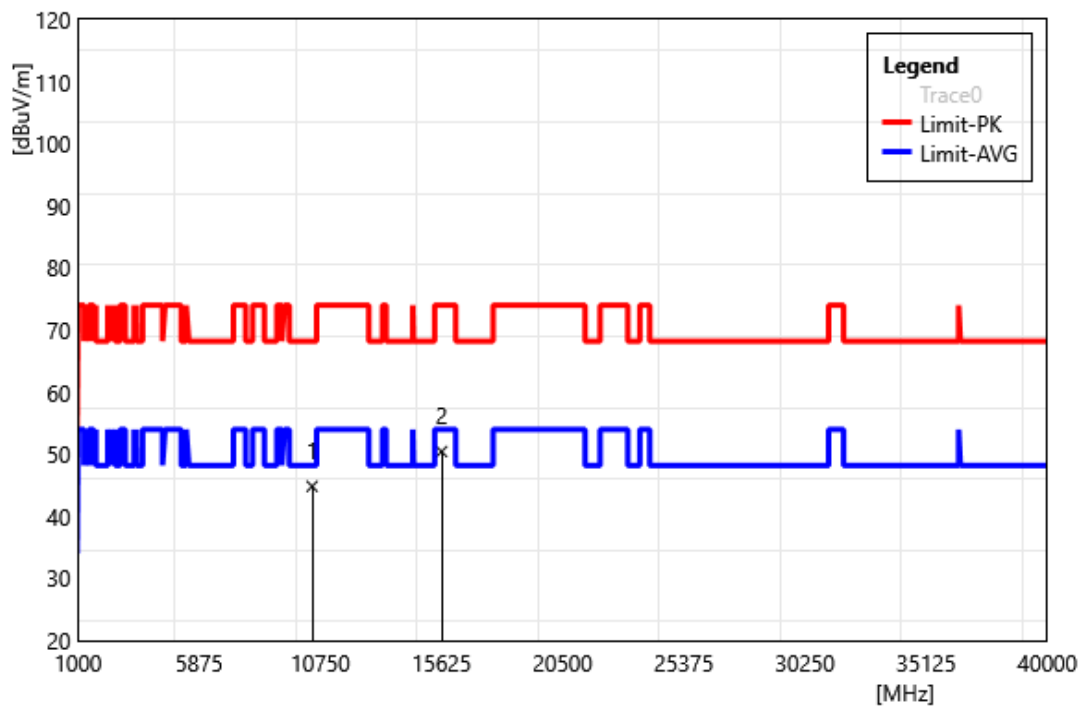


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10420.00	35.61	9.23	44.84	68.20	-23.36	PEAK
2	15630.00	40.03	10.40	50.43	74.00	-23.57	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

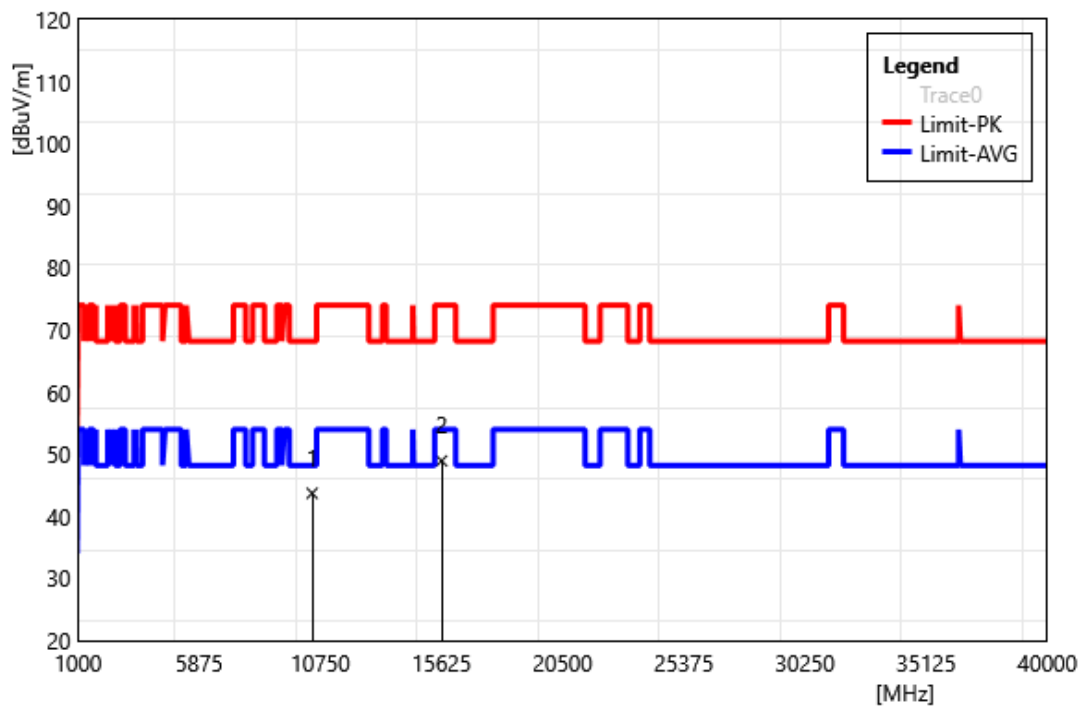


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10420.00	34.49	9.23	43.72	68.20	-24.48	PEAK
2	15630.00	38.53	10.40	48.93	74.00	-25.07	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

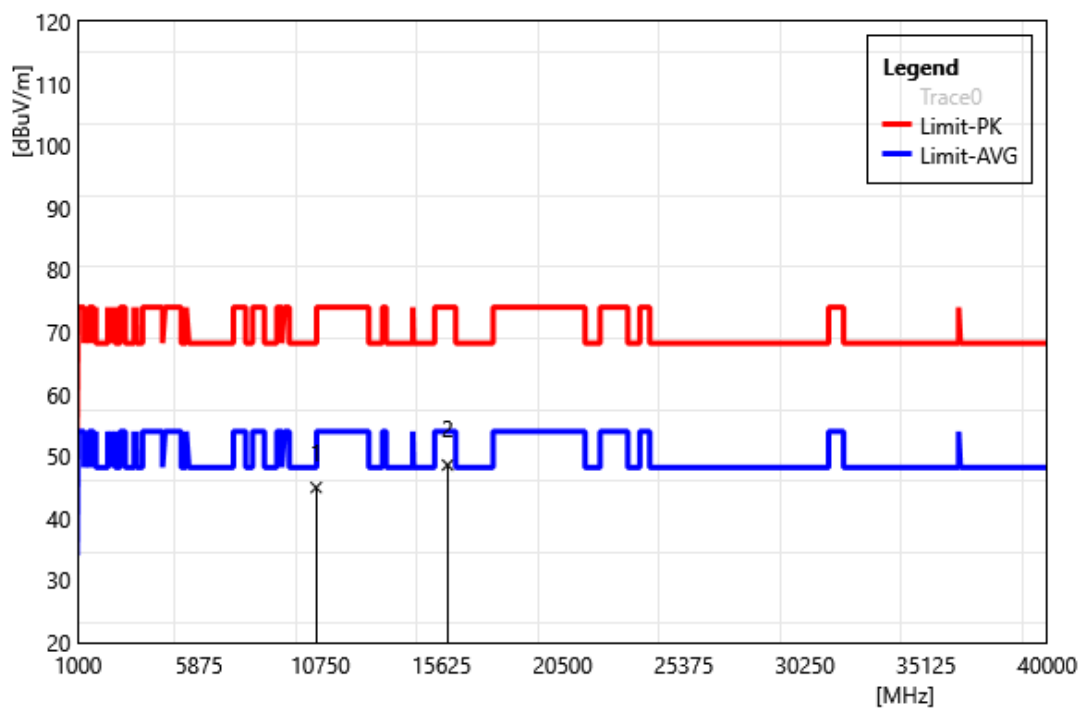


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10580.00	35.78	9.19	44.97	68.20	-23.23	PEAK
2	15870.00	38.28	10.30	48.58	74.00	-25.42	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

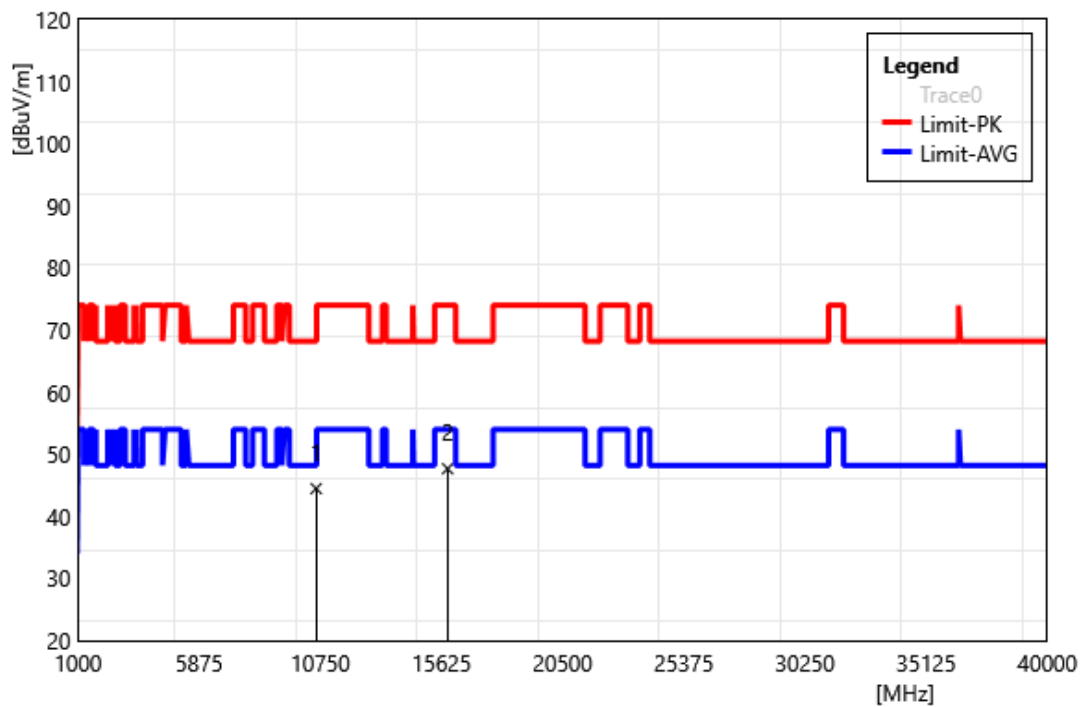


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10580.00	35.27	9.19	44.46	68.20	-23.74	PEAK
2	15870.00	37.37	10.30	47.67	74.00	-26.33	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

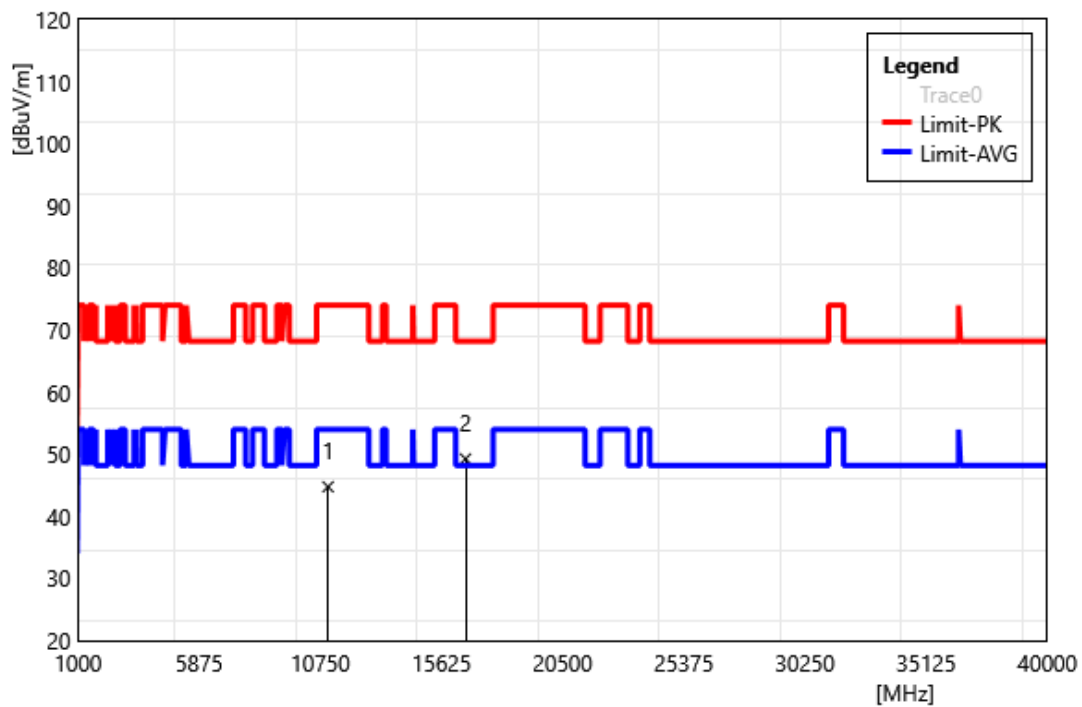


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11060.00	36.33	8.44	44.77	74.00	-29.23	PEAK
2	16590.00	39.49	9.76	49.25	68.20	-18.95	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

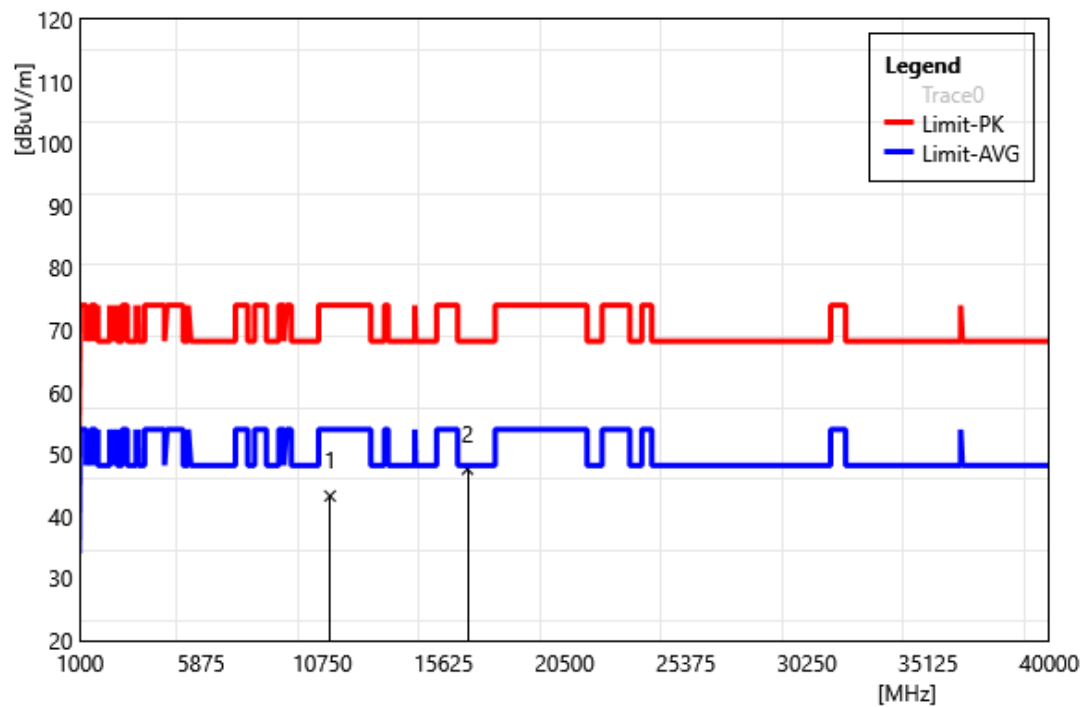


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11060.00	34.83	8.44	43.27	74.00	-30.73	PEAK
2	16590.00	37.84	9.76	47.60	68.20	-20.60	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

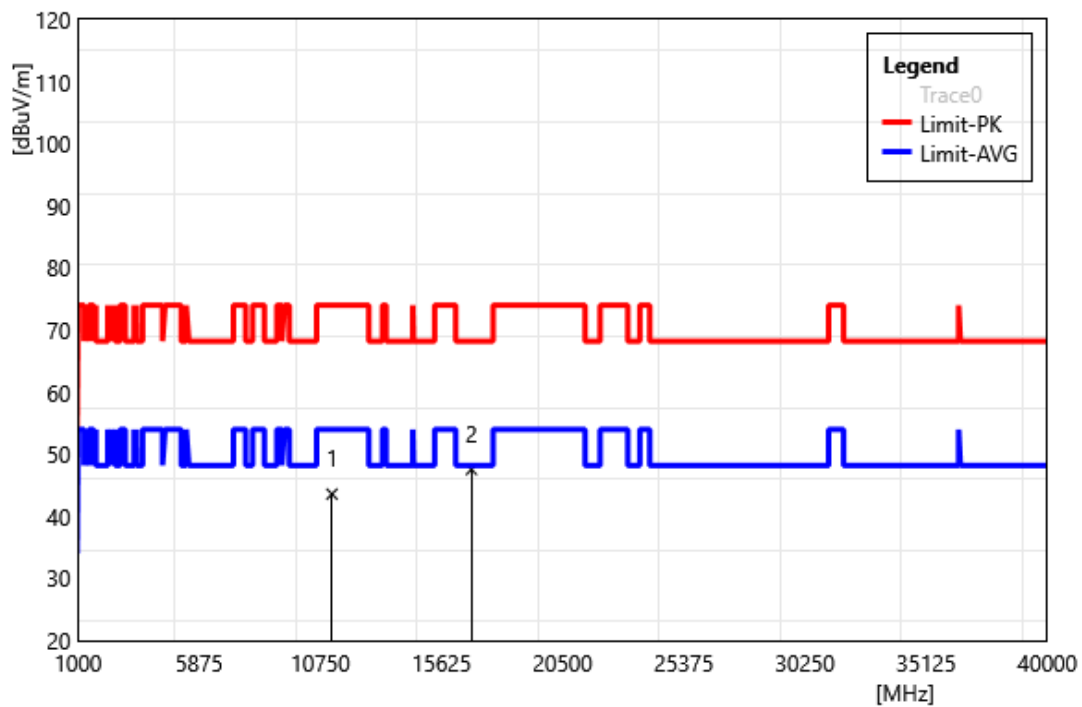


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11220.00	34.75	8.83	43.58	74.00	-30.42	PEAK
2	16830.00	38.73	8.82	47.55	68.20	-20.65	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

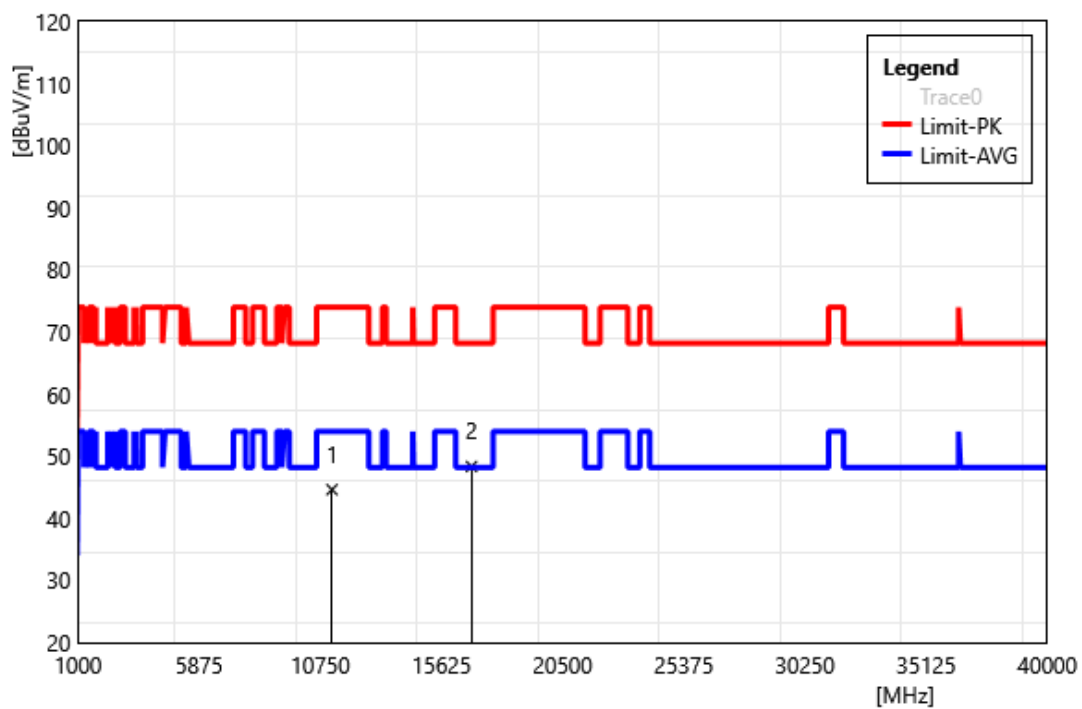


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11220.00	35.80	8.83	44.63	74.00	-29.37	PEAK
2	16830.00	39.52	8.82	48.34	68.20	-19.86	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5690		
	MHz		
Polarization:	Horizontal		
Remark:			

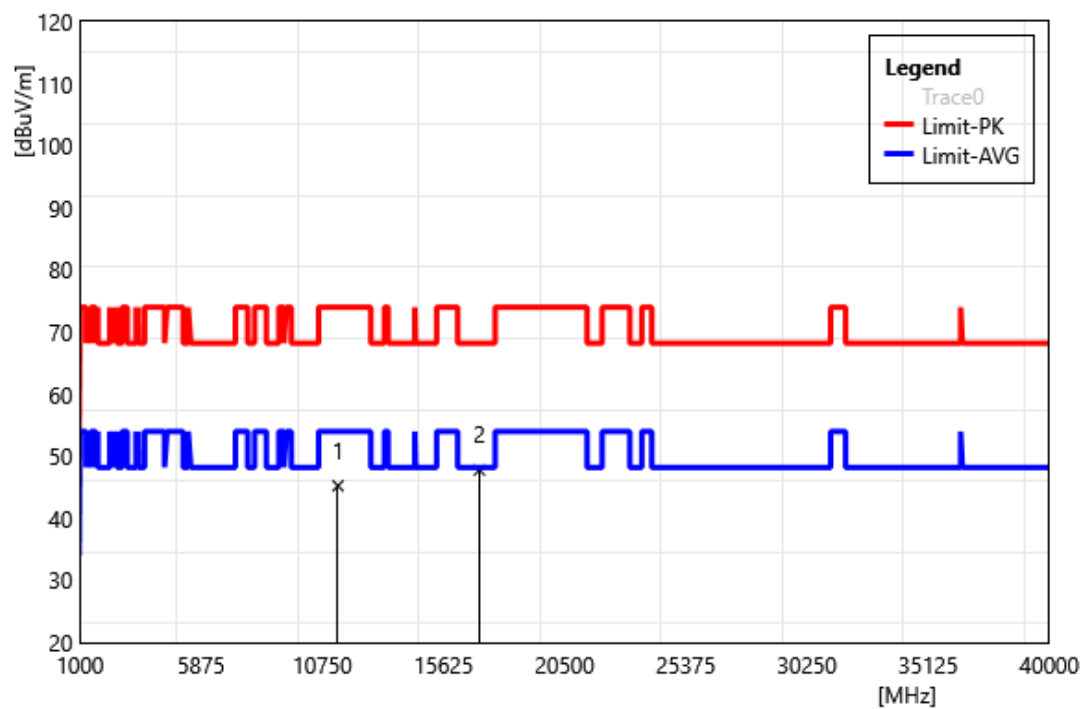


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11380.00	36.30	8.94	45.24	74.00	-28.76	PEAK
2	17070.00	39.81	7.97	47.78	68.20	-20.42	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

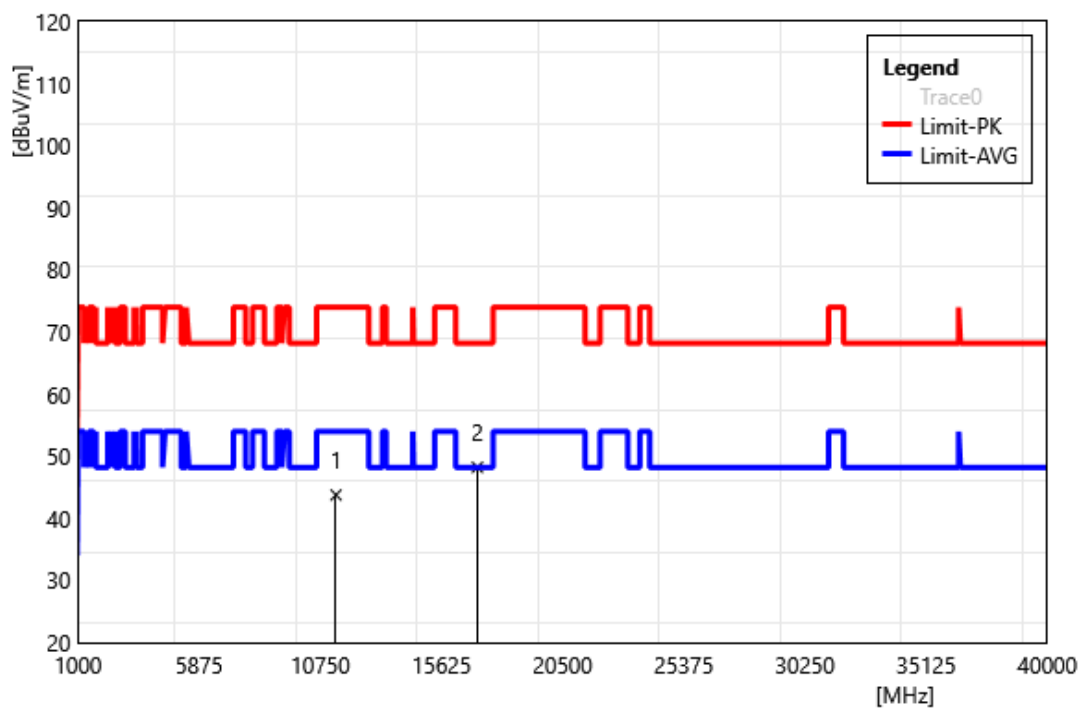


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11380.00	34.82	8.94	43.76	74.00	-30.24	PEAK
2	17070.00	40.24	7.97	48.21	68.20	-19.99	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5775		
	MHz		
Polarization:	Horizontal		
Remark:			

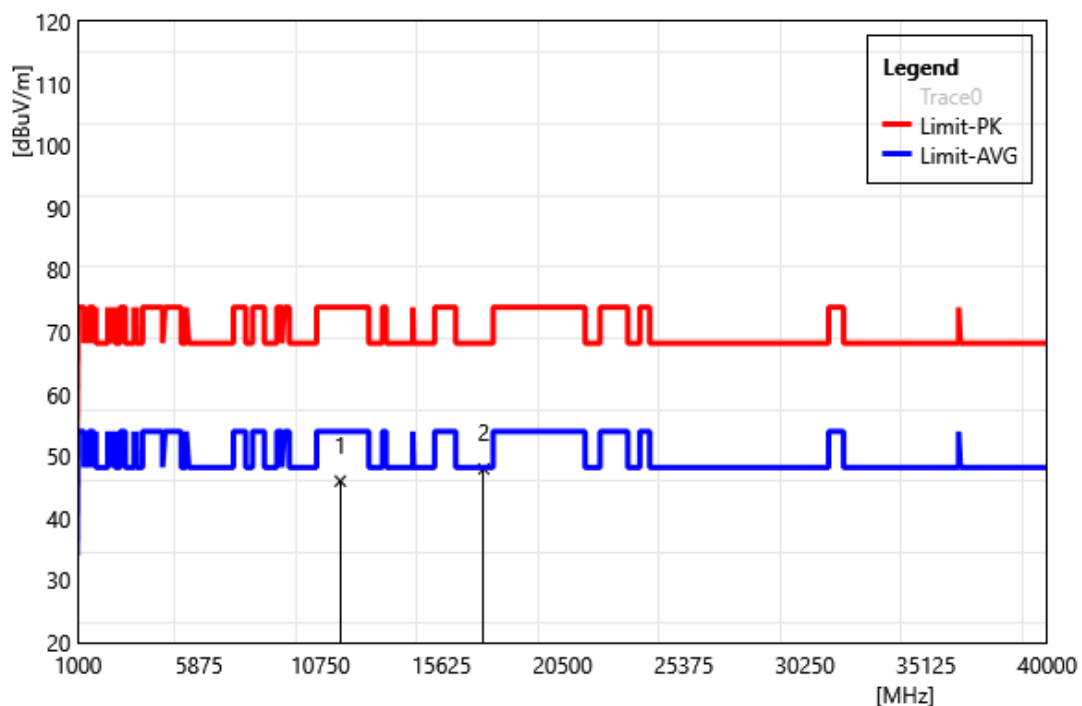


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	36.92	9.08	46.00	74.00	-28.00	PEAK
2	17325.00	39.92	8.04	47.96	68.20	-20.24	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5775		
	MHz		
Polarization:	Vertical		
Remark:			

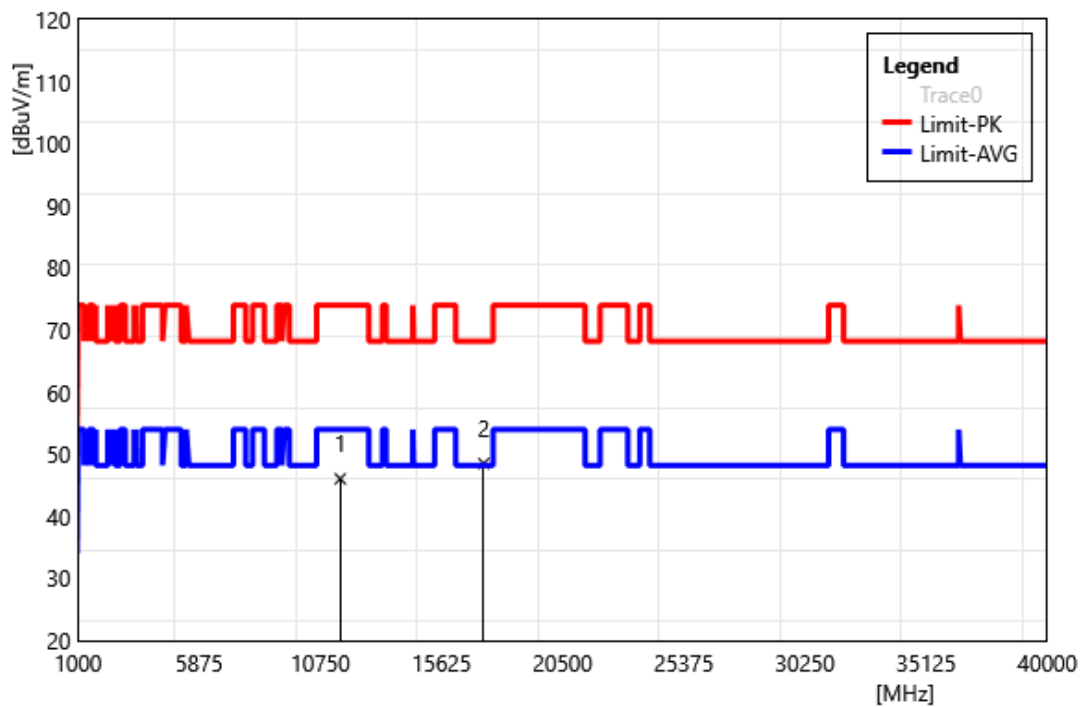


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	36.96	9.08	46.04	74.00	-27.96	PEAK
2	17325.00	40.46	8.04	48.50	68.20	-19.70	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	Co-location		
Polarization:	Horizontal		
Remark:	Bluetooth + WLAN 5 GHz + WCDMA		

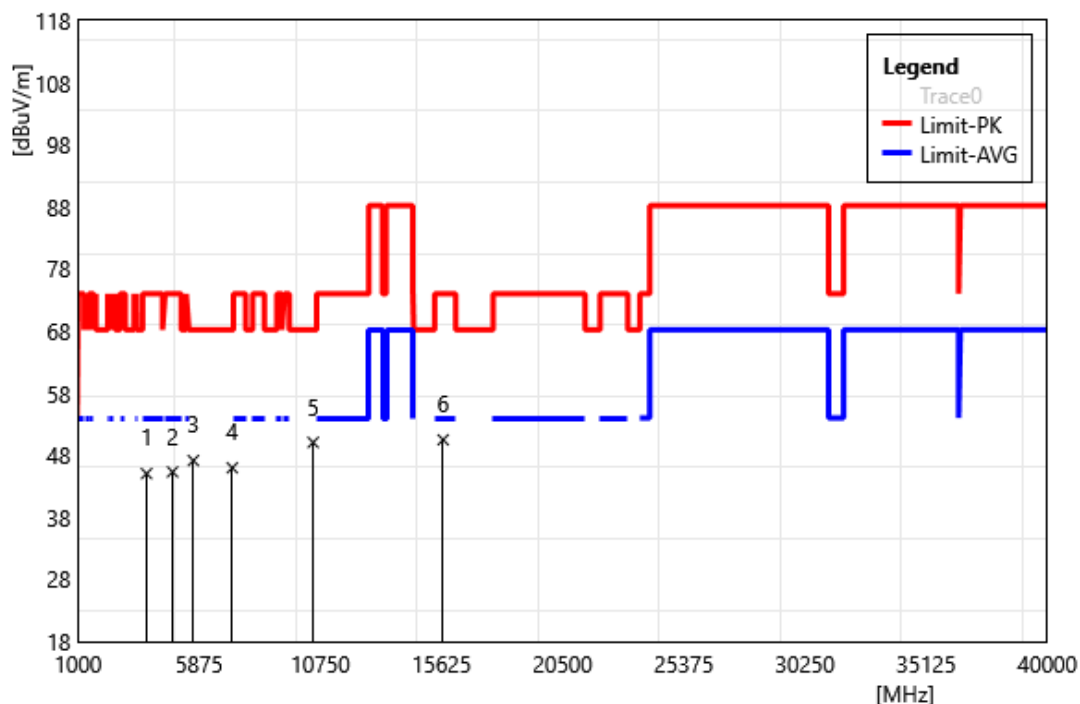


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	3760.00	44.45	0.61	45.06	74.00	-28.94	PEAK
2	4804.00	42.56	2.75	45.31	74.00	-28.69	PEAK
3	5640.00	43.53	3.62	47.15	68.20	-21.05	PEAK
4	7206.00	37.84	8.14	45.98	68.20	-22.22	PEAK
5	10460.00	40.76	9.31	50.07	68.20	-18.13	PEAK
6	15690.00	40.05	10.44	50.49	74.00	-23.51	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	Co-location		
Polarization:	Vertical		
Remark:	Bluetooth + WLAN 5 GHz + WCDMA		

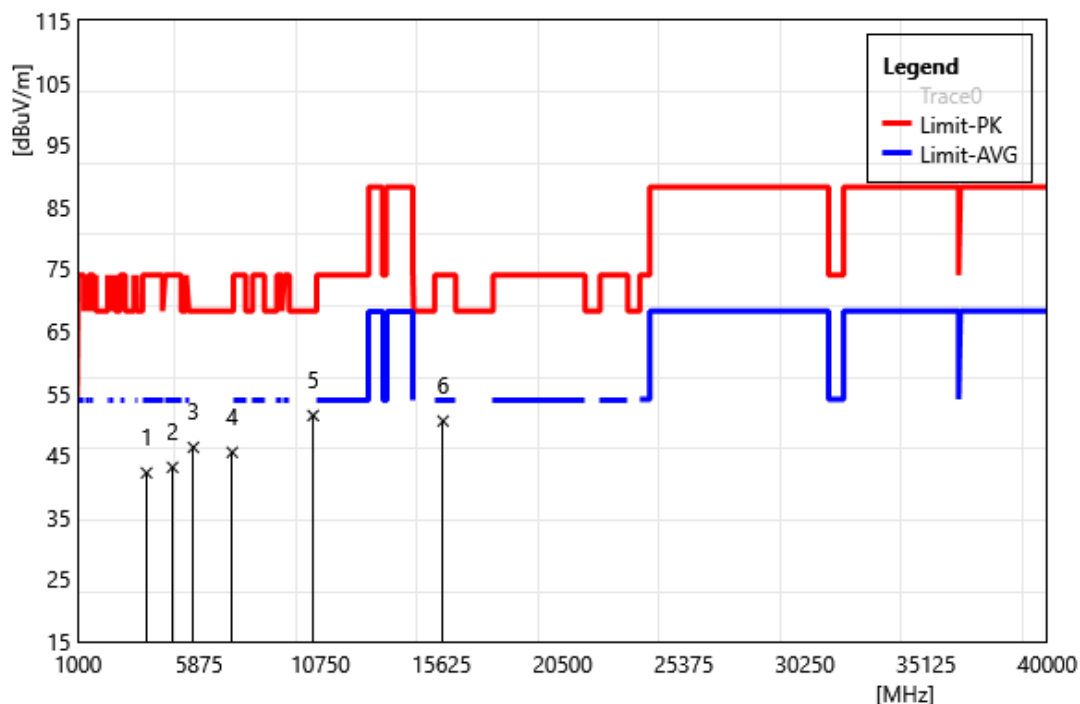


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	3760.00	41.56	0.61	42.17	74.00	-31.83	PEAK
2	4804.00	40.31	2.75	43.06	74.00	-30.94	PEAK
3	5640.00	42.65	3.62	46.27	68.20	-21.93	PEAK
4	7206.00	37.33	8.14	45.47	68.20	-22.73	PEAK
5	10460.00	42.09	9.31	51.40	68.20	-16.80	PEAK
6	15690.00	40.07	10.44	50.51	74.00	-23.49	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	Co-location		
Polarization:	Horizontal		
Remark:	Bluetooth + WLAN 5 GHz + LTE		

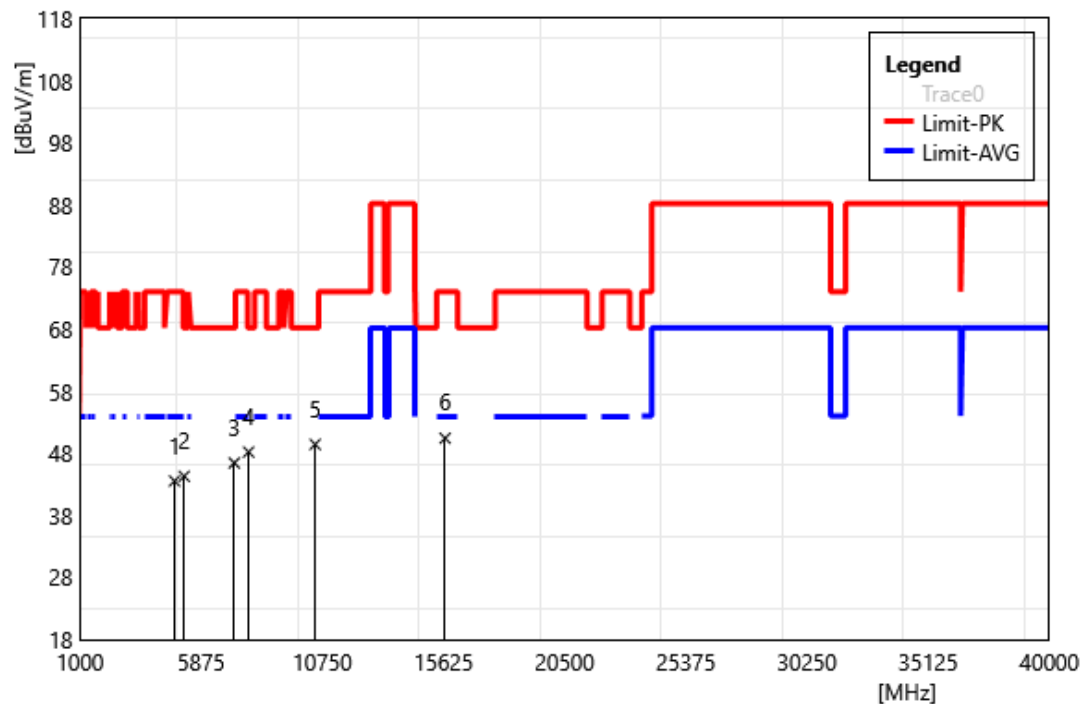

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4804.00	40.77	2.75	43.52	74.00	-30.48	PEAK
2	5190.00	41.75	2.54	44.29	68.20	-23.91	PEAK
3	7206.00	38.30	8.14	46.44	68.20	-21.76	PEAK
4	7785.00	40.87	7.33	48.20	68.20	-20.00	PEAK
5	10460.00	40.11	9.31	49.42	68.20	-18.78	PEAK
6	15690.00	39.99	10.44	50.43	74.00	-23.57	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	Co-location		
Polarization:	Vertical		
Remark:	Bluetooth + WLAN 5 GHz + LTE		

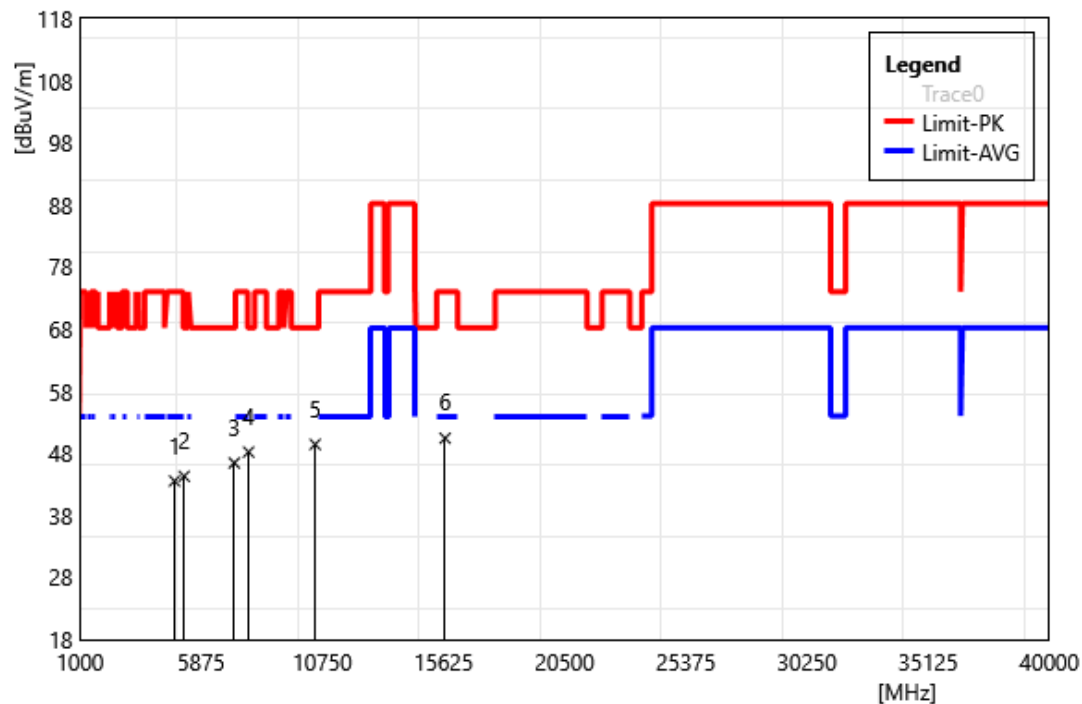


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4804.00	40.77	2.75	43.52	74.00	-30.48	PEAK
2	5190.00	41.75	2.54	44.29	68.20	-23.91	PEAK
3	7206.00	38.30	8.14	46.44	68.20	-21.76	PEAK
4	7785.00	40.87	7.33	48.20	68.20	-20.00	PEAK
5	10460.00	40.11	9.31	49.42	68.20	-18.78	PEAK
6	15690.00	39.99	10.44	50.43	74.00	-23.57	PEAK

Band Edge


Peak

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5180 MHz		
Polarization:	Horizontal		
Remark:			

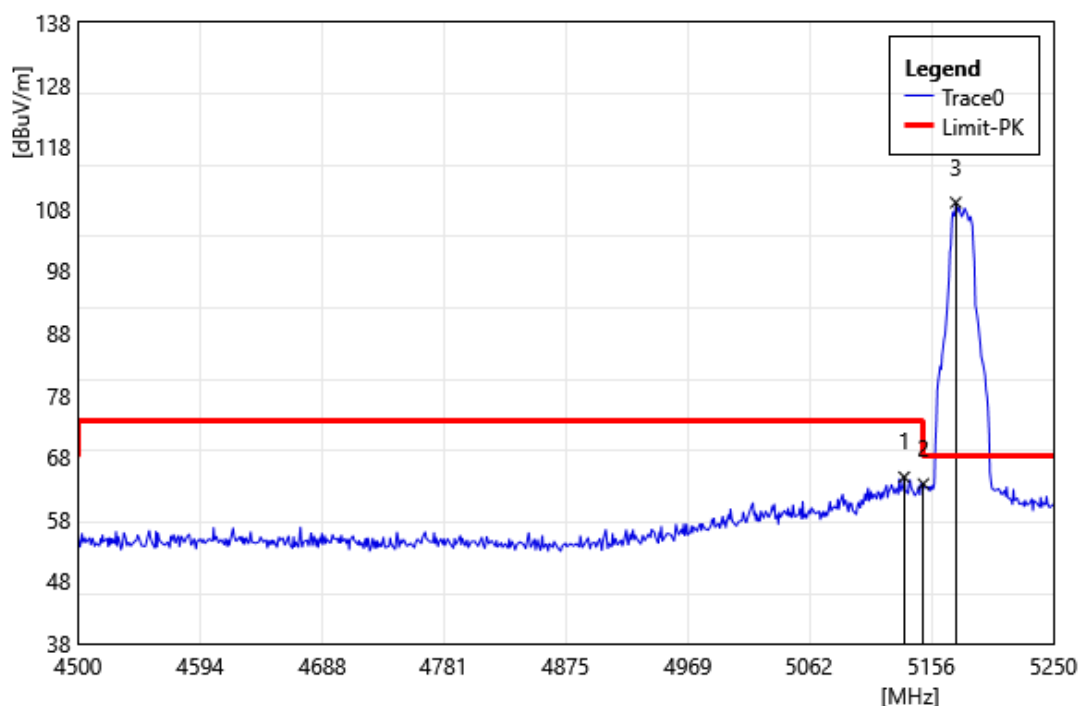


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5135.25	62.32	2.48	64.80	74.00	-9.20	PEAK
2	5150.00	61.14	2.56	63.70	74.00	-10.30	PEAK
3	5175.00	106.49	2.54	109.03	68.20	40.83	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5180 MHz		
Polarization:	Vertical		
Remark:			

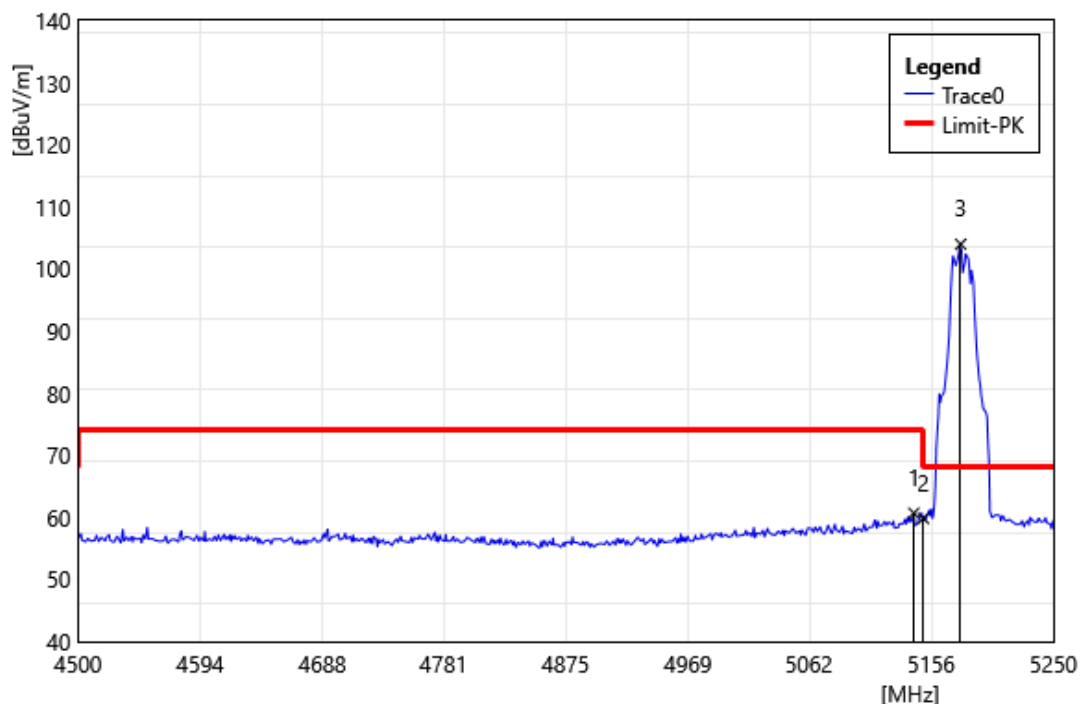


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.75	58.15	2.52	60.67	74.00	-13.33	PEAK
2	5150.00	57.29	2.56	59.85	74.00	-14.15	PEAK
3	5178.75	101.46	2.53	103.99	68.20	35.79	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5320 MHz		
Polarization:	Horizontal		
Remark:			

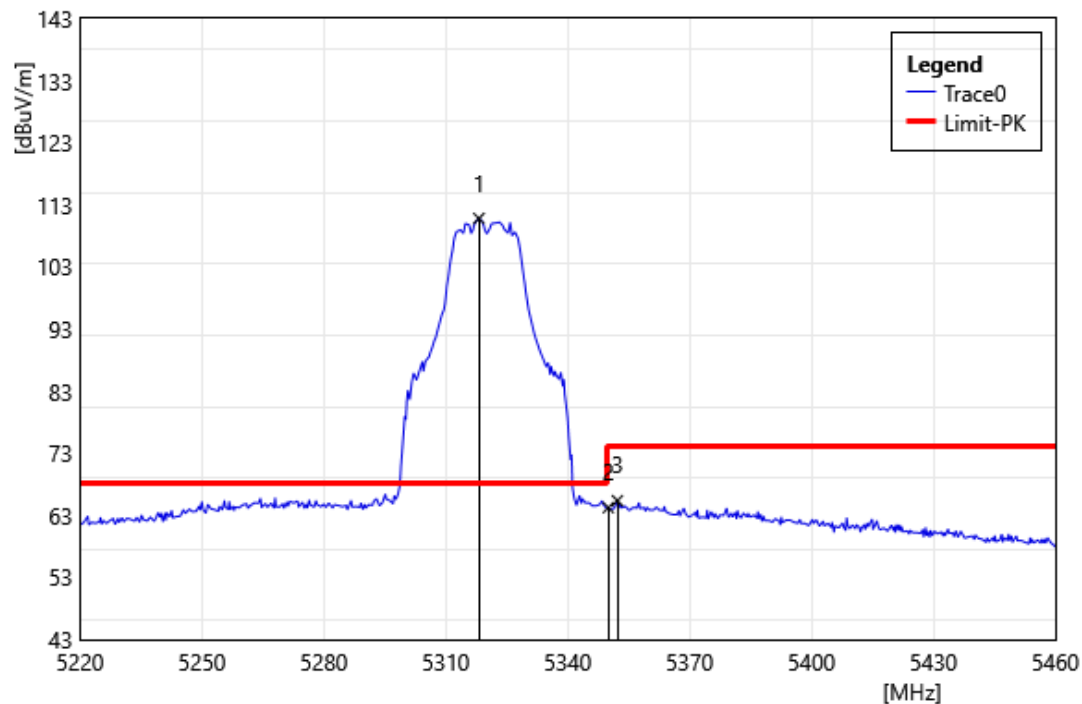


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5318.16	108.27	2.54	110.81	68.20	42.61	PEAK
2	5350.00	61.74	2.51	64.25	74.00	-9.75	PEAK
3	5352.24	62.84	2.52	65.36	74.00	-8.64	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5320 MHz		
Polarization:	Vertical		
Remark:			

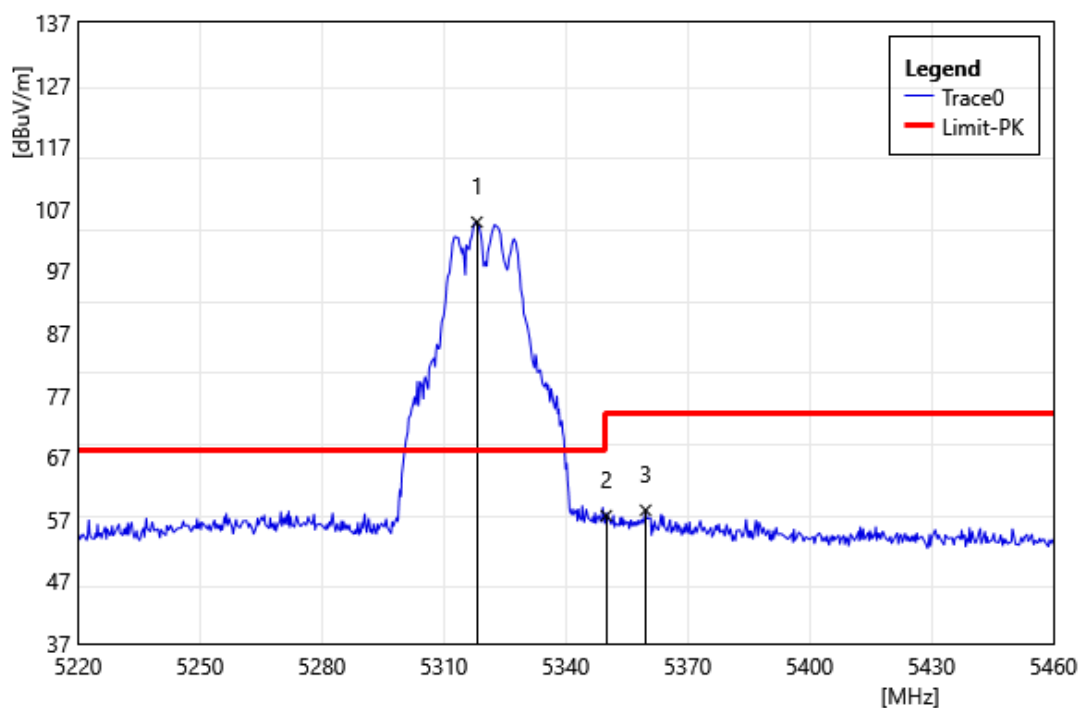


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5318.16	102.33	2.54	104.87	68.20	36.67	PEAK
2	5350.00	55.08	2.51	57.59	74.00	-16.41	PEAK
3	5359.68	55.94	2.53	58.47	74.00	-15.53	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5500 MHz		
Polarization:	Horizontal		
Remark:			

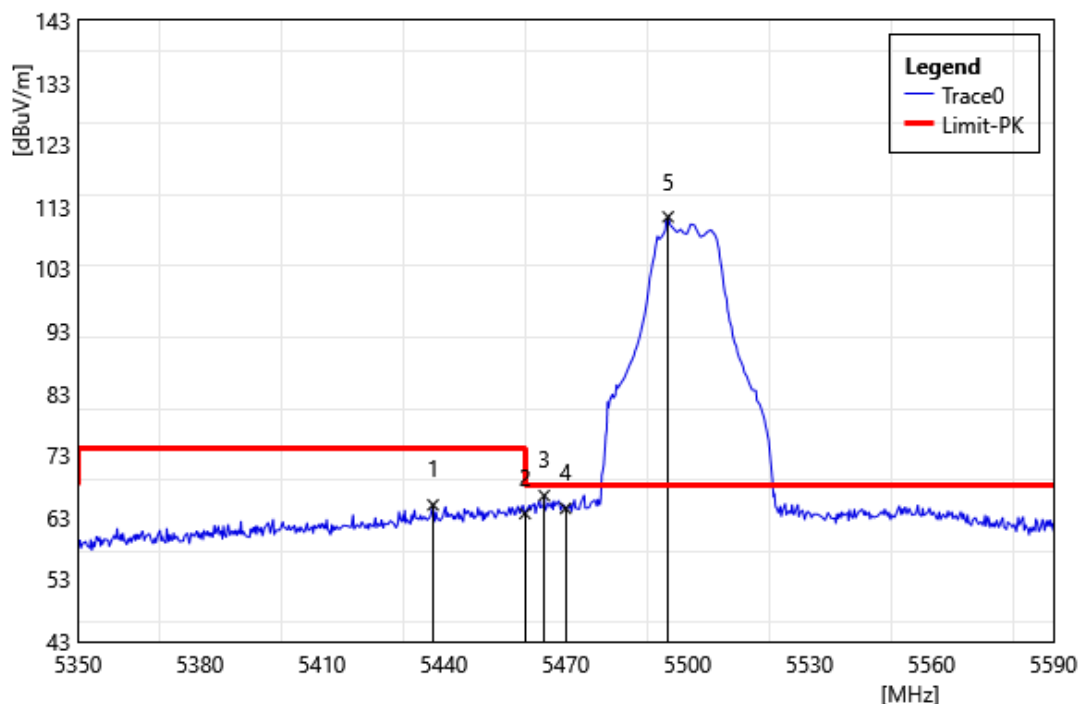


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5437.36	62.23	2.77	65.00	74.00	-9.00	PEAK
2	5460.00	60.67	2.93	63.60	74.00	-10.40	PEAK
3	5464.72	63.53	2.98	66.51	68.20	-1.69	PEAK
4	5470.00	61.42	3.02	64.44	68.20	-3.76	PEAK
5	5495.20	108.14	3.25	111.39	68.20	43.19	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5500 MHz		
Polarization:	Vertical		
Remark:			

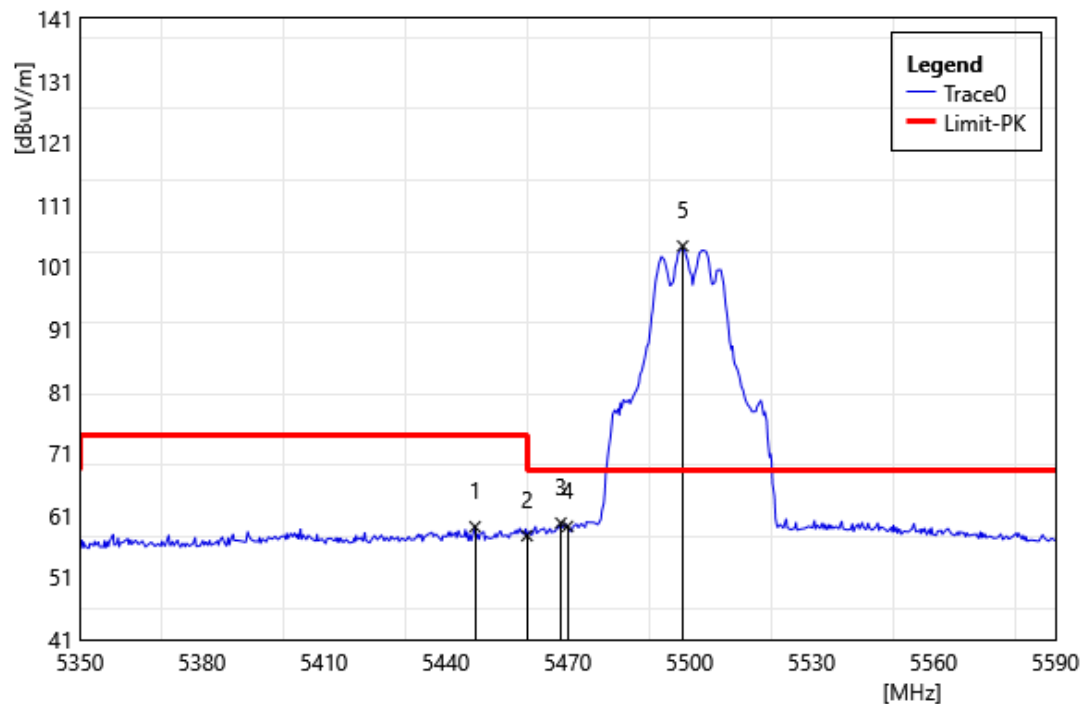


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5447.20	56.34	2.83	59.17	74.00	-14.83	PEAK
2	5460.00	54.79	2.93	57.72	74.00	-16.28	PEAK
3	5468.32	56.75	3.01	59.76	68.20	-8.44	PEAK
4	5470.00	56.20	3.02	59.22	68.20	-8.98	PEAK
5	5498.32	101.08	3.29	104.37	68.20	36.17	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5700 MHz		
Polarization:	Horizontal		
Remark:			

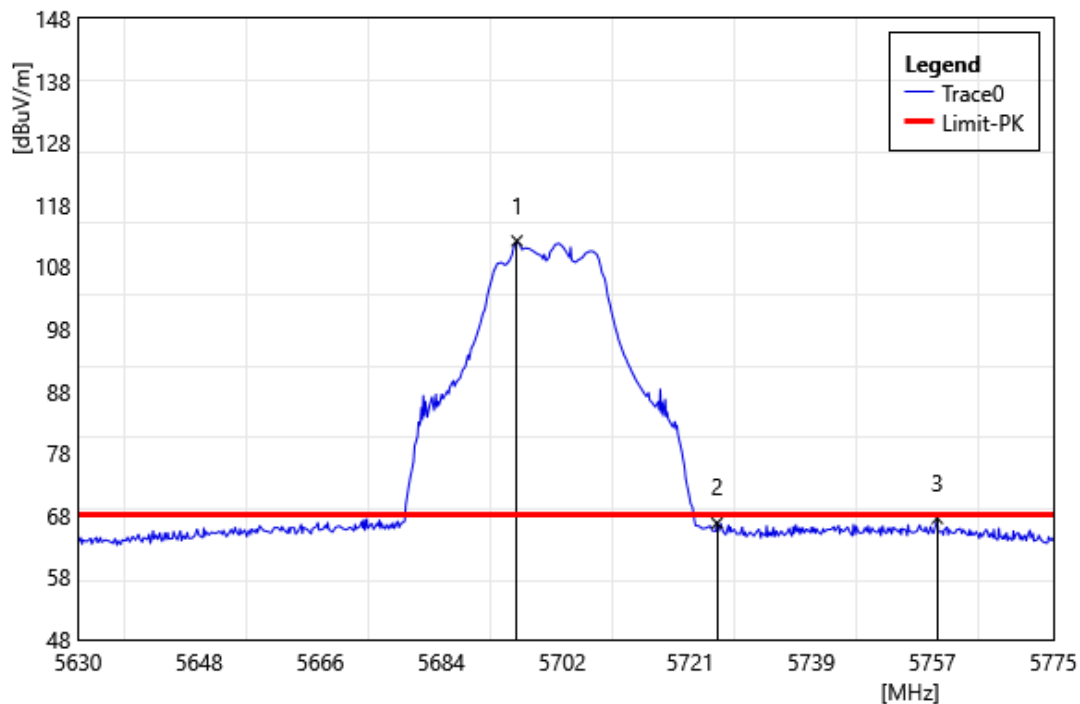


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5695.25	108.38	3.82	112.20	68.20	44.00	PEAK
2	5725.00	62.73	4.00	66.73	68.20	-1.47	PEAK
3	5757.75	63.29	4.22	67.51	68.20	-0.69	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5700 MHz		
Polarization:	Vertical		
Remark:			

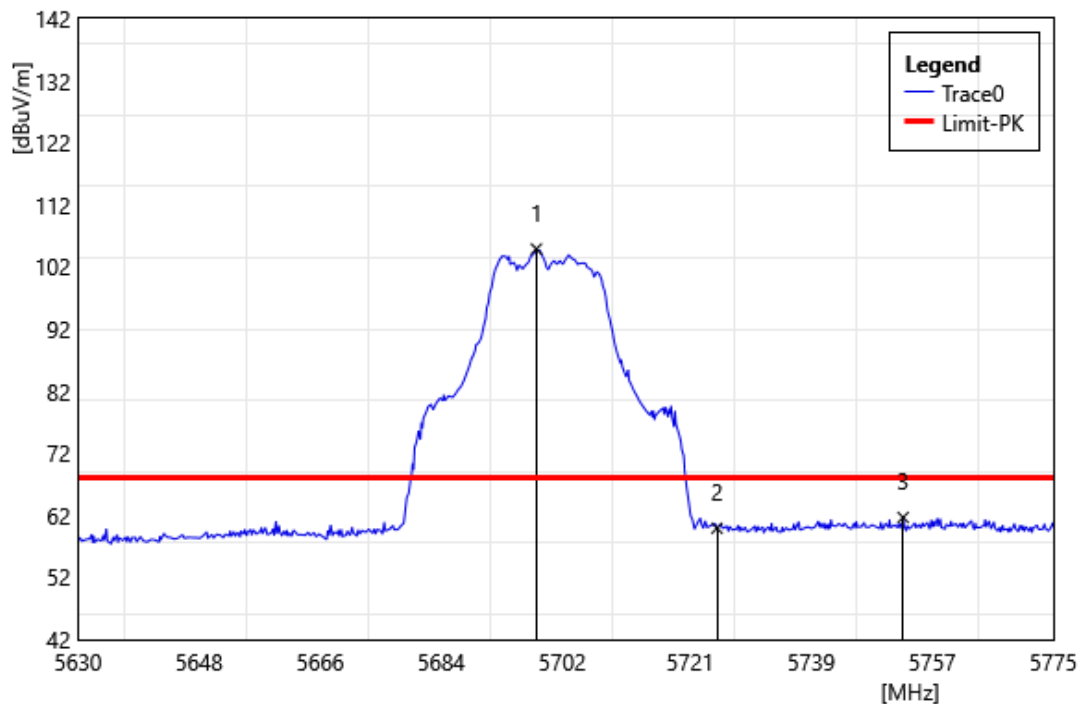


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5698.15	101.06	3.84	104.91	68.20	36.71	PEAK
2	5725.00	55.93	4.00	59.93	68.20	-8.27	PEAK
3	5752.67	57.48	4.19	61.67	68.20	-6.53	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5720 MHz		
Polarization:	Horizontal		
Remark:			

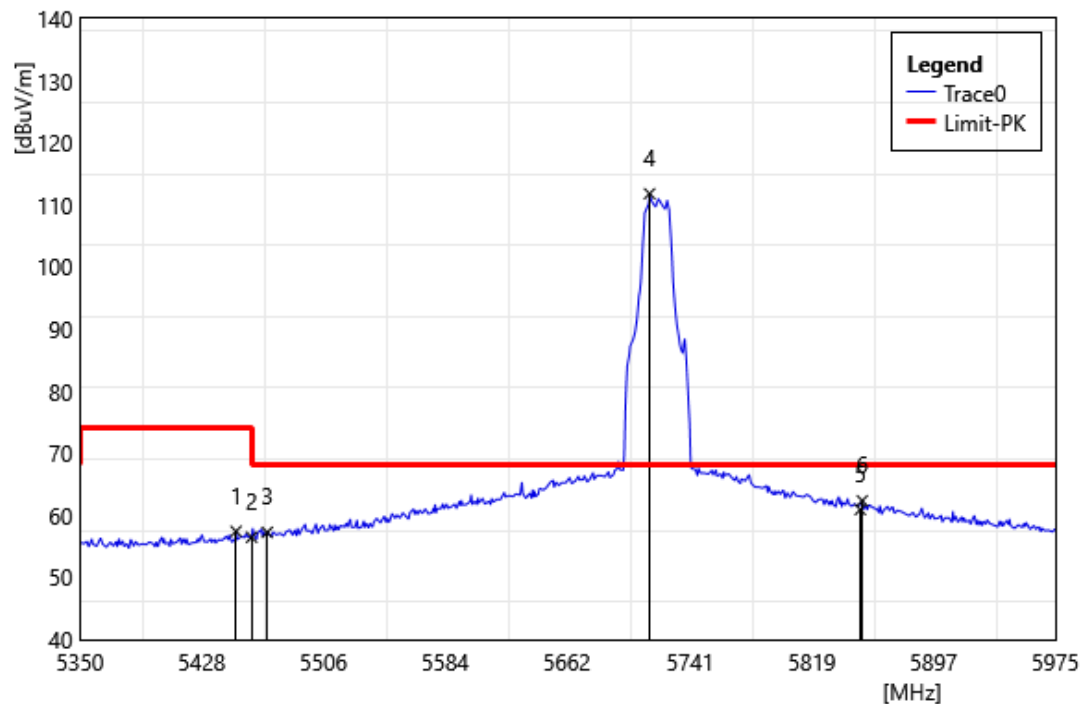


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5450.00	54.59	2.84	57.43	74.00	-16.57	PEAK
2	5460.00	53.54	2.93	56.47	74.00	-17.53	PEAK
3	5470.00	54.24	3.02	57.26	68.20	-10.94	PEAK
4	5715.00	107.85	3.94	111.79	68.20	43.59	PEAK
5	5850.00	56.39	4.55	60.94	68.20	-7.26	PEAK
6	5851.25	57.79	4.55	62.35	68.20	-5.86	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5720 MHz		
Polarization:	Vertical		
Remark:			

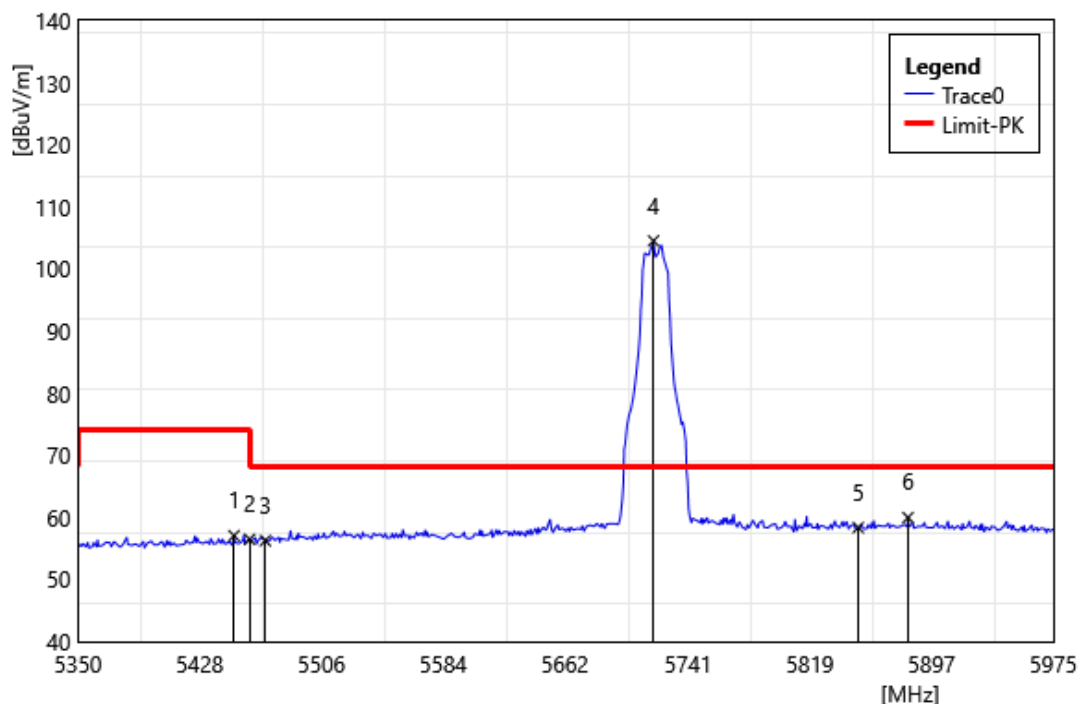


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5450.00	54.23	2.84	57.07	74.00	-16.93	PEAK
2	5460.00	53.53	2.93	56.46	74.00	-17.54	PEAK
3	5470.00	53.23	3.02	56.25	68.20	-11.95	PEAK
4	5718.75	100.57	3.96	104.54	68.20	36.34	PEAK
5	5850.00	53.81	4.55	58.36	68.20	-9.84	PEAK
6	5881.88	55.40	4.57	59.97	68.20	-8.23	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5745 MHz		
Polarization:	Horizontal		
Remark:			

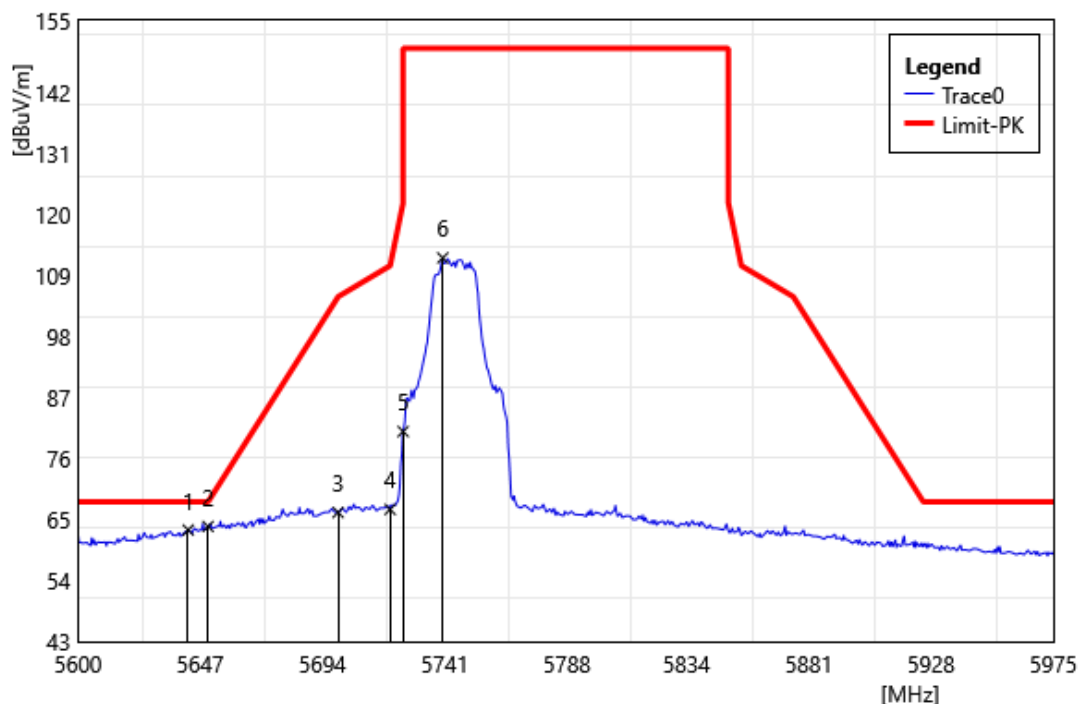


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5642.38	59.48	3.64	63.12	68.20	-5.08	PEAK
2	5650.00	60.06	3.70	63.76	68.20	-4.44	PEAK
3	5700.00	62.44	3.84	66.28	105.20	-38.92	PEAK
4	5720.00	62.87	3.97	66.84	110.80	-43.96	PEAK
5	5725.00	76.88	4.00	80.88	150.00	-69.12	PEAK
6	5740.25	108.10	4.10	112.21	150.00	-37.80	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5745 MHz		
Polarization:	Vertical		
Remark:			

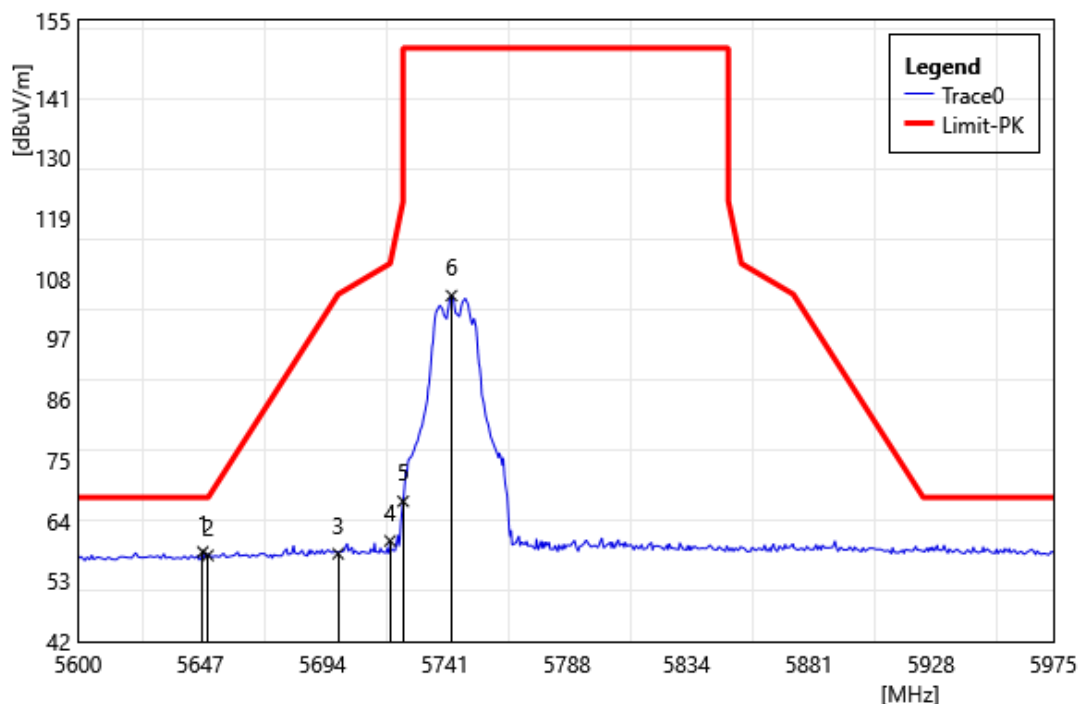


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5648.00	54.63	3.68	58.31	68.20	-9.89	PEAK
2	5650.00	53.97	3.70	57.67	68.20	-10.53	PEAK
3	5700.00	54.14	3.84	57.98	105.20	-47.22	PEAK
4	5720.00	56.34	3.97	60.31	110.80	-50.49	PEAK
5	5725.00	63.51	4.00	67.51	150.00	-82.49	PEAK
6	5743.63	100.82	4.13	104.95	150.00	-45.05	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5825 MHz		
Polarization:	Horizontal		
Remark:			

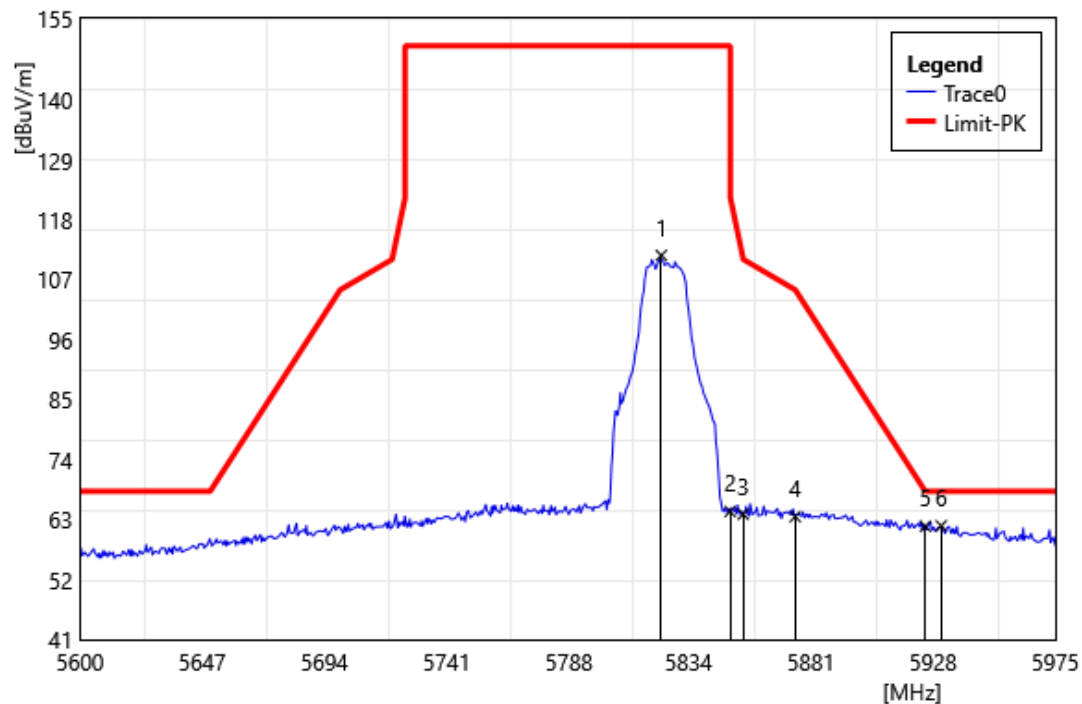


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5823.50	107.05	4.48	111.53	150.00	-38.47	PEAK
2	5850.00	59.98	4.55	64.53	122.20	-57.67	PEAK
3	5855.00	59.45	4.55	64.00	110.80	-46.80	PEAK
4	5875.00	58.98	4.57	63.55	105.20	-41.65	PEAK
5	5925.00	57.34	4.45	61.79	68.20	-6.41	PEAK
6	5931.13	57.47	4.41	61.88	68.20	-6.32	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5825 MHz		
Polarization:	Vertical		
Remark:			

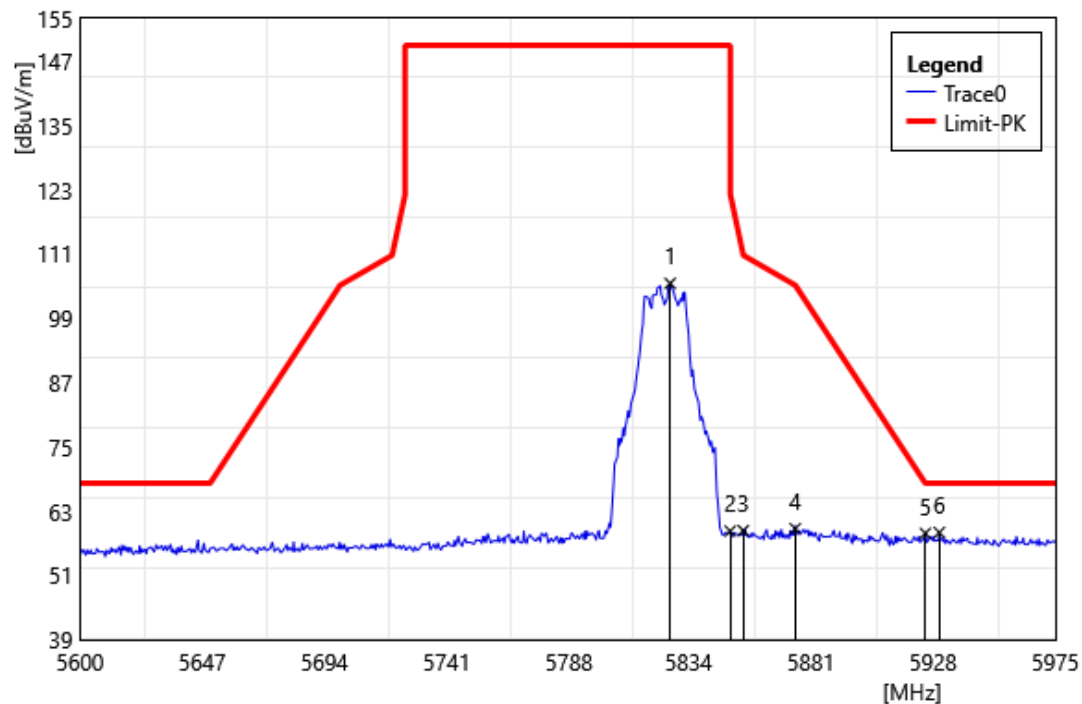


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5826.88	101.05	4.48	105.53	150.00	-44.47	PEAK
2	5850.00	54.71	4.55	59.26	122.20	-62.94	PEAK
3	5855.00	54.80	4.55	59.35	110.80	-51.45	PEAK
4	5875.00	55.16	4.57	59.73	105.20	-45.47	PEAK
5	5925.00	54.40	4.45	58.85	68.20	-9.35	PEAK
6	5930.38	54.59	4.42	59.01	68.20	-9.19	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

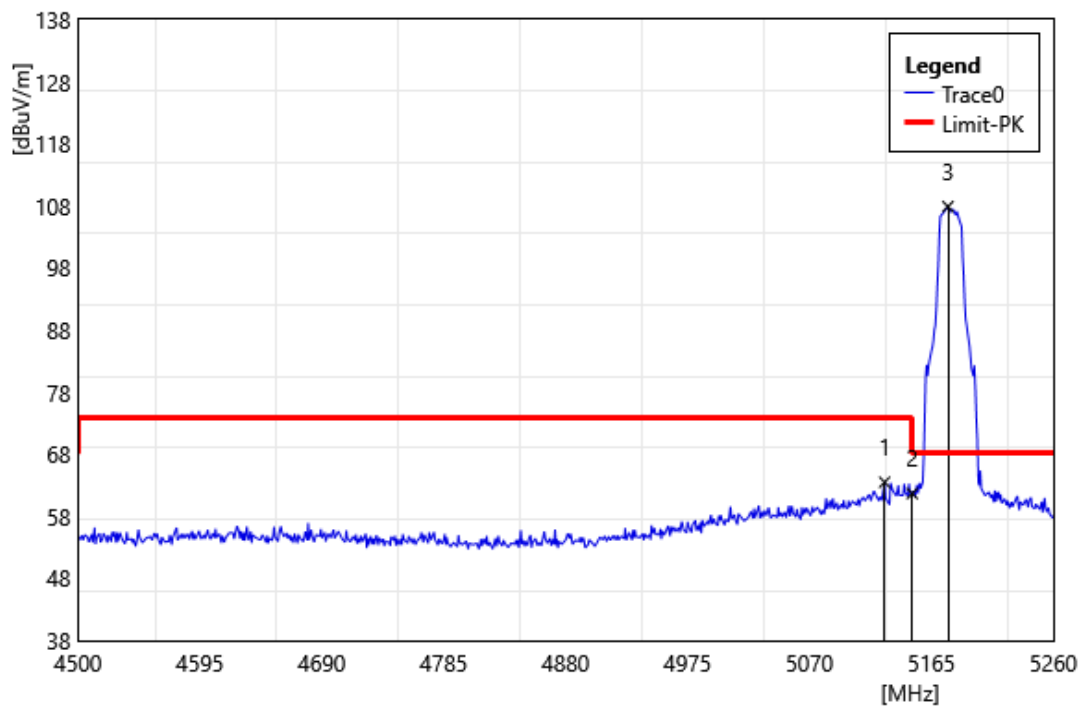


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5128.52	61.05	2.44	63.49	74.00	-10.51	PEAK
2	5150.00	59.12	2.56	61.68	74.00	-12.32	PEAK
3	5177.92	105.36	2.53	107.89	68.20	39.69	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5180 MHz		
Polarization:	Vertical		
Remark:			

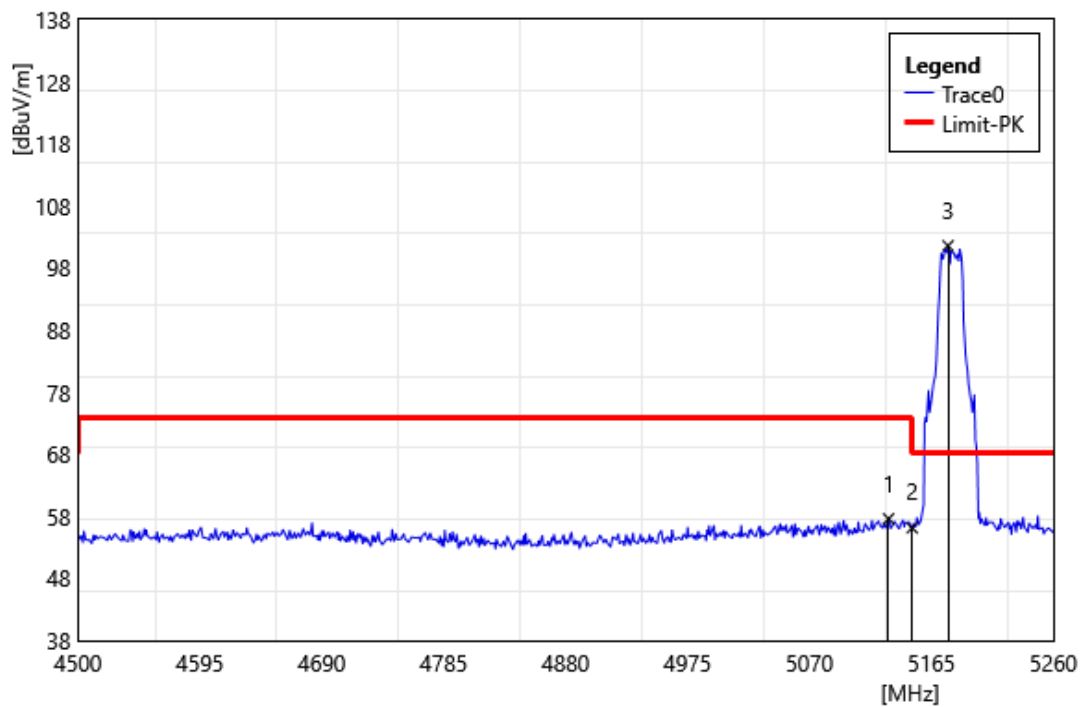


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5131.56	55.14	2.47	57.61	74.00	-16.39	PEAK
2	5150.00	53.59	2.56	56.15	74.00	-17.85	PEAK
3	5177.92	99.05	2.53	101.58	68.20	33.38	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5320 MHz		
Polarization:	Horizontal		
Remark:			

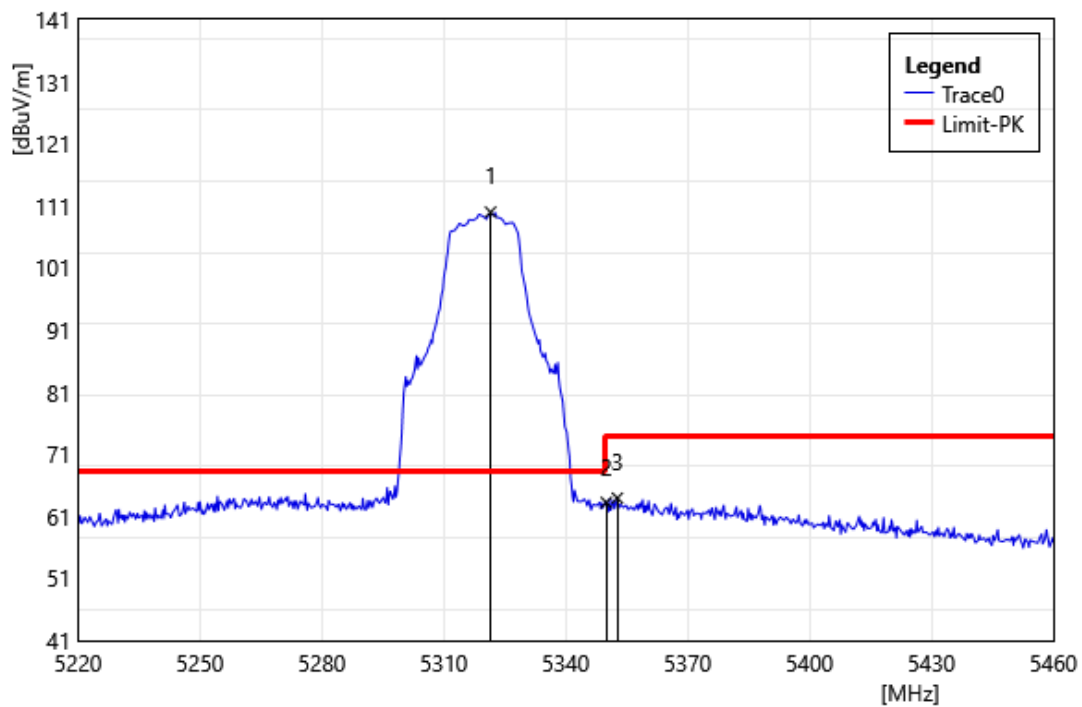


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5321.52	107.47	2.54	110.01	68.20	41.81	PEAK
2	5350.00	60.72	2.51	63.23	74.00	-10.77	PEAK
3	5352.72	61.43	2.52	63.95	74.00	-10.05	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5320 MHz		
Polarization:	Vertical		
Remark:			

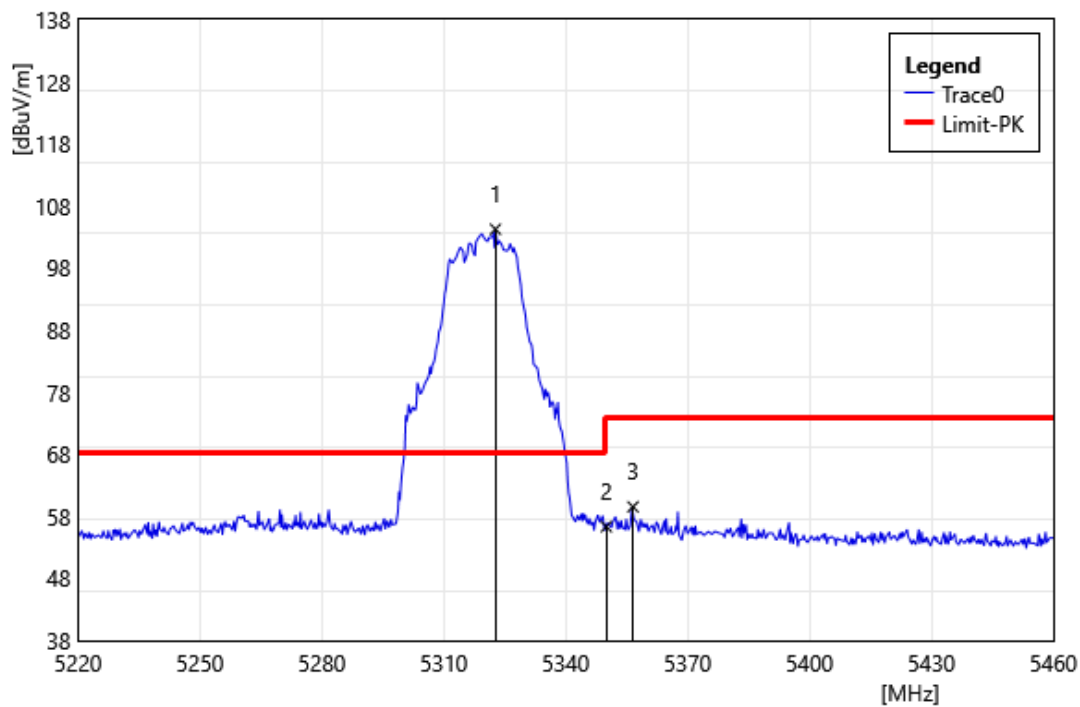


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5322.72	101.71	2.53	104.24	68.20	36.04	PEAK
2	5350.00	53.83	2.51	56.34	74.00	-17.66	PEAK
3	5356.56	57.01	2.52	59.53	74.00	-14.47	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

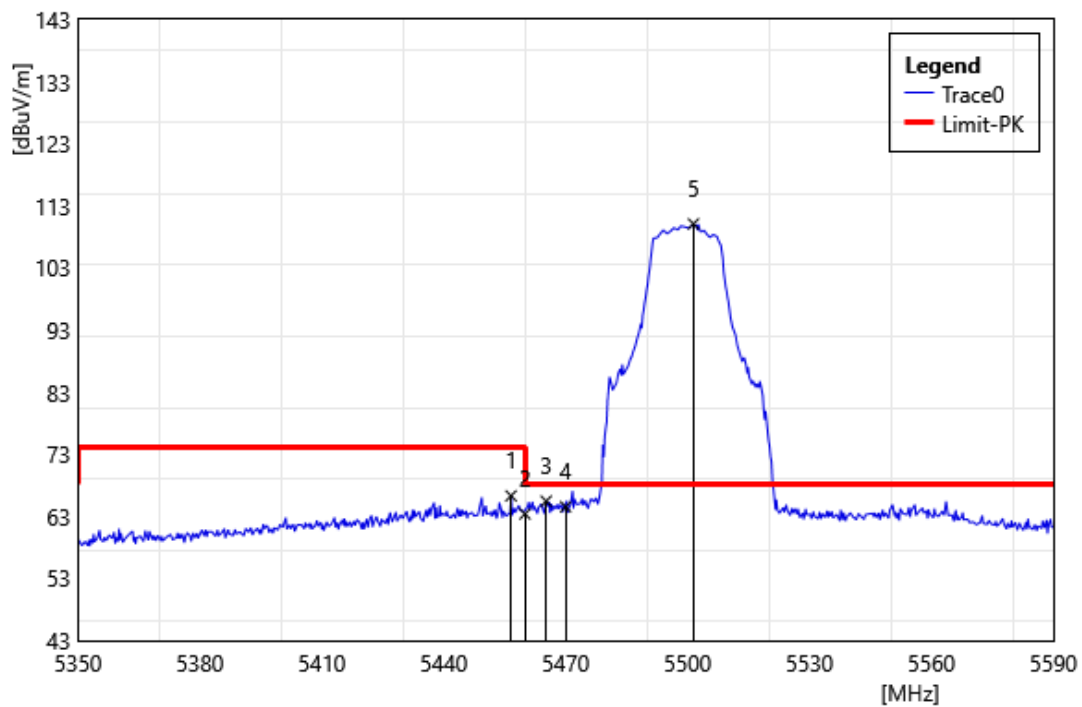


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.56	63.40	2.90	66.30	74.00	-7.70	PEAK
2	5460.00	60.46	2.93	63.39	74.00	-10.61	PEAK
3	5465.20	62.48	2.98	65.46	68.20	-2.74	PEAK
4	5470.00	61.53	3.02	64.55	68.20	-3.65	PEAK
5	5501.44	106.79	3.31	110.10	68.20	41.90	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5500		
	MHz		
Polarization:	Vertical		
Remark:			

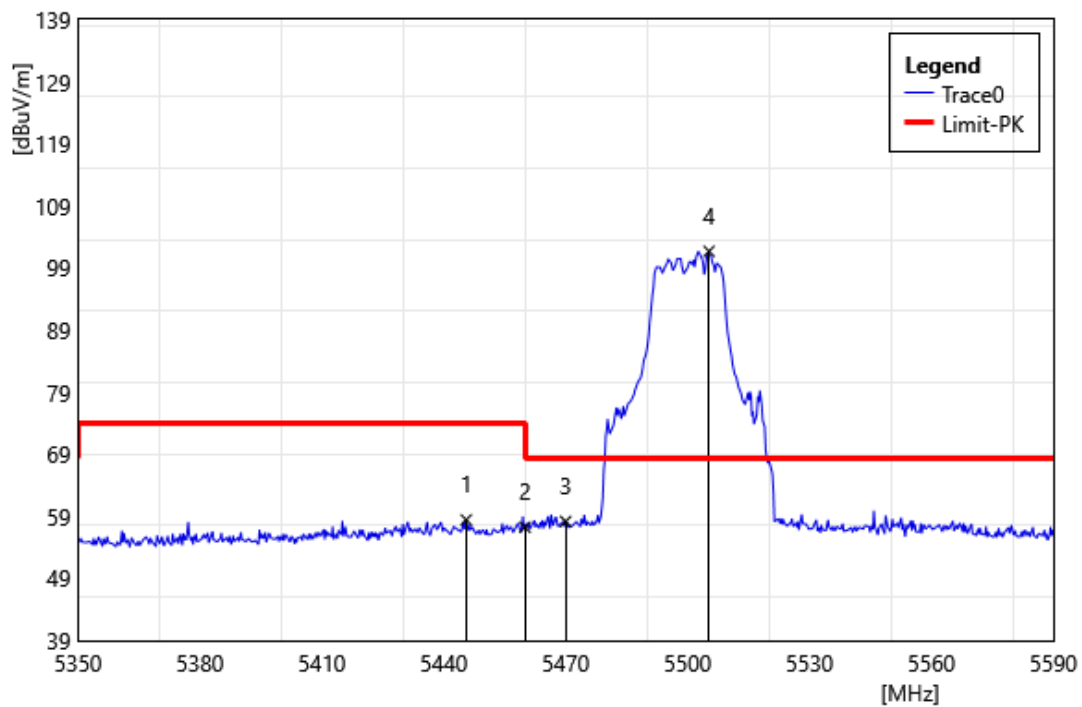


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5445.52	55.62	2.82	58.44	74.00	-15.56	PEAK
2	5460.00	54.32	2.93	57.25	74.00	-16.75	PEAK
3	5470.00	55.16	3.02	58.18	68.20	-10.02	PEAK
4	5505.28	98.36	3.32	101.69	68.20	33.49	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5700 MHz		
Polarization:	Horizontal		
Remark:			

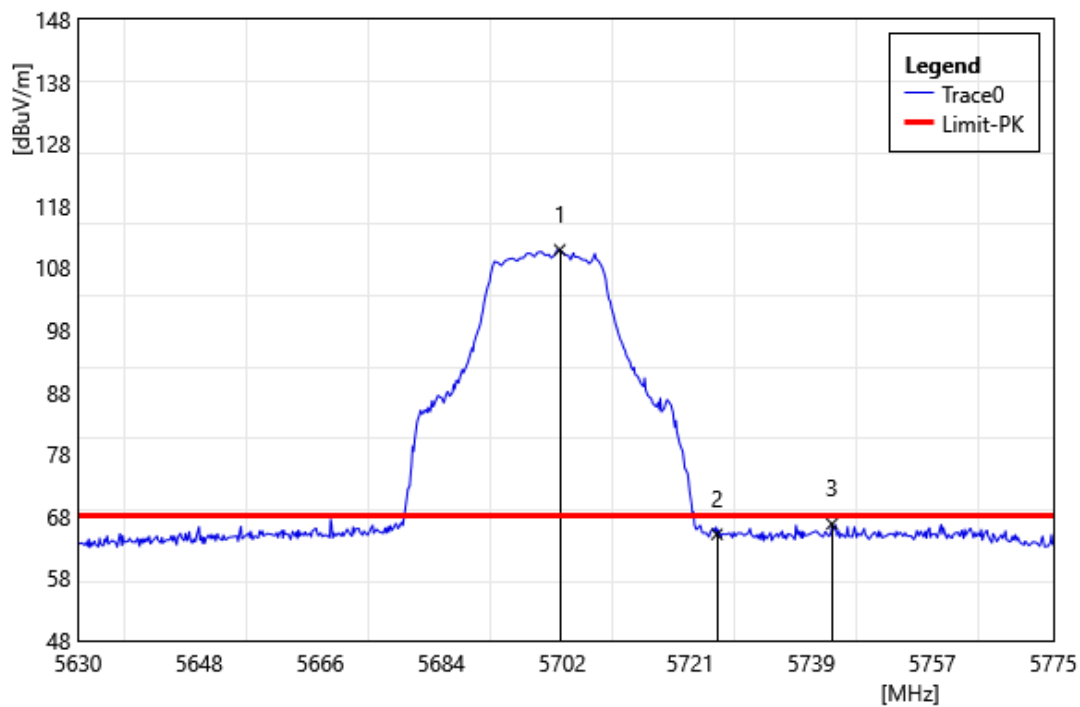


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5701.63	107.07	3.85	110.92	68.20	42.72	PEAK
2	5725.00	61.10	4.00	65.10	68.20	-3.10	PEAK
3	5742.09	62.66	4.12	66.78	68.20	-1.42	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5700 MHz		
Polarization:	Vertical		
Remark:			

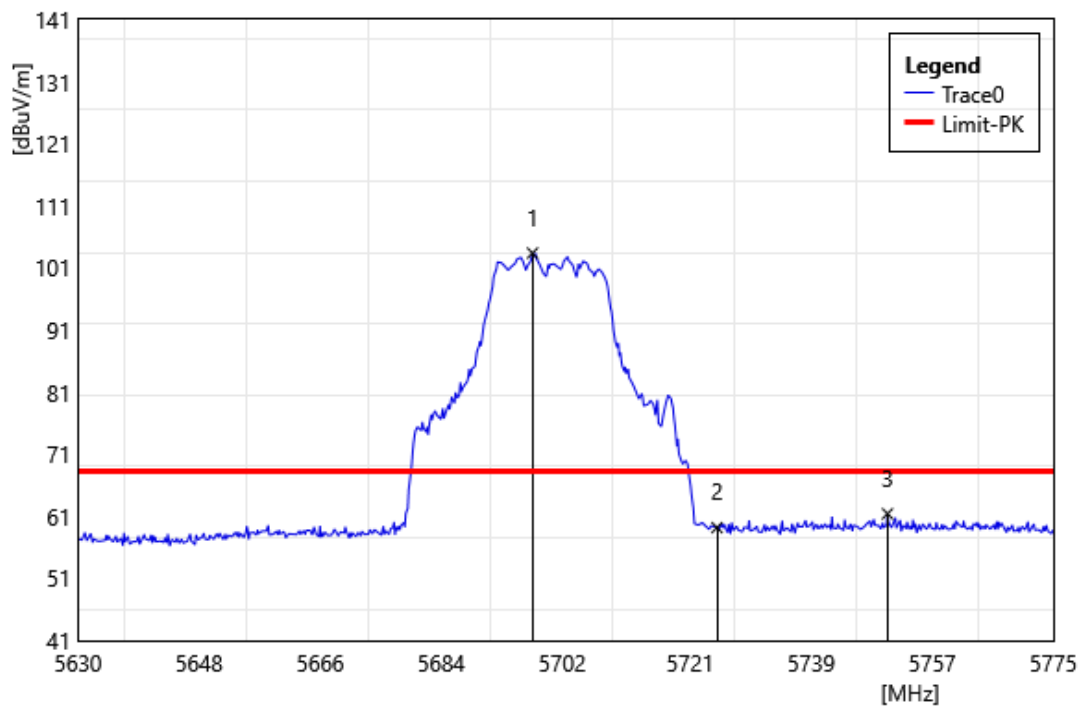


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5697.57	99.55	3.84	103.39	68.20	35.19	PEAK
2	5725.00	55.18	4.00	59.18	68.20	-9.02	PEAK
3	5750.35	57.23	4.18	61.41	68.20	-6.79	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5720 MHz		
Polarization:	Horizontal		
Remark:			

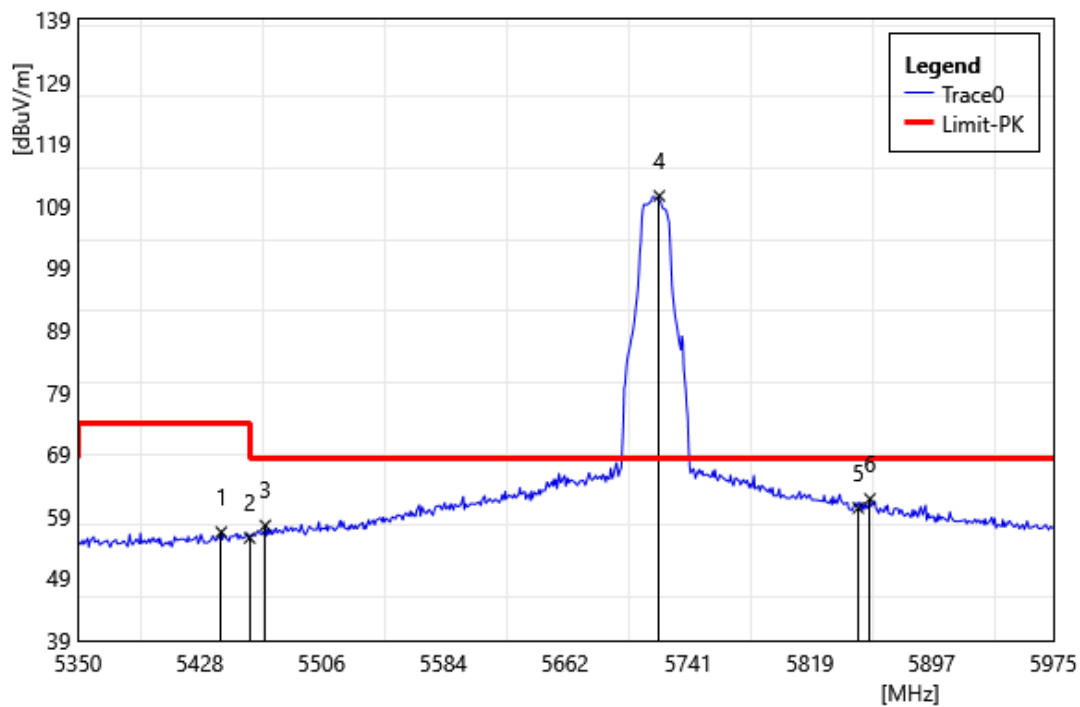


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5441.88	53.65	2.80	56.45	74.00	-17.55	PEAK
2	5460.00	52.59	2.93	55.52	74.00	-18.48	PEAK
3	5470.00	54.51	3.02	57.53	68.20	-10.67	PEAK
4	5722.50	106.62	3.99	110.61	68.20	42.41	PEAK
5	5850.00	55.80	4.55	60.35	68.20	-7.85	PEAK
6	5857.50	57.27	4.55	61.82	68.20	-6.38	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5720 MHz		
Polarization:	Vertical		
Remark:			

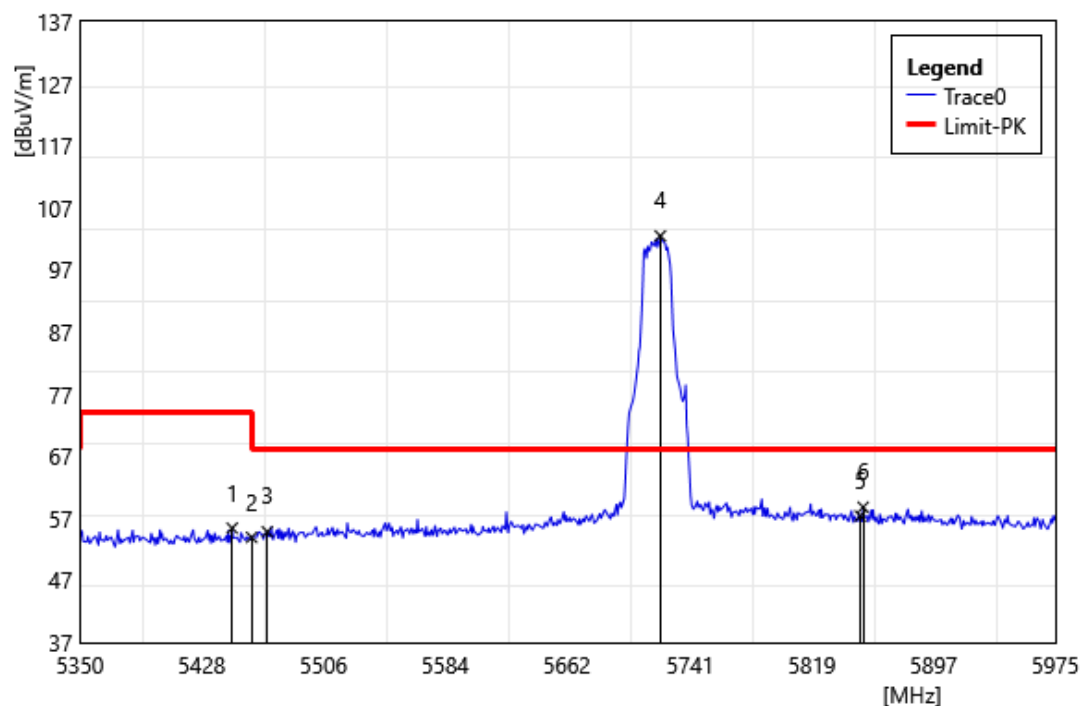


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5447.50	52.59	2.83	55.42	74.00	-18.58	PEAK
2	5460.00	51.00	2.93	53.93	74.00	-20.07	PEAK
3	5470.00	51.83	3.02	54.85	68.20	-13.35	PEAK
4	5721.88	98.50	3.98	102.48	68.20	34.28	PEAK
5	5850.00	52.84	4.55	57.39	68.20	-10.81	PEAK
6	5851.88	54.26	4.55	58.81	68.20	-9.39	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5745		
	MHz		
Polarization:	Horizontal		
Remark:			

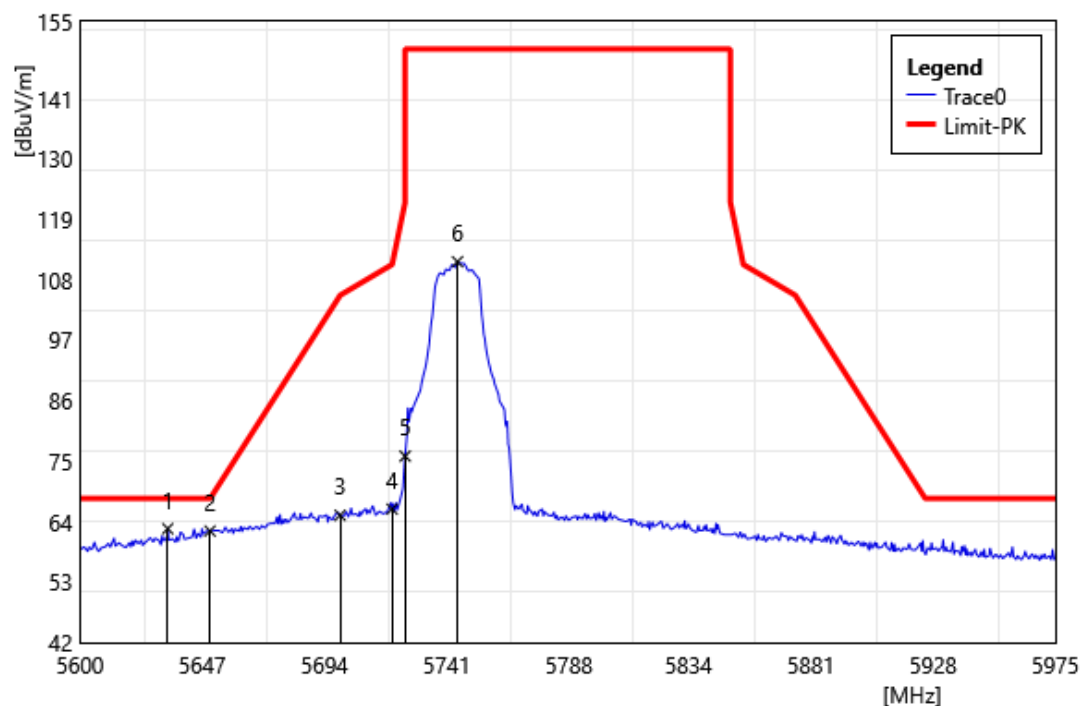


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5633.75	59.15	3.56	62.71	68.20	-5.49	PEAK
2	5650.00	58.60	3.70	62.30	68.20	-5.90	PEAK
3	5700.00	61.31	3.84	65.15	105.20	-40.05	PEAK
4	5720.00	62.33	3.97	66.30	110.80	-44.50	PEAK
5	5725.00	71.92	4.00	75.92	150.00	-74.08	PEAK
6	5745.13	107.17	4.14	111.31	150.00	-38.69	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5745		
	MHz		
Polarization:	Vertical		
Remark:			

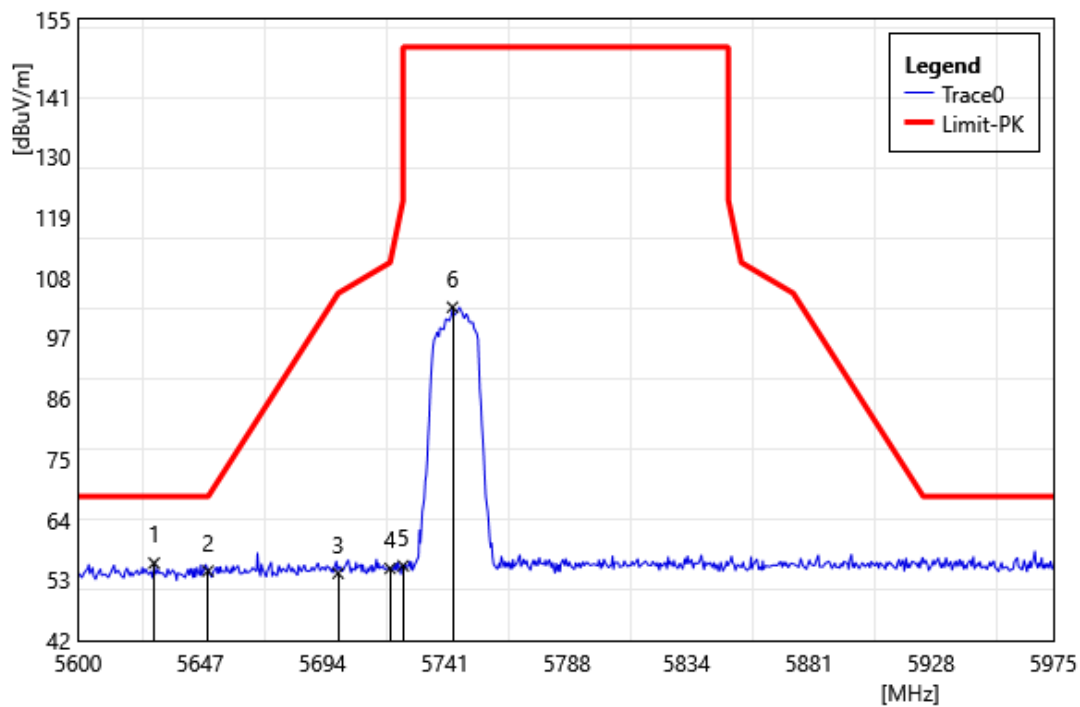


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5629.25	52.56	3.52	56.09	68.20	-12.12	PEAK
2	5650.00	50.94	3.70	54.64	68.20	-13.56	PEAK
3	5700.00	50.40	3.84	54.24	105.20	-50.96	PEAK
4	5720.00	51.16	3.97	55.13	110.80	-55.67	PEAK
5	5725.00	51.59	4.00	55.59	150.00	-94.41	PEAK
6	5744.00	98.53	4.13	102.66	150.00	-47.34	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5825		
	MHz		
Polarization:	Horizontal		
Remark:			

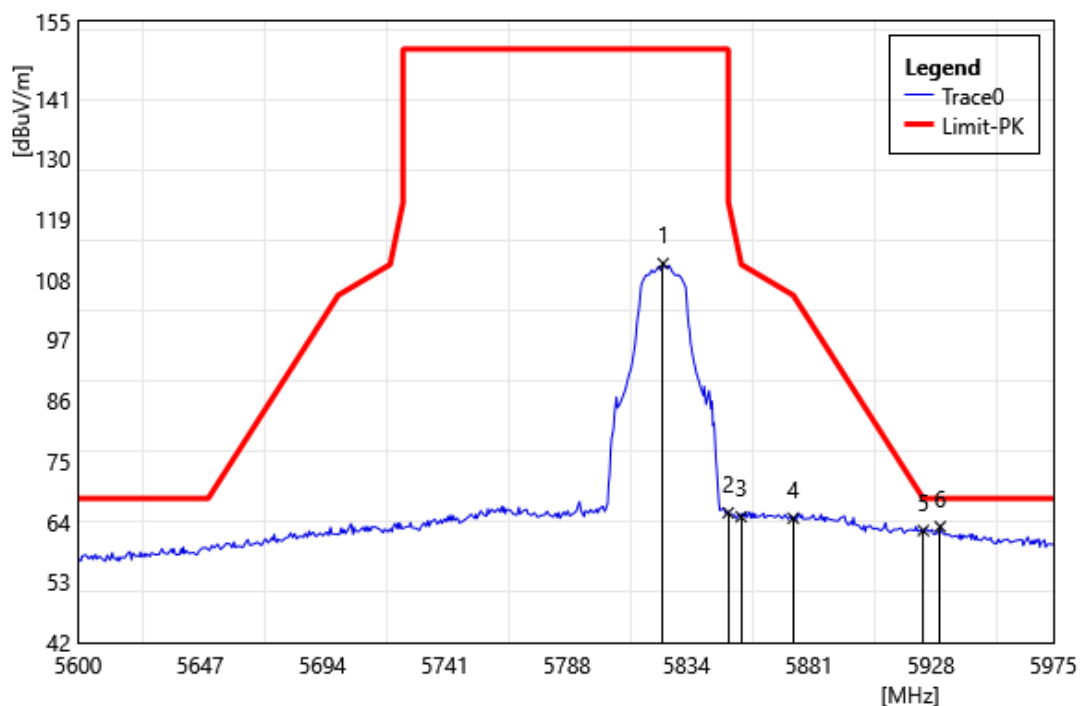


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5825.00	106.51	4.48	110.99	150.00	-39.01	PEAK
2	5850.00	61.05	4.55	65.60	122.20	-56.60	PEAK
3	5855.00	60.32	4.55	64.87	110.80	-45.93	PEAK
4	5875.00	60.06	4.57	64.63	105.20	-40.57	PEAK
5	5925.00	57.93	4.45	62.38	68.20	-5.82	PEAK
6	5931.50	58.66	4.42	63.08	68.20	-5.12	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5825		
	MHz		
Polarization:	Vertical		
Remark:			

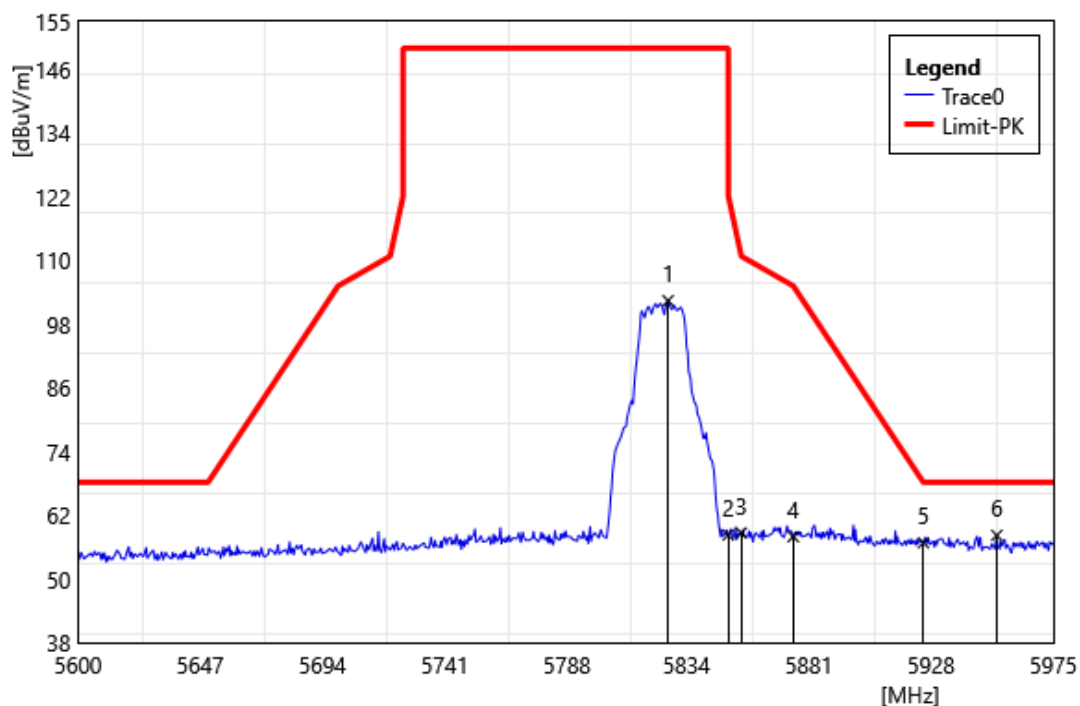


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5826.88	97.94	4.48	102.42	150.00	-47.58	PEAK
2	5850.00	53.71	4.55	58.26	122.20	-63.94	PEAK
3	5855.00	54.10	4.55	58.65	110.80	-52.15	PEAK
4	5875.00	53.39	4.57	57.96	105.20	-47.24	PEAK
5	5925.00	52.35	4.45	56.80	68.20	-11.40	PEAK
6	5953.25	53.86	4.33	58.19	68.20	-10.01	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

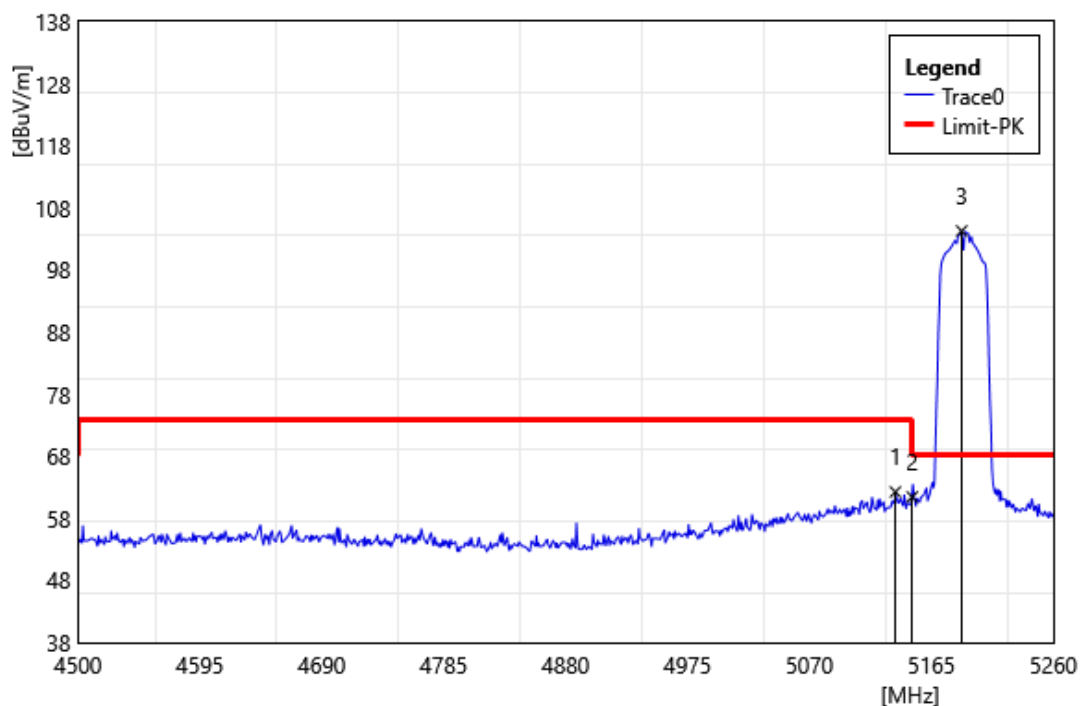


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5136.88	59.77	2.49	62.26	74.00	-11.74	PEAK
2	5150.00	58.89	2.56	61.45	74.00	-12.55	PEAK
3	5188.56	101.76	2.53	104.29	68.20	36.09	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5190 MHz		
Polarization:	Vertical		
Remark:			

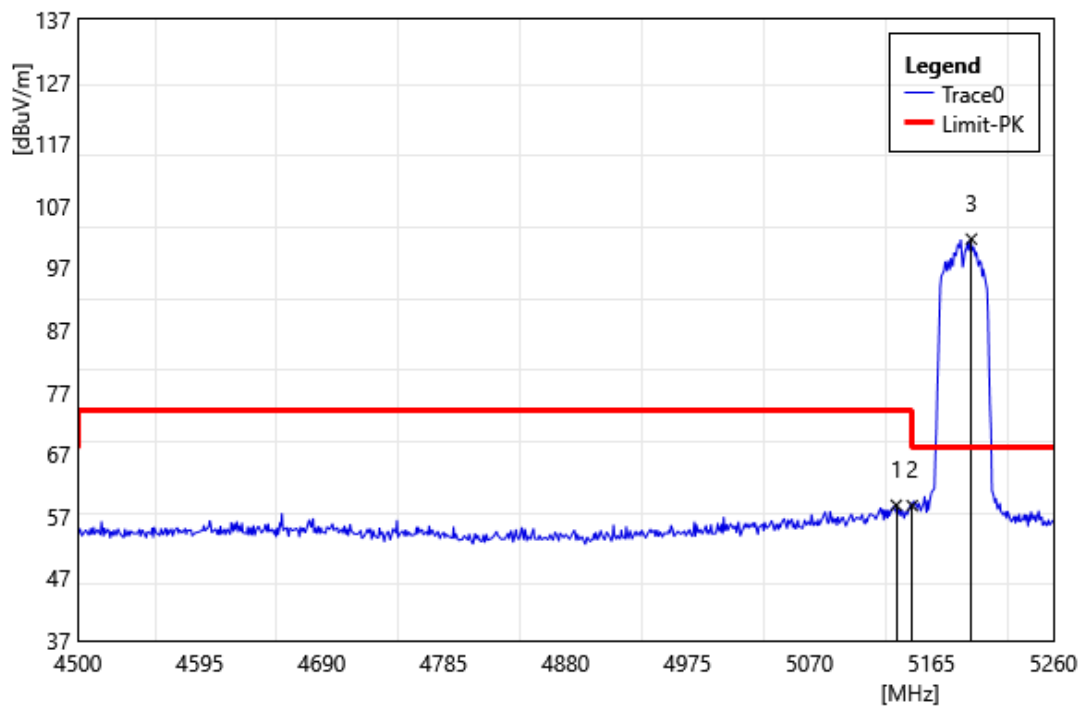


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5137.64	56.28	2.50	58.78	74.00	-15.22	PEAK
2	5150.00	56.15	2.56	58.71	74.00	-15.29	PEAK
3	5196.16	99.13	2.53	101.66	68.20	33.46	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

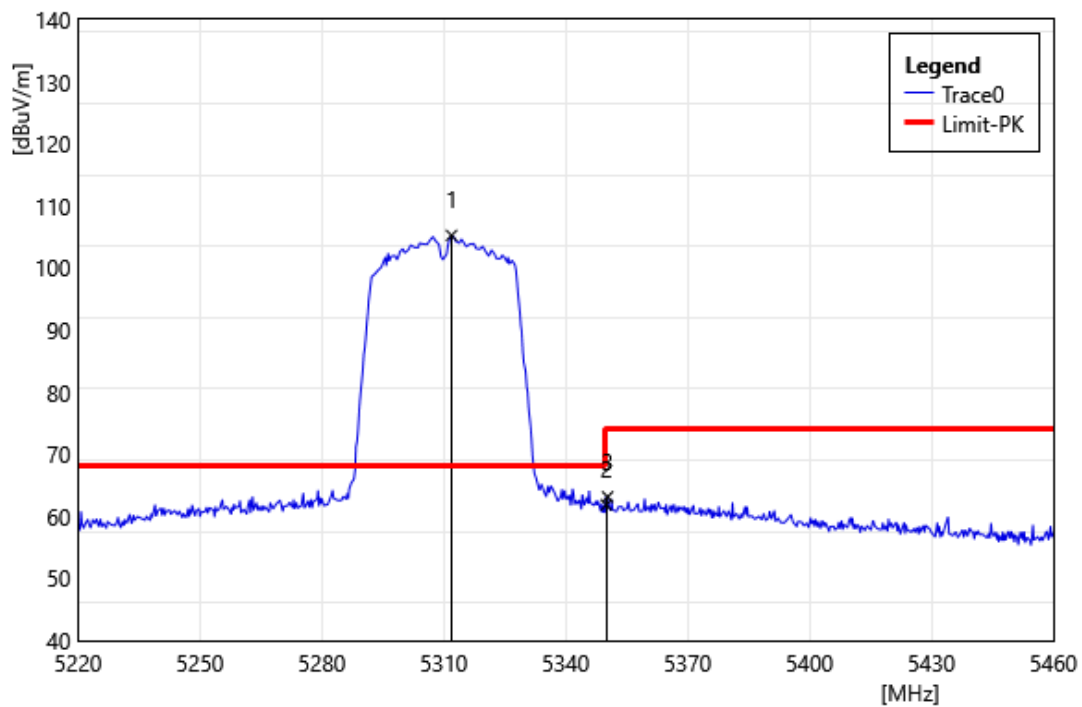


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5311.92	102.70	2.55	105.25	68.20	37.05	PEAK
2	5350.00	59.33	2.51	61.84	74.00	-12.16	PEAK
3	5350.32	60.63	2.51	63.14	74.00	-10.86	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

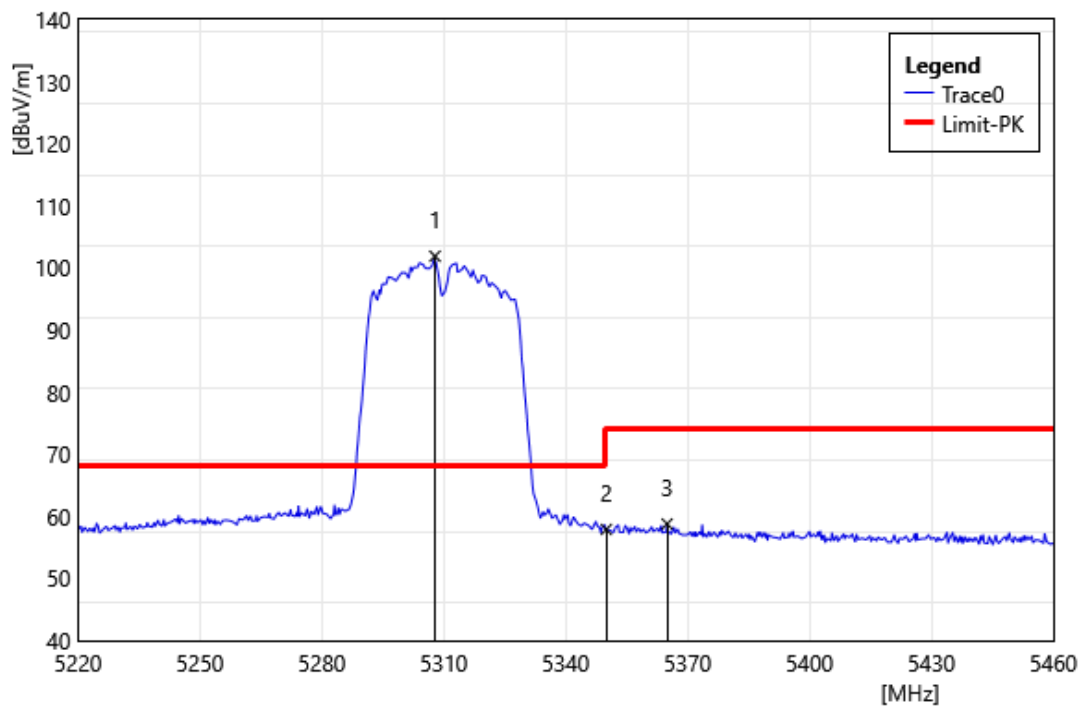


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5307.84	99.38	2.53	101.91	68.20	33.71	PEAK
2	5350.00	55.38	2.51	57.89	74.00	-16.11	PEAK
3	5364.96	56.24	2.53	58.77	74.00	-15.23	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

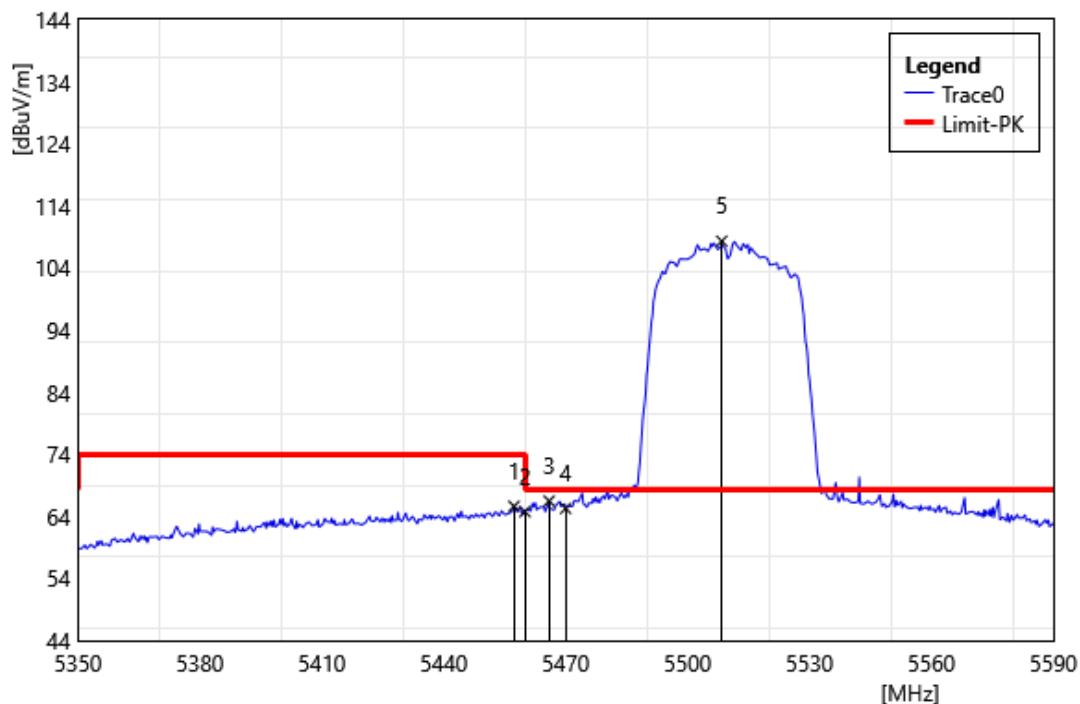


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.28	62.70	2.91	65.61	74.00	-8.39	PEAK
2	5460.00	61.81	2.93	64.74	74.00	-9.26	PEAK
3	5465.92	63.48	2.99	66.47	68.20	-1.73	PEAK
4	5470.00	62.26	3.02	65.28	68.20	-2.92	PEAK
5	5508.40	104.98	3.34	108.32	68.20	40.12	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

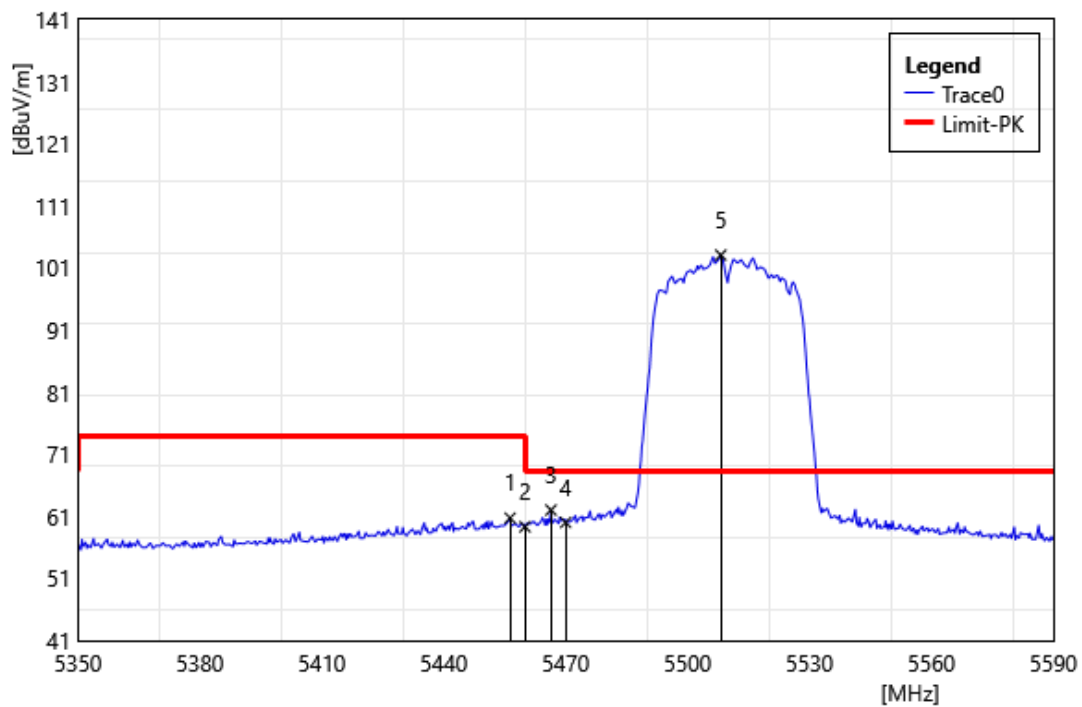


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.32	57.83	2.90	60.73	74.00	-13.27	PEAK
2	5460.00	56.39	2.93	59.32	74.00	-14.68	PEAK
3	5466.40	59.03	2.99	62.02	68.20	-6.18	PEAK
4	5470.00	56.99	3.02	60.01	68.20	-8.19	PEAK
5	5508.16	99.74	3.34	103.08	68.20	34.88	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5670 MHz		
Polarization:	Horizontal		
Remark:			

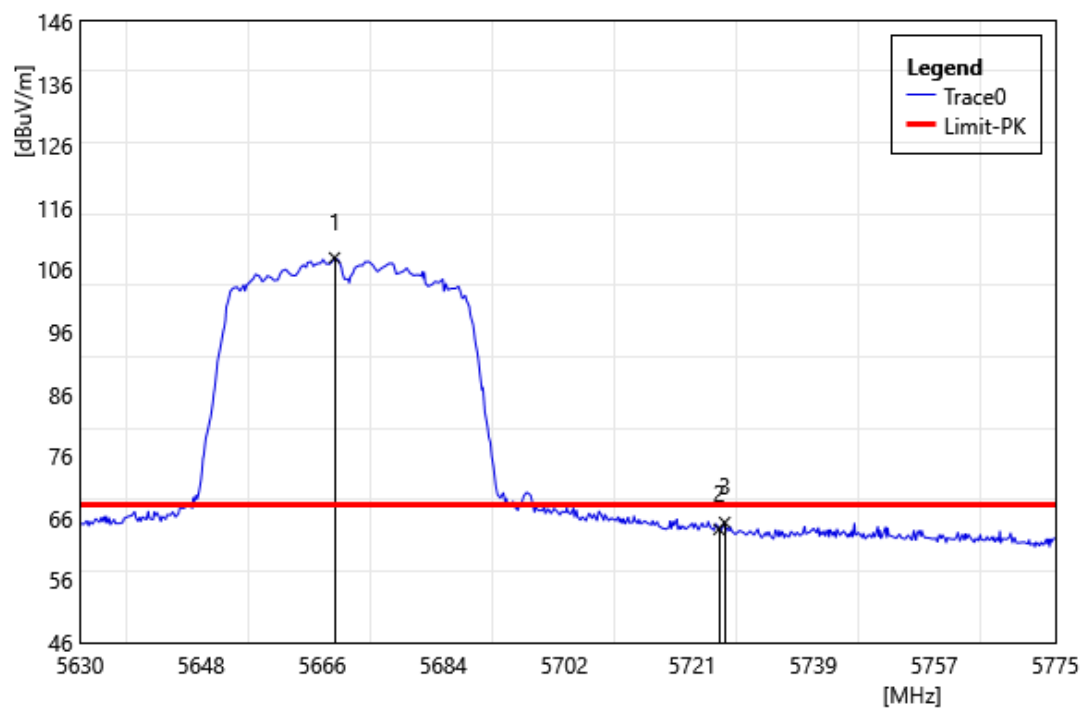


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5667.85	104.20	3.75	107.95	68.20	39.75	PEAK
2	5725.00	60.22	4.00	64.22	68.20	-3.98	PEAK
3	5725.85	61.33	4.01	65.34	68.20	-2.86	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5670 MHz		
Polarization:	Vertical		
Remark:			

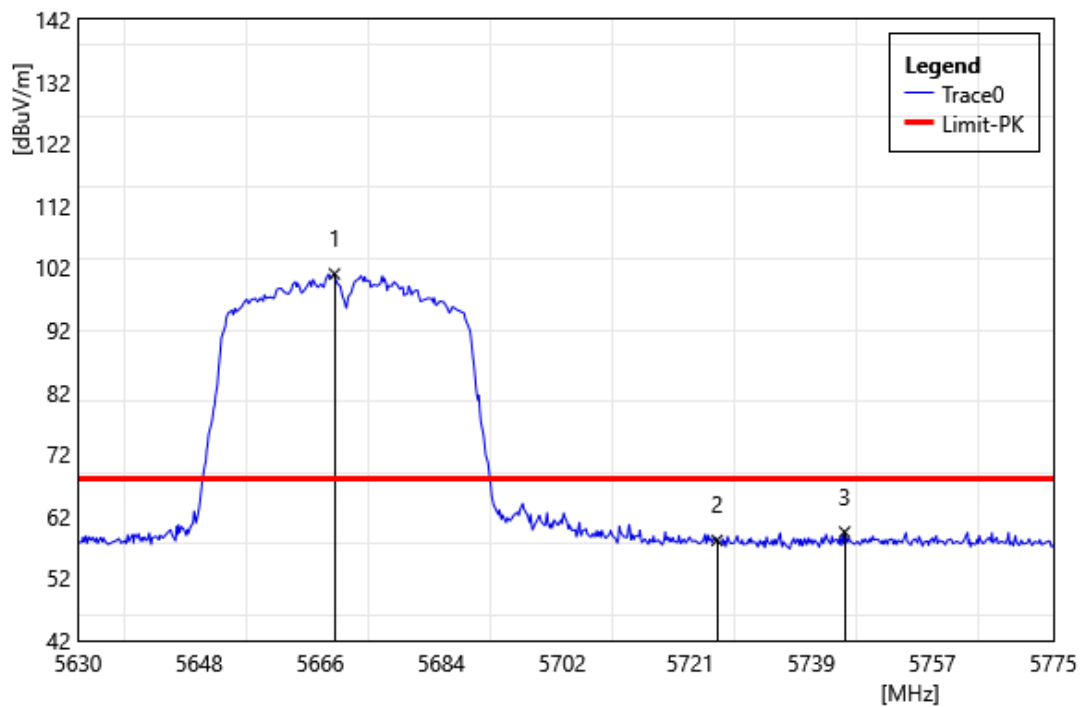


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5668.14	97.30	3.75	101.05	68.20	32.85	PEAK
2	5725.00	54.12	4.00	58.12	68.20	-10.08	PEAK
3	5743.97	55.35	4.13	59.48	68.20	-8.72	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

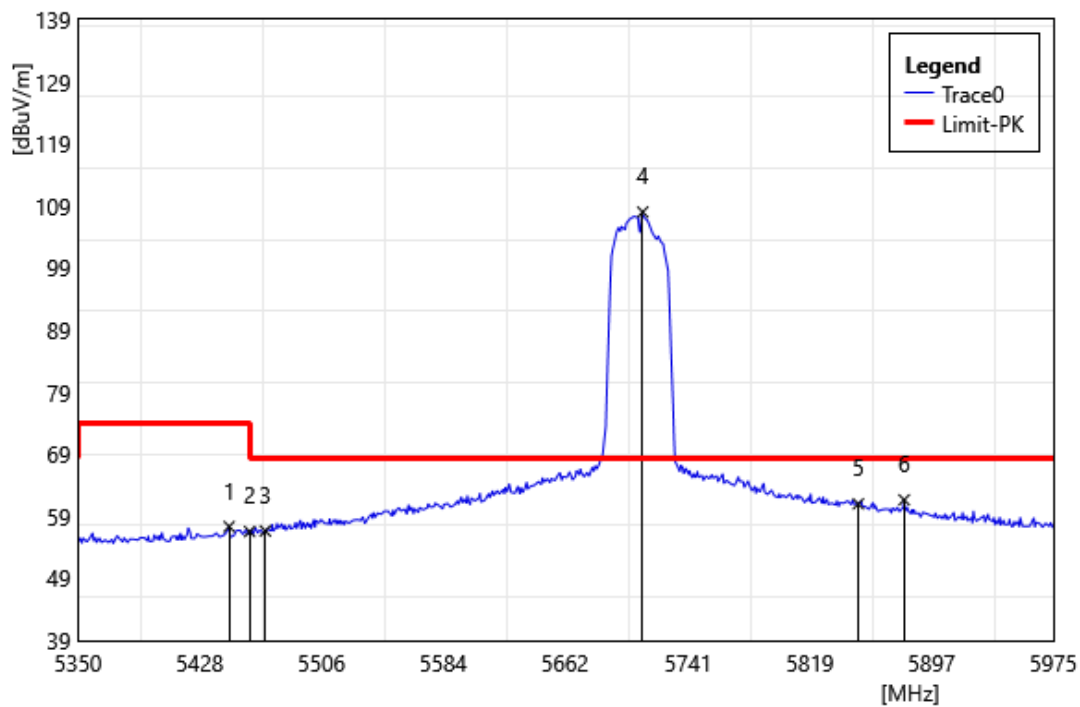


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5446.88	54.52	2.83	57.35	74.00	-16.65	PEAK
2	5460.00	53.62	2.93	56.55	74.00	-17.45	PEAK
3	5470.00	53.63	3.02	56.65	68.20	-11.55	PEAK
4	5711.88	104.10	3.91	108.01	68.20	39.81	PEAK
5	5850.00	56.47	4.55	61.02	68.20	-7.18	PEAK
6	5879.38	57.09	4.57	61.66	68.20	-6.54	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

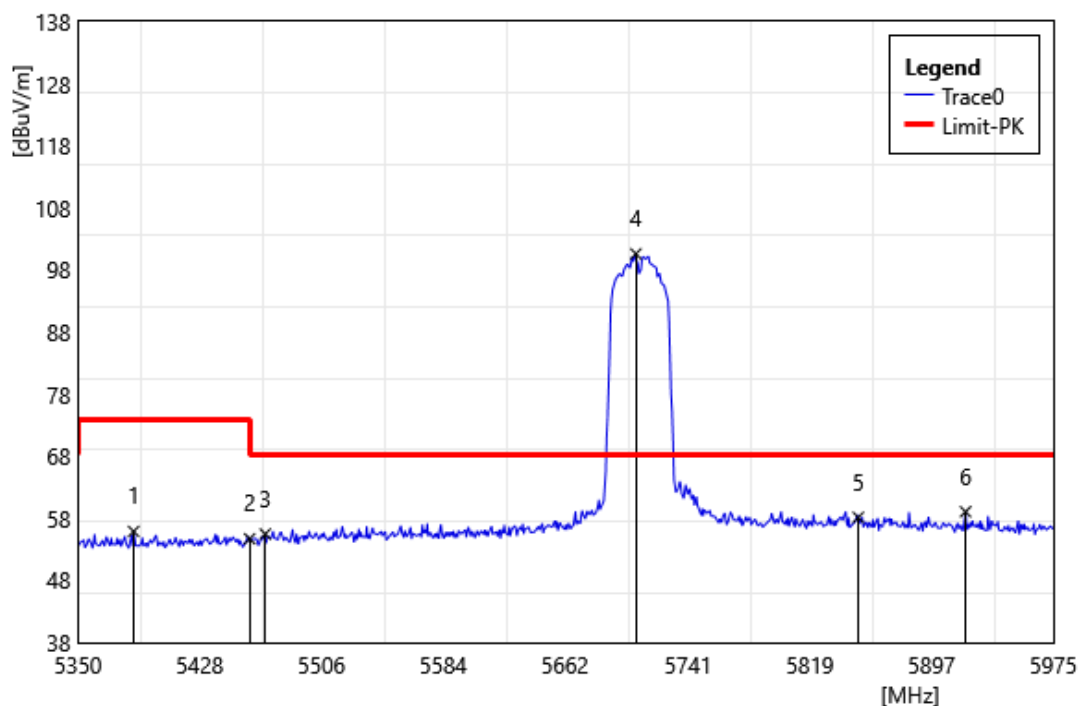


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5385.63	53.34	2.56	55.90	74.00	-18.10	PEAK
2	5460.00	51.79	2.93	54.72	74.00	-19.28	PEAK
3	5470.00	52.45	3.02	55.47	68.20	-12.73	PEAK
4	5707.50	96.71	3.89	100.60	68.20	32.40	PEAK
5	5850.00	53.61	4.55	58.16	68.20	-10.04	PEAK
6	5918.75	54.58	4.49	59.07	68.20	-9.13	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5755		
	MHz		
Polarization:	Horizontal		
Remark:			

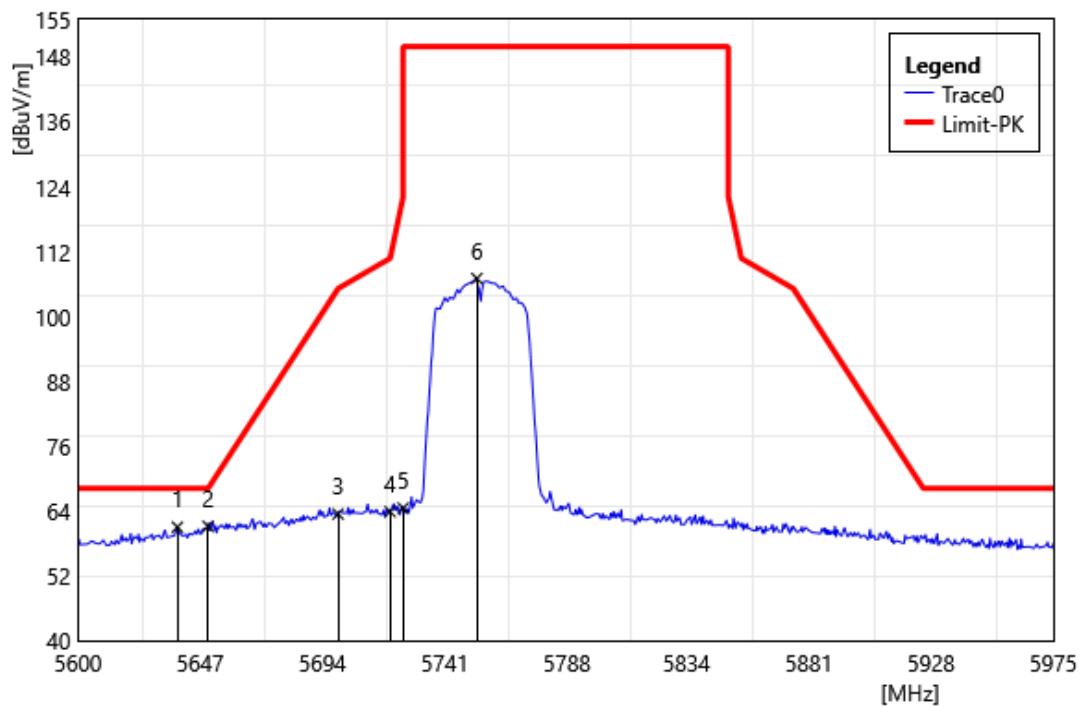


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5638.25	57.41	3.60	61.01	68.20	-7.19	PEAK
2	5650.00	57.46	3.70	61.16	68.20	-7.04	PEAK
3	5700.00	59.60	3.84	63.44	105.20	-41.76	PEAK
4	5720.00	59.89	3.97	63.86	110.80	-46.94	PEAK
5	5725.00	60.54	4.00	64.54	150.00	-85.46	PEAK
6	5753.38	102.88	4.19	107.07	150.00	-42.93	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5755		
	MHz		
Polarization:	Vertical		
Remark:			

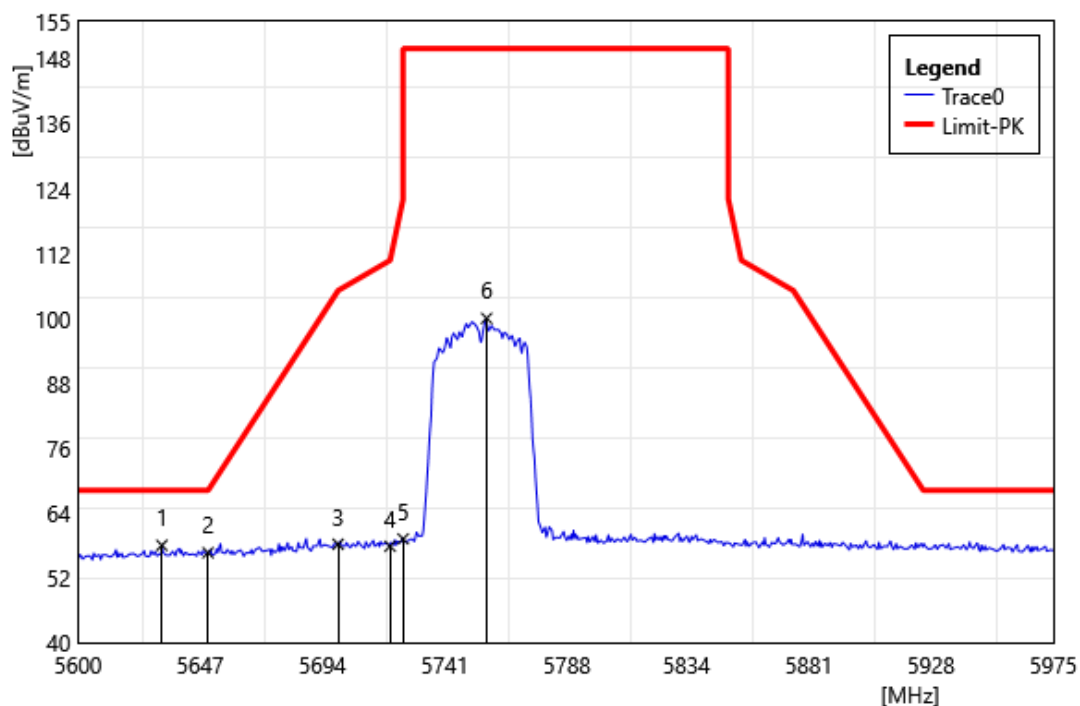


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5632.25	54.46	3.55	58.01	68.20	-10.19	PEAK
2	5650.00	52.94	3.70	56.64	68.20	-11.56	PEAK
3	5700.00	54.36	3.84	58.20	105.20	-47.00	PEAK
4	5720.00	53.87	3.97	57.84	110.80	-52.96	PEAK
5	5725.00	55.20	4.00	59.20	150.00	-90.80	PEAK
6	5757.13	95.82	4.22	100.04	150.00	-49.96	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5795		
	MHz		
Polarization:	Horizontal		
Remark:			

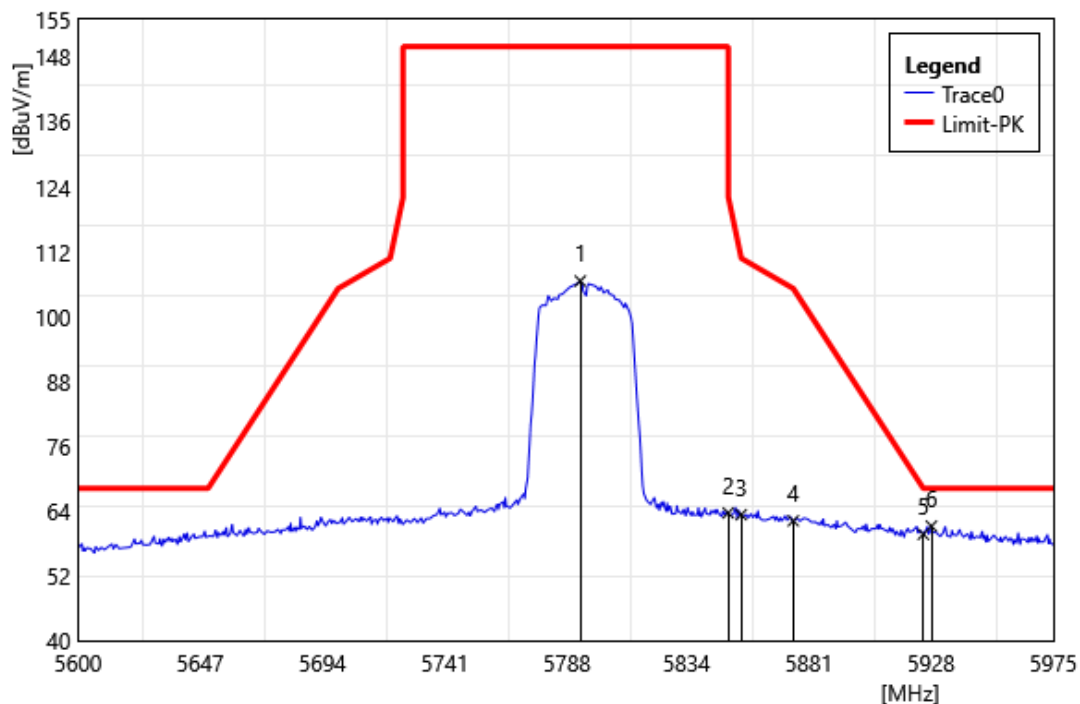


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5793.13	102.21	4.38	106.59	150.00	-43.41	PEAK
2	5850.00	59.08	4.55	63.63	122.20	-58.57	PEAK
3	5855.00	58.75	4.55	63.30	110.80	-47.50	PEAK
4	5875.00	57.60	4.57	62.17	105.20	-43.03	PEAK
5	5925.00	55.22	4.45	59.67	68.20	-8.53	PEAK
6	5928.13	56.76	4.43	61.19	68.20	-7.01	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5795		
	MHz		
Polarization:	Vertical		
Remark:			

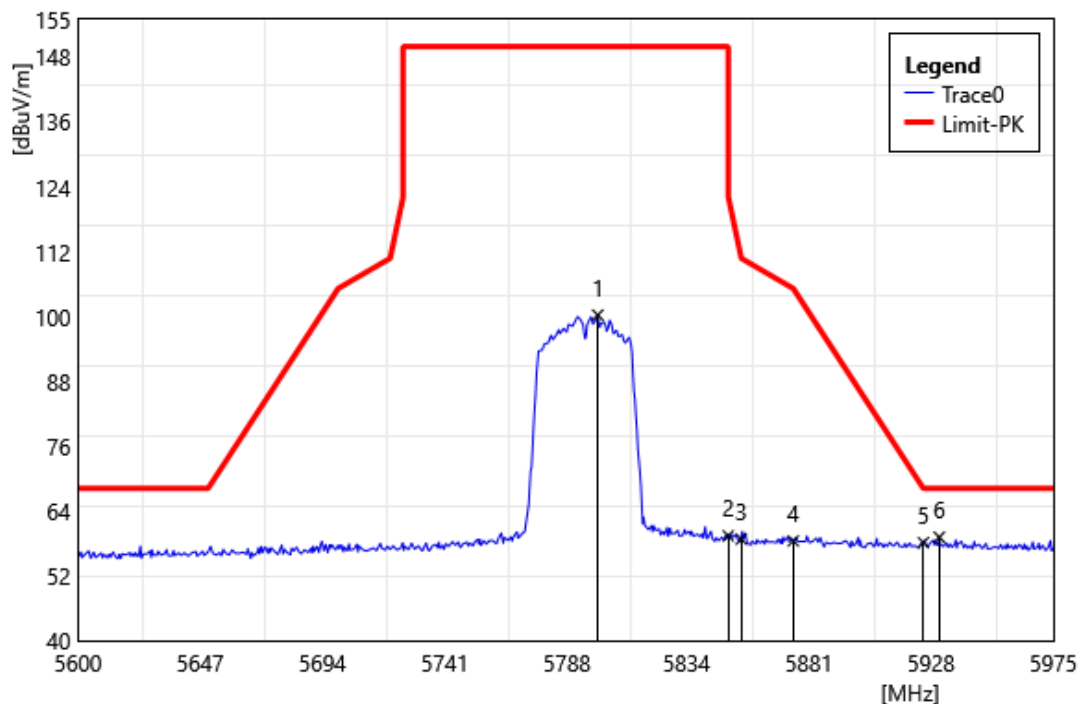


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5799.88	95.87	4.42	100.29	150.00	-49.71	PEAK
2	5850.00	54.84	4.55	59.39	122.20	-62.81	PEAK
3	5855.00	54.22	4.55	58.77	110.80	-52.03	PEAK
4	5875.00	53.87	4.57	58.44	105.20	-46.76	PEAK
5	5925.00	53.69	4.45	58.14	68.20	-10.06	PEAK
6	5931.13	54.74	4.41	59.15	68.20	-9.05	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

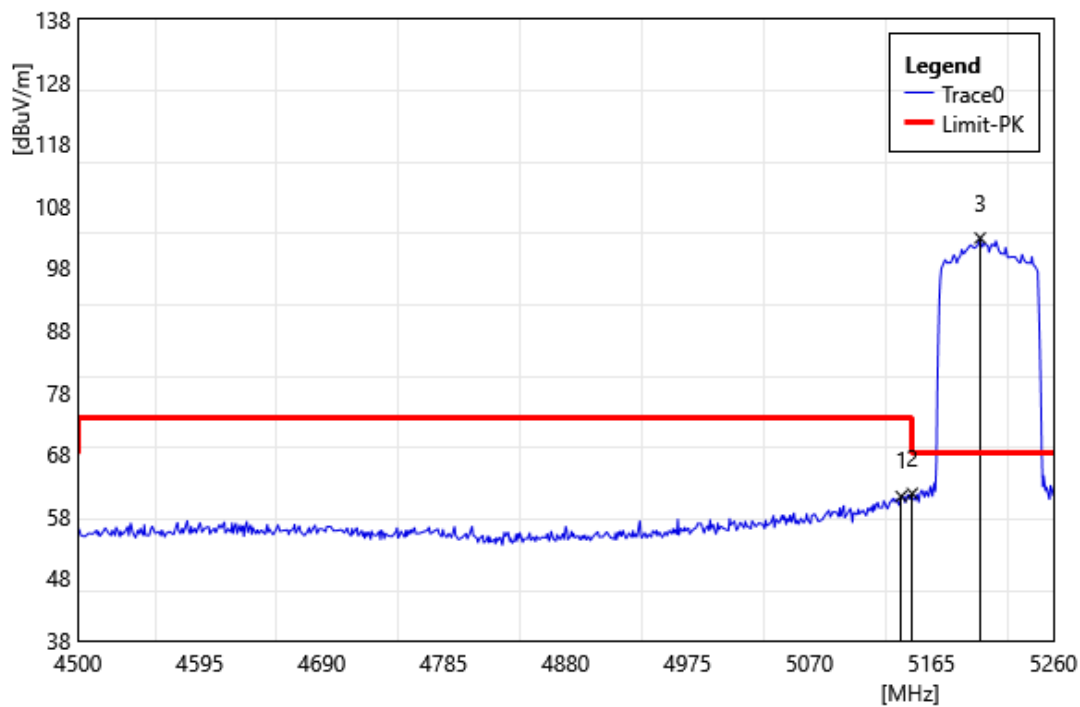


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5141.44	58.69	2.52	61.21	74.00	-12.79	PEAK
2	5150.00	59.11	2.56	61.67	74.00	-12.33	PEAK
3	5203.00	100.31	2.52	102.83	68.20	34.63	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

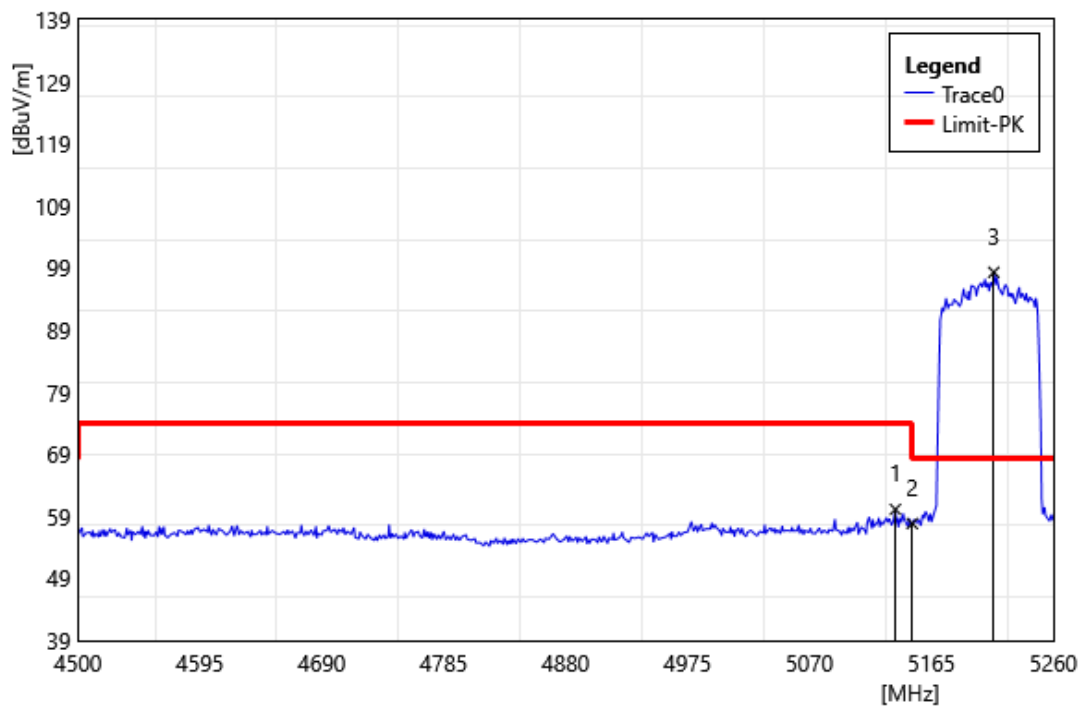


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5136.88	57.63	2.49	60.12	74.00	-13.88	PEAK
2	5150.00	55.28	2.56	57.84	74.00	-16.16	PEAK
3	5213.64	95.79	2.51	98.30	68.20	30.10	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

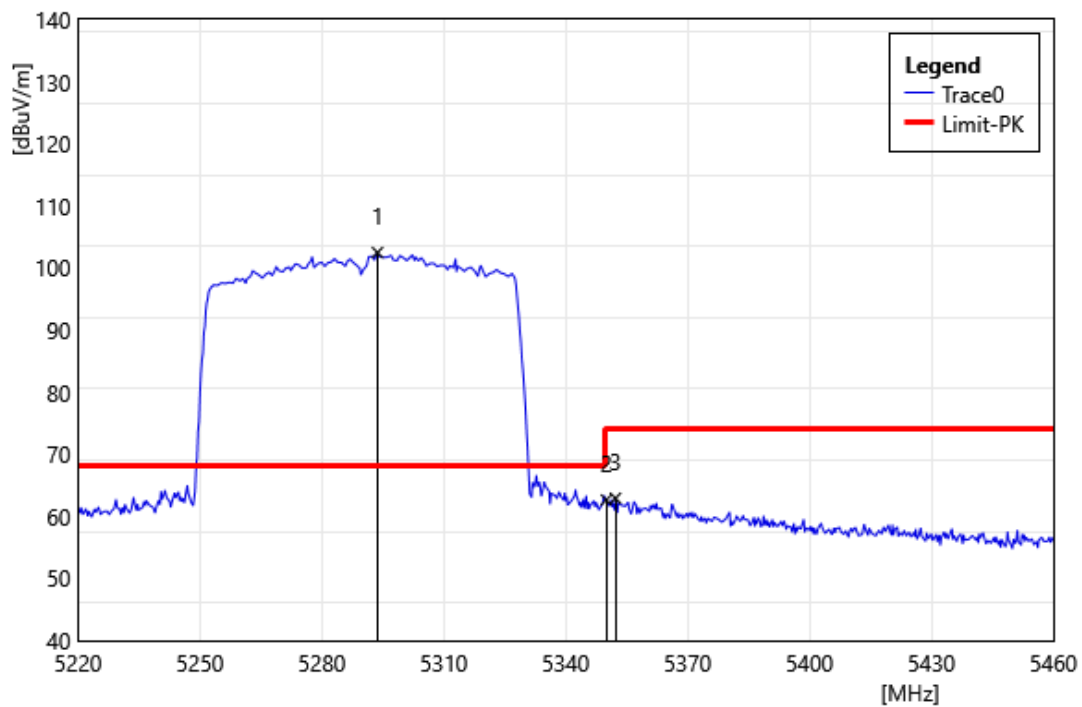


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5293.68	99.95	2.54	102.49	68.20	34.29	PEAK
2	5350.00	60.13	2.51	62.64	74.00	-11.36	PEAK
3	5352.24	60.39	2.52	62.91	74.00	-11.09	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

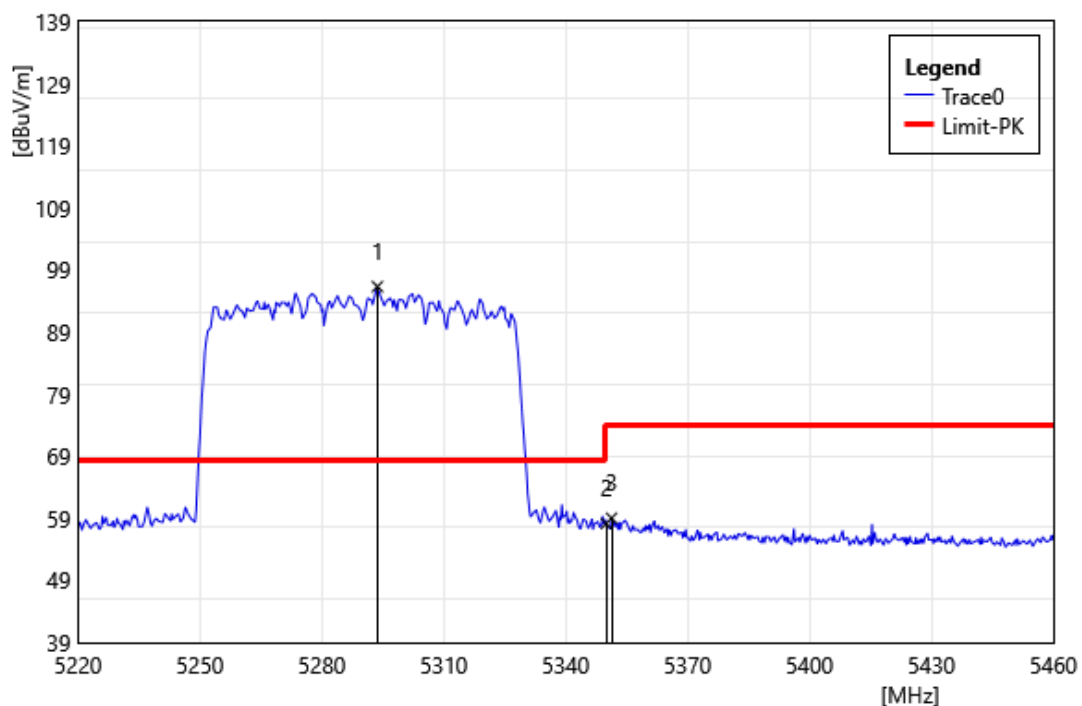


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5293.68	93.78	2.54	96.32	68.20	28.12	PEAK
2	5350.00	55.66	2.51	58.17	74.00	-15.83	PEAK
3	5351.28	56.51	2.52	59.03	74.00	-14.97	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

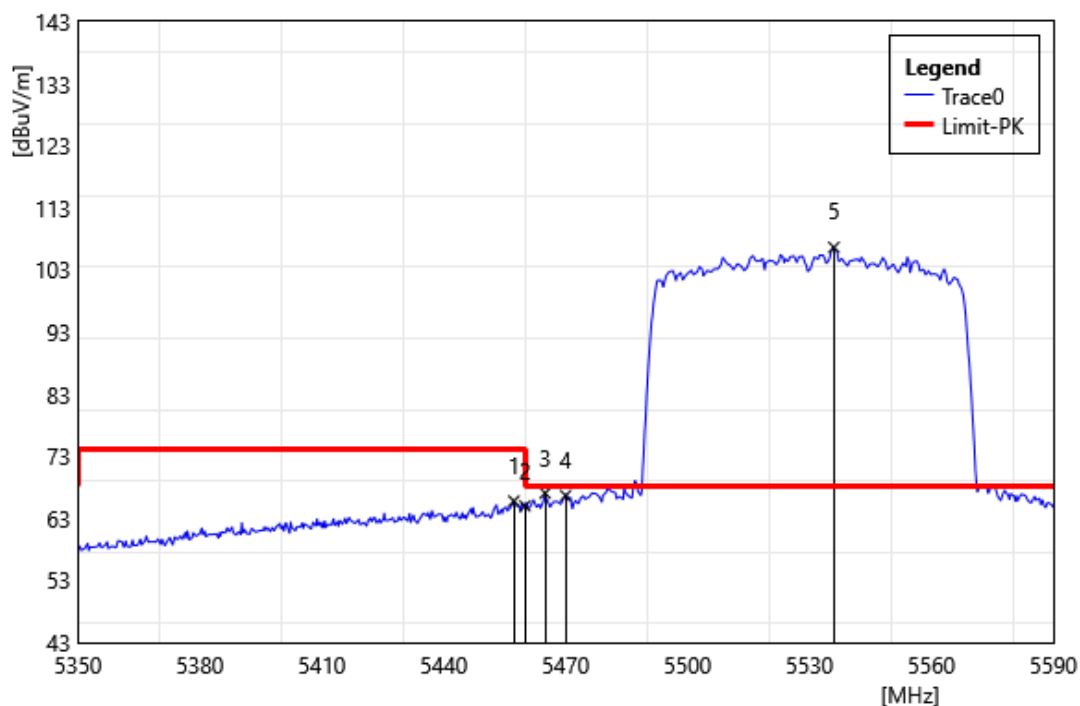


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.28	62.87	2.91	65.78	74.00	-8.22	PEAK
2	5460.00	62.06	2.93	64.99	74.00	-9.01	PEAK
3	5464.96	64.08	2.98	67.06	68.20	-1.14	PEAK
4	5470.00	63.65	3.02	66.67	68.20	-1.53	PEAK
5	5536.00	103.19	3.46	106.65	68.20	38.45	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

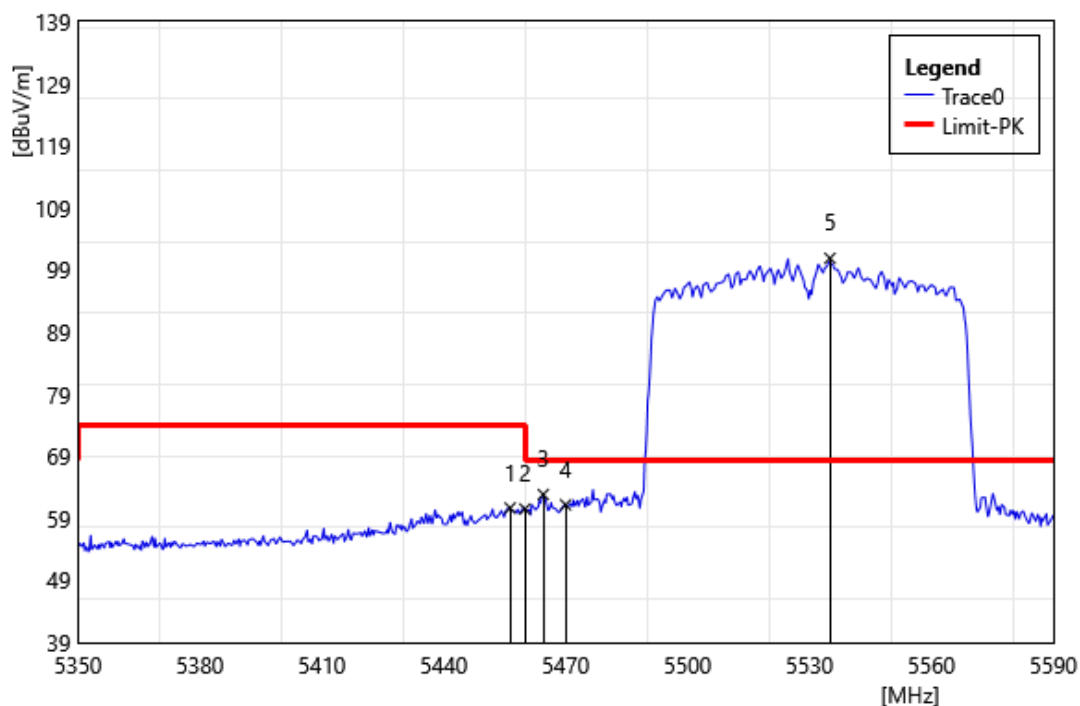


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.32	57.77	2.90	60.67	74.00	-13.33	PEAK
2	5460.00	57.58	2.93	60.51	74.00	-13.49	PEAK
3	5464.48	59.86	2.98	62.84	68.20	-5.36	PEAK
4	5470.00	58.16	3.02	61.18	68.20	-7.02	PEAK
5	5535.04	97.42	3.46	100.88	68.20	32.68	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

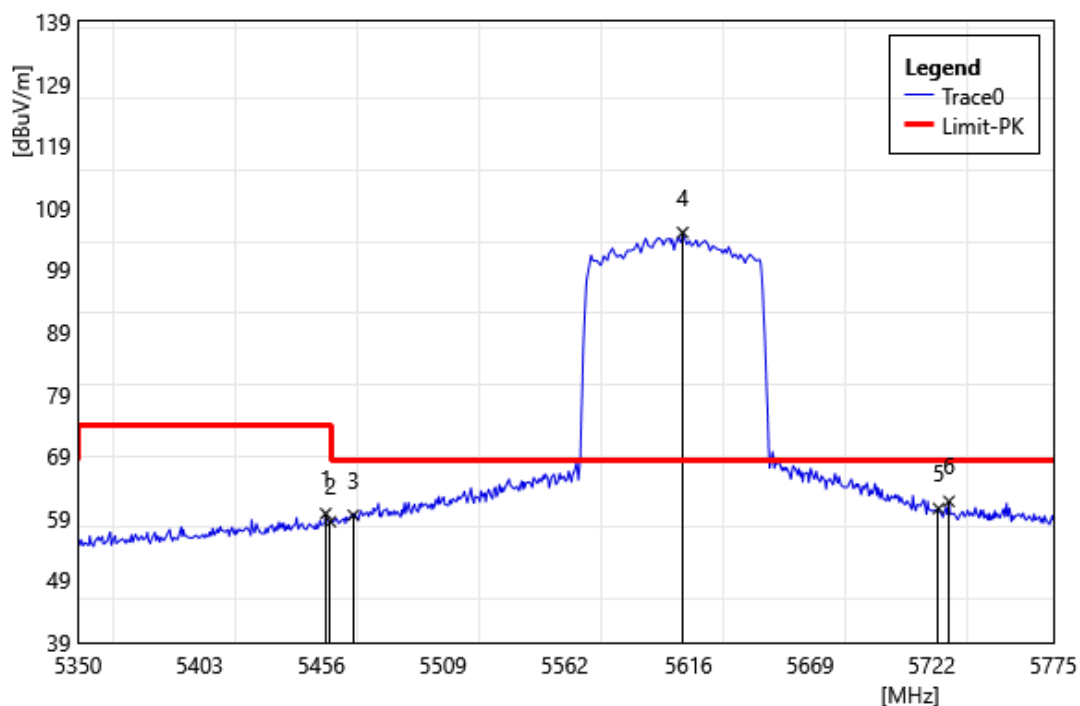


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.95	56.85	2.91	59.76	74.00	-14.24	PEAK
2	5460.00	55.54	2.93	58.47	74.00	-15.53	PEAK
3	5470.00	56.49	3.02	59.51	68.20	-8.69	PEAK
4	5613.50	101.63	3.39	105.02	68.20	36.82	PEAK
5	5725.00	56.59	4.00	60.59	68.20	-7.61	PEAK
6	5729.53	57.69	4.04	61.73	68.20	-6.47	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

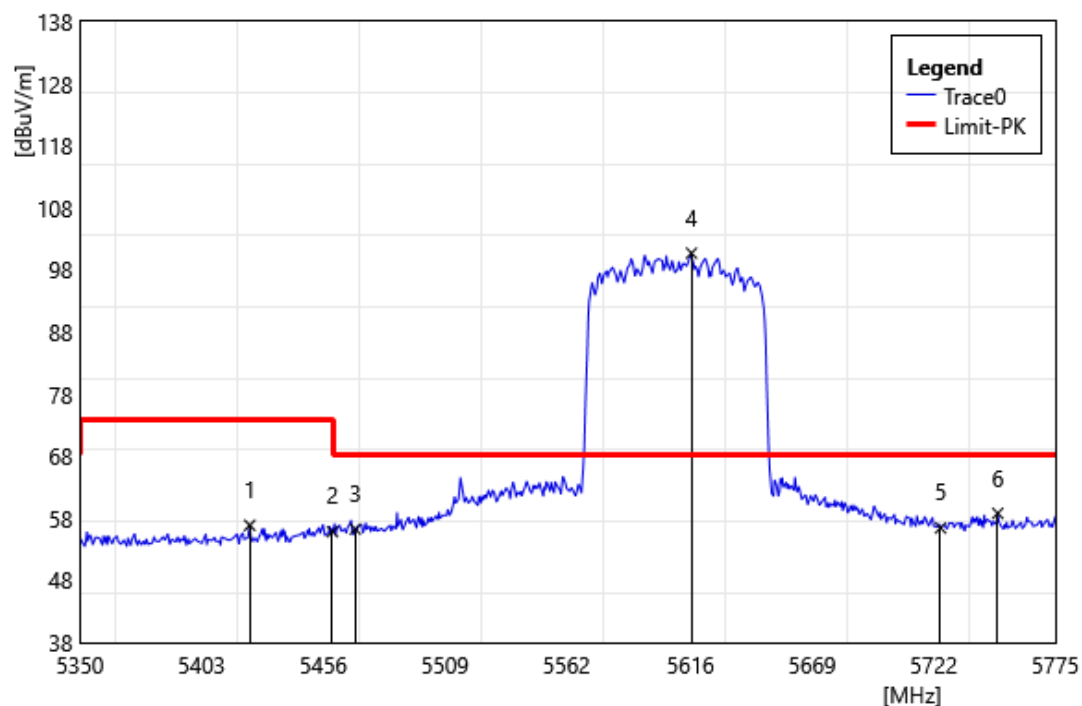


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5423.95	54.18	2.70	56.88	74.00	-17.12	PEAK
2	5460.00	52.92	2.93	55.85	74.00	-18.15	PEAK
3	5470.00	53.26	3.02	56.28	68.20	-11.92	PEAK
4	5616.48	97.29	3.41	100.70	68.20	32.50	PEAK
5	5725.00	52.44	4.00	56.44	68.20	-11.76	PEAK
6	5749.93	54.62	4.18	58.80	68.20	-9.40	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5690		
	MHz		
Polarization:	Horizontal		
Remark:			

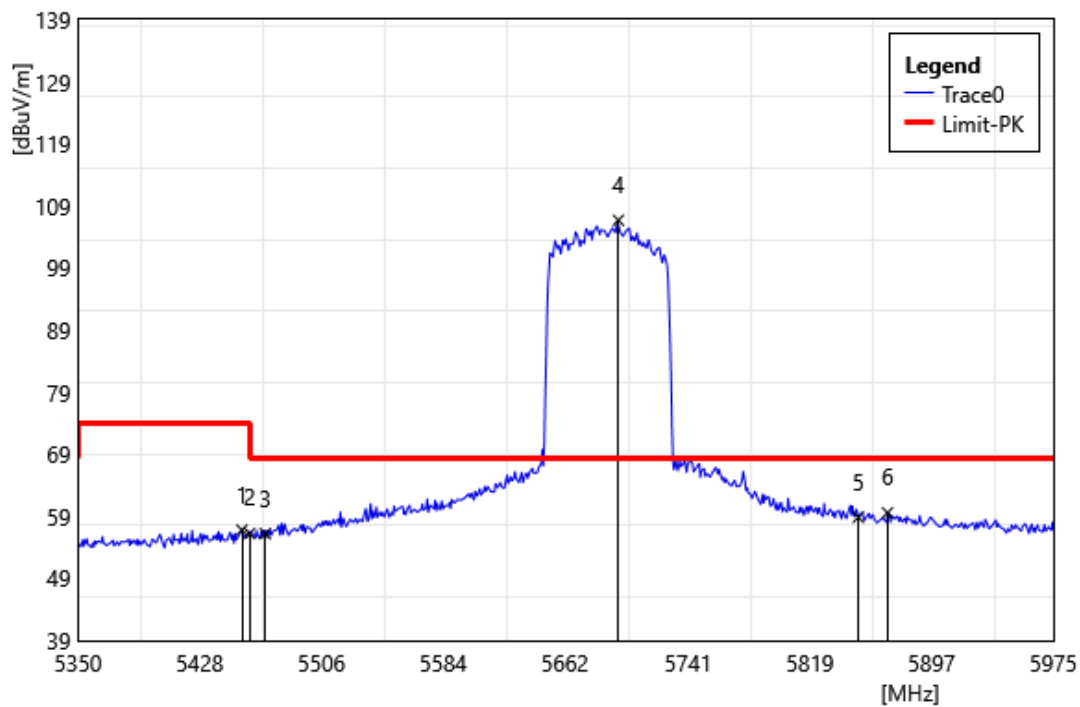


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.00	53.91	2.89	56.80	74.00	-17.20	PEAK
2	5460.00	53.31	2.93	56.24	74.00	-17.76	PEAK
3	5470.00	53.20	3.02	56.22	68.20	-11.98	PEAK
4	5696.25	102.86	3.82	106.68	68.20	38.48	PEAK
5	5850.00	54.30	4.55	58.85	68.20	-9.35	PEAK
6	5868.75	55.01	4.56	59.57	68.20	-8.63	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

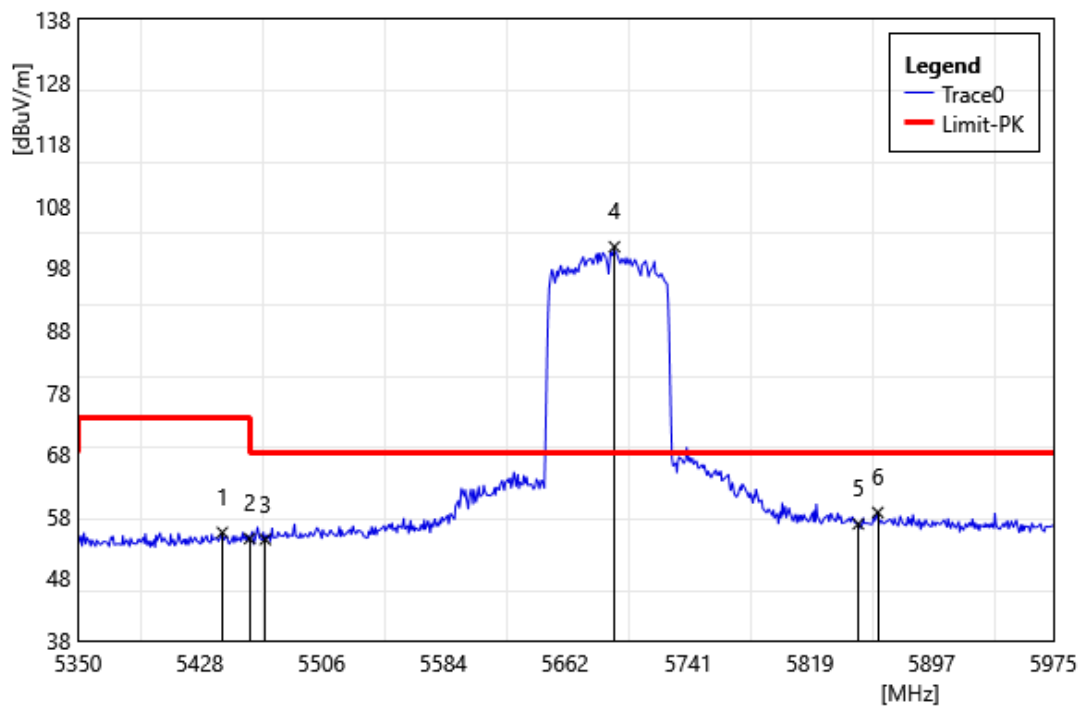

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5442.50	52.61	2.80	55.41	74.00	-18.59	PEAK
2	5460.00	51.48	2.93	54.41	74.00	-19.59	PEAK
3	5470.00	51.27	3.02	54.29	68.20	-13.91	PEAK
4	5693.75	97.58	3.82	101.40	68.20	33.20	PEAK
5	5850.00	52.23	4.55	56.78	68.20	-11.42	PEAK
6	5862.50	54.06	4.56	58.63	68.20	-9.58	PEAK


Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775		
	MHz		
Polarization:	Horizontal		
Remark:			

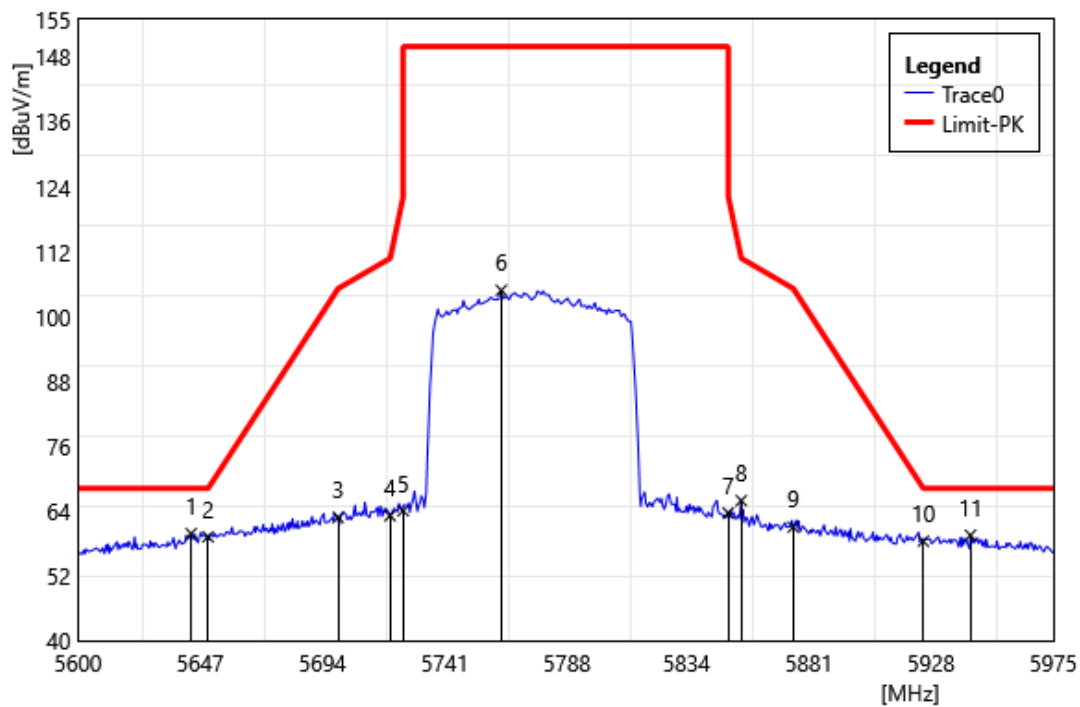

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775 MHz		
Polarization:	Horizontal		
Remark:			

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5643.50	56.15	3.65	59.80	68.20	-8.40	PEAK
2	5650.00	55.50	3.70	59.20	68.20	-9.00	PEAK
3	5700.00	58.95	3.84	62.79	105.20	-42.41	PEAK
4	5720.00	59.16	3.97	63.13	110.80	-47.67	PEAK
5	5725.00	60.02	4.00	64.02	150.00	-85.98	PEAK
6	5762.75	100.63	4.24	104.87	150.00	-45.13	PEAK
7	5850.00	59.06	4.55	63.61	122.20	-58.59	PEAK
8	5855.00	61.37	4.55	65.92	110.80	-44.88	PEAK
9	5875.00	56.44	4.57	61.01	105.20	-44.19	PEAK
10	5925.00	53.95	4.45	58.40	68.20	-9.81	PEAK
11	5943.13	55.16	4.35	59.51	68.20	-8.69	PEAK


Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775		
	MHz		
Polarization:	Vertical		
Remark:			

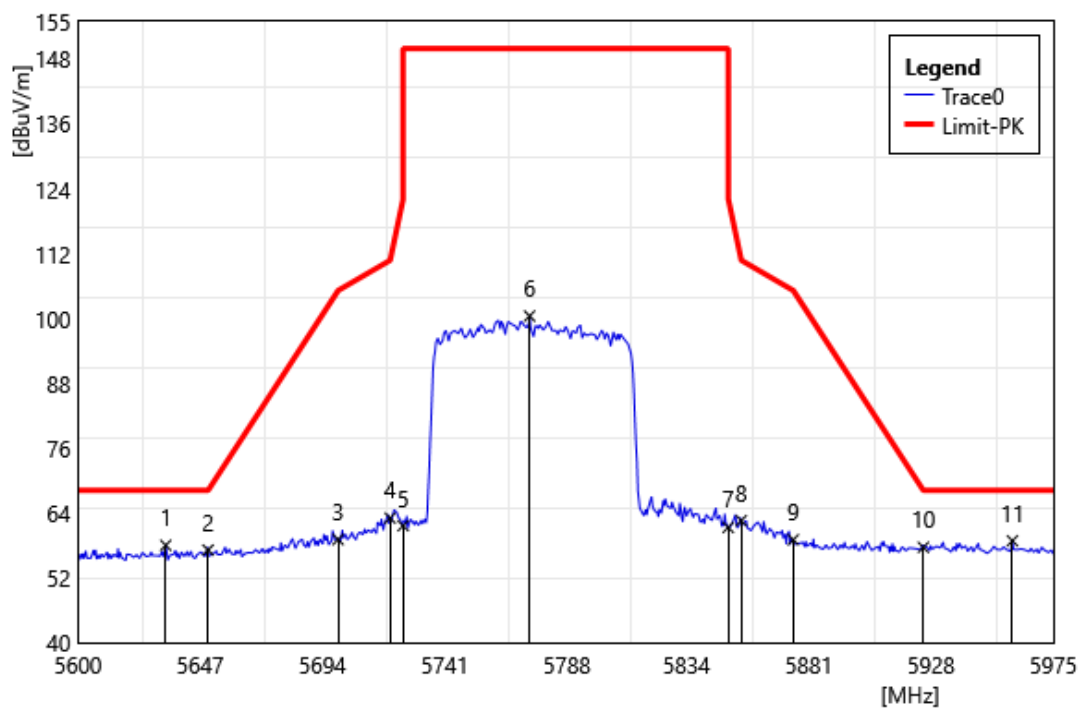

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775 MHz		
Polarization:	Vertical		
Remark:			


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5633.75	54.44	3.56	58.01	68.20	-10.20	PEAK
2	5650.00	53.44	3.70	57.14	68.20	-11.06	PEAK
3	5700.00	55.23	3.84	59.07	105.20	-46.13	PEAK
4	5720.00	59.09	3.97	63.06	110.80	-47.74	PEAK
5	5725.00	57.63	4.00	61.63	150.00	-88.37	PEAK
6	5773.63	96.18	4.29	100.48	150.00	-49.53	PEAK
7	5850.00	56.77	4.55	61.32	122.20	-60.88	PEAK
8	5855.00	58.03	4.55	62.58	110.80	-48.22	PEAK
9	5875.00	54.48	4.57	59.05	105.20	-46.15	PEAK
10	5925.00	53.19	4.45	57.64	68.20	-10.56	PEAK
11	5959.25	54.51	4.34	58.85	68.20	-9.35	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

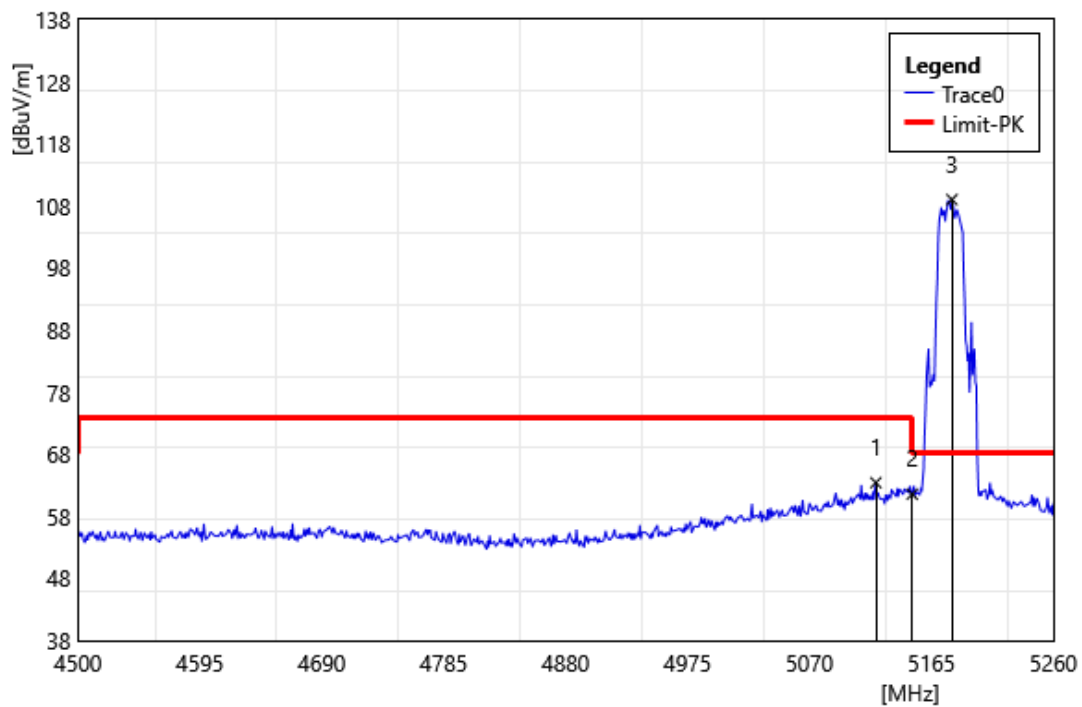


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5121.68	61.01	2.42	63.43	74.00	-10.57	PEAK
2	5150.00	59.02	2.56	61.58	74.00	-12.42	PEAK
3	5180.96	106.47	2.54	109.01	68.20	40.81	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

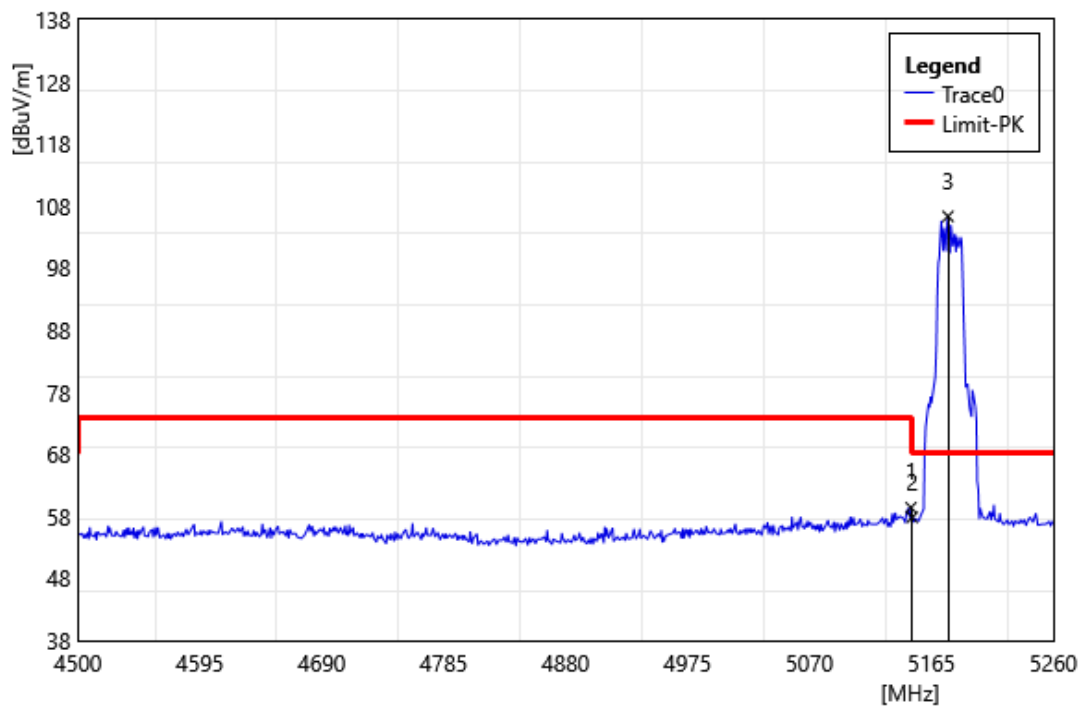


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5149.04	56.84	2.56	59.41	74.00	-14.60	PEAK
2	5150.00	55.27	2.56	57.83	74.00	-16.17	PEAK
3	5177.92	103.78	2.53	106.31	68.20	38.11	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5320		
	MHz		
Polarization:	Horizontal		
Remark:			

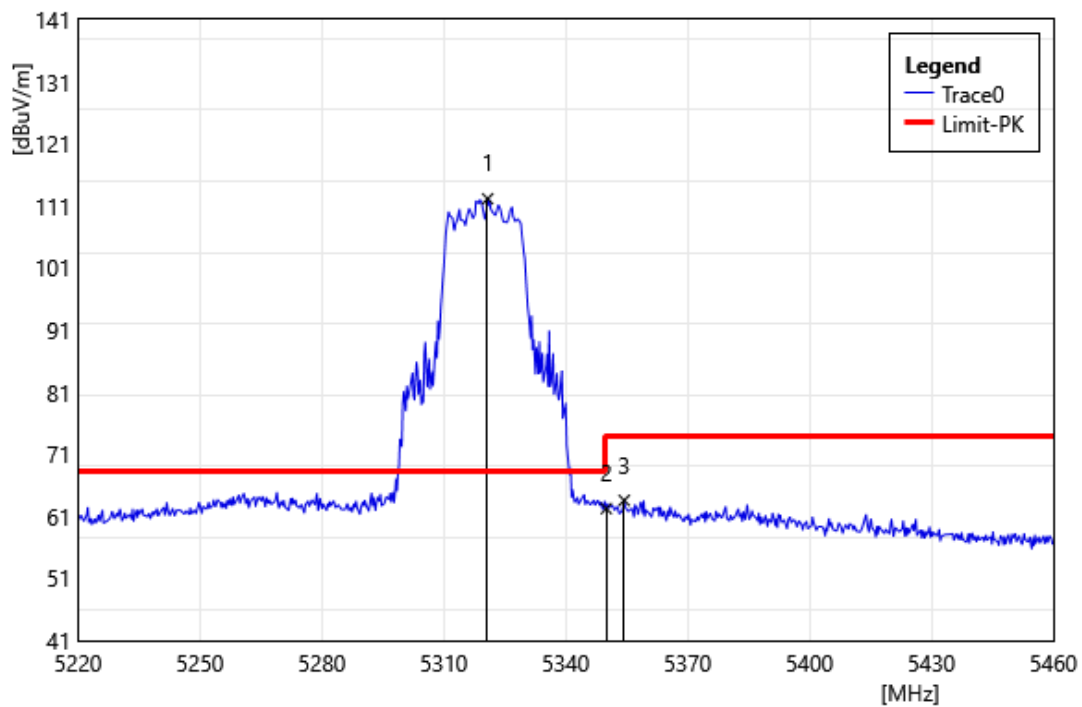

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5320.80	109.60	2.54	112.14	68.20	43.94	PEAK
2	5350.00	59.74	2.51	62.25	74.00	-11.75	PEAK
3	5354.40	61.05	2.52	63.57	74.00	-10.43	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5320		
	MHz		
Polarization:	Vertical		
Remark:			

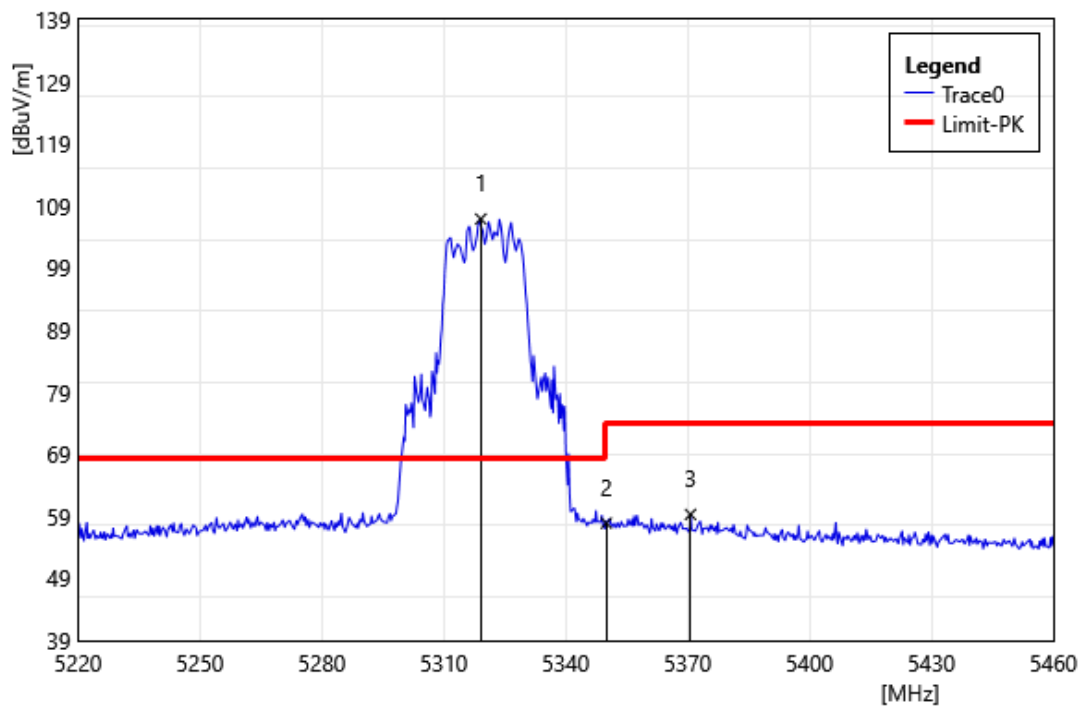

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5319.12	104.35	2.54	106.89	68.20	38.69	PEAK
2	5350.00	55.40	2.51	57.91	74.00	-16.09	PEAK
3	5370.72	56.76	2.54	59.30	74.00	-14.70	PEAK