



Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

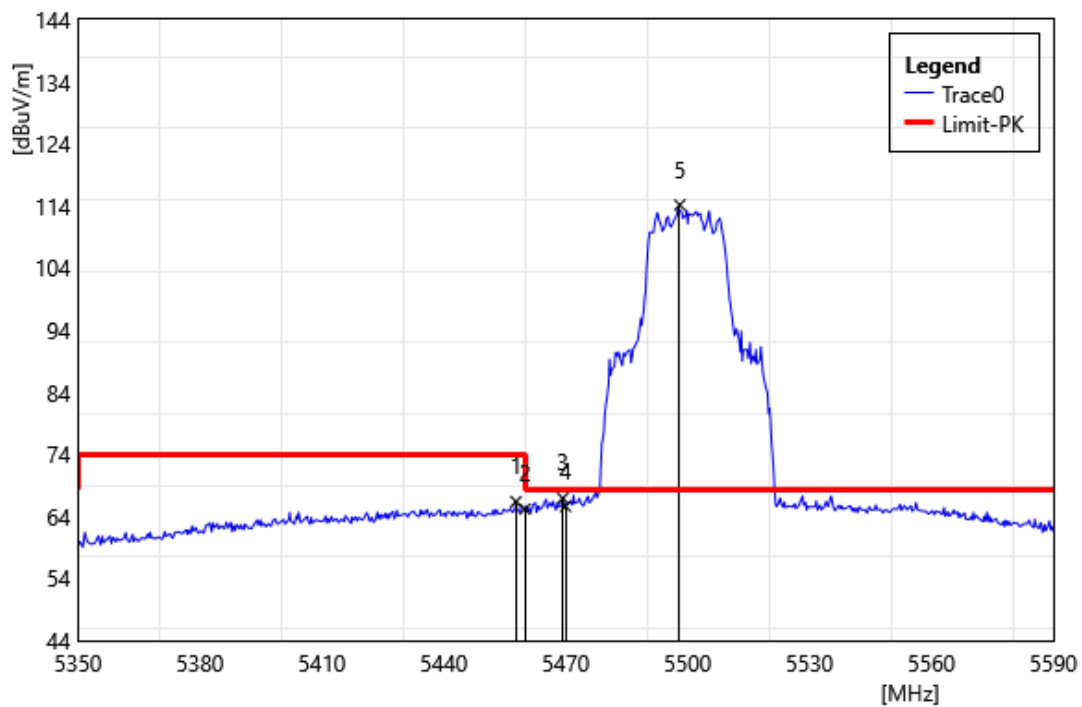


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.76	63.46	2.91	66.38	74.00	-7.63	PEAK
2	5460.00	62.22	2.93	65.15	74.00	-8.85	PEAK
3	5469.28	63.91	3.01	66.92	68.20	-1.28	PEAK
4	5470.00	62.59	3.02	65.61	68.20	-2.59	PEAK
5	5498.08	110.87	3.28	114.15	68.20	45.95	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5500		
	MHz		
Polarization:	Vertical		
Remark:			

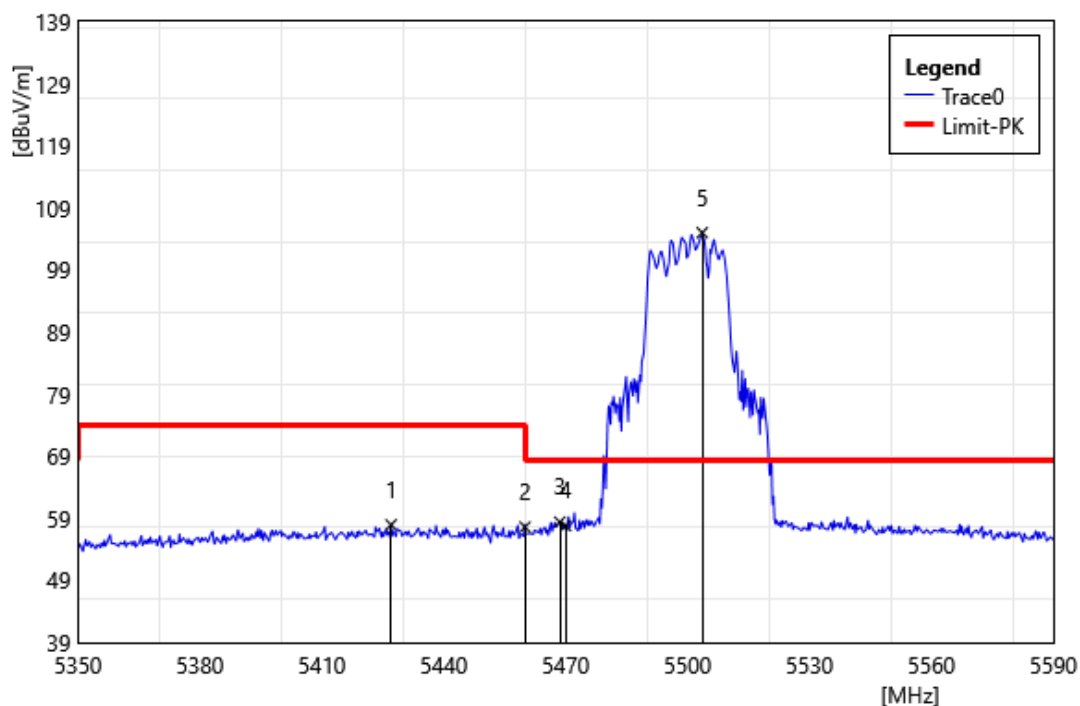


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5427.04	55.25	2.71	57.96	74.00	-16.04	PEAK
2	5460.00	54.68	2.93	57.61	74.00	-16.39	PEAK
3	5468.56	55.40	3.01	58.41	68.20	-9.79	PEAK
4	5470.00	54.79	3.02	57.81	68.20	-10.39	PEAK
5	5503.60	101.69	3.31	105.00	68.20	36.80	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5700		
	MHz		
Polarization:	Horizontal		
Remark:			

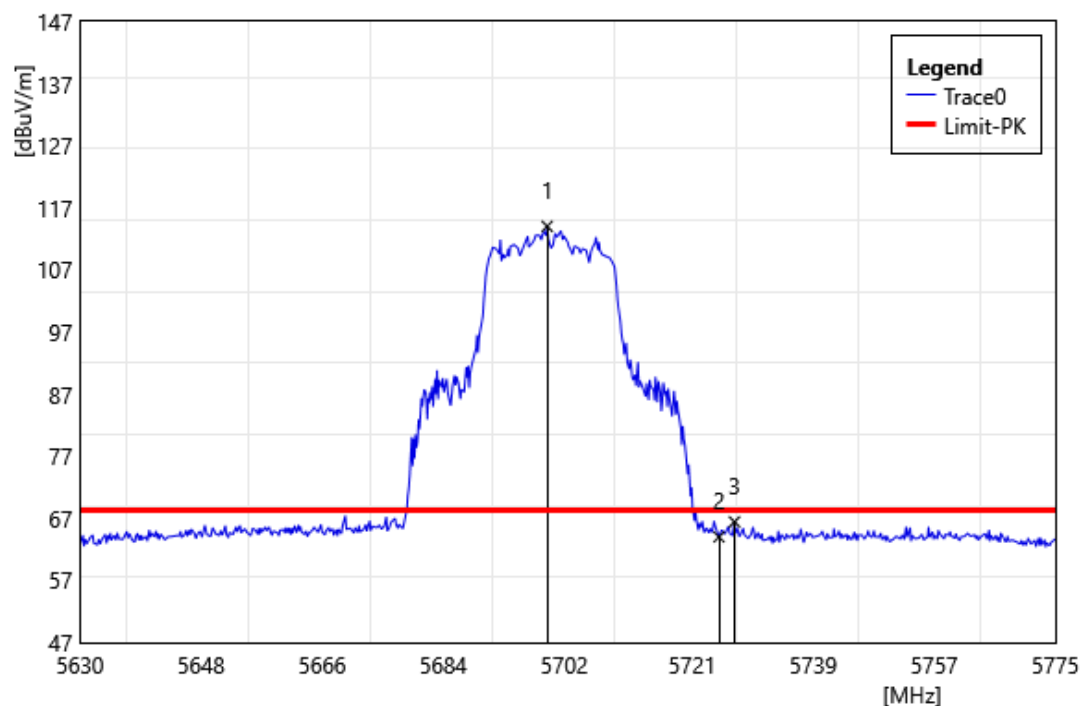


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5699.46	110.20	3.84	114.04	68.20	45.84	PEAK
2	5725.00	60.01	4.00	64.01	68.20	-4.19	PEAK
3	5727.30	62.42	4.02	66.44	68.20	-1.76	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5700		
	MHz		
Polarization:	Vertical		
Remark:			

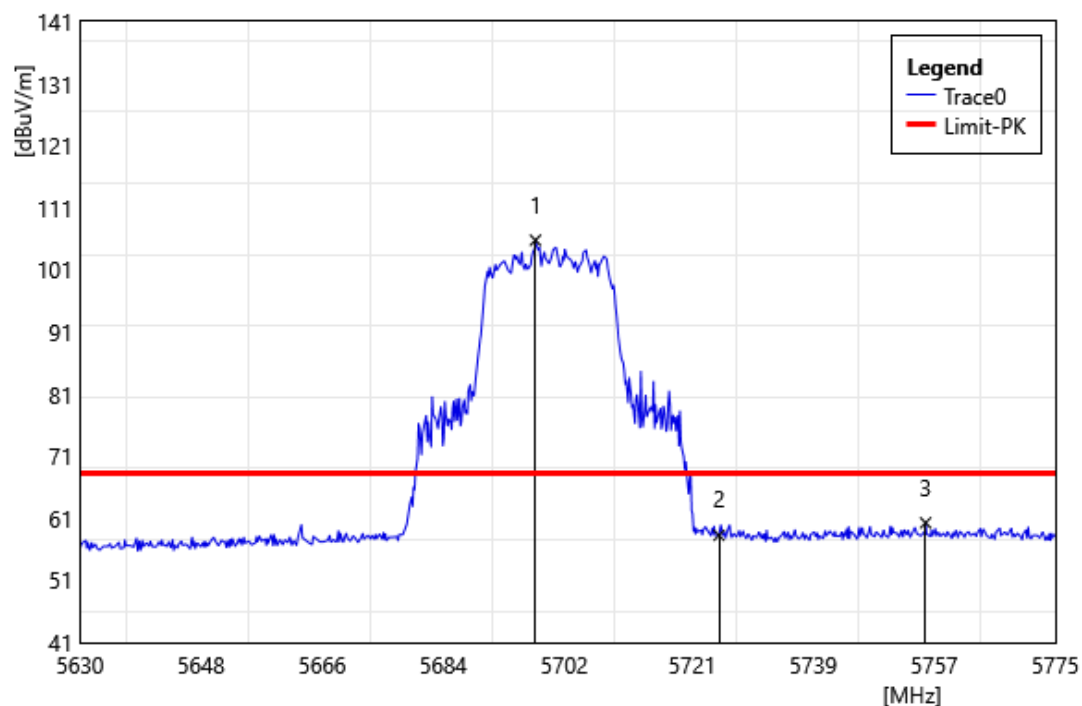


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5697.72	101.96	3.84	105.80	68.20	37.60	PEAK
2	5725.00	54.27	4.00	58.27	68.20	-9.93	PEAK
3	5755.72	56.08	4.20	60.29	68.20	-7.92	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5720		
	MHz		
Polarization:	Horizontal		
Remark:			

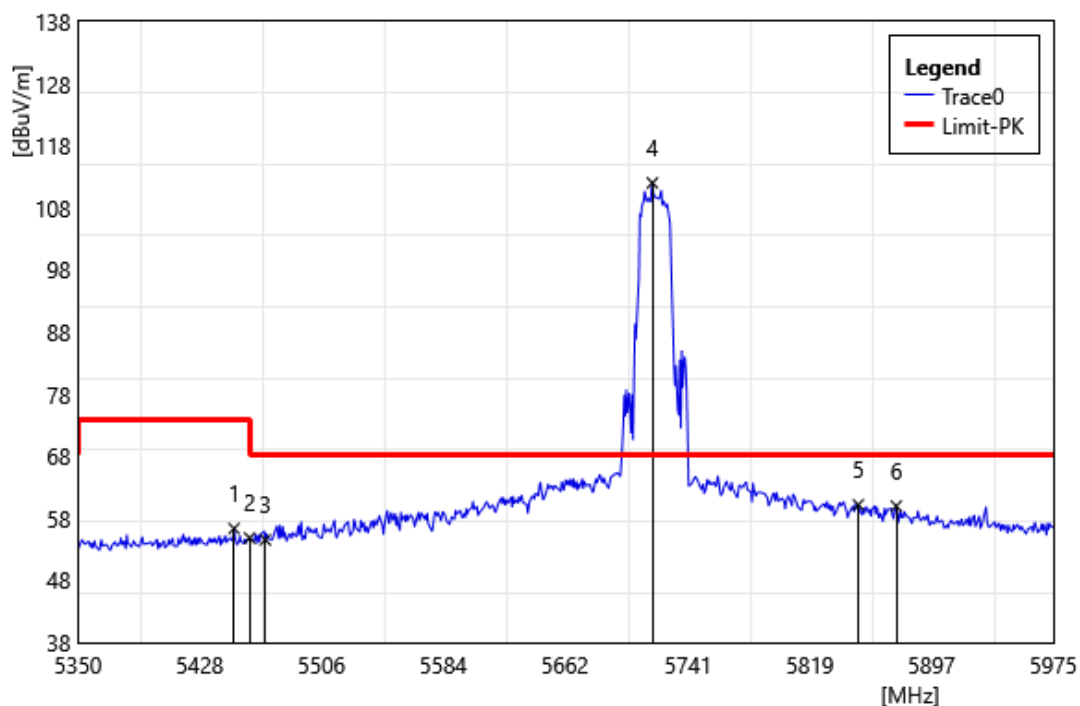


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5450.00	53.53	2.84	56.37	74.00	-17.63	PEAK
2	5460.00	51.90	2.93	54.83	74.00	-19.17	PEAK
3	5470.00	51.53	3.02	54.55	68.20	-13.65	PEAK
4	5718.13	108.06	3.96	112.02	68.20	43.82	PEAK
5	5850.00	55.64	4.55	60.19	68.20	-8.01	PEAK
6	5874.38	55.42	4.57	59.99	68.20	-8.22	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5720		
	MHz		
Polarization:	Vertical		
Remark:			

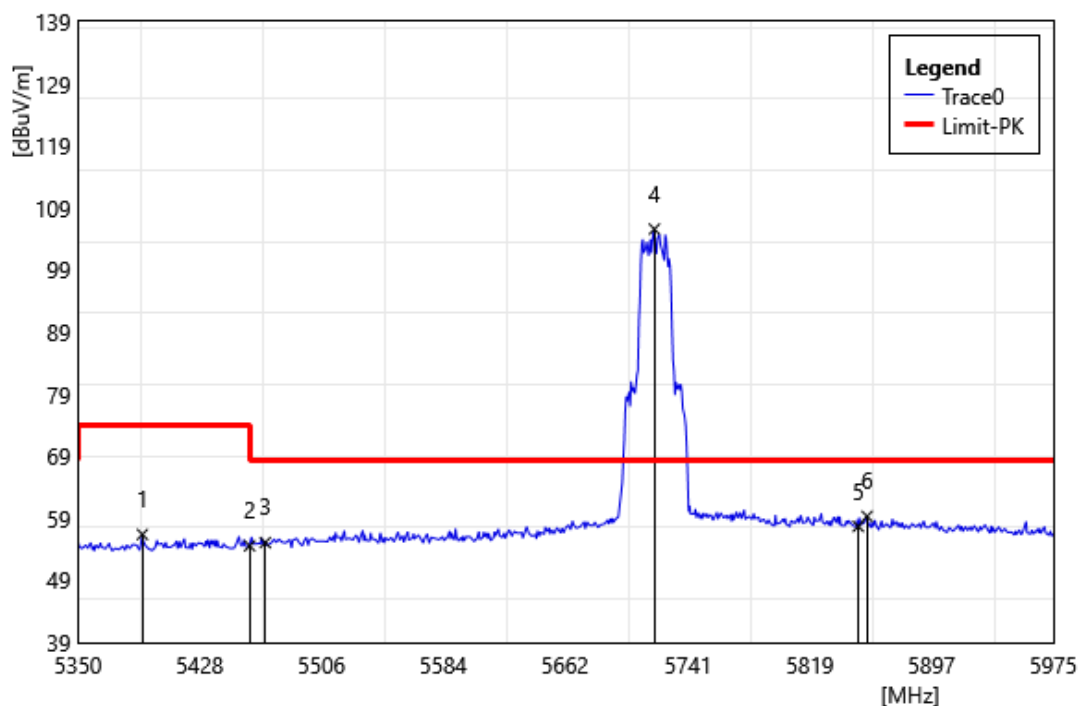


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5391.25	53.84	2.56	56.40	74.00	-17.60	PEAK
2	5460.00	51.65	2.93	54.58	74.00	-19.42	PEAK
3	5470.00	52.08	3.02	55.10	68.20	-13.10	PEAK
4	5719.38	101.62	3.97	105.59	68.20	37.39	PEAK
5	5850.00	53.16	4.55	57.71	68.20	-10.49	PEAK
6	5855.63	54.78	4.55	59.33	68.20	-8.87	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5745		
	MHz		
Polarization:	Horizontal		
Remark:			

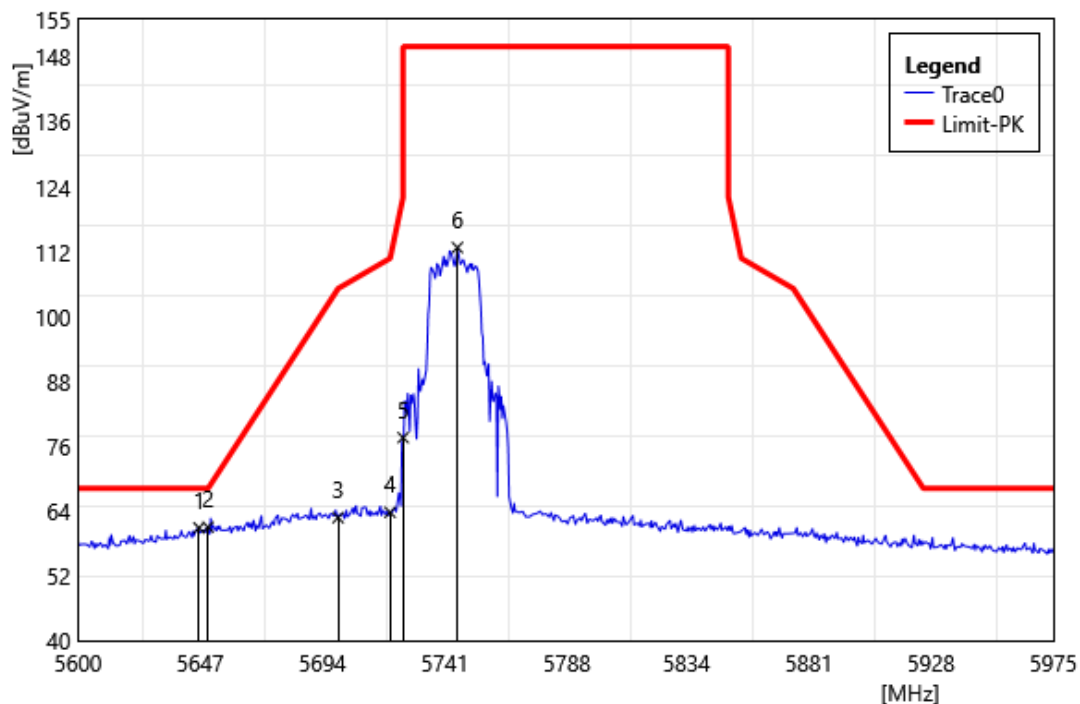


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5646.50	57.20	3.67	60.87	68.20	-7.33	PEAK
2	5650.00	57.31	3.70	61.01	68.20	-7.19	PEAK
3	5700.00	58.91	3.84	62.75	105.20	-42.45	PEAK
4	5720.00	59.79	3.97	63.76	110.80	-47.04	PEAK
5	5725.00	73.58	4.00	77.58	150.00	-72.42	PEAK
6	5745.88	108.64	4.15	112.79	150.00	-37.21	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5745		
	MHz		
Polarization:	Vertical		
Remark:			

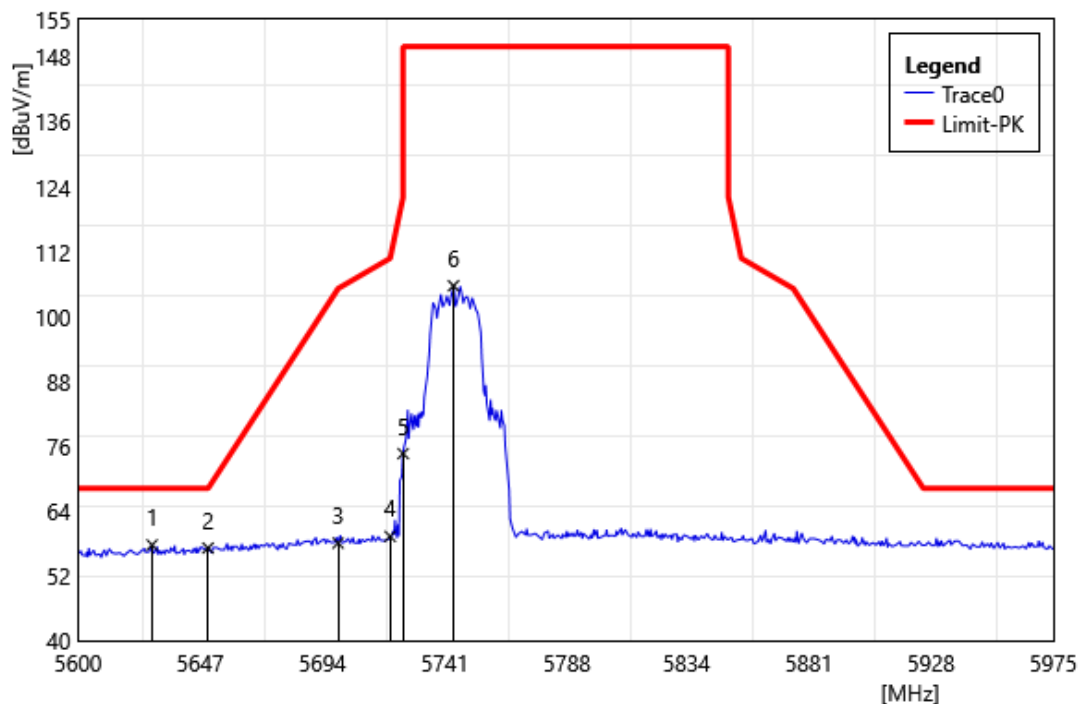


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5628.50	54.18	3.52	57.70	68.20	-10.50	PEAK
2	5650.00	53.44	3.70	57.14	68.20	-11.06	PEAK
3	5700.00	54.21	3.84	58.05	105.20	-47.15	PEAK
4	5720.00	55.32	3.97	59.29	110.80	-51.51	PEAK
5	5725.00	70.61	4.00	74.61	150.00	-75.39	PEAK
6	5744.38	101.56	4.14	105.70	150.00	-44.30	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5825		
	MHz		
Polarization:	Horizontal		
Remark:			

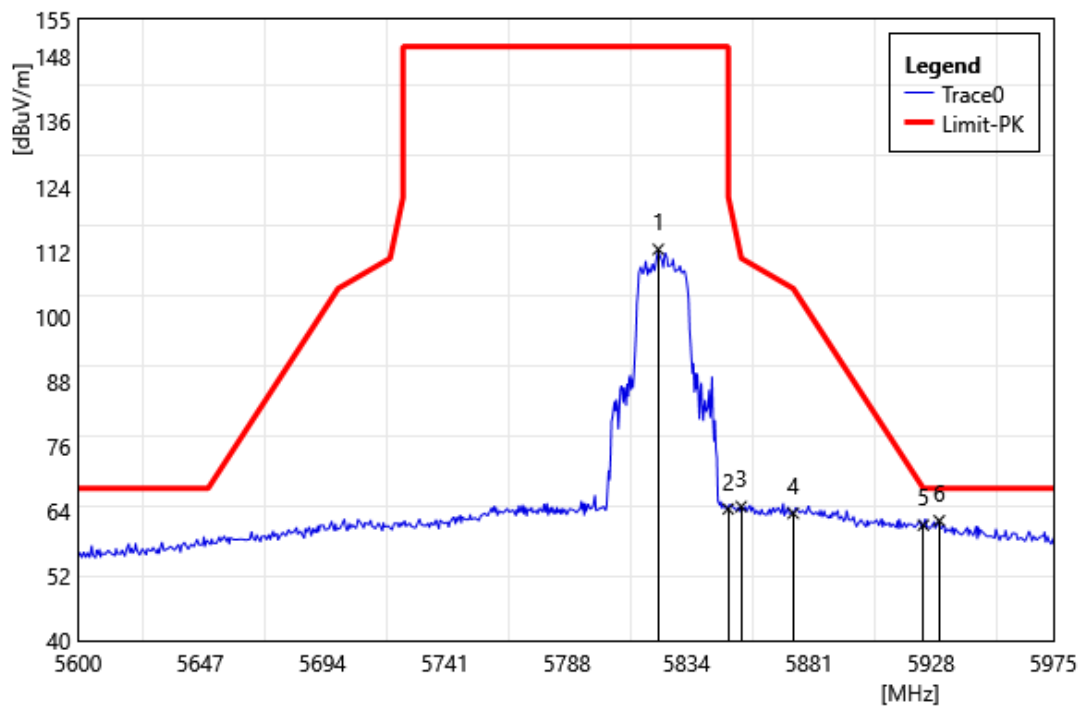


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5823.13	107.97	4.48	112.45	150.00	-37.55	PEAK
2	5850.00	59.82	4.55	64.37	122.20	-57.83	PEAK
3	5855.00	60.25	4.55	64.80	110.80	-46.00	PEAK
4	5875.00	58.99	4.57	63.56	105.20	-41.64	PEAK
5	5925.00	56.91	4.45	61.36	68.20	-6.84	PEAK
6	5931.13	57.78	4.41	62.19	68.20	-6.02	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5825		
	MHz		
Polarization:	Vertical		
Remark:			

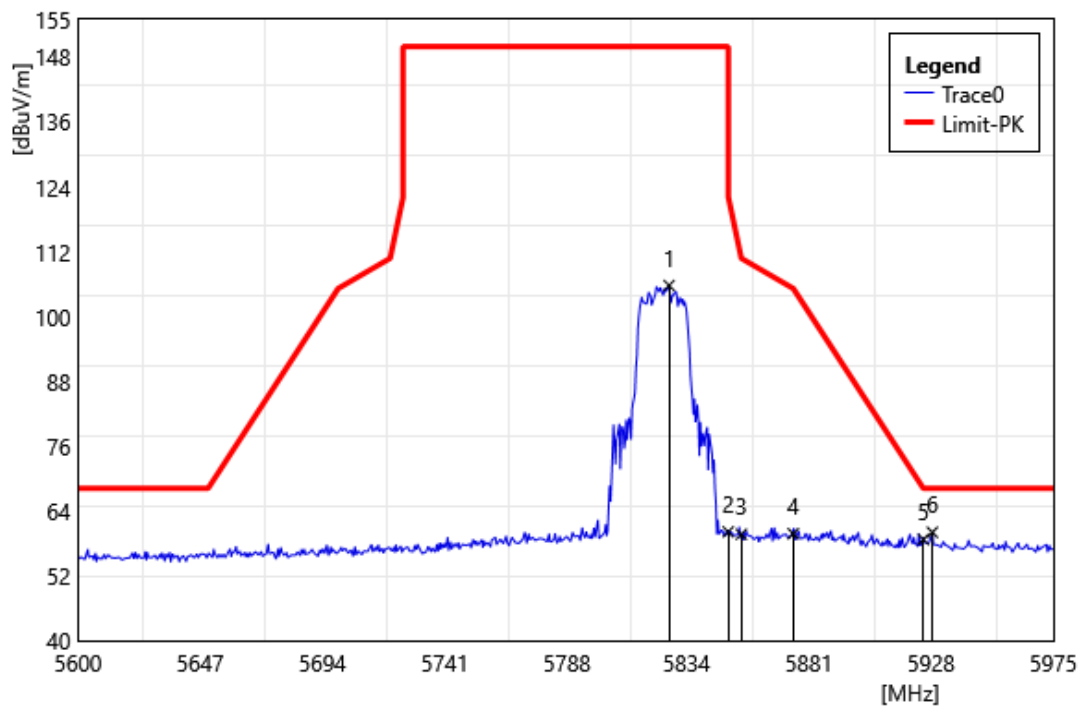


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5827.25	101.28	4.48	105.76	150.00	-44.24	PEAK
2	5850.00	55.59	4.55	60.14	122.20	-62.06	PEAK
3	5855.00	55.13	4.55	59.68	110.80	-51.12	PEAK
4	5875.00	55.22	4.57	59.79	105.20	-45.41	PEAK
5	5925.00	54.28	4.45	58.73	68.20	-9.47	PEAK
6	5928.50	55.61	4.43	60.04	68.20	-8.16	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

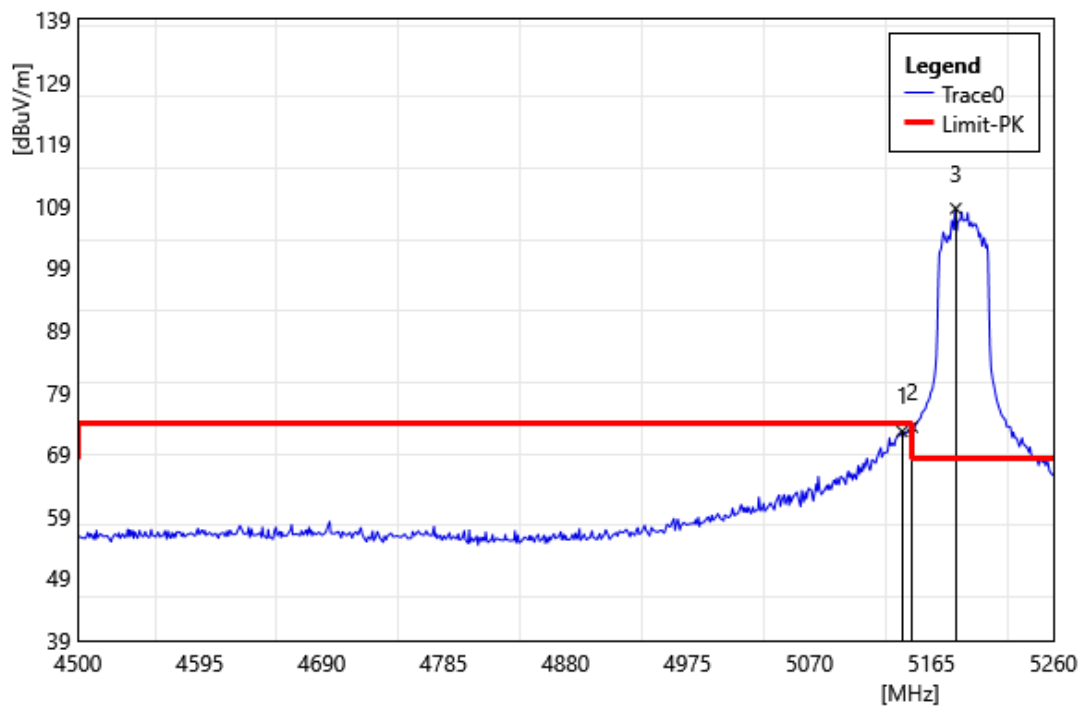


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.20	70.17	2.52	72.69	74.00	-1.31	PEAK
2	5150.00	70.84	2.56	73.40	74.00	-0.60	PEAK
3	5184.00	106.04	2.53	108.57	68.20	40.37	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

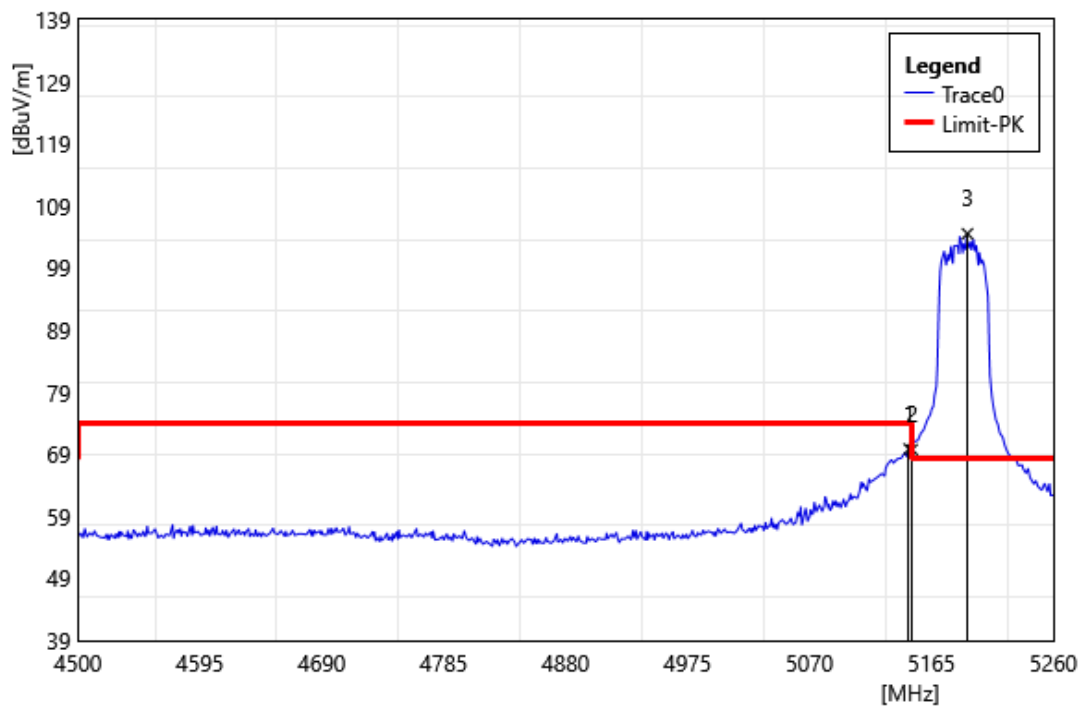


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	67.30	2.55	69.85	74.00	-4.15	PEAK
2	5150.00	67.20	2.56	69.76	74.00	-4.24	PEAK
3	5193.12	101.99	2.53	104.52	68.20	36.32	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

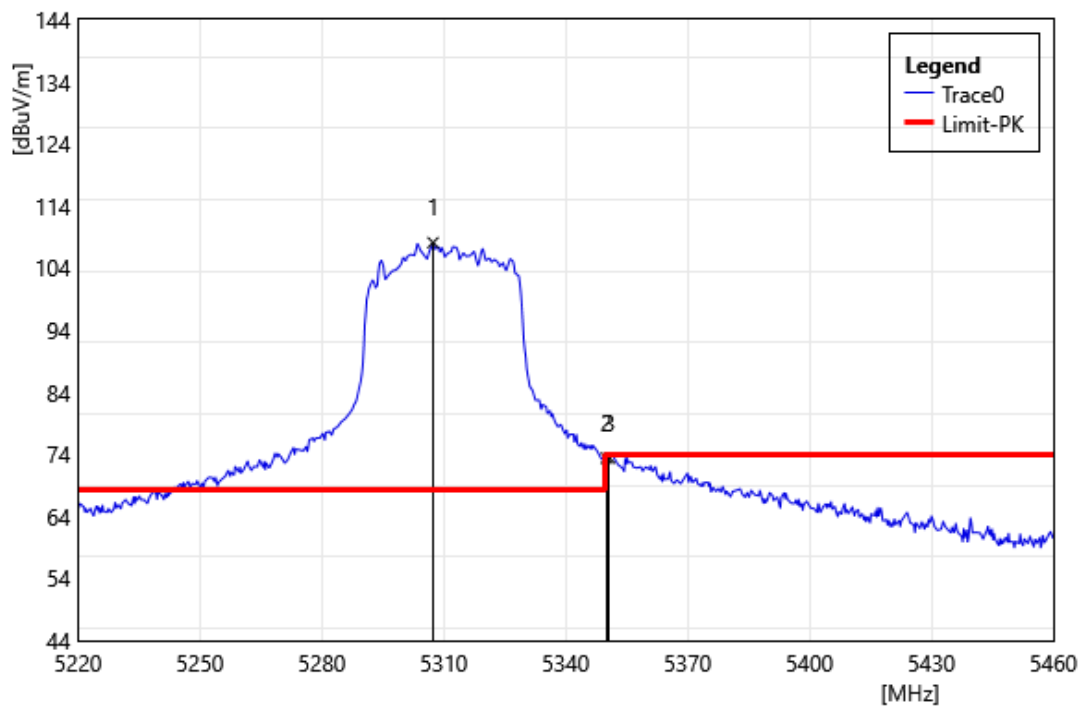


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5307.36	105.53	2.54	108.07	68.20	39.87	PEAK
2	5350.00	70.87	2.51	73.38	74.00	-0.62	PEAK
3	5350.80	70.88	2.52	73.40	74.00	-0.61	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

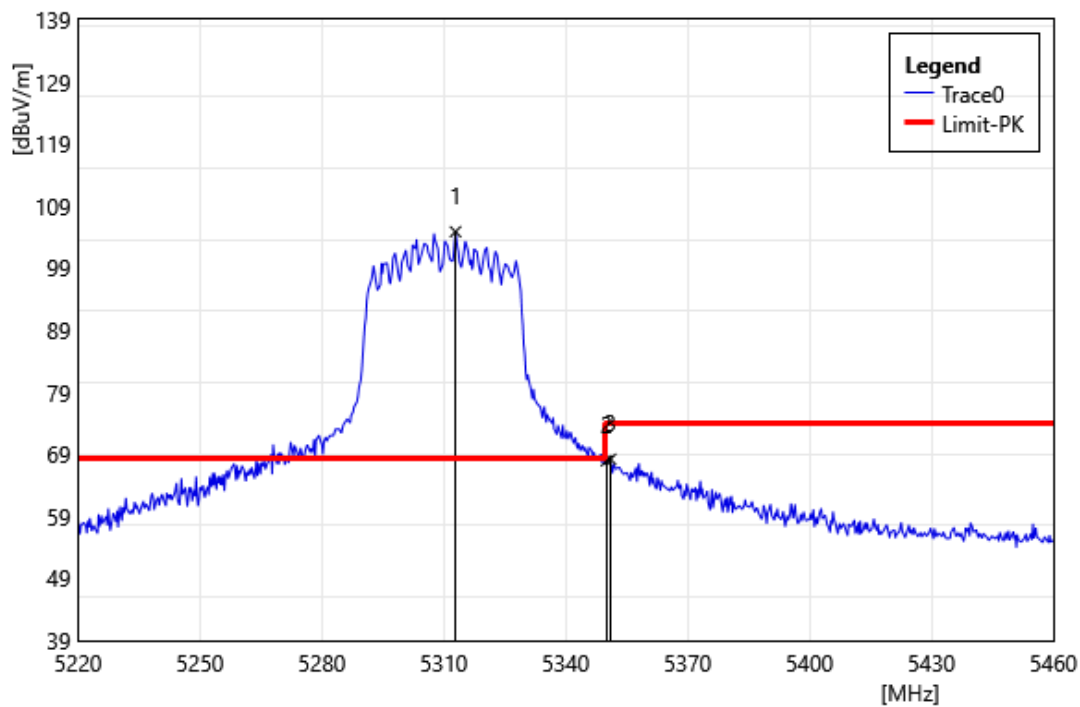


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5312.88	102.29	2.54	104.83	68.20	36.63	PEAK
2	5350.00	65.43	2.51	67.94	74.00	-6.06	PEAK
3	5351.04	65.69	2.52	68.21	74.00	-5.79	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

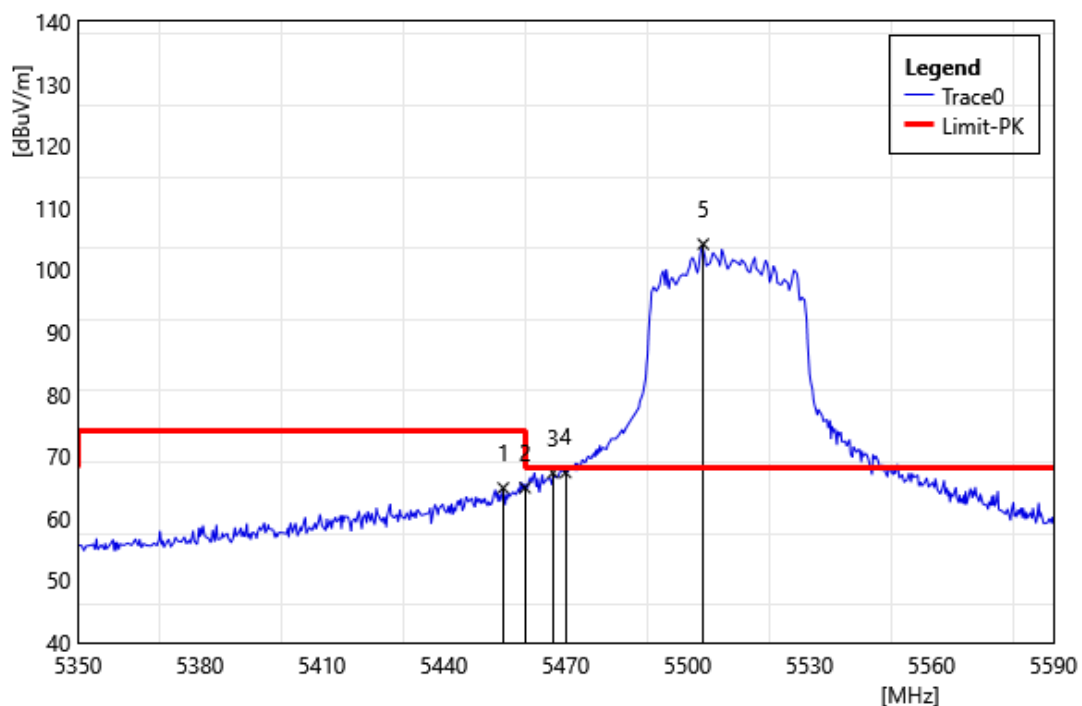


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.64	62.01	2.89	64.90	74.00	-9.10	PEAK
2	5460.00	61.98	2.93	64.91	74.00	-9.09	PEAK
3	5466.88	64.33	3.00	67.33	68.20	-0.87	PEAK
4	5470.00	64.35	3.02	67.37	68.20	-0.83	PEAK
5	5503.84	100.84	3.32	104.16	68.20	35.96	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

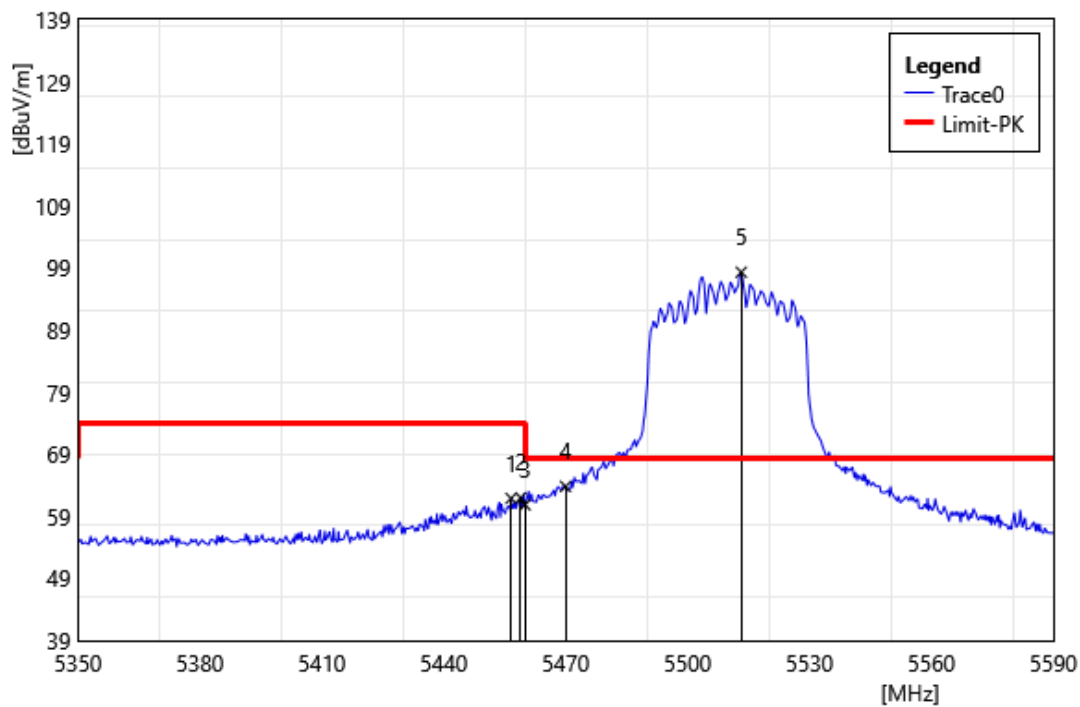


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.56	58.98	2.90	61.88	74.00	-12.12	PEAK
2	5458.96	59.06	2.92	61.98	74.00	-12.02	PEAK
3	5460.00	57.92	2.93	60.85	74.00	-13.15	PEAK
4	5470.00	60.80	3.02	63.82	68.20	-4.38	PEAK
5	5513.20	94.95	3.36	98.31	68.20	30.11	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5670		
	MHz		
Polarization:	Horizontal		
Remark:			

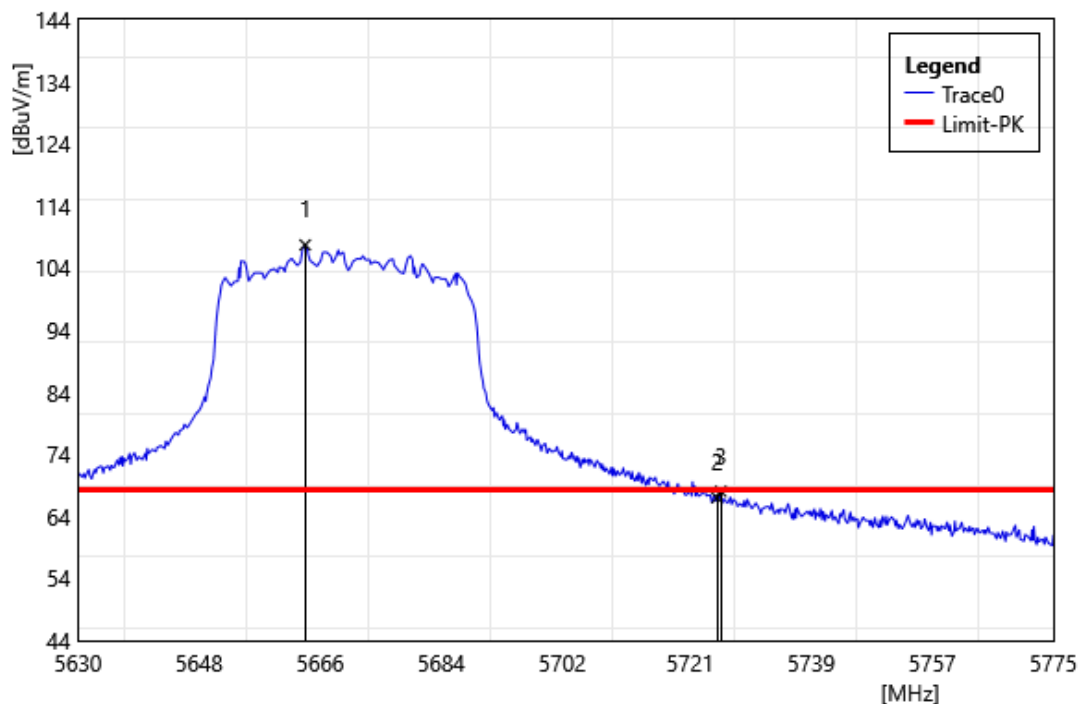


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5663.79	103.98	3.74	107.72	68.20	39.52	PEAK
2	5725.00	63.00	4.00	67.00	68.20	-1.20	PEAK
3	5725.56	64.03	4.00	68.03	68.20	-0.17	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5670		
	MHz		
Polarization:	Vertical		
Remark:			

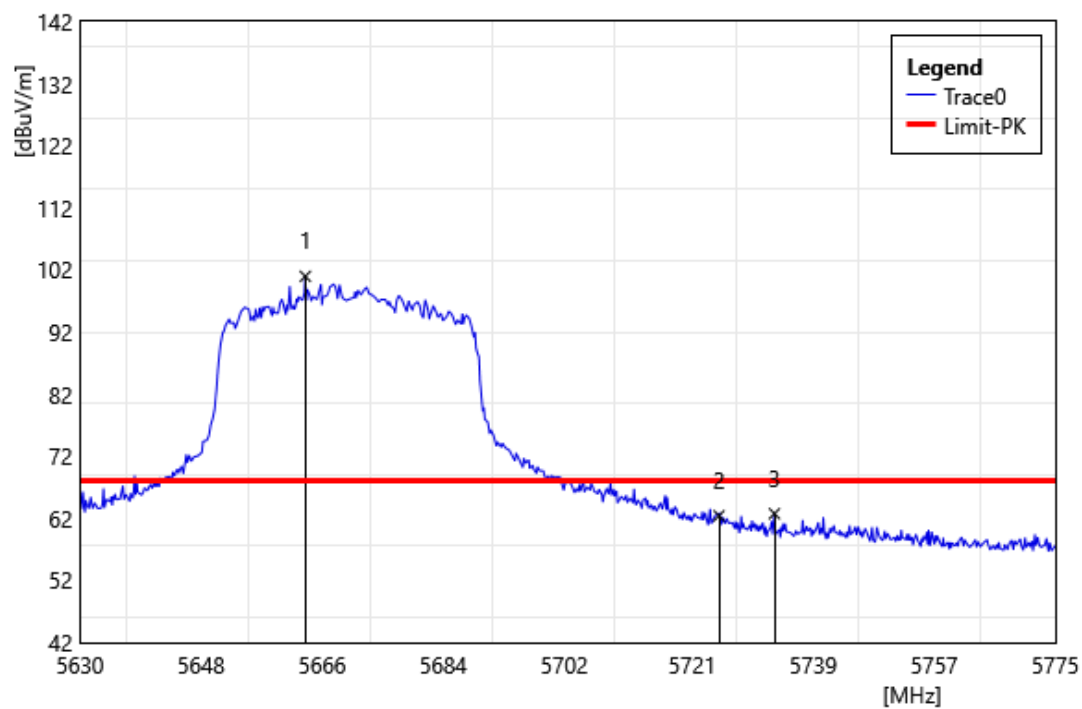


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5663.50	97.24	3.74	100.98	68.20	32.78	PEAK
2	5725.00	58.42	4.00	62.42	68.20	-5.78	PEAK
3	5733.24	58.69	4.06	62.75	68.20	-5.45	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

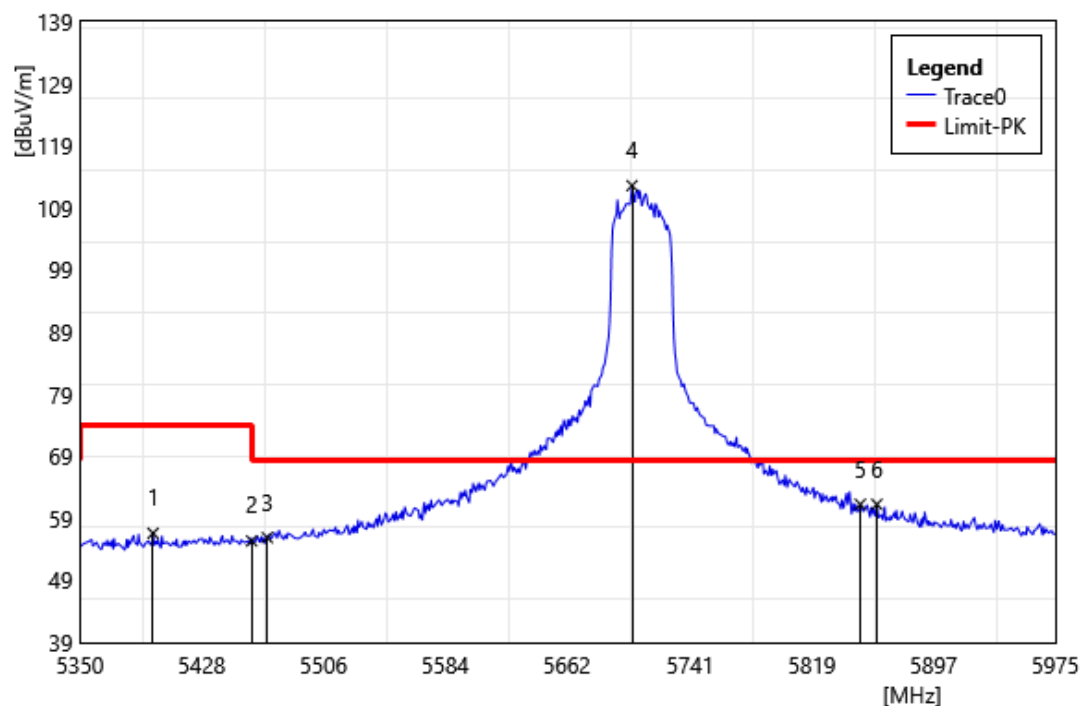


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5396.88	54.03	2.57	56.60	74.00	-17.40	PEAK
2	5460.00	52.43	2.93	55.36	74.00	-18.64	PEAK
3	5470.00	52.88	3.02	55.90	68.20	-12.30	PEAK
4	5703.75	108.72	3.86	112.58	68.20	44.38	PEAK
5	5850.00	56.72	4.55	61.27	68.20	-6.93	PEAK
6	5860.63	56.70	4.56	61.26	68.20	-6.94	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

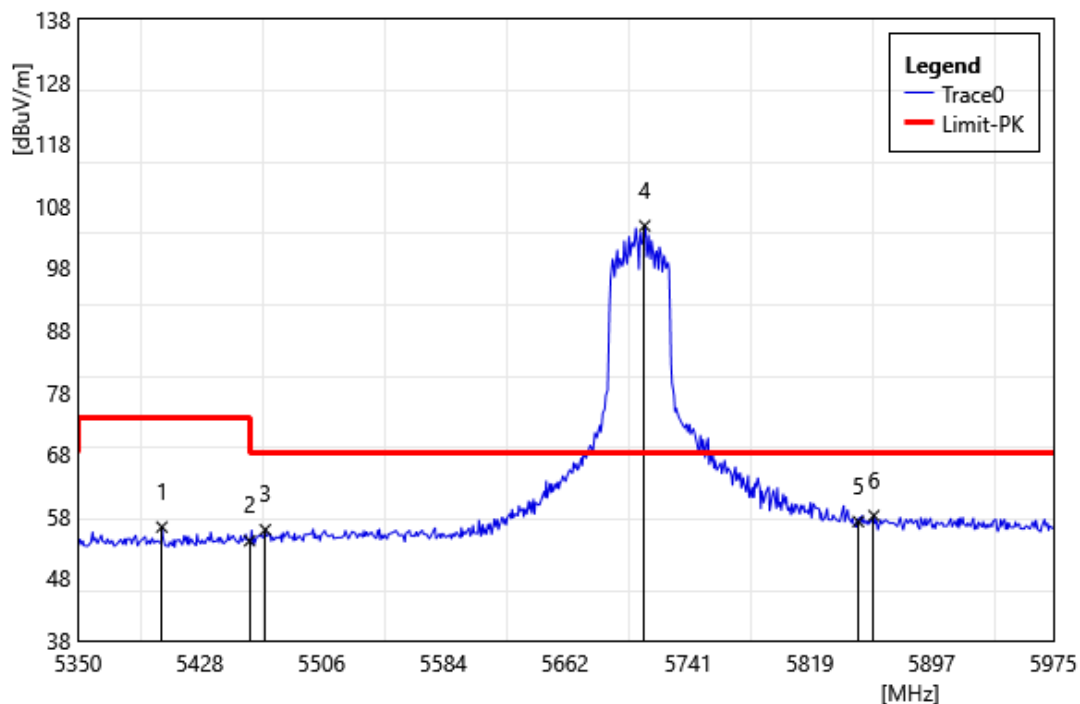


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5403.75	53.68	2.60	56.28	74.00	-17.72	PEAK
2	5460.00	51.13	2.93	54.06	74.00	-19.94	PEAK
3	5470.00	52.83	3.02	55.85	68.20	-12.35	PEAK
4	5713.13	100.87	3.93	104.80	68.20	36.60	PEAK
5	5850.00	52.61	4.55	57.16	68.20	-11.04	PEAK
6	5860.00	53.56	4.56	58.12	68.20	-10.08	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5755		
	MHz		
Polarization:	Horizontal		
Remark:			

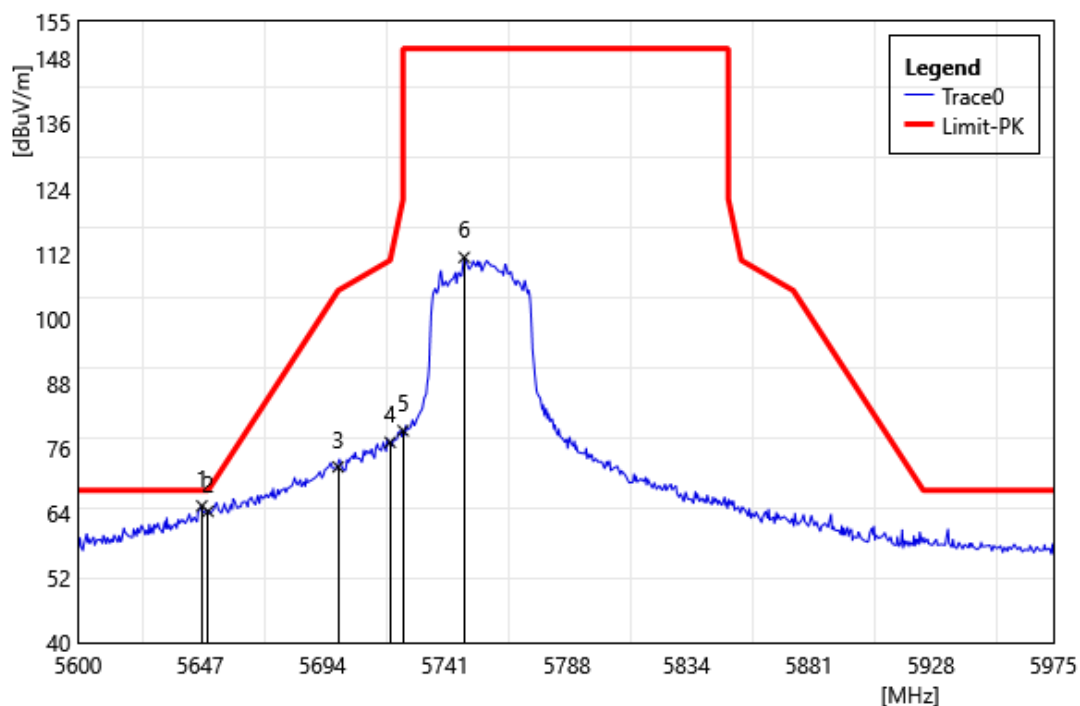


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5647.63	61.62	3.68	65.30	68.20	-2.90	PEAK
2	5650.00	60.60	3.70	64.30	68.20	-3.90	PEAK
3	5700.00	68.69	3.84	72.53	105.20	-32.67	PEAK
4	5720.00	73.11	3.97	77.08	110.80	-33.72	PEAK
5	5725.00	75.24	4.00	79.24	150.00	-70.76	PEAK
6	5748.50	107.16	4.17	111.33	150.00	-38.67	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5755		
	MHz		
Polarization:	Vertical		
Remark:			

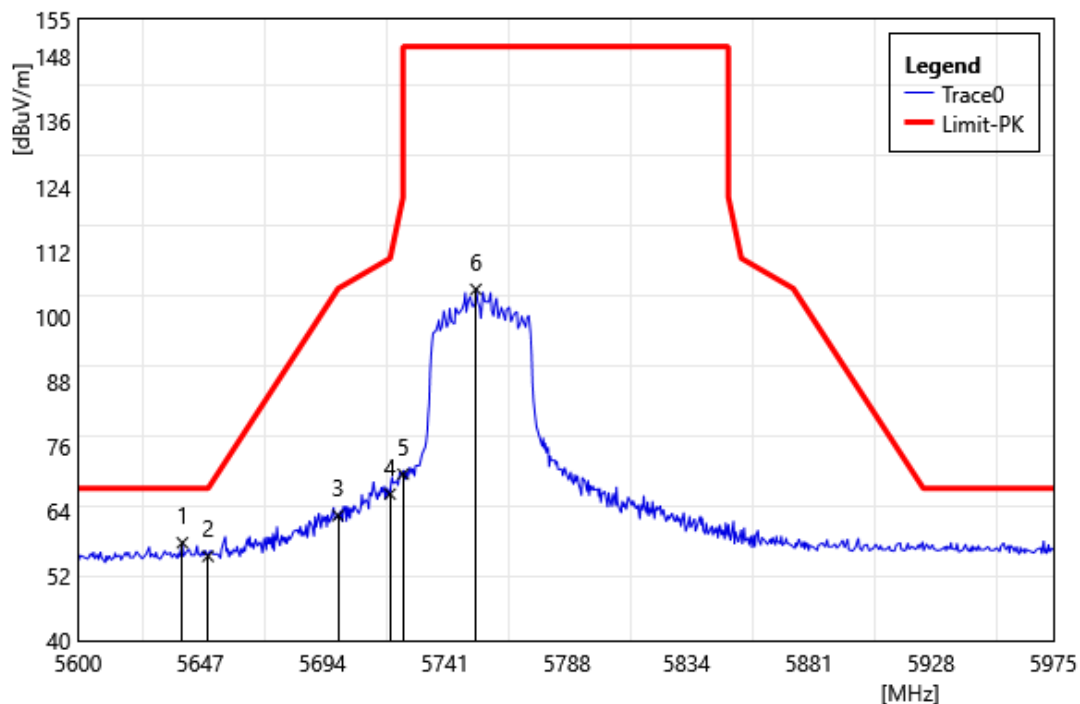


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5640.13	54.48	3.62	58.11	68.20	-10.10	PEAK
2	5650.00	51.90	3.70	55.60	68.20	-12.60	PEAK
3	5700.00	59.31	3.84	63.15	105.20	-42.05	PEAK
4	5720.00	63.16	3.97	67.13	110.80	-43.67	PEAK
5	5725.00	66.81	4.00	70.81	150.00	-79.19	PEAK
6	5753.00	100.86	4.19	105.05	150.00	-44.95	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5795		
	MHz		
Polarization:	Horizontal		
Remark:			

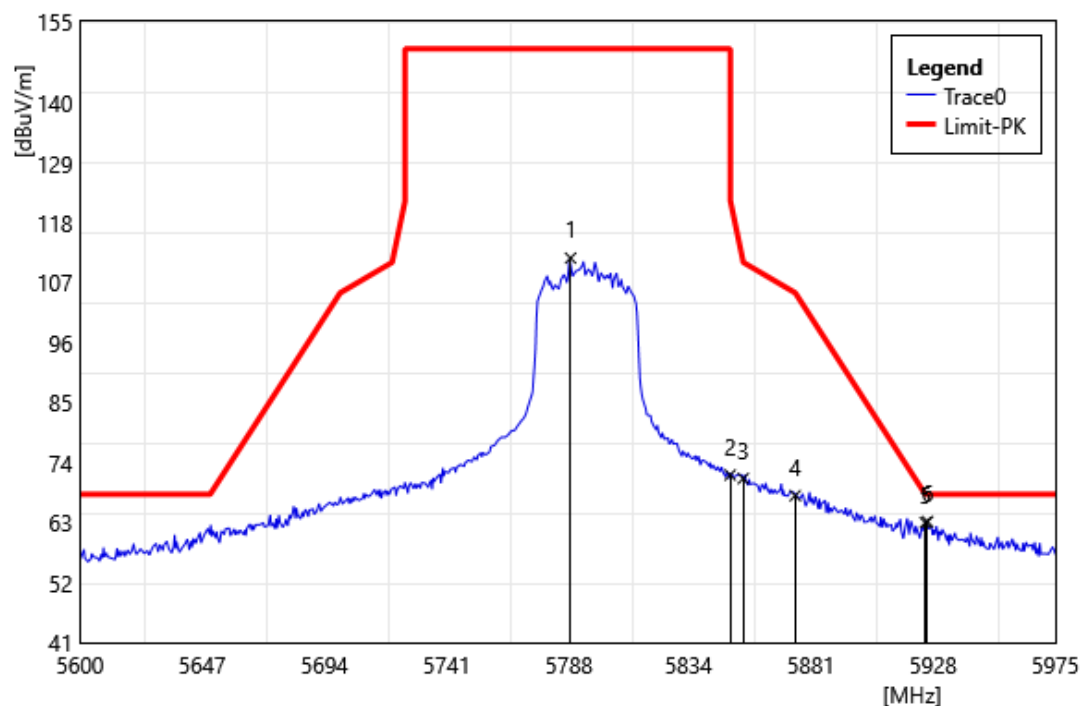


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5788.63	107.23	4.36	111.59	150.00	-38.41	PEAK
2	5850.00	67.21	4.55	71.76	122.20	-50.44	PEAK
3	5855.00	66.57	4.55	71.12	110.80	-39.68	PEAK
4	5875.00	63.38	4.57	67.96	105.20	-37.25	PEAK
5	5925.00	58.57	4.45	63.02	68.20	-5.18	PEAK
6	5925.88	58.75	4.44	63.19	68.20	-5.01	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5795		
	MHz		
Polarization:	Vertical		
Remark:			

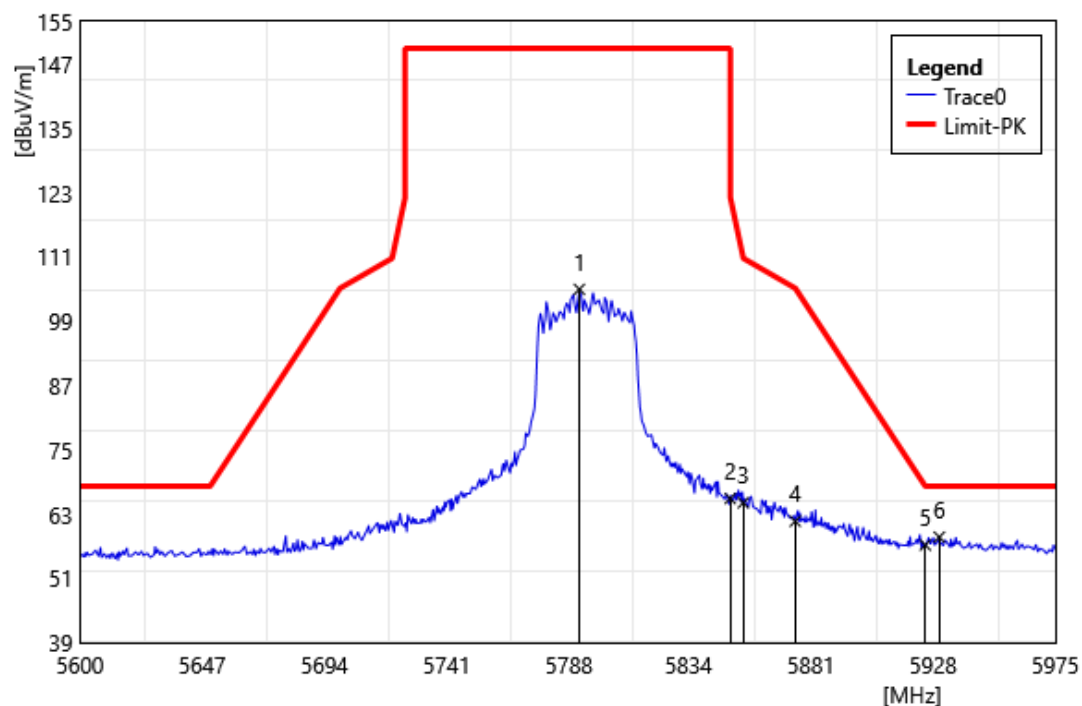


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5792.00	100.60	4.38	104.98	150.00	-45.02	PEAK
2	5850.00	61.36	4.55	65.91	122.20	-56.29	PEAK
3	5855.00	60.56	4.55	65.11	110.80	-45.69	PEAK
4	5875.00	57.09	4.57	61.66	105.20	-43.54	PEAK
5	5925.00	52.75	4.45	57.20	68.20	-11.00	PEAK
6	5930.38	54.29	4.42	58.71	68.20	-9.49	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

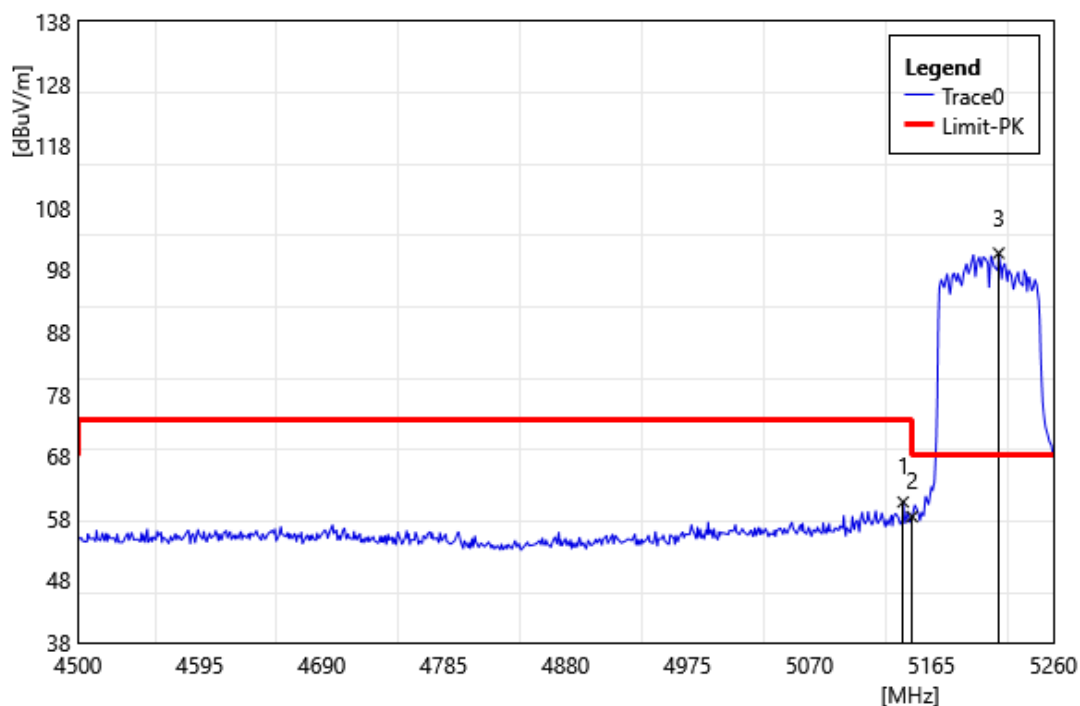


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.96	58.11	2.52	60.63	74.00	-13.37	PEAK
2	5150.00	55.71	2.56	58.27	74.00	-15.73	PEAK
3	5217.44	98.18	2.52	100.71	68.20	32.51	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

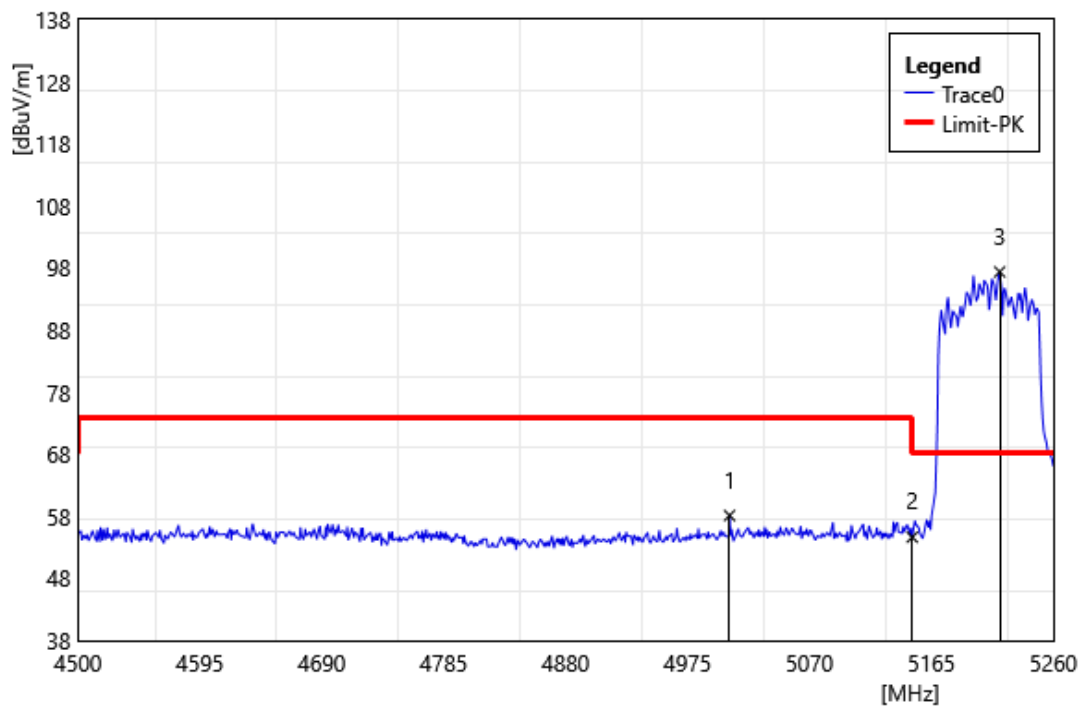


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5007.68	55.55	2.58	58.13	74.00	-15.87	PEAK
2	5150.00	52.09	2.56	54.65	74.00	-19.35	PEAK
3	5218.20	94.87	2.51	97.38	68.20	29.18	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

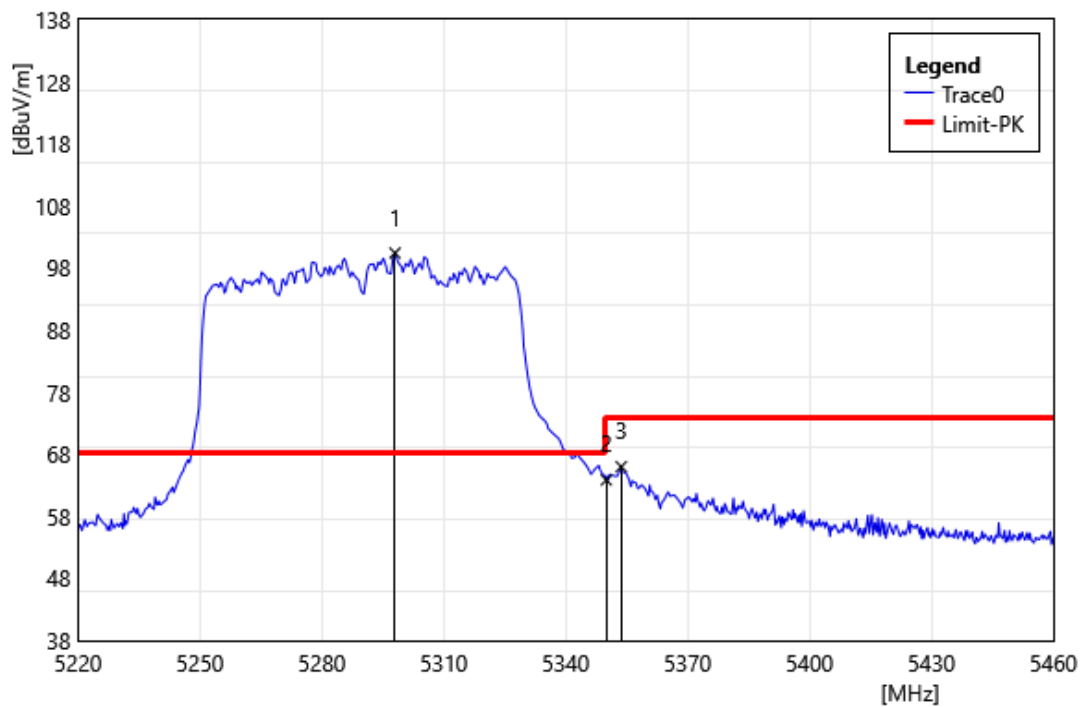


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5298.00	97.86	2.54	100.41	68.20	32.21	PEAK
2	5350.00	61.36	2.51	63.87	74.00	-10.13	PEAK
3	5353.68	63.48	2.52	66.00	74.00	-8.00	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

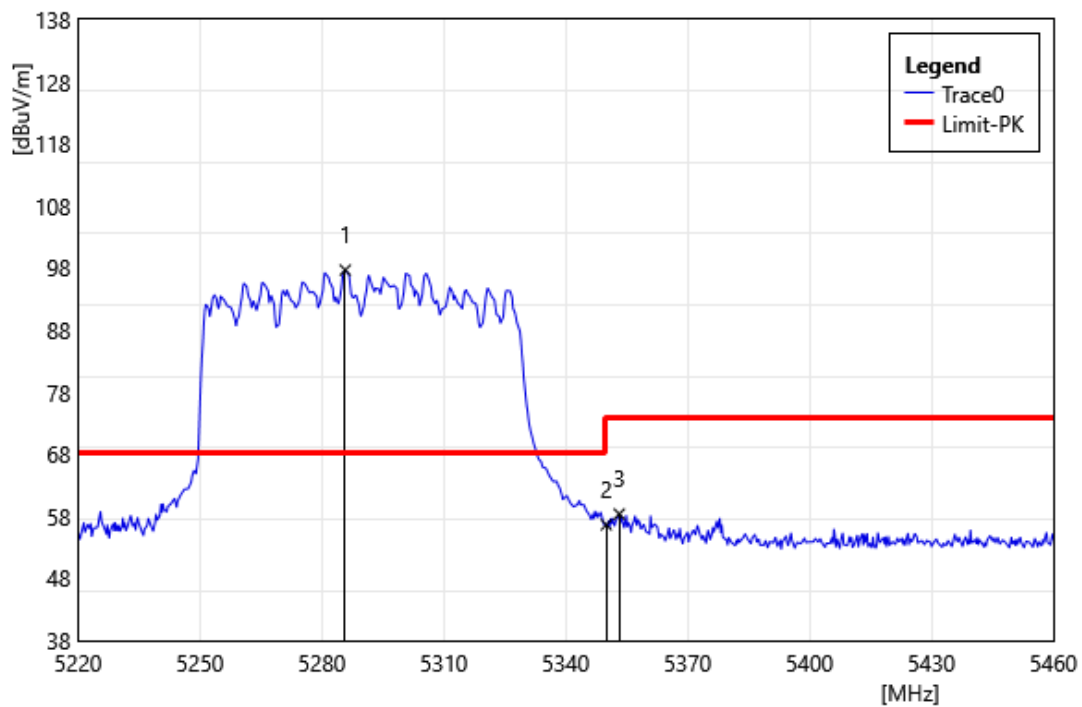


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5285.76	95.13	2.53	97.66	68.20	29.46	PEAK
2	5350.00	54.13	2.51	56.64	74.00	-17.36	PEAK
3	5353.20	55.85	2.52	58.37	74.00	-15.63	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

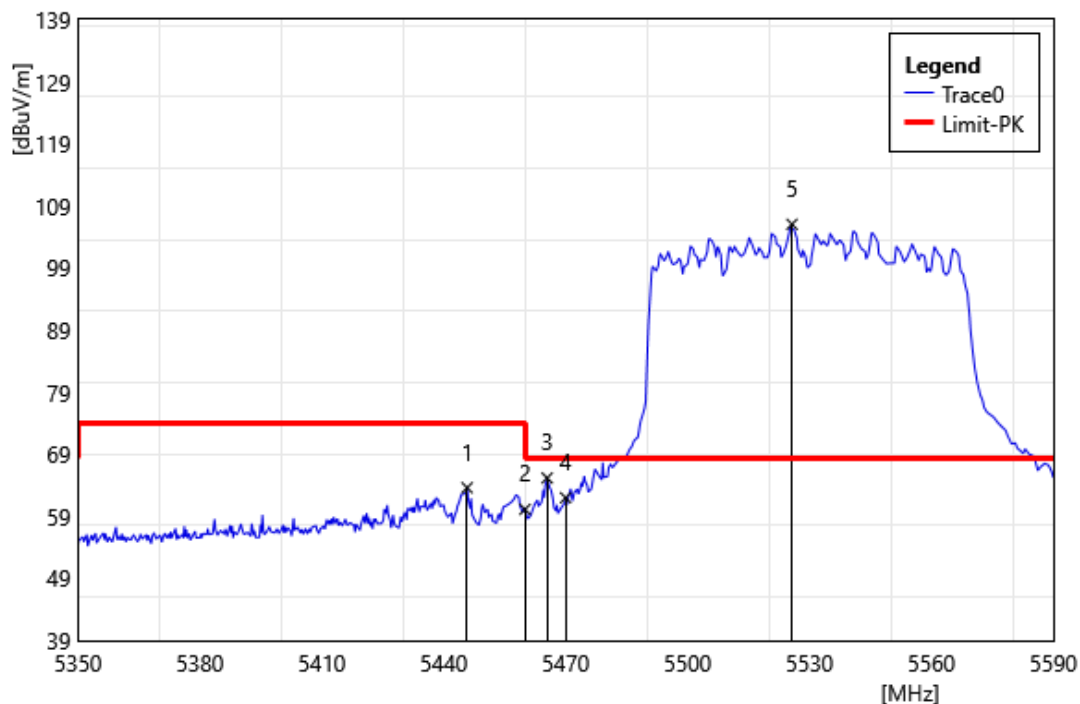


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5445.76	60.80	2.82	63.62	74.00	-10.38	PEAK
2	5460.00	57.19	2.93	60.12	74.00	-13.88	PEAK
3	5465.44	62.20	2.98	65.18	68.20	-3.02	PEAK
4	5470.00	58.98	3.02	62.00	68.20	-6.20	PEAK
5	5525.68	102.61	3.42	106.03	68.20	37.83	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

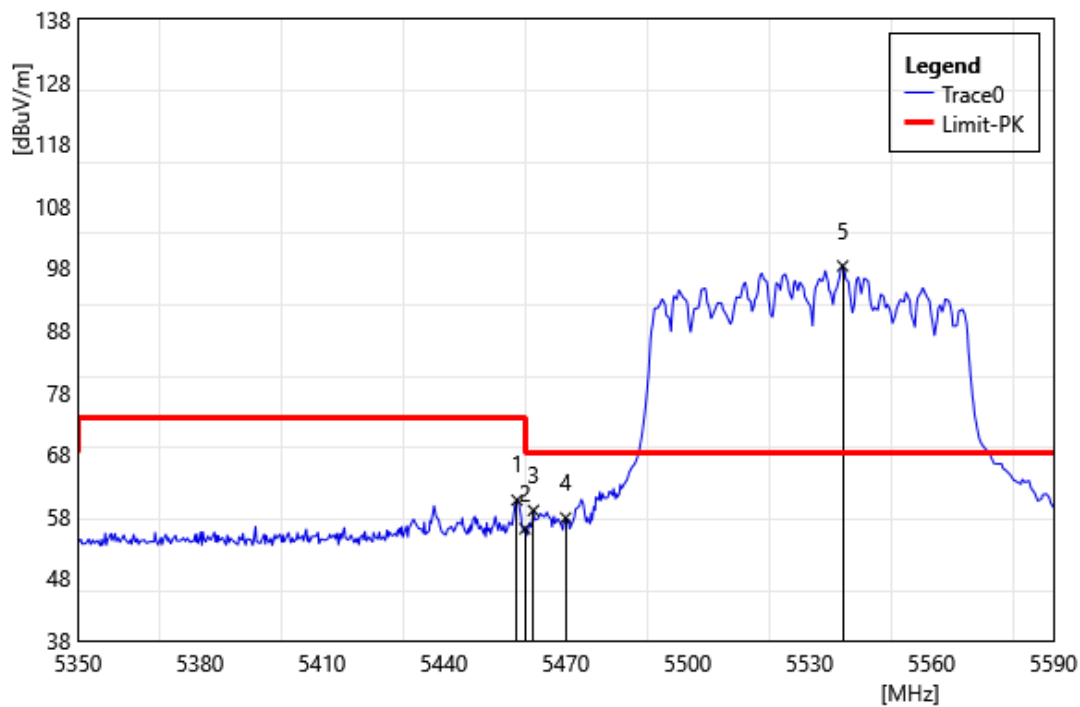


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.00	57.70	2.91	60.61	74.00	-13.39	PEAK
2	5460.00	53.09	2.93	56.02	74.00	-17.98	PEAK
3	5462.08	55.98	2.96	58.94	68.20	-9.26	PEAK
4	5470.00	54.73	3.02	57.75	68.20	-10.45	PEAK
5	5538.16	94.84	3.48	98.32	68.20	30.12	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

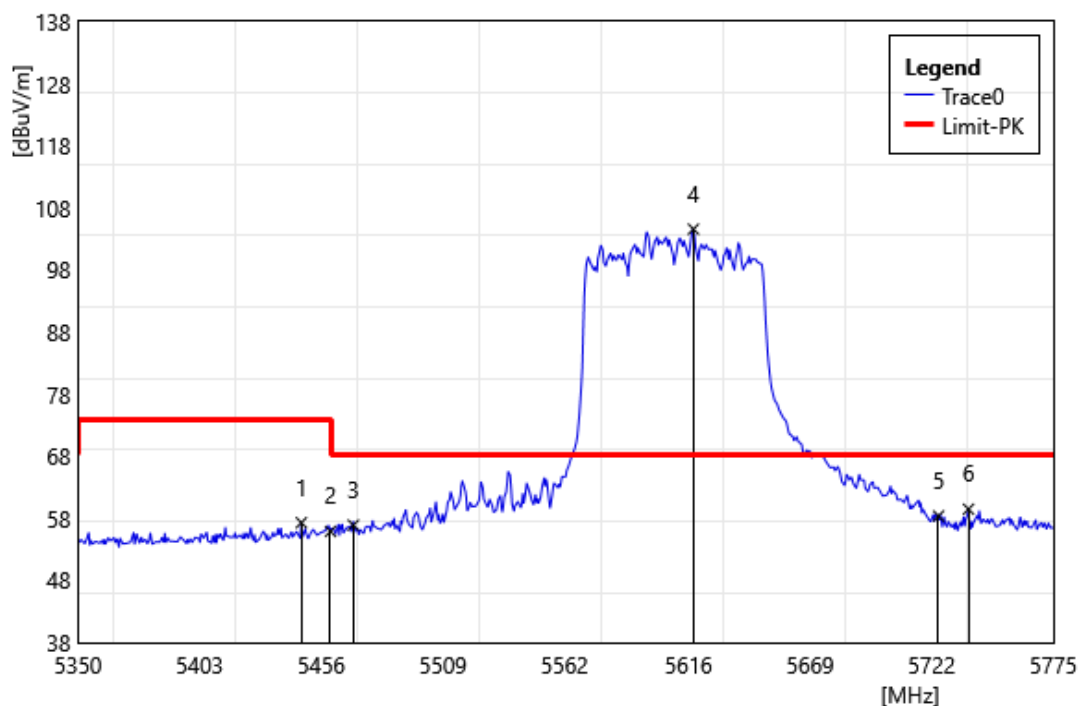


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5447.33	54.47	2.83	57.30	74.00	-16.70	PEAK
2	5460.00	52.96	2.93	55.89	74.00	-18.11	PEAK
3	5470.00	53.89	3.02	56.91	68.20	-11.29	PEAK
4	5618.18	101.14	3.43	104.57	68.20	36.37	PEAK
5	5725.00	54.39	4.00	58.39	68.20	-9.81	PEAK
6	5738.03	55.39	4.09	59.48	68.20	-8.72	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

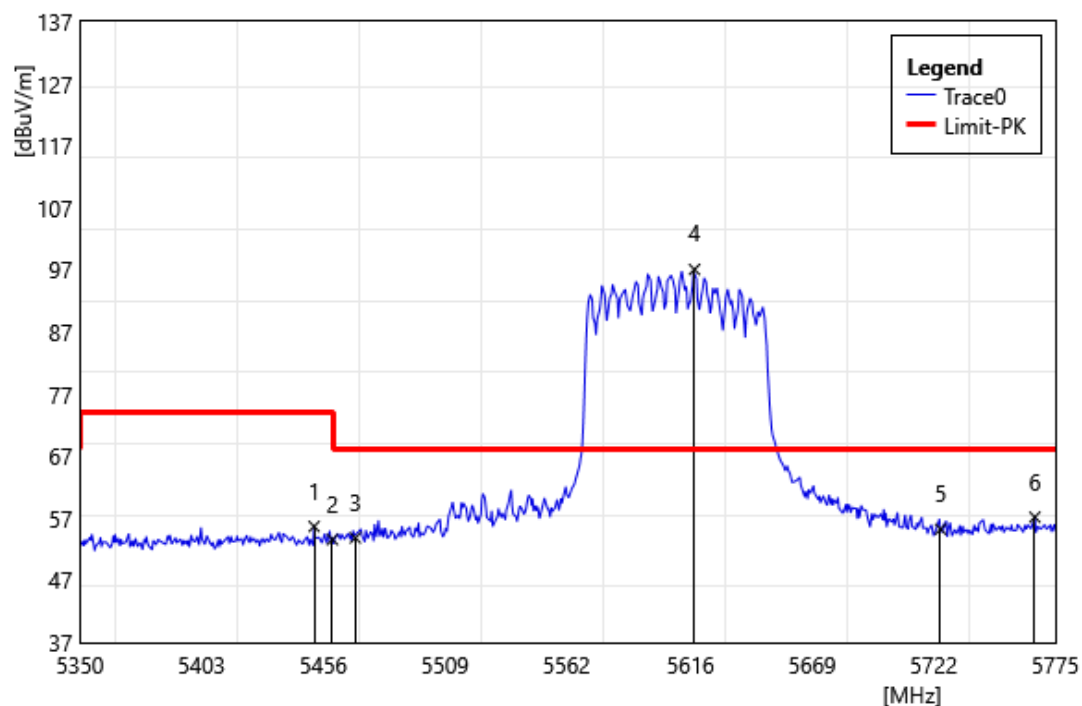


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.00	52.85	2.86	55.71	74.00	-18.29	PEAK
2	5460.00	50.65	2.93	53.58	74.00	-20.42	PEAK
3	5470.00	50.85	3.02	53.87	68.20	-14.33	PEAK
4	5617.75	93.66	3.42	97.08	68.20	28.88	PEAK
5	5725.00	51.27	4.00	55.27	68.20	-12.93	PEAK
6	5766.08	52.95	4.25	57.20	68.20	-11.00	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5690		
	MHz		
Polarization:	Horizontal		
Remark:			

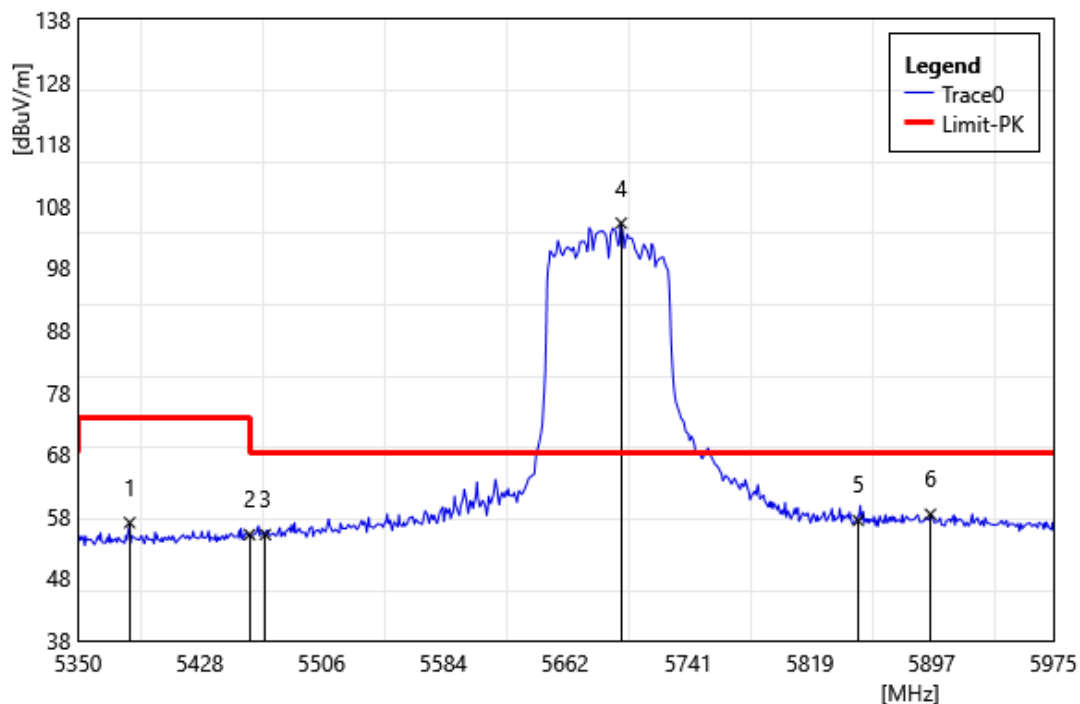


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5383.13	54.44	2.55	56.99	74.00	-17.01	PEAK
2	5460.00	52.13	2.93	55.06	74.00	-18.94	PEAK
3	5470.00	52.04	3.02	55.06	68.20	-13.14	PEAK
4	5698.13	101.38	3.84	105.22	68.20	37.02	PEAK
5	5850.00	52.78	4.55	57.33	68.20	-10.87	PEAK
6	5896.25	53.76	4.58	58.34	68.20	-9.86	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

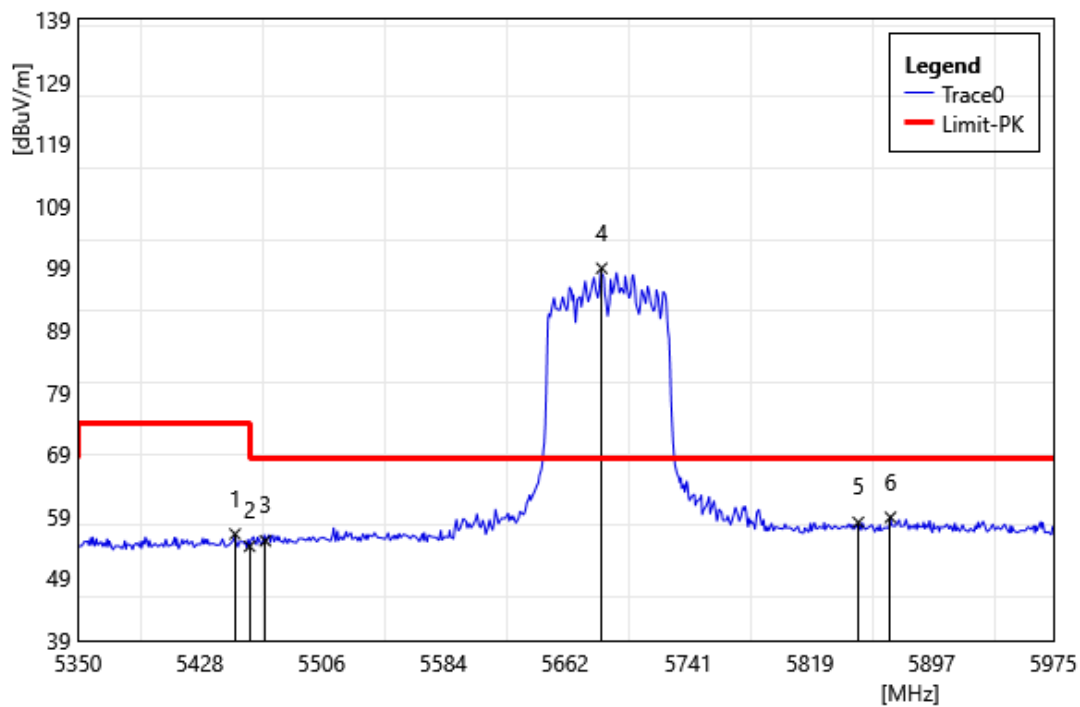

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5450.63	53.32	2.84	56.16	74.00	-17.84	PEAK
2	5460.00	51.24	2.93	54.17	74.00	-19.83	PEAK
3	5470.00	52.03	3.02	55.05	68.20	-13.15	PEAK
4	5685.63	95.14	3.80	98.95	68.20	30.75	PEAK
5	5850.00	53.49	4.55	58.04	68.20	-10.16	PEAK
6	5870.63	54.28	4.56	58.84	68.20	-9.36	PEAK


Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5775		
	MHz		
Polarization:	Horizontal		
Remark:			

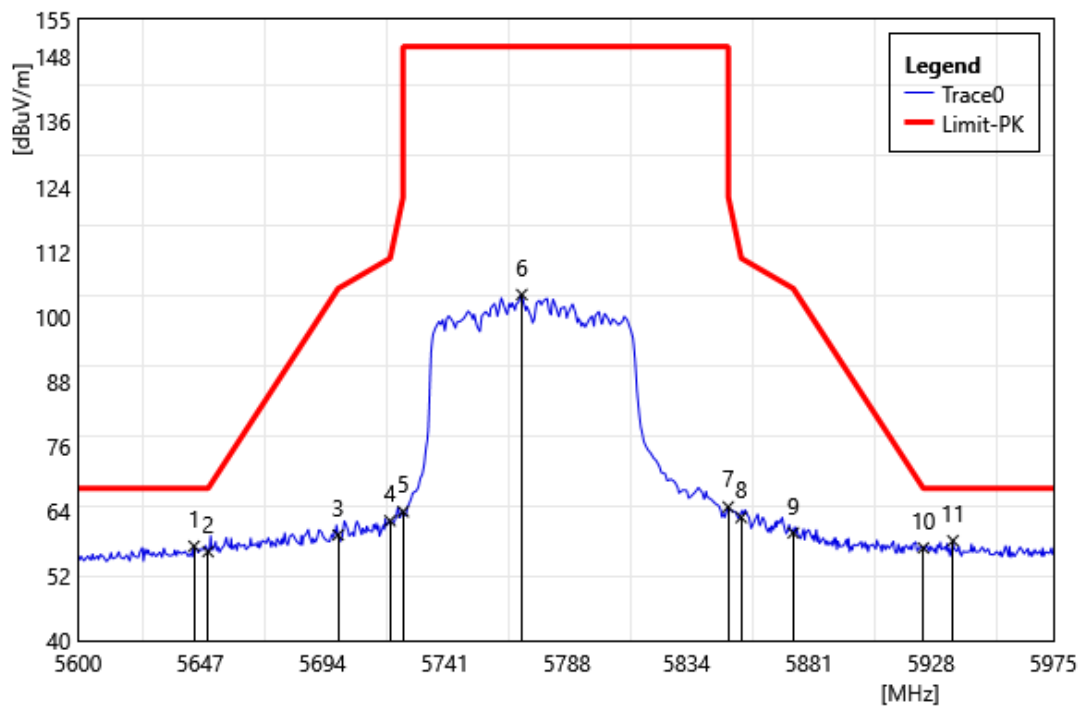

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5775 MHz		
Polarization:	Horizontal		
Remark:			

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5644.63	53.81	3.66	57.47	68.20	-10.73	PEAK
2	5650.00	52.77	3.70	56.47	68.20	-11.73	PEAK
3	5700.00	55.71	3.84	59.55	105.20	-45.65	PEAK
4	5720.00	58.19	3.97	62.16	110.80	-48.64	PEAK
5	5725.00	59.87	4.00	63.87	150.00	-86.13	PEAK
6	5770.63	99.80	4.28	104.08	150.00	-45.92	PEAK
7	5850.00	60.20	4.55	64.75	122.20	-57.45	PEAK
8	5855.00	58.24	4.55	62.79	110.80	-48.01	PEAK
9	5875.00	55.37	4.57	59.94	105.20	-45.26	PEAK
10	5925.00	52.71	4.45	57.16	68.20	-11.04	PEAK
11	5936.38	54.09	4.39	58.48	68.20	-9.72	PEAK

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5775		
	MHz		
Polarization:	Vertical		
Remark:			

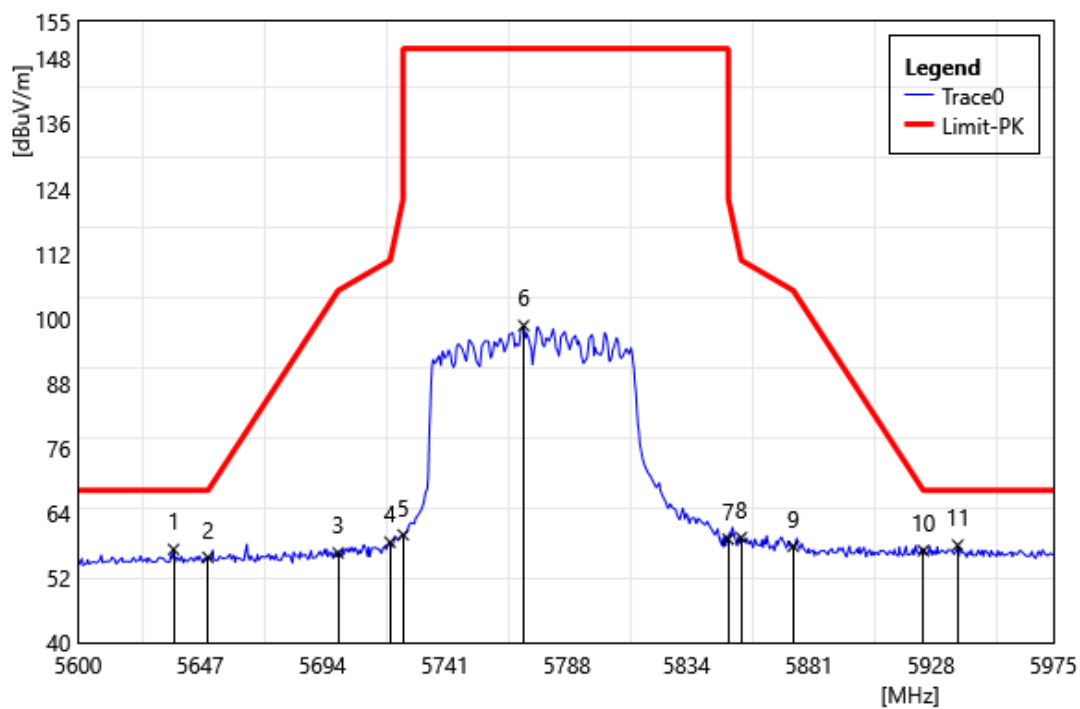


Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5775 MHz		
Polarization:	Vertical		
Remark:			

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5636.75	53.67	3.58	57.25	68.20	-10.95	PEAK
2	5650.00	52.07	3.70	55.77	68.20	-12.43	PEAK
3	5700.00	52.75	3.84	56.59	105.20	-48.61	PEAK
4	5720.00	54.61	3.97	58.58	110.80	-52.22	PEAK
5	5725.00	55.95	4.00	59.95	150.00	-90.05	PEAK
6	5771.38	94.41	4.29	98.70	150.00	-51.30	PEAK
7	5850.00	54.58	4.55	59.13	122.20	-63.07	PEAK
8	5855.00	54.85	4.55	59.40	110.80	-51.40	PEAK
9	5875.00	53.25	4.57	57.82	105.20	-47.38	PEAK
10	5925.00	52.55	4.45	57.00	68.20	-11.20	PEAK
11	5938.25	53.64	4.38	58.02	68.20	-10.18	PEAK


Average

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5180 MHz		
Polarization:	Horizontal		
Remark:			

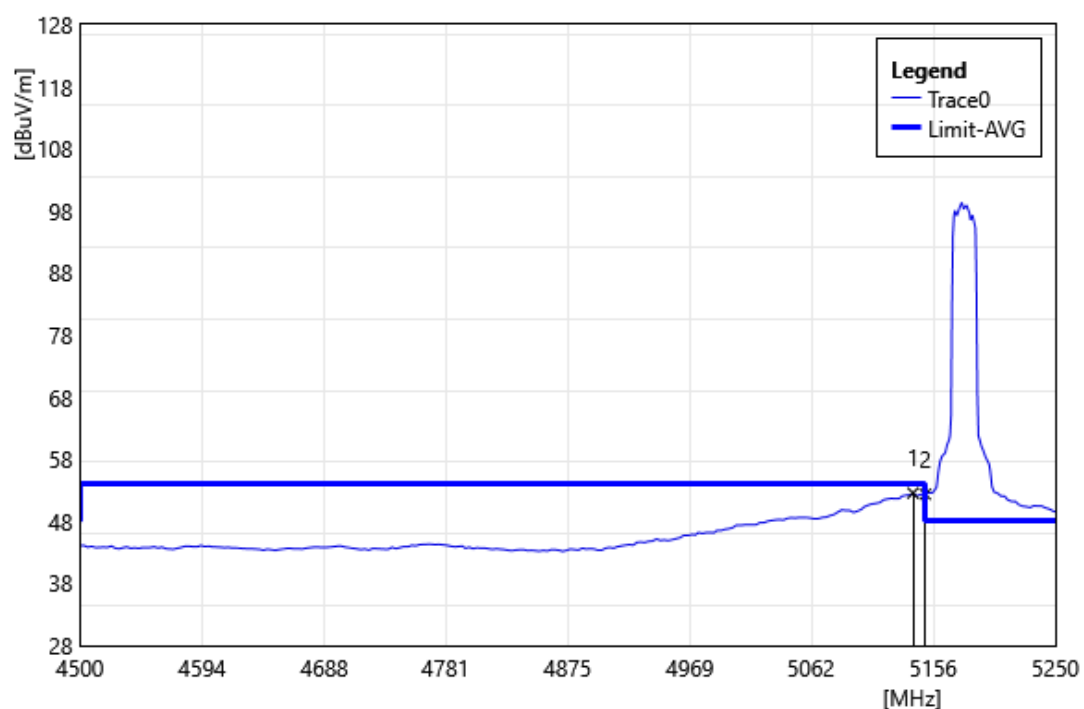


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5140.50	50.04	2.51	52.55	54.00	-1.45	AVG
2	5150.00	49.81	2.56	52.37	54.00	-1.63	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5180 MHz		
Polarization:	Vertical		
Remark:			

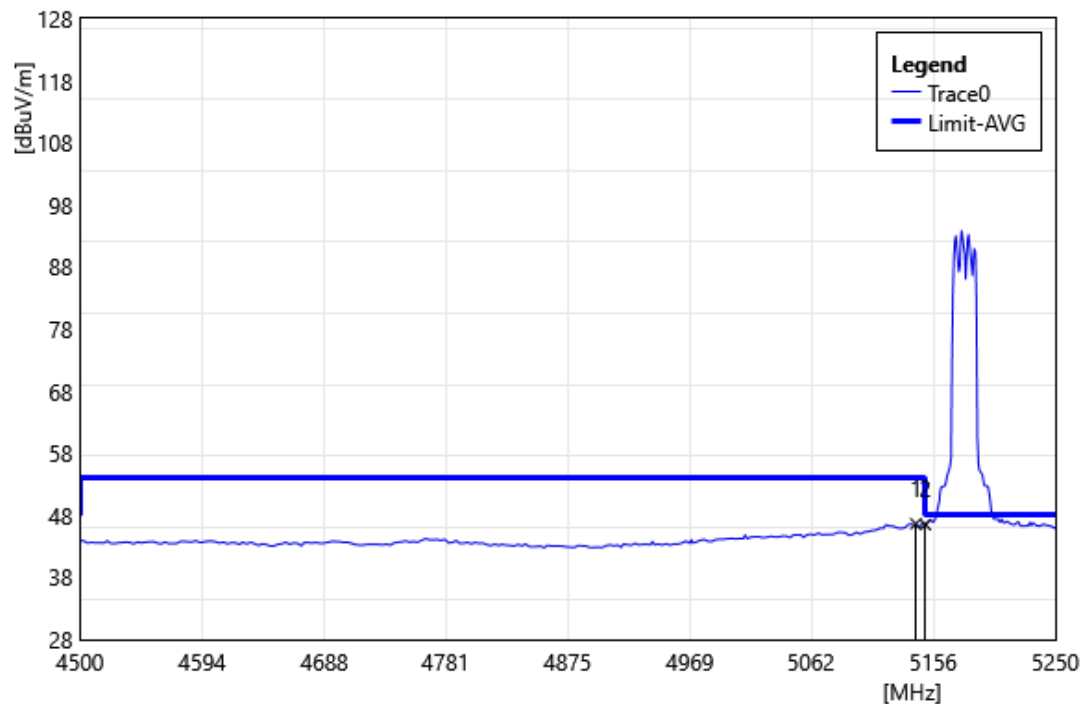


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.75	44.12	2.52	46.64	54.00	-7.36	AVG
2	5150.00	43.95	2.56	46.51	54.00	-7.49	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5320 MHz		
Polarization:	Horizontal		
Remark:			

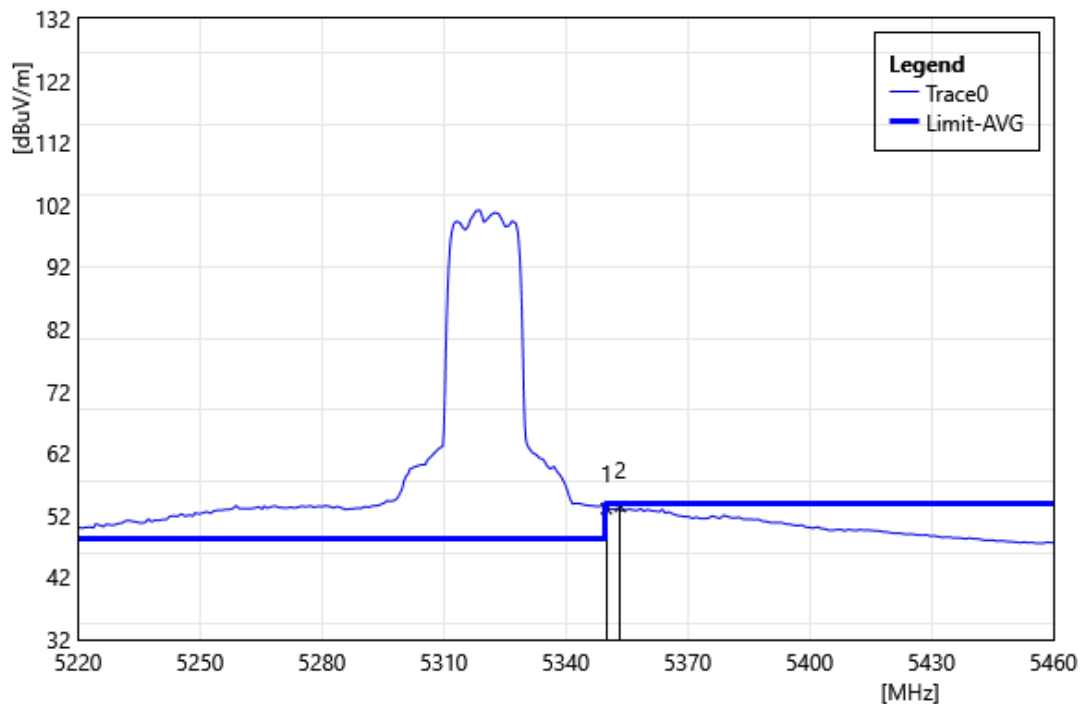


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	50.57	2.51	53.08	54.00	-0.92	AVG
2	5353.44	50.91	2.52	53.43	54.00	-0.57	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5320 MHz		
Polarization:	Vertical		
Remark:			

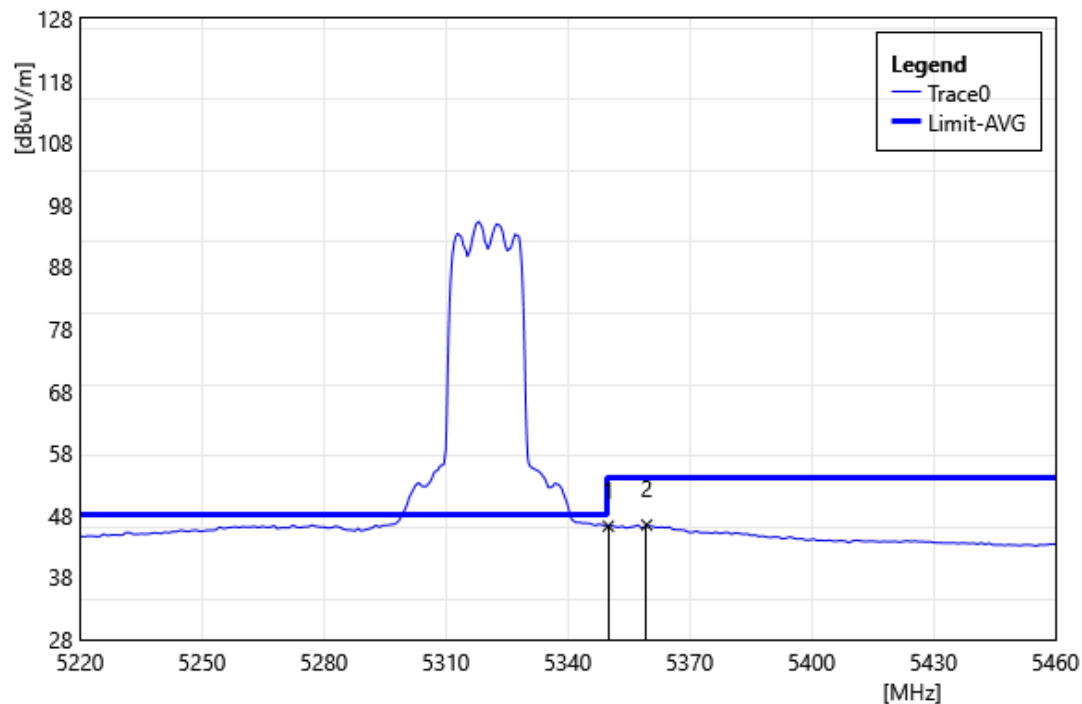


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	43.75	2.51	46.26	54.00	-7.74	AVG
2	5359.44	43.91	2.53	46.44	54.00	-7.56	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5500 MHz		
Polarization:	Horizontal		
Remark:			

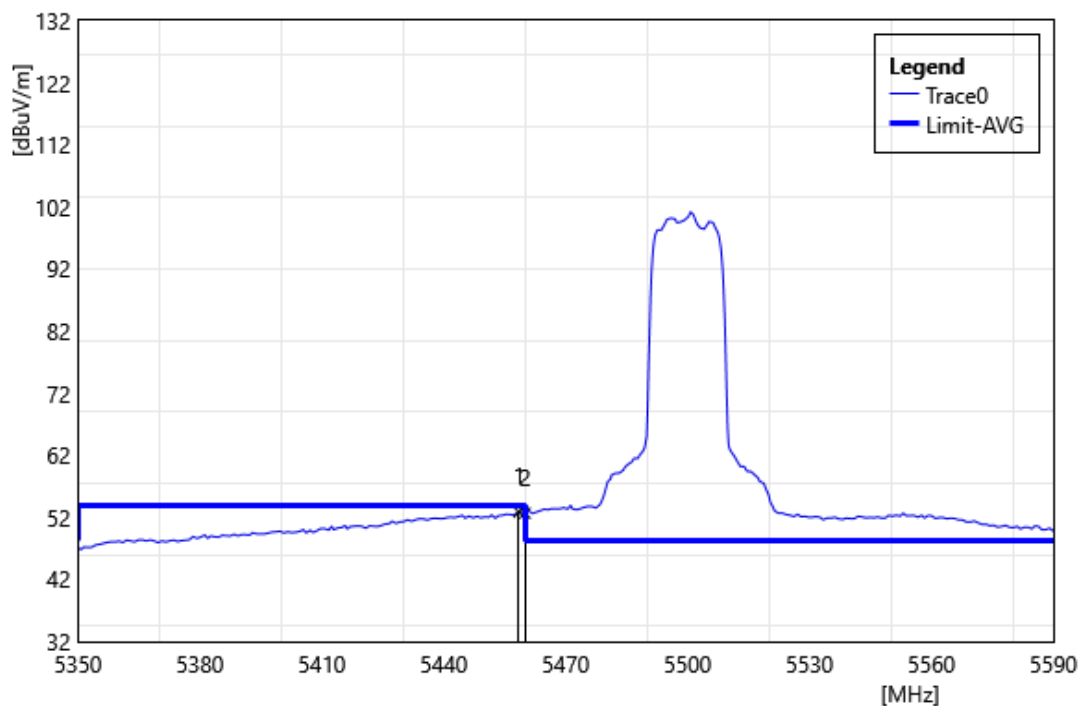


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.48	49.92	2.92	52.84	54.00	-1.16	AVG
2	5460.00	49.75	2.93	52.68	54.00	-1.32	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5500 MHz		
Polarization:	Vertical		
Remark:			

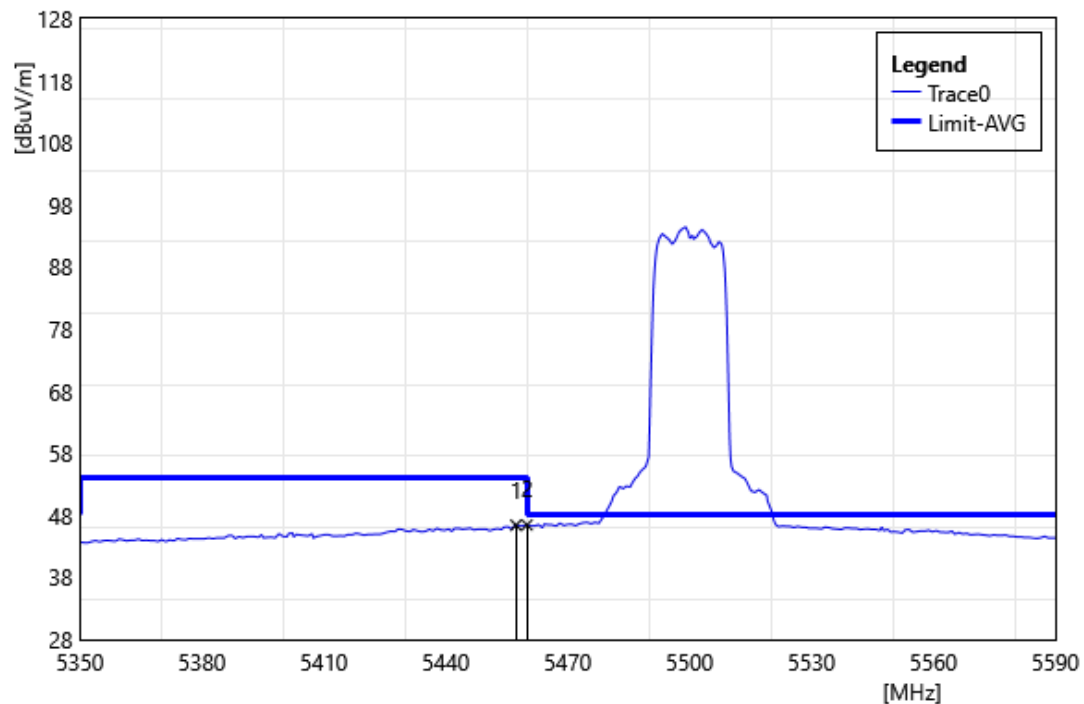


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.28	43.51	2.91	46.42	54.00	-7.58	AVG
2	5460.00	43.51	2.93	46.44	54.00	-7.56	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5720 MHz		
Polarization:	Horizontal		
Remark:			

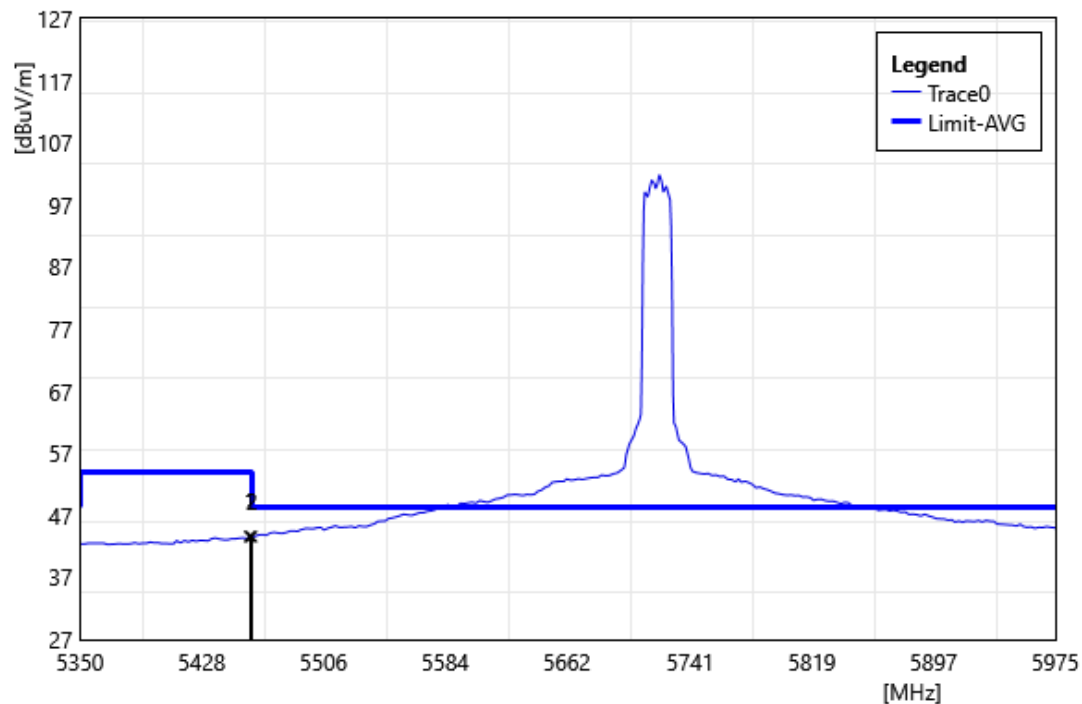


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.75	40.67	2.92	43.59	54.00	-10.41	AVG
2	5460.00	40.65	2.93	43.58	54.00	-10.42	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11a 5720 MHz		
Polarization:	Vertical		
Remark:			

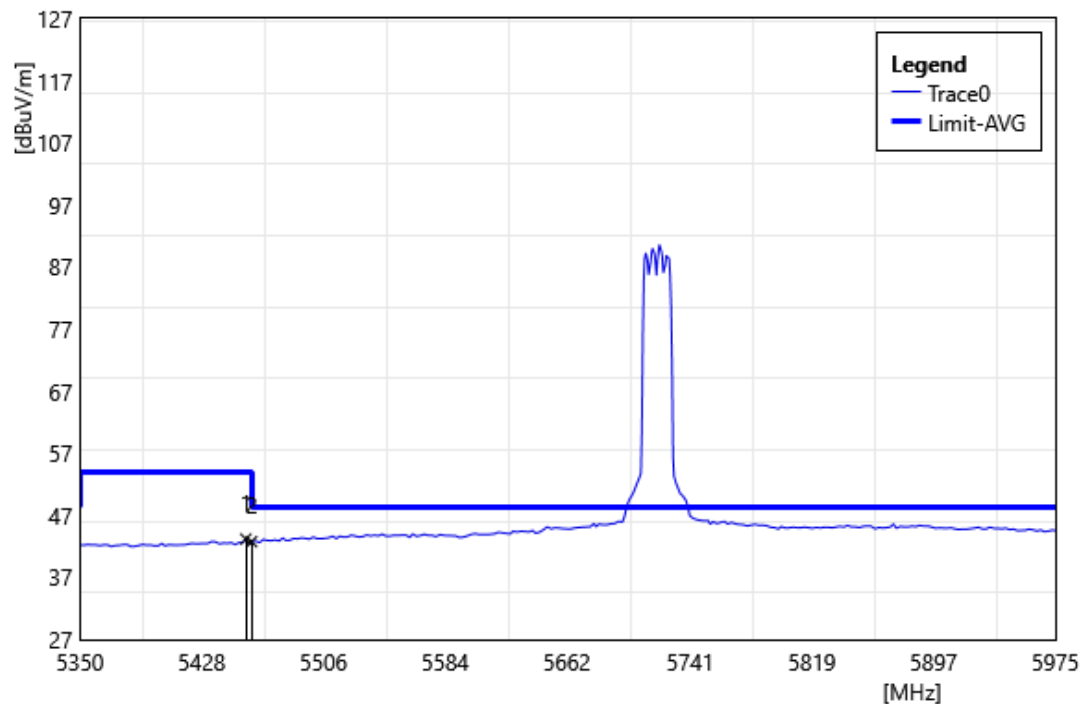


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.25	40.30	2.90	43.20	54.00	-10.80	AVG
2	5460.00	39.83	2.93	42.76	54.00	-11.24	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5180 MHz		
Polarization:	Horizontal		
Remark:			

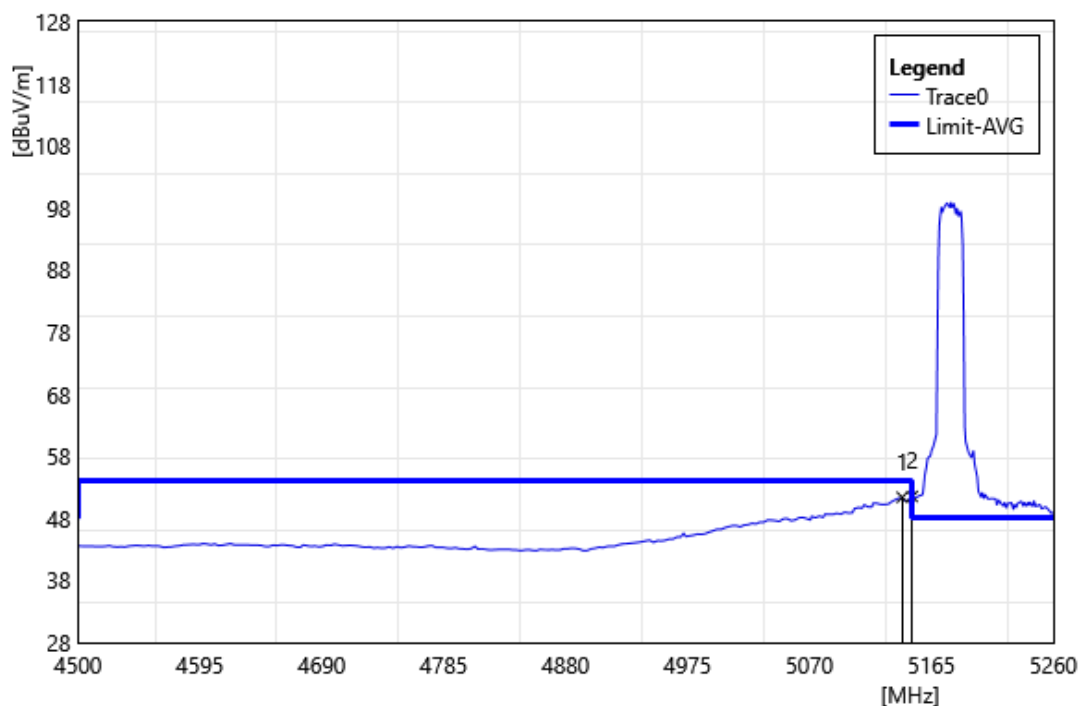


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.20	48.87	2.52	51.39	54.00	-2.61	AVG
2	5150.00	48.96	2.56	51.52	54.00	-2.48	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5180 MHz		
Polarization:	Vertical		
Remark:			

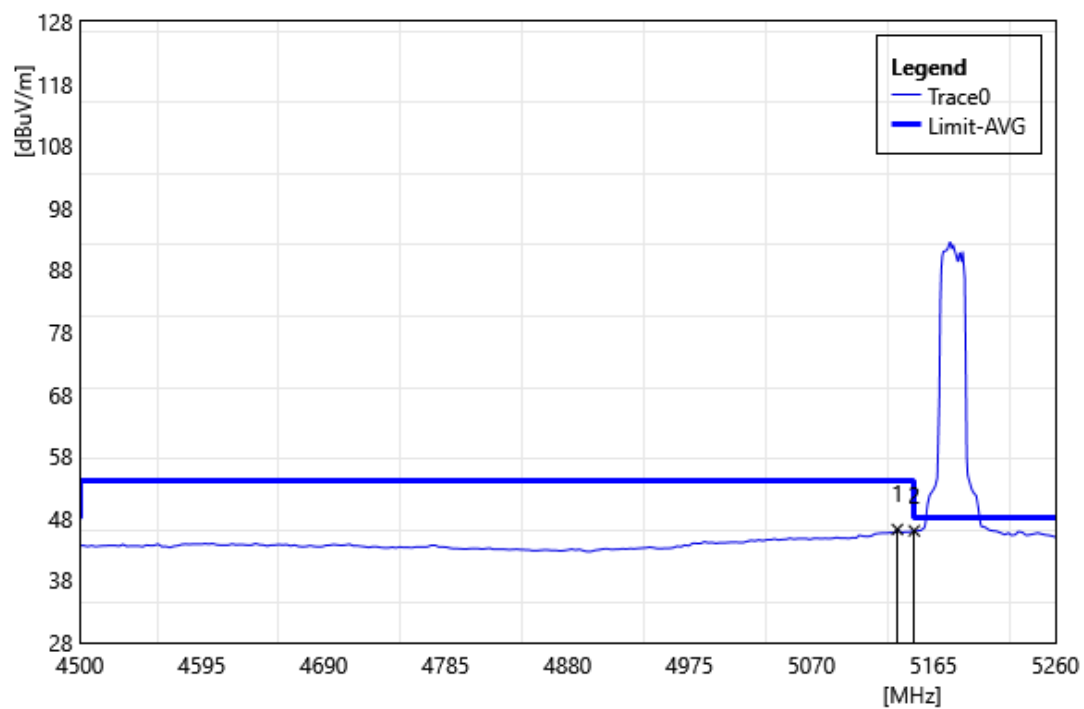


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5136.88	43.72	2.49	46.21	54.00	-7.79	AVG
2	5150.00	43.44	2.56	46.00	54.00	-8.00	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5320 MHz		
Polarization:	Horizontal		
Remark:			

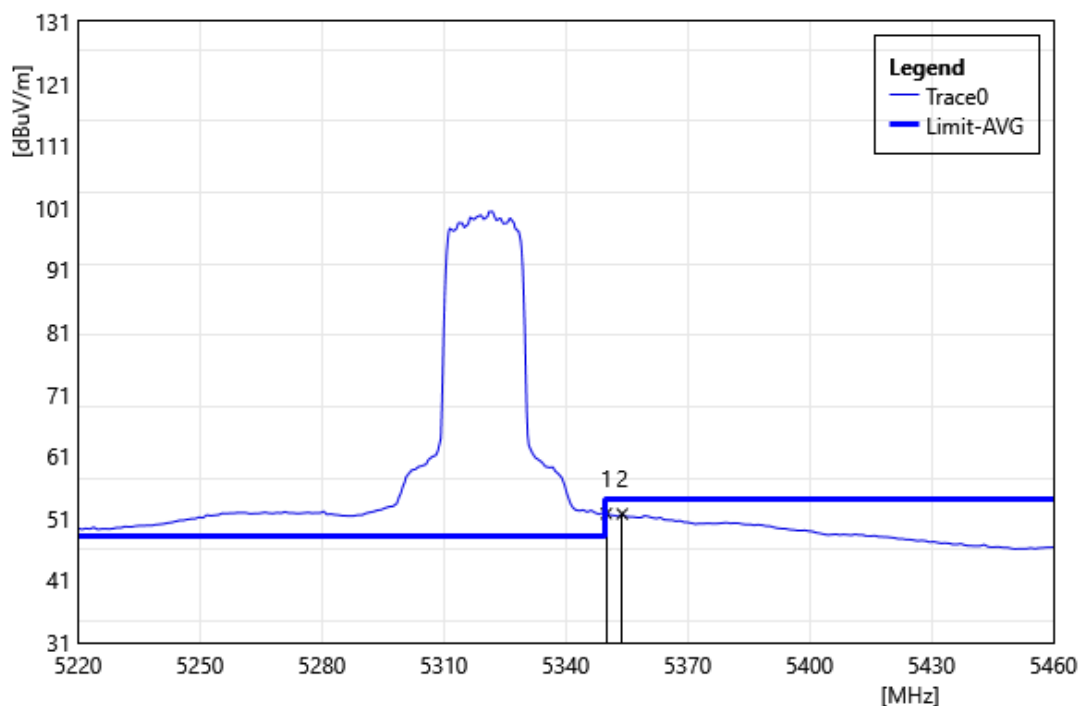


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	49.26	2.51	51.77	54.00	-2.23	AVG
2	5353.92	49.19	2.52	51.71	54.00	-2.29	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5320 MHz		
Polarization:	Vertical		
Remark:			

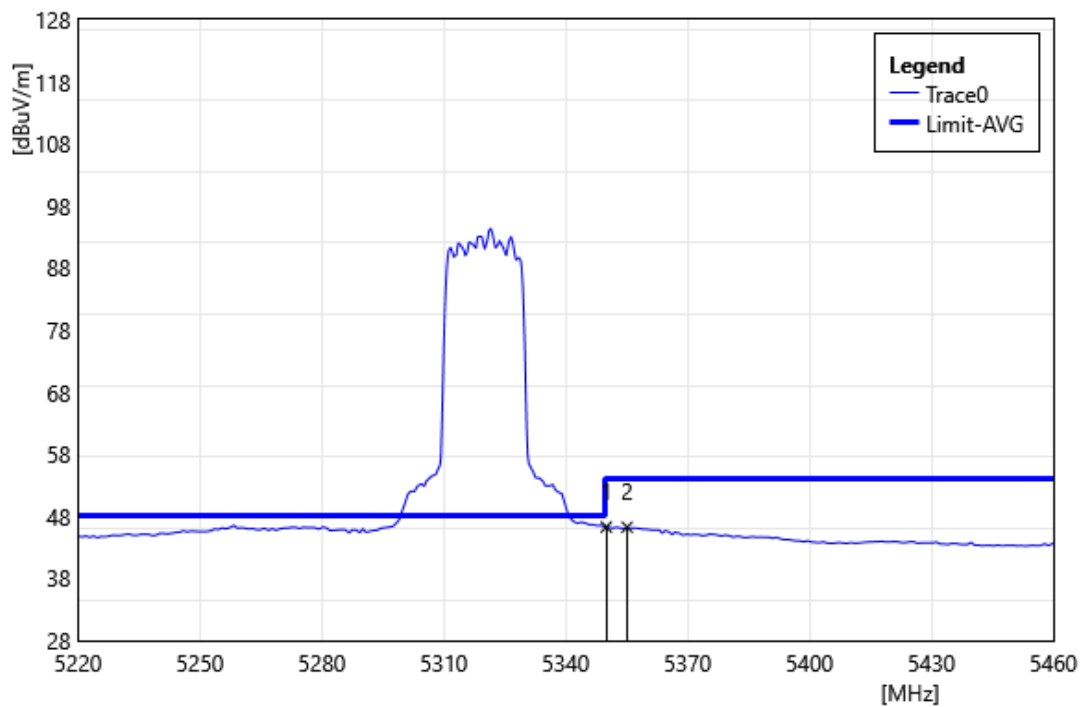


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	43.77	2.51	46.28	54.00	-7.72	AVG
2	5355.12	43.74	2.52	46.26	54.00	-7.74	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5500 MHz		
Polarization:	Horizontal		
Remark:			

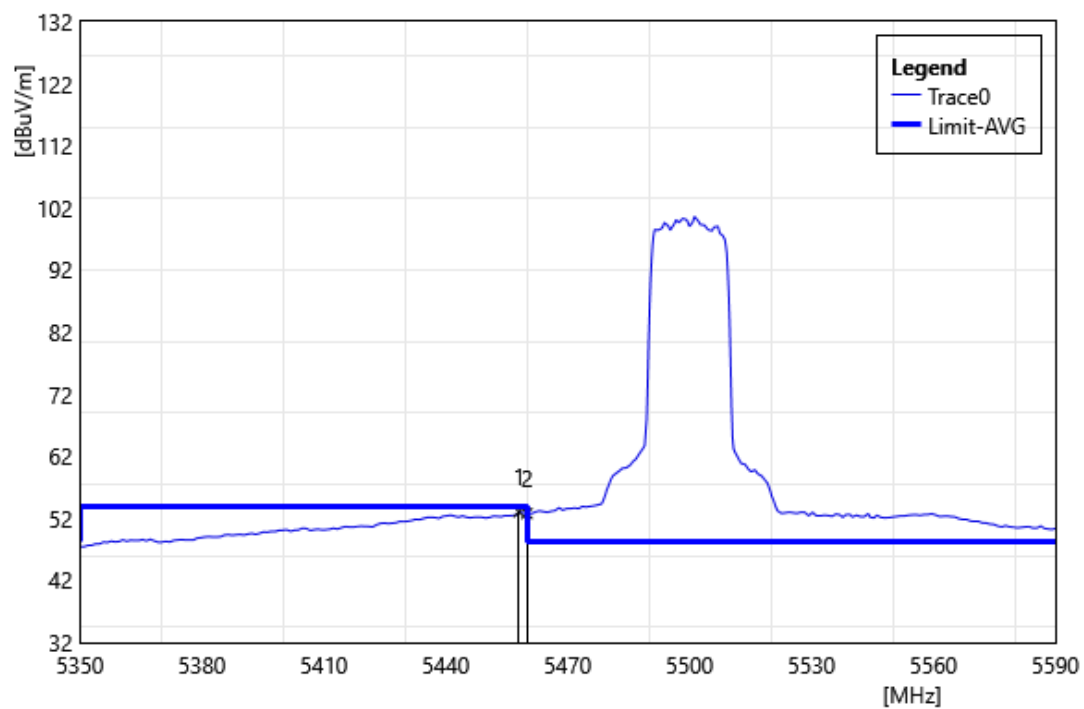


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.00	50.15	2.91	53.06	54.00	-0.94	AVG
2	5460.00	49.86	2.93	52.79	54.00	-1.21	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5500 MHz		
Polarization:	Vertical		
Remark:			

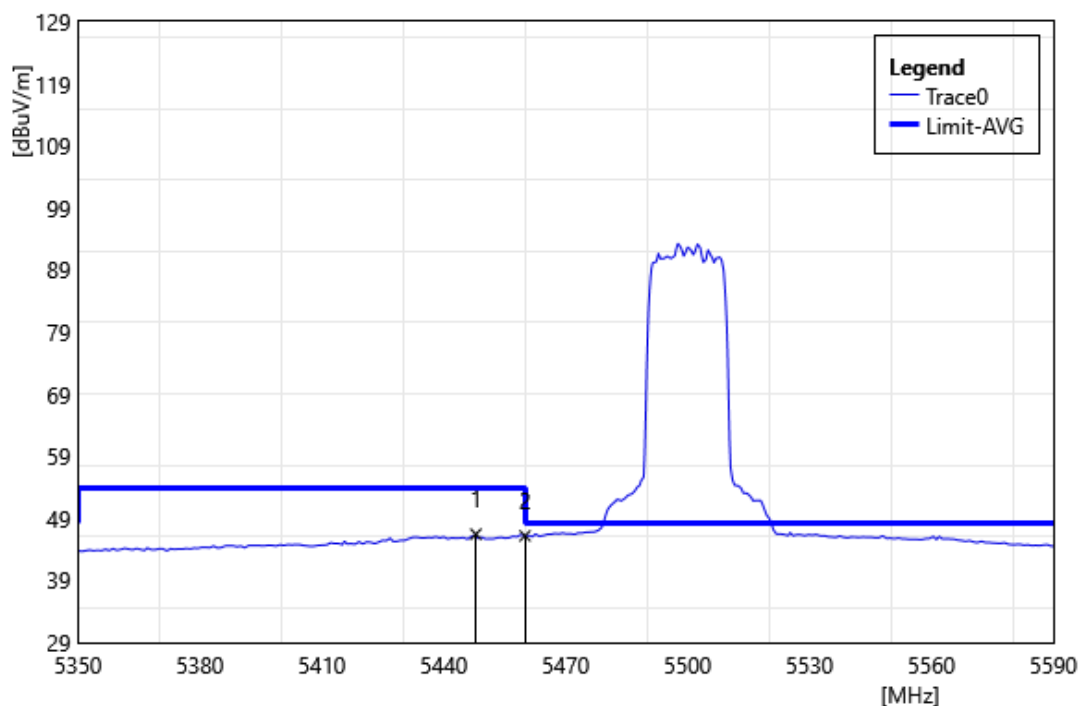


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5447.92	43.62	2.83	46.45	54.00	-7.55	AVG
2	5460.00	43.24	2.93	46.17	54.00	-7.83	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5720 MHz		
Polarization:	Horizontal		
Remark:			

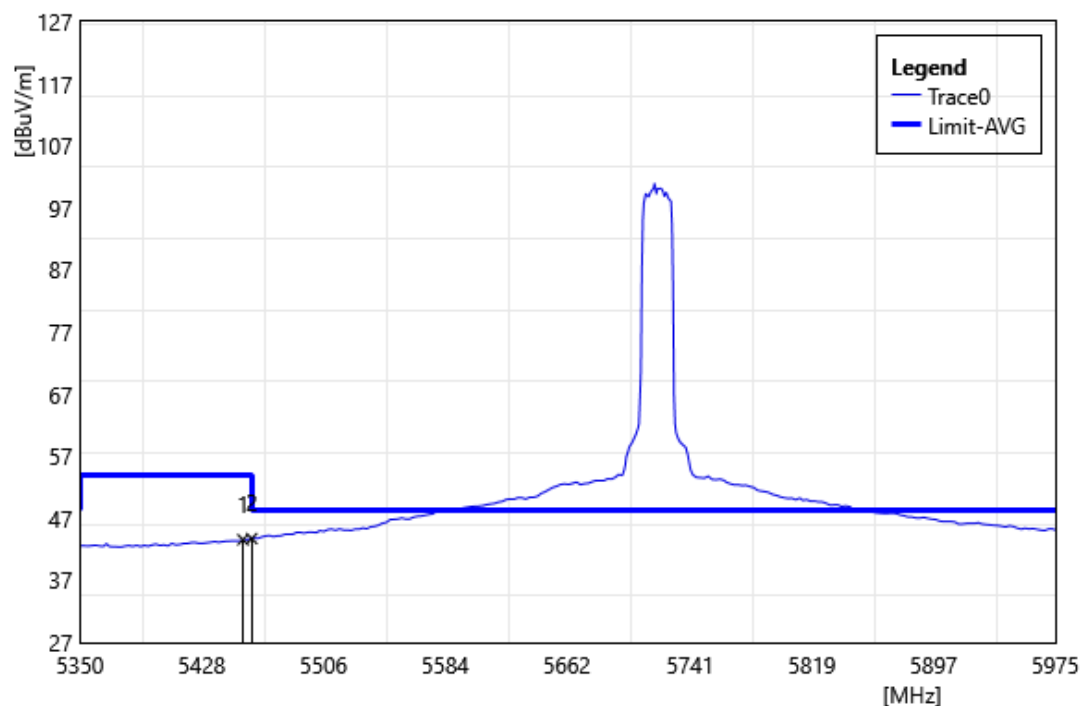


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.38	40.67	2.89	43.56	54.00	-10.44	AVG
2	5460.00	40.81	2.93	43.74	54.00	-10.26	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5720 MHz		
Polarization:	Vertical		
Remark:			

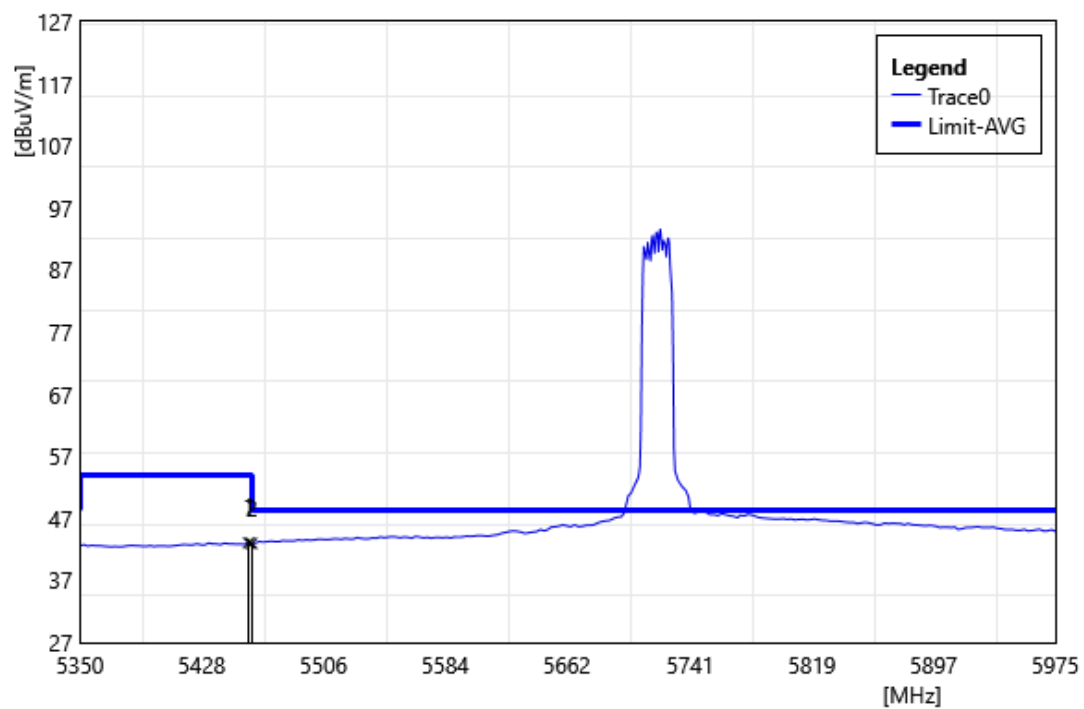


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.13	40.14	2.91	43.05	54.00	-10.95	AVG
2	5460.00	40.04	2.93	42.97	54.00	-11.03	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5190 MHz		
Polarization:	Horizontal		
Remark:			

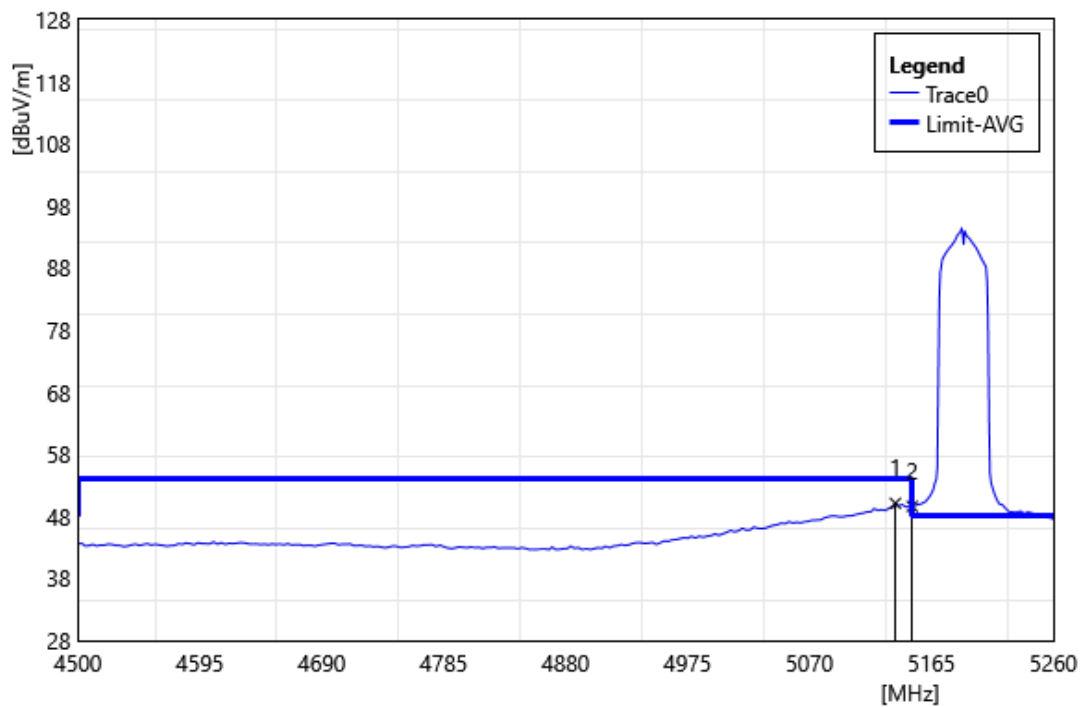


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5136.88	47.61	2.49	50.10	54.00	-3.90	AVG
2	5150.00	47.05	2.56	49.61	54.00	-4.39	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5190 MHz		
Polarization:	Vertical		
Remark:			

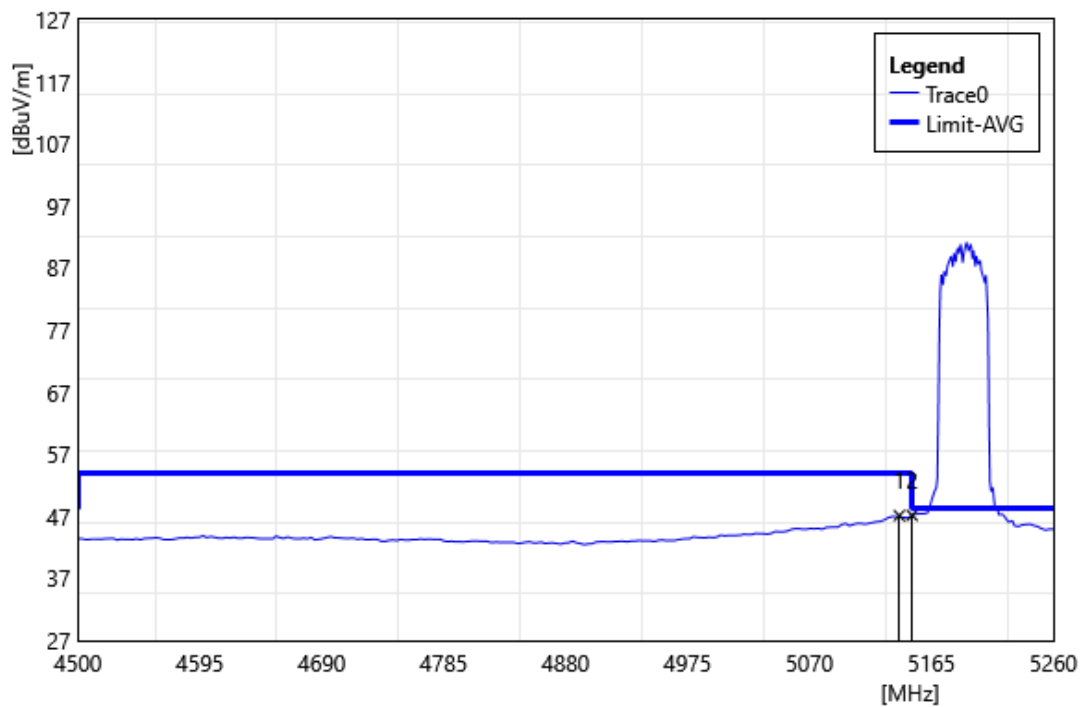


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5139.92	44.60	2.51	47.11	54.00	-6.89	AVG
2	5150.00	44.60	2.56	47.16	54.00	-6.84	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

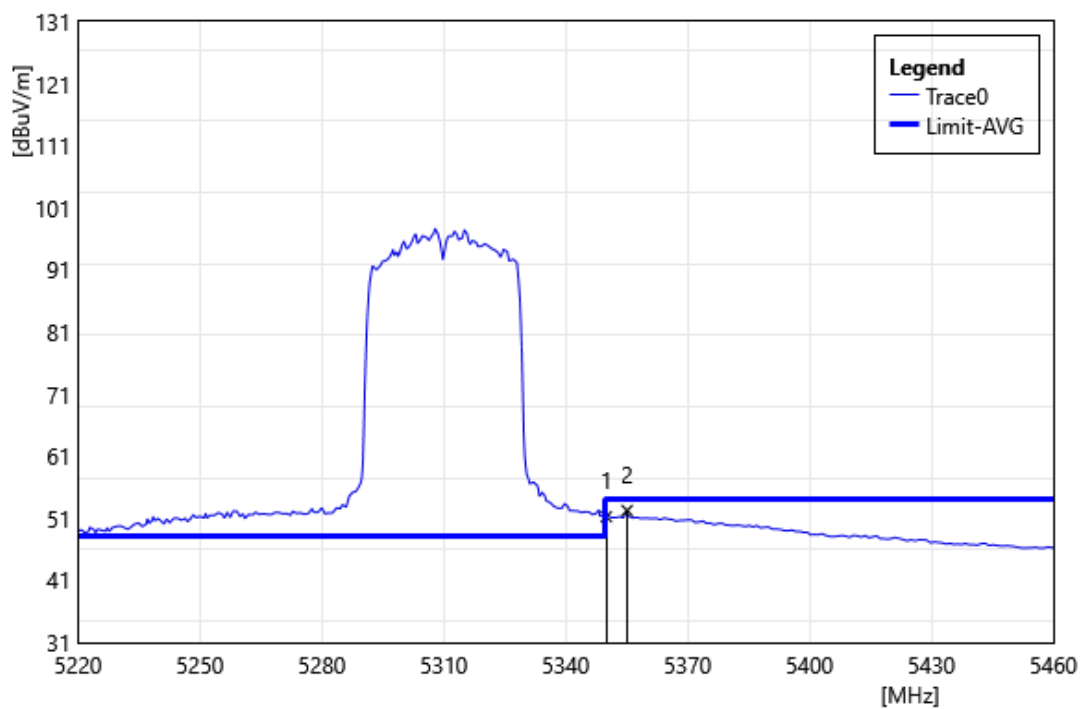


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	48.75	2.51	51.26	54.00	-2.74	AVG
2	5355.12	49.74	2.52	52.26	54.00	-1.74	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

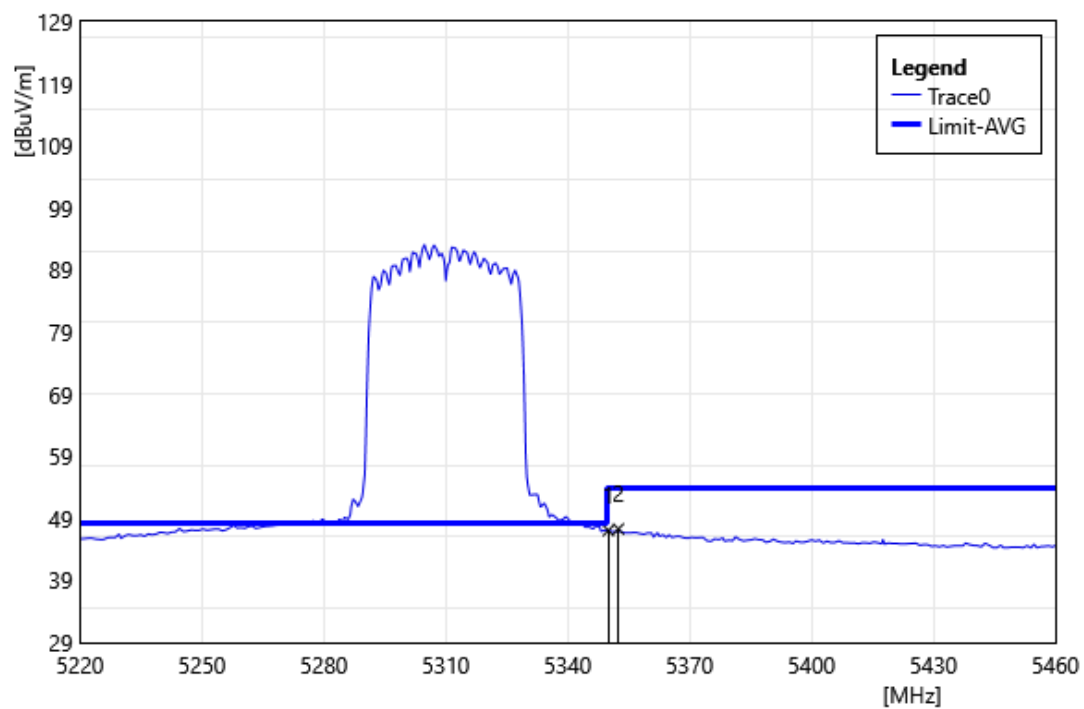


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	44.52	2.51	47.03	54.00	-6.97	AVG
2	5352.48	44.77	2.52	47.29	54.00	-6.71	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

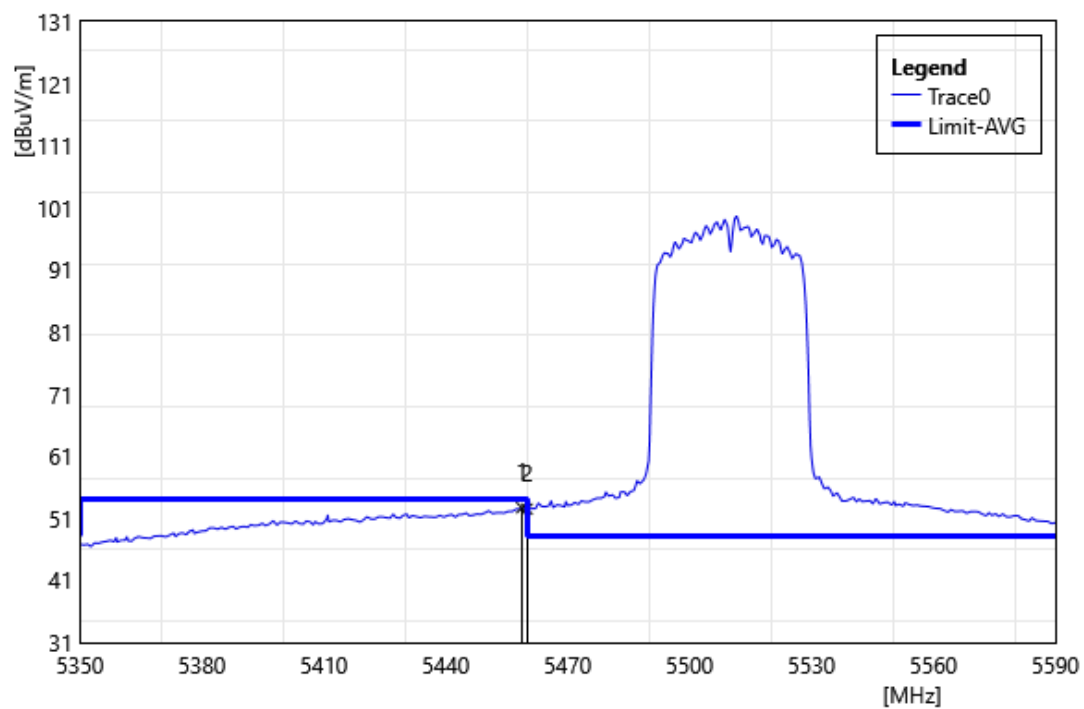


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.72	49.80	2.92	52.72	54.00	-1.29	AVG
2	5460.00	49.57	2.93	52.50	54.00	-1.50	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

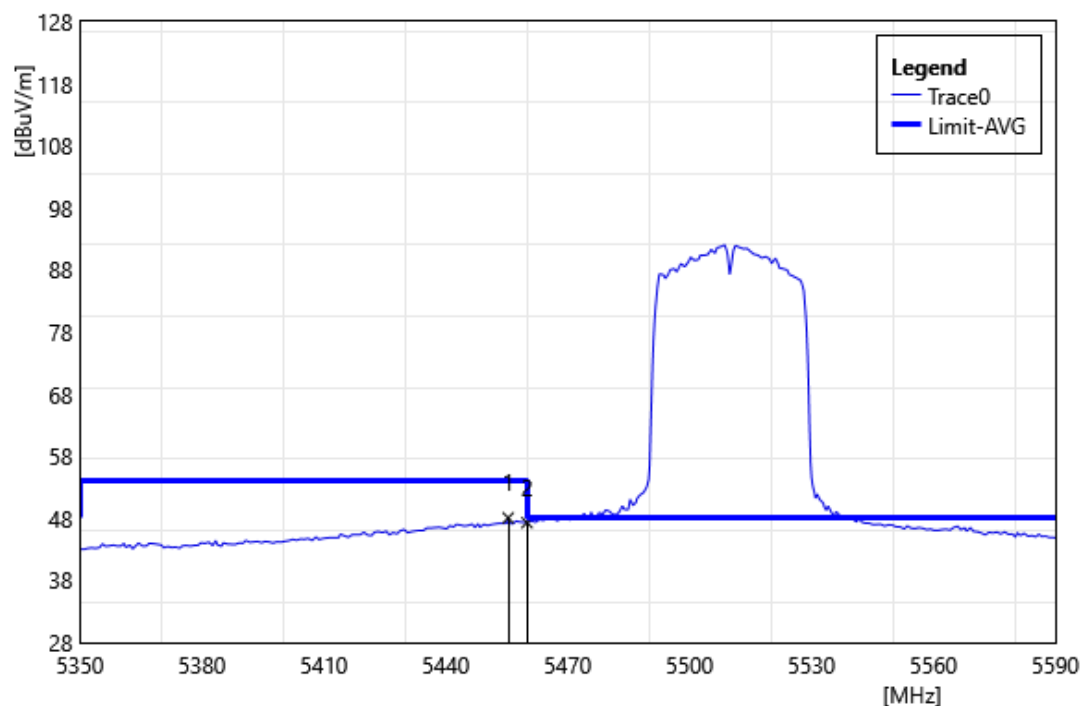


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.36	45.19	2.89	48.08	54.00	-5.92	AVG
2	5460.00	44.36	2.93	47.29	54.00	-6.71	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

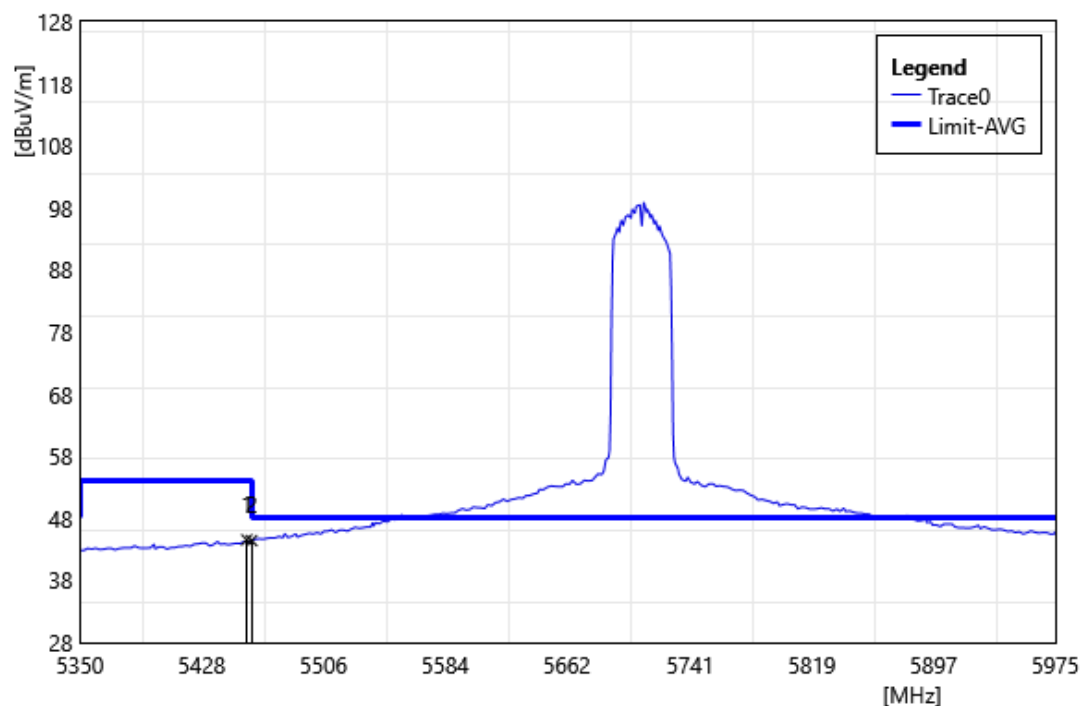


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.88	41.65	2.90	44.55	54.00	-9.45	AVG
2	5460.00	41.49	2.93	44.42	54.00	-9.58	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

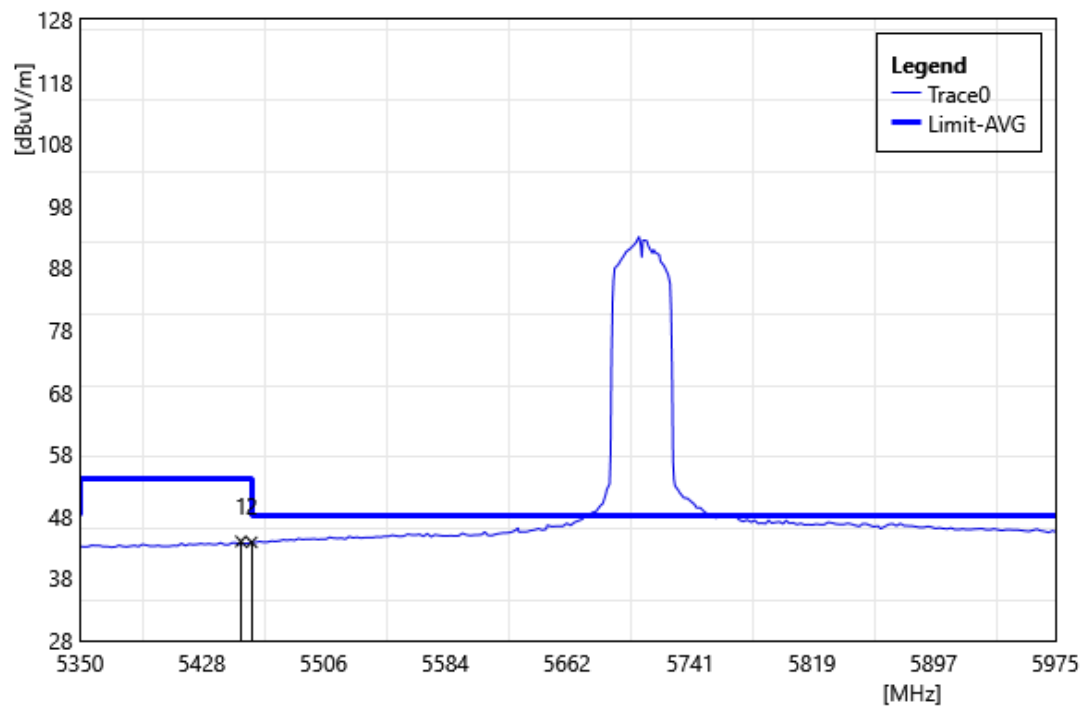


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.13	41.09	2.88	43.97	54.00	-10.03	AVG
2	5460.00	40.89	2.93	43.82	54.00	-10.18	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210 MHz		
Polarization:	Horizontal		
Remark:			

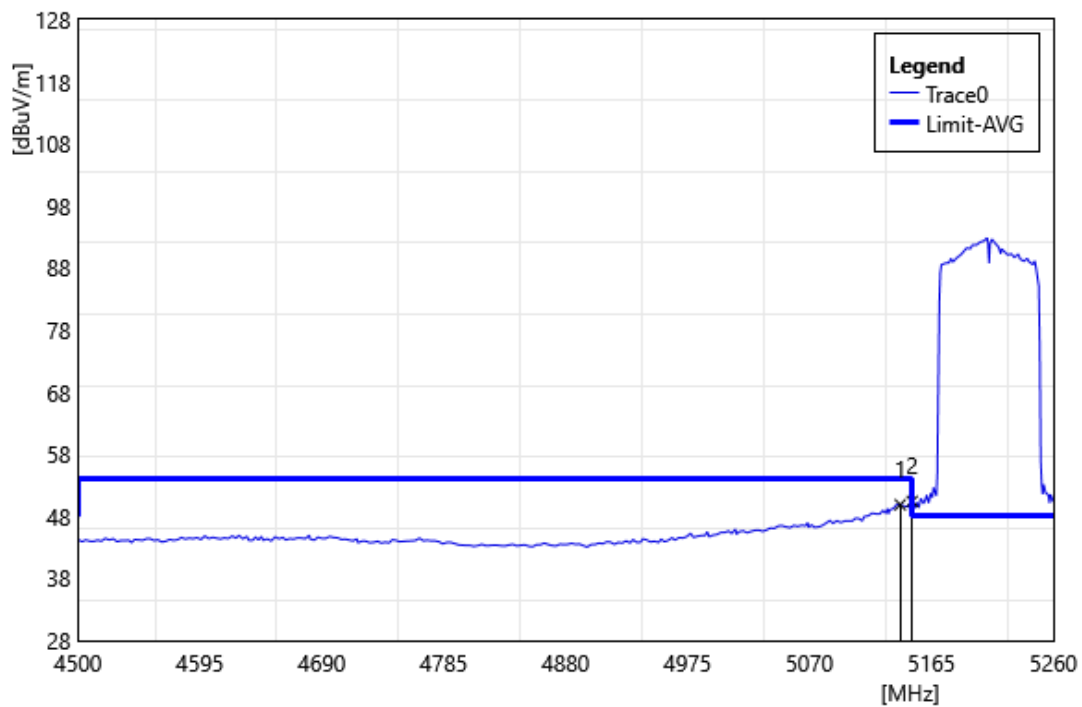


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5140.68	47.36	2.51	49.87	54.00	-4.13	AVG
2	5150.00	47.86	2.56	50.42	54.00	-3.58	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

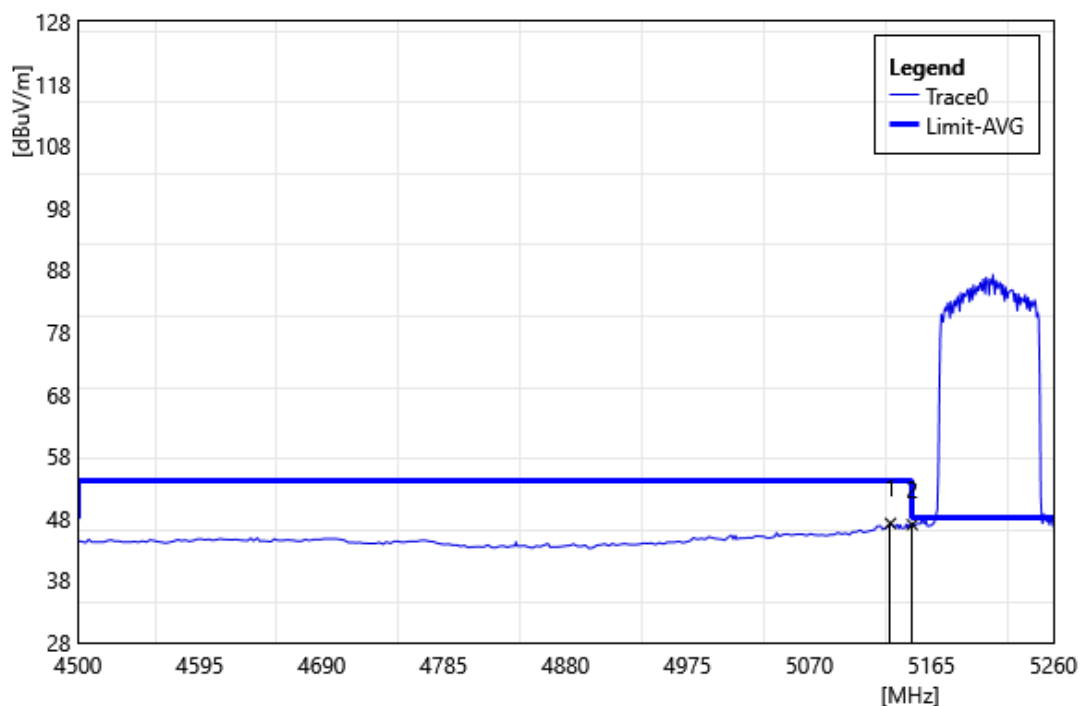


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5133.08	44.71	2.47	47.18	54.00	-6.82	AVG
2	5150.00	44.42	2.56	46.98	54.00	-7.02	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5290 MHz		
Polarization:	Horizontal		
Remark:			

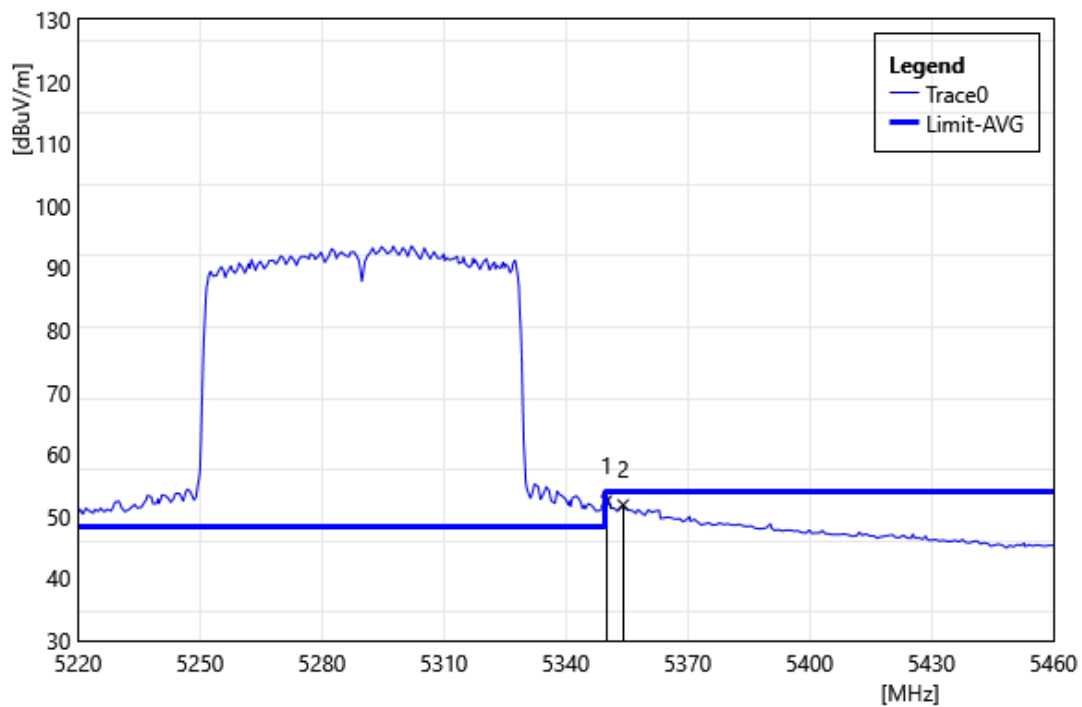


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	49.97	2.51	52.48	54.00	-1.52	AVG
2	5354.16	49.33	2.52	51.85	54.00	-2.15	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

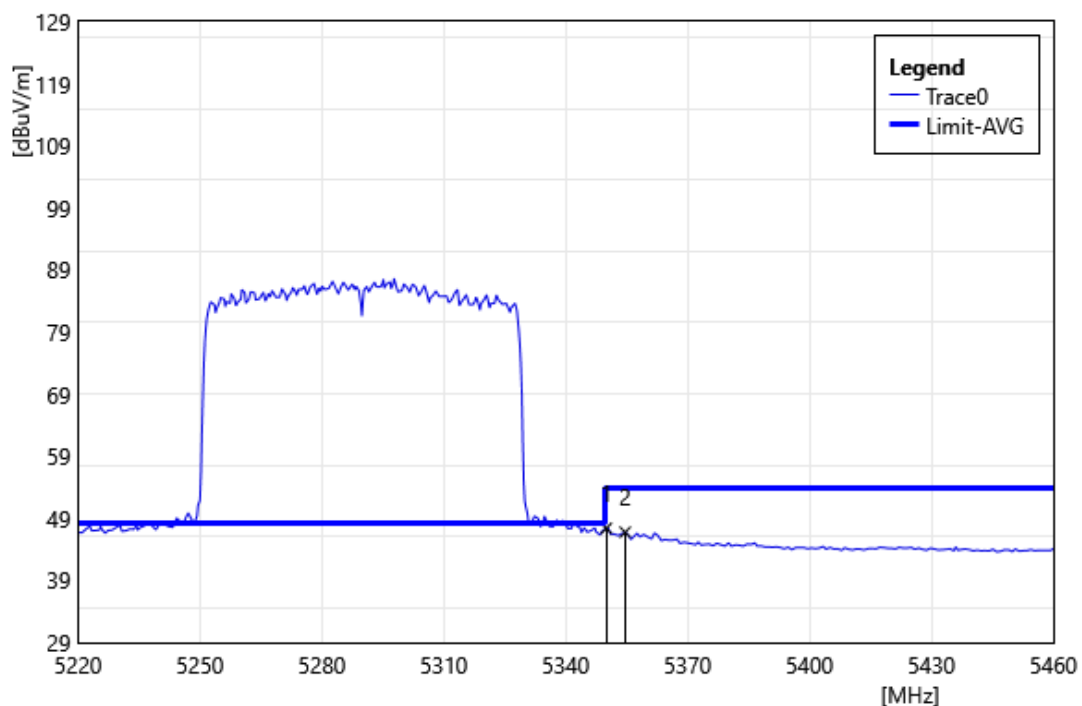


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	44.88	2.51	47.39	54.00	-6.61	AVG
2	5354.64	44.25	2.52	46.77	54.00	-7.23	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

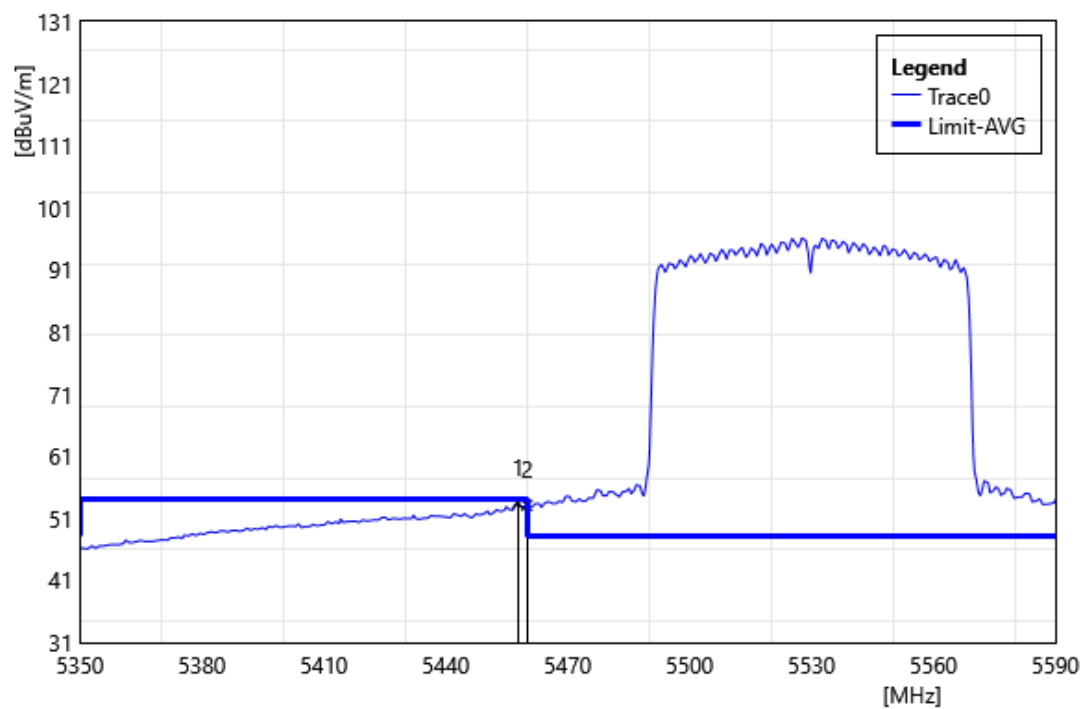


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.76	50.47	2.91	53.38	54.00	-0.62	AVG
2	5460.00	50.17	2.93	53.10	54.00	-0.90	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

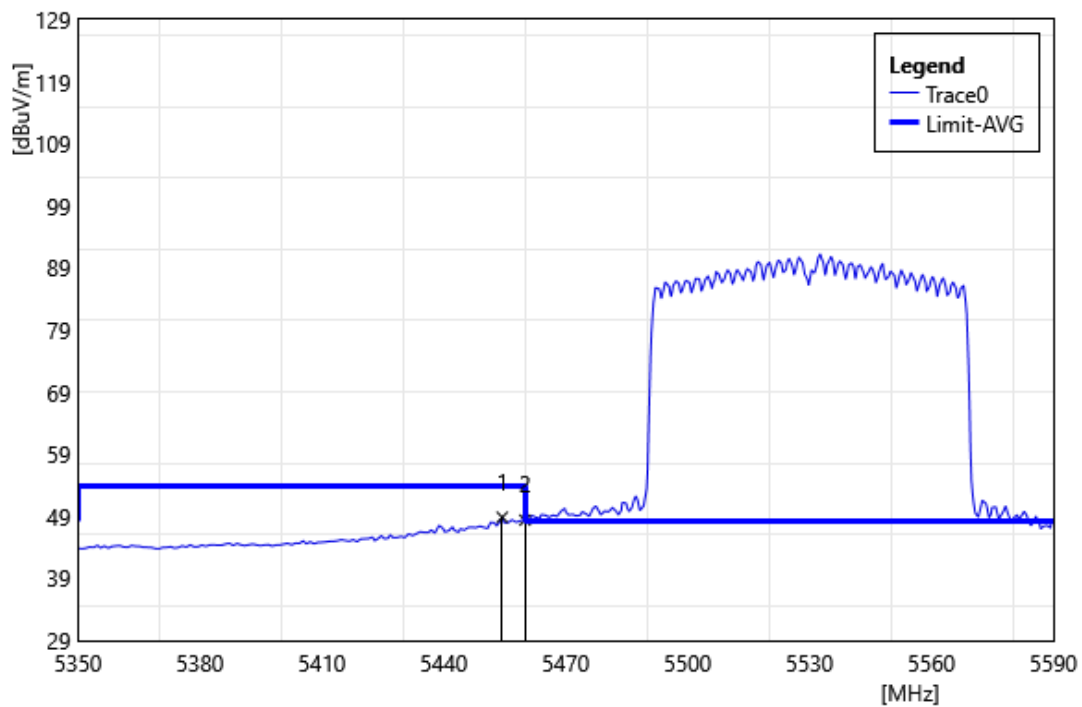


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.40	45.97	2.89	48.86	54.00	-5.14	AVG
2	5460.00	45.47	2.93	48.40	54.00	-5.60	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

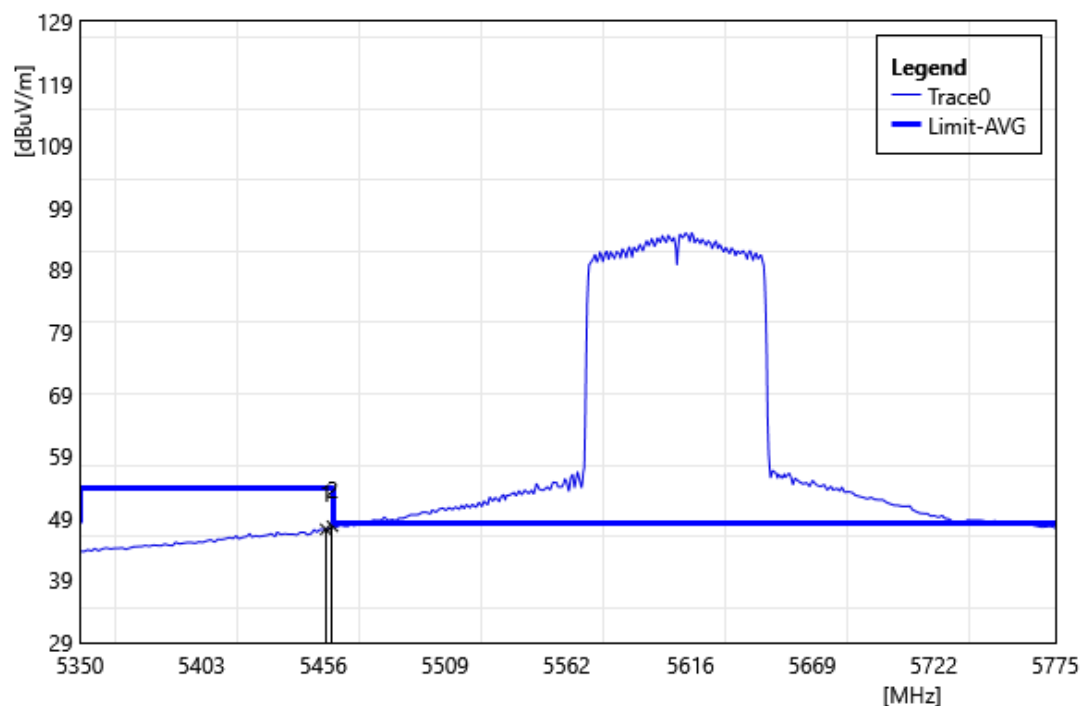


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.10	44.32	2.91	47.23	54.00	-6.77	AVG
2	5460.00	44.80	2.93	47.73	54.00	-6.27	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

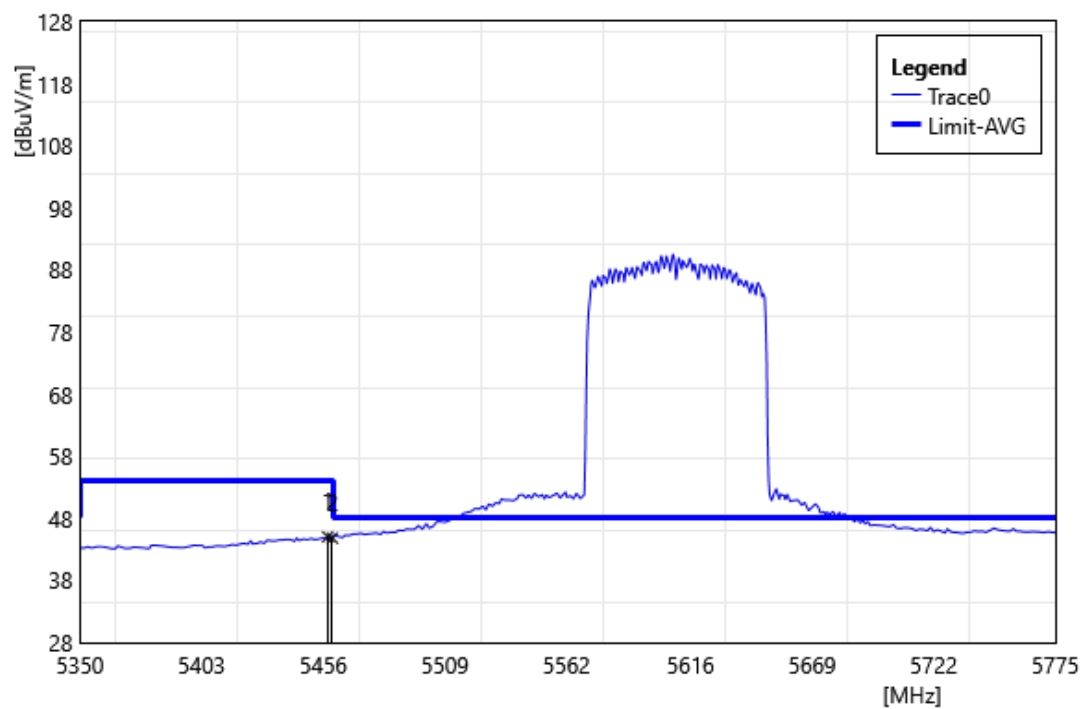


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.95	42.10	2.91	45.01	54.00	-8.99	AVG
2	5460.00	41.88	2.93	44.81	54.00	-9.19	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5690 MHz		
Polarization:	Horizontal		
Remark:			

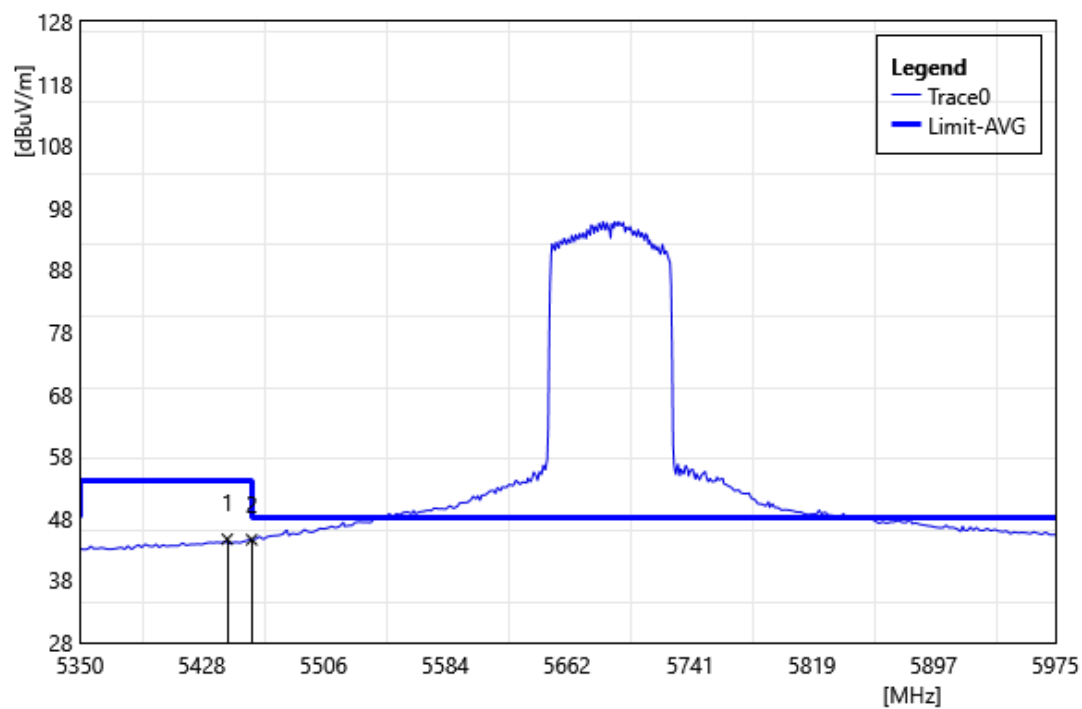


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5444.38	41.84	2.81	44.65	54.00	-9.35	AVG
2	5460.00	41.64	2.93	44.57	54.00	-9.43	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5690 MHz		
Polarization:	Vertical		
Remark:			

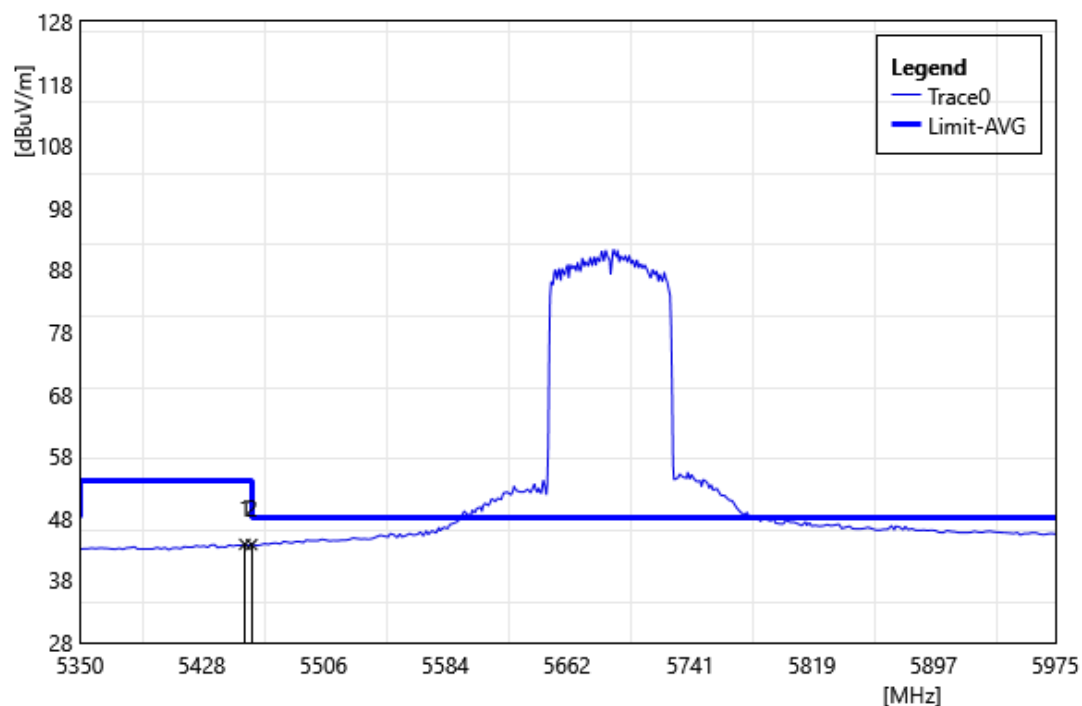


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.63	40.92	2.89	43.82	54.00	-10.19	AVG
2	5460.00	40.84	2.93	43.77	54.00	-10.23	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

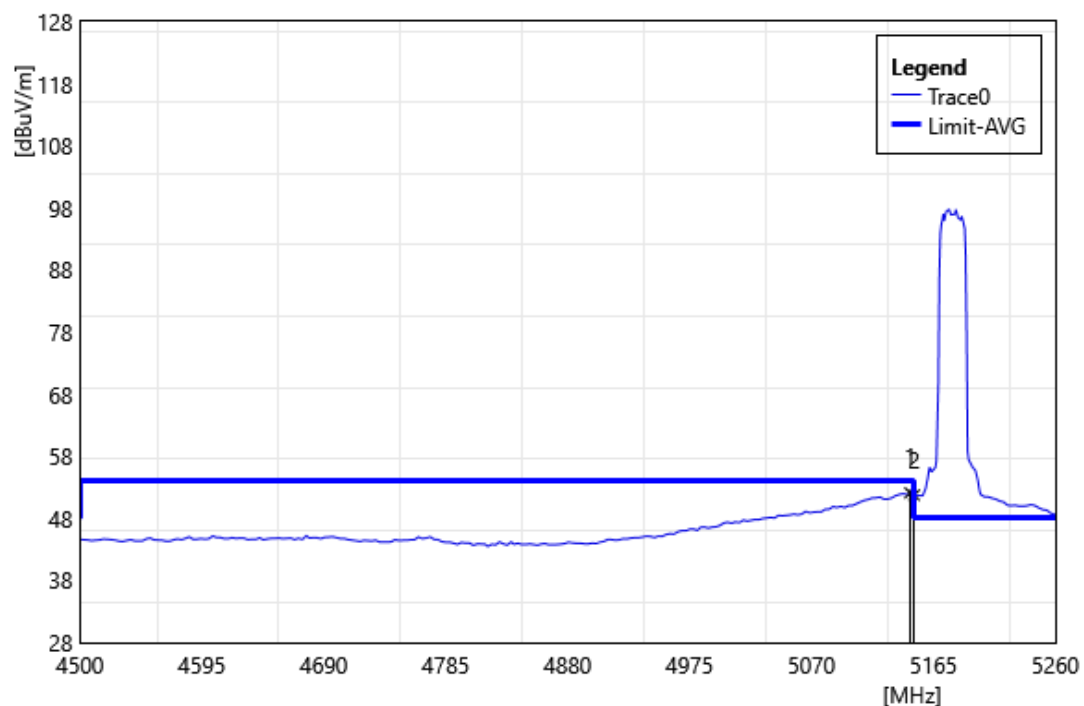


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	49.54	2.55	52.09	54.00	-1.91	AVG
2	5150.00	49.18	2.56	51.74	54.00	-2.26	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

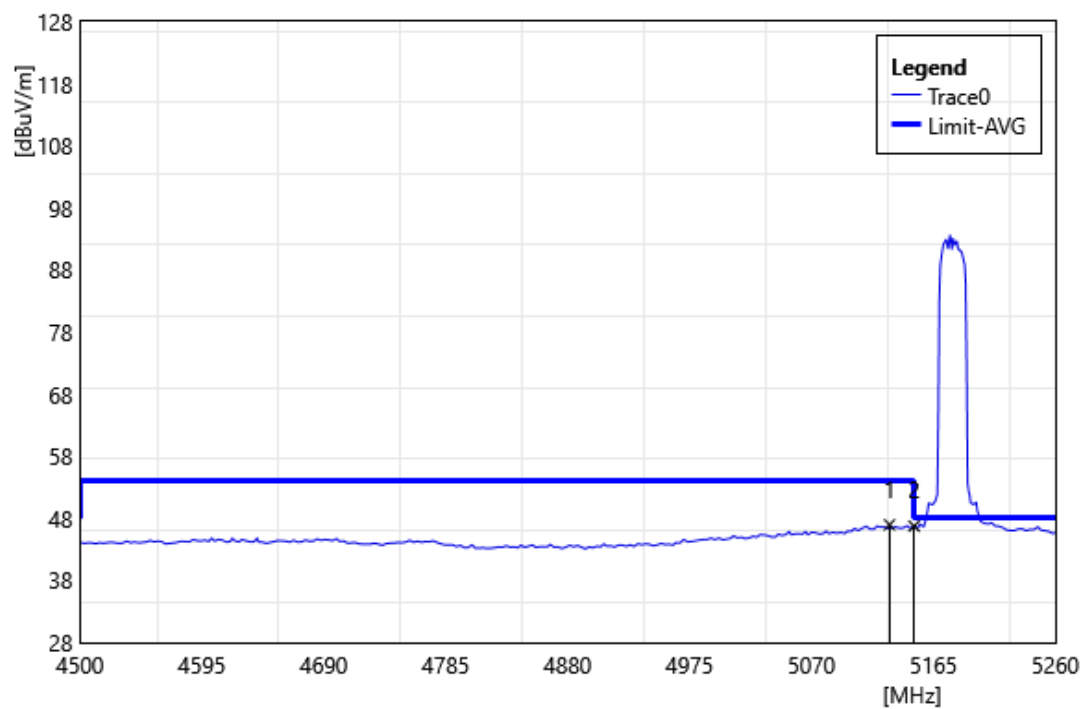


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5130.80	44.50	2.46	46.96	54.00	-7.04	AVG
2	5150.00	44.19	2.56	46.75	54.00	-7.25	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5320		
	MHz		
Polarization:	Horizontal		
Remark:			

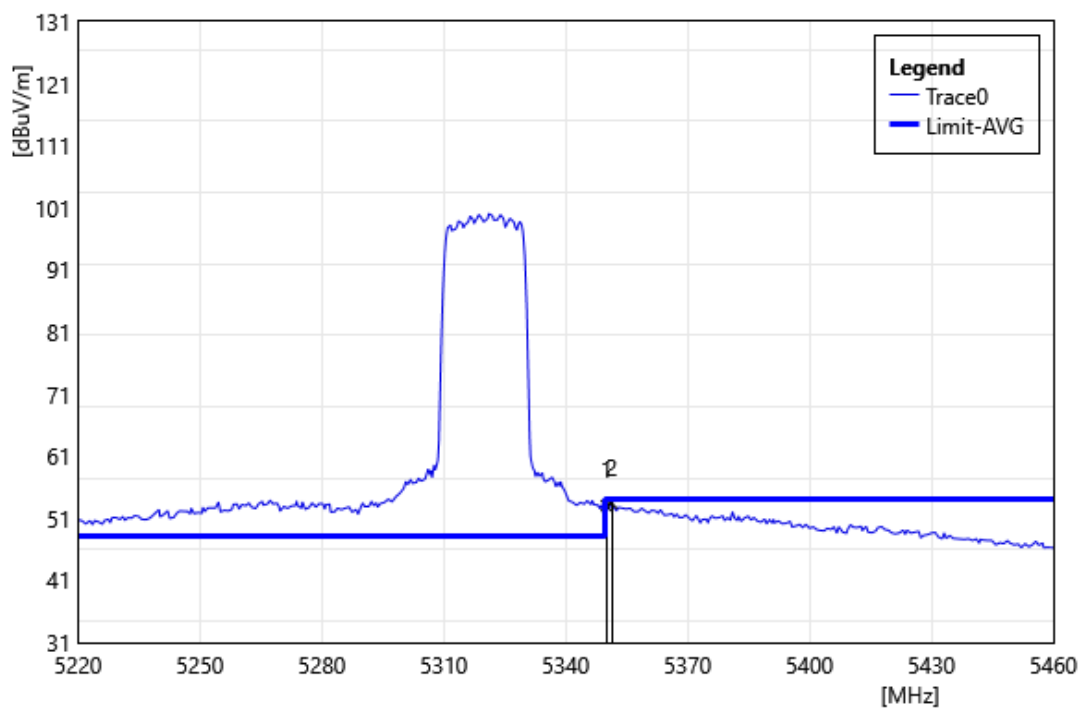


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	50.52	2.51	53.03	54.00	-0.97	AVG
2	5351.28	50.93	2.52	53.45	54.00	-0.55	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5320 MHz		
Polarization:	Vertical		
Remark:			

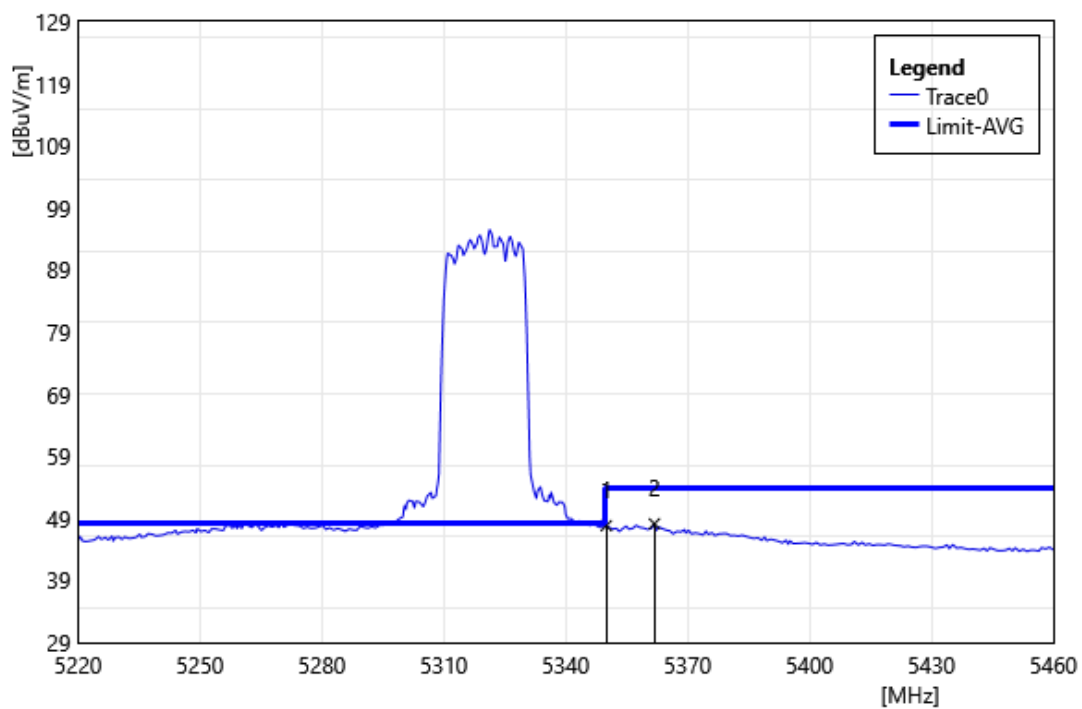


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	45.30	2.51	47.81	54.00	-6.19	AVG
2	5361.84	45.59	2.53	48.12	54.00	-5.88	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

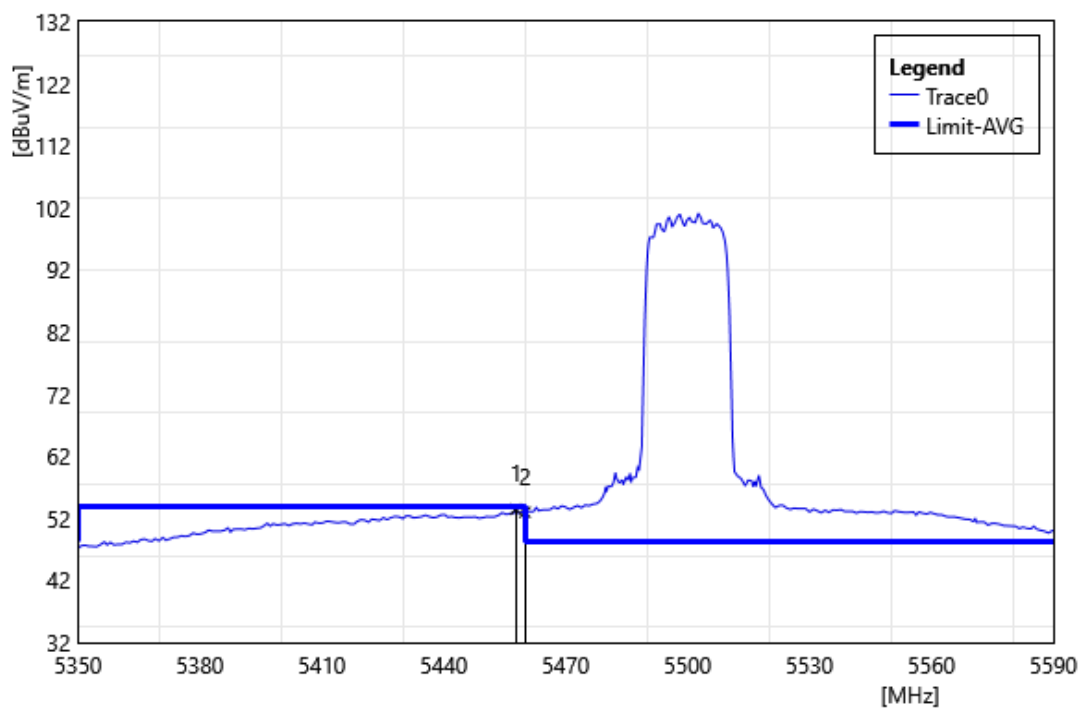


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.76	50.56	2.91	53.47	54.00	-0.53	AVG
2	5460.00	50.06	2.93	52.99	54.00	-1.01	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5500 MHz		
Polarization:	Vertical		
Remark:			

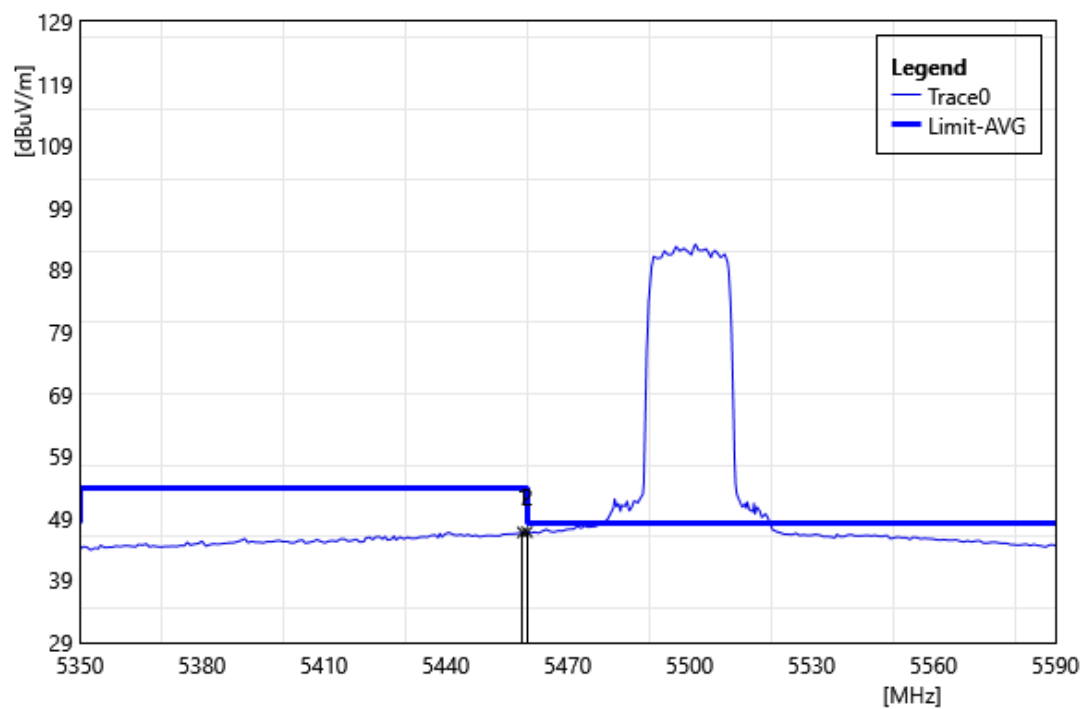


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.96	43.82	2.92	46.74	54.00	-7.26	AVG
2	5460.00	43.84	2.93	46.77	54.00	-7.23	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5720		
	MHz		
Polarization:	Horizontal		
Remark:			

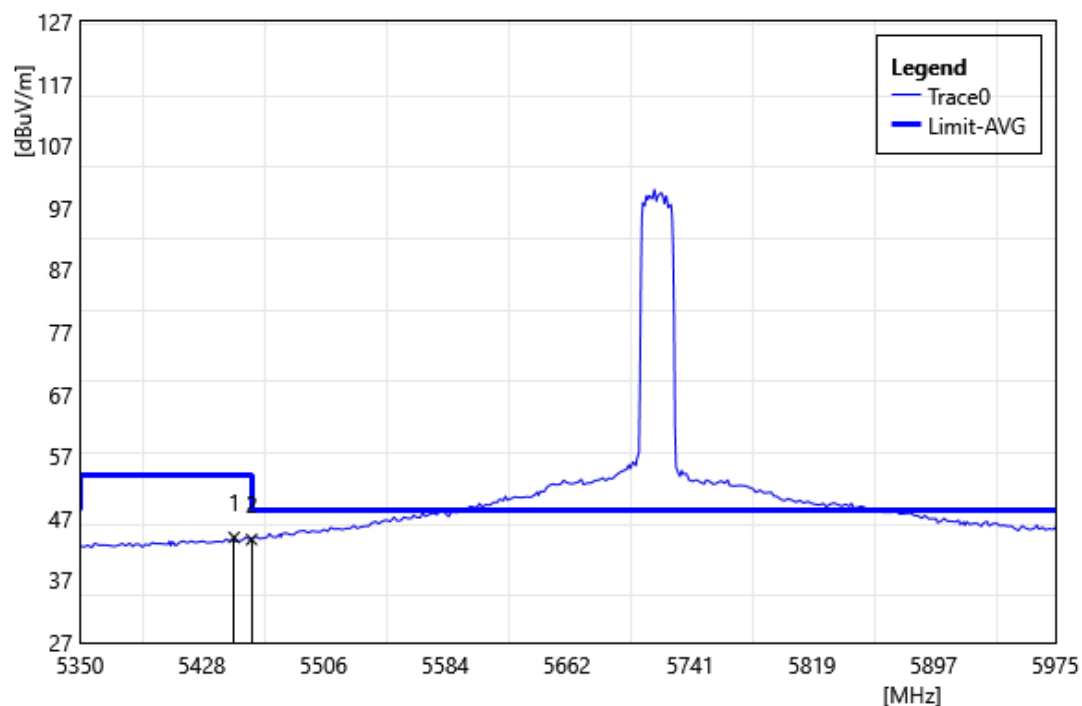


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5448.75	41.09	2.84	43.93	54.00	-10.07	AVG
2	5460.00	40.65	2.93	43.58	54.00	-10.42	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 5720		
	MHz		
Polarization:	Vertical		
Remark:			

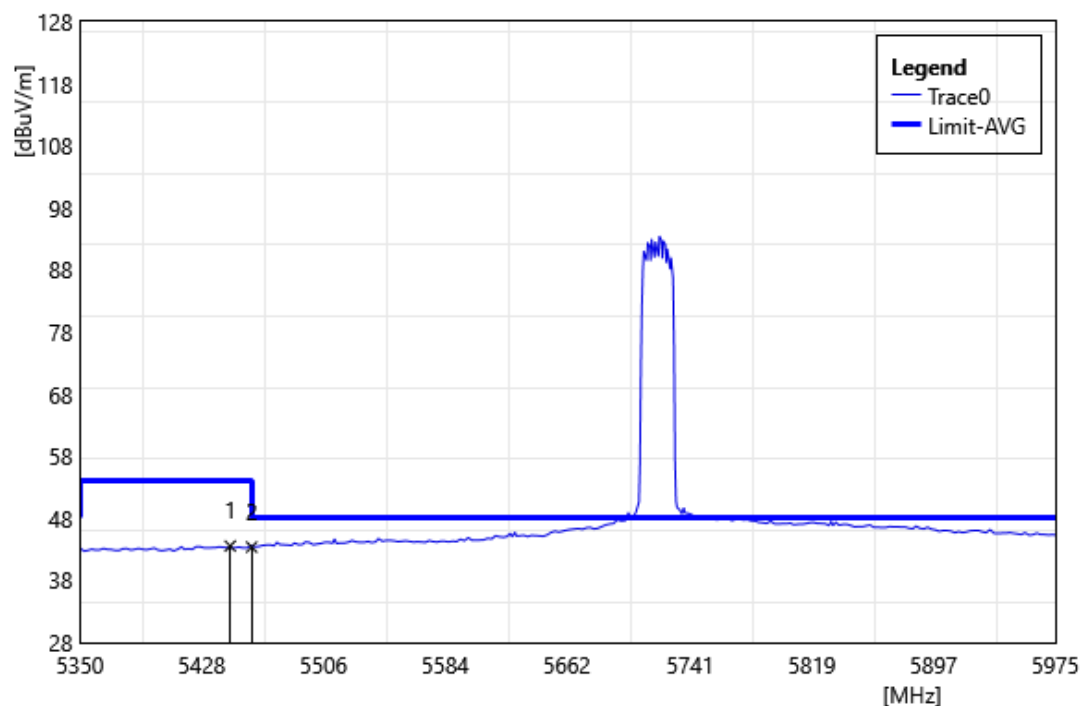


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5446.25	40.73	2.82	43.55	54.00	-10.45	AVG
2	5460.00	40.44	2.93	43.37	54.00	-10.63	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

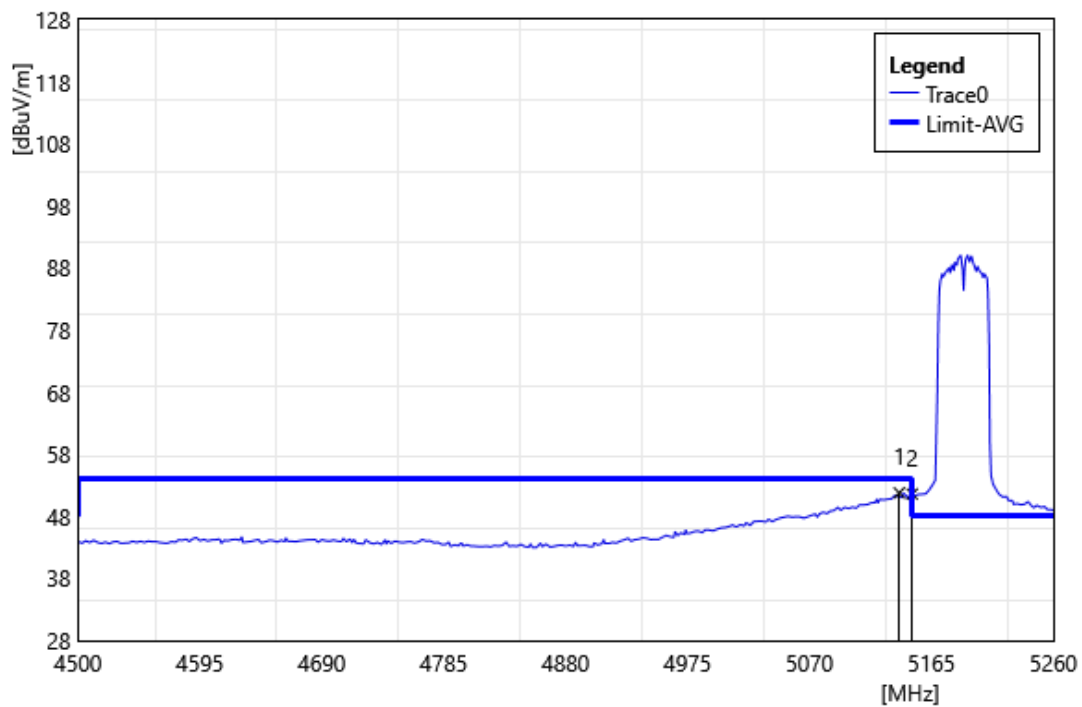


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5139.92	49.27	2.51	51.78	54.00	-2.22	AVG
2	5150.00	49.03	2.56	51.59	54.00	-2.41	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

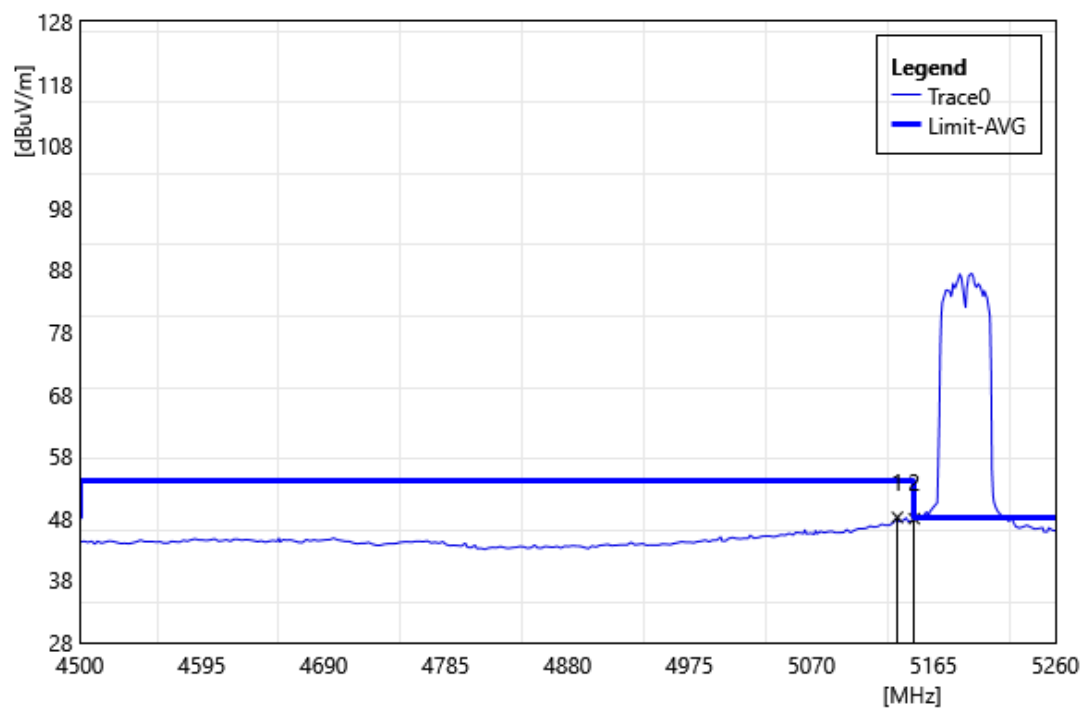


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5136.88	45.67	2.49	48.16	54.00	-5.84	AVG
2	5150.00	45.39	2.56	47.95	54.00	-6.05	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

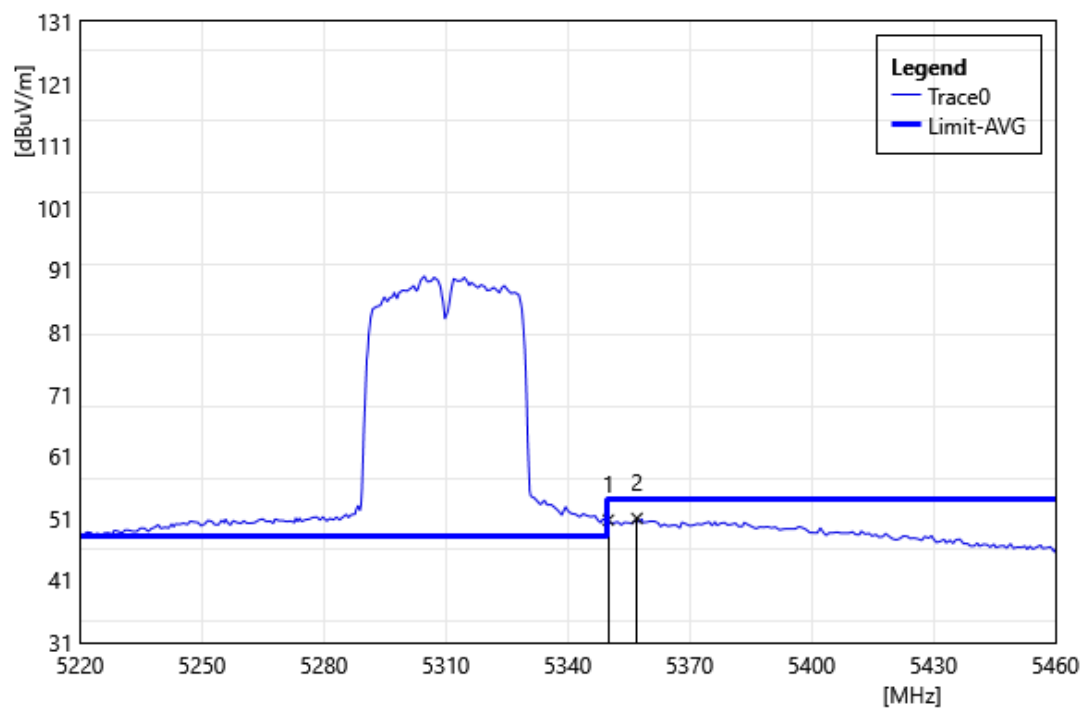


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	48.22	2.51	50.73	54.00	-3.27	AVG
2	5357.04	48.47	2.52	50.99	54.00	-3.01	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

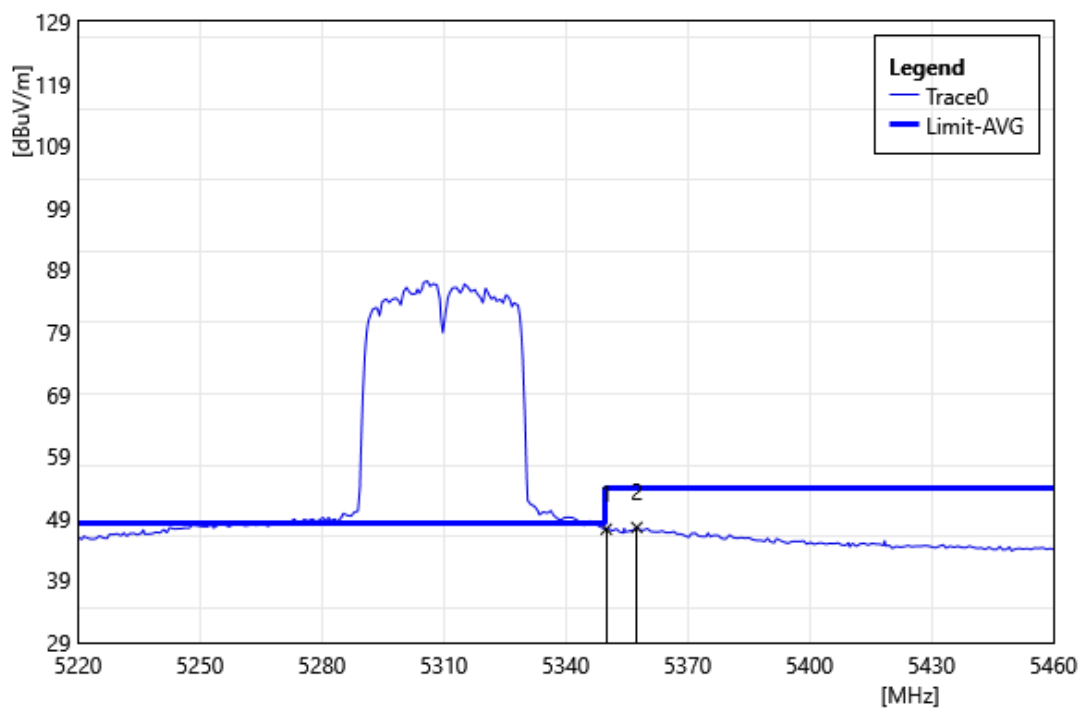


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	44.74	2.51	47.25	54.00	-6.75	AVG
2	5357.52	45.02	2.52	47.54	54.00	-6.46	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

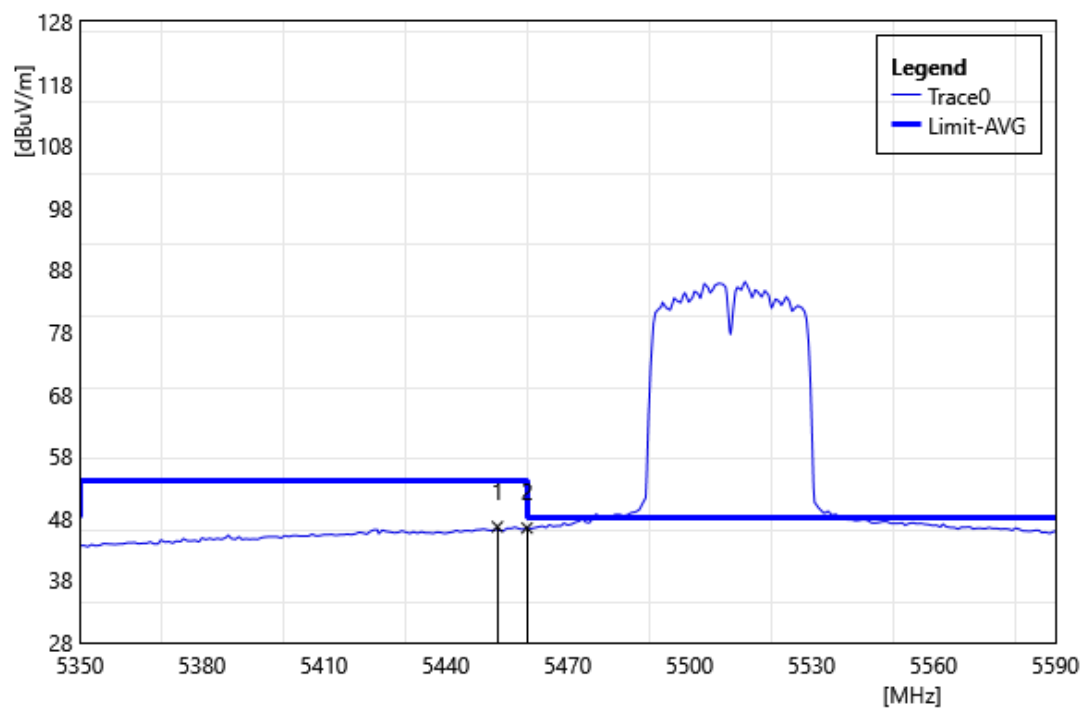


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.72	43.79	2.86	46.65	54.00	-7.35	AVG
2	5460.00	43.52	2.93	46.45	54.00	-7.55	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

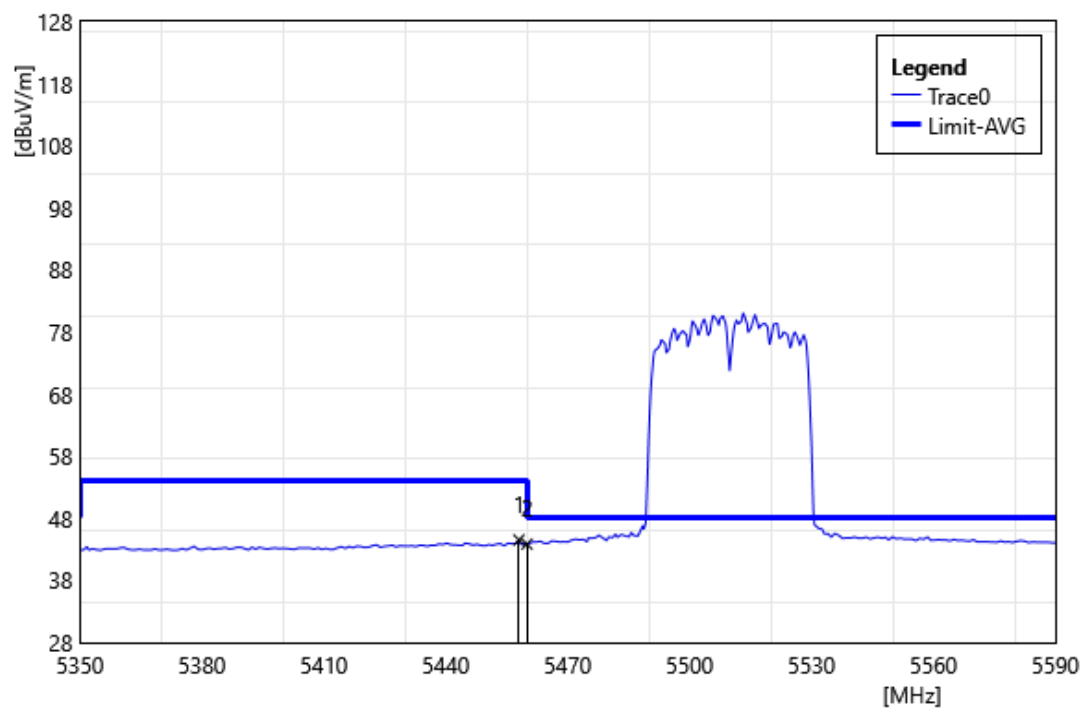


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.00	41.62	2.91	44.53	54.00	-9.47	AVG
2	5460.00	40.93	2.93	43.86	54.00	-10.14	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

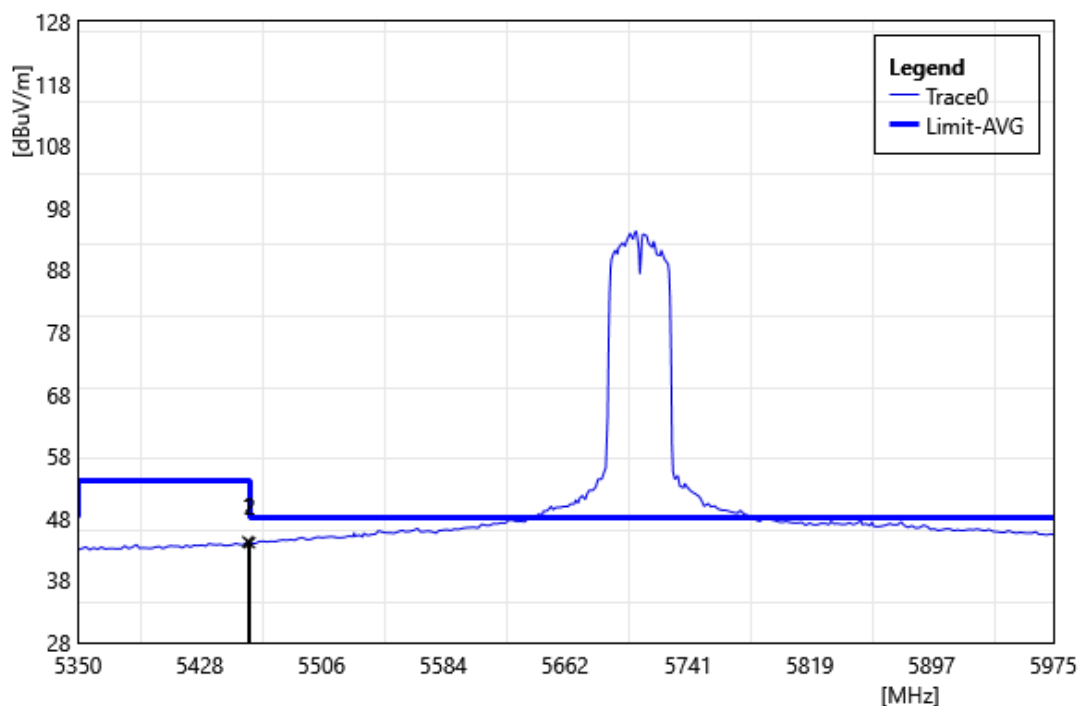


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.75	41.31	2.92	44.23	54.00	-9.77	AVG
2	5460.00	41.14	2.93	44.07	54.00	-9.93	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

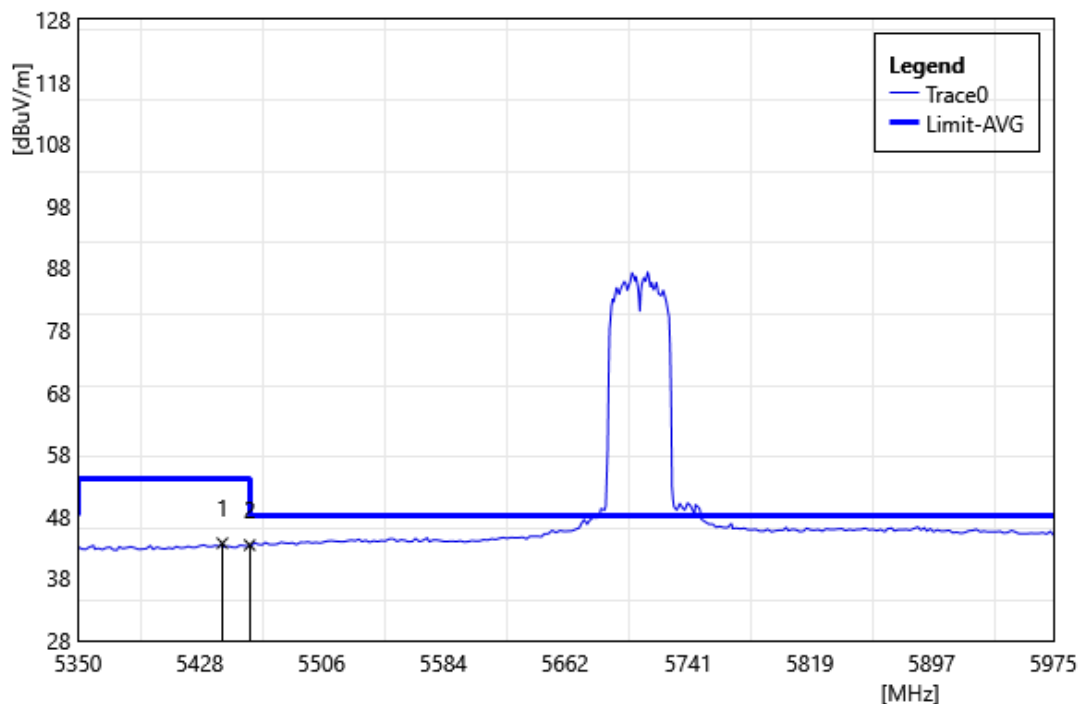


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5442.50	40.87	2.80	43.67	54.00	-10.33	AVG
2	5460.00	40.45	2.93	43.38	54.00	-10.62	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

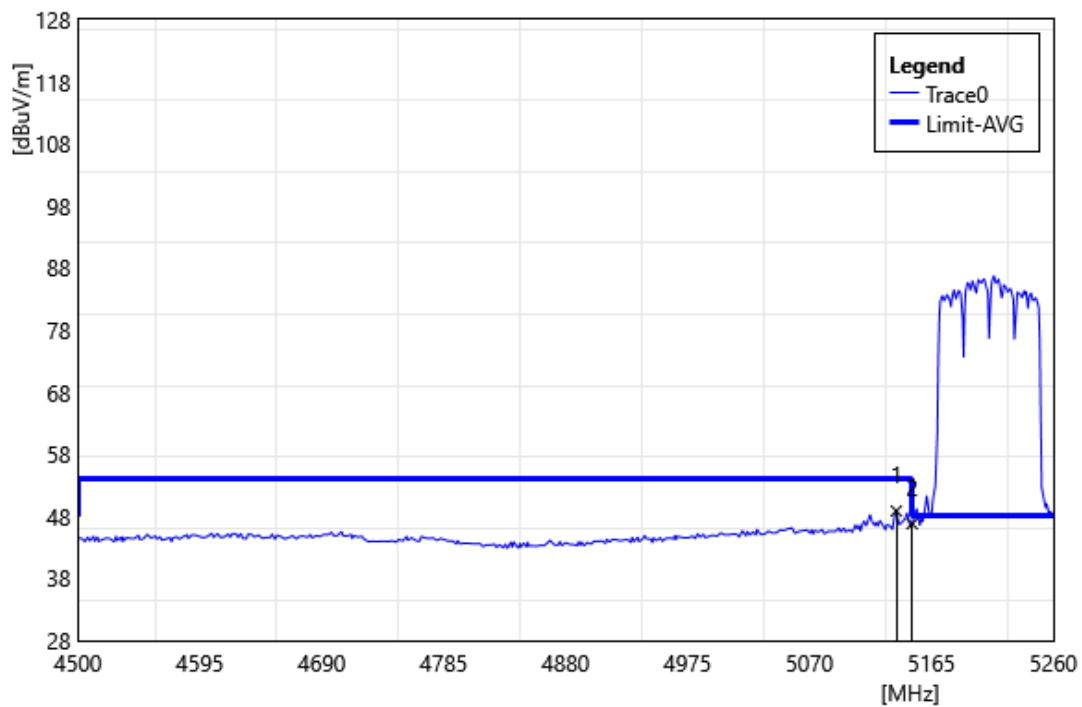


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5137.64	46.37	2.50	48.87	54.00	-5.13	AVG
2	5150.00	44.24	2.56	46.80	54.00	-7.20	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

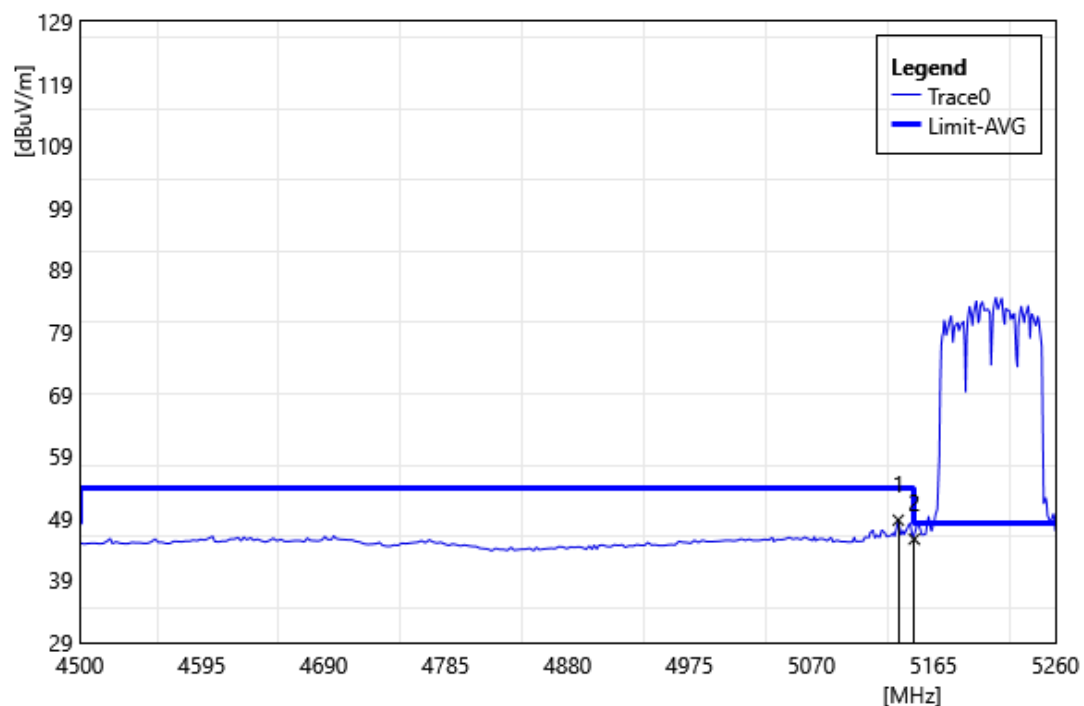


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5137.64	46.21	2.50	48.71	54.00	-5.29	AVG
2	5150.00	43.09	2.56	45.65	54.00	-8.35	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

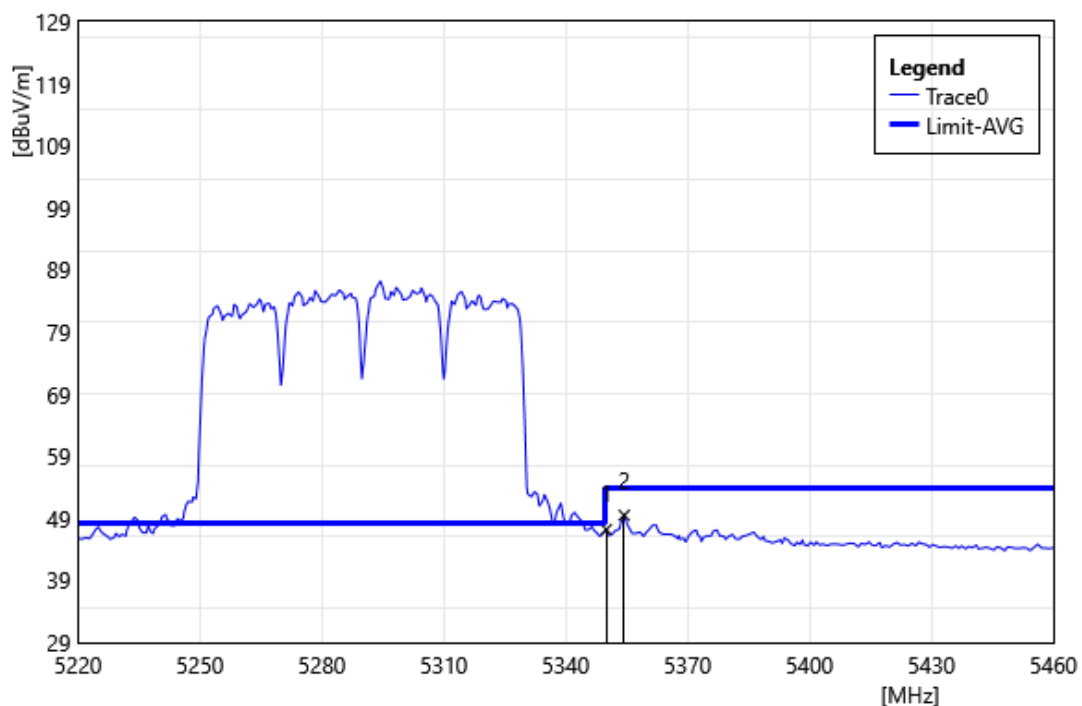


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	44.69	2.51	47.20	54.00	-6.80	AVG
2	5354.40	46.96	2.52	49.48	54.00	-4.52	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

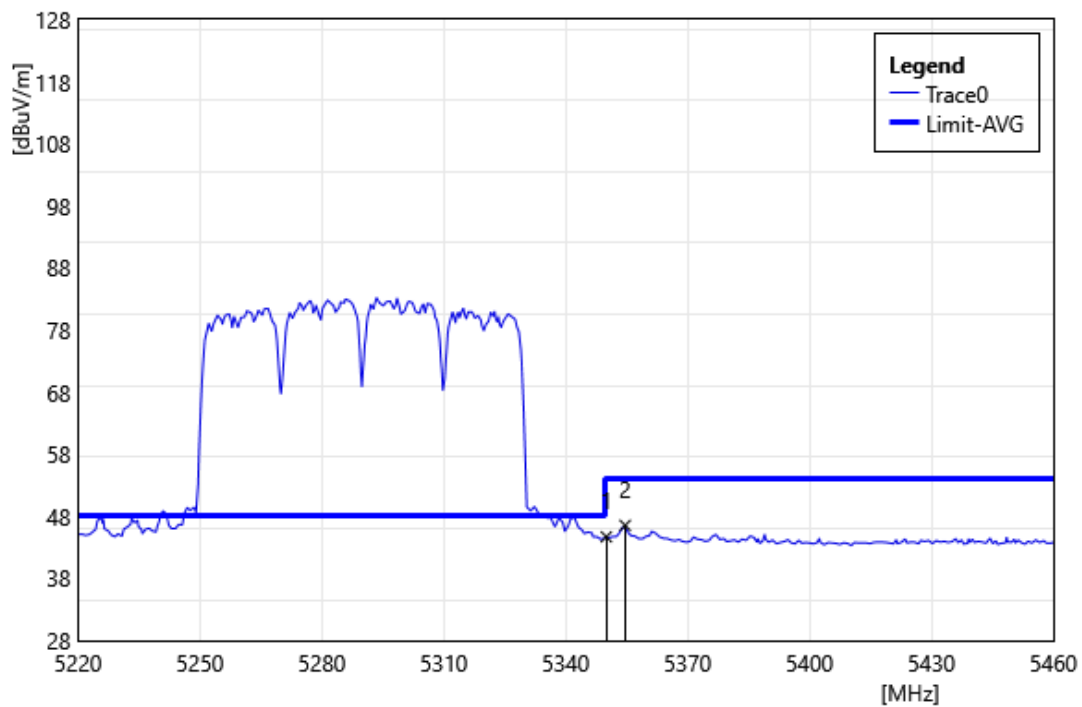


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	42.18	2.51	44.69	54.00	-9.31	AVG
2	5354.64	44.04	2.52	46.56	54.00	-7.44	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

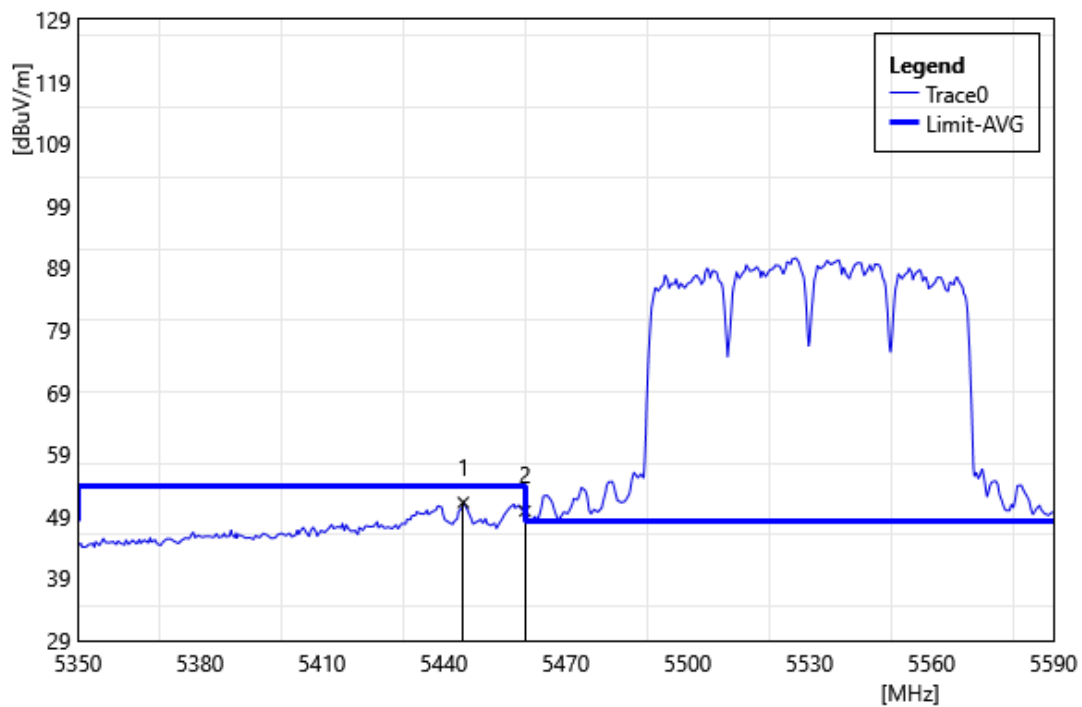


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5444.80	48.41	2.82	51.24	54.00	-2.77	AVG
2	5460.00	46.93	2.93	49.86	54.00	-4.14	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

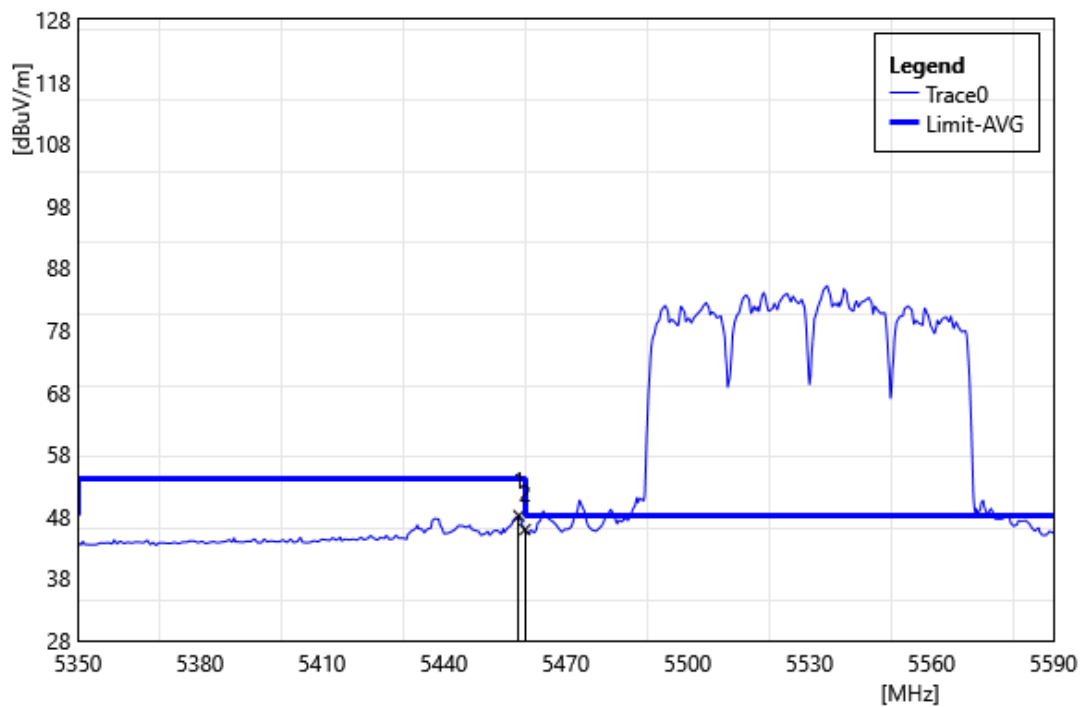


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.48	45.17	2.92	48.09	54.00	-5.91	AVG
2	5460.00	42.93	2.93	45.86	54.00	-8.14	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

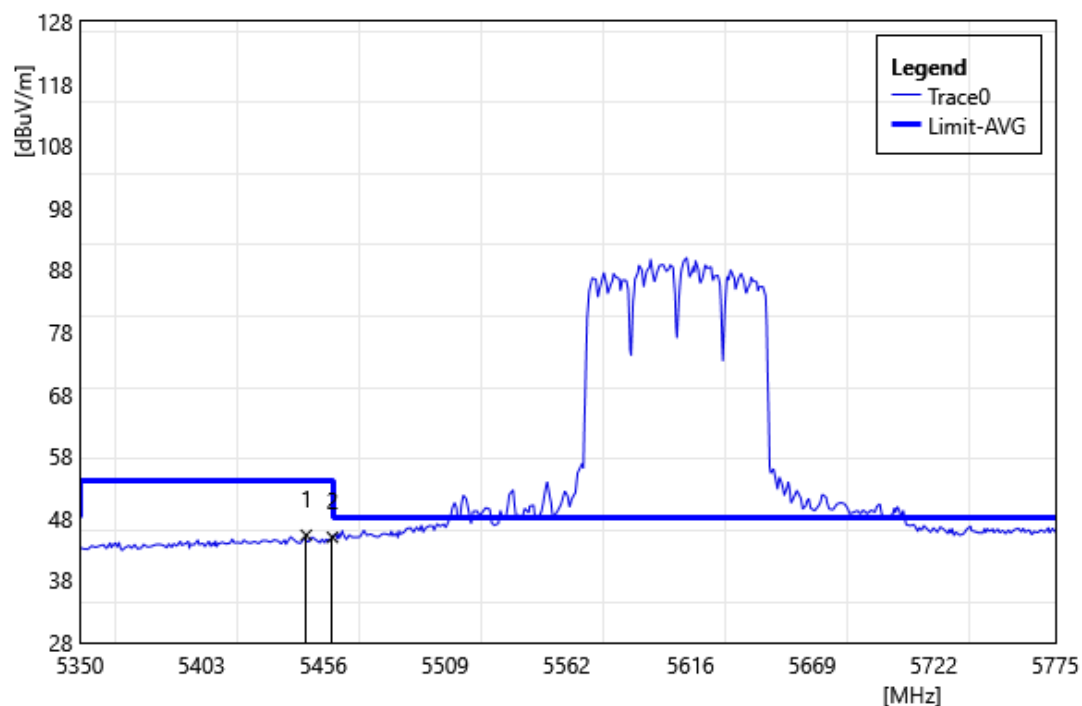


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5448.60	42.46	2.83	45.30	54.00	-8.71	AVG
2	5460.00	42.02	2.93	44.95	54.00	-9.05	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

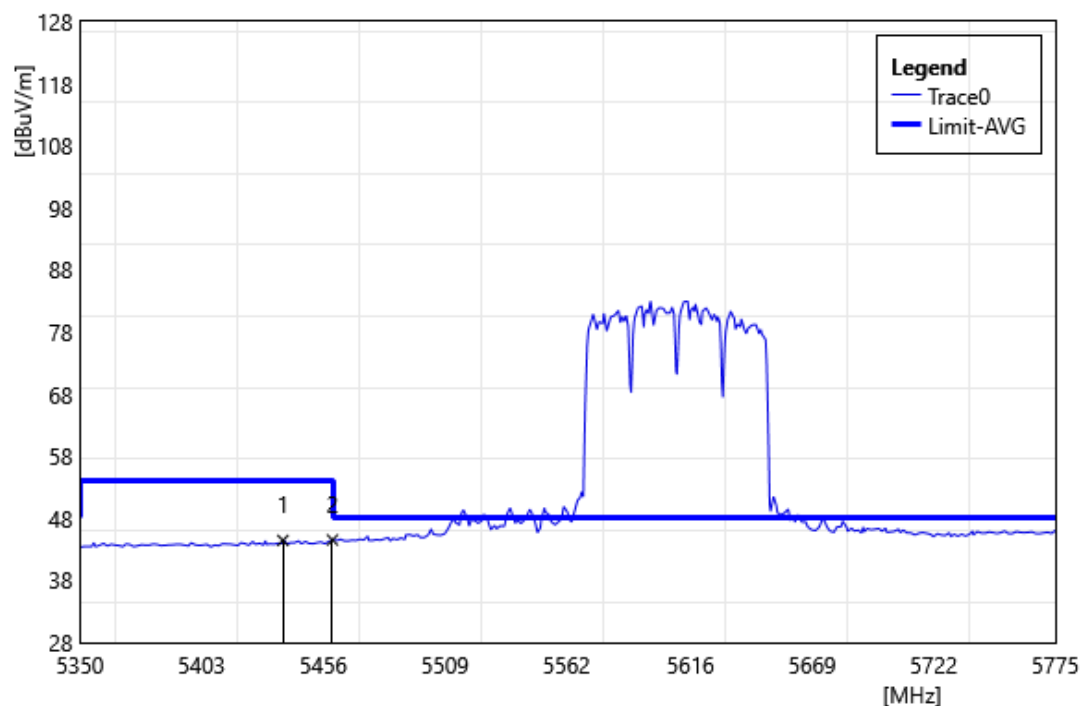


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5438.40	41.66	2.78	44.44	54.00	-9.56	AVG
2	5460.00	41.60	2.93	44.53	54.00	-9.47	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5690		
	MHz		
Polarization:	Horizontal		
Remark:			

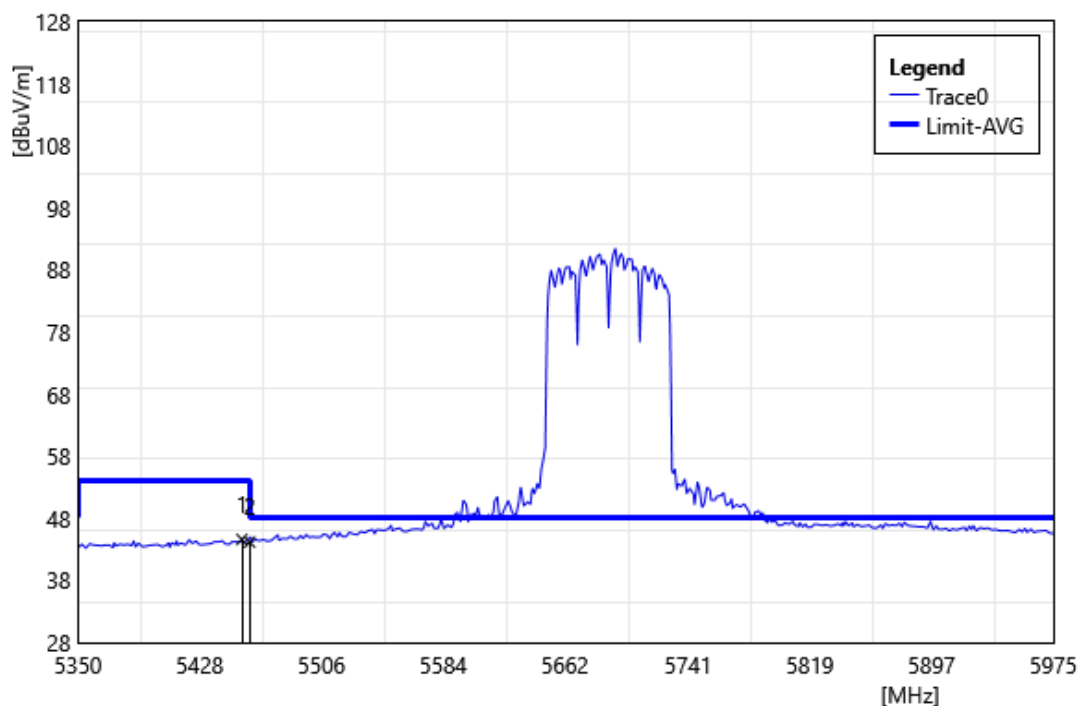

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.00	41.71	2.89	44.60	54.00	-9.40	AVG
2	5460.00	41.25	2.93	44.18	54.00	-9.82	AVG

Test Site:	96603 - WG	Standard:	Part 15.407
Test Mode:	802.11ax HE80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

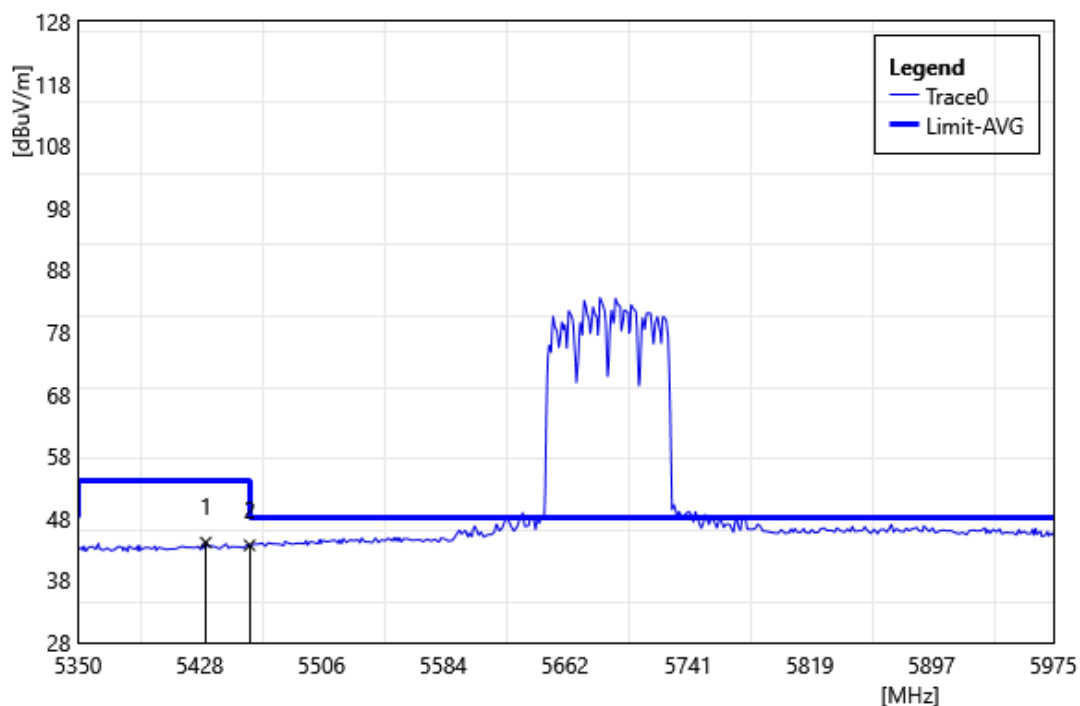

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5431.88	41.38	2.74	44.12	54.00	-9.88	AVG
2	5460.00	40.72	2.93	43.65	54.00	-10.35	AVG

5.2. Conducted Test Results

Duty cycle

Reference Appendix A / Appendix B

Maximum Conducted Output Power Measurement

Reference Appendix A

26 dB RF Bandwidth Measurement & 99 % Occupied Bandwidth Measurement

Reference Appendix A / Appendix B

6 dB RF Bandwidth Measurement

Reference Appendix A / Appendix B

Maximum Power Spectral Density Measurement

Reference Appendix A / Appendix B

---END---