Mode	43	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	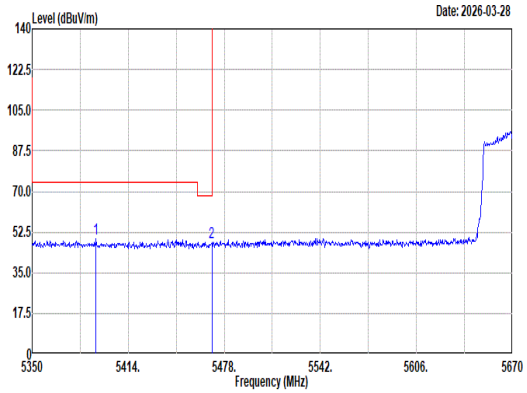 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5392.56 49.56 74.00 -24.44 36.77 34.93 12.97 35.11 0.00 285 0 Peak 2 5469.68 48.10 68.20 -20.10 35.16 34.98 13.05 35.09 0.00 285 0 Peak	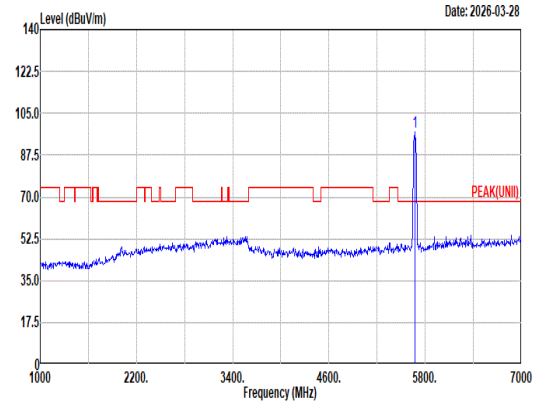 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5670.00 97.43 ------ ------ 84.22 35.04 13.24 35.07 0.00 285 0 Peak
Avg	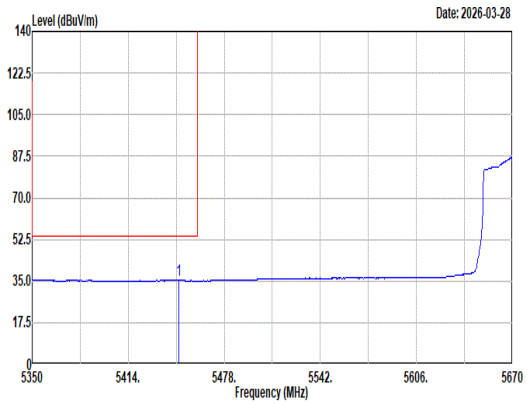 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5447.92 35.42 54.00 -18.58 22.58 34.90 13.03 35.09 0.00 285 0 Average	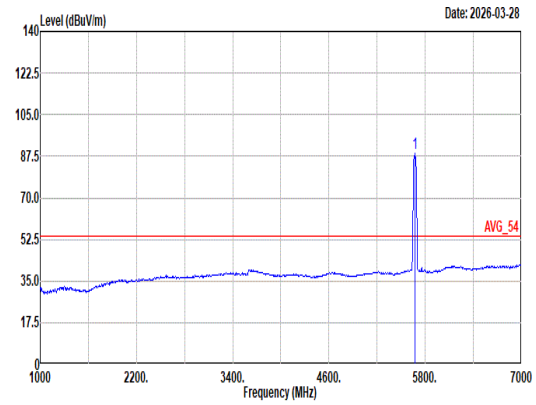 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5670.00 88.61 ------ ------ 75.40 35.04 13.24 35.07 0.00 285 0 Average

Mode	43	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	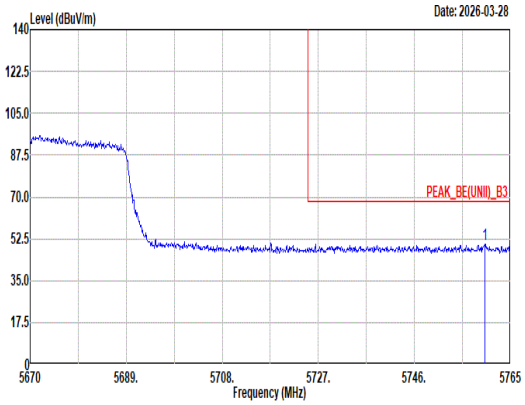 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5759.97 50.08 68.20 -18.12 36.70 35.12 13.32 35.06 0.00 285 0 Peak	Blank

Mode	43	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	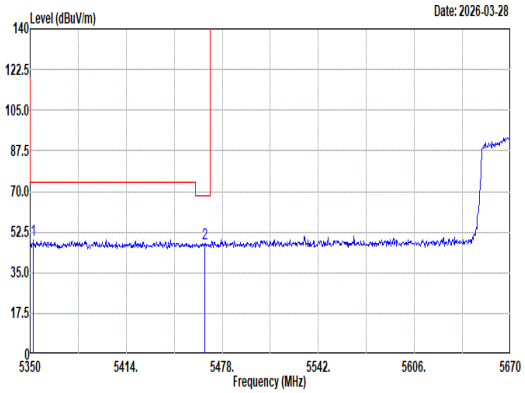 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5352.24 49.15 74.00 -24.85 36.25 35.09 12.93 35.12 0.00 300 253 Peak 2 5466.16 47.70 68.20 -20.50 34.78 34.96 13.05 35.09 0.00 300 253 Peak	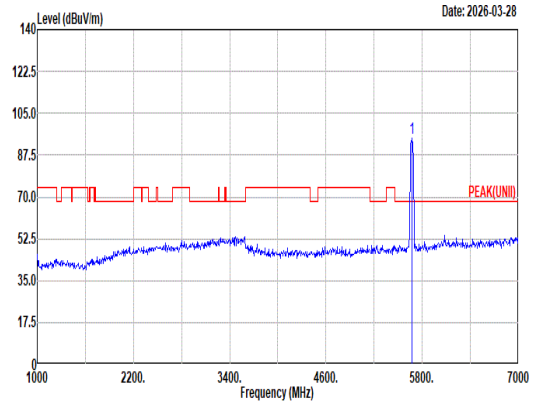 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5670.00 94.61 ------ ------ 81.38 35.05 13.25 35.07 0.00 300 253 Peak
Avg	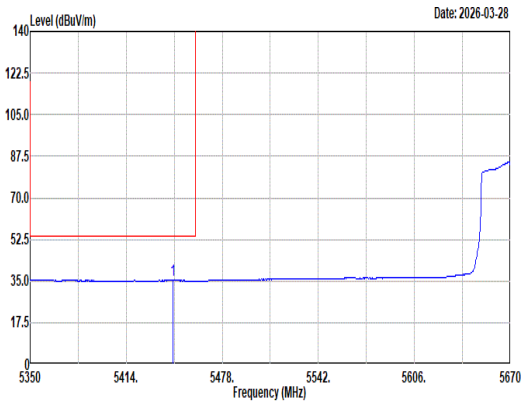 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5445.36 35.42 54.00 -18.58 22.58 34.90 13.03 35.09 0.00 300 253 Average	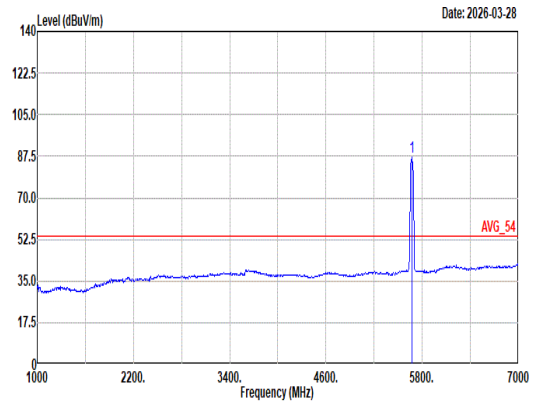 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5670.00 86.94 ------ ------ 73.73 35.04 13.24 35.07 0.00 300 253 Average

Mode	43	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	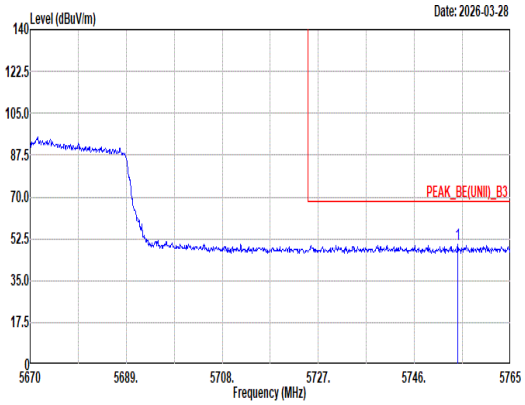 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5754.55 50.17 68.20 -18.03 36.80 35.11 13.32 35.06 0.00 300 253 Peak	Blank

Mode	43	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	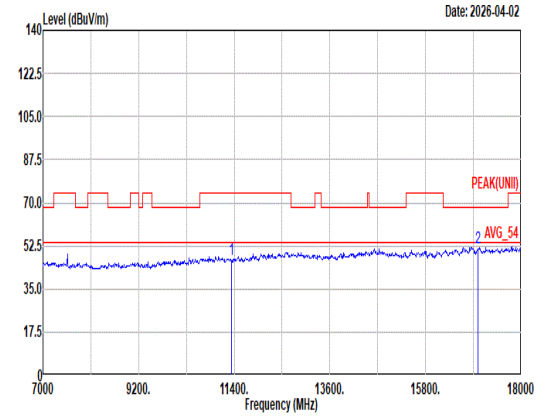 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11340.00 46.91 74.00 -27.09 46.26 38.38 18.58 57.61 1.30 -- -- Peak 2 17010.00 51.88 68.20 -16.32 41.67 42.12 22.47 55.77 1.39 -- -- Peak	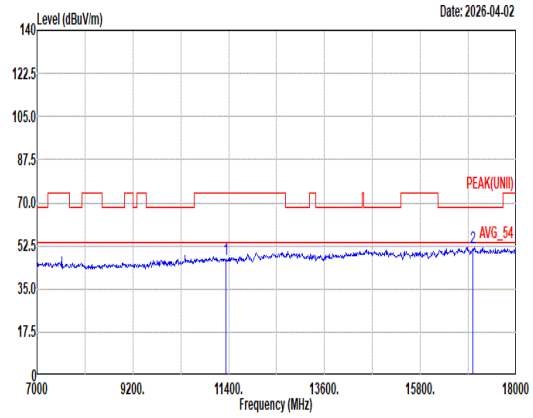 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11340.00 47.27 74.00 -26.73 46.62 38.38 18.58 57.61 1.30 -- -- Peak 2 17010.00 51.60 68.20 -16.60 41.39 42.12 22.47 55.77 1.39 -- -- Peak

Mode	43	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	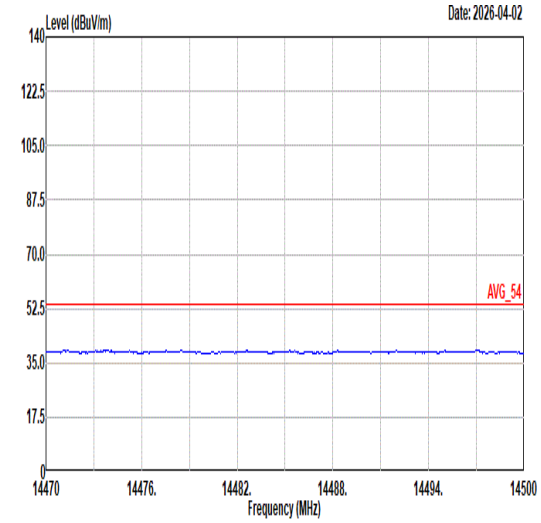 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	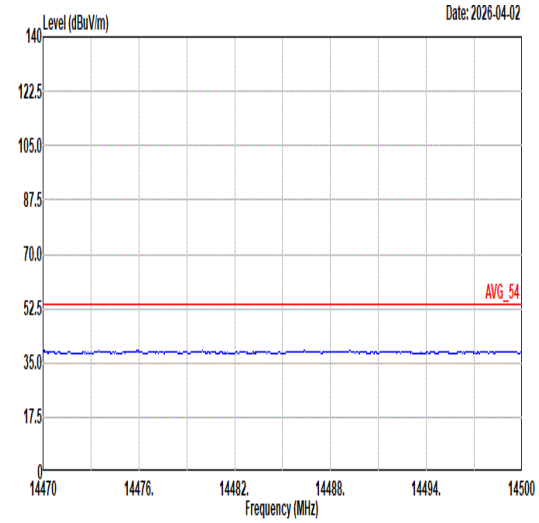 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	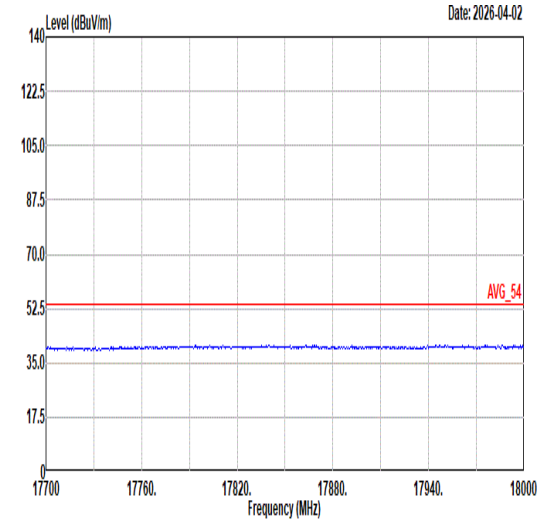 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	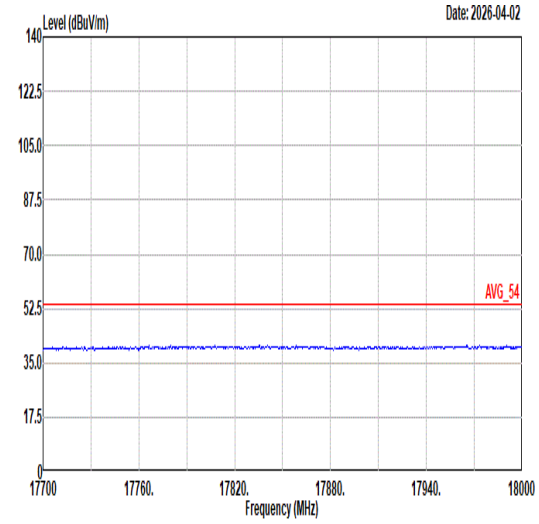 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	44	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	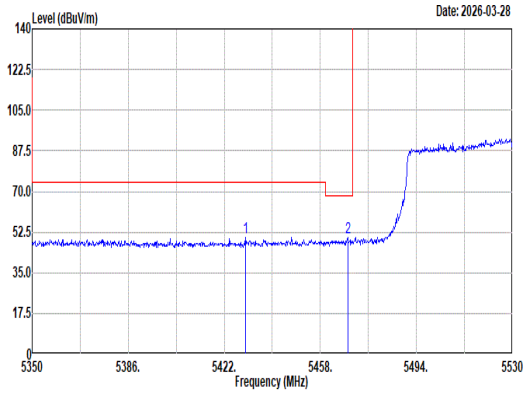 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5429.92 50.35 74.00 -23.65 37.54 34.90 13.01 35.10 0.00 195 8 Peak 2 5468.26 50.03 68.20 -18.17 37.10 34.97 13.05 35.09 0.00 195 8 Peak	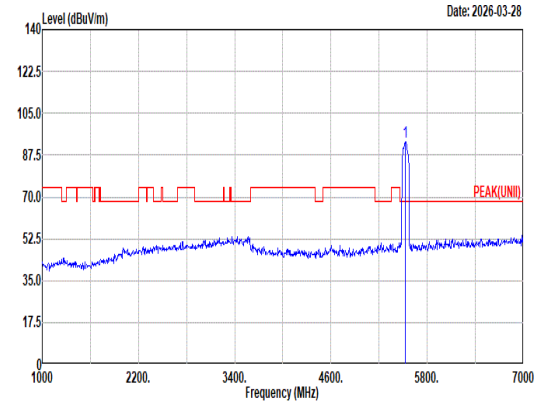 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5530.00 93.16 ------ ------ 80.04 35.10 13.10 35.08 0.00 195 8 Peak
Avg	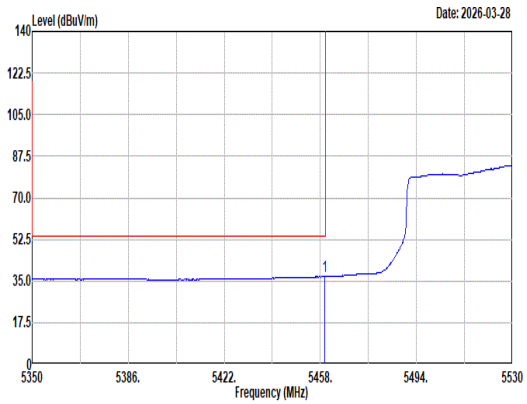 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5459.62 36.92 54.00 -17.08 24.03 34.94 13.04 35.09 0.00 195 8 Average	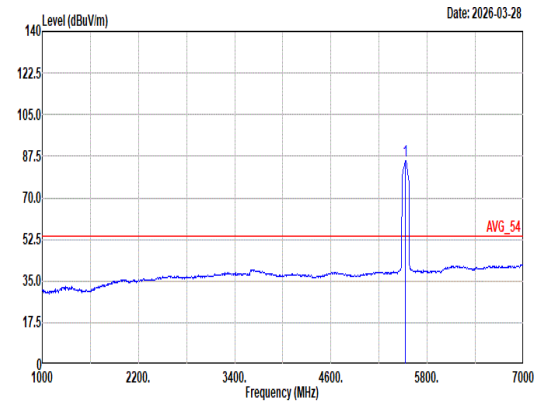 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5530.00 85.81 ------ ------ 72.68 35.10 13.11 35.08 0.00 195 8 Average

Mode	44	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	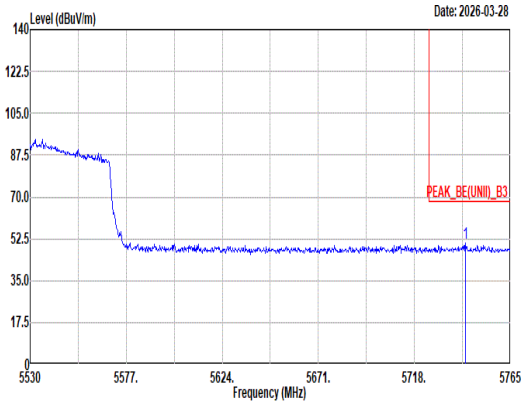 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5742.91 50.59 68.20 -17.61 37.25 35.10 13.31 35.07 0.00 195 8 Peak	Blank

Mode	44	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	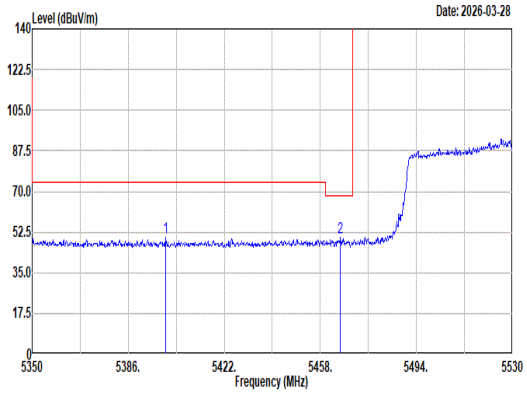 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5400.04 49.93 74.00 -24.07 37.16 34.90 12.98 35.11 0.00 277 255 Peak 2 5465.56 50.45 68.20 -17.75 37.53 34.96 13.05 35.09 0.00 277 255 Peak	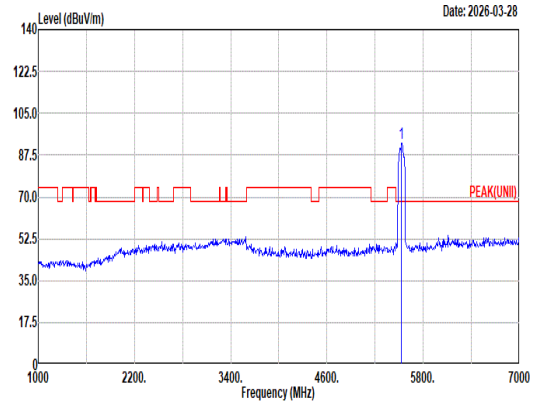 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5530.00 92.54 ------ ------ 79.40 35.10 13.12 35.08 0.00 277 255 Peak
Avg	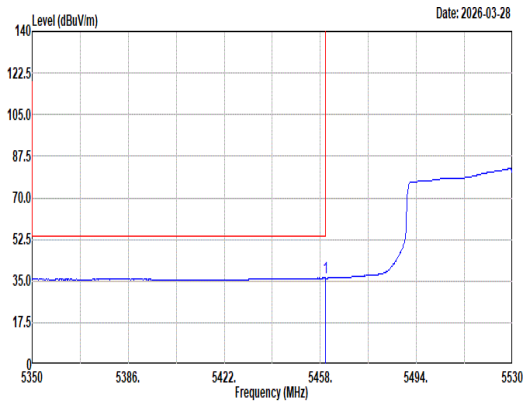 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5459.80 36.22 54.00 -17.78 23.33 34.94 13.04 35.09 0.00 277 255 Average	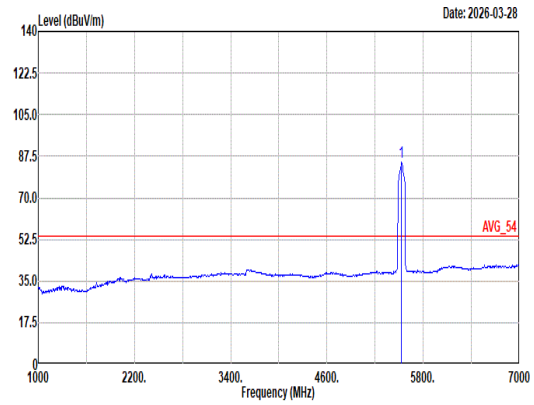 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : PEAK Mode : 44 Setting : 8.5 1 5530.00 84.85 ------ ------ 71.72 35.10 13.11 35.08 0.00 277 255 Average

Mode	44	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	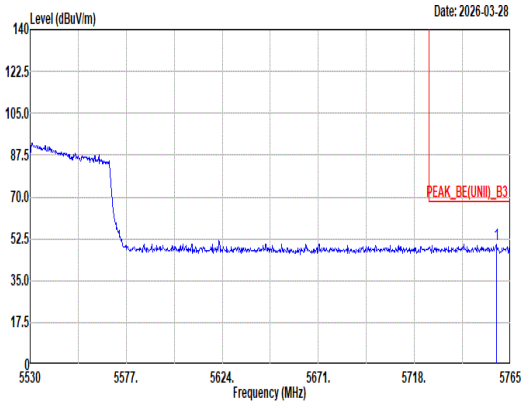 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : PEAK Mode : 44 Setting : 8.5 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5758.19 50.08 68.20 -18.12 36.70 35.12 13.32 35.06 0.00 277 255 Peak	Blank

Mode	44	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	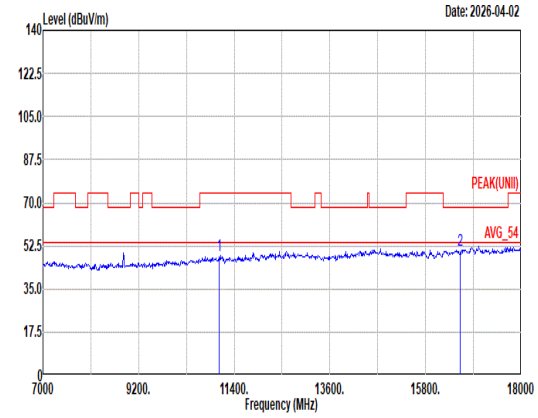 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11060.00 48.80 74.00 -25.20 49.26 38.22 18.31 58.24 1.25 -- -- Peak 2 16590.00 50.86 68.20 -17.34 41.18 42.02 22.30 55.96 1.32 -- -- Peak	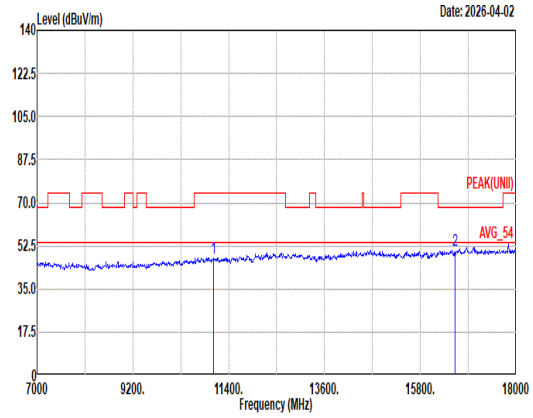 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11060.00 47.31 74.00 -26.69 47.77 38.22 18.31 58.24 1.25 -- -- Peak 2 16590.00 50.62 68.20 -17.58 40.94 42.02 22.30 55.96 1.32 -- -- Peak

Mode	44	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	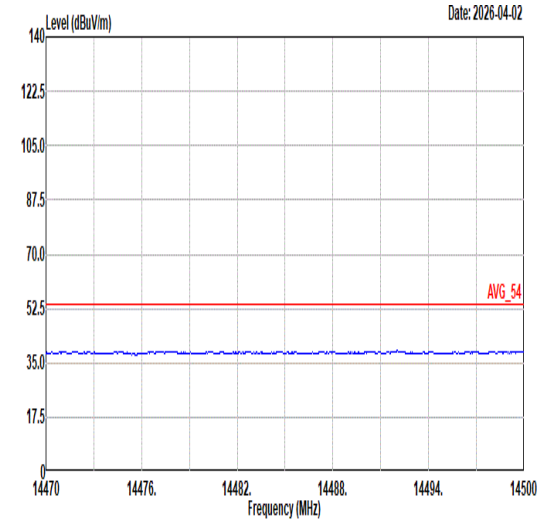 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	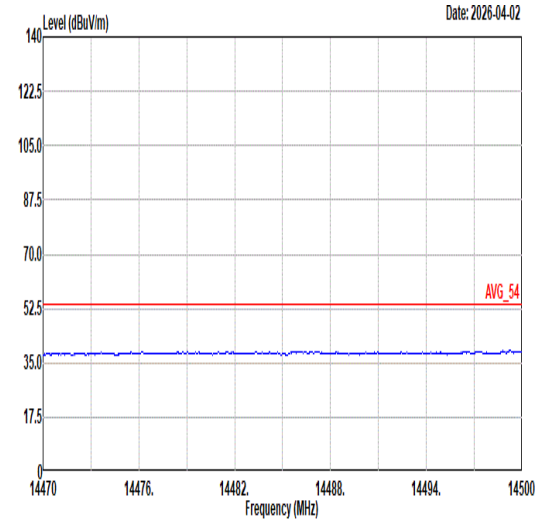 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	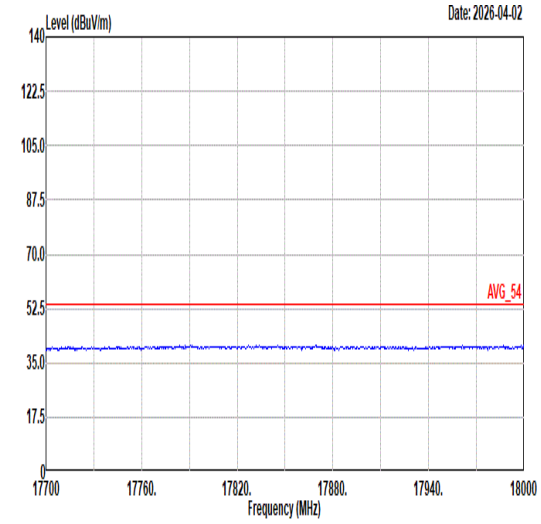 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	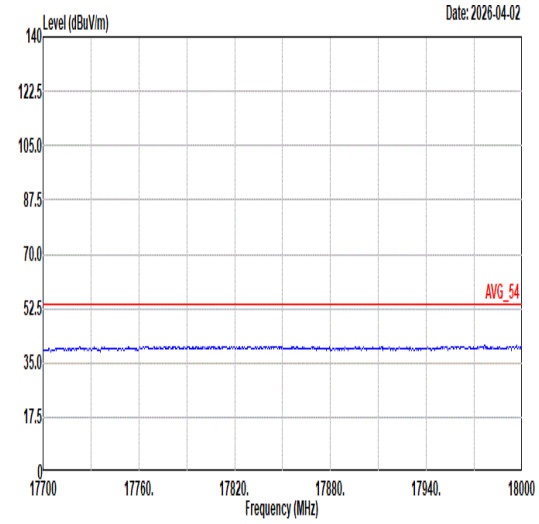 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	45	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Partial RU 106/54_5700MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	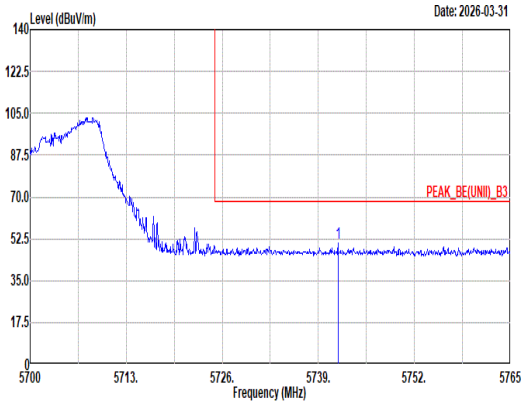 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5741.67 50.60 68.20 -17.60 37.26 35.10 13.31 35.07 0.00 219 0 Peak	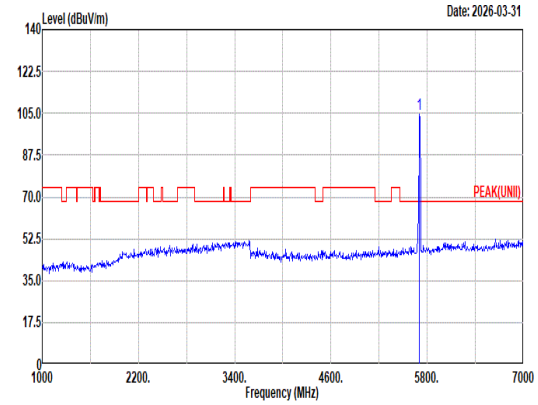 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5700.00 104.38 ------ ------ 91.08 35.10 13.27 35.07 0.00 219 0 Peak
Avg	Blank	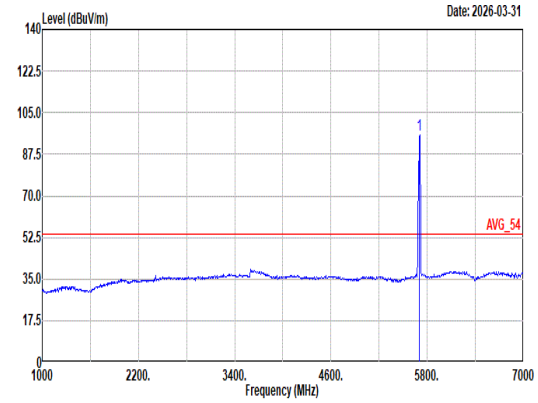 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5700.00 95.50 ------ ------ 82.19 35.10 13.28 35.07 0.00 219 0 Average

Mode	45	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Partial RU 106/54_5700MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	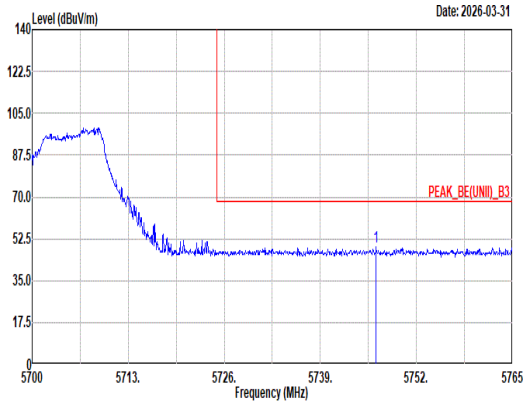 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : PEAK Mode : 45 Setting : 8.5 1 5746.54 49.36 68.20 -18.84 36.02 35.10 13.31 35.07 0.00 291 269 Peak	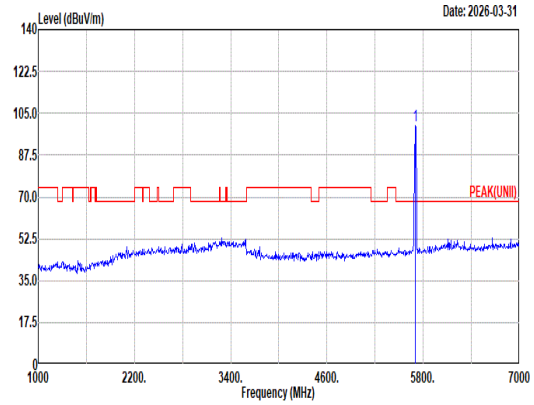 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5700.00 99.84 ------ ------ 86.54 35.10 13.27 35.07 0.00 291 269 Peak
Avg	Blank	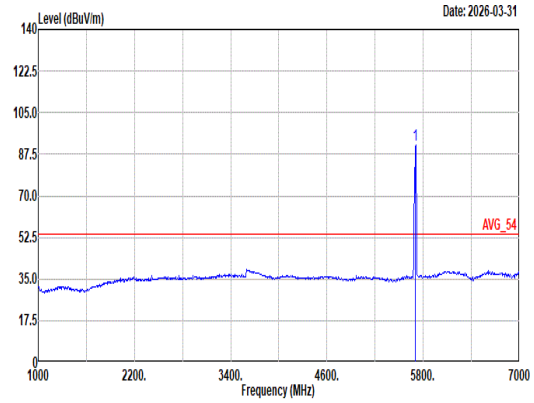 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : PEAK Mode : 45 Setting : 8.5 1 5700.00 91.15 ------ ------ 77.84 35.10 13.28 35.07 0.00 291 269 Average

Mode	45	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Partial RU 106/54_5700MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	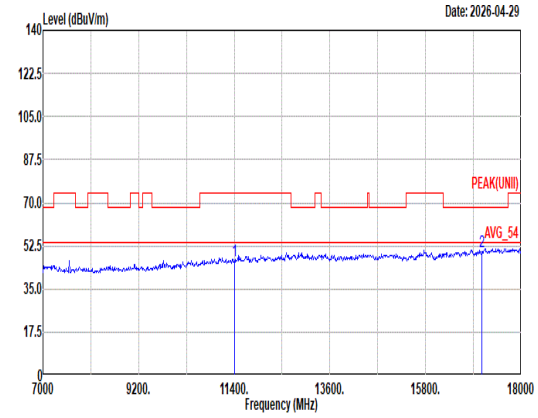 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11400.00 46.69 74.00 -27.31 45.48 38.40 18.64 57.14 1.31 -- -- Peak 2 17100.00 50.40 68.20 -17.80 40.42 42.10 22.51 56.04 1.41 -- -- Peak	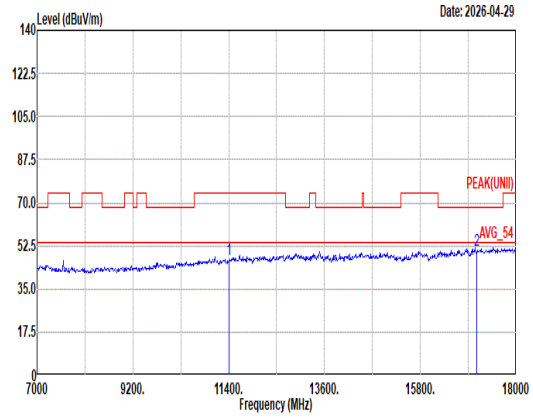 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11400.00 46.78 74.00 -27.22 45.57 38.40 18.64 57.14 1.31 -- -- Peak 2 17100.00 50.52 68.20 -17.68 40.54 42.10 22.51 56.04 1.41 -- -- Peak

Mode	45	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Partial RU 106/54_5700MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	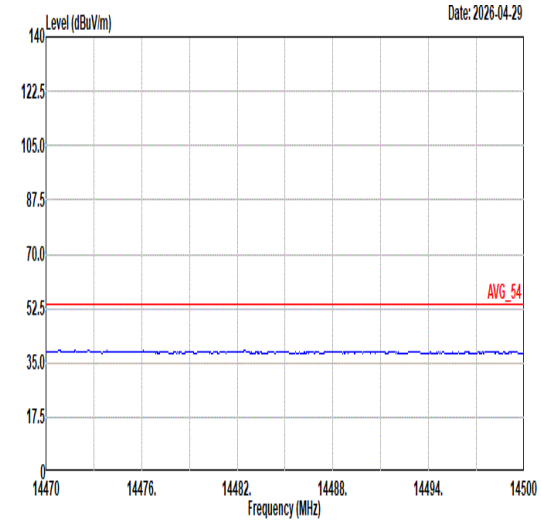 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	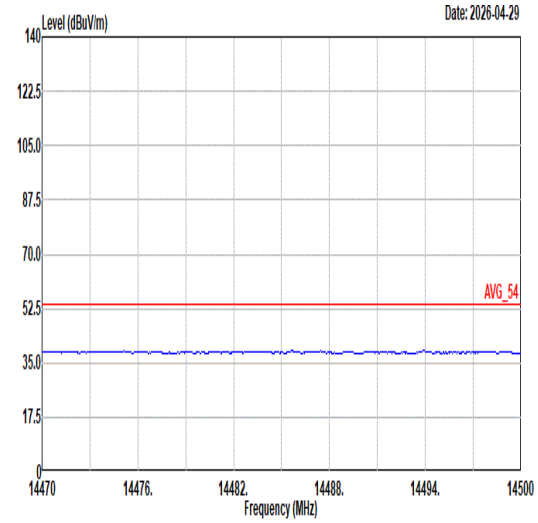 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	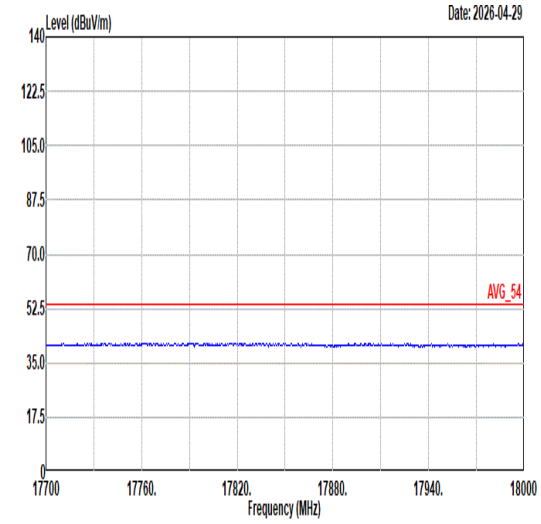 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	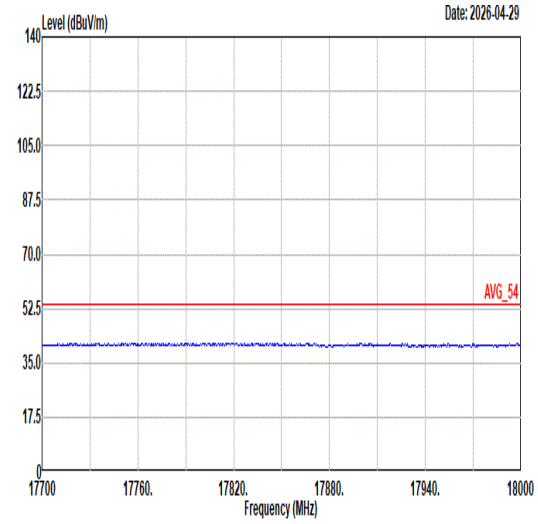 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	46	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Partial RU 242/61_5510MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	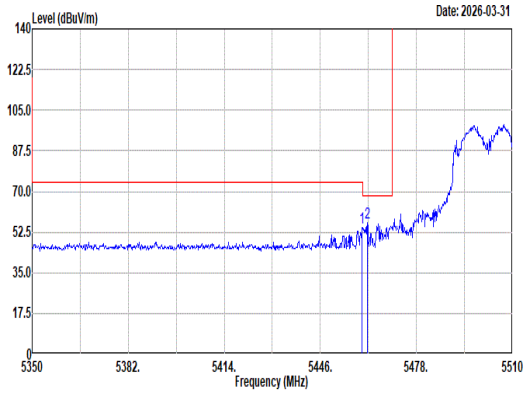 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5459.92 54.46 74.00 -19.54 41.57 34.94 13.04 35.09 0.00 263 0 Peak 2 5461.68 56.55 68.20 -11.65 43.65 34.95 13.04 35.09 0.00 263 0 Peak	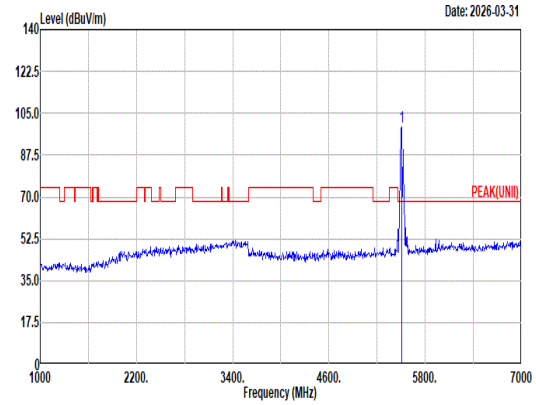 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5510.00 99.23 ------ ------ 86.12 35.10 13.09 35.08 0.00 263 0 Peak
Avg	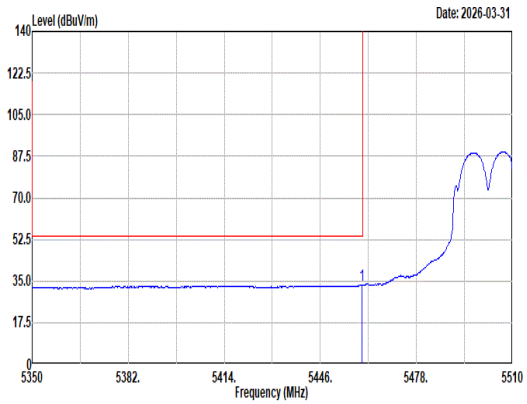 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5459.92 33.20 54.00 -20.80 20.31 34.94 13.04 35.09 0.00 263 0 Average	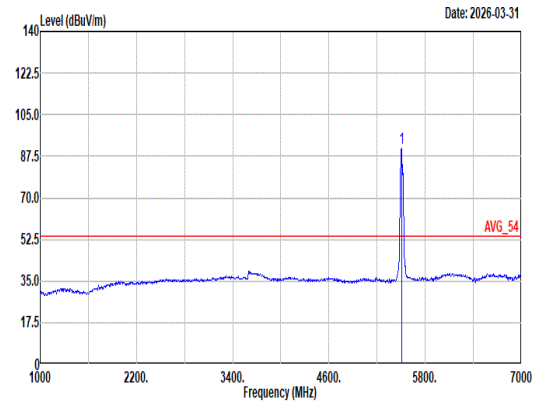 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5510.00 90.82 ------ ------ 77.71 35.10 13.09 35.08 0.00 263 0 Average

Mode	46	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Partial RU 242/61_5510MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	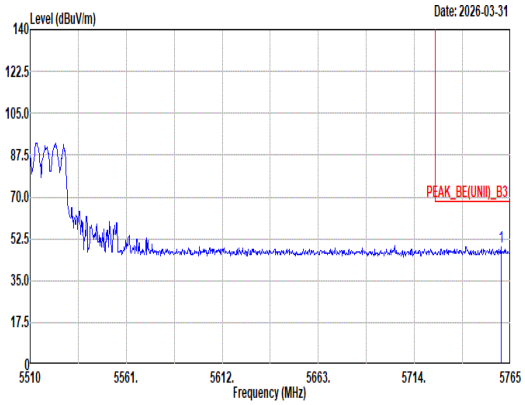 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5759.90 49.08 68.20 -19.12 35.70 35.12 13.32 35.06 0.00 263 0 Peak	Blank

Mode	46	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Partial RU 242/61_5510MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	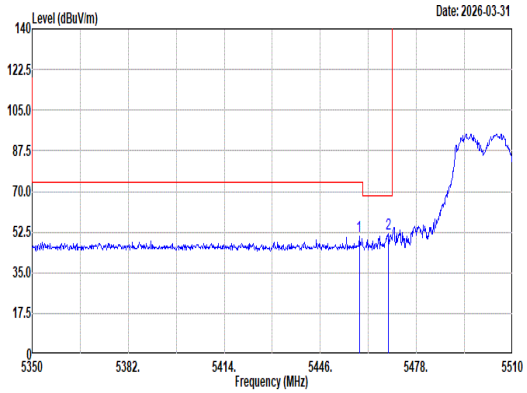 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.96 50.62 74.00 -23.38 37.73 34.94 13.04 35.09 0.00 200 254 Peak 2 5468.72 51.91 68.20 -16.29 38.98 34.97 13.05 35.09 0.00 200 254 Peak	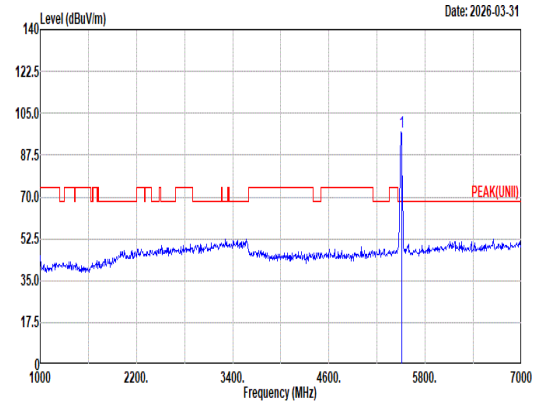 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 97.19 ------ ------ 84.12 35.08 13.07 35.08 0.00 200 254 Peak
Avg	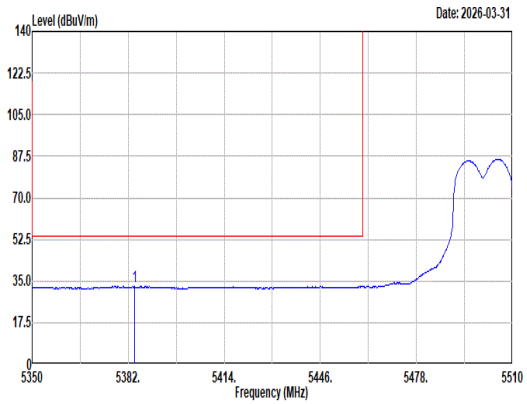 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5384.08 32.63 54.00 -21.37 19.82 34.96 12.96 35.11 0.00 200 254 Average	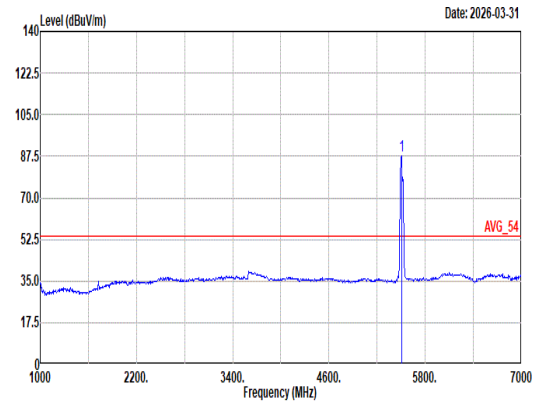 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 87.70 ------ ------ 74.59 35.10 13.09 35.08 0.00 200 254 Average

Mode	46	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Partial RU 242/61_5510MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	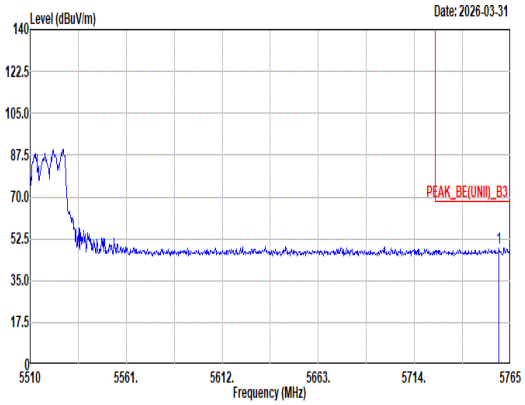 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5758.88 48.62 68.20 -19.58 35.24 35.12 13.32 35.06 0.00 200 254 Peak	Blank

Mode	46	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Partial RU 242/61_5510MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	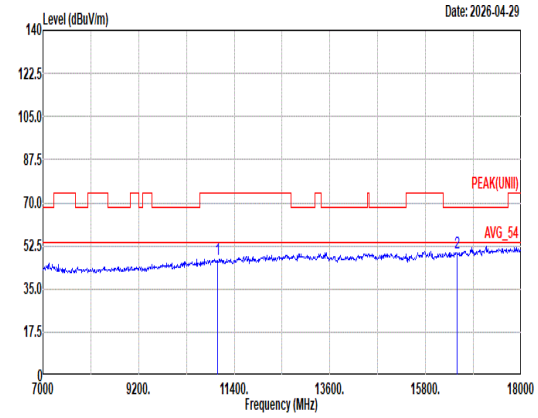 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11020.00 46.96 74.00 -27.04 47.33 38.14 18.27 58.03 1.25 -- -- Peak 2 16530.00 49.63 68.20 -18.57 40.12 42.10 22.27 56.17 1.31 -- -- Peak	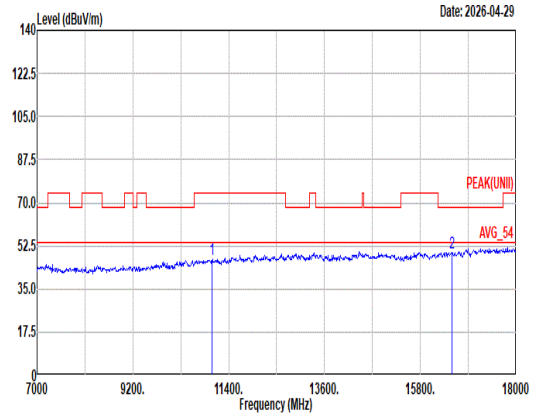 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11020.00 47.03 74.00 -26.97 47.40 38.14 18.27 58.03 1.25 -- -- Peak 2 16530.00 49.87 68.20 -18.33 40.36 42.10 22.27 56.17 1.31 -- -- Peak

Mode	46	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Partial RU 242/61_5510MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	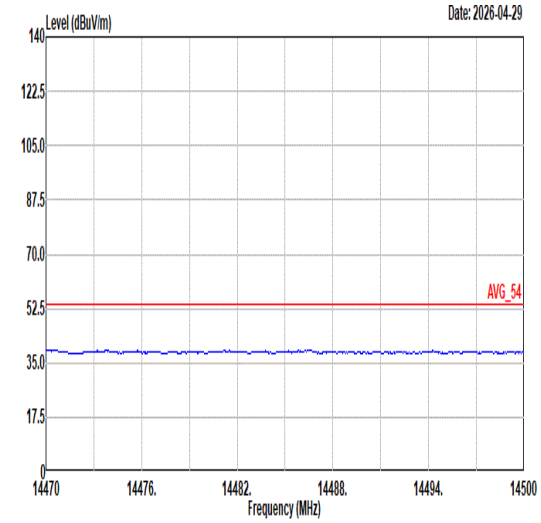 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	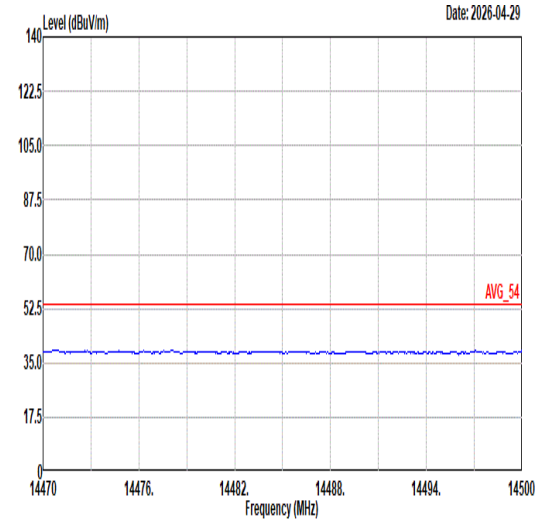 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	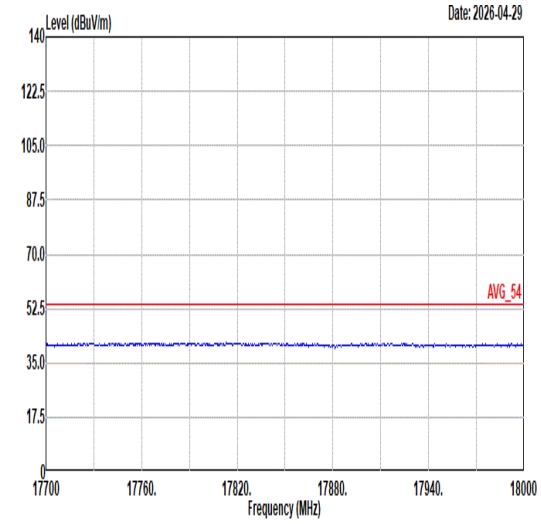 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	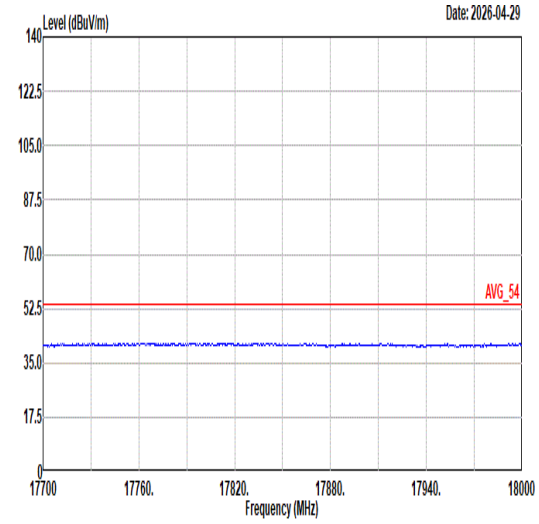 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	47	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Partial RU 484/65_5530MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	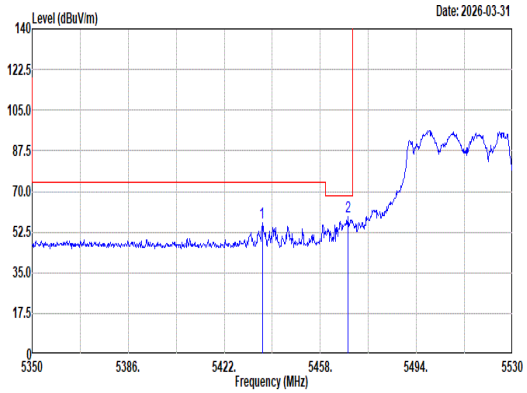 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5436.22 56.57 74.00 -17.43 43.75 34.90 13.02 35.10 0.00 233 0 Peak 2 5468.44 59.02 68.20 -9.18 46.09 34.97 13.05 35.09 0.00 233 0 Peak	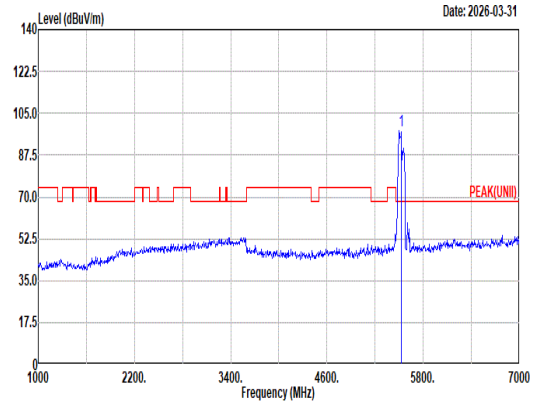 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 97.66 ------ ------ 84.56 35.10 13.08 35.08 0.00 233 0 Peak
Avg	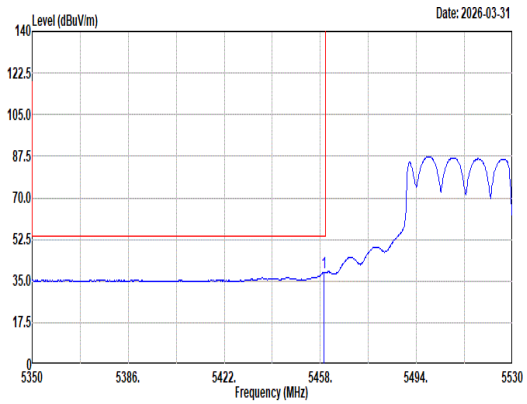 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.44 38.73 54.00 -15.27 25.84 34.94 13.04 35.09 0.00 233 0 Average	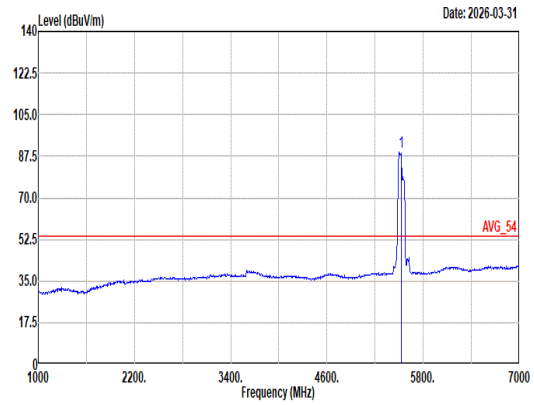 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 89.30 ------ ------ 76.20 35.10 13.08 35.08 0.00 233 0 Average

Mode	47	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Partial RU 484/65_5530MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	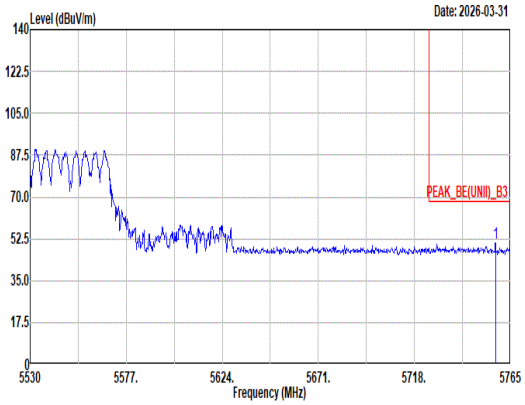 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5757.72 50.50 68.20 -17.70 37.12 35.12 13.32 35.06 0.00 233 0 Peak	Blank

Mode	47	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Partial RU 484/65_5530MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	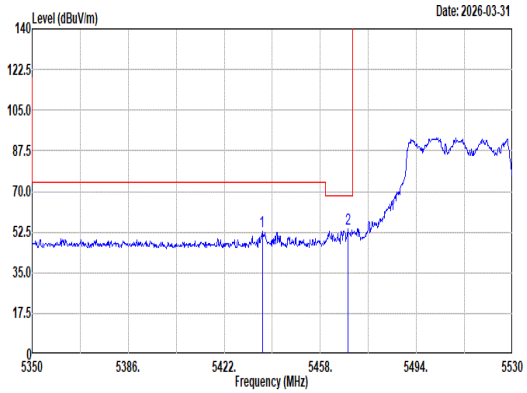 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5436.22 52.82 74.00 -21.18 40.00 34.90 13.02 35.10 0.00 300 256 Peak 2 5468.26 54.09 68.20 -14.11 41.16 34.97 13.05 35.09 0.00 300 256 Peak	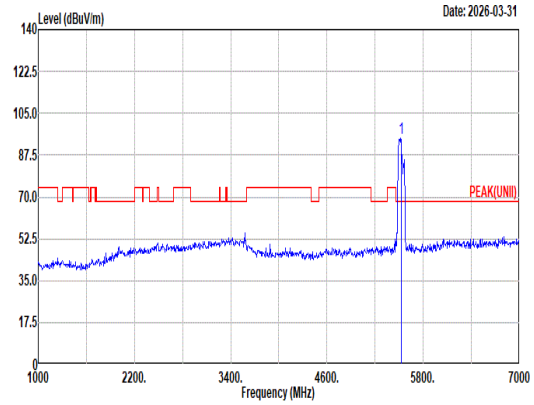 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 94.56 ------ ------ 81.44 35.10 13.10 35.08 0.00 300 256 Peak
Avg	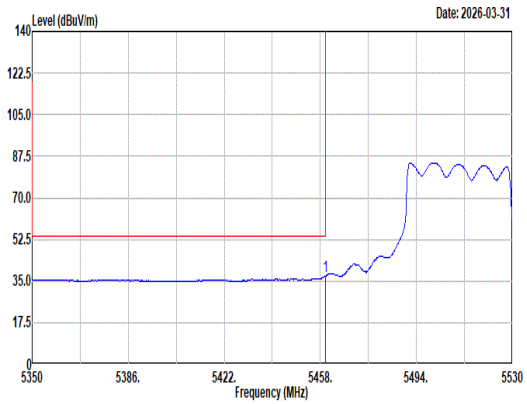 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.98 37.11 54.00 -16.89 24.22 34.94 13.04 35.09 0.00 300 256 Average	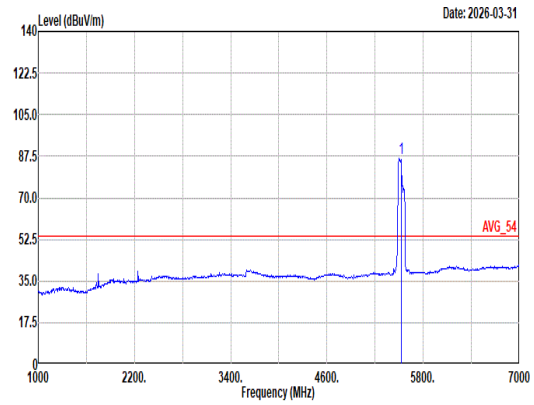 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 86.68 ------ ------ 73.58 35.10 13.08 35.08 0.00 300 256 Average

Mode	47	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Partial RU 484/65_5530MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	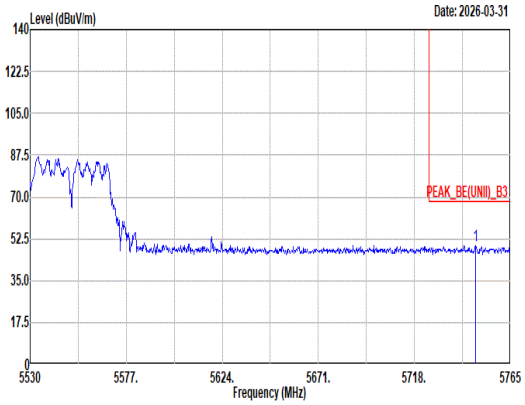 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5748.08 49.65 68.20 -18.55 36.31 35.10 13.31 35.07 0.00 300 256 Peak	Blank

Mode	47	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Partial RU 484/65_5530MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	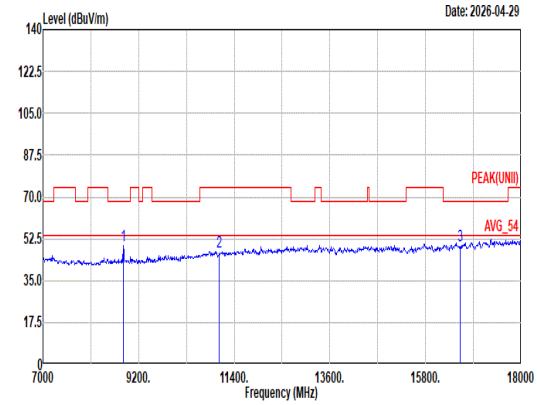 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8848.00 49.86 68.20 -18.34 54.67 36.40 16.20 58.54 1.13 100 352 Peak 2 11060.00 47.27 74.00 -26.73 47.43 38.22 18.31 57.94 1.25 -- -- Peak 3 16590.00 49.91 68.20 -18.29 40.43 42.02 22.30 56.16 1.32 -- -- Peak	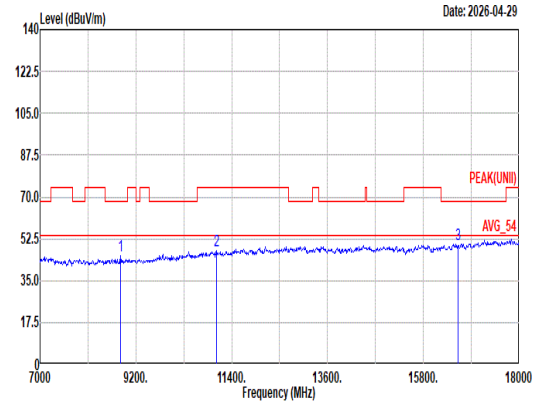 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 8848.00 45.36 68.20 -22.84 50.17 36.40 16.20 58.54 1.13 259 0 Peak 2 11060.00 47.31 74.00 -26.69 47.47 38.22 18.31 57.94 1.25 -- -- Peak 3 16590.00 50.41 68.20 -17.79 40.93 42.02 22.30 56.16 1.32 -- -- Peak

Mode	47	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Partial RU 484/65_5530MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	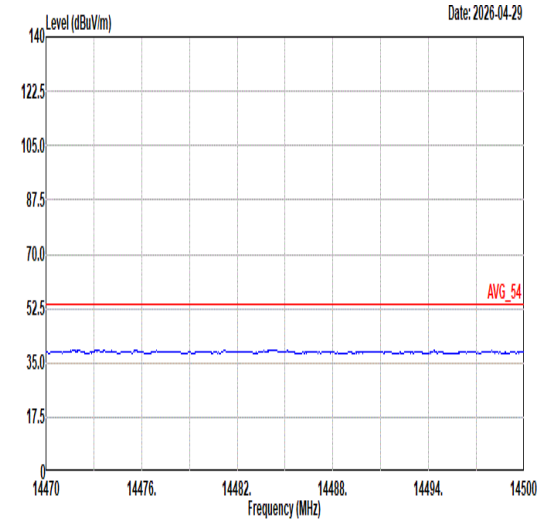 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	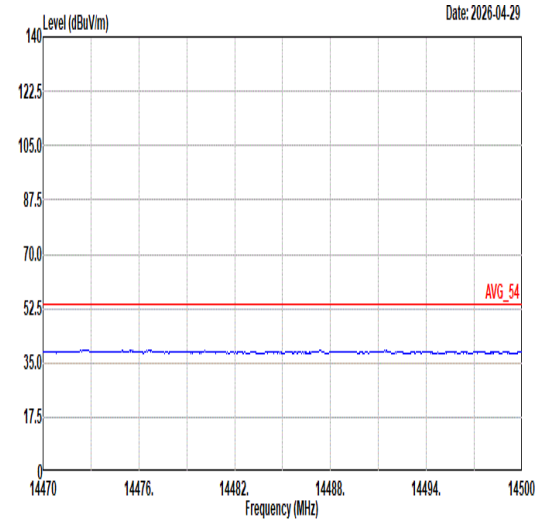 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	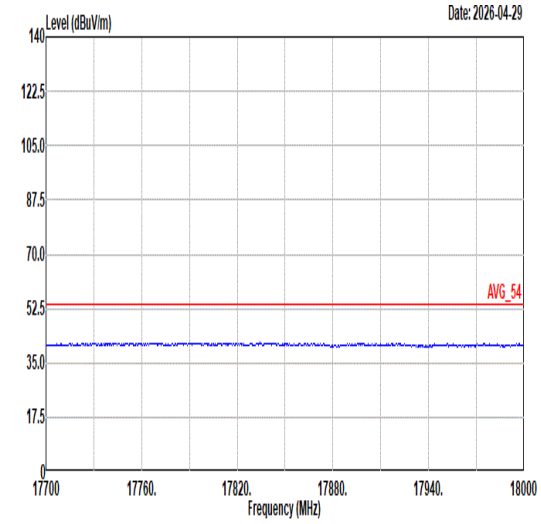 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	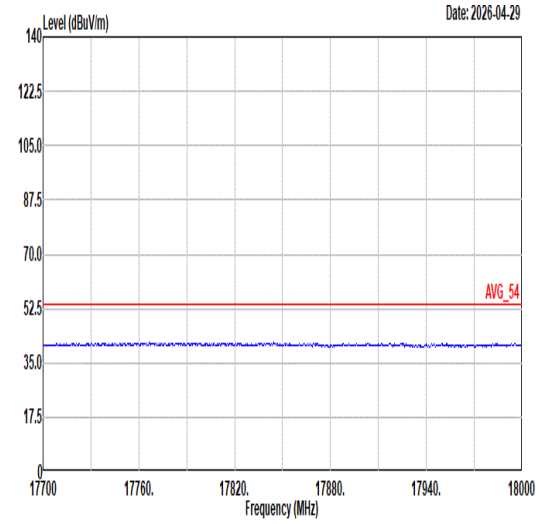 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	48	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Partial RU 996/67_5570MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	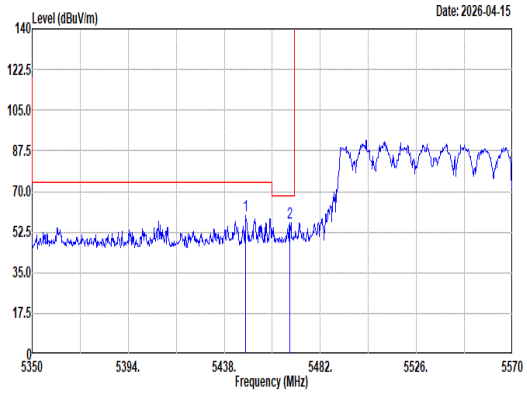 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5447.90 59.94 74.00 -14.06 47.10 34.90 13.03 35.09 0.00 268 0 Peak 2 5467.92 56.61 68.20 -11.59 43.68 34.97 13.05 35.09 0.00 268 0 Peak	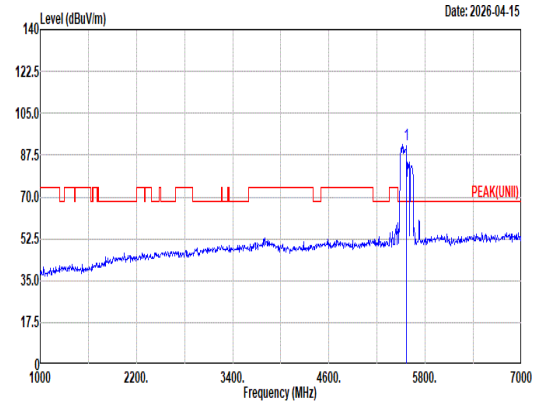 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 92.06 ------ ------ 78.94 35.10 13.10 35.08 0.00 268 0 Peak
Avg	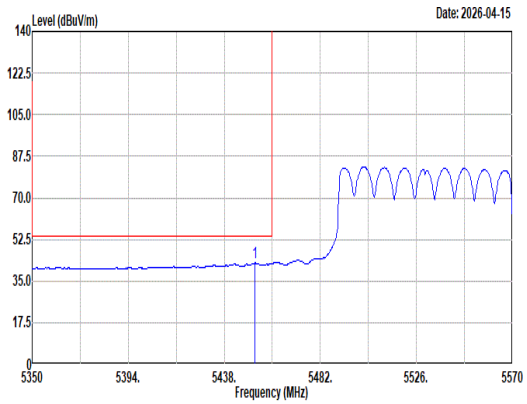 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5452.08 42.57 54.00 -11.43 29.72 34.91 13.03 35.09 0.00 268 0 Average	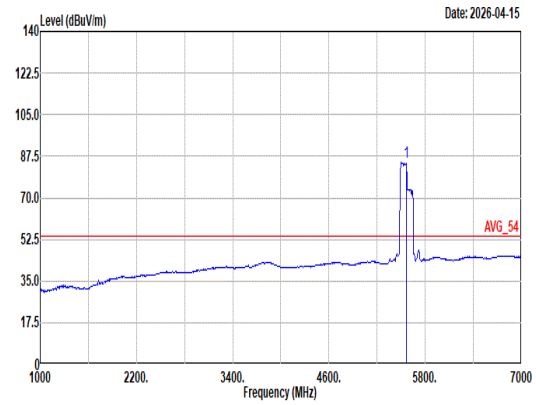 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 85.01 ------ ------ 71.91 35.10 13.08 35.08 0.00 268 0 Average

Mode	48	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Partial RU 996/67_5570MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	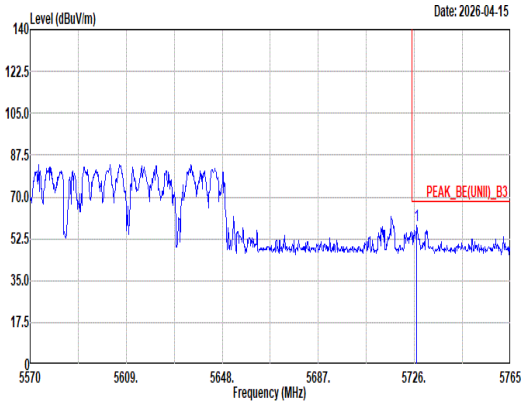 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.98 58.30 68.20 -9.90 44.98 35.10 13.29 35.07 0.00 268 0 Peak	Blank

Mode	48	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Partial RU 996/67_5570MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	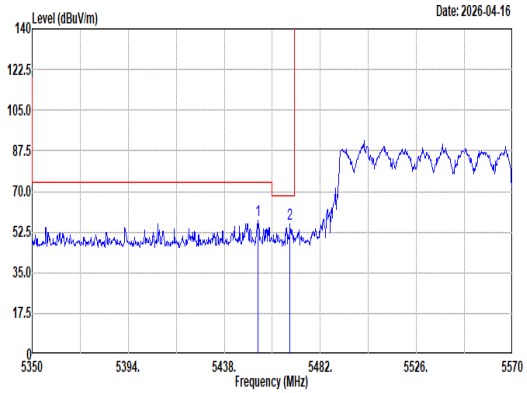 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5453.40 57.85 74.00 -16.15 45.00 34.91 13.03 35.09 0.00 217 268 Peak 2 5468.14 55.76 68.20 -12.44 42.83 34.97 13.05 35.09 0.00 217 268 Peak	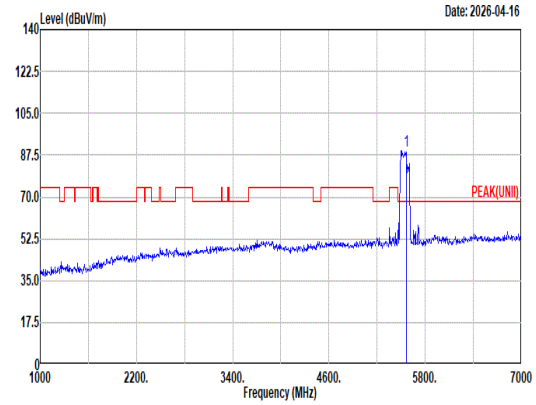 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 89.25 ------ ------ 76.14 35.10 13.09 35.08 0.00 217 268 Peak
Avg	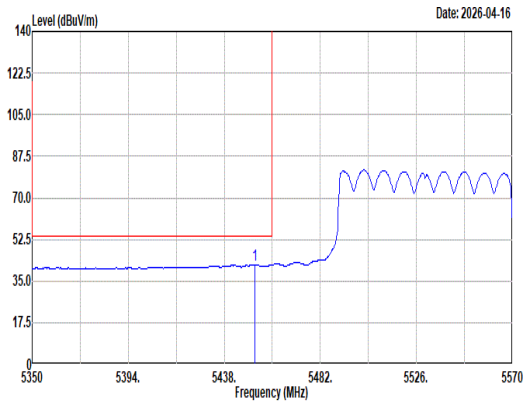 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5452.08 41.94 54.00 -12.06 29.09 34.91 13.03 35.09 0.00 217 268 Average	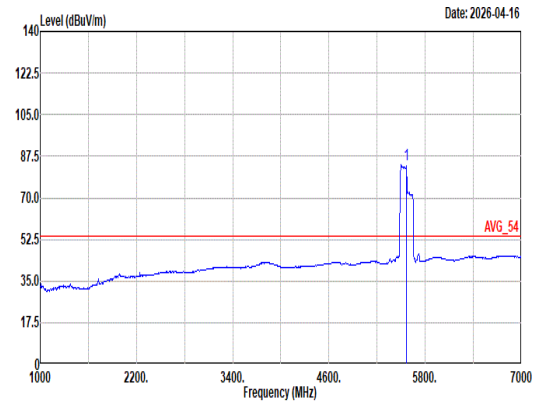 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 83.77 ------ ------ 70.67 35.10 13.08 35.08 0.00 217 268 Average

Mode	48	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Partial RU 996/67_5570MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	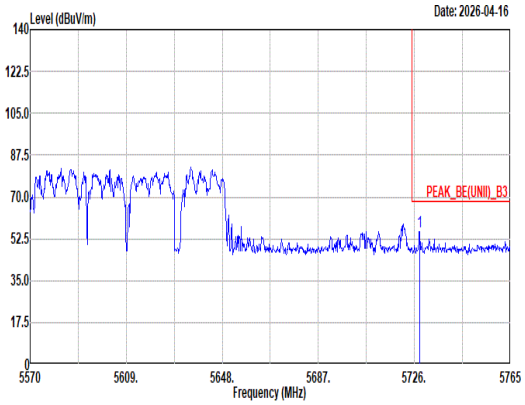 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5728.15 55.51 68.20 -12.69 42.18 35.10 13.30 35.07 0.00 217 268 Peak	Blank

Mode	48	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Partial RU 996/67_5570MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	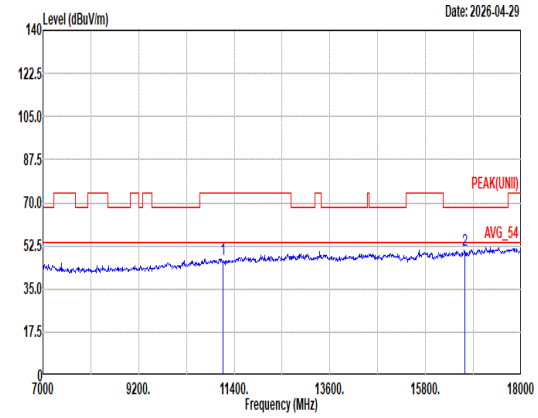 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11140.00 47.17 74.00 -26.83 47.04 38.22 18.39 57.75 1.27 -- -- Peak 2 16710.00 50.79 68.20 -17.41 40.94 42.30 22.35 56.14 1.34 -- -- Peak	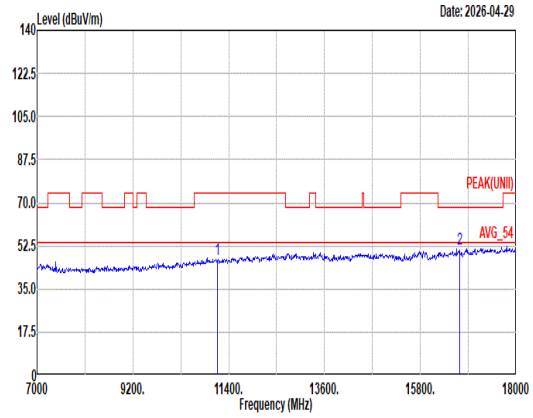 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11140.00 47.22 74.00 -26.78 47.09 38.22 18.39 57.75 1.27 -- -- Peak 2 16710.00 51.35 68.20 -16.85 41.50 42.30 22.35 56.14 1.34 -- -- Peak

Mode	48	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Partial RU 996/67_5570MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	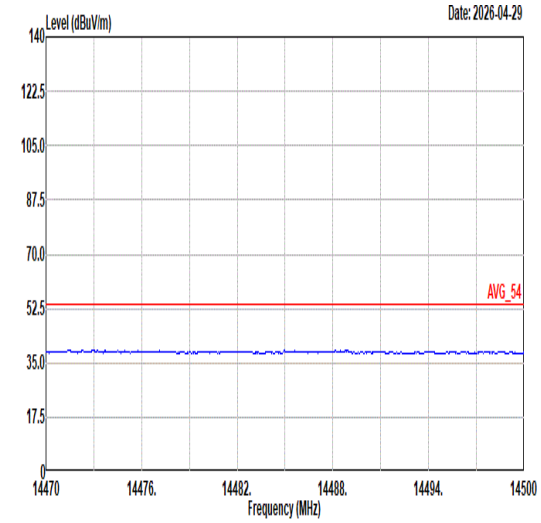 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	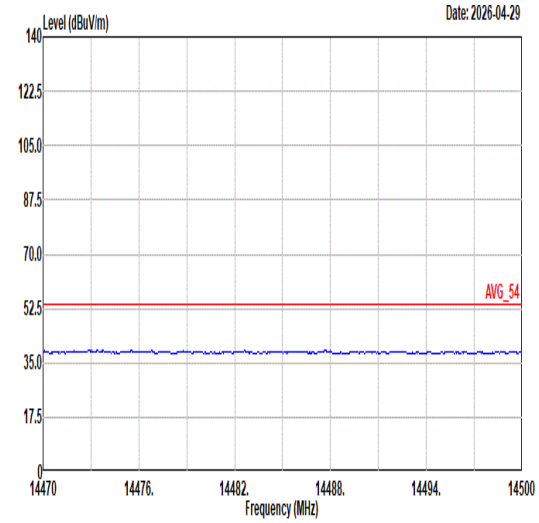 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	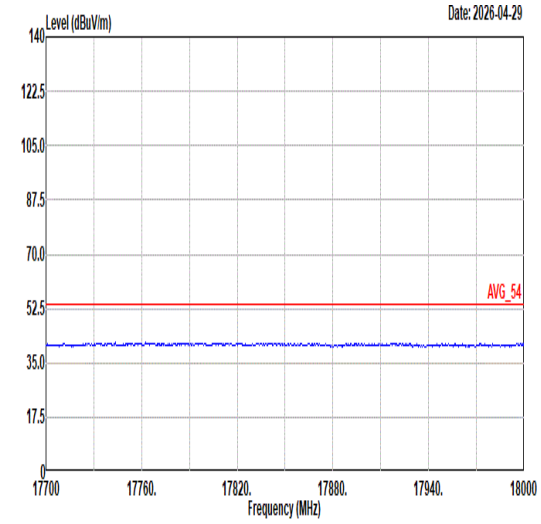 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	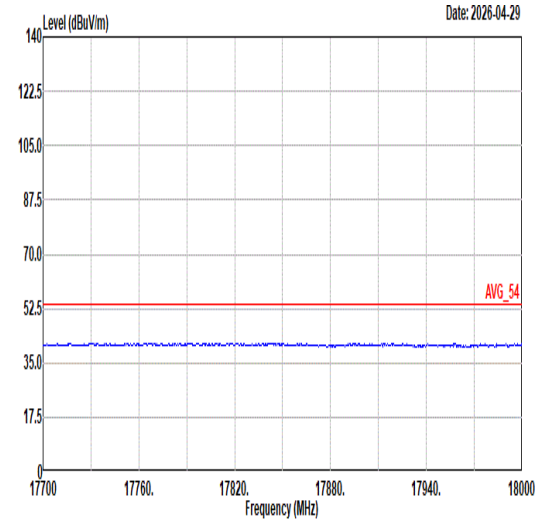 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	49
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz
ANT	6+7

Pol.	Horizontal	Fundamental
Peak	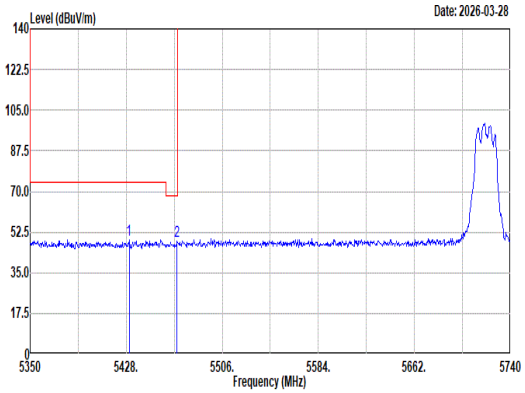 Site : 03CH07-HY Condition: STRADDLES U-NII-1&2A 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5430.34 49.21 74.00 -24.79 36.40 34.90 13.01 35.10 0.00 200 12 Peak 2 5469.34 48.68 68.20 -19.52 35.74 34.98 13.05 35.09 0.00 200 12 Peak	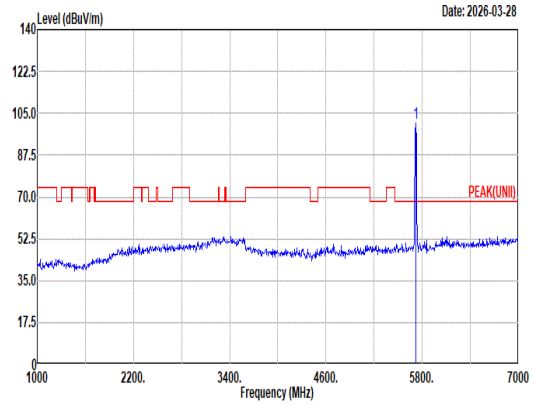 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5720.00 100.75 ------ ------ 87.44 35.10 13.28 35.07 0.00 200 12 Peak
Avg	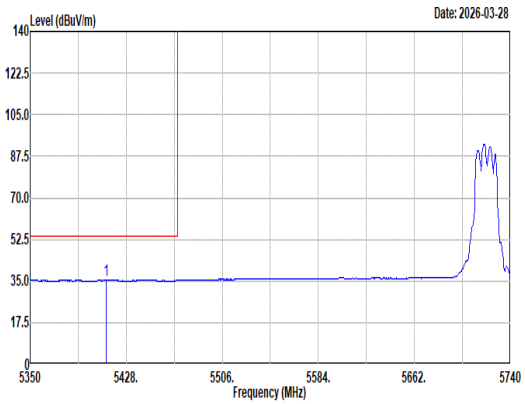 Site : 03CH07-HY Condition: U-NII-1&2A AVERAGE 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5411.62 35.56 54.00 -18.44 22.77 34.90 12.99 35.10 0.00 200 12 Average	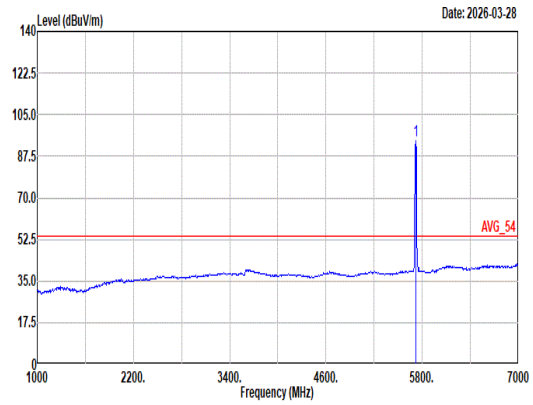 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5720.00 94.25 ------ ------ 80.94 35.10 13.28 35.07 0.00 200 12 Average

Mode	49	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	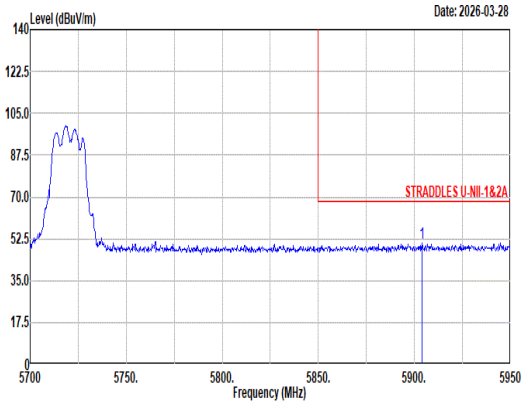 Site : 03CH07-HY Condition: STRADDLES U-NII-1&2A 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5904.00 50.72 68.20 -17.48 36.92 35.41 13.45 35.06 0.00 200 12 Peak	Blank

Mode	49	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	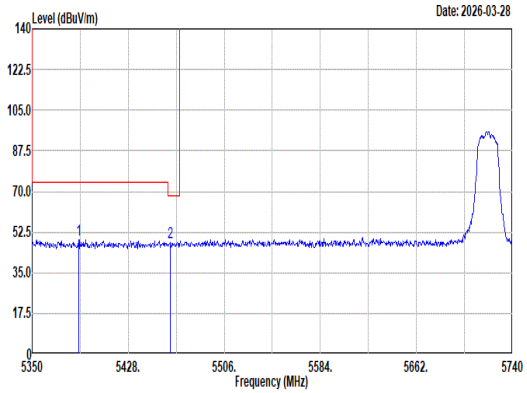 Site : 03CH07-HY Condition: STRADDLES U-NII-1&2A 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5387.83 49.11 74.00 -24.89 36.30 34.95 12.97 35.11 0.00 300 279 Peak 2 5461.93 47.98 68.20 -20.22 35.08 34.95 13.04 35.09 0.00 300 279 Peak	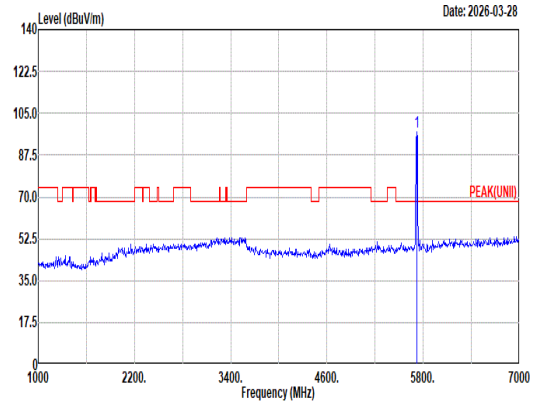 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5720.00 97.27 ------ ------ 83.96 35.10 13.28 35.07 0.00 300 279 Peak
Avg	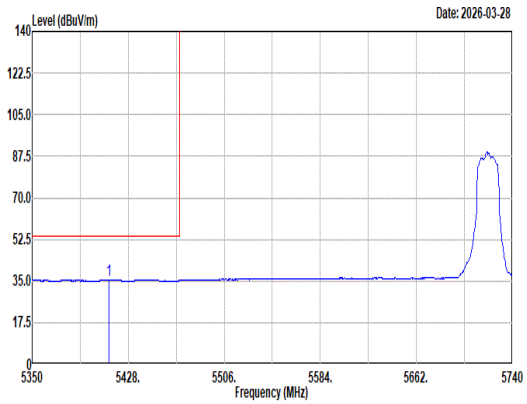 Site : 03CH07-HY Condition: U-NII-1&2A AVERAGE 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5412.40 35.47 54.00 -18.53 22.68 34.90 12.99 35.10 0.00 300 279 Average	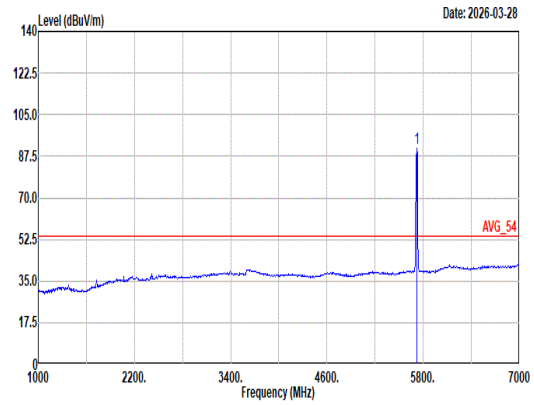 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : PEAK Mode : 49 Setting : 8.5 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5720.00 91.00 ------ ------ 77.68 35.10 13.29 35.07 0.00 300 279 Average

Mode	49	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	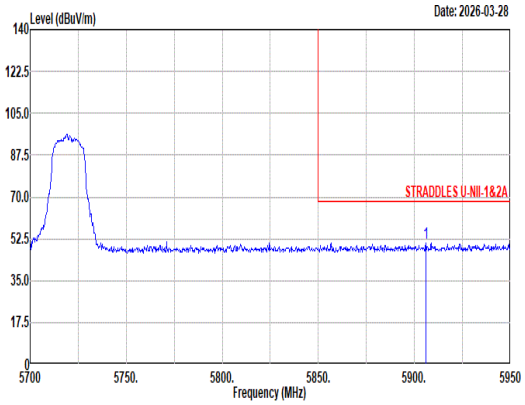 Site : 03CH07-HY Condition: STRADDLES U-NII-1&2A 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : PEAK Mode : 49 Setting : 8.5 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5906.00 50.97 68.20 -17.23 37.16 35.41 13.46 35.06 0.00 300 279 Peak	Blank

Mode	49	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	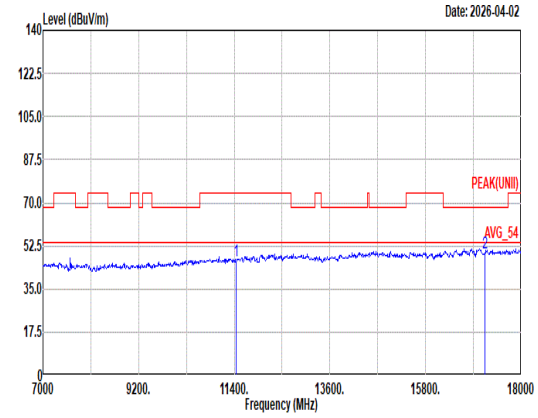 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 46.68 74.00 -27.32 45.67 38.40 18.68 57.38 1.31 -- -- Peak 2 17160.00 49.46 68.20 -18.74 39.66 41.80 22.54 55.96 1.42 -- -- Peak	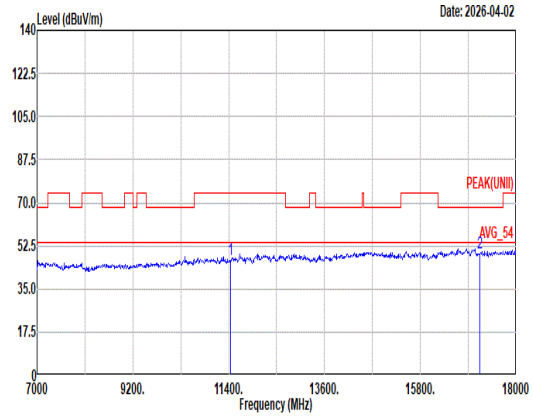 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 46.90 74.00 -27.10 45.89 38.40 18.68 57.38 1.31 -- -- Peak 2 17160.00 49.40 68.20 -18.80 39.60 41.80 22.54 55.96 1.42 -- -- Peak

Mode	49	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	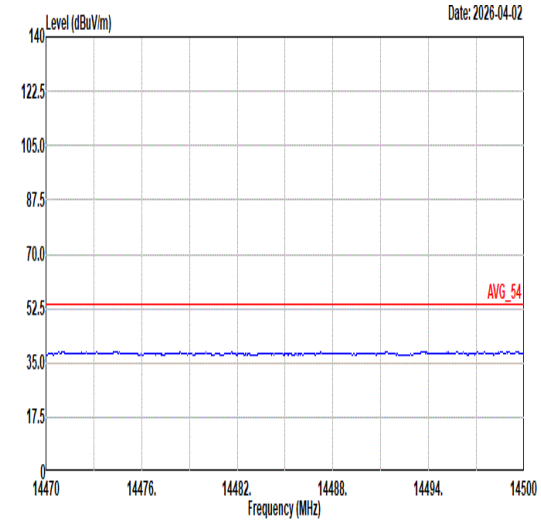 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	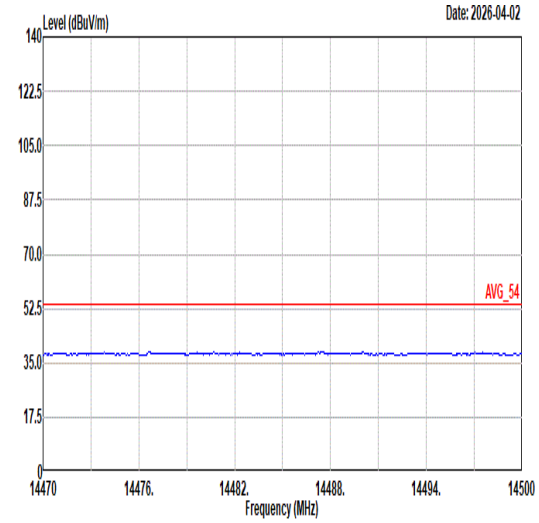 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	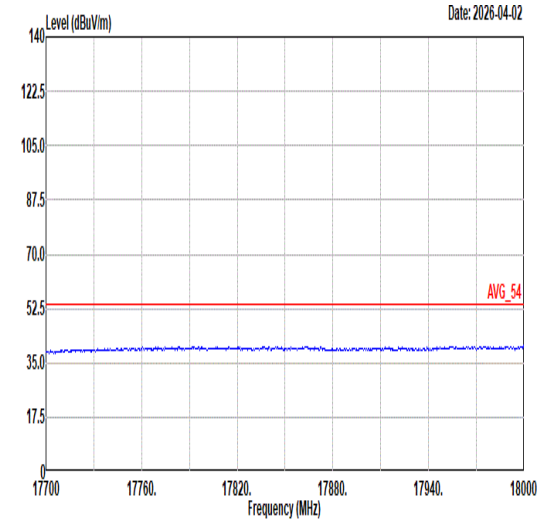 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	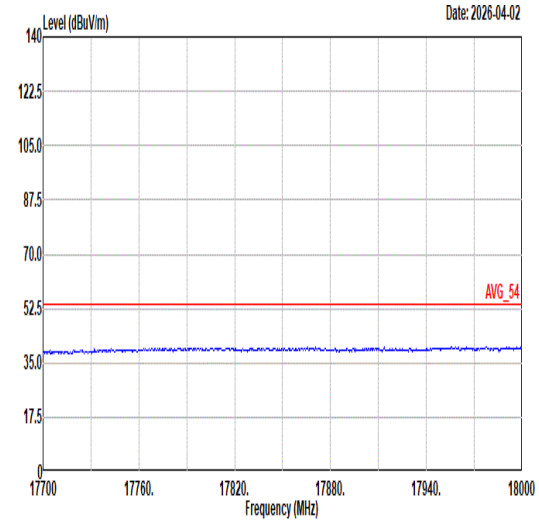 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	50	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_5720MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	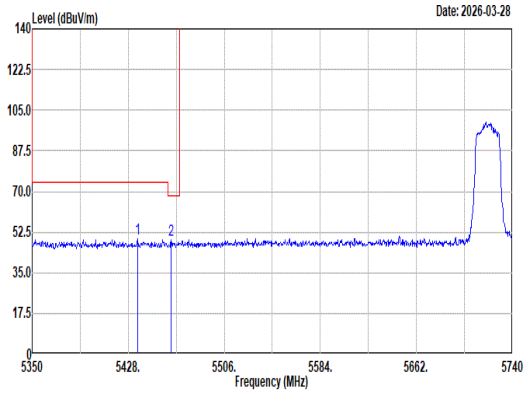 Site : 03CH07-HY Condition: STRADDLES U-NII-1&2A 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5435.41 49.70 74.00 -24.30 36.88 34.90 13.02 35.10 0.00 136 0 Peak 2 5462.71 49.19 68.20 -19.01 36.29 34.95 13.04 35.09 0.00 136 0 Peak	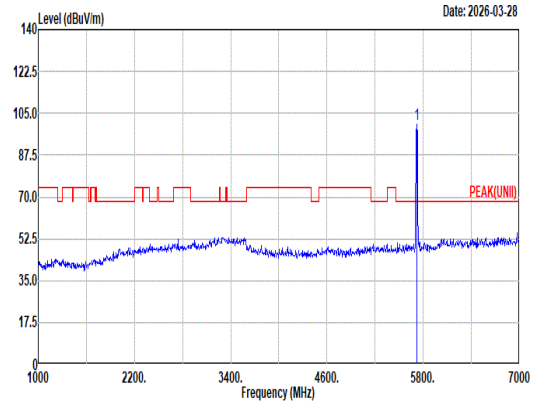 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5720.00 100.32 ------ ------ 87.01 35.10 13.28 35.07 0.00 136 0 Peak
Avg	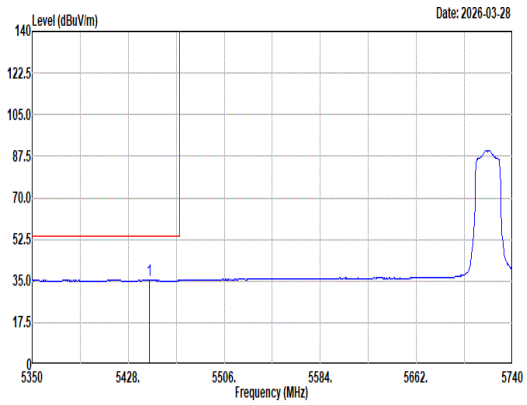 Site : 03CH07-HY Condition: U-NII-1&2A AVERAGE 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5445.16 35.38 54.00 -18.62 22.54 34.90 13.03 35.09 0.00 136 0 Average	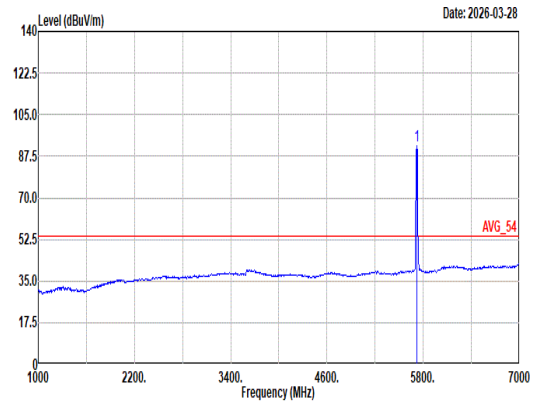 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5720.00 91.85 ------ ------ 78.53 35.10 13.29 35.07 0.00 136 0 Average

Mode	50	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_5720MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	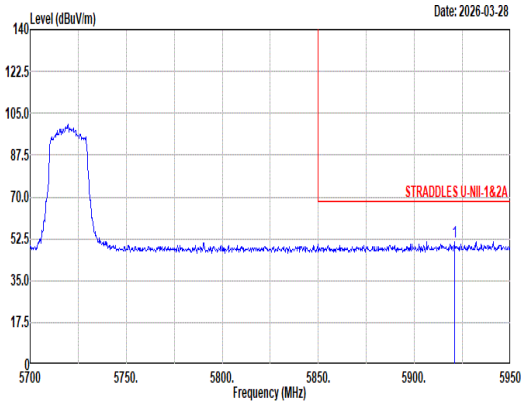 Site : 03CH07-HY Condition: STRADDLES U-NII-1&2A 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5920.75 51.26 68.20 -16.94 37.40 35.44 13.47 35.05 0.00 136 0 Peak	Blank

Mode	50
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_5720MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	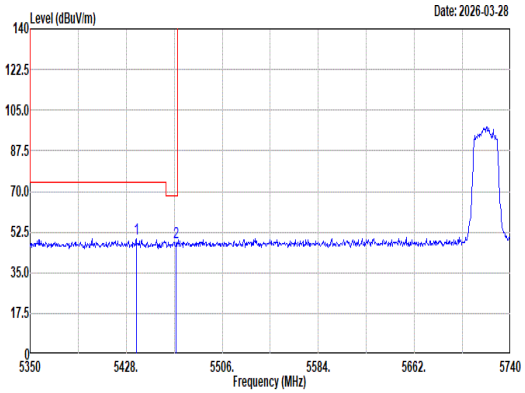 Site : 03CH07-HY Condition: STRADDLES U-NII-1&2A 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5436.19 49.67 74.00 -24.33 36.85 34.90 13.02 35.10 0.00 300 277 Peak 2 5468.56 48.31 68.20 -19.89 35.38 34.97 13.05 35.09 0.00 300 277 Peak	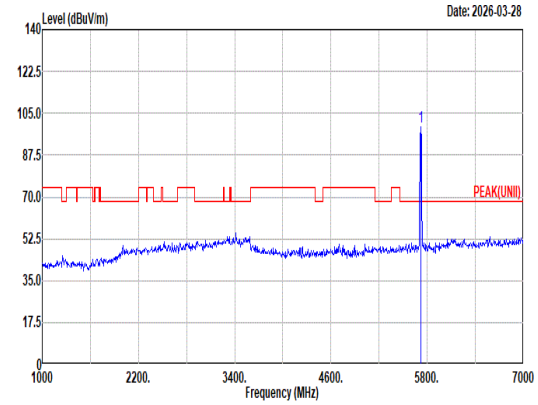 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5720.00 99.10 ------ ------ 85.79 35.10 13.28 35.07 0.00 300 277 Peak
Avg	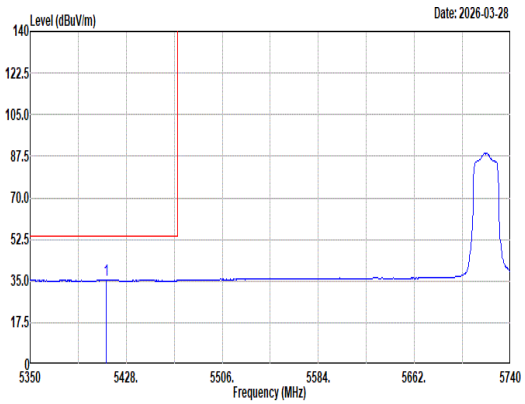 Site : 03CH07-HY Condition: U-NII-1&2A AVERAGE 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5412.01 35.46 54.00 -18.54 22.67 34.90 12.99 35.10 0.00 300 277 Average	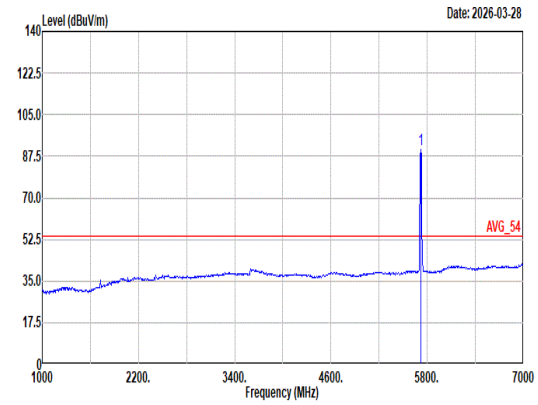 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5720.00 90.51 ------ ------ 77.19 35.10 13.29 35.07 0.00 300 277 Average

Mode	50	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_5720MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	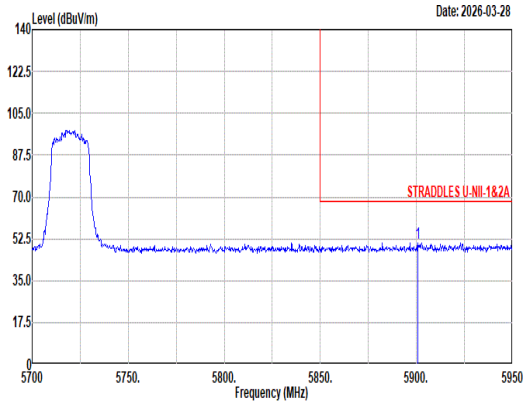 Site : 03CH07-HY Condition: STRADDLES U-NII-1&2A 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5900.75 50.67 68.20 -17.53 36.88 35.40 13.45 35.06 0.00 300 277 Peak	Blank

Mode	50	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_5720MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	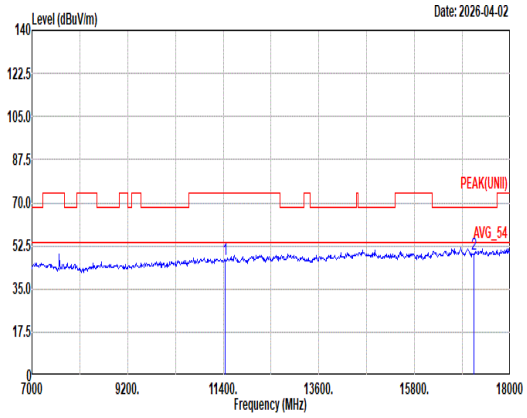 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 47.22 74.00 -26.78 46.21 38.40 18.68 57.38 1.31 -- -- Peak 2 17160.00 49.19 68.20 -19.01 39.39 41.80 22.54 55.96 1.42 -- -- Peak	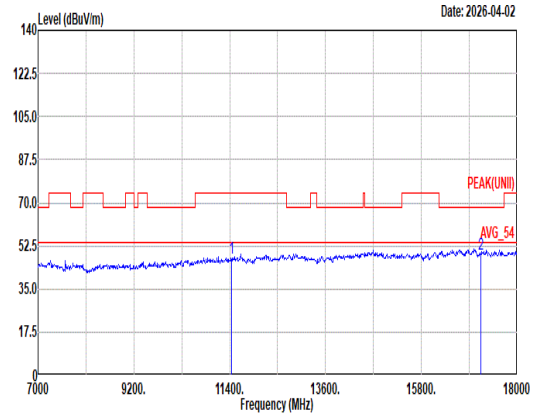 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 47.67 74.00 -26.33 46.66 38.40 18.68 57.38 1.31 -- -- Peak 2 17160.00 49.22 68.20 -18.98 39.42 41.80 22.54 55.96 1.42 -- -- Peak

Mode	50	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_5720MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	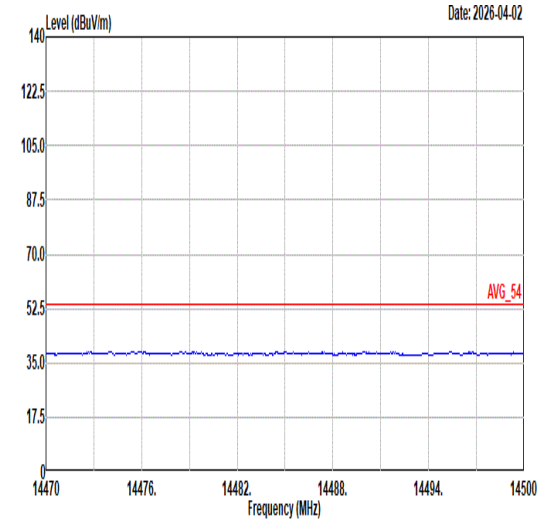 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	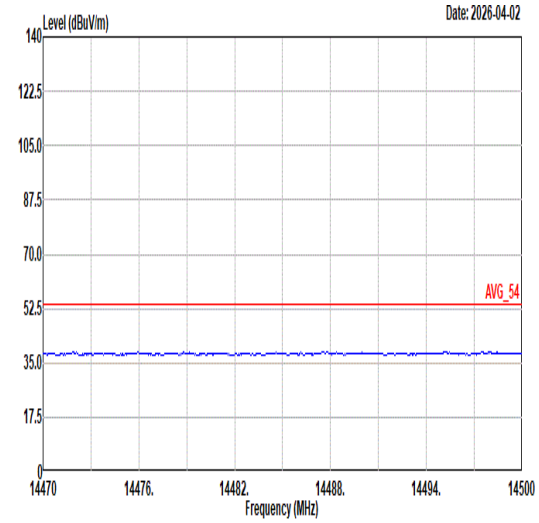 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	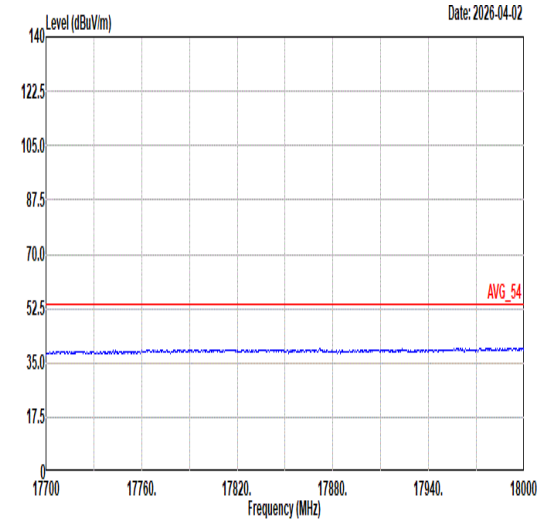 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	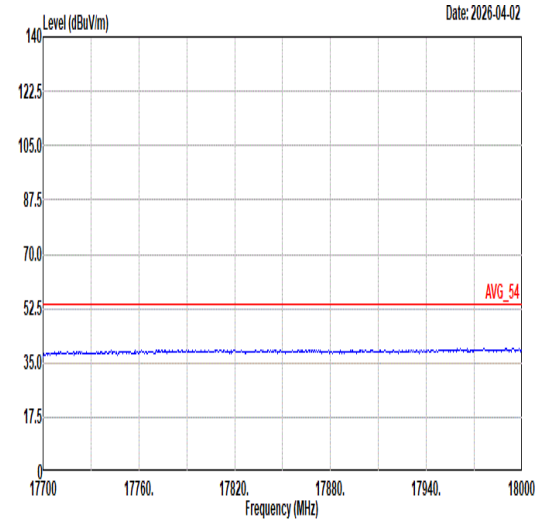 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	51	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_5710MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	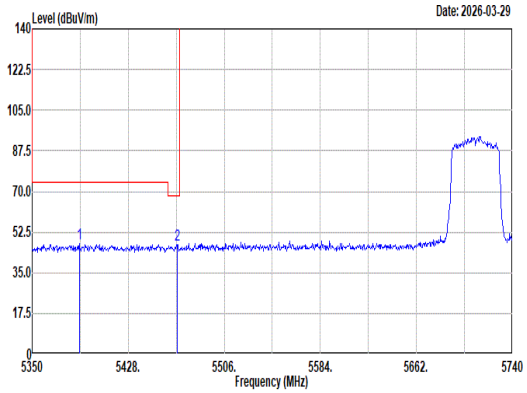 Site : 03CH07-HY Condition: STRADDLES U-NII-1&2A 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5388.22 47.51 74.00 -26.49 34.70 34.95 12.97 35.11 0.00 228 0 Peak 2 5467.78 47.05 68.20 -21.15 34.12 34.97 13.05 35.09 0.00 228 0 Peak	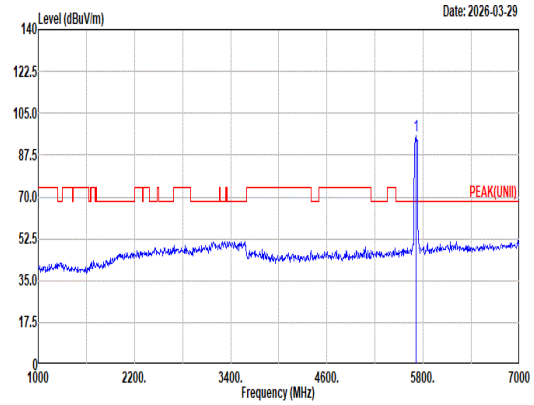 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5710.00 95.86 ------ ------ 82.55 35.10 13.28 35.07 0.00 228 0 Peak
Avg	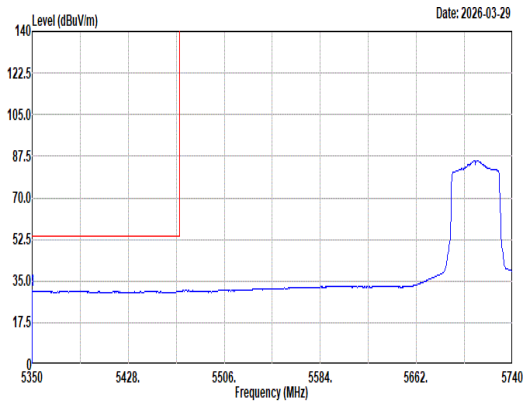 Site : 03CH07-HY Condition: U-NII-1&2A AVERAGE 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5350.00 30.91 54.00 -23.09 18.00 35.10 12.93 35.12 0.00 228 0 Average	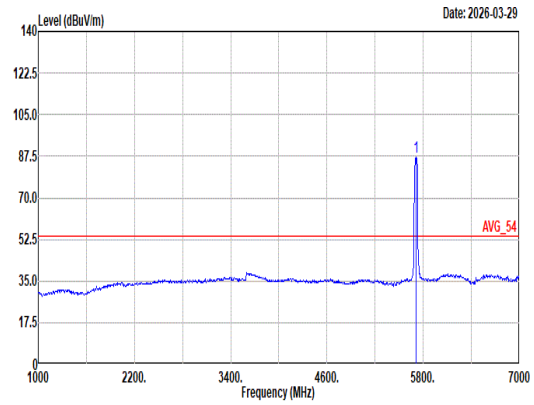 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5710.00 87.42 ------ ------ 74.11 35.10 13.28 35.07 0.00 228 0 Average

Mode	51	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_5710MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	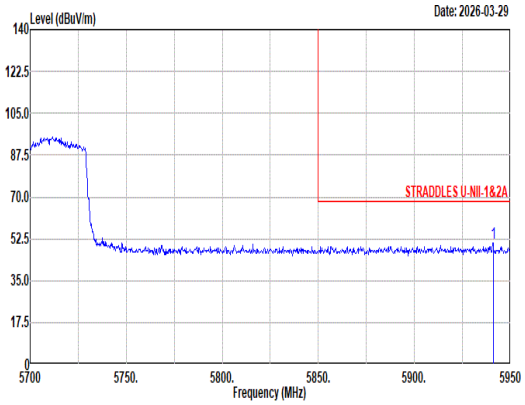 Site : 03CH07-HY Condition: STRADDLES U-NII-1&2A 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5941.00 50.92 68.20 -17.28 37.00 35.48 13.49 35.05 0.00 228 0 Peak	Blank

Mode	51	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_5710MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	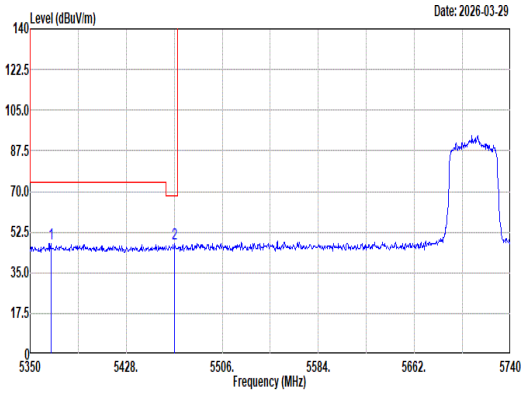 Site : 03CH07-HY Condition: STRADDLES U-NII-1&2A 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5366.77 47.44 74.00 -26.56 34.57 35.03 12.95 35.11 0.00 276 271 Peak 2 5467.39 47.39 68.20 -20.81 34.46 34.97 13.05 35.09 0.00 276 271 Peak	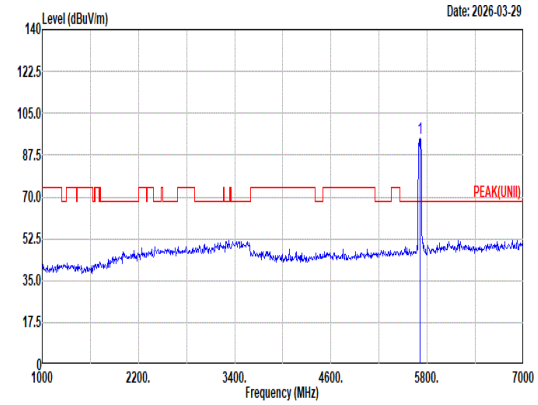 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5710.00 94.44 ------ ------ 81.13 35.10 13.28 35.07 0.00 276 271 Peak
Avg	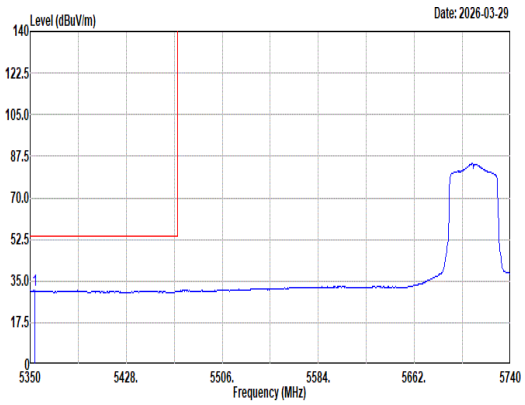 Site : 03CH07-HY Condition: U-NII-1&2A AVERAGE 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.90 30.94 54.00 -23.06 18.04 35.08 12.94 35.12 0.00 276 271 Average	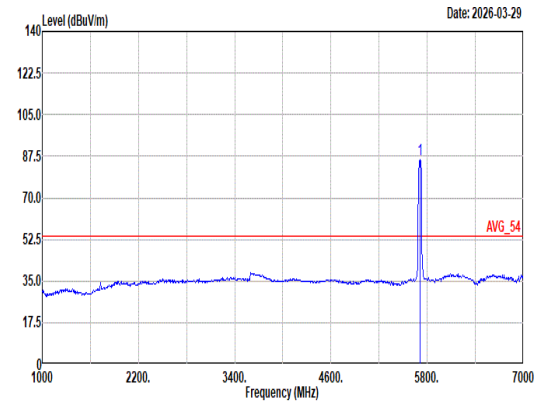 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5710.00 86.04 ------ ------ 72.73 35.10 13.28 35.07 0.00 276 271 Average

Mode	51	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_5710MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	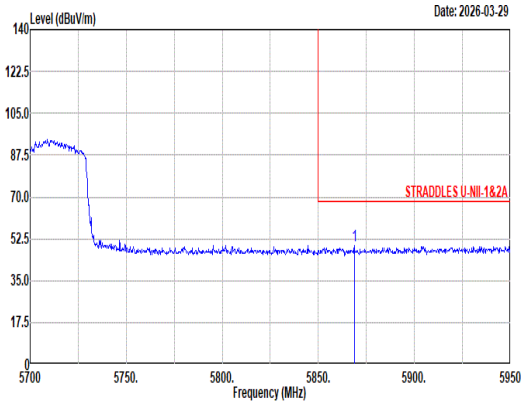 Site : 03CH07-HY Condition: STRADDLES U-NII-1&2A 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5868.75 49.40 68.20 -18.80 35.76 35.28 13.42 35.06 0.00 276 271 Peak	Blank

Mode	51	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_5710MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	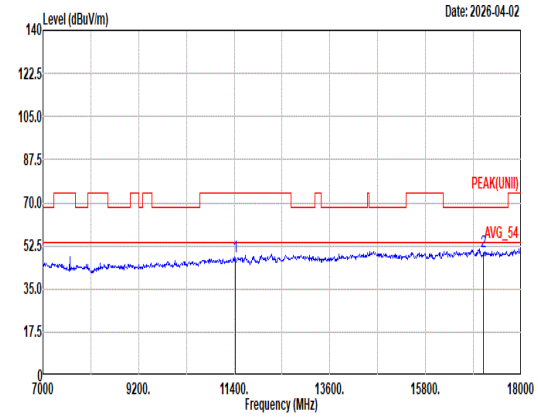 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11420.00 48.17 74.00 -25.83 47.23 38.40 18.66 57.43 1.31 -- -- Peak 2 17130.00 50.21 68.20 -17.99 40.28 41.92 22.52 55.92 1.41 -- -- Peak	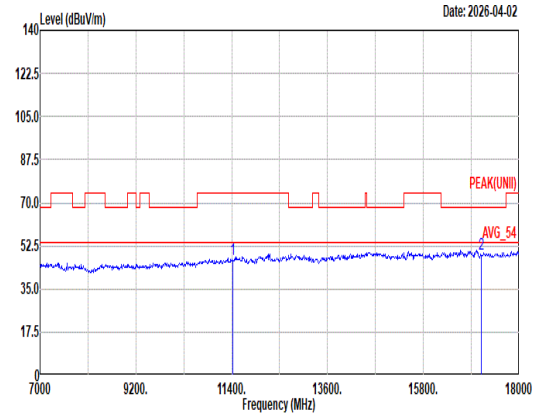 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11420.00 46.91 74.00 -27.09 45.97 38.40 18.66 57.43 1.31 -- -- Peak 2 17130.00 49.07 68.20 -19.13 39.14 41.92 22.52 55.92 1.41 -- -- Peak

Mode	51	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_5710MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	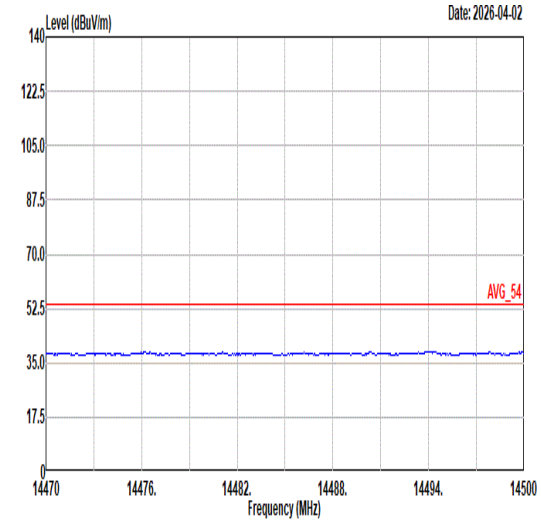 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	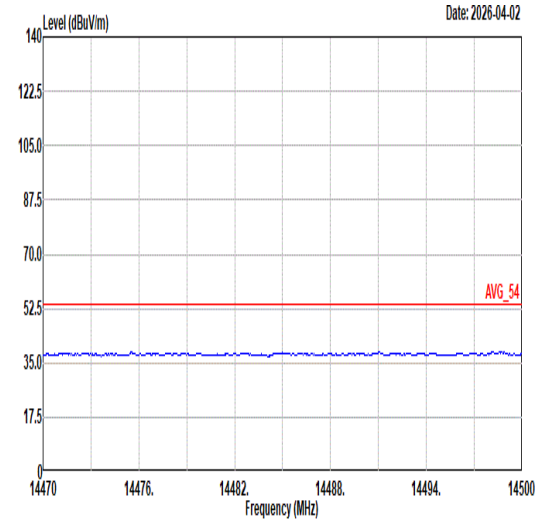 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	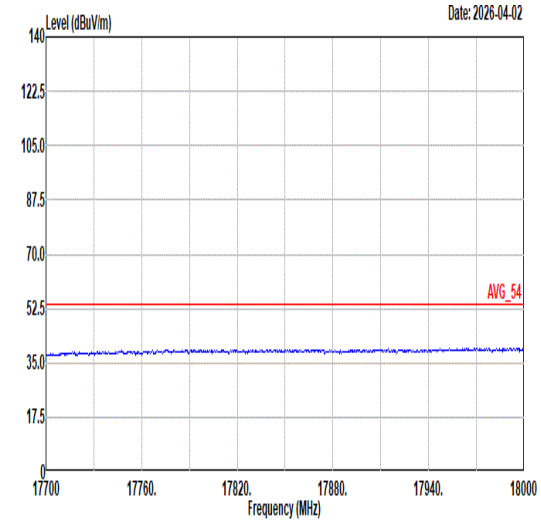 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	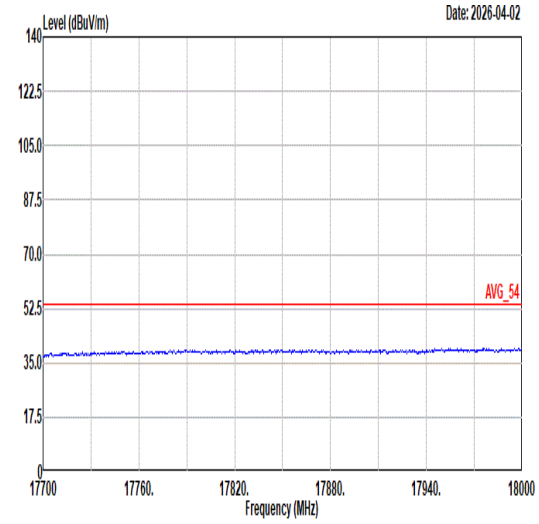 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	52	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH138_5690MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	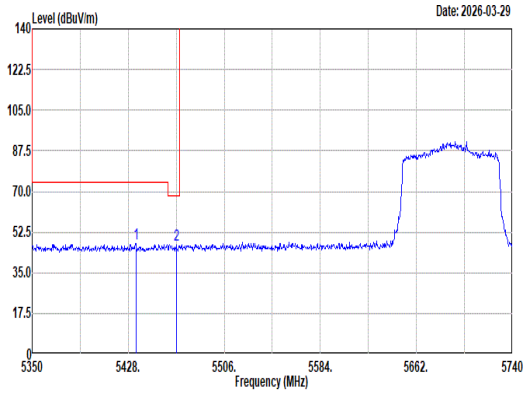 Site : 03CH07-HY Condition: STRADDLES U-NII-1&2A 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5434.24 47.52 74.00 -26.48 34.71 34.90 13.01 35.10 0.00 243 0 Peak 2 5467.00 47.23 68.20 -20.97 34.30 34.97 13.05 35.09 0.00 243 0 Peak	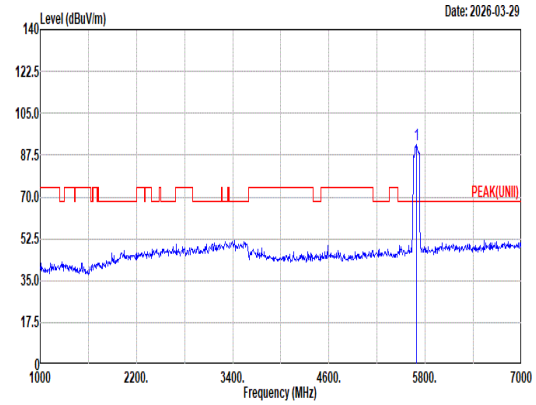 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5690.00 92.03 ------ ------ 78.76 35.08 13.26 35.07 0.00 243 0 Peak
Avg	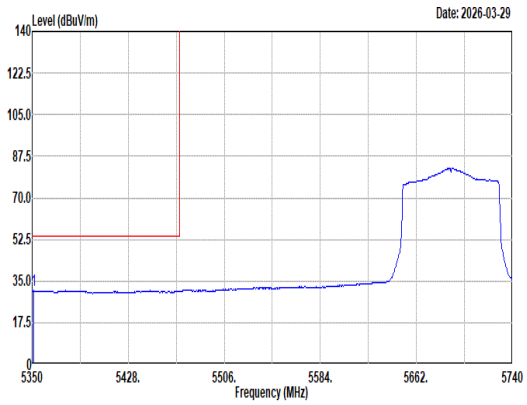 Site : 03CH07-HY Condition: U-NII-1&2A AVERAGE 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.17 30.98 54.00 -23.02 18.07 35.10 12.93 35.12 0.00 243 0 Average	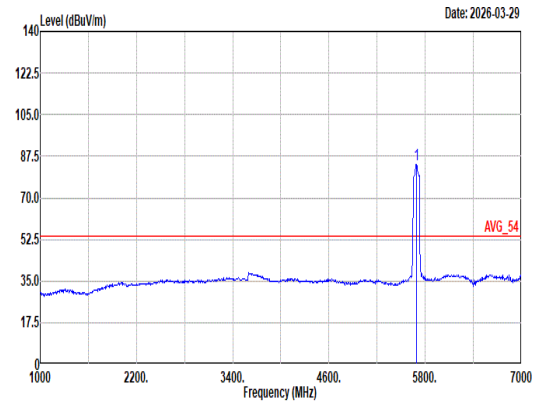 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5690.00 84.26 ------ ------ 70.99 35.08 13.26 35.07 0.00 243 0 Average

Mode	52	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH138_5690MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	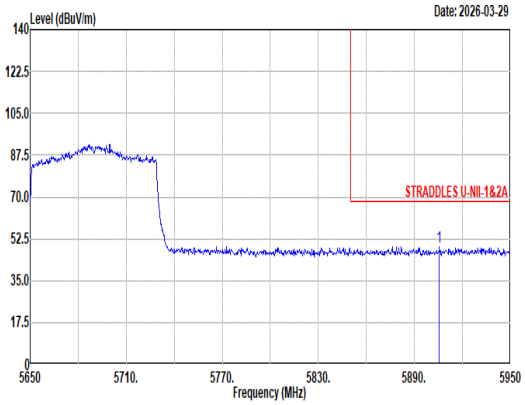 Site : 03CH07-HY Condition: STRADDLES U-NII-1&2A 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5905.60 49.26 68.20 -18.94 35.45 35.41 13.46 35.06 0.00 243 0 Peak	Blank

Mode	52	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH138_5690MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	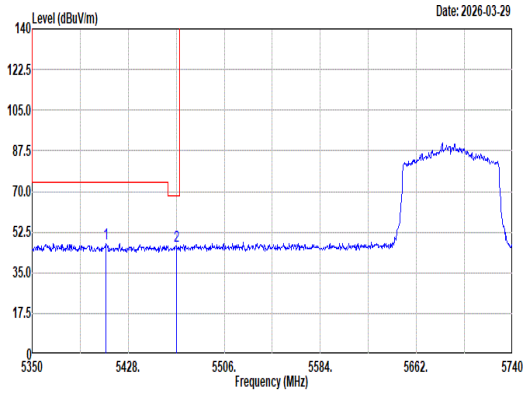 Site : 03CH07-HY Condition: STRADDLES U-NII-1&2A 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5409.67 47.39 74.00 -26.61 34.60 34.90 12.99 35.10 0.00 301 257 Peak 2 5467.39 46.63 68.20 -21.57 33.70 34.97 13.05 35.09 0.00 301 257 Peak	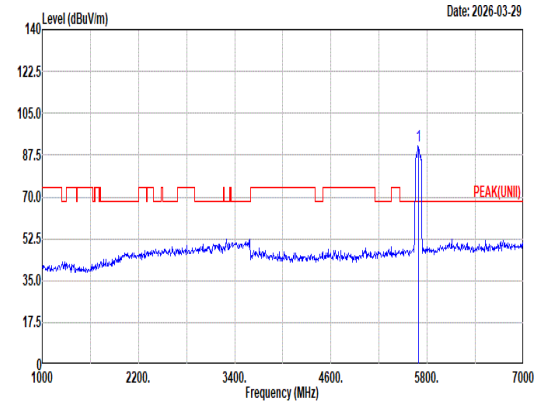 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5690.00 91.36 ------ ------ 78.10 35.07 13.26 35.07 0.00 301 257 Peak
Avg	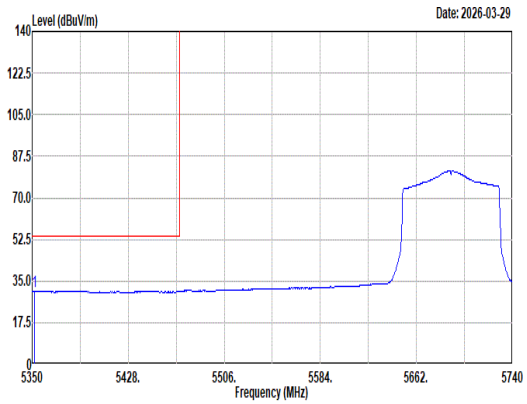 Site : 03CH07-HY Condition: U-NII-1&2A AVERAGE 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5351.95 30.90 54.00 -23.10 18.00 35.09 12.93 35.12 0.00 301 257 Average	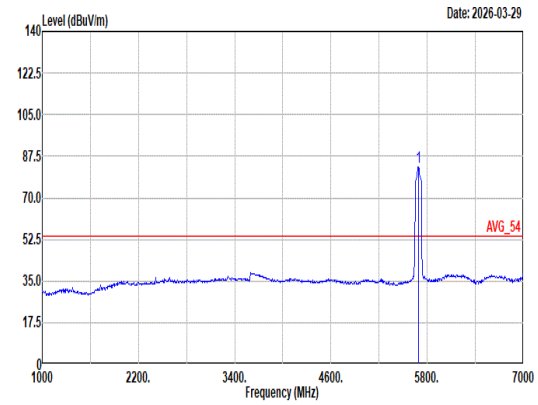 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5690.00 83.01 ------ ------ 69.74 35.08 13.26 35.07 0.00 301 257 Average

Mode	52	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH138_5690MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	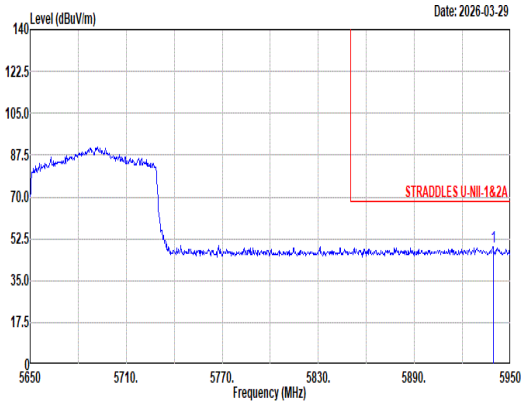 Site : 03CH07-HY Condition: STRADDLES U-NII-1&2A 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5939.20 49.13 68.20 -19.07 35.21 35.48 13.49 35.05 0.00 301 257 Peak	Blank

Mode	52	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH138_5690MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	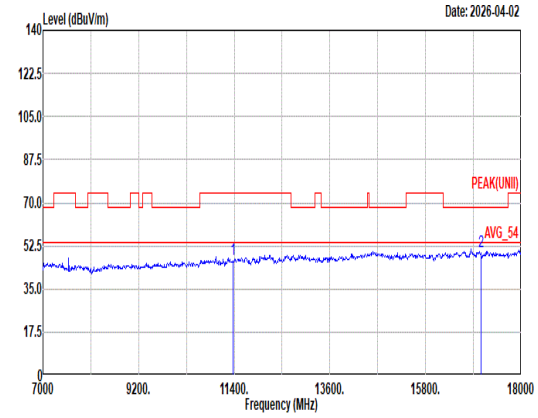 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11380.00 47.05 74.00 -26.95 46.25 38.40 18.62 57.52 1.30 -- -- Peak 2 17070.00 50.16 68.20 -18.04 39.95 42.16 22.50 55.85 1.40 -- -- Peak	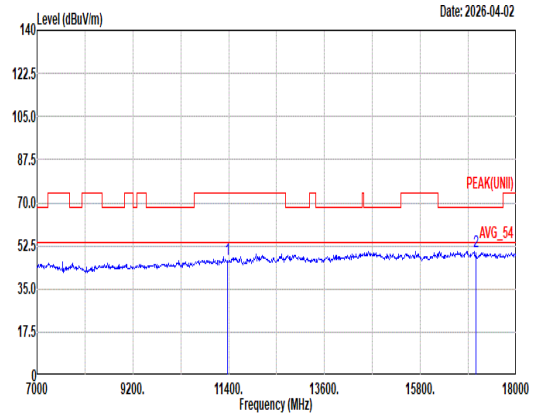 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11380.00 47.22 74.00 -26.78 46.42 38.40 18.62 57.52 1.30 -- -- Peak 2 17070.00 50.38 68.20 -17.82 40.17 42.16 22.50 55.85 1.40 -- -- Peak

Mode	52	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH138_5690MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	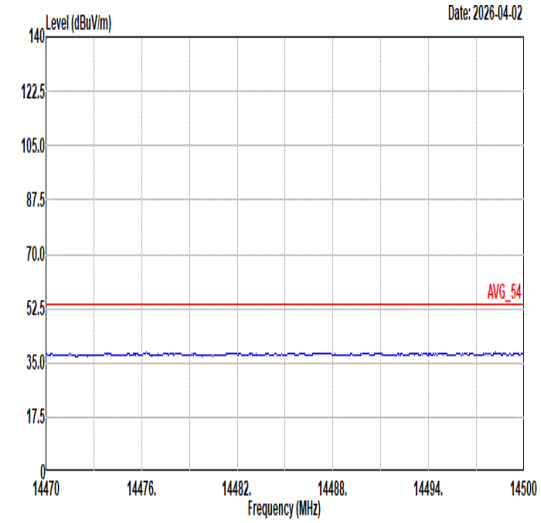 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	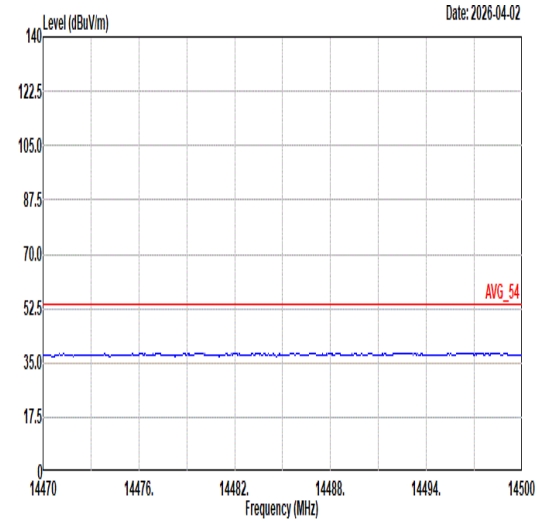 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	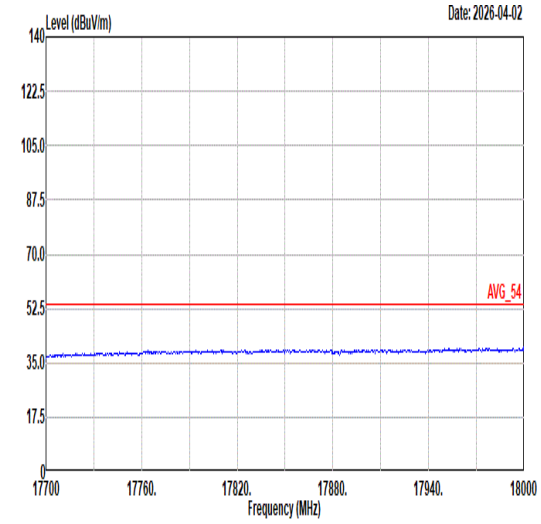 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	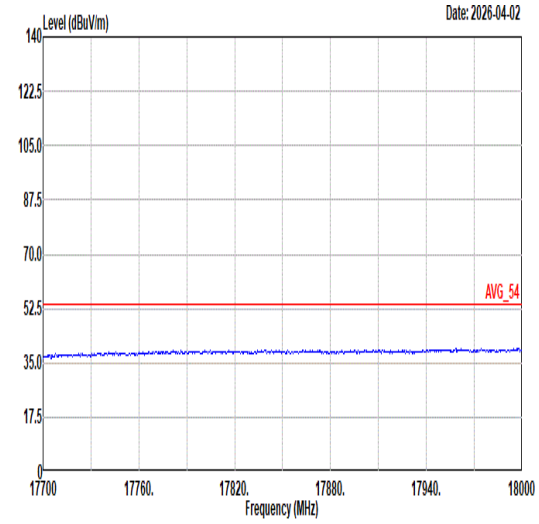 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	53	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH140_5700MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	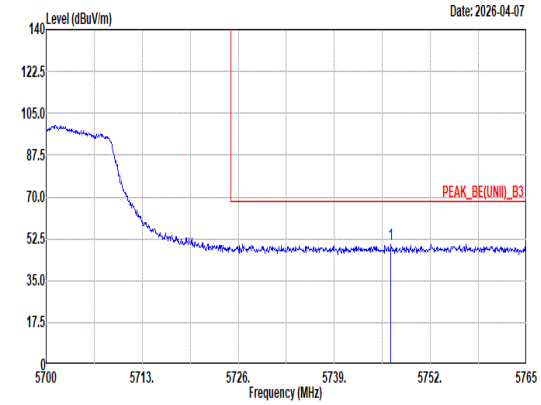 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5746.67 50.35 68.20 -17.85 37.01 35.10 13.31 35.07 0.00 231 11 Peak	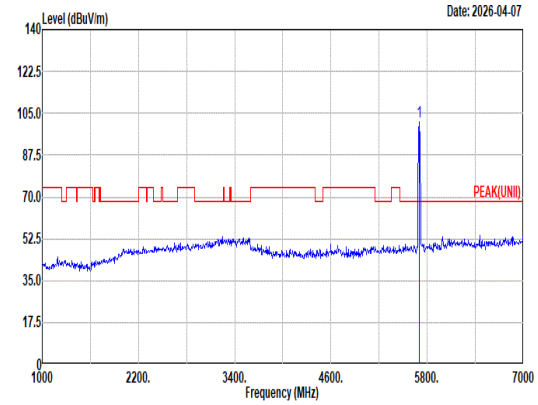 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 101.26 ------ ------ 87.96 35.10 13.27 35.07 0.00 231 11 Peak
Avg	Blank	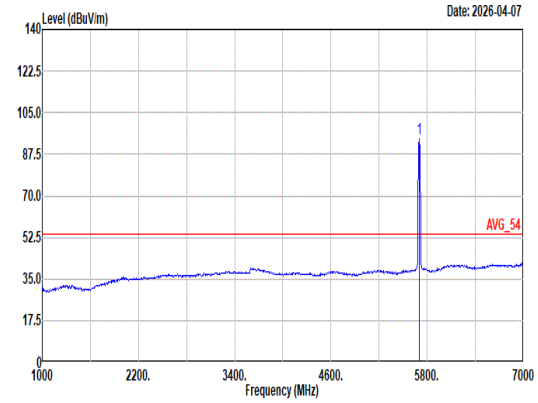 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 93.82 ------ ------ 80.52 35.10 13.27 35.07 0.00 231 11 Average

Mode	53	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH140_5700MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	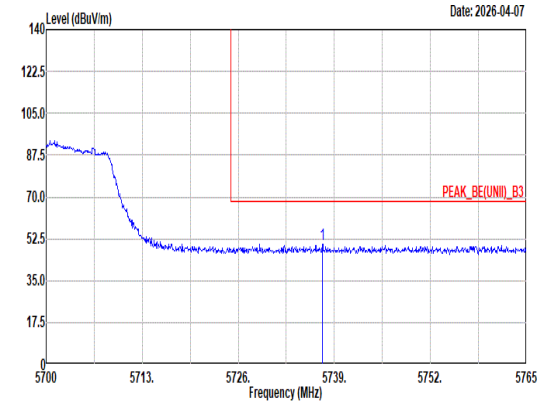 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5737.38 50.37 68.20 -17.83 37.04 35.10 13.30 35.07 0.00 400 272 Peak	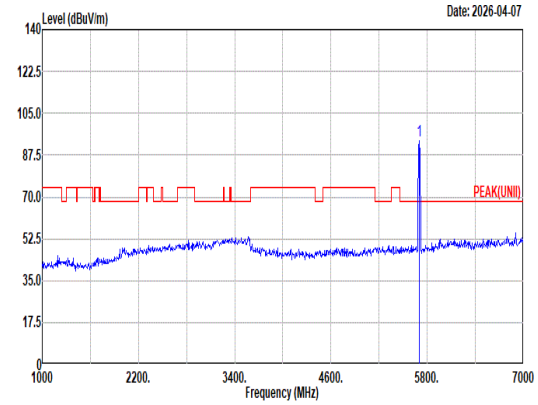 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5700.00 93.57 ------ ------ 80.27 35.10 13.27 35.07 0.00 400 272 Peak
Avg	Blank	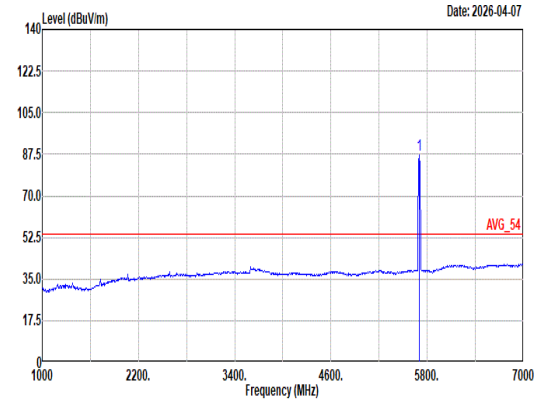 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5700.00 87.15 ------ ------ 73.85 35.10 13.27 35.07 0.00 400 272 Average

Mode	53	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH140_5700MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	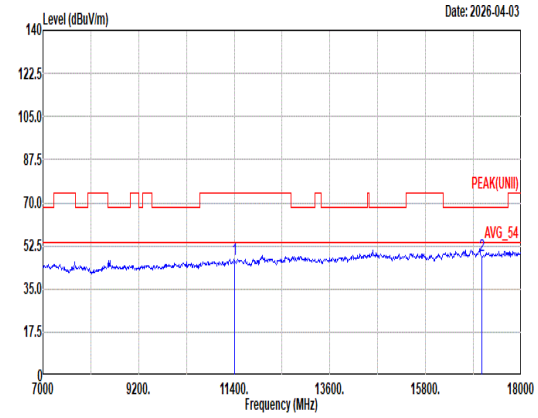 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11400.00 47.00 74.00 -27.00 46.12 38.40 18.64 57.47 1.31 -- -- Peak 2 17100.00 48.83 68.20 -19.37 38.69 42.10 22.51 55.88 1.41 -- -- Peak	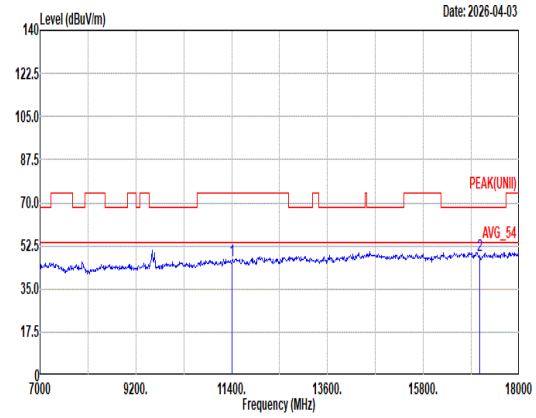 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11400.00 46.58 74.00 -27.42 45.70 38.40 18.64 57.47 1.31 -- -- Peak 2 17100.00 48.72 68.20 -19.48 38.58 42.10 22.51 55.88 1.41 -- -- Peak

Mode	53	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT20_CH140_5700MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	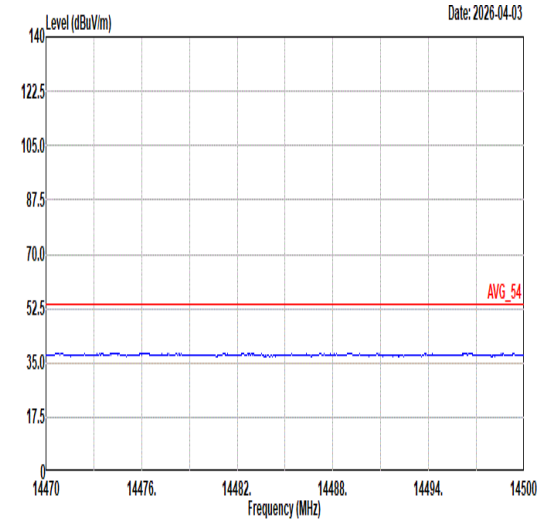 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	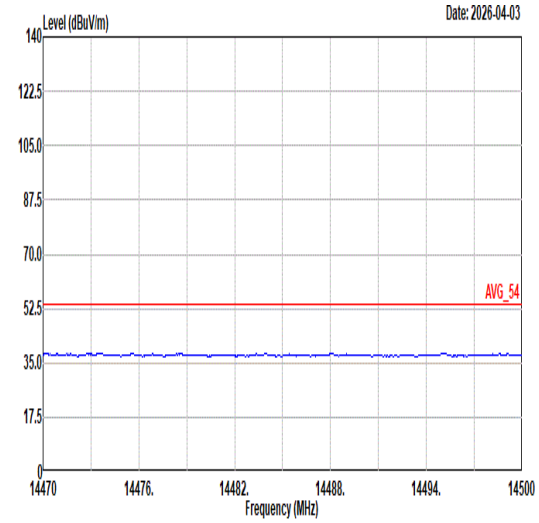 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	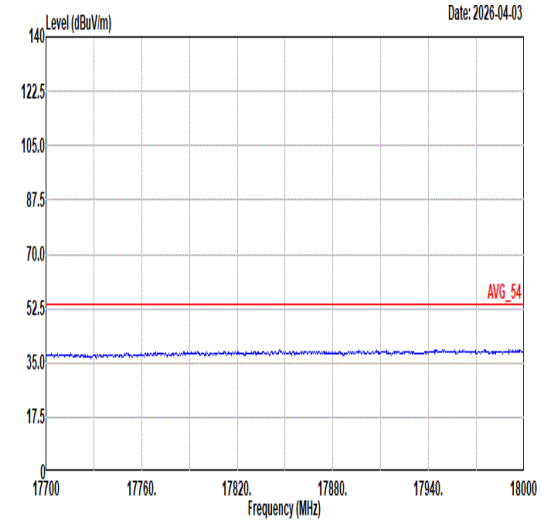 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	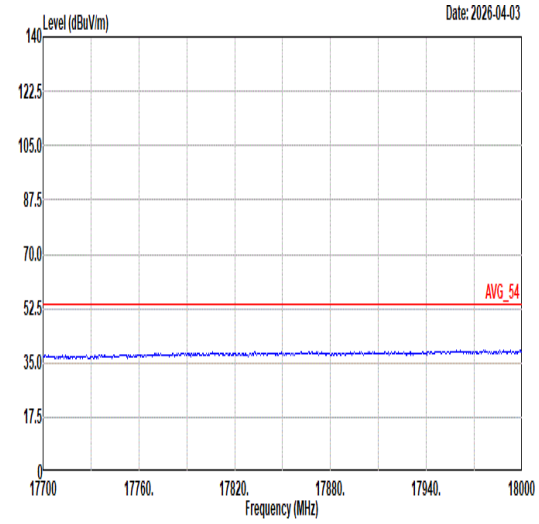 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	54	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH134_5670MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	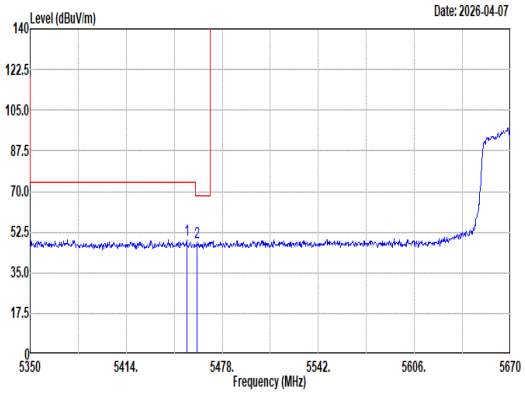 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5454.32 49.00 74.00 -25.00 36.14 34.92 13.03 35.09 0.00 217 0 Peak 2 5461.04 48.15 68.20 -20.05 35.26 34.94 13.04 35.09 0.00 217 0 Peak	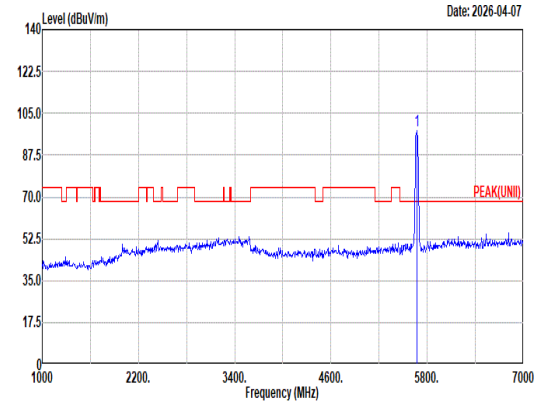 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5670.00 97.70 ------ ------ 84.49 35.04 13.24 35.07 0.00 217 0 Peak
Avg	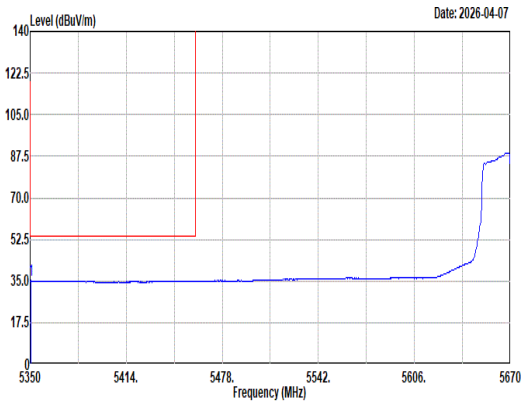 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5350.32 35.13 54.00 -18.87 22.22 35.10 12.93 35.12 0.00 217 0 Average	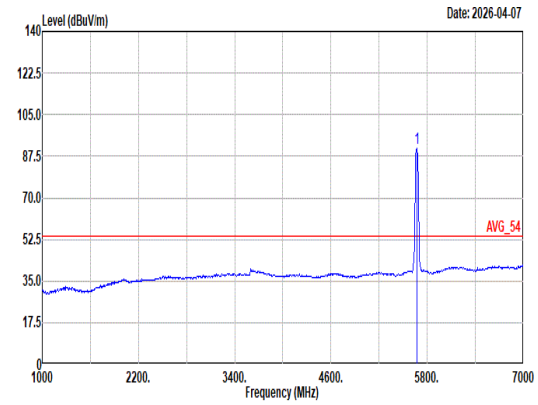 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5670.00 90.78 ------ ------ 77.57 35.04 13.24 35.07 0.00 217 0 Average

Mode	54	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH134_5670MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	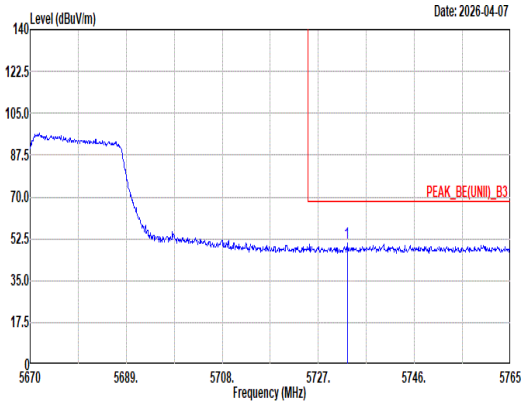 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5732.70 50.55 68.20 -17.65 37.22 35.10 13.30 35.07 0.00 217 0 Peak	Blank

Mode	54	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH134_5670MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	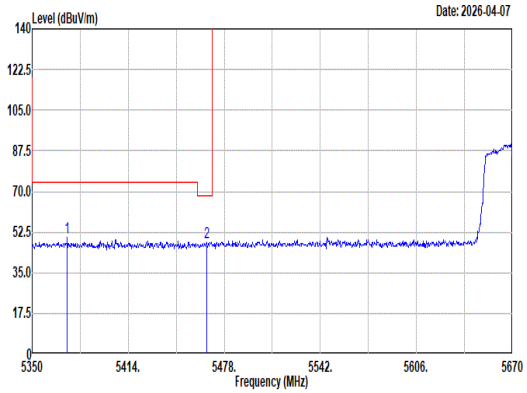 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Level Read Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5373.36 50.05 74.00 -23.95 37.20 35.01 12.95 35.11 0.00 359 257 Peak 2 5466.48 48.32 68.20 -19.88 35.39 34.97 13.05 35.09 0.00 359 257 Peak	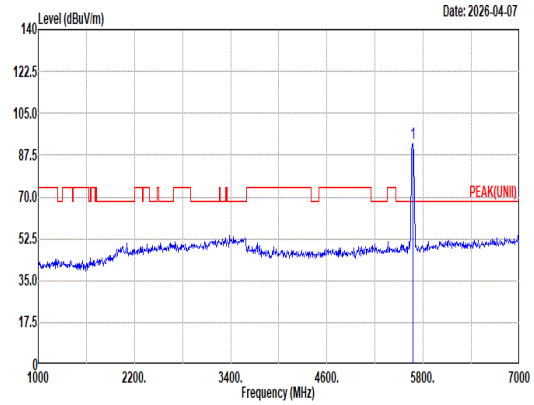 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Level Read Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 92.36 ------ ------ 79.15 35.04 13.24 35.07 0.00 359 257 Peak
Avg	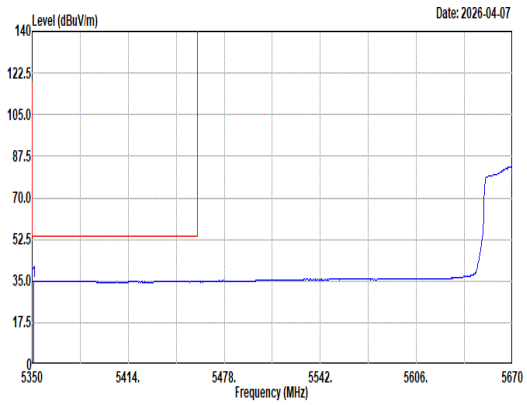 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Level Read Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.28 35.01 54.00 -18.99 22.11 35.09 12.93 35.12 0.00 359 257 Average	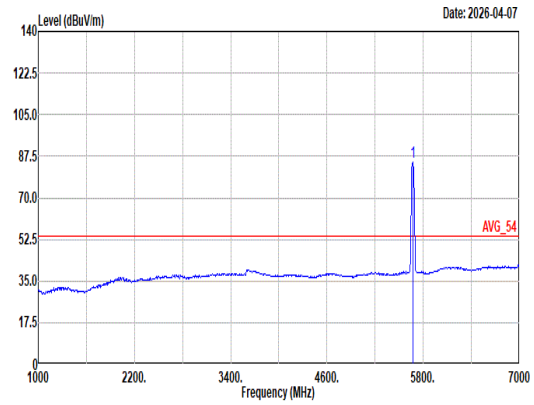 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Level Read Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 84.95 ------ ------ 71.74 35.04 13.24 35.07 0.00 359 257 Average

Mode	54	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH134_5670MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	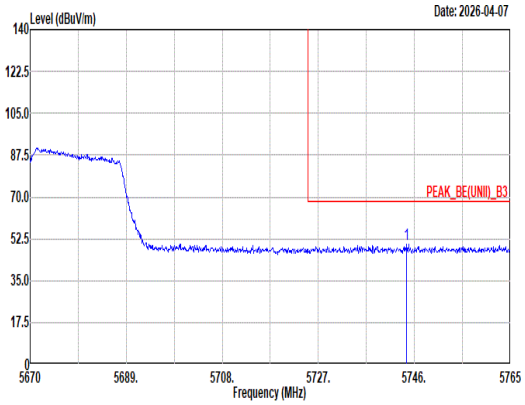 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5744.48 50.28 68.20 -17.92 36.94 35.10 13.31 35.07 0.00 359 257 Peak	Blank

Mode	54	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH134_5670MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	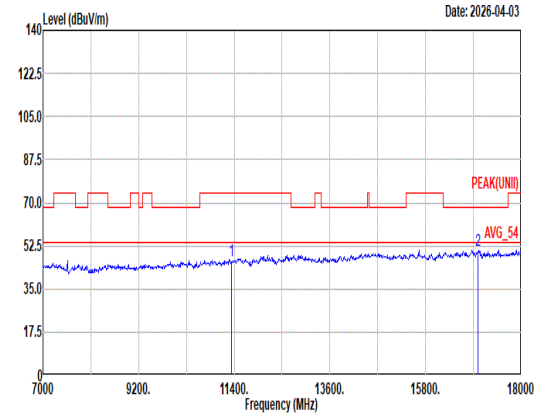 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11340.00 46.32 74.00 -27.68 45.67 38.38 18.58 57.61 1.30 -- -- Peak 2 17010.00 50.47 68.20 -17.73 40.26 42.12 22.47 55.77 1.39 -- -- Peak	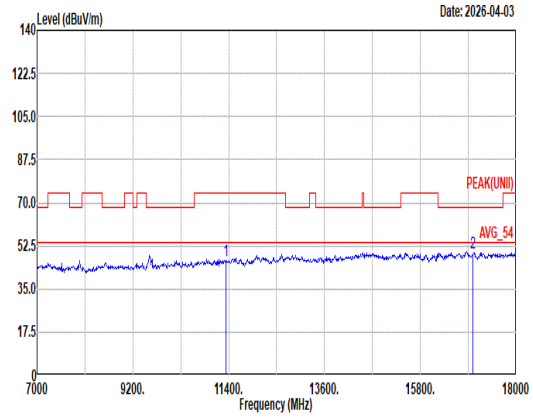 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11340.00 46.37 74.00 -27.63 45.72 38.38 18.58 57.61 1.30 -- -- Peak 2 17010.00 49.90 68.20 -18.30 39.69 42.12 22.47 55.77 1.39 -- -- Peak

Mode	54	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT40_CH134_5670MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	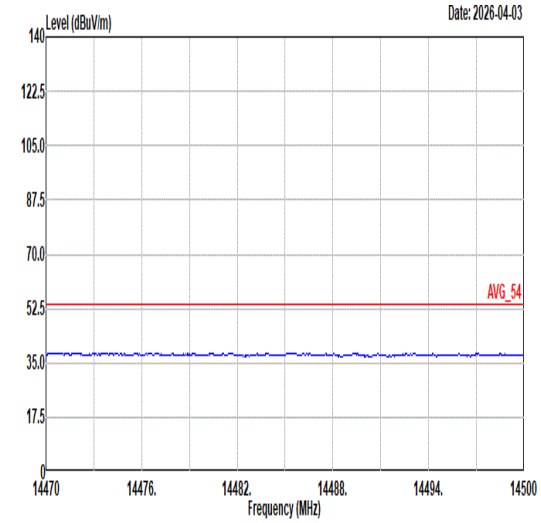 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	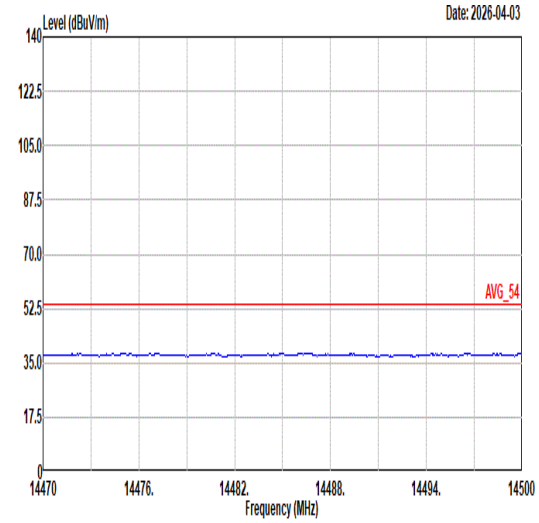 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	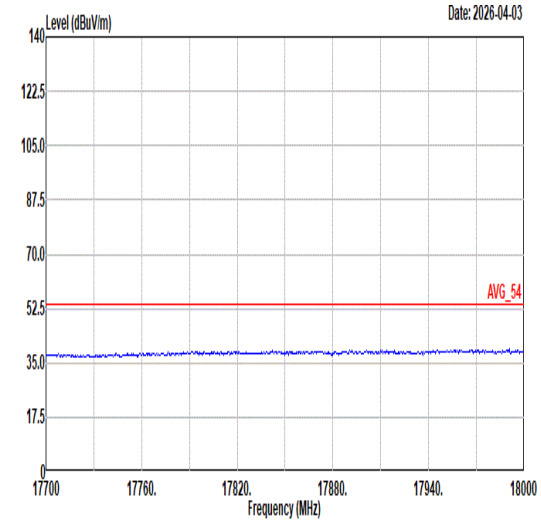 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	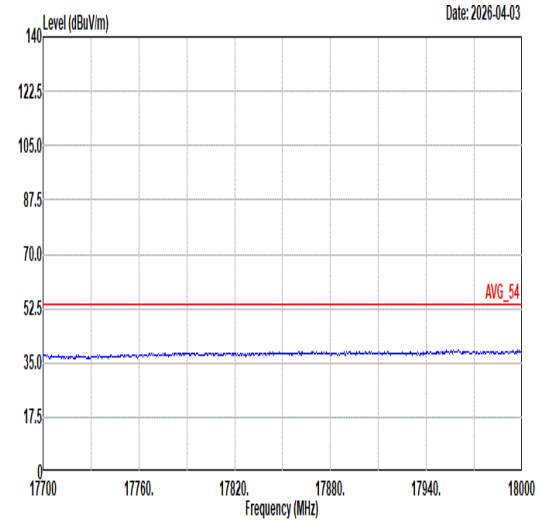 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	55	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	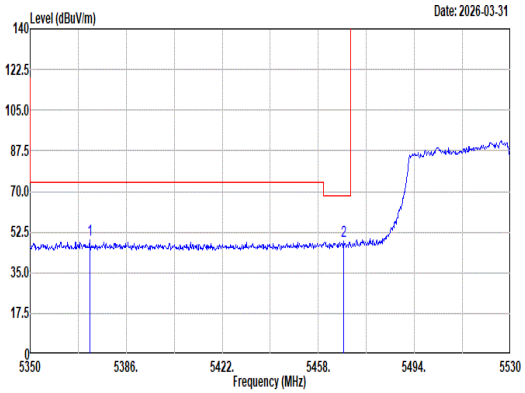 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5372.32 49.16 74.00 -24.84 36.31 35.01 12.95 35.11 0.00 149 352 Peak 2 5467.36 48.44 68.20 -19.76 35.51 34.97 13.05 35.09 0.00 149 352 Peak	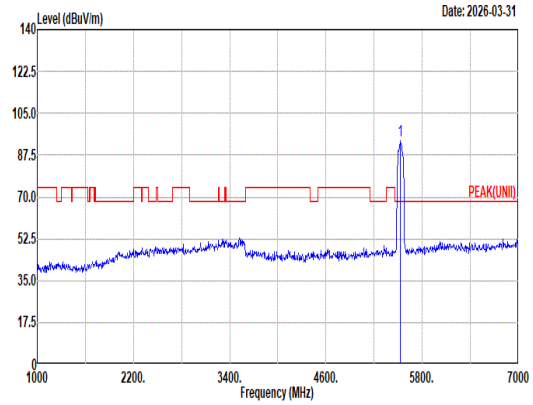 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 93.73 ------ ------ 80.61 35.10 13.10 35.08 0.00 149 352 Peak
Avg	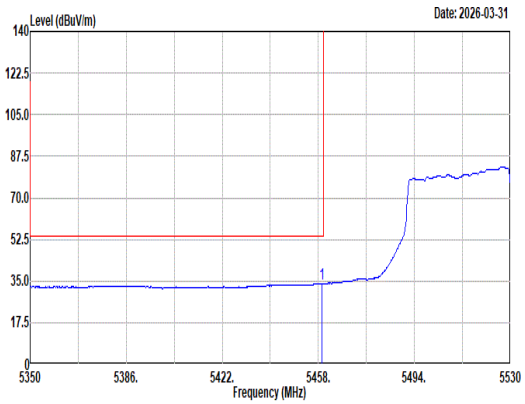 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.44 33.88 54.00 -20.12 20.99 34.94 13.04 35.09 0.00 149 352 Average	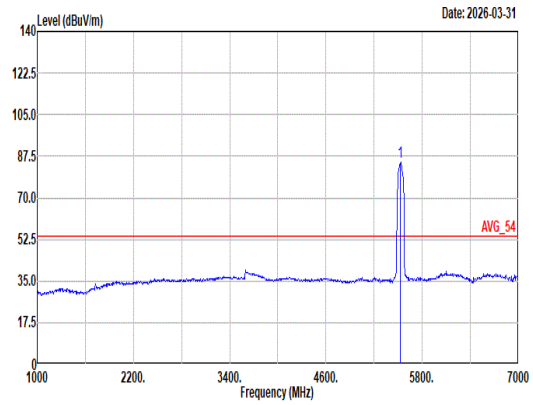 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 85.22 ------ ------ 72.08 35.10 13.12 35.08 0.00 149 352 Average

Mode	55	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	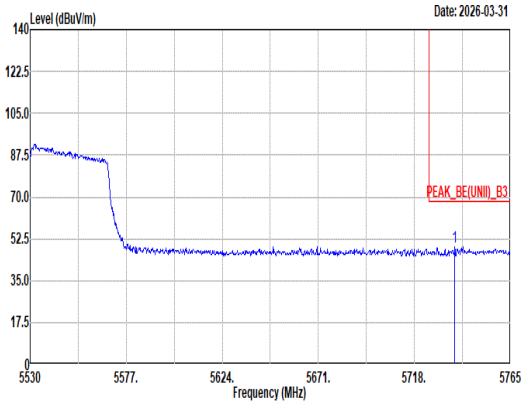 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5737.74 49.07 68.20 -19.13 35.74 35.10 13.30 35.07 0.00 149 352 Peak	Blank

Mode	55
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz
ANT	6+7

Pol.	Vertical	Fundamental
Peak	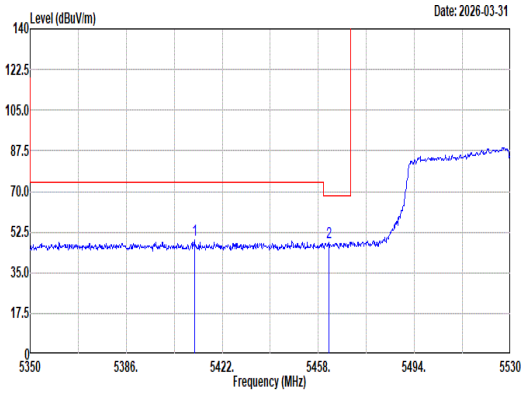 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5411.56 49.01 74.00 -24.99 36.22 34.90 12.99 35.10 0.00 295 255 Peak 2 5461.96 48.12 68.20 -20.08 35.22 34.95 13.04 35.09 0.00 295 255 Peak	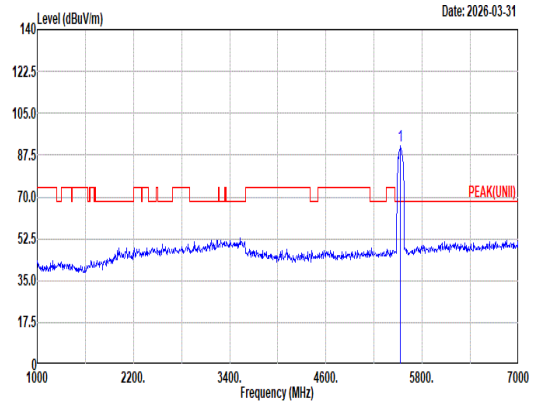 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5530.00 91.66 ------ ------ 78.53 35.10 13.11 35.08 0.00 295 255 Peak
Avg	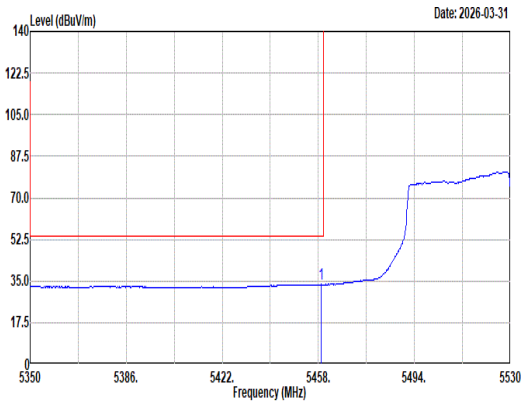 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5459.08 33.55 54.00 -20.45 20.66 34.94 13.04 35.09 0.00 295 255 Average	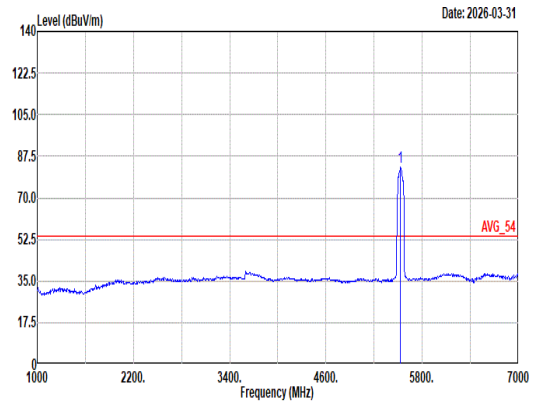 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5530.00 82.70 ------ ------ 69.57 35.10 13.11 35.08 0.00 295 255 Average

Mode	55	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	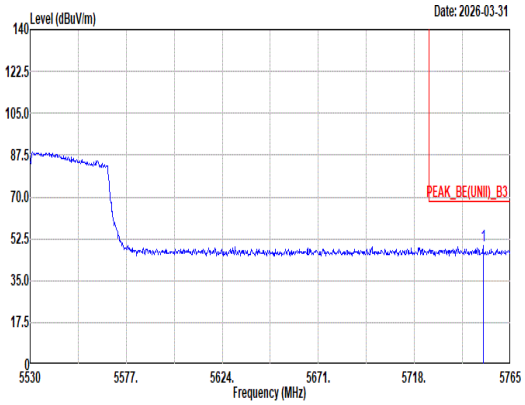 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5751.61 49.41 68.20 -18.79 36.05 35.10 13.32 35.06 0.00 295 255 Peak	Blank

Mode	55	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	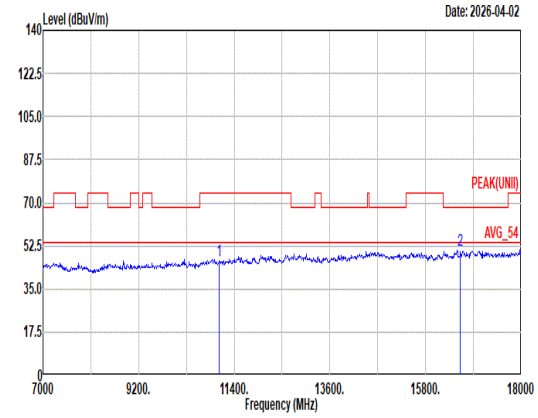 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11060.00 46.37 74.00 -27.63 46.83 38.22 18.31 58.24 1.25 -- -- Peak 2 16590.00 50.55 68.20 -17.65 40.87 42.02 22.30 55.96 1.32 -- -- Peak	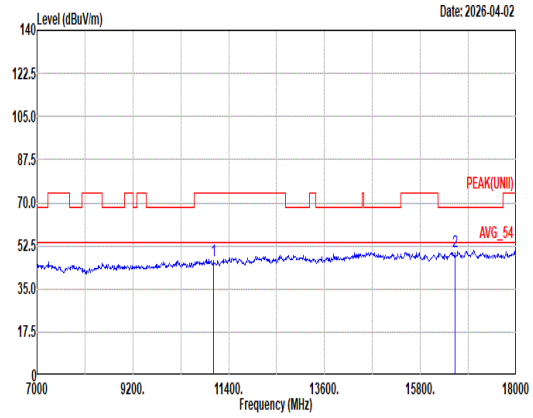 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11060.00 46.67 74.00 -27.33 47.13 38.22 18.31 58.24 1.25 -- -- Peak 2 16590.00 50.07 68.20 -18.13 40.39 42.02 22.30 55.96 1.32 -- -- Peak

Mode	55	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	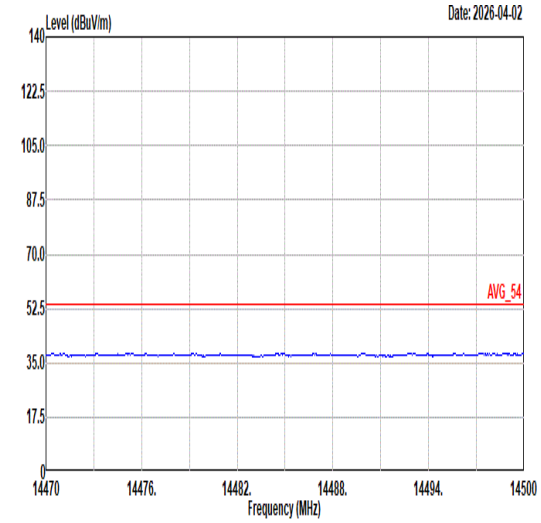 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	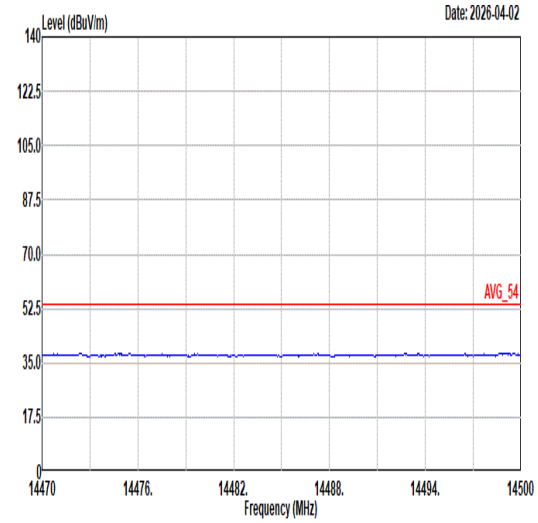 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	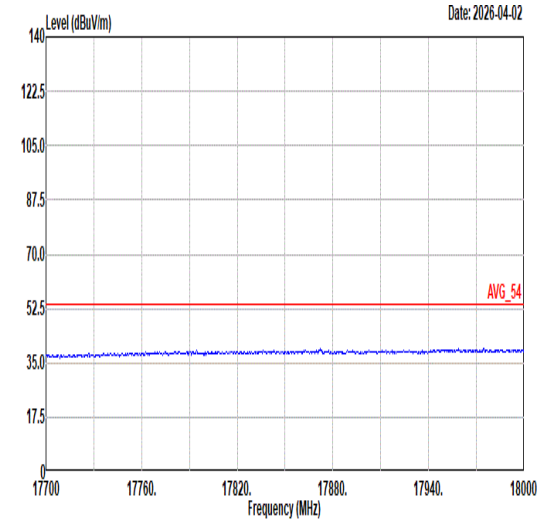 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	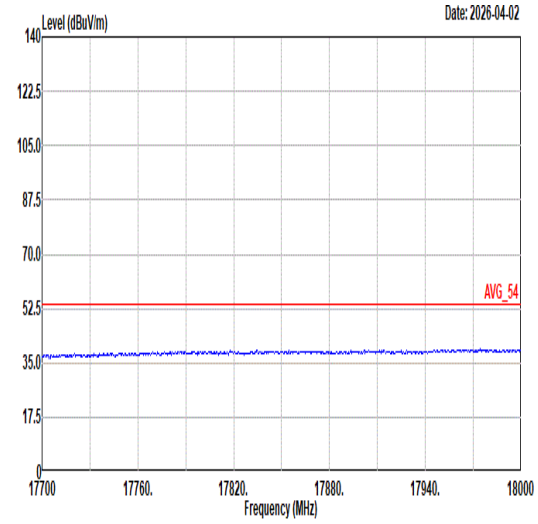 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	56	
	LF	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Partial RU 484/65_5210MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
QP/ Peak	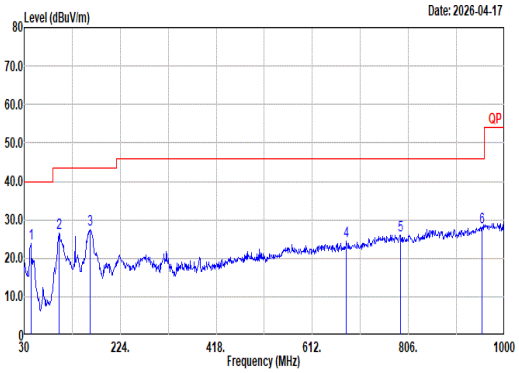 Site : 03CH07-HY Condition: QP 3m Bilog_35419 HORIZONTAL 1 43.58 23.87 40.00 -16.13 35.04 17.71 1.15 30.03 0.00 -- -- Peak 2 100.81 26.61 43.50 -16.89 38.58 16.19 1.77 29.93 0.00 -- -- Peak 3 163.86 27.37 43.50 -16.13 38.88 16.08 2.24 29.83 0.00 -- -- Peak 4 680.87 24.31 46.00 -21.69 22.92 26.51 4.56 29.68 0.00 -- -- Peak 5 790.48 26.07 46.00 -19.93 22.40 28.14 5.00 29.47 0.00 -- -- Peak 6 954.41 28.18 46.00 -17.82 20.69 30.77 5.45 28.73 0.00 -- -- Peak	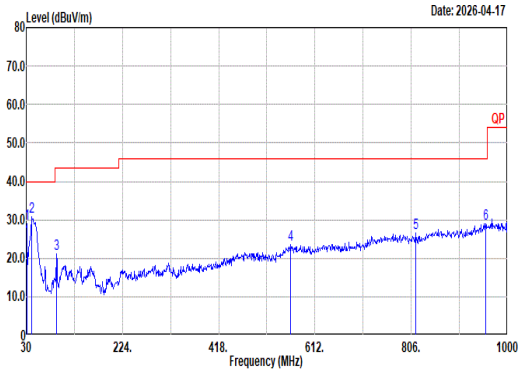 Site : 03CH07-HY Condition: QP 3m Bilog_35419 VERTICAL 1 30.97 29.04 40.00 -10.96 34.42 23.64 0.97 29.99 0.00 -- -- Peak 2 41.64 30.70 40.00 -9.30 40.90 18.70 1.12 30.02 0.00 -- -- Peak 3 91.11 21.10 43.50 -22.40 34.41 14.94 1.69 29.94 0.00 -- -- Peak 4 563.50 23.64 46.00 -22.36 23.05 26.20 4.17 29.78 0.00 -- -- Peak 5 815.70 26.69 46.00 -19.31 23.14 27.84 5.07 29.36 0.00 -- -- Peak 6 956.35 29.11 46.00 -16.89 21.57 30.80 5.46 28.72 0.00 -- -- Peak

Mode	57	
	SHF	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Partial RU 484/65_5210MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak	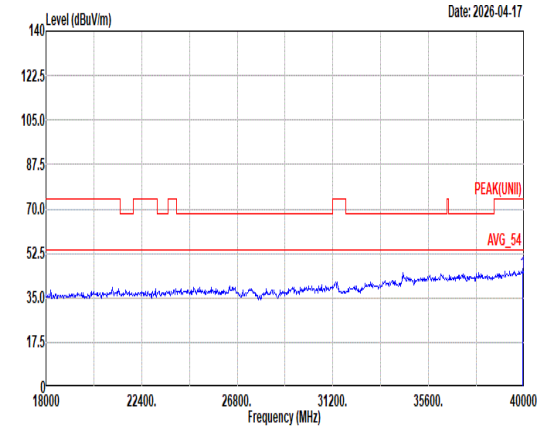 Site : 03CH07-HY Condition: PEAK(UNII) 1m SHF-EHF_9170251 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 39937.83 44.85 74.00 -29.15 44.02 43.93 24.76 58.32 -9.54 -- -- PEAK	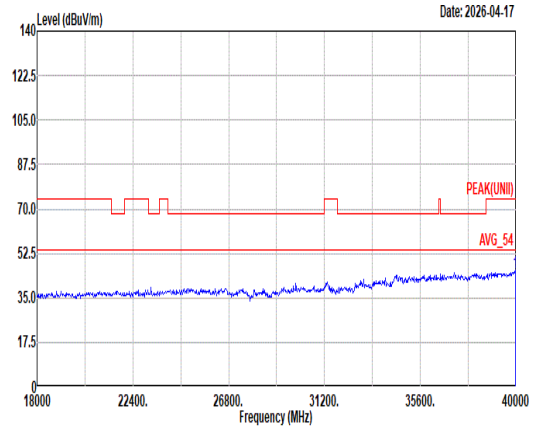 Site : 03CH07-HY Condition: PEAK(UNII) 1m SHF-EHF_9170251 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 39954.37 44.96 74.00 -29.04 44.05 43.97 24.77 58.29 -9.54 -- -- PEAK

Mode	75	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	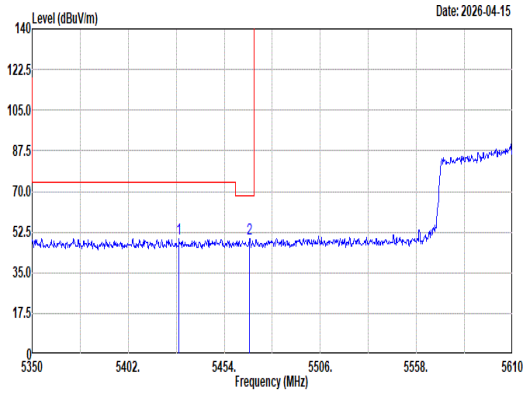 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5429.56 49.74 74.00 -24.26 36.93 34.90 13.01 35.10 0.00 300 16 Peak 2 5467.78 49.50 68.20 -18.70 36.57 34.97 13.05 35.09 0.00 300 16 Peak	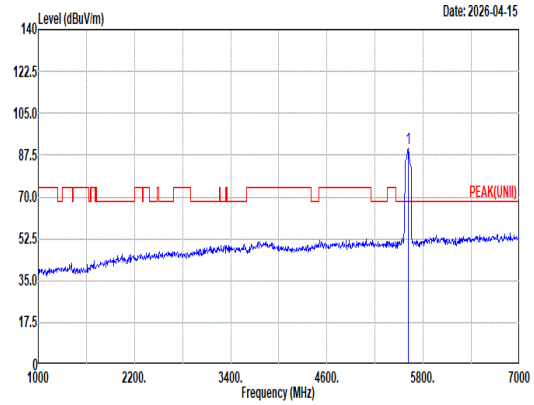 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 90.17 ------ ------ 77.12 34.93 13.19 35.07 0.00 300 16 Peak
Avg	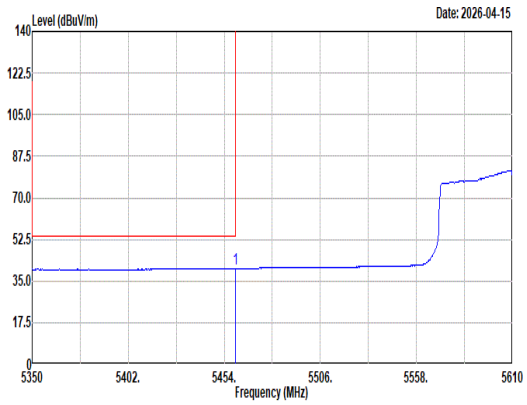 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.98 40.23 54.00 -13.77 27.34 34.94 13.04 35.09 0.00 300 16 Average	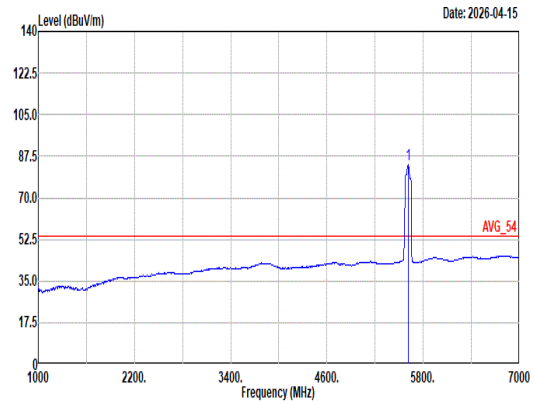 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 83.78 ------ ------ 70.73 34.93 13.19 35.07 0.00 300 16 Average

Mode	75	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	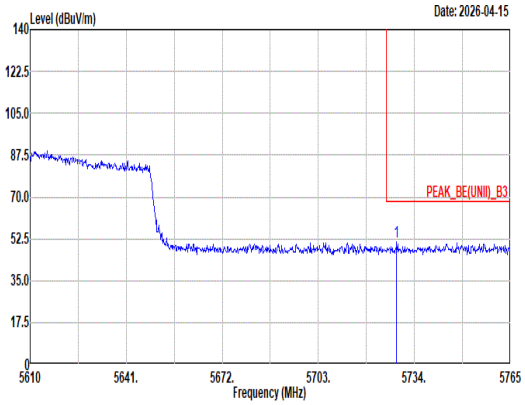 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5728.27 51.01 68.20 -17.19 37.68 35.10 13.30 35.07 0.00 300 16 Peak	Blank

Mode	75	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	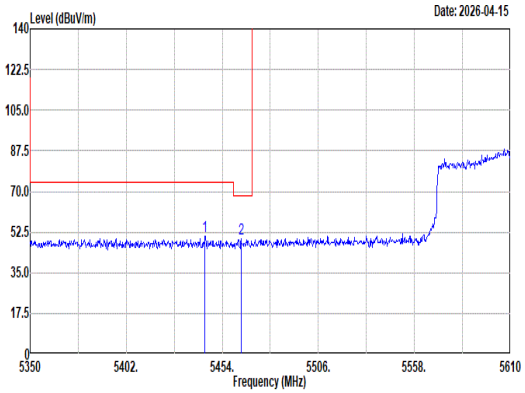 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5444.64 50.85 74.00 -23.15 38.02 34.90 13.02 35.09 0.00 180 268 Peak 2 5464.14 49.42 68.20 -18.78 36.51 34.96 13.04 35.09 0.00 180 268 Peak	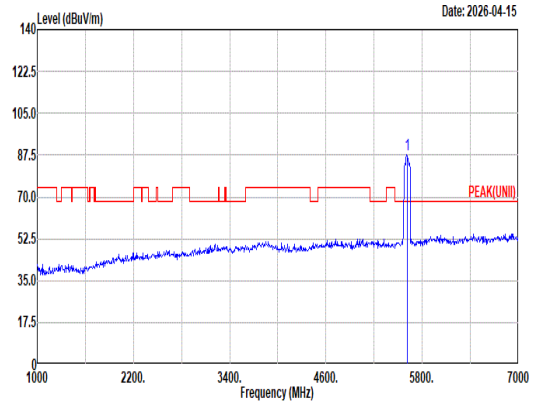 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 87.79 ------ ------ 74.75 34.92 13.19 35.07 0.00 180 268 Peak
Avg	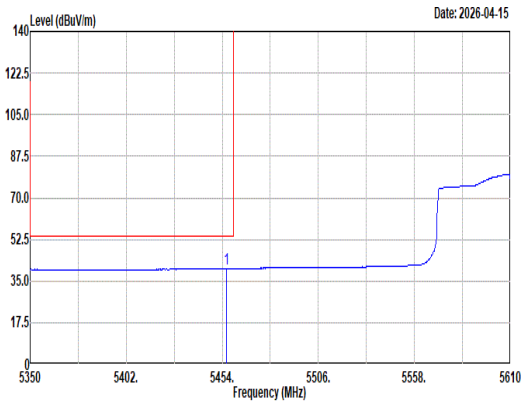 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5456.34 40.19 54.00 -13.81 27.31 34.93 13.04 35.09 0.00 180 268 Average	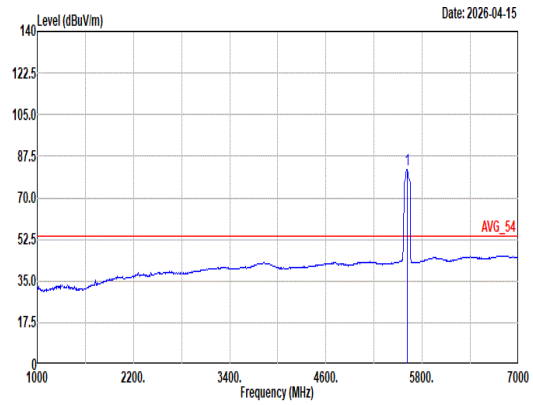 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 81.96 ------ ------ 68.92 34.92 13.19 35.07 0.00 180 268 Average

Mode	75	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	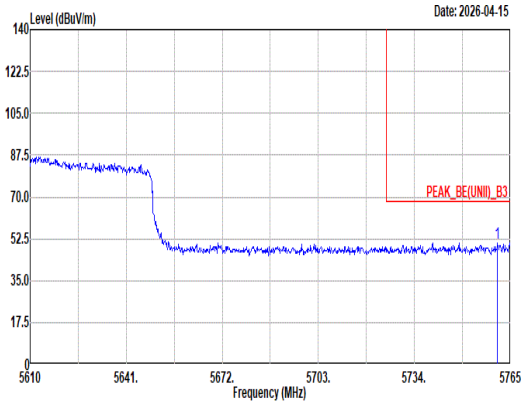 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5760.82 50.83 68.20 -17.37 37.45 35.12 13.32 35.06 0.00 180 268 Peak	Blank

Mode	75	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	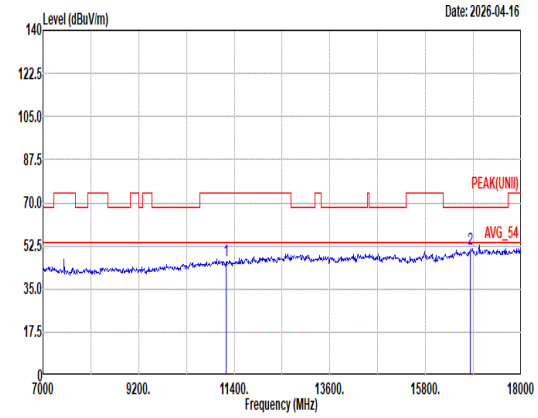 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11220.00 46.32 74.00 -27.68 46.25 38.20 18.47 57.88 1.28 -- -- Peak 2 16830.00 51.41 68.20 -16.79 40.97 42.52 22.40 55.84 1.36 -- -- Peak	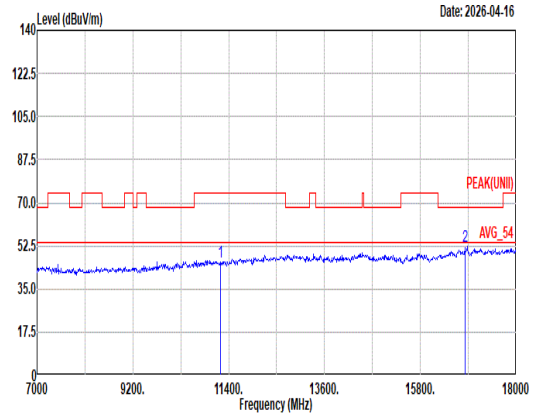 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11220.00 46.07 74.00 -27.93 46.00 38.20 18.47 57.88 1.28 -- -- Peak 2 16830.00 52.08 68.20 -16.12 41.64 42.52 22.40 55.84 1.36 -- -- Peak

Mode	75	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	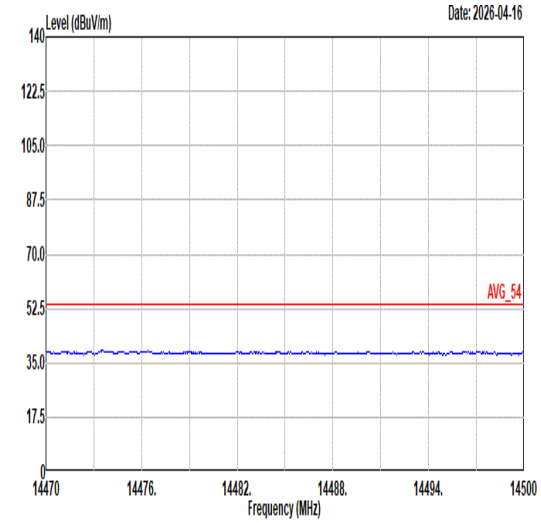 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	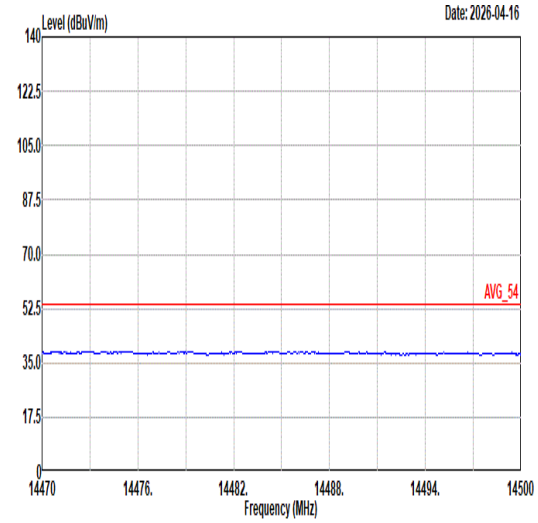 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	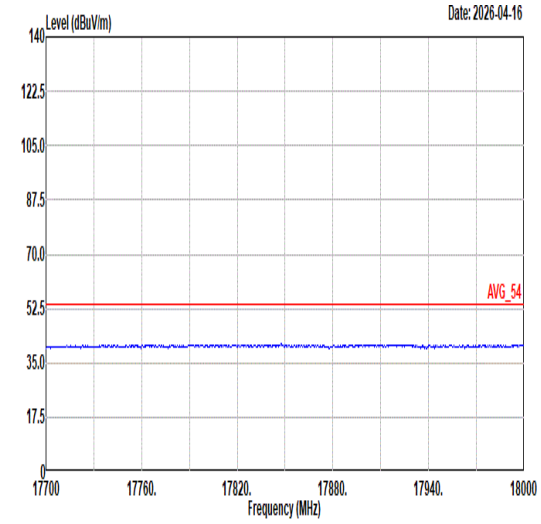 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	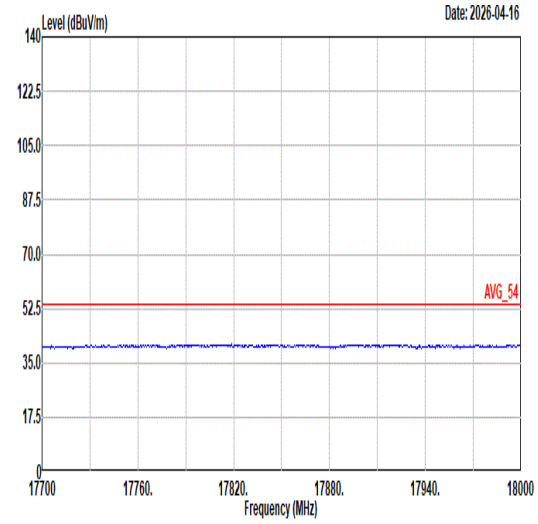 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	76	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	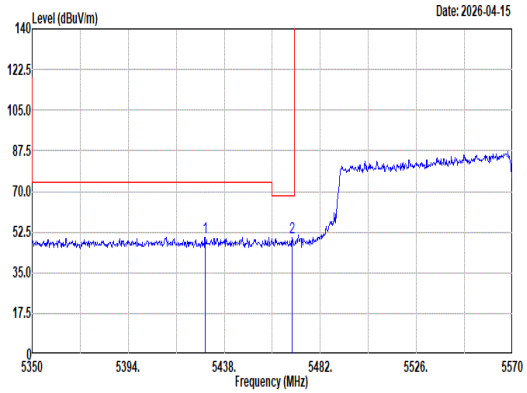 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5429.20 50.37 74.00 -23.63 37.56 34.90 13.01 35.10 0.00 301 360 Peak 2 5469.24 50.35 68.20 -17.85 37.41 34.98 13.05 35.09 0.00 301 360 Peak	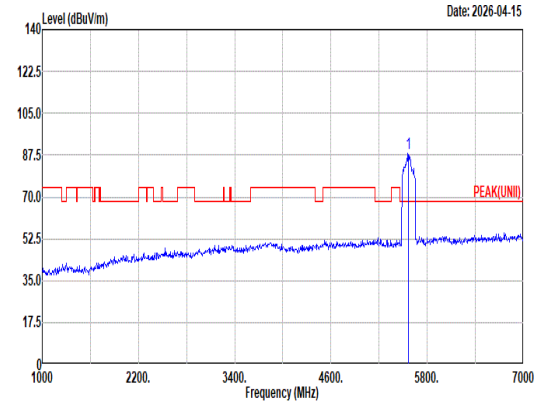 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5570.00 87.99 ------ ------ 74.87 35.06 13.14 35.08 0.00 301 360 Peak
Avg	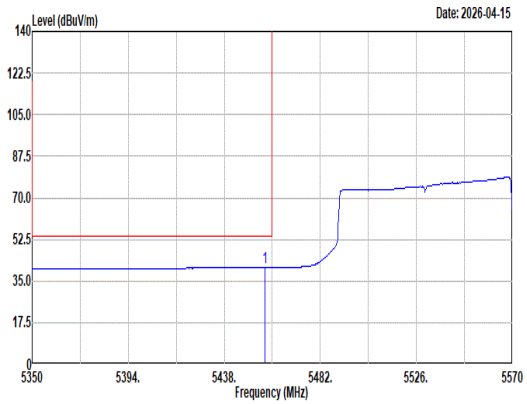 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5456.48 40.71 54.00 -13.29 27.83 34.93 13.04 35.09 0.00 301 360 Average	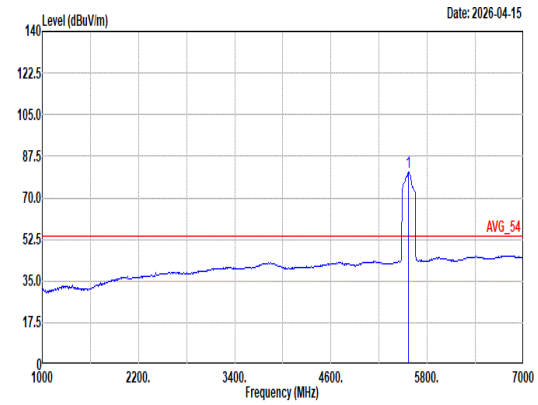 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5570.00 81.06 ------ ------ 67.95 35.04 13.15 35.08 0.00 301 360 Average

Mode	76	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	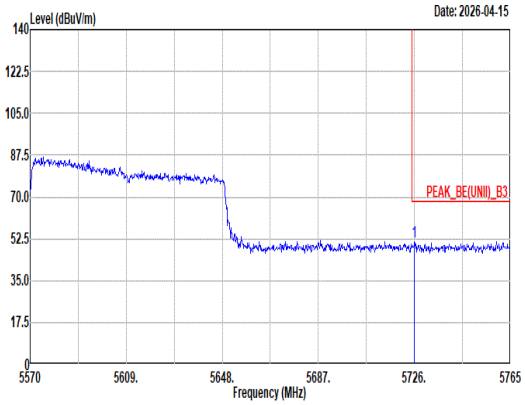 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.00 51.38 68.20 -16.82 38.06 35.10 13.29 35.07 0.00 301 360 Peak	Blank

Mode	76	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	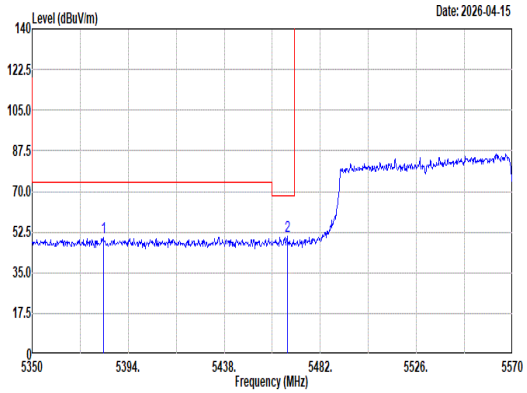 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5382.56 50.45 74.00 -23.55 37.63 34.97 12.96 35.11 0.00 300 255 Peak 2 5466.82 50.83 68.20 -17.37 37.90 34.97 13.05 35.09 0.00 300 255 Peak	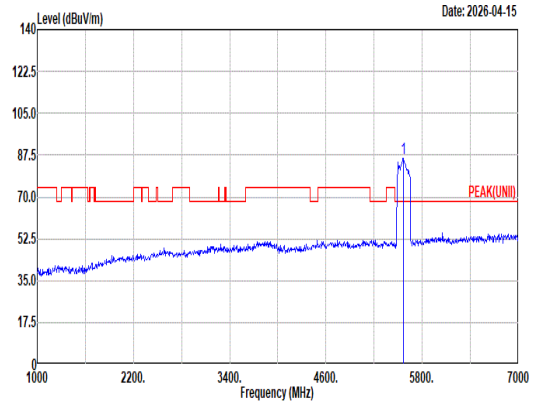 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 86.22 ------ ------ 73.11 35.04 13.15 35.08 0.00 300 255 Peak
Avg	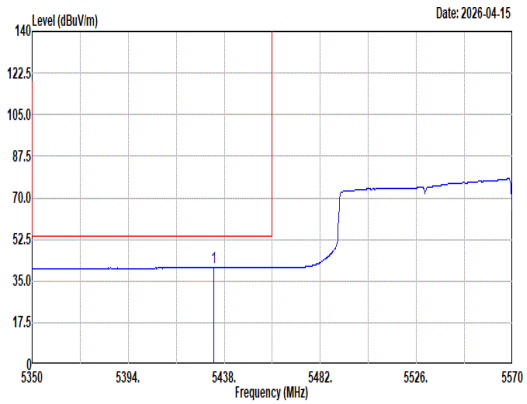 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5433.16 40.62 54.00 -13.38 27.81 34.90 13.01 35.10 0.00 300 255 Average	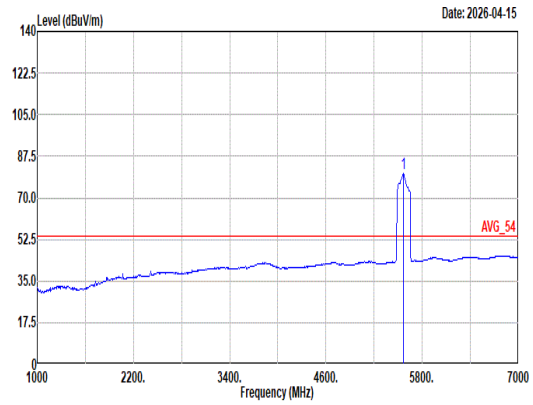 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 80.07 ------ ------ 66.96 35.04 13.15 35.08 0.00 300 255 Average

Mode	76	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	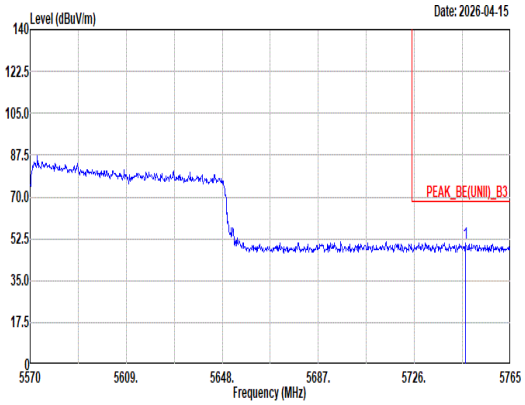 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5746.87 50.88 68.20 -17.32 37.54 35.10 13.31 35.07 0.00 300 255 Peak	Blank

Mode	76	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	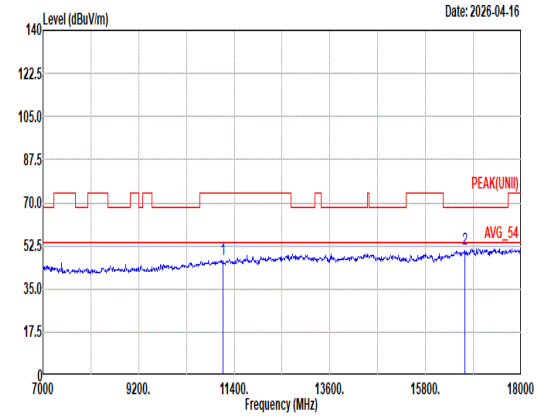 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11140.00 47.03 74.00 -26.97 47.21 38.22 18.39 58.06 1.27 -- -- Peak 2 16710.00 51.17 68.20 -17.03 41.08 42.30 22.35 55.90 1.34 -- -- Peak	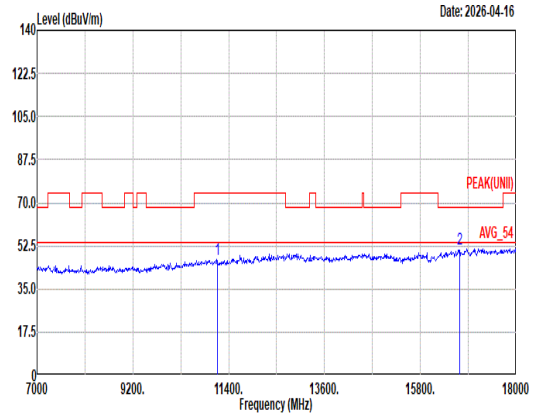 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11140.00 46.79 74.00 -27.21 46.97 38.22 18.39 58.06 1.27 -- -- Peak 2 16710.00 51.28 68.20 -16.92 41.19 42.30 22.35 55.90 1.34 -- -- Peak

Mode	76	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	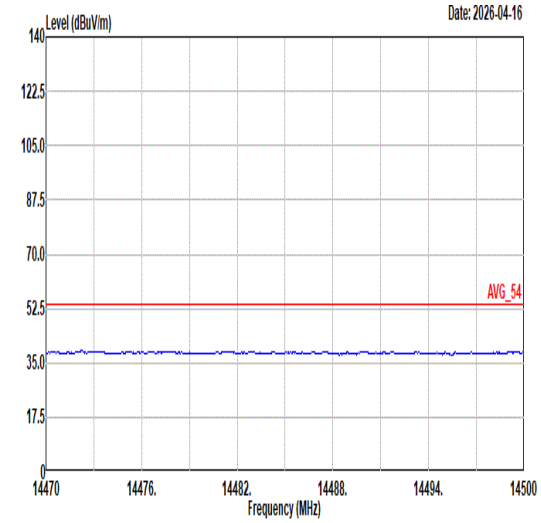 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	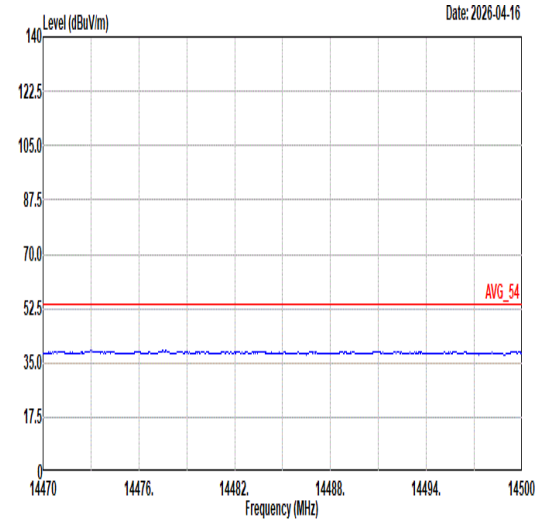 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	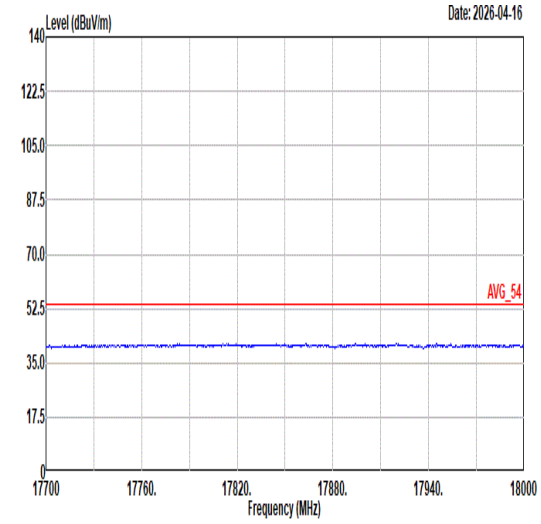 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	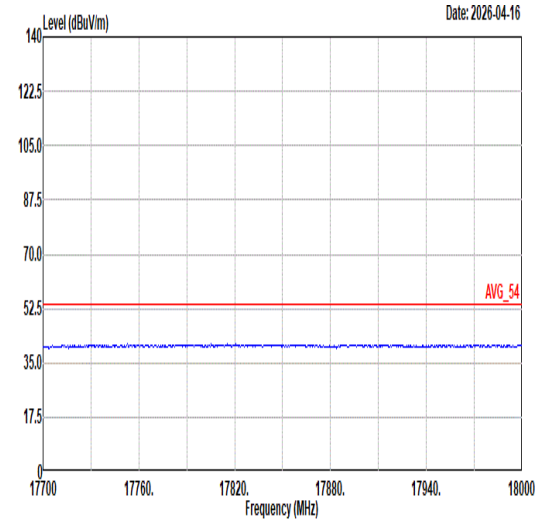 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	77	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	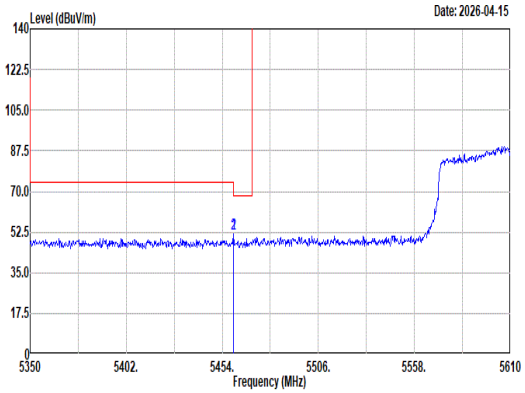 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.98 51.67 74.00 -22.33 38.78 34.94 13.04 35.09 0.00 270 2 Peak 2 5460.24 51.72 68.20 -16.48 38.83 34.94 13.04 35.09 0.00 270 2 Peak	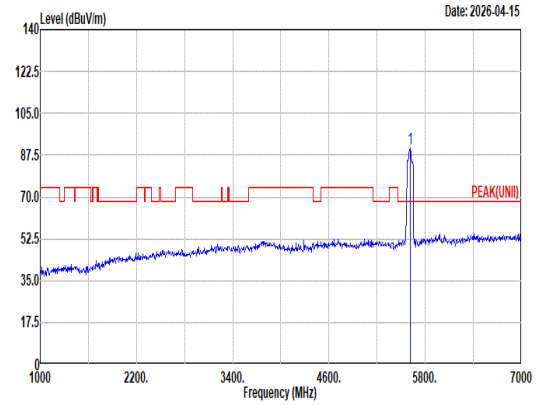 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 90.17 ------ ------ 77.12 34.93 13.19 35.07 0.00 270 2 Peak
Avg	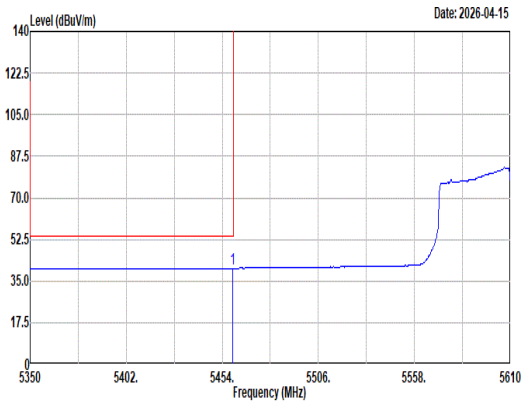 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.72 40.38 54.00 -13.62 27.49 34.94 13.04 35.09 0.00 270 2 Average	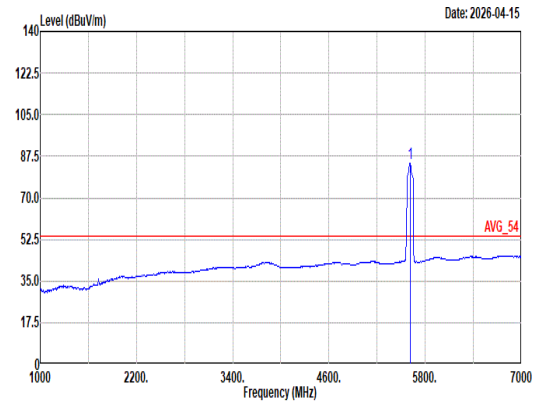 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 84.51 ------ ------ 71.47 34.92 13.19 35.07 0.00 270 2 Average

Mode	77	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	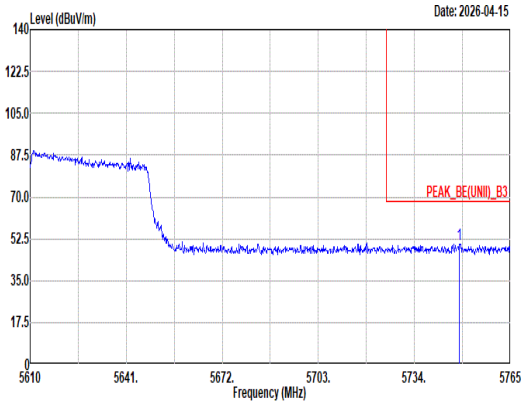 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5748.42 50.36 68.20 -17.84 37.02 35.10 13.31 35.07 0.00 270 2 Peak	Blank

Mode	77	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	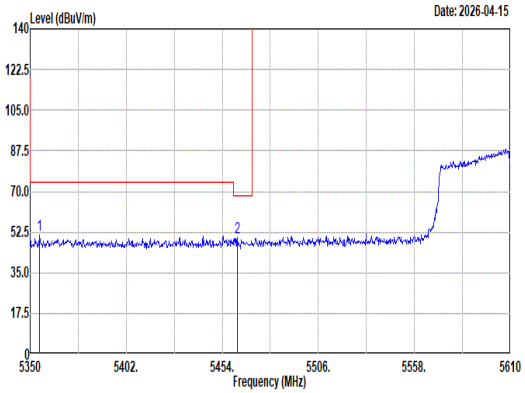 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5355.20 51.11 74.00 -22.89 38.21 35.08 12.94 35.12 0.00 326 269 Peak 2 5462.06 50.31 68.20 -17.89 37.41 34.95 13.04 35.09 0.00 326 269 Peak	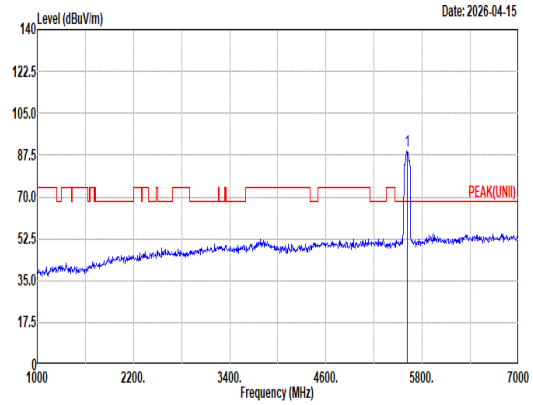 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 89.38 ------ ------ 76.37 34.90 13.18 35.07 0.00 326 269 Peak
Avg	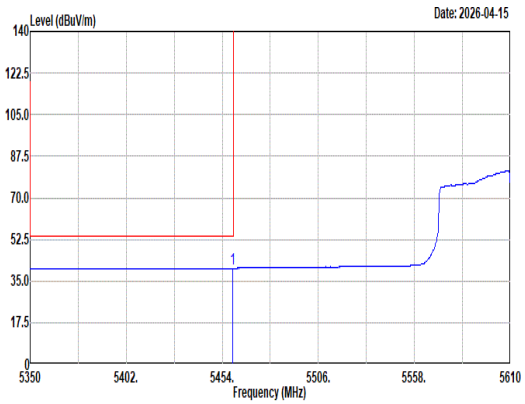 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.46 40.39 54.00 -13.61 27.50 34.94 13.04 35.09 0.00 326 269 Average	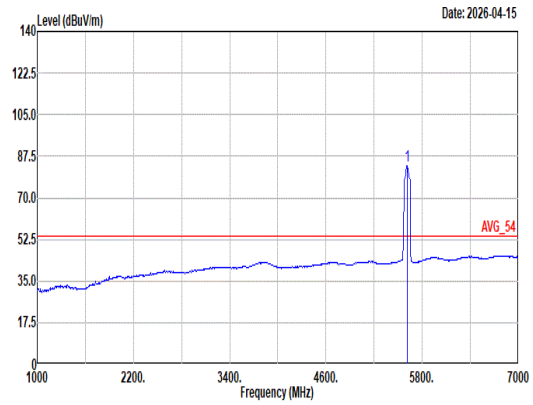 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 83.52 ------ ------ 70.47 34.93 13.19 35.07 0.00 326 269 Average

Mode	77	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	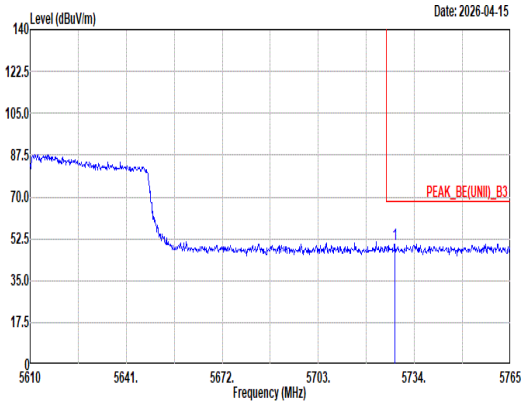 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5727.65 50.38 68.20 -17.82 37.06 35.10 13.29 35.07 0.00 326 269 Peak	Blank

Mode	77	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	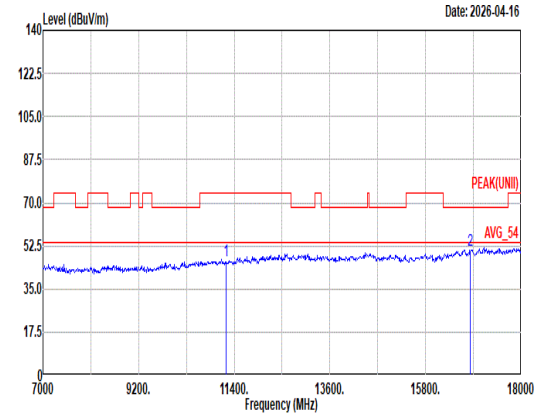 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11220.00 46.58 74.00 -27.42 46.51 38.20 18.47 57.88 1.28 -- -- Peak 2 16830.00 50.84 68.20 -17.36 40.40 42.52 22.40 55.84 1.36 -- -- Peak	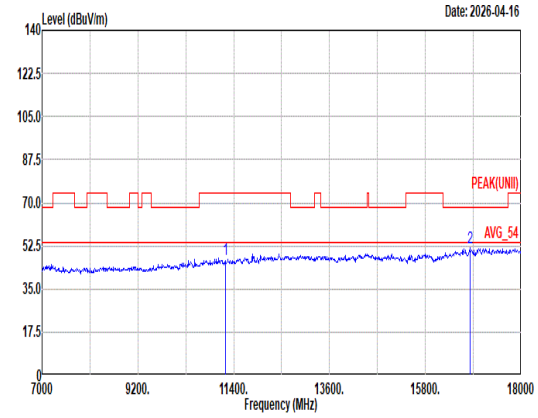 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11220.00 46.77 74.00 -27.23 46.70 38.20 18.47 57.88 1.28 -- -- Peak 2 16830.00 51.81 68.20 -16.39 41.37 42.52 22.40 55.84 1.36 -- -- Peak

Mode	77	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	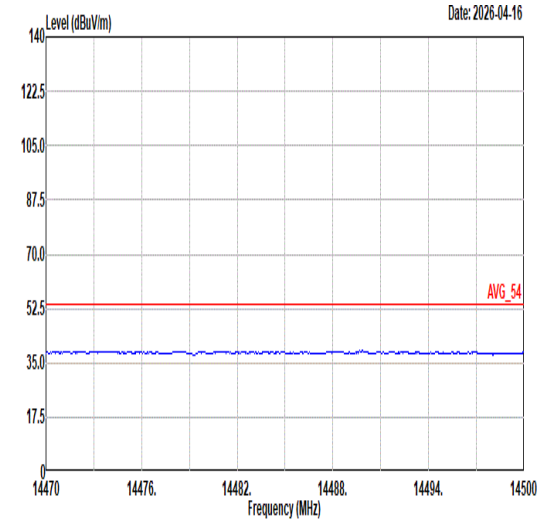 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	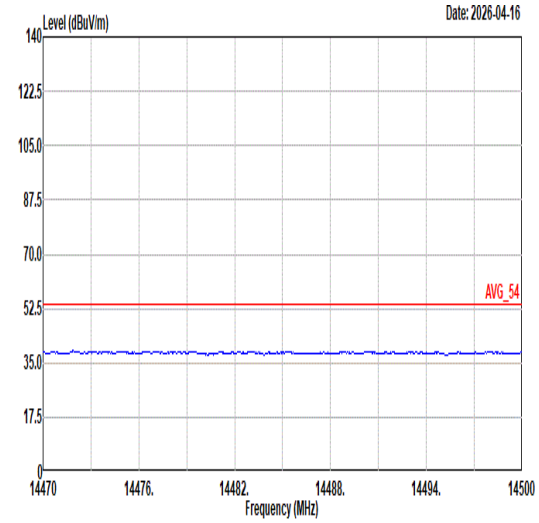 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	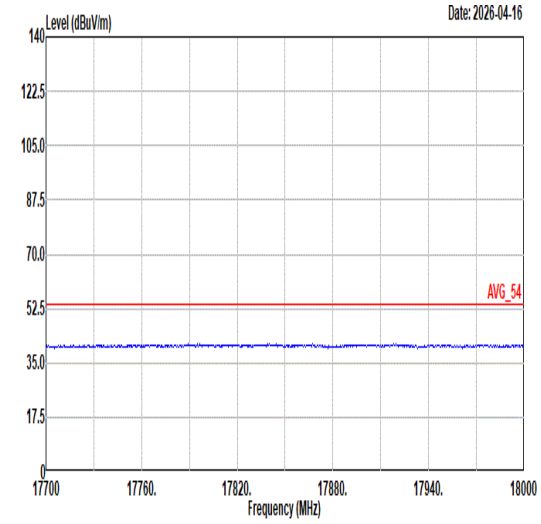 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	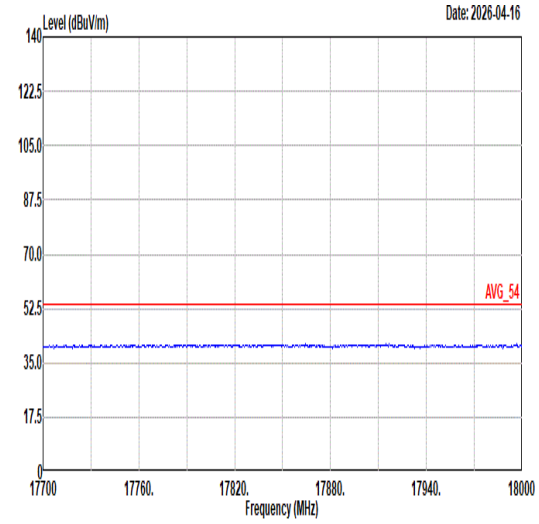 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	78	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	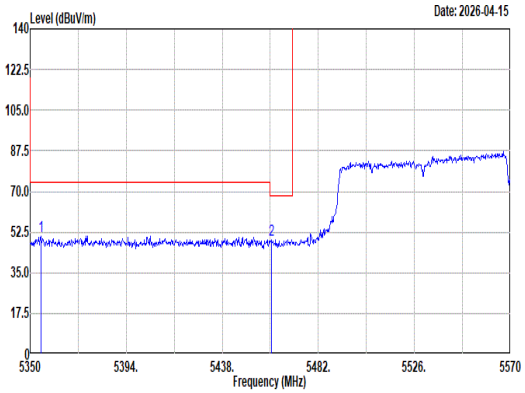 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5354.84 50.80 74.00 -23.20 37.90 35.08 12.94 35.12 0.00 261 0 Peak 2 5460.66 49.39 68.20 -18.81 36.50 34.94 13.04 35.09 0.00 261 0 Peak	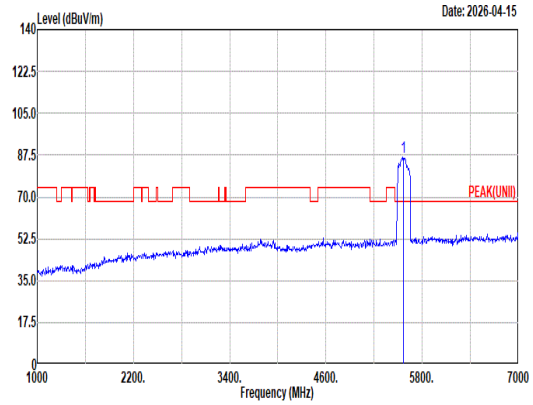 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5570.00 86.82 ------ ------ 73.70 35.06 13.14 35.08 0.00 261 0 Peak
Avg	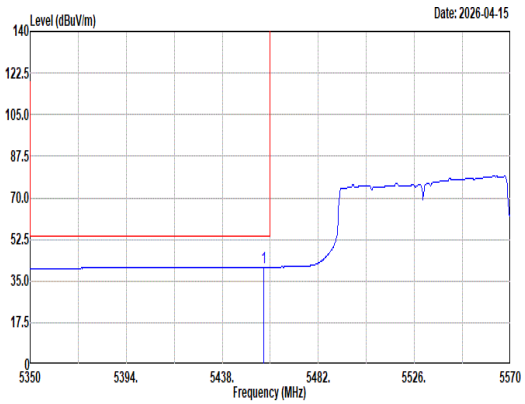 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5457.14 40.91 54.00 -13.09 28.03 34.93 13.04 35.09 0.00 261 0 Average	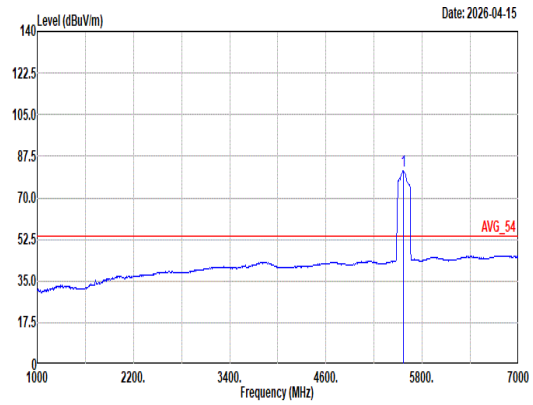 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5570.00 81.33 ------ ------ 68.22 35.04 13.15 35.08 0.00 261 0 Average

Mode	78	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	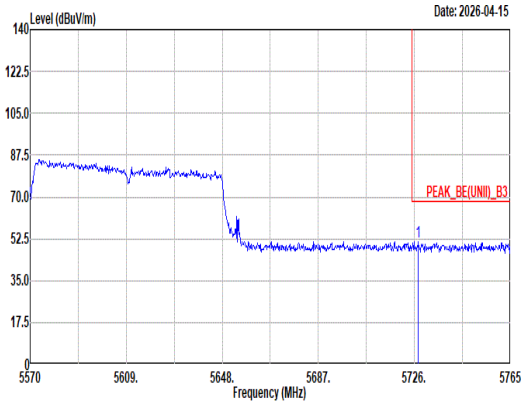 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Level Read Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5727.56 51.25 68.20 -16.95 37.93 35.10 13.29 35.07 0.00 261 0 Peak	Blank

Mode	78	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	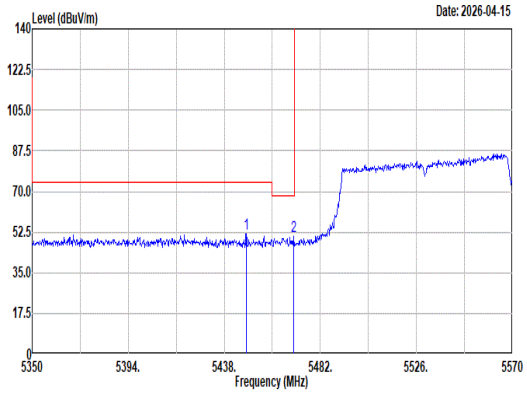 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5448.12 51.75 74.00 -22.25 38.91 34.90 13.03 35.09 0.00 303 272 Peak 2 5469.90 50.71 68.20 -17.49 37.77 34.98 13.05 35.09 0.00 303 272 Peak	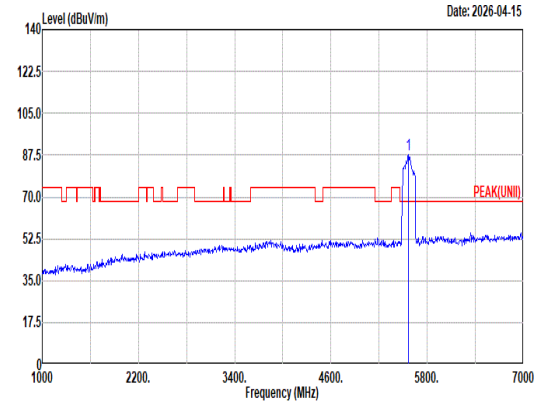 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 87.51 ------ ------ 74.40 35.04 13.15 35.08 0.00 303 272 Peak
Avg	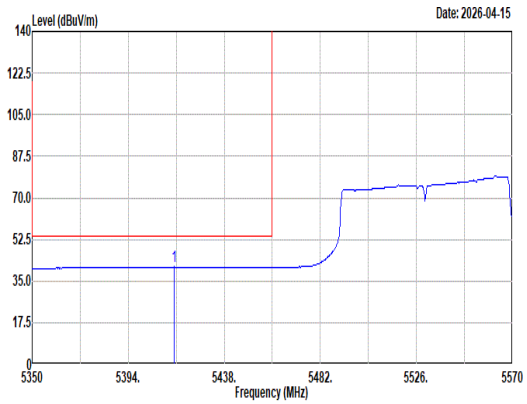 Site : 03CH07-HY Condition: AVG_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5414.90 40.97 54.00 -13.03 28.18 34.90 12.99 35.10 0.00 303 272 Average	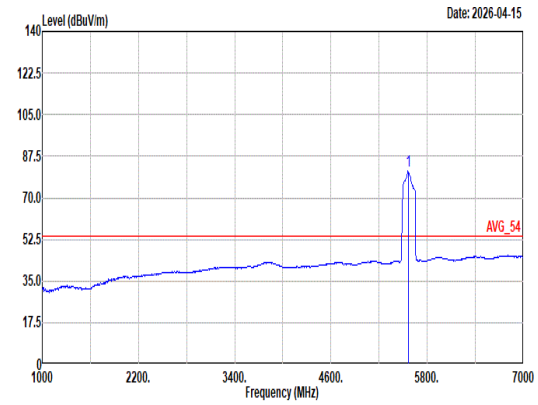 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5570.00 81.21 ------ ------ 68.09 35.06 13.14 35.08 0.00 303 272 Average

Mode	78	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	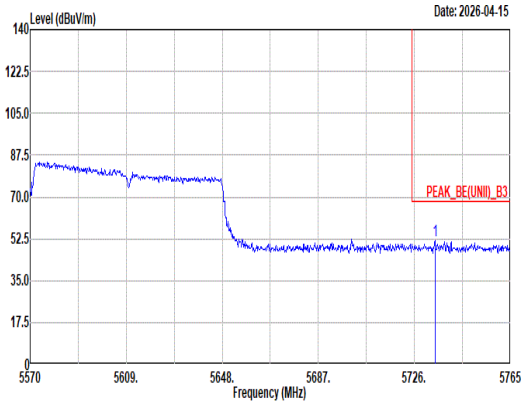 Site : 03CH07-HY Condition: PEAK_BE(UNII)_B3 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5734.39 51.60 68.20 -16.60 38.27 35.10 13.30 35.07 0.00 303 272 Peak	Blank

Mode	78	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	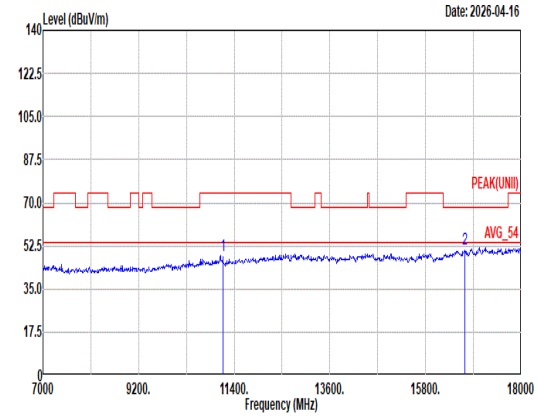 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11140.00 48.40 74.00 -25.60 48.58 38.22 18.39 58.06 1.27 -- -- Peak 2 16710.00 51.47 68.20 -16.73 41.38 42.30 22.35 55.90 1.34 -- -- Peak	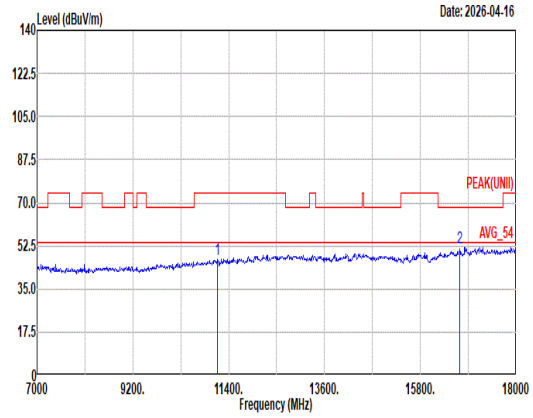 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11140.00 47.22 74.00 -26.78 47.40 38.22 18.39 58.06 1.27 -- -- Peak 2 16710.00 51.87 68.20 -16.33 41.78 42.30 22.35 55.90 1.34 -- -- Peak

Mode	78	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	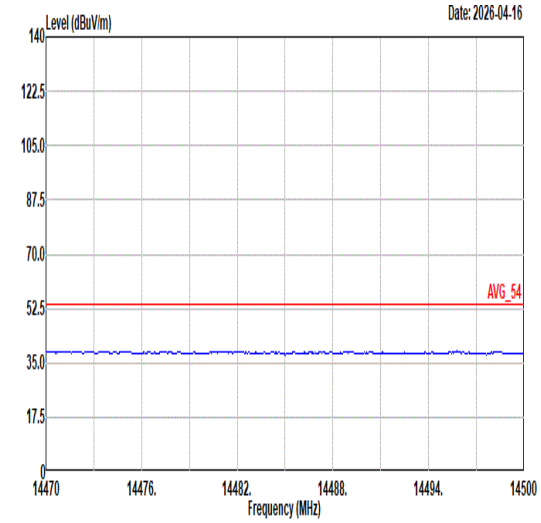 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	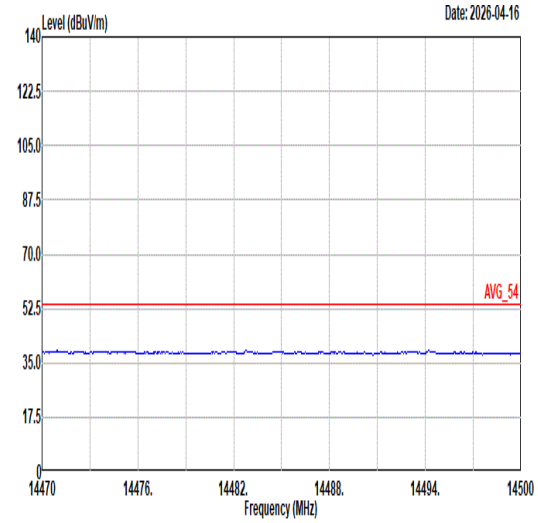 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	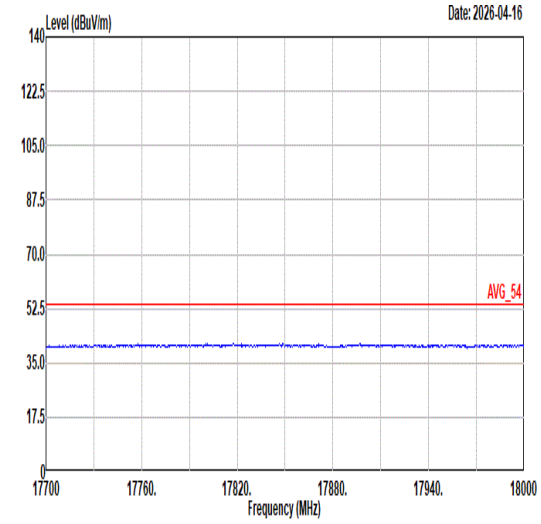 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	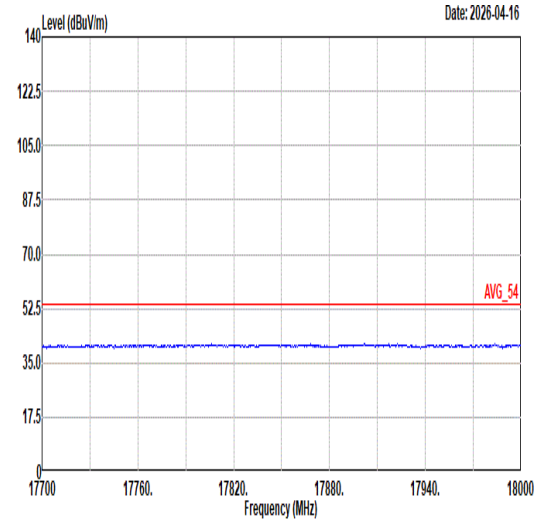 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

Mode	79	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial RU 26/0_5180MHz	
ANT	6+7	
Pol.	Horizontal	Fundamental
Peak	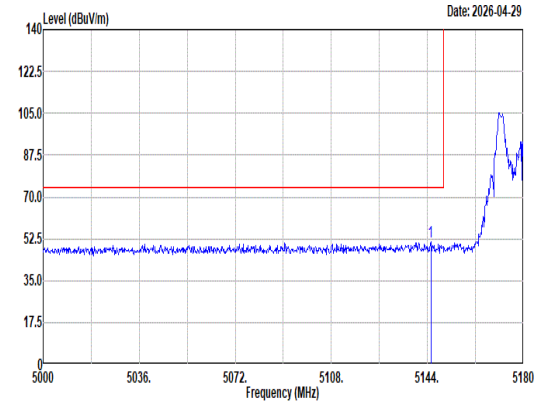 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.26 51.17 74.00 -22.83 38.96 34.66 12.72 35.17 0.00 100 238 Peak	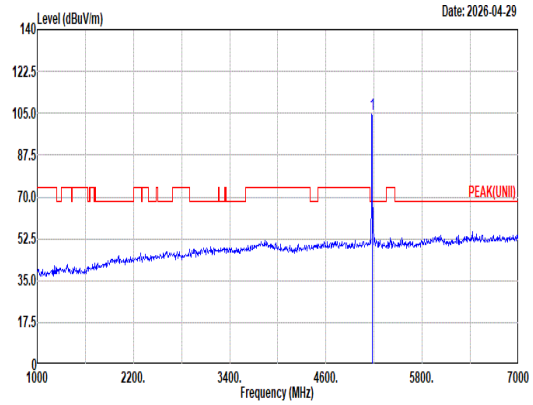 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 104.85 ------ ------ 92.53 34.74 12.75 35.17 0.00 100 238 Peak
Avg	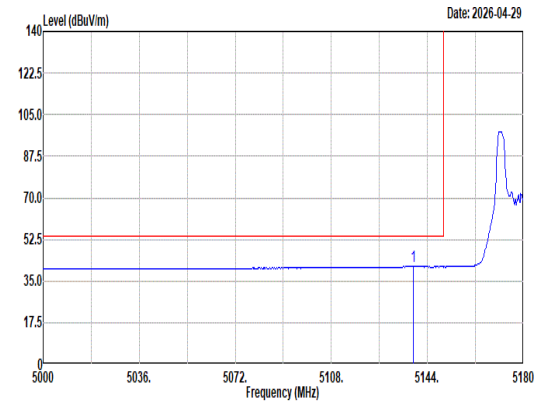 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5138.60 41.03 54.00 -12.97 28.87 34.61 12.72 35.17 0.00 100 238 Average	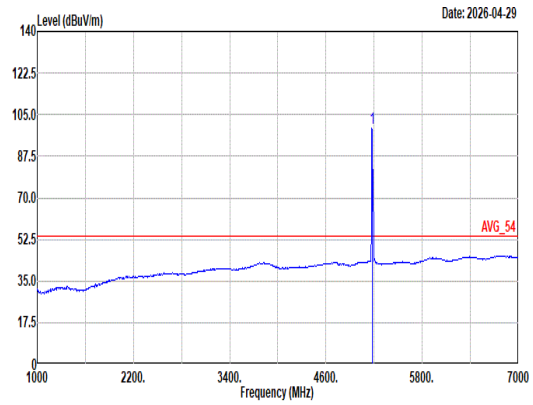 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 99.17 ------ ------ 86.85 34.74 12.75 35.17 0.00 100 238 Average

Mode	79	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial RU 26/0_5180MHz	
ANT	6+7	
Pol.	Vertical	Fundamental
Peak	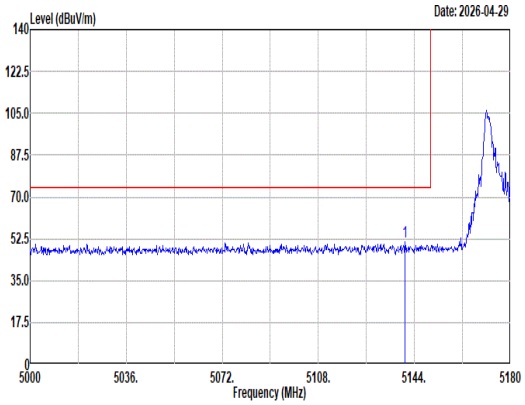 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5140.58 51.24 74.00 -22.76 39.07 34.62 12.72 35.17 0.00 400 285 Peak	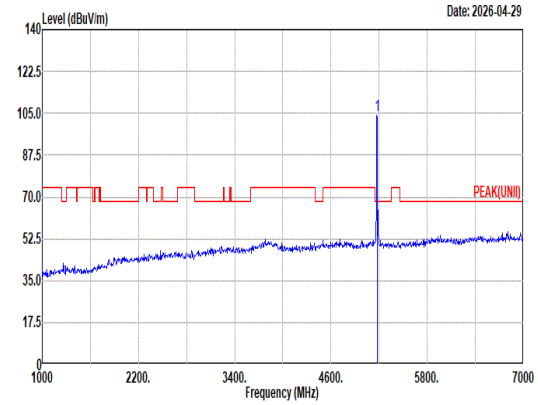 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 104.03 ------ ------ 91.71 34.74 12.75 35.17 0.00 400 285 Peak
Avg	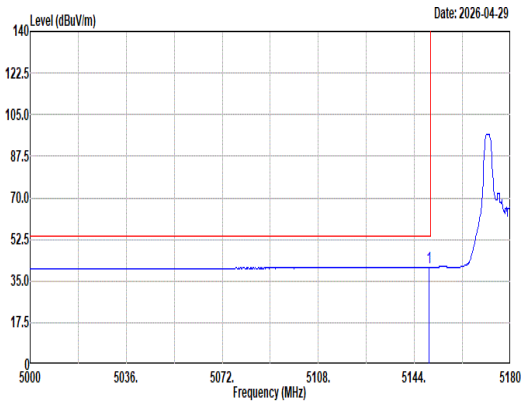 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.40 40.89 54.00 -13.11 28.63 34.70 12.73 35.17 0.00 400 285 Average	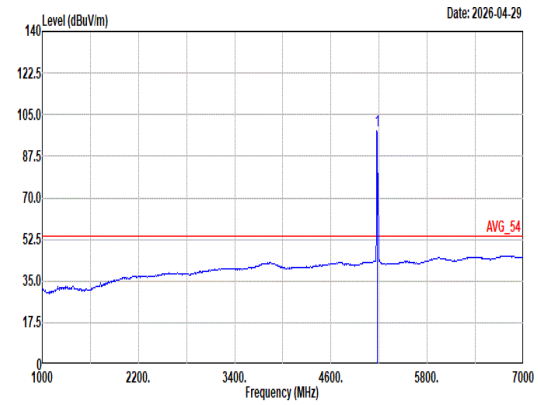 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 98.37 ------ ------ 86.05 34.74 12.75 35.17 0.00 400 285 Average

Mode	79	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial RU 26/0_5180MHz	
ANT	6+7	
Pol.	Horizontal	Vertical
Peak Avg	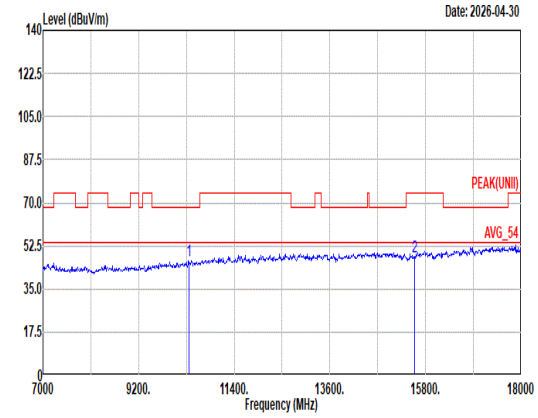 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 46.34 68.20 -21.86 48.55 37.78 17.64 58.78 1.15 -- -- Peak 2 15540.00 47.97 74.00 -26.03 40.40 40.68 21.79 56.15 1.25 -- -- Peak	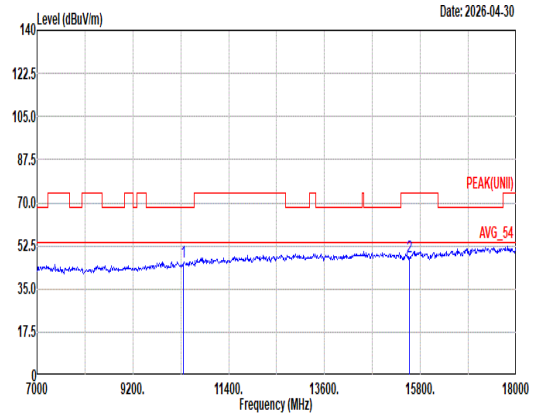 Site : 03CH07-HY Condition: PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 46.19 68.20 -22.01 48.40 37.78 17.64 58.78 1.15 -- -- Peak 2 15540.00 48.07 74.00 -25.93 40.50 40.68 21.79 56.15 1.25 -- -- Peak