



FCC RF Test Report

APPLICANT : Sony Mobile Communications Inc.
EQUIPMENT : Smart phone
BRAND NAME : SONY
TYPE NAME : PM-0891-BV
FCC ID : PY7-PM0891
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Apr. 29, 2015 and testing was completed on May 10, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification subjective to this standard	6
1.5 Modification of EUT	7
1.6 Testing Location	7
1.7 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Descriptions of Test Mode	9
2.2 Test Mode	10
2.3 Connection Diagram of Test System	11
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	12
2.6 Measurement Results Explanation Example	12
3 TEST RESULT	13
3.1 Number of Channel Measurement	13
3.2 Hopping Channel Separation Measurement	15
3.3 Dwell Time Measurement	22
3.4 20dB Bandwidth Measurement	25
3.5 Peak Output Power Measurement	32
3.6 Conducted Band Edges Measurement	34
3.7 Conducted Spurious Emission Measurement	41
3.8 Radiated Band Edges and Spurious Emission Measurement	60
3.9 AC Conducted Emission Measurement	68
3.10 Antenna Requirements	74
4 LIST OF MEASURING EQUIPMENT	75
5 UNCERTAINTY OF EVALUATION	77
APPENDIX A. RADIATED TEST RESULTS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR542942A	Rev. 01	Initial issue of report	Jun. 30, 2015

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	NA	Pass	-
3.5	15.247(b)(1)	Peak Output Power	$\leq 125\text{ mW}$	Pass	-
3.6	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 16.25 dB at 75.900 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.60 dB at 2.814 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Sony Mobile Communications Inc.

Nya Vattentornet, 22188 Lund, Sweden

1.2 Manufacturer

Arima Communications Corp.

6F, No. 866, Jhongjheng Rd., Jhonghe Dist., New Taipei City 23586, Taiwan

1.3 Product Feature of Equipment Under Test

The Equipment Under Test (hereafter called: EUT) is Smart phone supporting, GSM/WCDMA/LTE, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n, Bluetooth with FM Receiver, GPS, and NFC features, and below is details of information.

Product Feature	
Equipment	Smart phone
Brand Name	SONY
Type Name	PM-0891-BV
FCC ID	PY7-PM0891
GSM Operating Band(s)	GSM 850/900/1800/1900MHz
GPRS / EGPRS Multi Slot Class	GPRS Class 12, EGPRS Class 12
WCDMA Operating Band(s)	FDD Band I / II / V / VIII
WCDMA Rel. Version	Rel. 8
LTE Operating Band(s)	FDD Band I / III / V / VII / VIII / XXVIII TDD Band XL
LTE Rel. Version	Rel. 8
Wi-Fi Specification	802.11a/b/g/n (HT20/HT40)
Bluetooth Version	v3.0+EDR / v4.0-LE
NFC Specification	ISO14443A / ISO14443B / Felica
Power Supply	Battery / AC Adapter / Car Charger

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 7.07 dBm (0.0051 W) Bluetooth EDR (2Mbps) : 6.46 dBm (0.0044 W) Bluetooth EDR (3Mbps) : 6.56 dBm (0.0045 W)
Antenna Type	PIFA Antenna type with gain -2.30 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

EUT Information List				
IMEI	HW Version	SW Version	S/N	Performed Test Item
IMEI 1: 004402454617220 IMEI 2: 004402454617238	A	29.0.B.0.76	WUJ01HWJMD	RF conducted measurement
IMEI 1: 004402454617303 IMEI 2: 004402454617311			WUJ01HWJRA	Radiated Spurious Emission
IMEI 1: 004402454617709 IMEI 2: 004402144617717			WUJ01HWK59	Conducted Emission

Accessory List	
AC Adapter	Model No. : EP800
	Type No. : CAA-0002016-US B
	S/N : 3113W 45 108545 (for Radiation Spurious Emission) 3113W 38 210631 (for Conducted Emission)
Battery	Model No. : LIS1579ERPC
Earphone 1	Model No. : MH410c
	Type No. : AG-1100
	S/N : 13511E63001BFF6 (for Radiation Spurious Emission)
Earphone 2	Model No. : MH410c
	Type No. : AG-1103
	S/N : 14292040011682C (for Conducted Emission)
USB Cable	Model No. : EC450
	Type No. : AI-0700
	S/N : 143412DE1065866 (for Radiation Spurious Emission) 134912D1000585A (for Conducted Emission)

Note:

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test.
3. For other wireless features of this EUT, test report will be issued separately.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH02-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2009 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY	

Note: The test site complies with ANSI C63.4 2009 requirement.



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	5.25 dBm	4.45 dBm	4.53 dBm
Ch39	2441MHz	7.07 dBm	6.46 dBm	6.56 dBm
Ch78	2480MHz	6.16 dBm	5.37 dBm	5.51 dBm

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
 2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (X plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.


2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps π /4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps π /4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
AC Conducted Emission	Mode 1 :GSM1900 Idle + Bluetooth Link + WLAN (2.4GHz) Link + MP3 + Earphone 2 + Battery + USB Cable (Charging from Adapter) + SIM 2		
Remark: For Radiated TCs, The tests were performed with Adapter, Battery, Earphone 1, USB Cable, and SIM 1.			

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

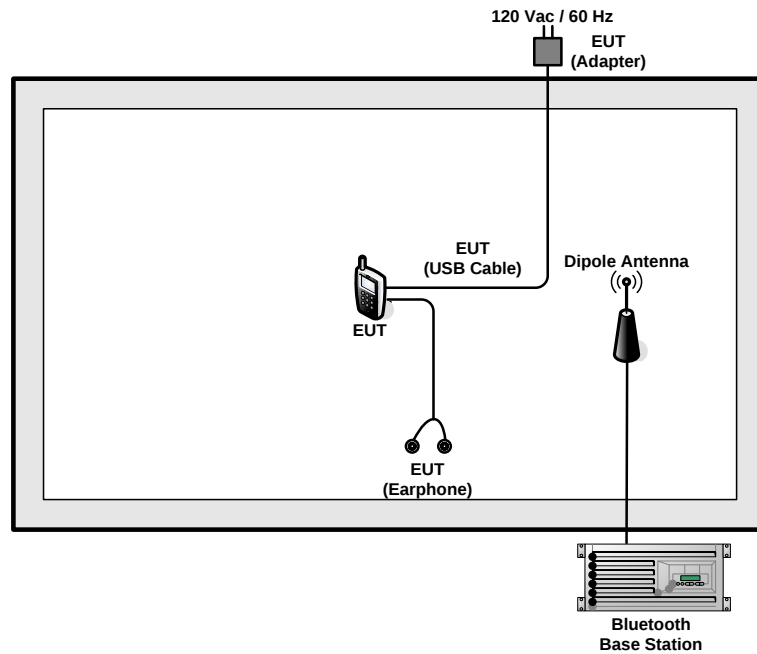

<AC Conducted Emission Mode>

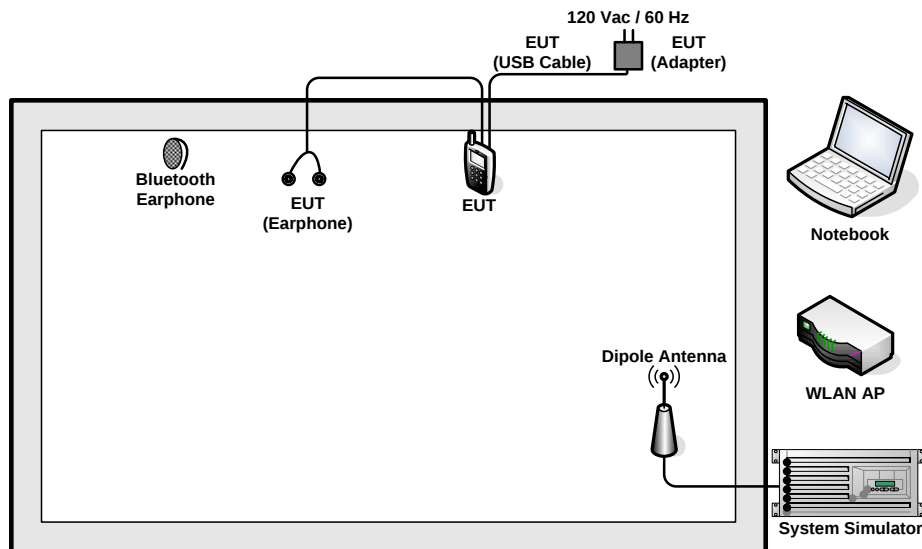

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-865L	KA2IR865LA1	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Sony	SBH20	PY7-RD0010	Unshielded, 0.75m	N/A
6.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.5 EUT Operation Test Setup

For Bluetooth test items, an engineering test program was provided and enabled to make EUT contact with Bluetooth base station for continuous transmitting and receiving signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure


1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW $\geq$ 1% of the span; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

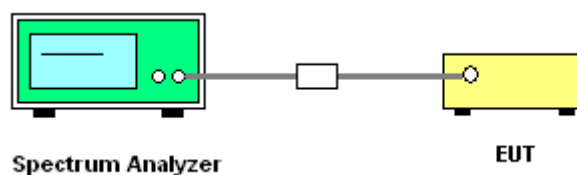


3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	William Liao	Relative Humidity :	50~53%
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass

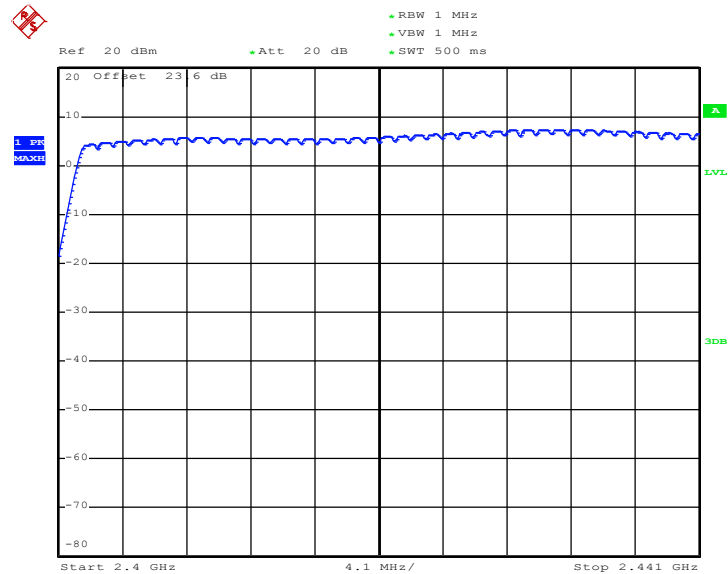Number of Hopping Channel Plot on Channel 00 - 78


Date: 6.MAY.2015 16:27:10

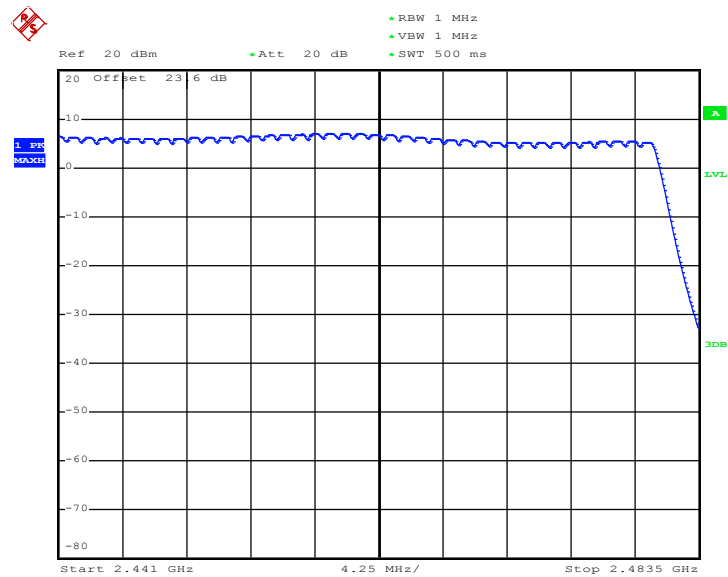

Date: 6.MAY.2015 16:31:47

Note: The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
 $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

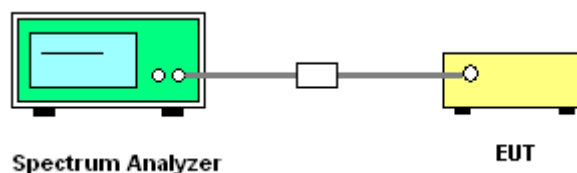




3.2.5 Test Result of Hopping Channel Separation

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	William Liao	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.6480	Pass
39	2441	1.002	0.6480	Pass
78	2480	1.074	0.6480	Pass


Channel Separation Plot on Channel 00 - 01

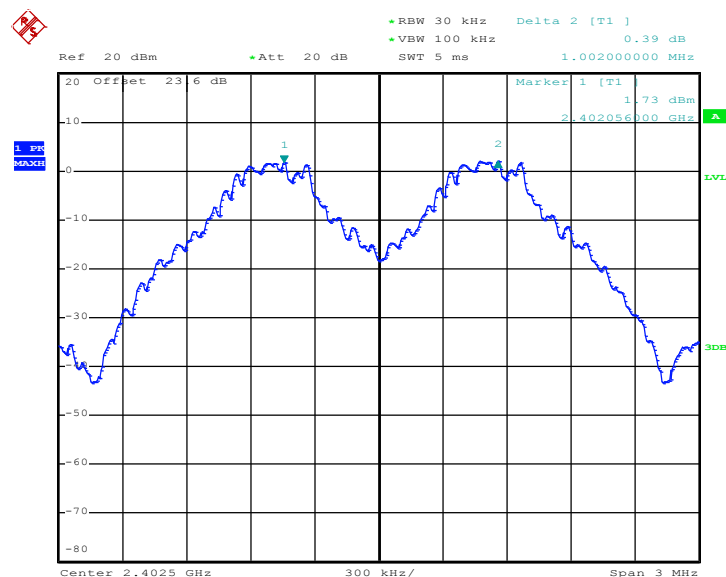

Date: 6.MAY.2015 17:51:04


Note: The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

Channel Separation Plot on Channel 39 - 40

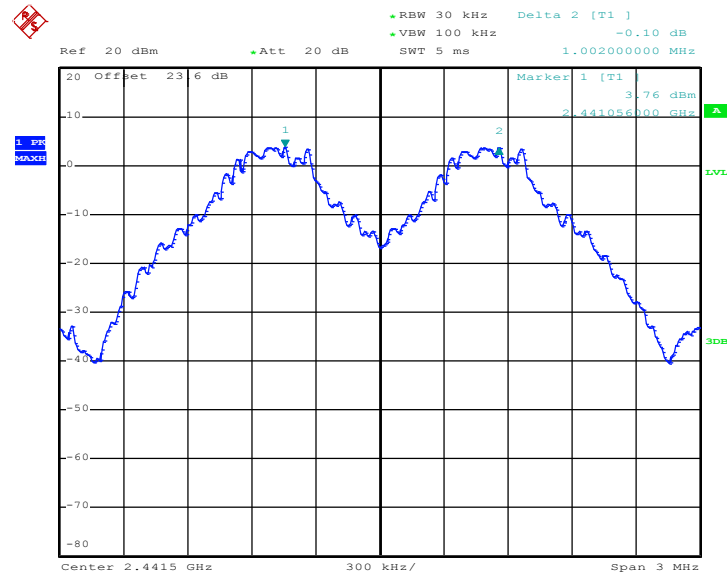

Date: 6.MAY.2015 17:57:32

Channel Separation Plot on Channel 77 - 78

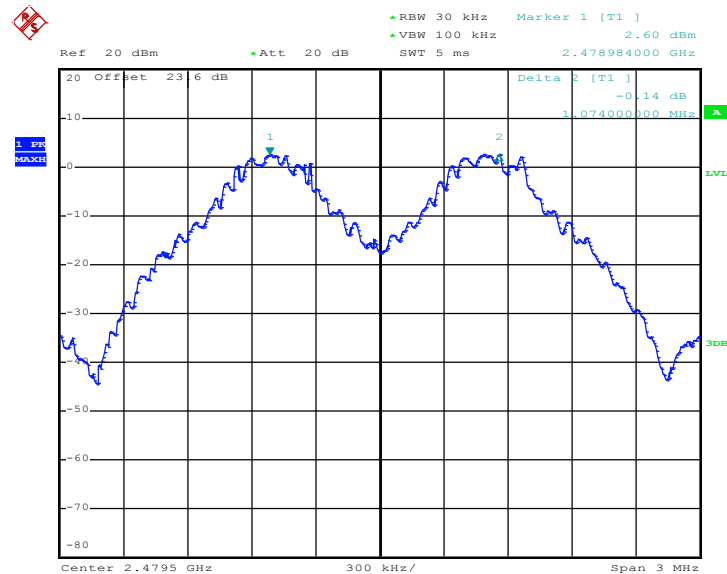


Date: 6.MAY.2015 15:59:18



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	William Liao	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8280	Pass
39	2441	1.008	0.8440	Pass
78	2480	1.002	0.8440	Pass

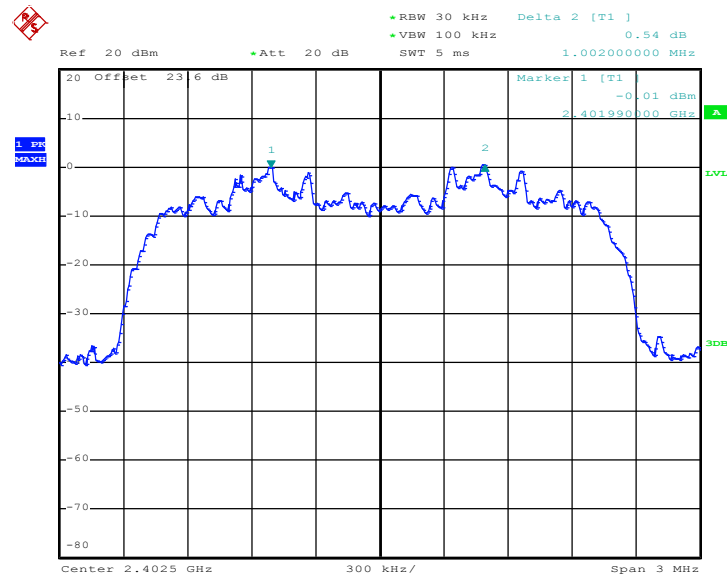
Channel Separation Plot on Channel 00 - 01

Date: 6.MAY.2015 17:59:59

Note: The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




Channel Separation Plot on Channel 39 - 40

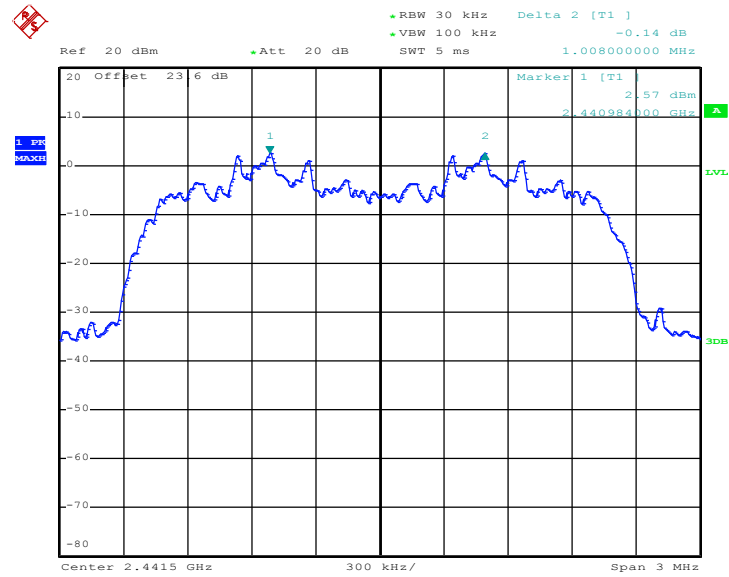

Date: 6.MAY.2015 18:01:40

Channel Separation Plot on Channel 77 - 78

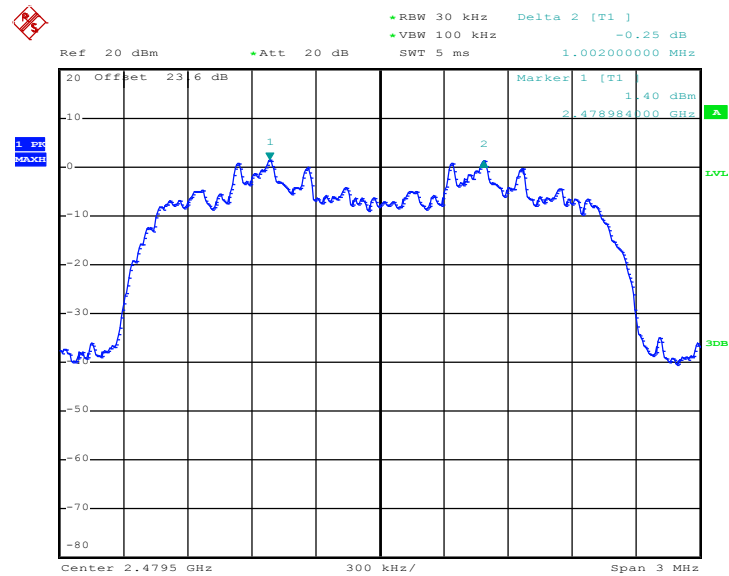


Date: 6.MAY.2015 18:03:31



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	William Liao	Relative Humidity :	50~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8640	Pass
39	2441	1.002	0.8680	Pass
78	2480	1.002	0.8440	Pass

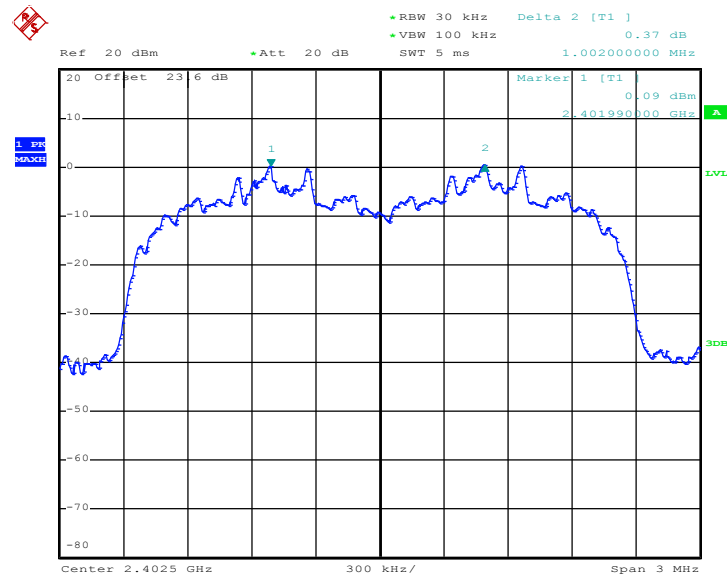
Channel Separation Plot on Channel 00 - 01

Date: 6.MAY.2015 18:05:47

Note: The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




Channel Separation Plot on Channel 39 - 40

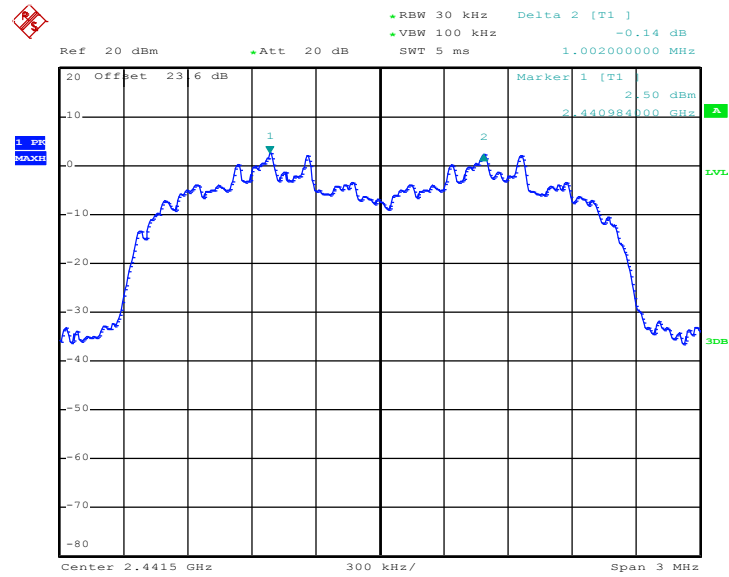

Date: 6.MAY.2015 18:08:15

Channel Separation Plot on Channel 77 - 78

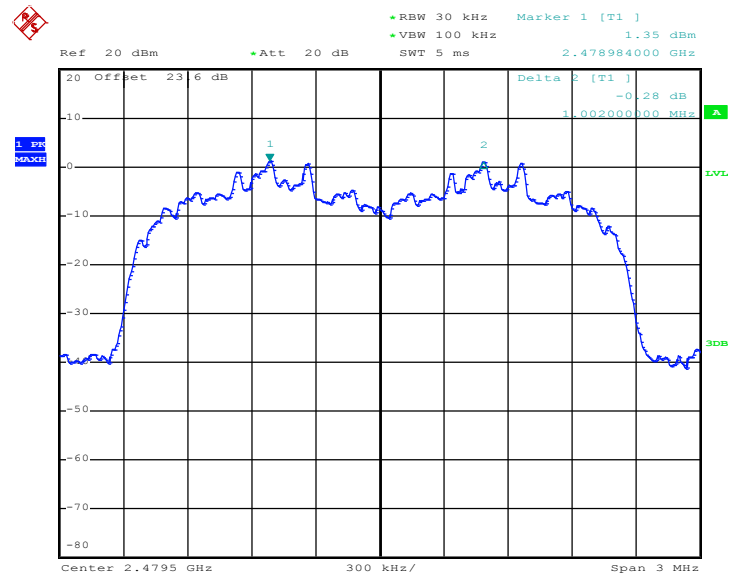

Date: 6.MAY.2015 18:09:39

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

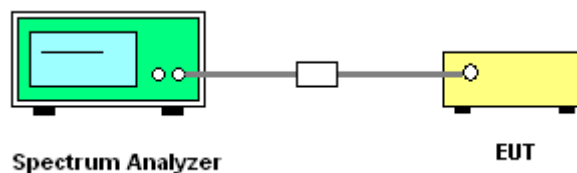

3.3.5 Test Result of Dwell Time

Test Mode :	DH5	Temperature :	24~26℃
Test Engineer :	William Liao	Relative Humidity :	50~53%


Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.34	2.90	0.15	0.4	Pass

Remark:

1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



Package Transfer Time Plot

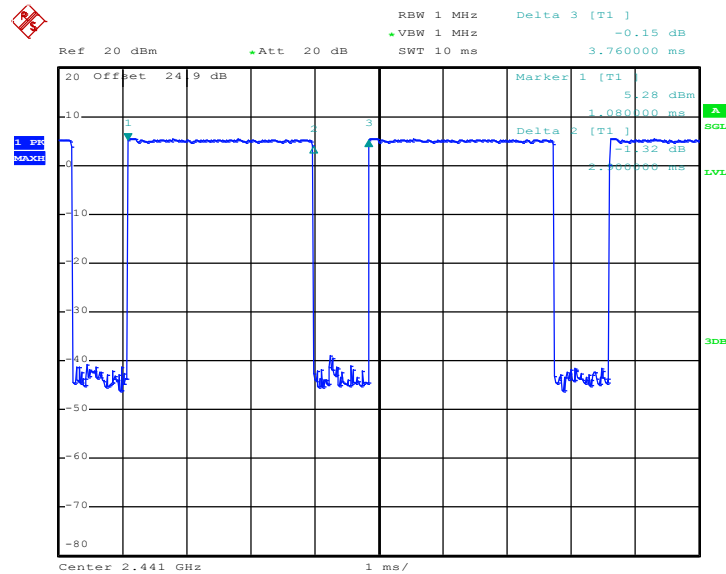

Date: 4.MAY.2015 17:42:24

Note: The total loss is 24.9 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

3.4 20dB Bandwidth Measurement

3.4.1 Limit of 20dB Bandwidth

Reporting only


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Measure and record the results in the test report.

3.4.4 Test Setup

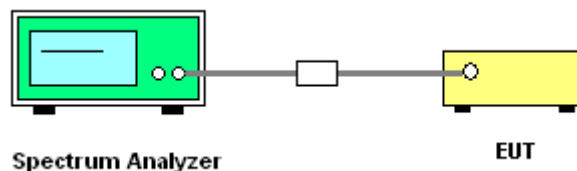


3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	William Liao	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.972
39	2441	0.972
78	2480	0.972

20 dB Bandwidth Plot on Channel 00

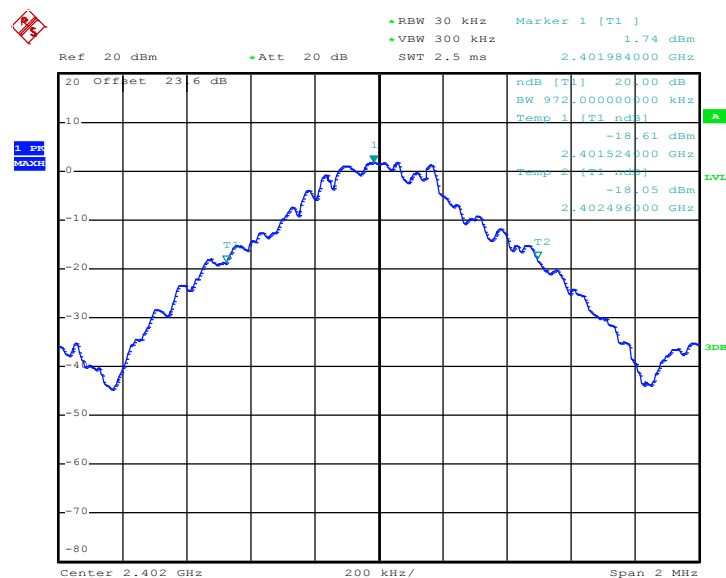


Date: 6.MAY.2015 16:00:59

Note: The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




20 dB Bandwidth Plot on Channel 39

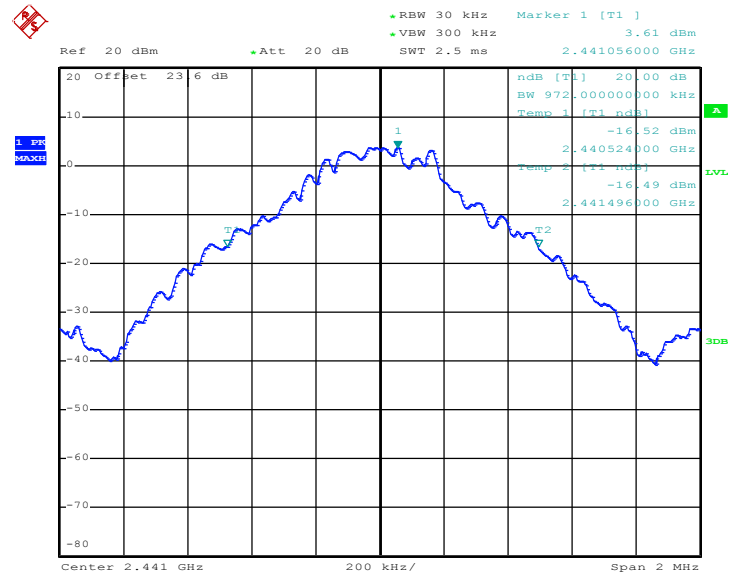

Date: 6.MAY.2015 16:03:42

20 dB Bandwidth Plot on Channel 78

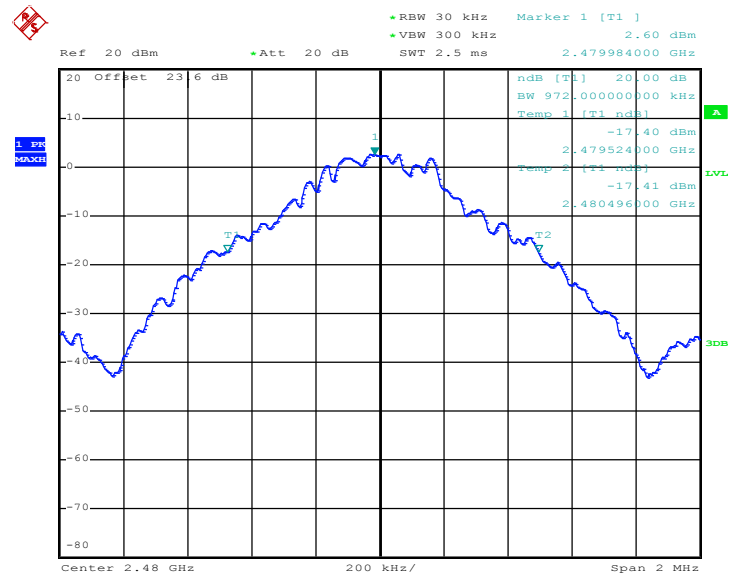


Date: 6.MAY.2015 16:04:20



Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	William Liao	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.242
39	2441	1.266
78	2480	1.266

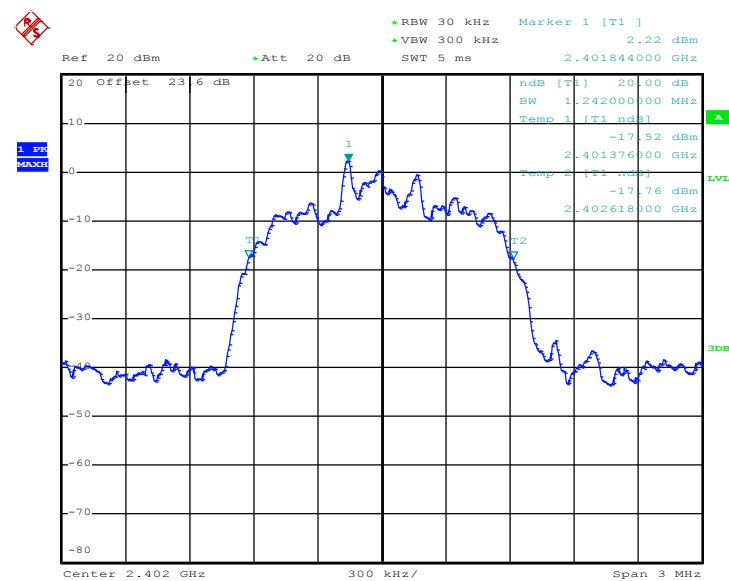
20 dB Bandwidth Plot on Channel 00

Date: 6.MAY.2015 19:12:37

Note: The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




20 dB Bandwidth Plot on Channel 39

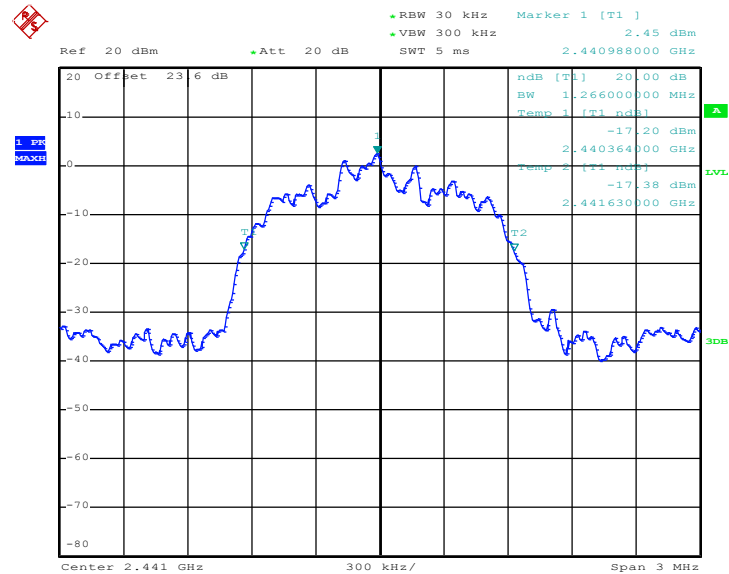

Date: 6.MAY.2015 19:13:18

20 dB Bandwidth Plot on Channel 78

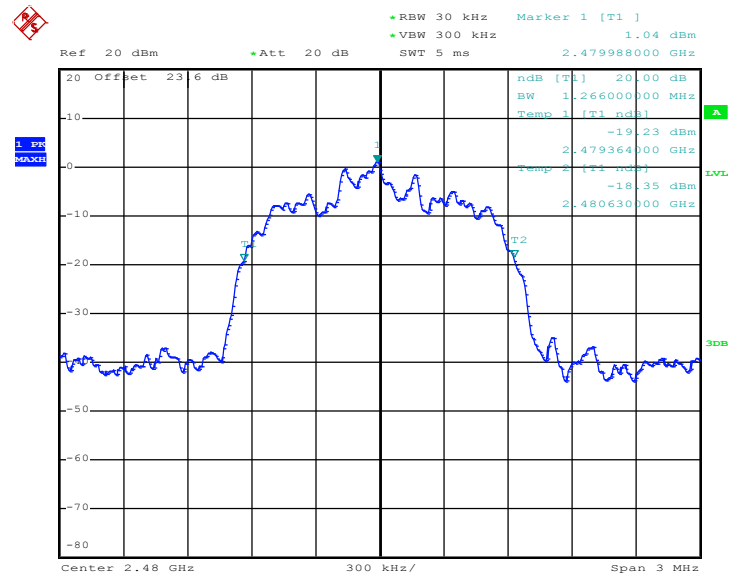


Date: 6.MAY.2015 19:13:53



Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	William Liao	Relative Humidity :	50~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.296
39	2441	1.302
78	2480	1.266

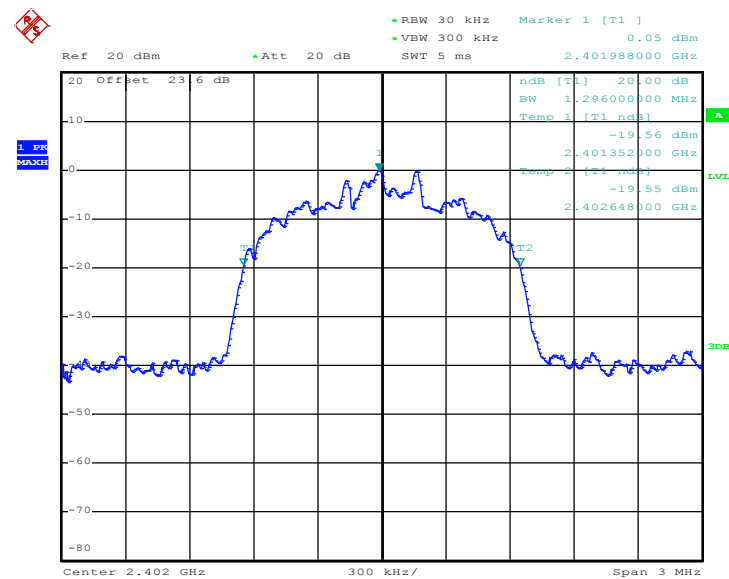
20 dB Bandwidth Plot on Channel 00

Date: 6.MAY.2015 17:24:21

Note: The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




20 dB Bandwidth Plot on Channel 39

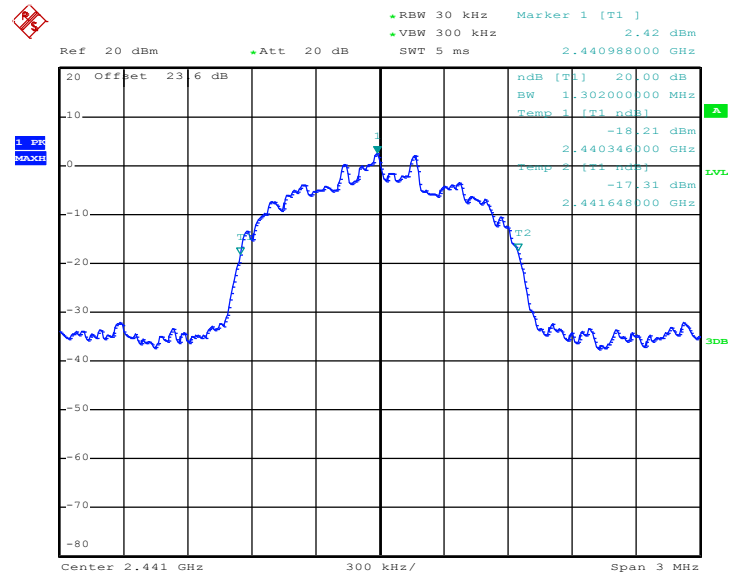

Date: 6.MAY.2015 17:23:48

20 dB Bandwidth Plot on Channel 78

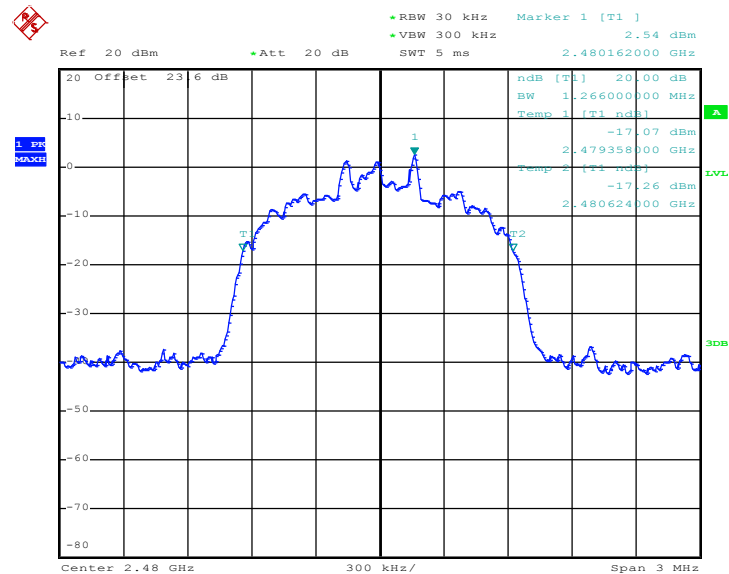

Date: 6.MAY.2015 17:23:15

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, 3Mbps and AFH are 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

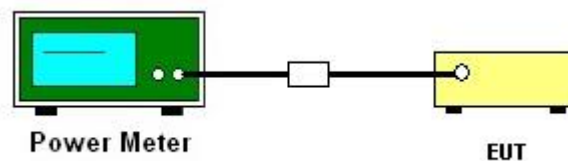

3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	William Liao	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	5.25	20.97	Pass
39	2441	7.07	20.97	Pass
78	2480	6.16	20.97	Pass

Note: For AFH mode using 20 hopping channels, the maximum output power limit is 20.97dBm.

Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	William Liao	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	4.45	20.97	Pass
39	2441	6.46	20.97	Pass
78	2480	5.37	20.97	Pass

Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	William Liao	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	4.53	20.97	Pass
39	2441	6.56	20.97	Pass
78	2480	5.51	20.97	Pass

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz ($\geq 1\%$ span=10MHz), VBW = 300kHz ($\geq$ RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.


3.6.4 Test Setup

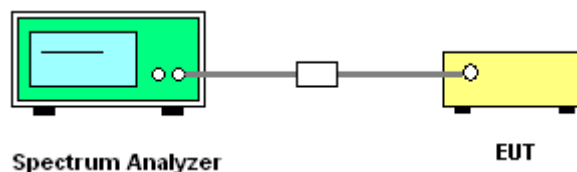

3.6.5 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	William Liao

Low Band Edge Plot on Channel 00

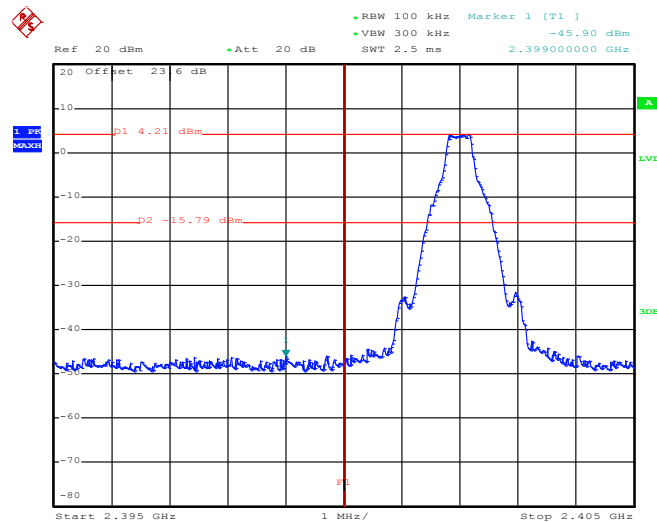

Date: 6.MAY.2015 18:26:43

High Band Edge Plot on Channel 78

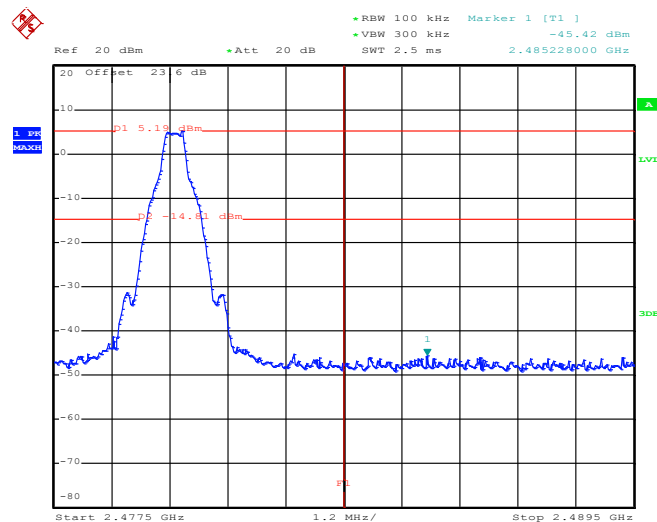


Date: 6.MAY.2015 18:27:16

Note: The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.


Test Mode :	2Mbps	Temperature :	24~26℃
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	William Liao

Low Band Edge Plot on Channel 00

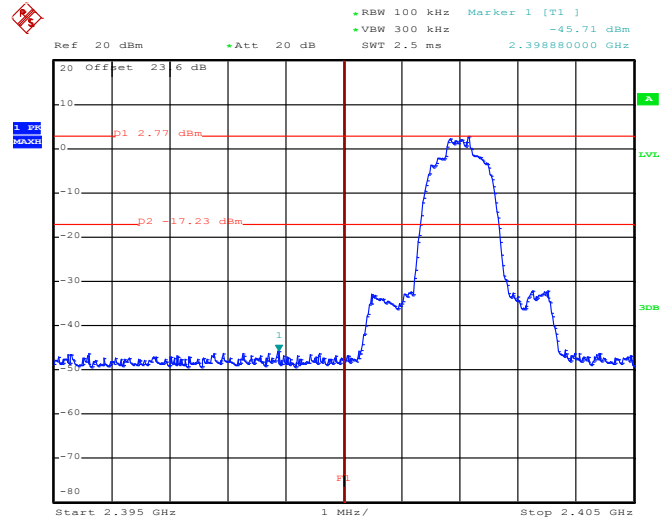

Date: 6.MAY.2015 18:31:26

High Band Edge Plot on Channel 78

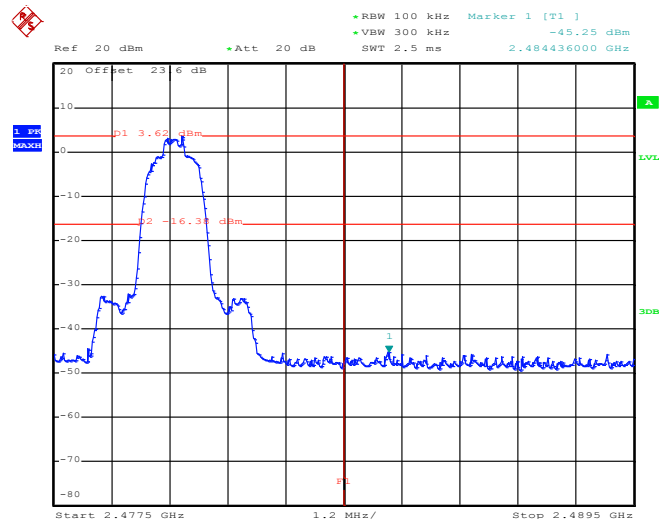


Date: 6.MAY.2015 18:31:58

Note: The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.


Test Mode :	3Mbps	Temperature :	24~26℃
Test Channel :	00 and 78	Relative Humidity :	50~53%
		Test Engineer :	William Liao

Low Band Edge Plot on Channel 00

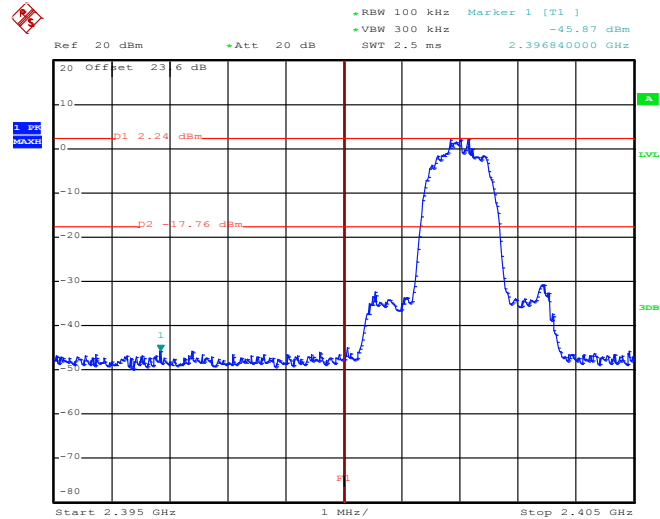

Date: 6.MAY.2015 18:36:30

High Band Edge Plot on Channel 78

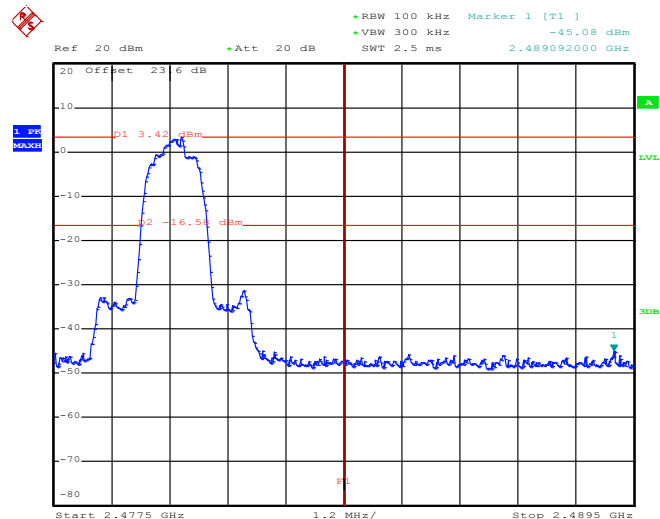


Date: 6.MAY.2015 18:36:59


Note: The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

3.6.6 Test Result of Conducted Hopping Mode Band Edges

Test Mode :	1Mbps	Temperature :	24~26°C
Test Engineer :	William Liao	Relative Humidity :	50~53%

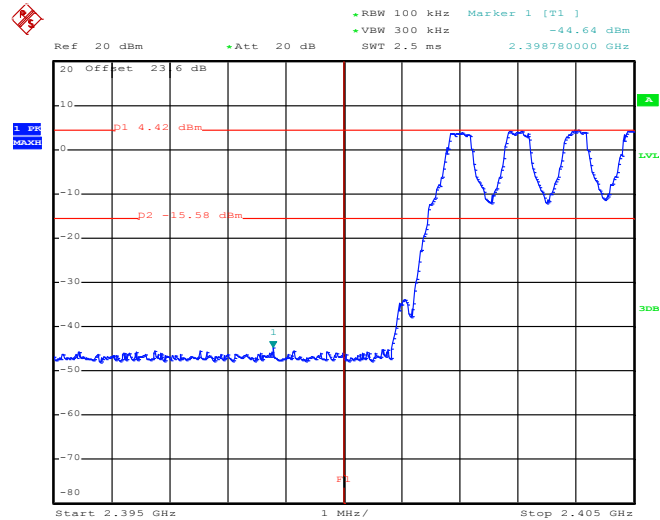1Mbps Hopping Mode Low Band Edge Plot


Date: 6.MAY.2015 18:22:01

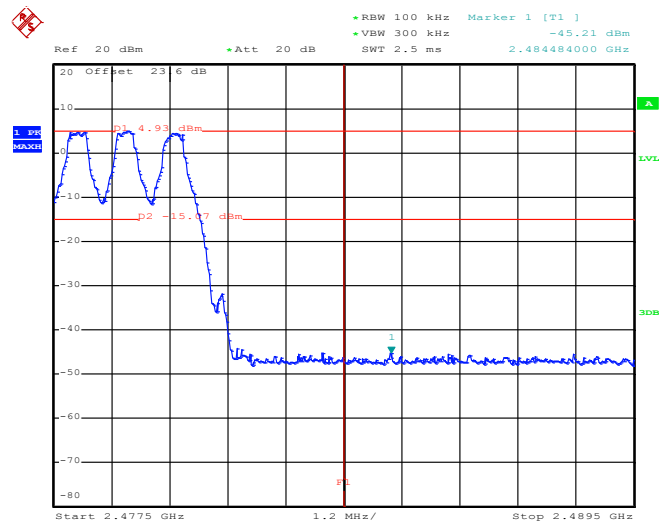
1Mbps Hopping Mode High Band Edge Plot


Date: 6.MAY.2015 18:24:22




Test Mode :	2Mbps	Temperature :	24~26°C
Test Engineer :	William Liao	Relative Humidity :	50~53%

2Mbps Hopping Mode Low Band Edge Plot

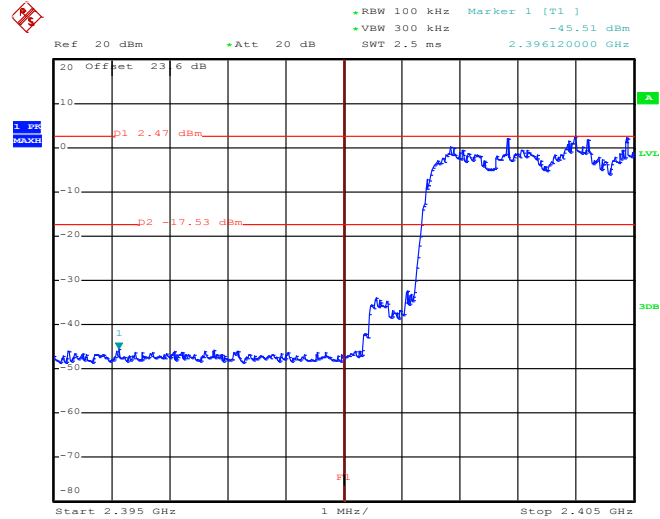

Date: 6.MAY.2015 18:29:31

2Mbps Hopping Mode High Band Edge Plot

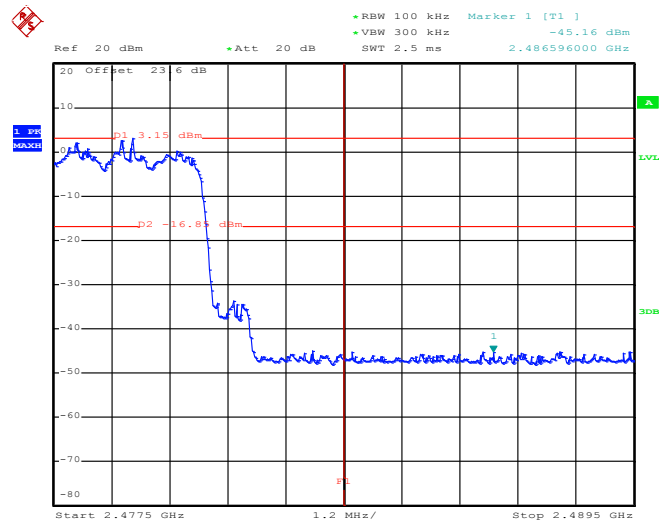


Date: 6.MAY.2015 18:30:51




Test Mode :	3Mbps	Temperature :	24~26°C
Test Engineer :	William Liao	Relative Humidity :	50~53%

3Mbps Hopping Mode Low Band Edge Plot

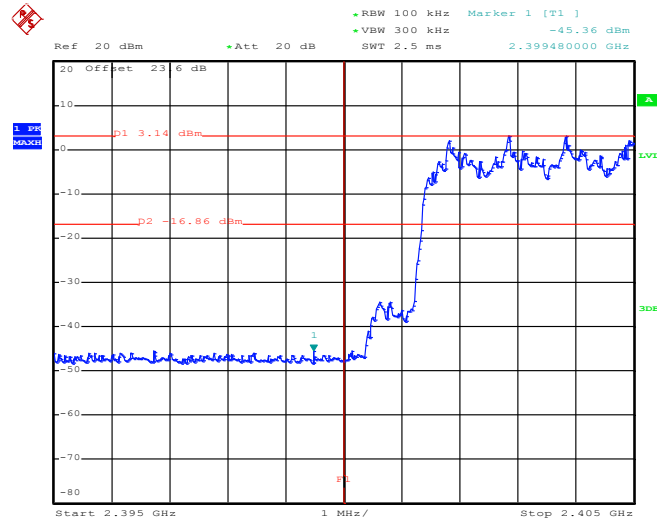

Date: 6.MAY.2015 18:34:02

3Mbps Hopping Mode High Band Edge Plot

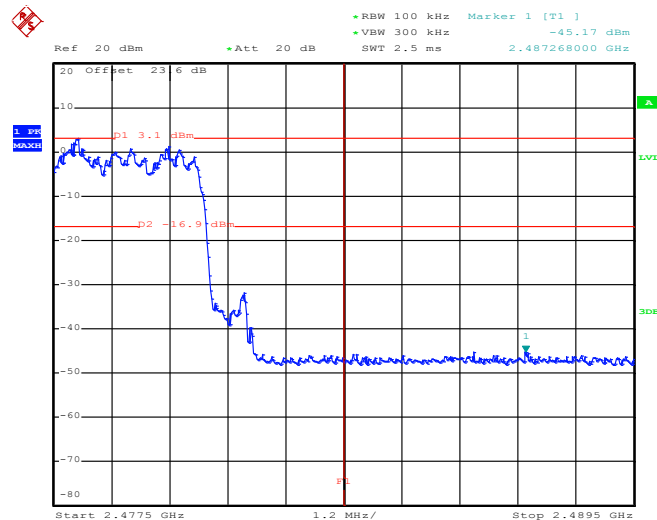

Date: 6.MAY.2015 18:35:14

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.7.4 Test Setup

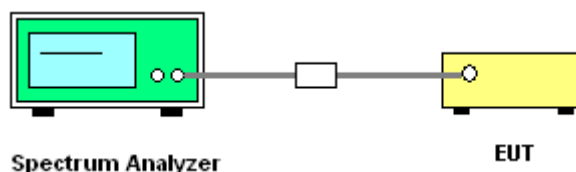

3.7.5 Test Result of Conducted Spurious Emission

Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	William Liao


1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

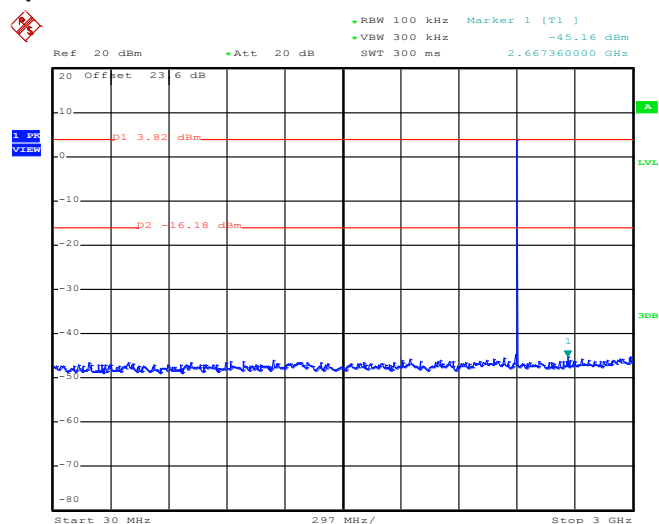

Date: 6.MAY.2015 16:10:10

Note:

1. The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

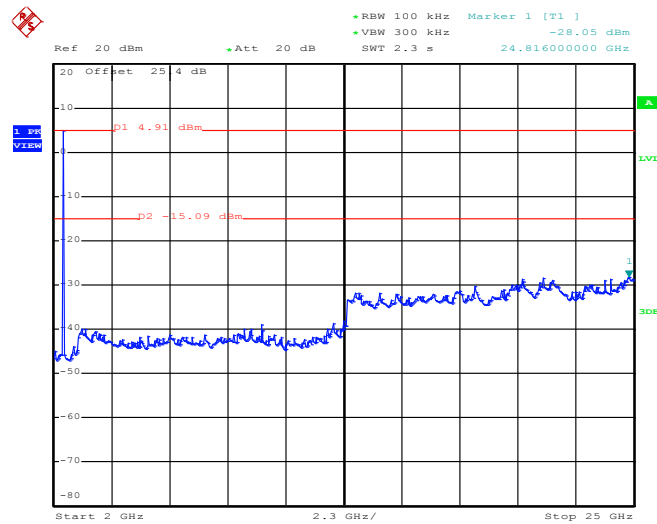1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz


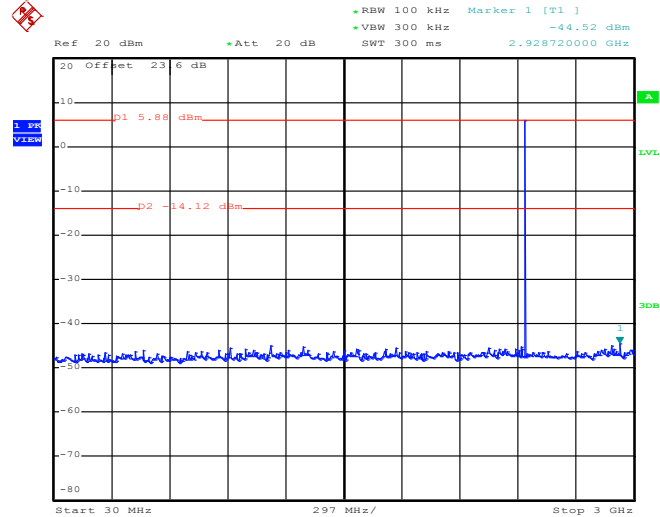
Date: 6.MAY.2015 16:10:32

Note:

1. The total loss is 25.4 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.




Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	William Liao

1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

Date: 6.MAY.2015 16:11:40

Note:

1. The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

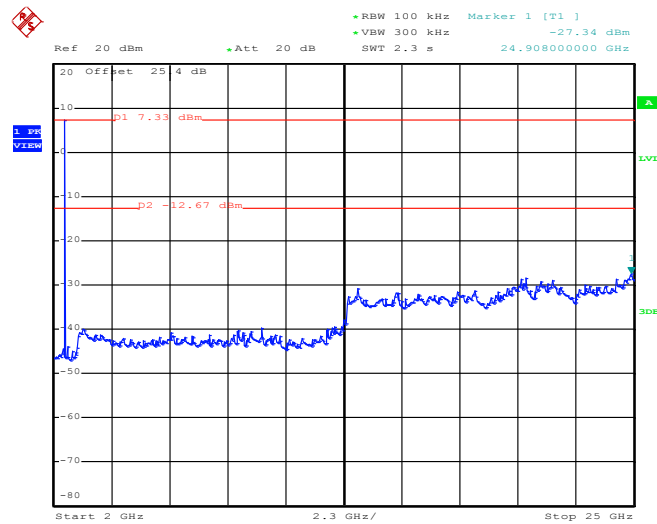1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz


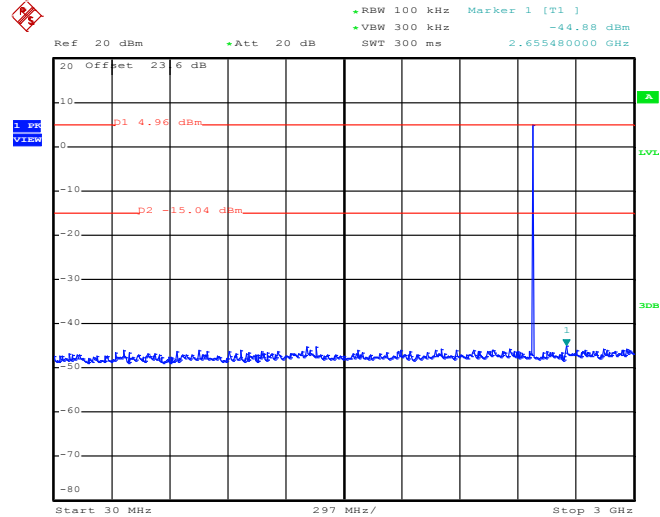
Date: 6.MAY.2015 16:12:01

Note:

1. The total loss is 25.4 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.




Test Mode :	1Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	William Liao

1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

Date: 6.MAY.2015 16:12:36

Note:

1. The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

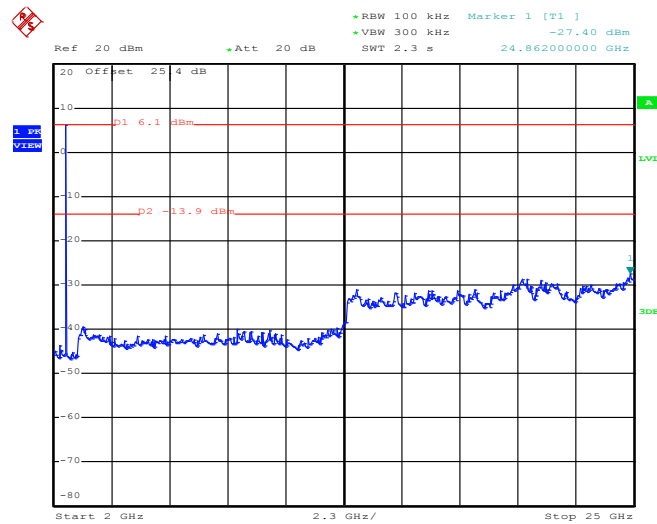1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz


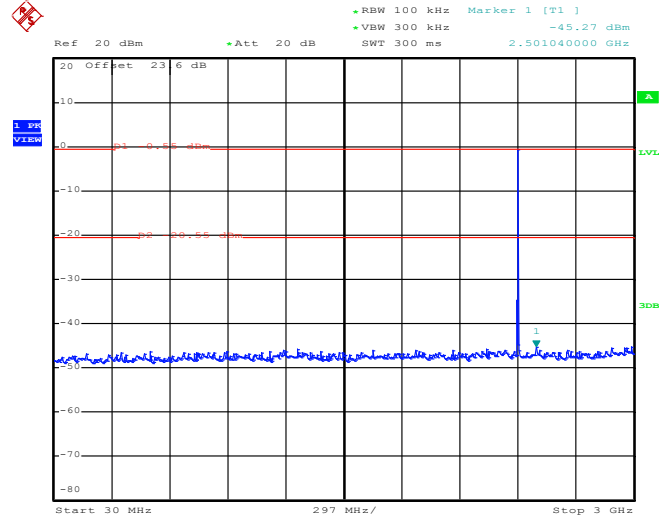
Date: 6.MAY.2015 16:12:58

Note:

1. The total loss is 25.4 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	William Liao

2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

Date: 6.MAY.2015 16:58:57

Note:

1. The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

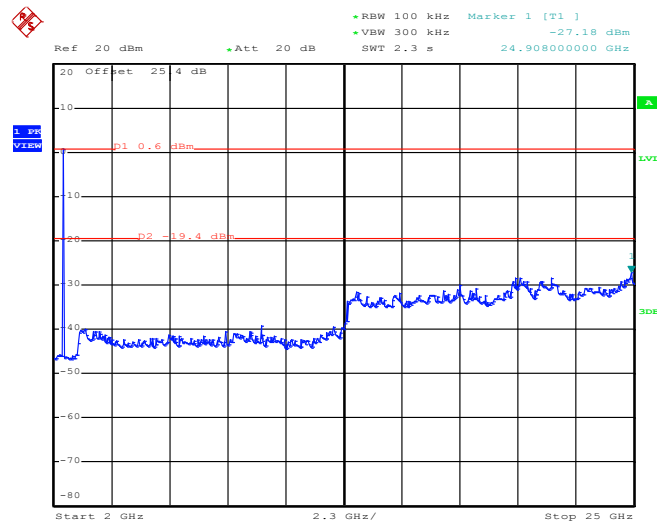2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz


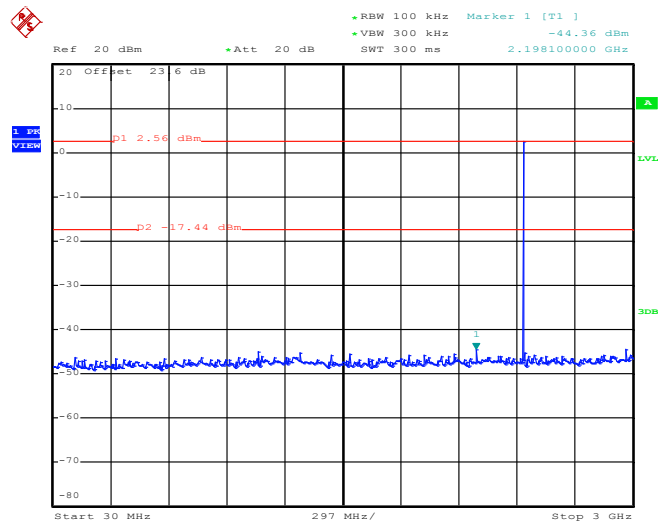
Date: 6.MAY.2015 16:59:19

Note:

1. The total loss is 25.4 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	William Liao

2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

Date: 6.MAY.2015 16:57:16

Note:

1. The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

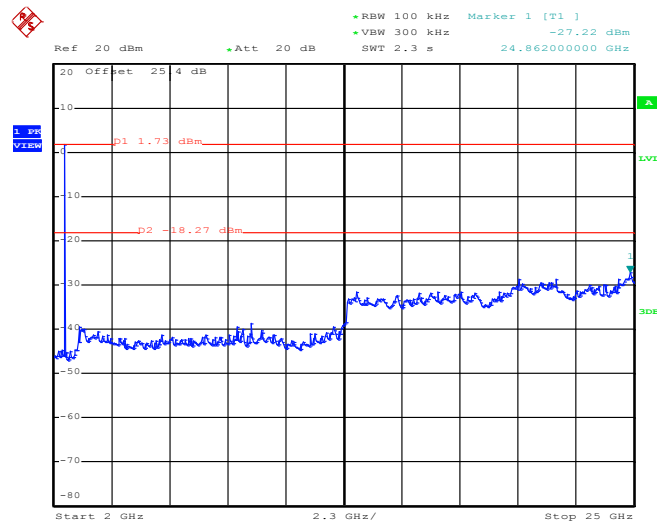2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz


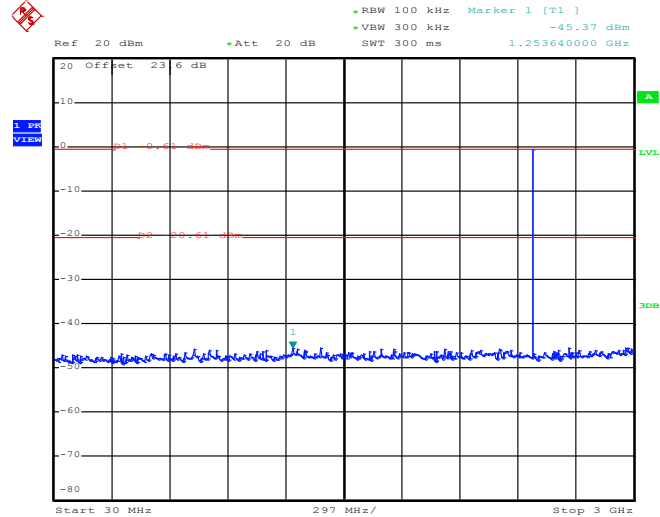
Date: 6.MAY.2015 16:57:38

Note:

1. The total loss is 25.4 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.




Test Mode :	2Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	William Liao

2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

Date: 6.MAY.2015 16:56:22

Note:

1. The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

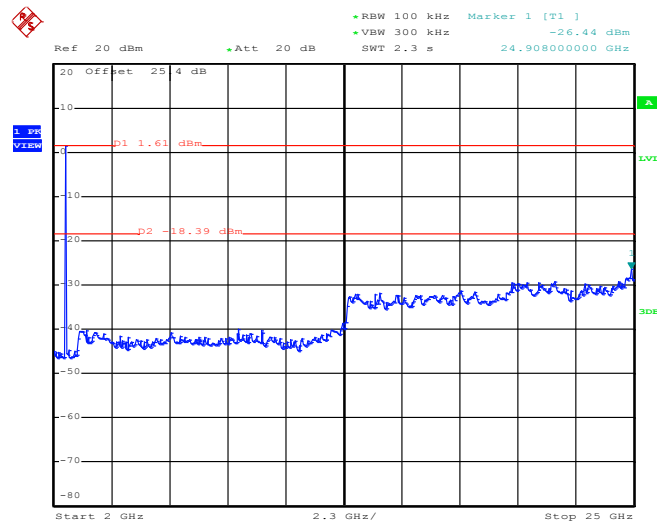2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz


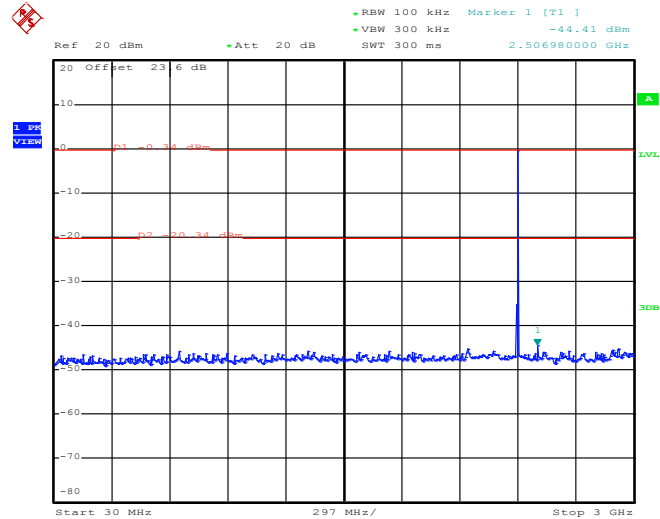
Date: 6.MAY.2015 16:56:43

Note:

1. The total loss is 25.4 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Test Mode :	3Mbps	Temperature :	24~26℃
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	William Liao


3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz



Date: 6.MAY.2015 17:29:39

Note:

1. The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

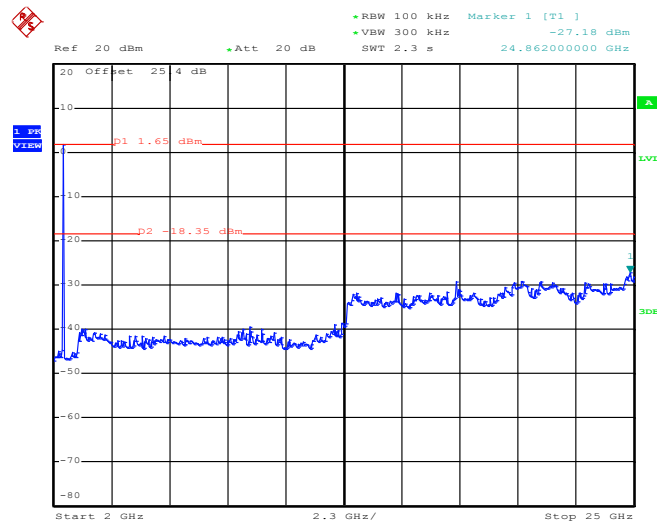3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz


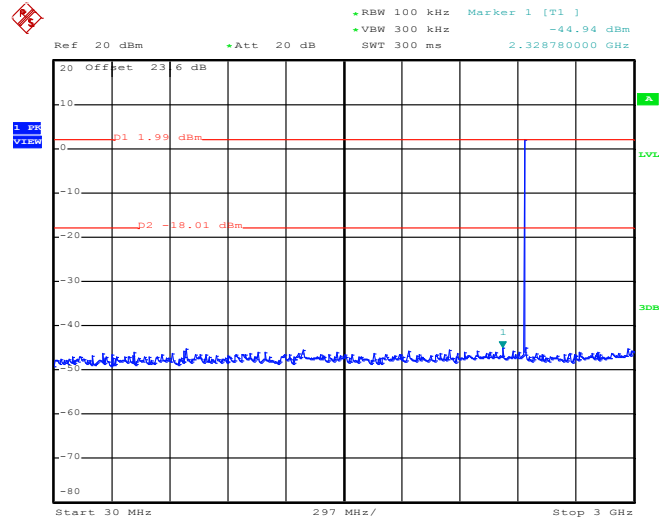
Date: 6.MAY.2015 17:30:01

Note:

1. The total loss is 25.4 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	William Liao

3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

Date: 6.MAY.2015 17:28:45

Note:

1. The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

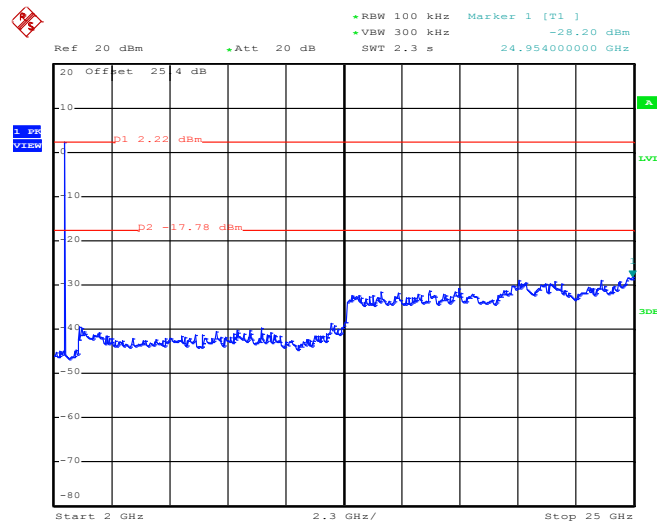3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz


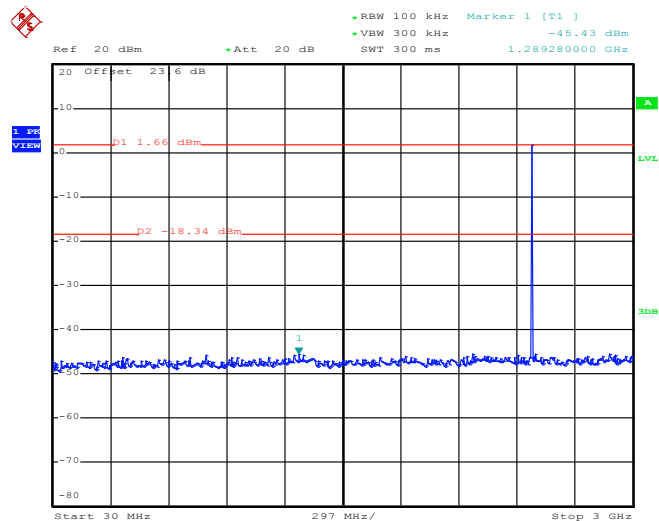
Date: 6.MAY.2015 17:29:06

Note:

1. The total loss is 25.4dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.




Test Mode :	3Mbps	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	50~53%
		Test Engineer :	William Liao

3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

Date: 6.MAY.2015 17:27:47

Note:

1. The total loss is 23.6 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

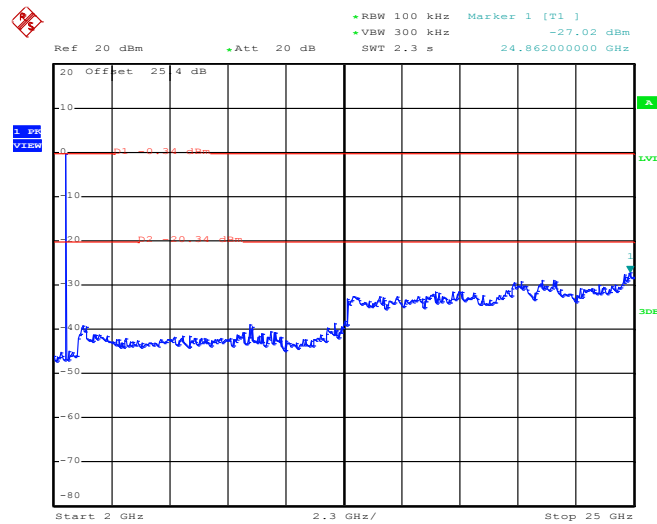3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz


Date: 6.MAY.2015 17:28:09

Note:

1. The total loss is 25.4 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.
2. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.8.3 Test Procedures

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1\text{GHz}$; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.82dB for 1Mbps, -24.82dB for 2Mbps, and -24.79dB for 3Mbps) derived from $20\log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

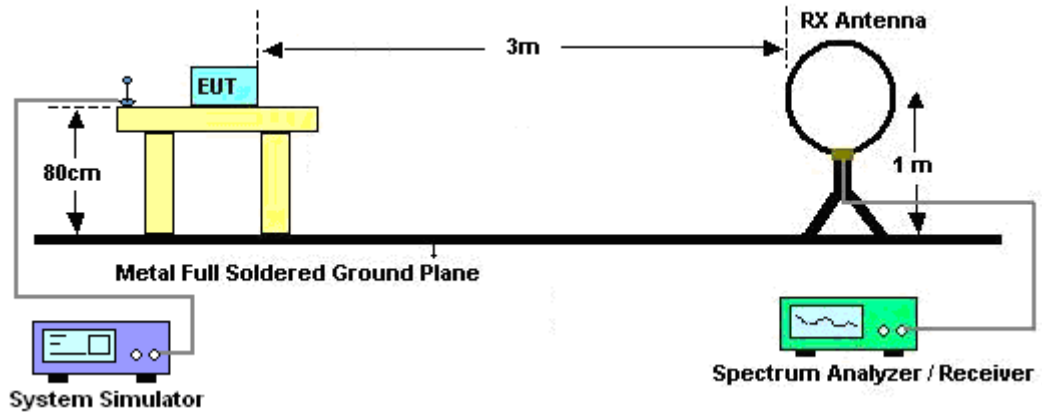

For radiated emissions from 30MHz to 1GHz

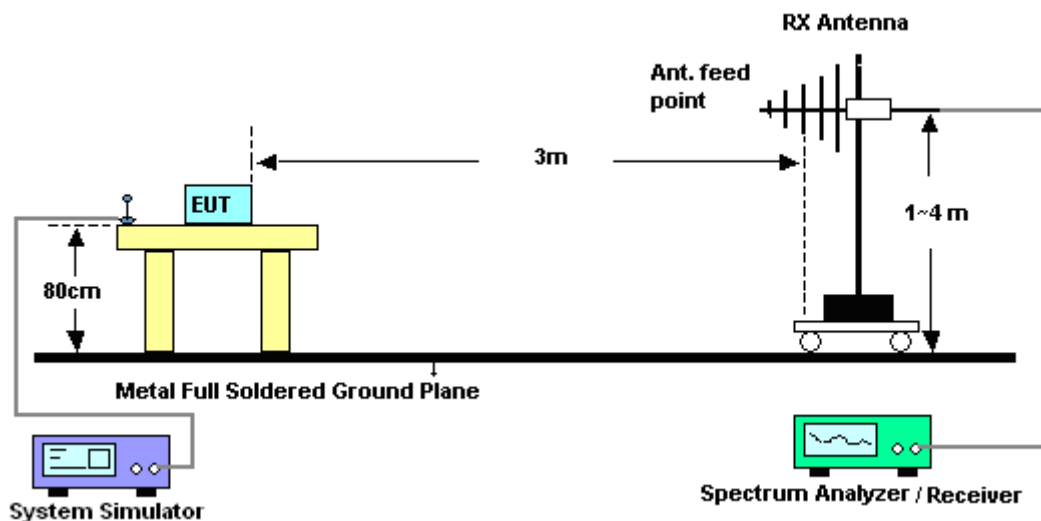

For radiated emissions above 1GHz

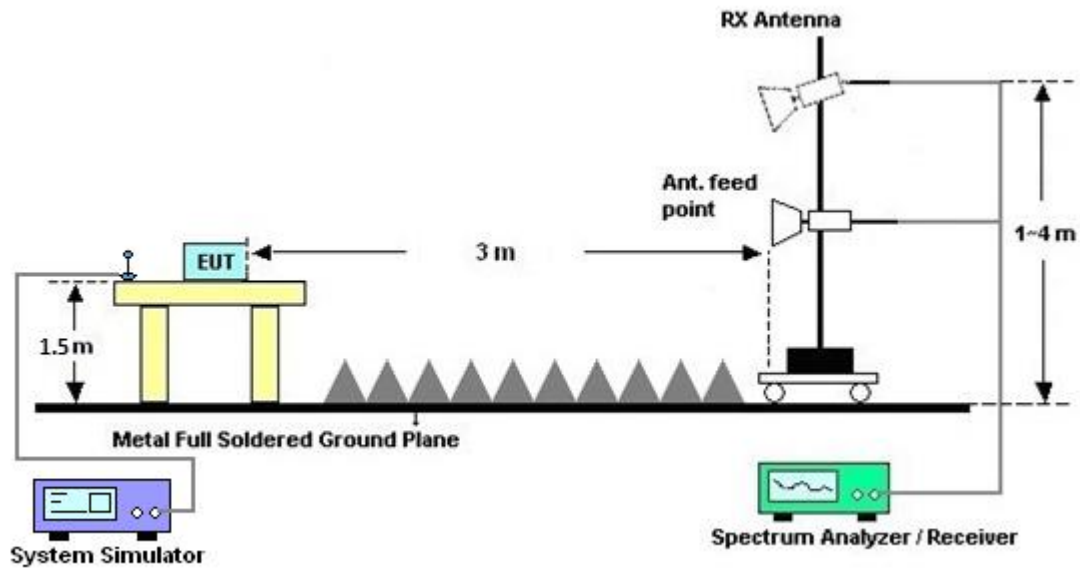


3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.8.6 Duty cycle correction factor for average measurement

DH5 on time (One Pulse) Plot on Channel 39

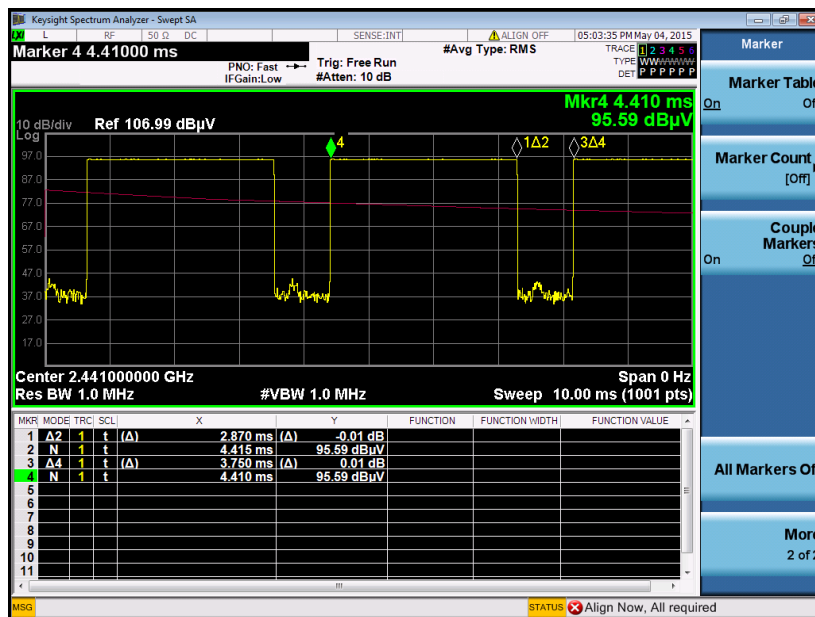

DH5 on time (Count Pulses) Plot on Channel 39

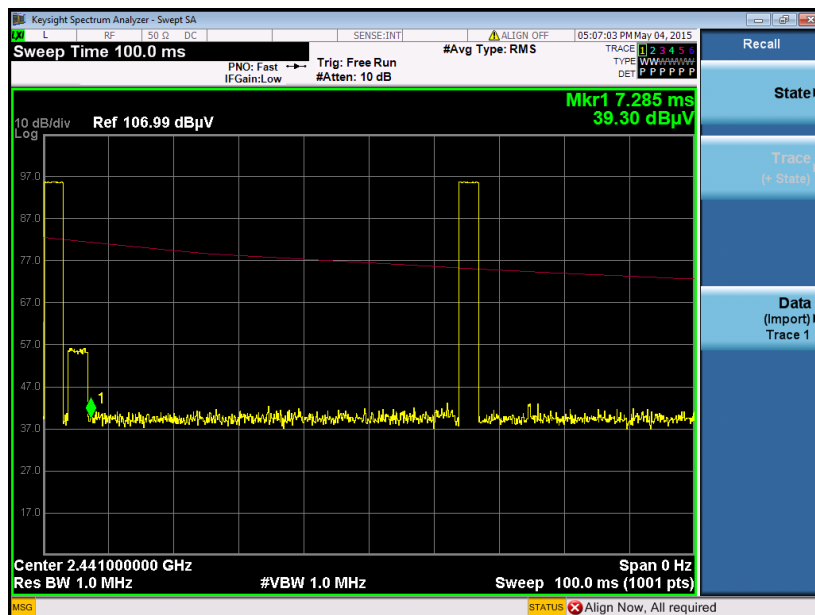


Note:


1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.87 / 100 = 5.74 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.82 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.



2DH5 on time (One Pulse) Plot on Channel 39


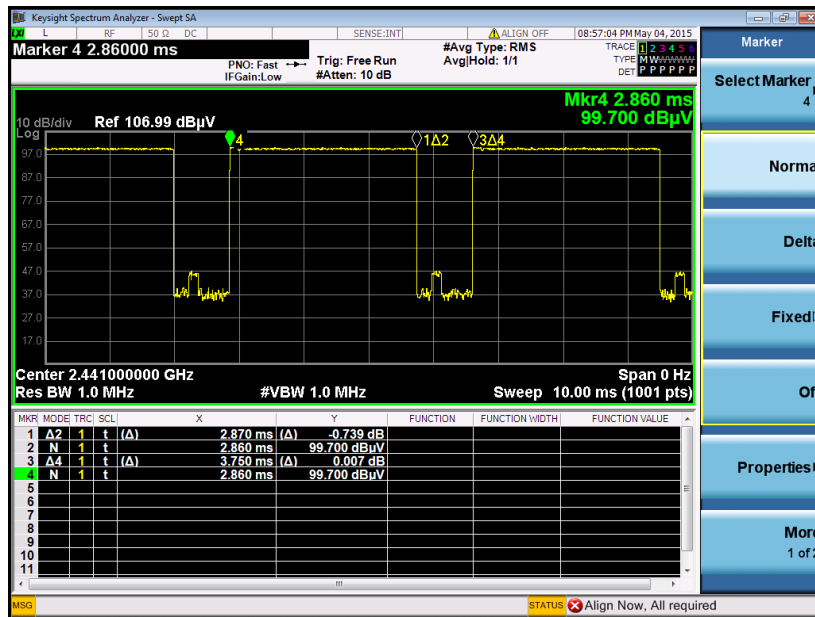


2DH5 on time (Count Pulses) Plot on Channel 39

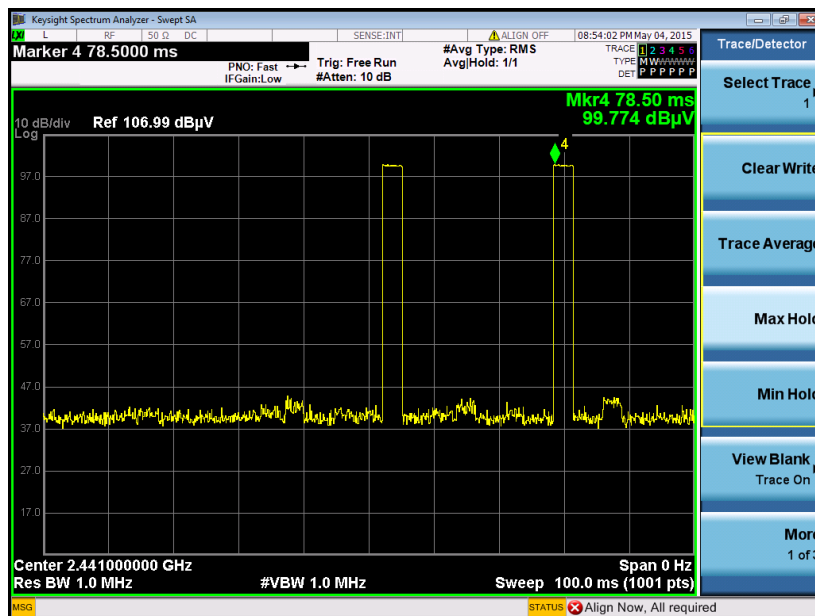

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.87 / 100 = 5.74 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.82 \text{ dB}$
3. 2DH5 has the highest duty cycle worst case and is reported.

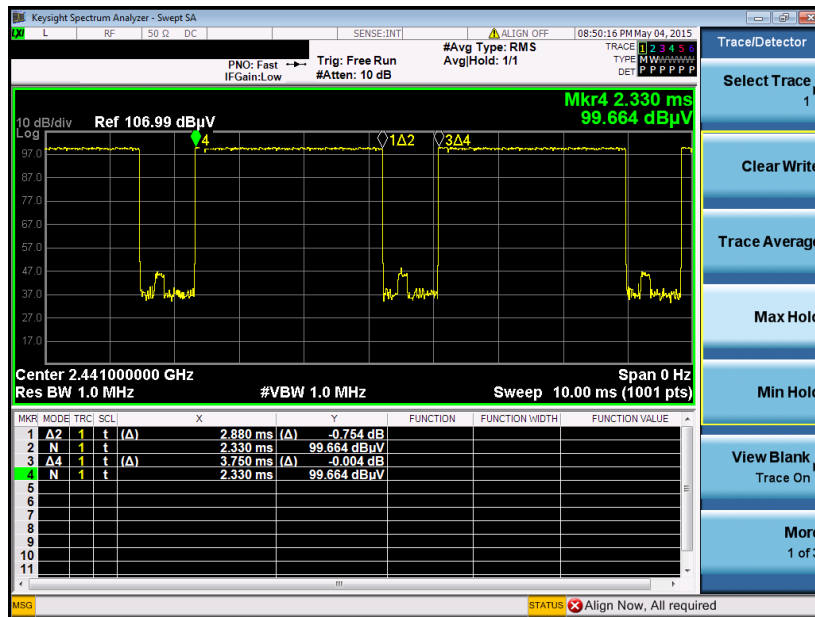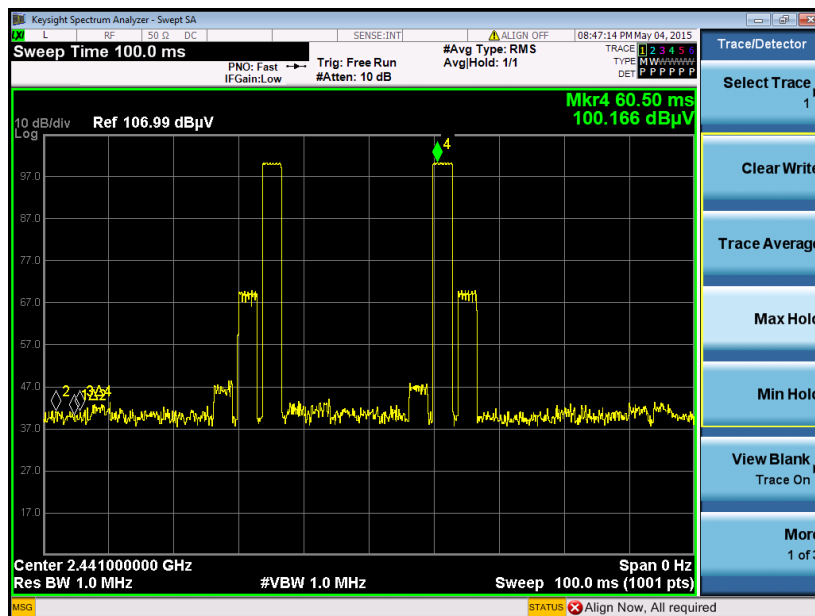3DH5 on time (One Pulse) Plot on Channel 39

3DH5 on time (Count Pulses) Plot on Channel 39

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. **3DH5DH5** has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.87 \text{ ms} \times 20 \text{ channels} = 57.4 \text{ ms for 1Mbps and 2Mbps}$$

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms for 3Mbps}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.87 \text{ ms} \times 2 = 5.74 \text{ ms for 1Mbps and 2Mbps}$$

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms for 3Mbps}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.74 \text{ ms}/100\text{ms}) = -24.82 \text{ dB for 1Mbps and 2Mbps}$$

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB for 3Mbps}$$

3.8.7 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

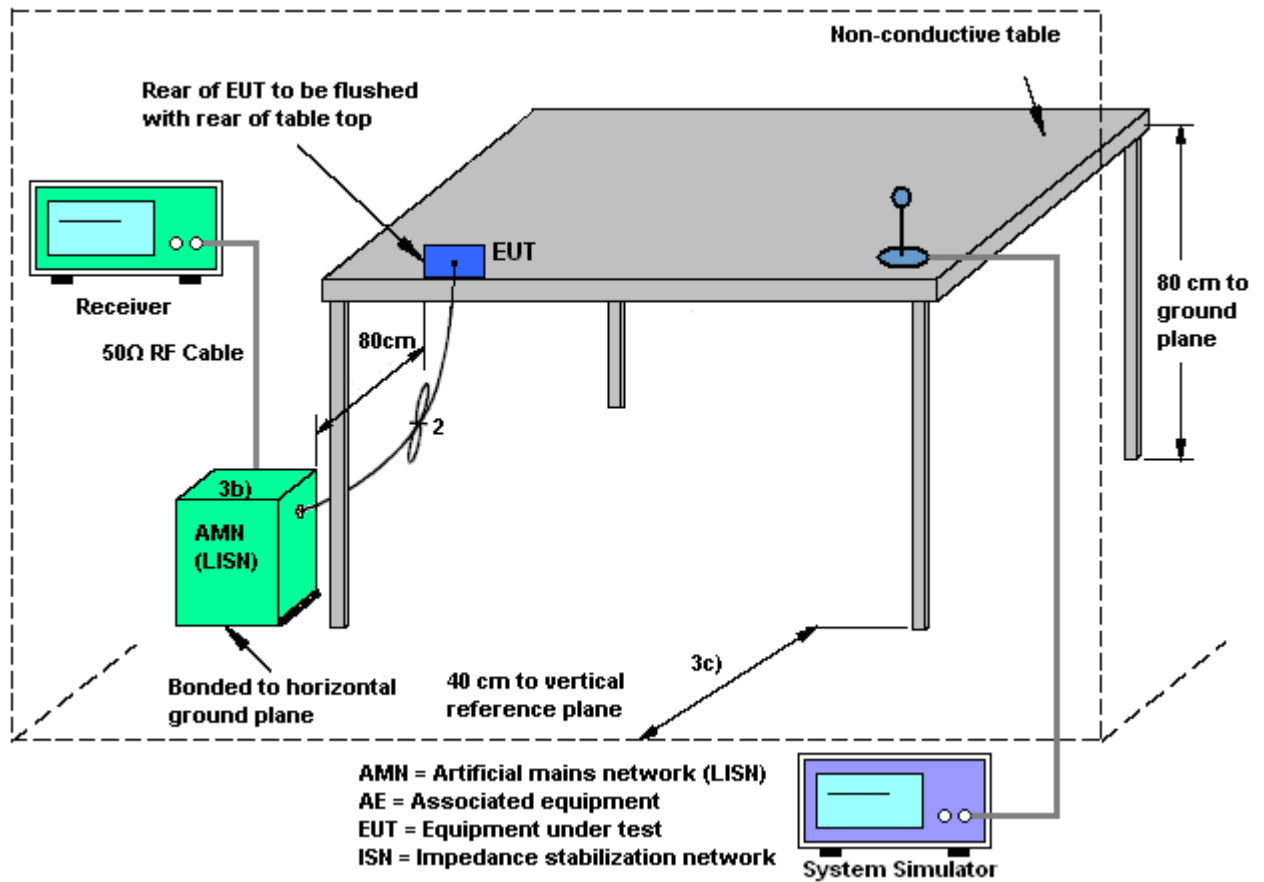

3.9.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	24~25°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	53~54%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN (2.4GHz) Link + MP3 + Earphone 2 + Battery + USB Cable (Charging from Adapter) + SIM 2		

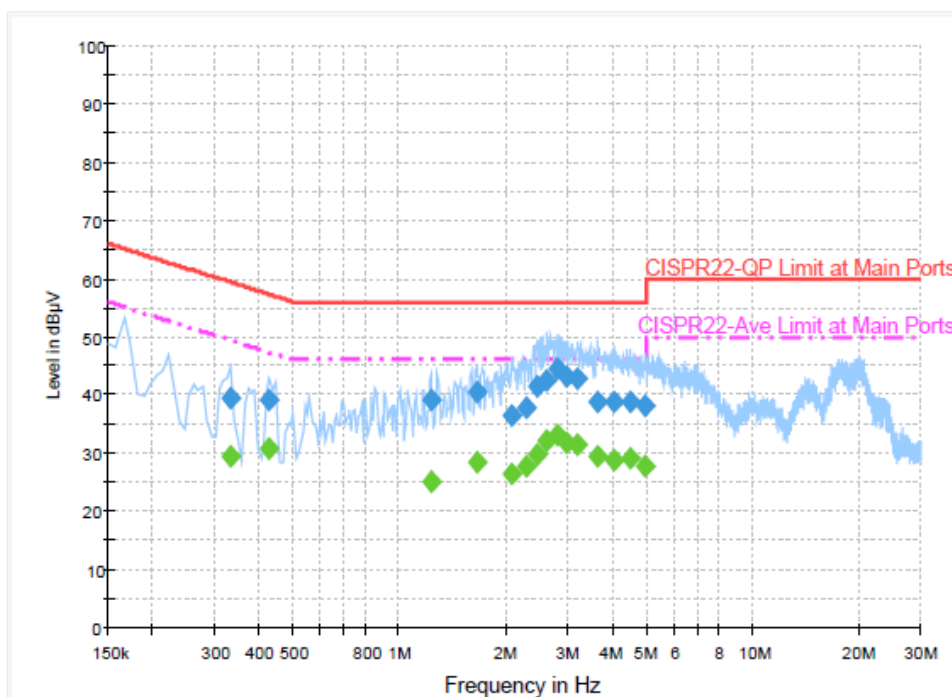


Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.334000	39.6	Off	L1	19.4	19.8	59.4
0.430000	39.1	Off	L1	19.5	18.2	57.3
1.230000	39.2	Off	L1	19.6	16.8	56.0
1.662000	40.5	Off	L1	19.6	15.5	56.0
2.094000	36.4	Off	L1	19.7	19.6	56.0
2.302000	37.7	Off	L1	19.7	18.3	56.0
2.462000	41.5	Off	L1	19.7	14.5	56.0
2.614000	42.4	Off	L1	19.7	13.6	56.0
2.814000	44.4	Off	L1	19.7	11.6	56.0
2.990000	43.3	Off	L1	19.7	12.7	56.0
3.190000	42.7	Off	L1	19.7	13.3	56.0
3.646000	38.8	Off	L1	19.7	17.2	56.0
4.078000	38.7	Off	L1	19.7	17.3	56.0
4.502000	38.7	Off	L1	19.8	17.3	56.0
4.950000	38.0	Off	L1	19.8	18.0	56.0




Test Mode :	Mode 1	Temperature :	24~25°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	53~54%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN (2.4GHz) Link + MP3 + Earphone 2 + Battery + USB Cable (Charging from Adapter) + SIM 2		

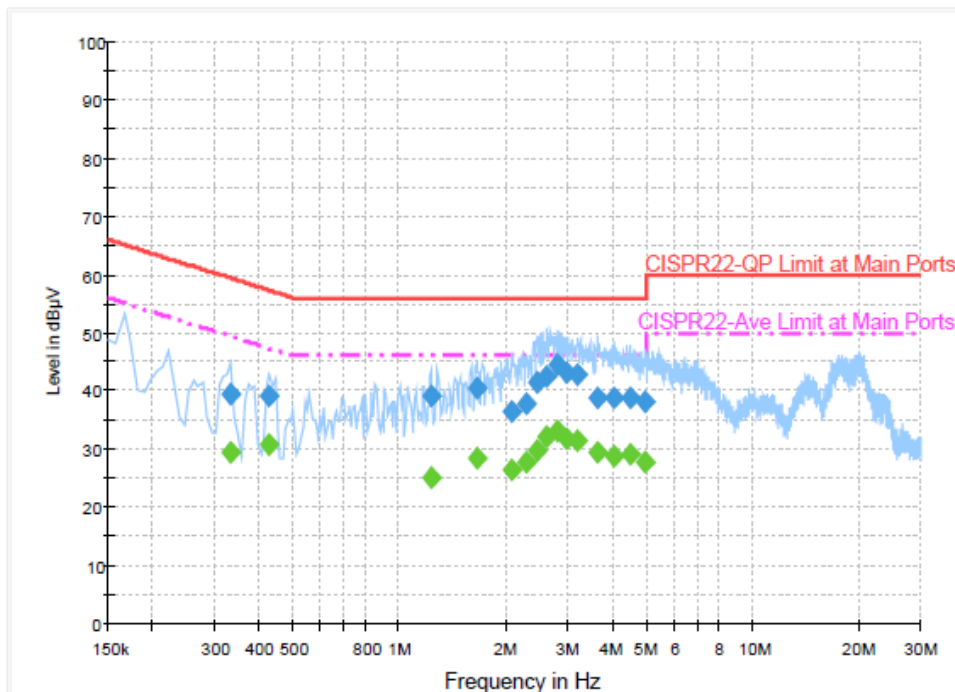**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.334000	29.3	Off	L1	19.4	20.1	49.4
0.430000	30.9	Off	L1	19.5	16.4	47.3
1.230000	25.0	Off	L1	19.6	21.0	46.0
1.662000	28.5	Off	L1	19.6	17.5	46.0
2.094000	26.5	Off	L1	19.7	19.5	46.0
2.302000	27.7	Off	L1	19.7	18.3	46.0
2.462000	29.9	Off	L1	19.7	16.1	46.0
2.614000	32.1	Off	L1	19.7	13.9	46.0
2.814000	33.1	Off	L1	19.7	12.9	46.0
2.990000	31.9	Off	L1	19.7	14.1	46.0
3.190000	31.3	Off	L1	19.7	14.7	46.0
3.646000	29.3	Off	L1	19.7	16.7	46.0
4.078000	28.8	Off	L1	19.7	17.2	46.0
4.502000	29.2	Off	L1	19.8	16.8	46.0
4.950000	27.8	Off	L1	19.8	18.2	46.0




Test Mode :	Mode 1	Temperature :	24~25°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	53~54%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN (2.4GHz) Link + MP3 + Earphone 2 + Battery + USB Cable (Charging from Adapter) + SIM 2		

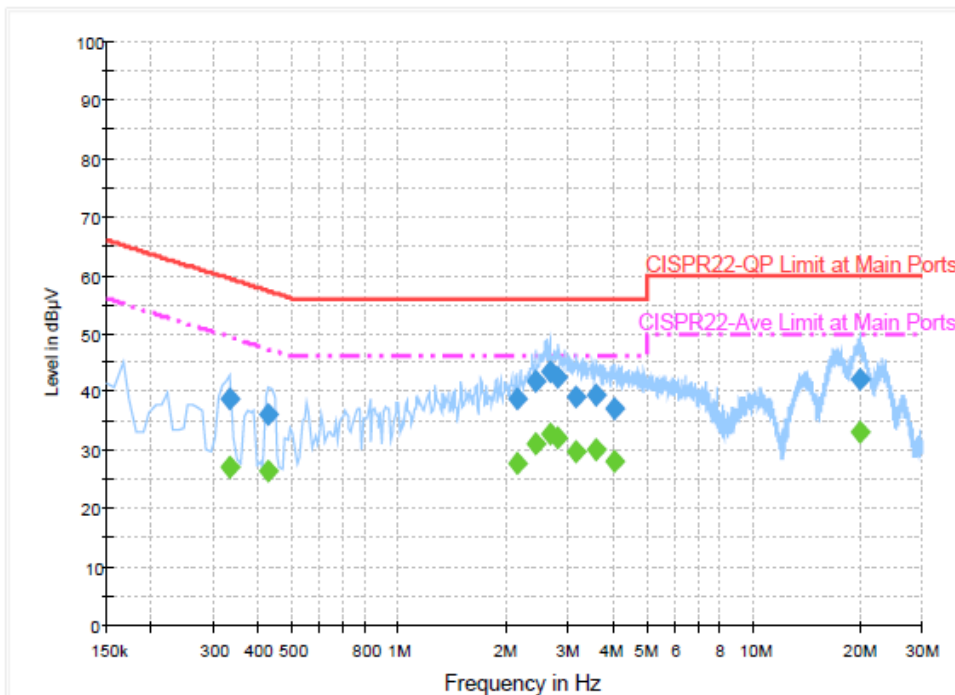**Final Result : Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.334000	38.7	Off	N	19.4	20.7	59.4
0.430000	36.2	Off	N	19.5	21.1	57.3
2.158000	38.8	Off	N	19.7	17.2	56.0
2.430000	41.9	Off	N	19.7	14.1	56.0
2.662000	43.6	Off	N	19.7	12.4	56.0
2.822000	42.5	Off	N	19.7	13.5	56.0
3.174000	39.2	Off	N	19.7	16.8	56.0
3.598000	39.4	Off	N	19.7	16.6	56.0
4.054000	37.1	Off	N	19.7	18.9	56.0
19.902000	42.1	Off	N	20.1	17.9	60.0



Test Mode :	Mode 1	Temperature :	24~25°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	53~54%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN (2.4GHz) Link + MP3 + Earphone 2 + Battery + USB Cable (Charging from Adapter) + SIM 2		

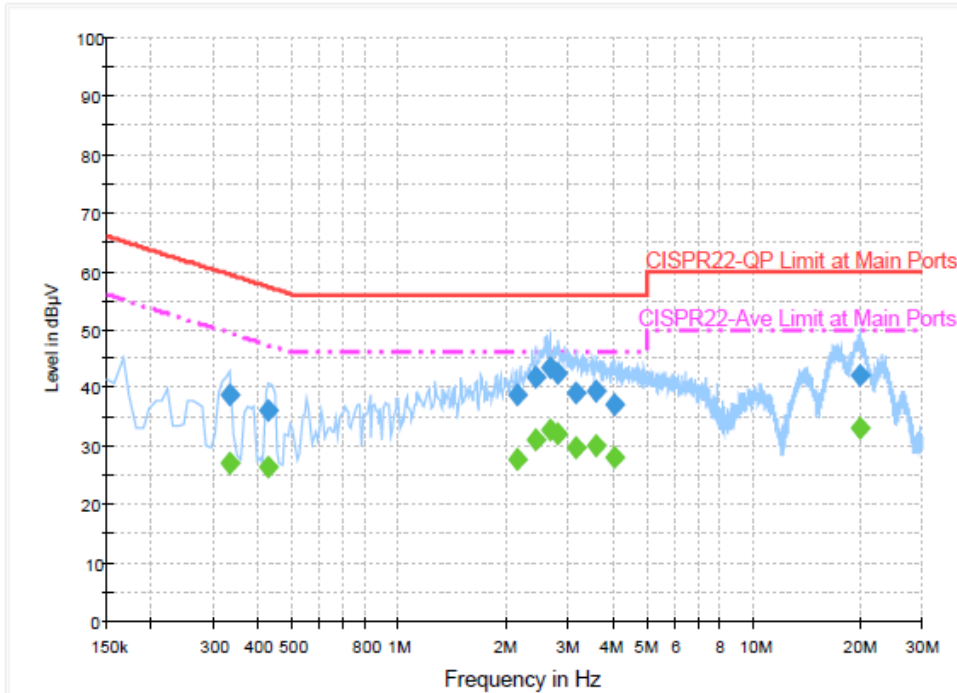**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.334000	27.2	Off	N	19.4	22.2	49.4
0.430000	26.6	Off	N	19.5	20.7	47.3
2.158000	27.8	Off	N	19.7	18.2	46.0
2.430000	31.1	Off	N	19.7	14.9	46.0
2.662000	32.9	Off	N	19.7	13.1	46.0
2.822000	32.2	Off	N	19.7	13.8	46.0
3.174000	29.8	Off	N	19.7	16.2	46.0
3.598000	30.0	Off	N	19.7	16.0	46.0
4.054000	28.2	Off	N	19.7	17.8	46.0
19.902000	32.9	Off	N	20.1	17.1	50.0



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
BT Base Station	Rohde & Schwarz	CBT	101136	BT 3.0 & 4.0	Sep. 24, 2014	May 04, 2015 ~ May 06, 2015	Sep. 23, 2015	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB41292344	300MHz~40GHz	Jan. 14, 2015	May 04, 2015 ~ May 06, 2015	Jan. 13, 2016	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	300MHz~40GHz	Jan. 14, 2015	May 04, 2015 ~ May 06, 2015	Jan. 13, 2016	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz~40GHz	Oct. 17, 2014	May 04, 2015 ~ May 06, 2015	Oct. 16, 2015	Conducted (TH02-HY)
Hygrometer	Testo	608-H2	41410069	N/A	Jul. 17, 2014	May 04, 2015 ~ May 06, 2015	Jul. 16, 2015	Conducted (TH02-HY)
RF cable	WOKEN	S05	S05-130708-038	N/A	Jan. 21, 2015	May 04, 2015 ~ May 06, 2015	Jan. 20, 2016	Conducted (TH02-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	May 10, 2015	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Dec. 01, 2014	May 10, 2015	Nov. 30, 2015	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Apr. 20, 2015	May 10, 2015	Apr. 19, 2016	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2014	May 10, 2015	Dec. 01, 2015	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2015	May 10, 2015	Jan. 01, 2016	Conduction (CO05-HY)
Test Software	N/A	EMC32	8.40.0	N/A	N/A	May 10, 2015	N/A	Conduction (CO05-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 24, 2014	May 04, 2015 ~ May 05, 2015	Nov. 23, 2015	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Oct. 24, 2014	May 04, 2015 ~ May 05, 2015	Oct. 23, 2015	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 03, 2014	May 04, 2015 ~ May 05, 2015	Oct. 02, 2015	Radiation (03CH11-HY)
Hygrometer	TECEPEL	DTN-303B	TP140325	N/A	Nov. 19, 2014	May 04, 2015 ~ May 05, 2015	Nov. 18, 2015	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 20, 2014	May 04, 2015 ~ May 05, 2015	Nov. 19, 2015	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHZ	Sep. 24, 2014	May 04, 2015 ~ May 05, 2015	Sep. 23, 2015	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24967/4 MY28419/4 MY28654/4	25GHz~40GHz	Nov. 06, 2014	May 04, 2015 ~ May 05, 2015	Nov. 05, 2015	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24967/4 MY28419/4 MY28654/4	30MHz~1GHz	Nov. 06, 2014	May 04, 2015 ~ May 05, 2015	Nov. 05, 2015	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24967/4 MY28419/4 MY28654/4	1GHz~25GHz	Nov. 06, 2014	May 04, 2015 ~ May 05, 2015	Nov. 05, 2015	Radiation (03CH11-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	May 04, 2015 ~ May 05, 2015	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	May 04, 2015 ~ May 05, 2015	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0-360 degree	N/A	May 04, 2015 ~ May 05, 2015	N/A	Radiation (03CH11-HY)
Preamplifier	MITEQ	AMF-7D-00101 800-30-10P	1902247	1GHz~18GHz	Nov. 25, 2014	May 04, 2015 ~ May 05, 2015	Nov. 24, 2015	Radiation (03CH11-HY)
Preamplifier	MITEQ	JS44-1800400 0-33-8P	1840917	18GHz ~ 40GHz	Jun. 09, 2014	May 04, 2015 ~ May 05, 2015	Jun. 08, 2015	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jul. 28, 2014	May 04, 2015 ~ May 05, 2015	Jul. 27, 2015	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA91705 84	18GHz- 40GHz	Nov. 03, 2014	May 04, 2015 ~ May 05, 2015	Nov. 02, 2015	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A	MY54130085	20Hz ~ 26.5GHz	Nov. 05, 2014	May 04, 2015 ~ May 05, 2015	Nov. 04, 2015	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY84209521	9KHz~1GHz	Dec. 04, 2014	May 04, 2015 ~ May 05, 2015	Dec. 03, 2015	Radiation (03CH11-HY)
Filter	Wainwright	WLKS1200-8S S	SN3	1.2G Low Pass	Oct. 01, 2014	May 04, 2015 ~ May 05, 2015	Sep. 30, 2015	Radiation (03CH11-HY)
Filter	Microwave	H3G018G1	SN477220	3.0G High Pass	Oct. 01, 2014	May 04, 2015 ~ May 05, 2015	Sep. 30, 2015	Radiation (03CH11-HY)
Test Software	Audix	E3	6.2009-8-24	N/A	N/A	May 04, 2015 ~ May 05, 2015	N/A	Radiation (03CH11-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9
---	-----



Appendix A. Radiated Spurious Emission

Test Engineer :	Jesse Wang and Derreck Chen	Temperature :	23~24°C
		Relative Humidity :	46~48%

<Bluetooth BR 1Mbps>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT DH5	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH00 2402MHz		2370.45	42.45	-31.55	74	43.29	27.19	6.01	34.04	100	80	P	H
		2370.45	17.63	-36.37	54	-	-	-	-	-	-	A	H
	*	2402	98.12	-	-	98.92	27.23	6.01	34.04	100	80	P	H
	*	2402	73.3	-	-	-	-	-	-	-	-	A	H
													H
													H
		2316.24	42.73	-31.27	74	43.89	27.01	5.89	34.06	374	115	P	V
		2316.24	17.91	-36.09	54	-	-	-	-	-	-	A	V
	*	2402	96.04	-	-	96.84	27.23	6.01	34.04	374	115	P	V
	*	2402	71.22	-	-	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		2364.15	42.7	-31.3	74	43.6	27.14	6.01	34.05	100	57	P	H
		2364.15	17.88	-36.12	54	-	-	-	-	-	-	A	H
	*	2441	100.09	-	-	100.7	27.37	6.04	34.02	100	57	P	H
	*	2441	75.27	-	-	-	-	-	-	-	-	A	H
		2484.23	42.12	-31.88	74	42.58	27.46	6.09	34.01	100	57	P	H
		2484.23	17.3	-36.7	54	-	-	-	-	-	-	A	H
		2364.34	42.4	-31.6	74	43.29	27.14	6.01	34.04	345	100	P	V
		2364.34	17.58	-36.42	54	-	-	-	-	-	-	A	V
	*	2441	97.02	-	-	97.63	27.37	6.04	34.02	345	100	P	V
	*	2441	72.2	-	-	-	-	-	-	-	-	A	V
		2492.4	42	-32	74	42.41	27.5	6.09	34	345	100	P	V
		2492.4	17.18	-36.82	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	98.14	-	-	98.62	27.46	6.07	34.01	100	57	P	H
	*	2480	73.32	-	-	-	-	-	-	-	-	A	H
		2483.83	44.06	-29.94	74	44.52	27.46	6.09	34.01	100	57	P	H
		2483.83	19.24	-34.76	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	96.42	-	-	96.9	27.46	6.07	34.01	345	98	P	V
	*	2480	71.6	-	-	-	-	-	-	-	-	A	V
		2484.46	42.53	-31.47	74	42.99	27.46	6.09	34.01	345	98	P	V
		2484.46	17.71	-36.29	54	-	-	-	-	-	-	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT DH5	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	37.23	-36.77	74	30.83	31.3	8.65	33.55	100	0	P	H
		4804	12.41	-41.59	54	-	-	-	-	-	-	A	H
													H
													H
		4804	36.9	-37.1	74	30.5	31.3	8.65	33.55	100	0	P	V
		4804	12.08	-41.92	54	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		4882	38.58	-35.42	74	31.97	31.41	8.74	33.54	100	0	P	H
		4882	13.76	-40.24	54	-	-	-	-	-	-	A	H
		7323	40.6	-33.4	74	28.3	36.32	10.44	34.46	100	0	P	H
		7323	15.78	-38.22	54	-	-	-	-	-	-	A	H
		4882	36.06	-37.94	74	29.45	31.41	8.74	33.54	100	0	P	V
		4882	11.24	-42.76	54	-	-	-	-	-	-	A	V
		7323	40.54	-33.46	74	28.24	36.32	10.44	34.46	100	0	P	V
		7323	15.72	-38.28	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	36.72	-37.28	74	29.93	31.54	8.79	33.54	100	0	P	H
		4960	11.9	-42.1	54	-	-	-	-	-	-	A	H
		7440	42.26	-31.74	74	29.67	36.59	10.52	34.52	100	0	P	H
		7440	17.44	-36.56	54	-	-	-	-	-	-	A	H
		4960	36.66	-37.34	74	29.87	31.54	8.79	33.54	100	0	P	V
		4960	11.84	-42.16	54	-	-	-	-	-	-	A	V
		7440	40.65	-33.35	74	28.06	36.59	10.52	34.52	100	0	P	V
		7440	15.83	-38.17	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



<Bluetooth EDR 2Mbps>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT 2DH5	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH00 2402MHz		2347.31	41.83	-32.17	74	42.83	27.1	5.95	34.05	100	78	P	H
		2347.31	17.01	-36.99	54	-	-	-	-	-	-	A	H
	*	2402	96.53	-	-	97.33	27.23	6.01	34.04	100	78	P	H
	*	2402	71.71	-	-	-	-	-	-	-	-	A	H
													H
													H
		2375.65	42.24	-31.76	74	43.08	27.19	6.01	34.04	374	115	P	V
		2375.65	17.42	-36.58	54	-	-	-	-	-	-	A	V
	*	2402	94.76	-	-	95.56	27.23	6.01	34.04	374	115	P	V
	*	2402	69.94	-	-	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		2370.23	41.66	-32.34	74	42.5	27.19	6.01	34.04	127	60	P	H
		2370.23	16.84	-37.16	54	-	-	-	-	-	-	A	H
	*	2441	99.5	-	-	100.11	27.37	6.04	34.02	127	60	P	H
	*	2441	74.68	-	-	-	-	-	-	-	-	A	H
		2491.1	42	-32	74	42.42	27.5	6.09	34.01	127	60	P	H
		2491.1	17.18	-36.82	54	-	-	-	-	-	-	A	H
		2351.61	41.84	-32.16	74	42.8	27.14	5.95	34.05	359	100	P	V
		2351.61	17.02	-36.98	54	-	-	-	-	-	-	A	V
	*	2441	98.25	-	-	98.86	27.37	6.04	34.02	359	100	P	V
	*	2441	73.43	-	-	-	-	-	-	-	-	A	V
		2497.53	41.94	-32.06	74	42.35	27.5	6.09	34	359	100	P	V
		2497.53	17.12	-36.88	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	96.18	-	-	96.66	27.46	6.07	34.01	100	56	P	H
	*	2480	71.36	-	-	-	-	-	-	-	-	A	H
		2483.76	43.39	-30.61	74	43.85	27.46	6.09	34.01	100	56	P	H
		2483.76	18.57	-35.43	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	94.7	-	-	95.18	27.46	6.07	34.01	346	97	P	V
	*	2480	69.88	-	-	-	-	-	-	-	-	A	V
		2483.76	43.27	-30.73	74	43.73	27.46	6.09	34.01	346	97	P	V
		2483.76	18.45	-35.55	54	-	-	-	-	-	-	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT 2DH5	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	35.72	-38.28	74	29.32	31.3	8.65	33.55	100	0	P	H
		4804	10.9	-43.1	54	-	-	-	-	-	-	A	H
													H
													H
		4804	35.35	-38.65	74	28.95	31.3	8.65	33.55	100	0	P	V
		4804	10.53	-43.47	54	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		4882	37.85	-36.15	74	31.24	31.41	8.74	33.54	100	0	P	H
		4882	13.03	-40.97	54	-	-	-	-	-	-	A	H
		7323	40.47	-33.53	74	28.17	36.32	10.44	34.46	100	0	P	H
		7323	15.65	-38.35	54	-	-	-	-	-	-	A	H
		4882	35.41	-38.59	74	28.8	31.41	8.74	33.54	100	0	P	V
		4882	10.59	-43.41	54	-	-	-	-	-	-	A	V
		7323	40.91	-33.09	74	28.61	36.32	10.44	34.46	100	0	P	V
		7323	16.09	-37.91	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	36.2	-37.8	74	29.41	31.54	8.79	33.54	100	0	P	H
		4960	11.38	-42.62	54	-	-	-	-	-	-	A	H
		7440	40.88	-33.12	74	28.29	36.59	10.52	34.52	100	0	P	H
		7440	16.06	-37.94	54	-	-	-	-	-	-	A	H
		4960	35.72	-38.28	74	28.93	31.54	8.79	33.54	100	0	P	V
		4960	10.9	-43.1	54	-	-	-	-	-	-	A	V
		7440	40.7	-33.3	74	28.11	36.59	10.52	34.52	100	0	P	V
		7440	15.88	-38.12	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



<Bluetooth EDR 3Mbps>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT 3DH5	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH00 2402MHz		2344.71	42.2	-31.8	74	43.2	27.1	5.95	34.05	100	78	P	H
		2344.71	17.41	-36.59	54	-	-	-	-	-	-	A	H
	*	2402	96.66	-	-	97.46	27.23	6.01	34.04	100	78	P	H
	*	2402	71.87	-	-	-	-	-	-	-	-	A	H
													H
													H
		2378.12	42.37	-31.63	74	43.21	27.19	6.01	34.04	373	119	P	V
		2378.12	17.58	-36.42	54	-	-	-	-	-	-	A	V
	*	2402	93.78	-	-	94.58	27.23	6.01	34.04	373	119	P	V
	*	2402	68.99	-	-	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		2377.1	42.31	-31.69	74	43.15	27.19	6.01	34.04	127	60	P	H
		2377.1	17.52	-36.48	54	-	-	-	-	-	-	A	H
	*	2441	99.69	-	-	100.3	27.37	6.04	34.02	127	60	P	H
	*	2441	74.9	-	-	-	-	-	-	-	-	A	H
		2497.15	41.82	-32.18	74	42.23	27.5	6.09	34	127	60	P	H
		2497.15	17.03	-36.97	54	-	-	-	-	-	-	A	H
		2389.8	41.88	-32.12	74	42.68	27.23	6.01	34.04	361	100	P	V
		2389.8	17.09	-36.91	54	-	-	-	-	-	-	A	V
	*	2441	98.23	-	-	98.84	27.37	6.04	34.02	361	100	P	V
	*	2441	73.44	-	-	-	-	-	-	-	-	A	V
		2499.62	41.65	-32.35	74	42.06	27.5	6.09	34	361	100	P	V
		2499.62	16.86	-37.14	54							A	V



BT CH 78 2480MHz	*	2480	96.27	-	-	96.75	27.46	6.07	34.01	100	56	P	H
	*	2480	71.48	-	-	-	-	-	-	-	-	A	H
		2483.52	44.18	-29.82	74	44.64	27.46	6.09	34.01	100	56	P	H
		2483.52	19.39	-34.61	54							A	H
													H
													H
	*	2480	94.77	-	-	95.25	27.46	6.07	34.01	346	97	P	V
	*	2480	69.98	-	-	-	-	-	-	-	-	A	V
		2483.9	44.08	-29.92	74	44.54	27.46	6.09	34.01	346	97	P	V
		2483.9	19.29	-34.71	54	-	-	-	-	-	-	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT 3DH5	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	34.93	-39.07	74	28.53	31.3	8.65	33.55	100	0	P	H
		4804	10.14	-43.86	54	-	-	-	-	-	-	A	H
													H
													H
		4804	35.21	-38.79	74	28.81	31.3	8.65	33.55	100	0	P	V
		4804	10.42	-43.58	54	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		4882	35.08	-38.92	74	28.47	31.41	8.74	33.54	100	0	P	H
		4882	10.29	-43.71	54	-	-	-	-	-	-	A	H
		7323	41.36	-32.64	74	29.06	36.32	10.44	34.46	100	0	P	H
		7323	16.57	-37.43	54	-	-	-	-	-	-	A	H
		4882	35.54	-38.46	74	28.93	31.41	8.74	33.54	100	0	P	V
		4882	10.75	-43.25	54	-	-	-	-	-	-	A	V
		7323	40.4	-33.6	74	28.1	36.32	10.44	34.46	100	0	P	V
		7323	15.61	-38.39	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	35.75	-38.25	74	28.96	31.54	8.79	33.54	100	0	P	H
		4960	10.96	-43.04	54	-	-	-	-	-	-	A	H
		7440	41.11	-32.89	74	28.52	36.59	10.52	34.52	100	0	P	H
		7440	16.32	-37.68	54	-	-	-	-	-	-	A	H
		4960	34.7	-39.3	74	27.91	31.54	8.79	33.54	100	0	P	V
		4960	9.91	-44.09	54	-	-	-	-	-	-	A	V
		7440	42.56	-31.44	74	29.97	36.59	10.52	34.52	100	0	P	V
		7440	17.77	-36.23	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT 3DH5	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
2.4GHz BT LF		81.57	18.31	-21.69	40	42.15	6.91	1.04	31.79	-	-	P	H
		132.33	24.98	-18.52	43.5	43.89	11.41	1.46	31.78	111	62	P	H
		250.86	14.6	-31.4	46	32.34	12.09	1.94	31.77	-	-	P	H
		419	17.02	-28.98	46	29.77	16.66	2.41	31.82	-	-	P	H
		596.8	19.55	-26.45	46	30.27	18.43	2.89	32.04	-	-	P	H
		858.6	22.27	-23.73	46	30.35	20.11	3.44	31.63	-	-	P	H
													H
													H
													H
													H
													H
													H
		75.9	23.75	-16.25	40	48.61	5.89	1.04	31.79	134	112	P	V
		175.26	14.96	-28.54	43.5	36.61	8.49	1.64	31.78	-	-	P	V
		272.46	14.68	-31.32	46	32.11	12.4	1.94	31.77	-	-	P	V
		391.7	15.88	-30.12	46	30.07	15.29	2.32	31.8	-	-	P	V
		618.5	19.98	-26.02	46	30.09	18.97	2.96	32.04	-	-	P	V
		852.3	21.7	-24.3	46	29.75	20.18	3.44	31.67	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	H orizontal or V ertical

A calculation example for radiated spurious emission is shown as below:

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.