



Valued Quality. Delivered.

TEST REPORT

Report Number: 15061681HKG-001

Application
for
Original Grant of 47 CFR Part 15 Certification
RSS-247 Issue 1 Equipment Certification

Streaming Music Player, Vault and CD-Ripper

FCC ID: Q2O-VAULT2
IC: 152B-VAULT2

This report contains the data of Bluetooth 4.0 BLE portion only.

Prepared and Checked by:

Approved by:

Signed On File

Wong Cheuk Ho, Herbert
Lead Engineer

Wong Kwok Yeung, Kenneth
Lead Engineer
Sep 24, 2015

- Intertek's standard Terms and Conditions can be obtained at our website: <http://www.intertek.com/terms/>.
- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

INTERTEK TESTING SERVICES

GENERAL INFORMATION

Applicant Name:	Lenbrook Industries Limited
Applicant Address:	Room D, 11th Floor, Wing Cheong Commercial Building, 19-25 Jervois Street, Central, Hong Kong.
Contact Person:	Jes Arcenal
Tel:	(852) 2517 8292
Fax:	(852) 2517 4404
e-mail:	Jes_arcenal@nadelectronics.com
FCC Specification Standard:	FCC Part 15, 2014 Edition
IC Specification Standard:	RSS-247 Issue 1, May 2015 RSS-Gen Issue 4, December 2014
FCC ID:	Q2O-VAULT2
IC:	152B-VAULT2
Model(s):	VAULT 2
Type of EUT:	Digital Transmission System Transmitter
Description of EUT:	Streaming Music Player, Vault and CD-Ripper
Serial Number:	N/A
Sample Receipt Date:	Jul 10, 2015
Date of Test:	Jul 10, 2015 to Sep 22, 2015
Report Date:	Sep 24, 2015
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

INTERTEK TESTING SERVICES

Table of Contents

1.0 Test Results Summary & Statement of Compliance	4
1.1 Summary of Test Results	4
1.2 Statement of Compliance	4
2.0 General Description	6
2.1 Product Description	6
2.2 Test Methodology	7
2.3 Test Facility	7
3.0 System Test Configuration	9
3.1 Justification	9
3.2 EUT Exercising Software	10
3.3 Details of EUT and Description of Accessories	11
3.4 Measurement Uncertainty	11
4.0 Test Results	13
4.1 Maximum Conducted Output Power at Antenna Terminals	13
4.2 Minimum 6dB RF Bandwidth	15
4.3 Maximum Power Spectral Density	18
4.4 Out of Band Conducted Emissions	21
4.5 Field Strength Calculation	25
4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions ..	26
4.6.1 Radiated Emission Configuration Photograph	26
4.6.2 Radiated Emission Data	26
4.6.3 Transmitter Duty Cycle Calculation	32
4.7 AC Power Line Conducted Emission	32
4.7.1 AC Power Line Conducted Emission Configuration Photograph	32
4.7.2 AC Power Line Conducted Emission Data	32
5.0 Equipment List	37

INTERTEK TESTING SERVICES

EXHIBIT 1 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

INTERTEK TESTING SERVICES

1.0 Test Results Summary & Statement of Compliance

1.1 Summary of Test Results

Test Items	FCC Part 15 Section	RSS-210/ RSS-Gen# Section	Results	Details see section
Antenna Requirement	15.203	7.1.2#	Pass	2.1
Max. Conducted Output Power (peak)	15.247(b)(3)&(4)	5.4(4)	Pass	4.1
Min. 6dB RF Bandwidth	15.247(a)(2)	5.2(1)	Pass	4.2
Max. Power Density (average)	15.247(e)	5.2(2)	Pass	4.3
Out of Band Antenna Conducted Emission	15.247(d)	5.5	Pass	4.4
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d), 15.209 & 15.109	5.5	Pass	4.6
AC Power Line Conducted Emission	15.207 & 15.107	7.2.4#	Pass	4.7

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

1.2 Statement of Compliance

The equipment under test is found to be complying with the following standard:

FCC Part 15, 2014 Edition
RSS-247 Issue 1, May 2015
RSS-Gen Issue 4, December 2014

INTERTEK TESTING SERVICES

EXHIBIT 2 GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

2.0 **General Description**

2.1 Product Description

The Equipment-Under-Test (EUT) VAULT 2 is a Streaming Music Player, Vault and CD-Ripper. The EUT contains a Bluetooth module which has Bluetooth 4.0 BLE and Bluetooth 3.0 features. The EUT can accept analog audio signal, digital audio signal, music content from CD, harddisk and wireless audio signal via Bluetooth devices. The EUT is powered by 100-240VAC.

For Bluetooth module:

For Bluetooth 4.0 BLE mode, it occupies a frequency range from 2402MHz to 2480MHz (40 channels with channel spacing of 2MHz). It transmits via GFSK modulation.

For Bluetooth 3.0 mode, it occupies a frequency range from 2402MHz to 2480MHz (79 channels with channel spacing of 1MHz). It transmits via GFSK modulation.

The antenna(s) used in the EUT is internal, integral.

The circuit description is saved with filename: descri.pdf.

INTERTEK TESTING SERVICES

2.2 Test Methodology

Radiated emission measurements was performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in Open Area Test Sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No. 558074 D01 v03r03 (09-June-2015). All other measurements were made in accordance with the procedures in RSS-Gen Issue 4 (2014).

2.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC and the Industry Canada.

2.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver (Bluetooth 4.0 BLE portion).

INTERTEK TESTING SERVICES

EXHIBIT 3 SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

3.0 **System Test Configuration**

3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by 120VAC.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209/ RSS-247 2.5. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109/ RSS-247 Section 5.5 Limits.

INTERTEK TESTING SERVICES

3.1 Justification – Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.2.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.6.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

The EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT power cord connected to one LISN (Line impedance stabilization network), which provided 50ohm coupling impedance for measuring instrument. Meanwhile, the peripheral or support equipment power cords connected to a separate LISN. The ac powers for all LISNs were obtained from the same power source. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled. Power cords of non-EUT equipment (peripherals) were not bundled. AC power cords of peripheral equipments draped over the rear edge of the table, and routed them down onto the floor of the ac power line conducted emission test site to the second LISN.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

Different data rates have been tested. Worst case is reported only.

All relevant operation modes have been tested, and the worst case data is included in this report.

All data rates were tested under normal mode of Bluetooth 4.0 BLE. Only the worst-case data is shown in the report for GFSK.

3.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

INTERTEK TESTING SERVICES

3.3 Details of EUT and Description of Accessories

Details of EUT:

- (1) The EUT is powered by 120VAC

Description of Accessories:

- (1) 1 X power cable of 1.8m in length (with termination)
(Supplied by Applicant)
- (2) 4 X audio cable of 1m in length (with termination)
- (3) 1 X digital audio cable of 1m in length (with termination)
- (4) 1 X LAN cable of 1m in length (with termination)
- (5) 2 X IR Trigger Control cable of 1m in length (with termination)
- (6) 1 X 4GB USB flash drive
(Supplied by Intertek)

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test at a level of confidence of 95% has been considered. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are $\pm 5.3\text{dB}$ and $\pm 0.99\text{dB}$ respectively. The value of the Measurement uncertainty for conducted emission test is $\pm 4.2\text{dB}$.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

INTERTEK TESTING SERVICES


EXHIBIT 4 TEST RESULTS

INTERTEK TESTING SERVICES

4.0 Test Results

RF Conducted measurement Test Setup by power meter

The figure below shows the test setup, which is utilized to make these measurements.



4.1 Maximum Conducted (peak) Output Power at Antenna Terminals

The antenna port of the EUT was connected to the input of a power meter.

- ☒ The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to the obtain power at the EUT antenna terminals. The measurement procedure 9.1.2 was used.
- ☐ The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

Bluetooth 4.0 BLE Antenna Gain = 2 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2402	4.62	2.90
Middle Channel: 2442	7.02	5.04
High Channel: 2480	6.72	4.70

INTERTEK TESTING SERVICES

4.1 Maximum Conducted Output Power at Antenna Terminals – Cont'd

Cable loss : 0.5 dB

Cable loss, external attenuation: ☒ included in OFFSET function
☐ added to SA raw reading

Bluetooth 4.0 BLE

max. conducted (peak) output level = 7.02 dBm

Limits:


☒ 1W (30dBm) for antennas with gains of 6dBi or less

☐ ___W (___dBm) for antennas with gains more than 6dBi

INTERTEK TESTING SERVICES

RF Conduct measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.



4.2 Minimum 6dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

Bluetooth 4.0 BLE (GFSK)	
Frequency (MHz)	6dB Bandwidth (kHz)
Low Channel: 2402	740
Middle Channel: 2442	740
High Channel: 2480	740

Limits:


6 dB bandwidth shall be at least 500kHz

The plots of 6dB RF bandwidth and occupied bandwidth are saved as below.

INTERTEK TESTING SERVICES


Plots of 6dB RF bandwidth

Bluetooth 4.0 BLE, Lowest Channel

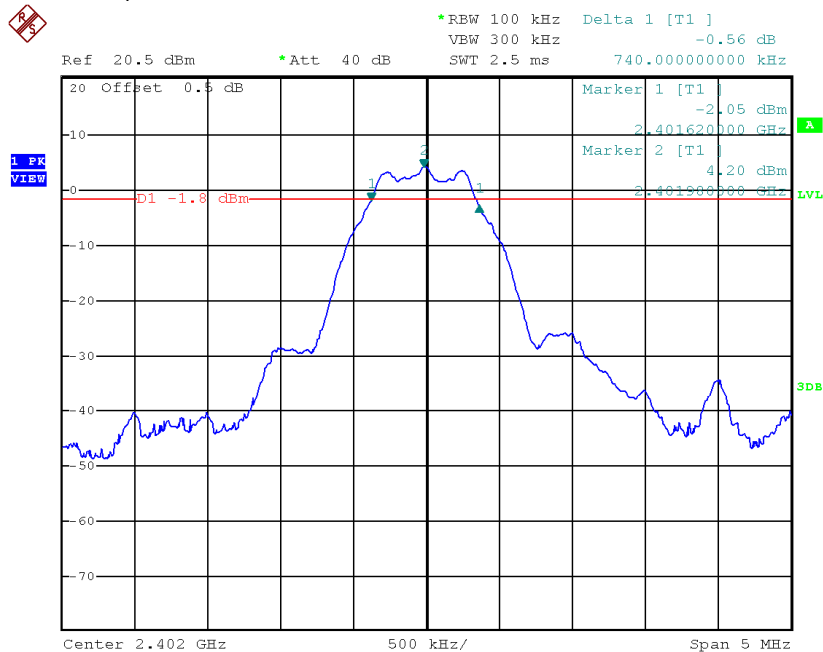

Date: 18.SEP.2015 15:21:53


Bluetooth 4.0 BLE, Middle Channel

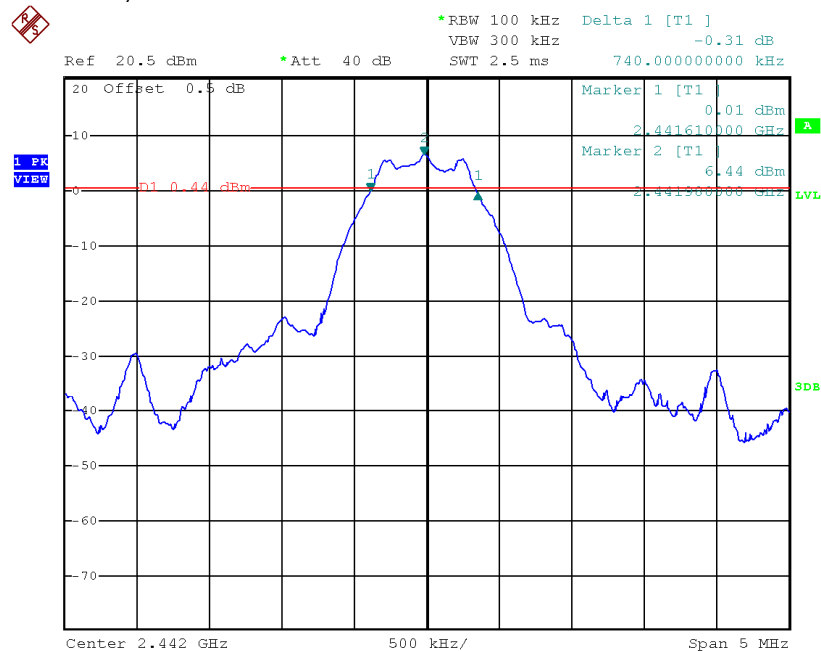

Date: 18.SEP.2015 15:45:34

INTERTEK TESTING SERVICES

Plots of 6dB RF bandwidth
Bluetooth 4.0 BLE, Highest Channel

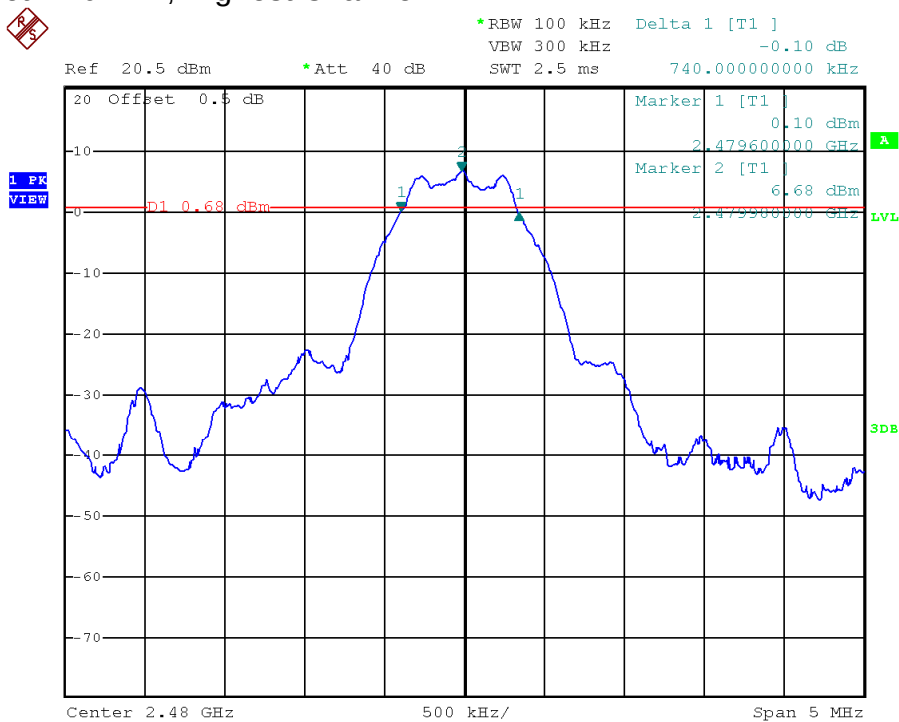

Date: 18.SEP.2015 15:53:48

INTERTEK TESTING SERVICES

4.3 Maximum Power Spectral Density

Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD-1 was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

Bluetooth 4.0 BLE (GFSK)	
Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2402	4.16
Middle Channel: 2442	6.45
High Channel: 2480	6.74


Cable Loss: 0.5 dB

Limit:
8dBm

INTERTEK TESTING SERVICES


Plots of power spectral density

Bluetooth 4.0 BLE, Lowest channel

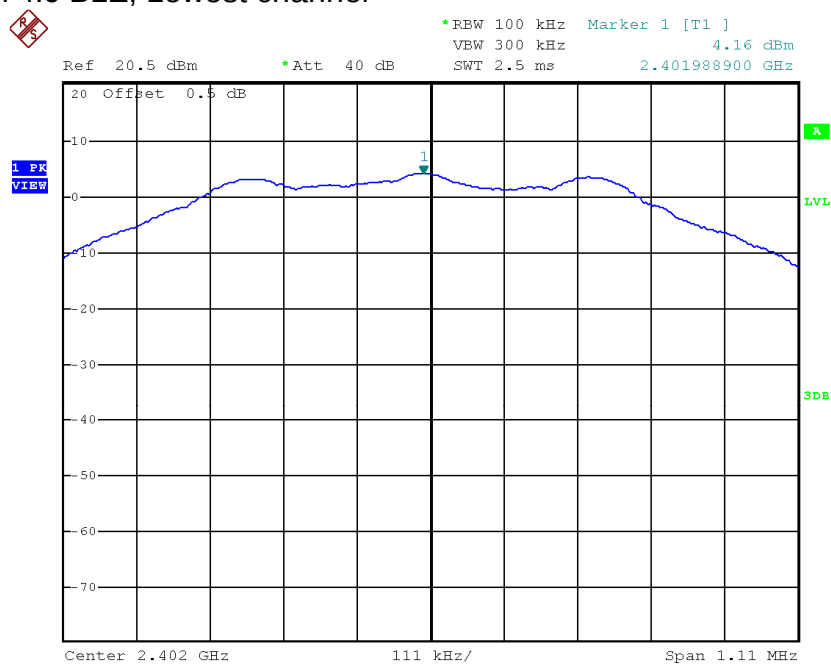

Date: 18.SEP.2015 16:03:00

Bluetooth 4.0 BLE, Middle channel

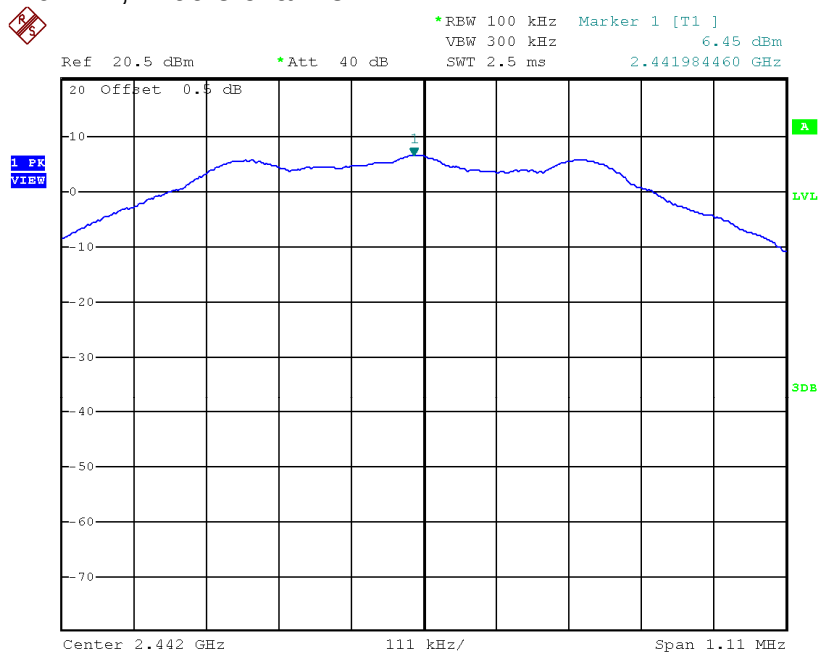


Date: 18.SEP.2015 16:07:50

INTERTEK TESTING SERVICES

Plots of power spectral density

Bluetooth 4.0 BLE, Highest channel

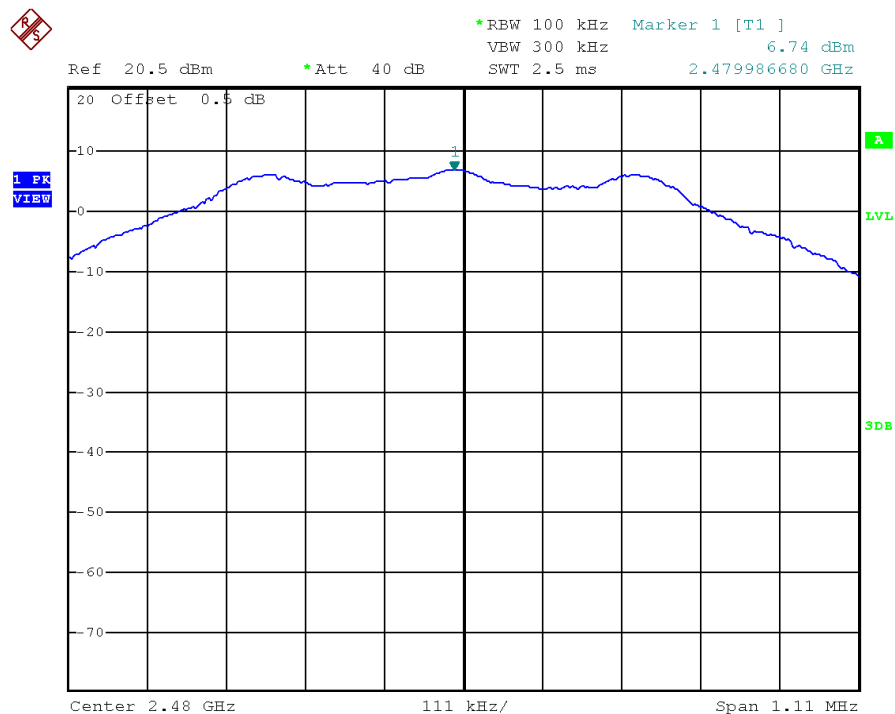

Date: 18.SEP.2015 16:12:03

INTERTEK TESTING SERVICES

4.4 Out of Band Conducted Emissions

The maximum conducted (peak) output power was used to demonstrate compliance as described in 9.1. Then the display line (in red) shown in the following plots denotes the limit at 20dB below maximum measured in-band peak PSD level in 100 KHz bandwidth.

The measurement procedures under sections 11 of KDB558074 D01 v03r03 (09-June-2015) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.

Limits:


All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB below the maximum measured in-band peak PSD level.

The plots of out of band conducted emissions are as below.

INTERTEK TESTING SERVICES


Plots of out of band conducted emissions

Bluetooth 4.0 BLE, Lowest Channel, Plot A

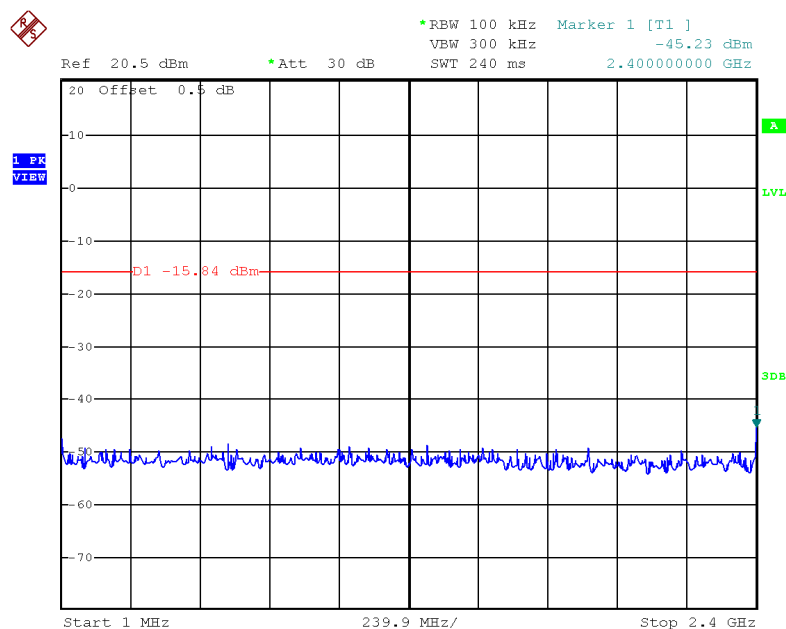

Date: 18.SEP.2015 16:39:42

Bluetooth 4.0 BLE, Lowest Channel, Plot B

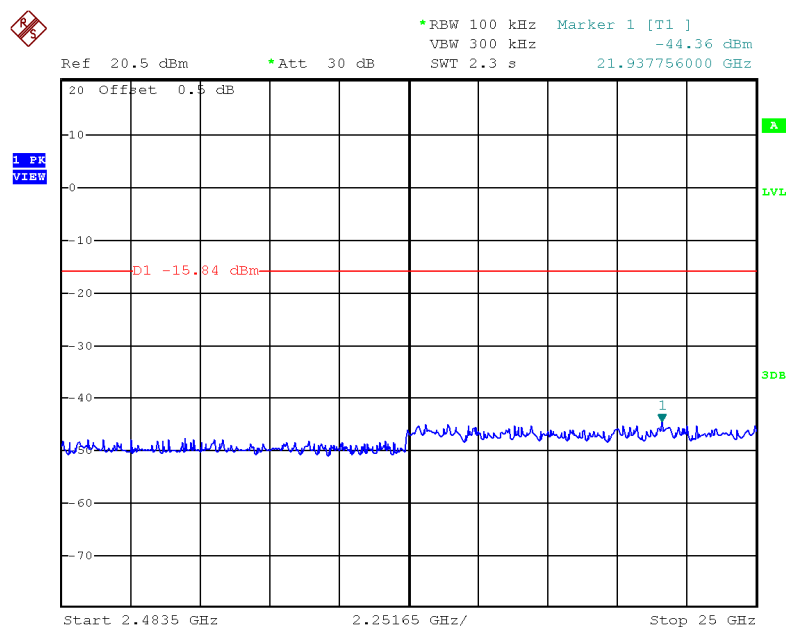


Date: 18.SEP.2015 16:38:36

INTERTEK TESTING SERVICES


Plots of out of band conducted emissions

Bluetooth 4.0 BLE, Middle Channel, Plot A

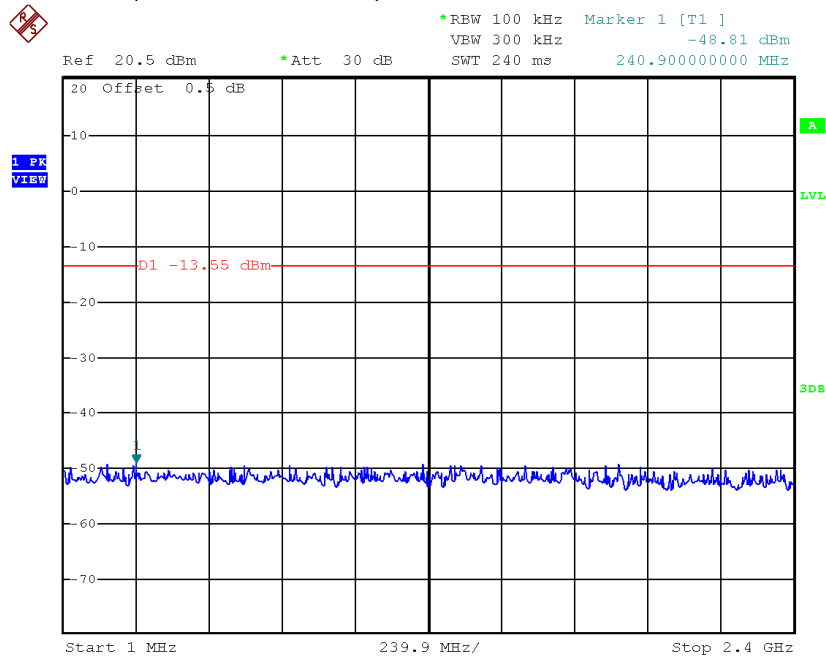

Date: 18.SEP.2015 16:59:44

Bluetooth 4.0 BLE, Middle Channel, Plot B

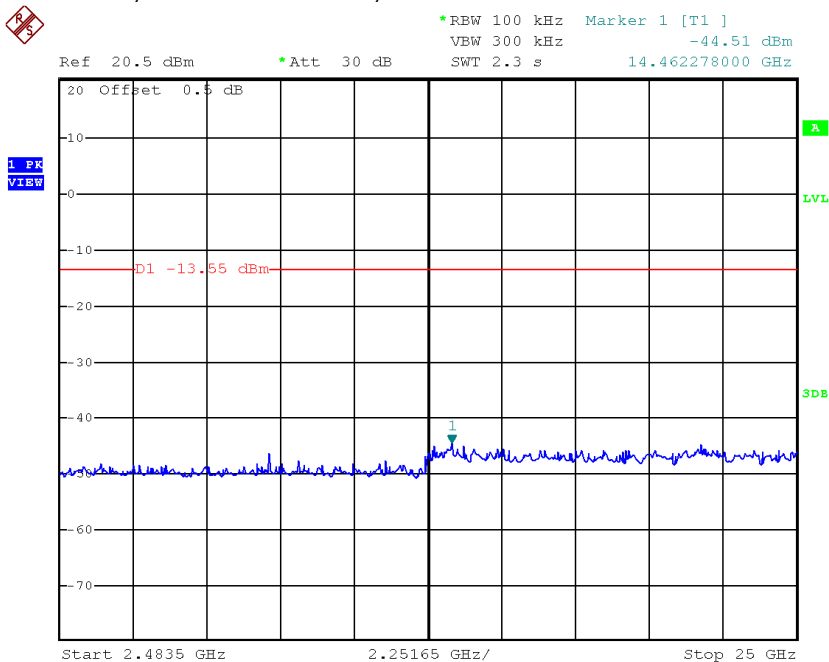


Date: 18.SEP.2015 17:00:16

INTERTEK TESTING SERVICES


Plots of out of band conducted emissions

Bluetooth 4.0 BLE, Highest Channel, Plot A

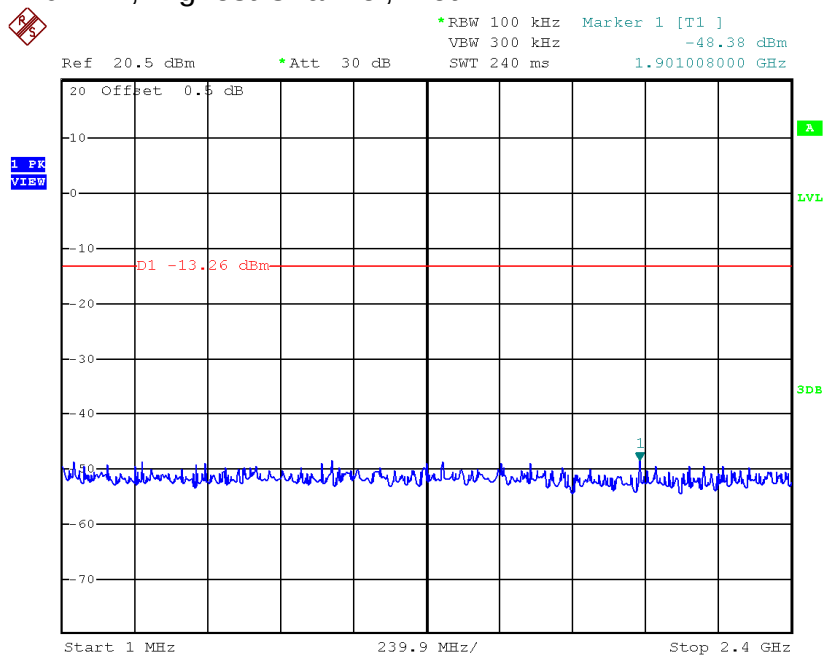

Date: 18.SEP.2015 17:09:53

Bluetooth 4.0 BLE, Highest Channel, Plot B

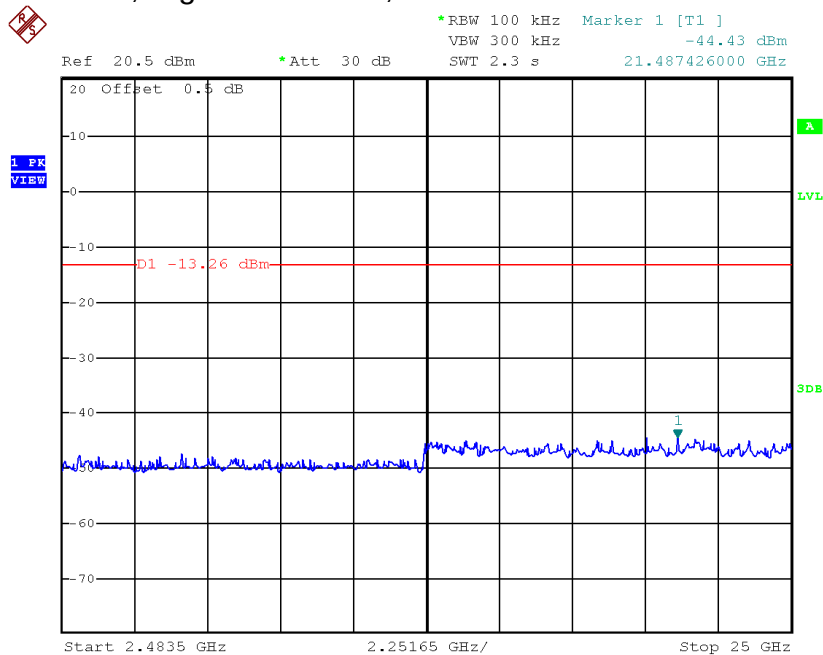

Date: 18.SEP.2015 17:09:07

INTERTEK TESTING SERVICES

4.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in dB μ V/m
 RA = Receiver Amplitude (including preamplifier) in dB μ V
 CF = Cable Attenuation Factor in dB
 AF = Antenna Factor in dB
 AG = Amplifier Gain in dB
 PD = Pulse Desensitization in dB
 AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dB μ V/m. This value in dB μ V/m is converted to its corresponding level in μ V/m.

RA = 62.0 dB μ V
AF = 7.4 dB
CF = 1.6 dB
AG = 29.0 dB
PD = 0.0 dB
AV = -10 dB

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

INTERTEK TESTING SERVICES

4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

4.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission
at

2483.5 MHz

The worst case radiated emission configuration photographs are saved with filename:
config photos.pdf

4.6.2 Radiated Emission Data

The data in tables 1-10 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 1.2 dB margin compare with average limit

INTERTEK TESTING SERVICES

Mode: TX-Channel 00

Table 1
Bluetooth 4.0 BLE
Radiated Emission Data

Polarization	Frequency (MHz)	Reading	Correction Factor	Net at 3m - Peak (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	2390.000	54.9	-3.5	51.4	0	51.4	54.0	-2.6
V	4804.000	45.1	6.5	51.6	0	51.6	54.0	-2.4
V	12010.000	31.7	20.1	51.8	0	51.8	54.0	-2.2

Polarization	Frequency (MHz)	Reading	Correction Factor	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	2390.000	54.9	-3.5	51.4	74.0	-22.6
V	4804.000	45.1	6.5	51.6	74.0	-22.4
V	12010.000	31.7	20.1	51.8	74.0	-22.2

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 3.3.
 6. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 7. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

INTERTEK TESTING SERVICES

Mode: TX-Channel 20

Table 2
Bluetooth 4.0 BLE
Radiated Emission Data

Polarization	Frequency (MHz)	Reading	Correction Factor	Net at 3m - Peak (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	4884.000	44.7	6.7	51.4	0	51.4	54.0	-2.6
V	7326.000	37.9	13.7	51.6	0	51.6	54.0	-2.4
V	12210.000	31.3	20.5	51.8	0	51.8	54.0	-2.2

Polarization	Frequency (MHz)	Reading	Correction Factor	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	4884.000	44.7	6.7	51.4	74.0	-22.6
V	7326.000	37.9	13.7	51.6	74.0	-22.4
V	12210.000	31.3	20.5	51.8	74.0	-22.2

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 3.3.
 6. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
 7. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

INTERTEK TESTING SERVICES

Mode: TX-Channel 39

Table 3
Bluetooth 4.0 BLE
Radiated Emission Data

Polarization	Frequency (MHz)	Reading	Correction Factor	Net at 3m - Peak (dBμV/m)	Average Factor (dB)	Calculated at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	2483.500	56.3	-3.5	52.8	0	52.8	54.0	-1.2
V	4960.000	44.4	6.8	51.2	0	51.2	54.0	-2.8
V	7440.000	38.0	13.8	51.8	0	51.8	54.0	-2.2
V	12400.000	31.0	20.8	51.8	0	51.8	54.0	-2.2

Polarization	Frequency (MHz)	Reading	Correction Factor	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	2483.500	56.3	-3.5	52.8	74.0	-21.2
V	4960.000	44.4	6.8	51.2	74.0	-22.8
V	7440.000	38.0	13.8	51.8	74.0	-22.2
V	12400.000	31.0	20.8	51.8	74.0	-22.2

- NOTES: 1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 3.3.
6. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
7. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

INTERTEK TESTING SERVICES

Mode: EUT Transmitting

Table 4

Radiated Emission Data


Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	50.326	43.6	16	11.0	38.6	40.0	-1.4
V	125.005	38.7	16	14.0	36.7	43.5	-6.8
V	214.857	34.8	16	17.0	35.8	43.5	-7.7
V	250.006	34.3	16	20.0	38.3	46.0	-7.7
V	375.008	31.5	16	24.0	39.5	46.0	-6.5
V	500.013	30.4	16	26.0	40.4	46.0	-5.6
V	625.018	23.8	16	29.0	36.8	46.0	-9.2
V	750.020	22.3	16	30.0	36.3	46.0	-9.7
V	875.025	19.8	16	32.0	35.8	46.0	-10.2

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 3.3.


INTERTEK TESTING SERVICES

Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

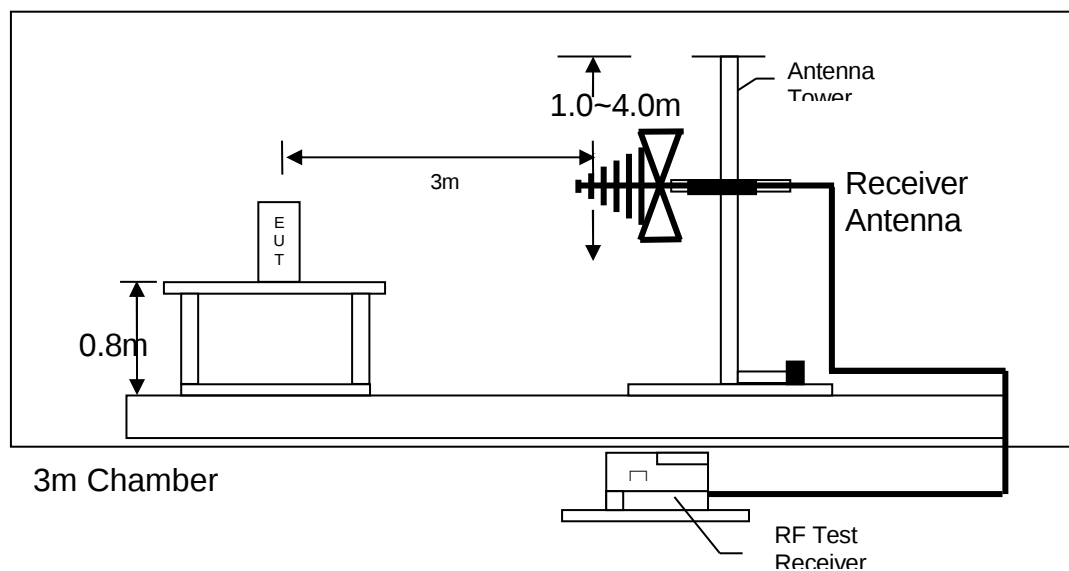

Test setup of radiated emissions upto 1GHz

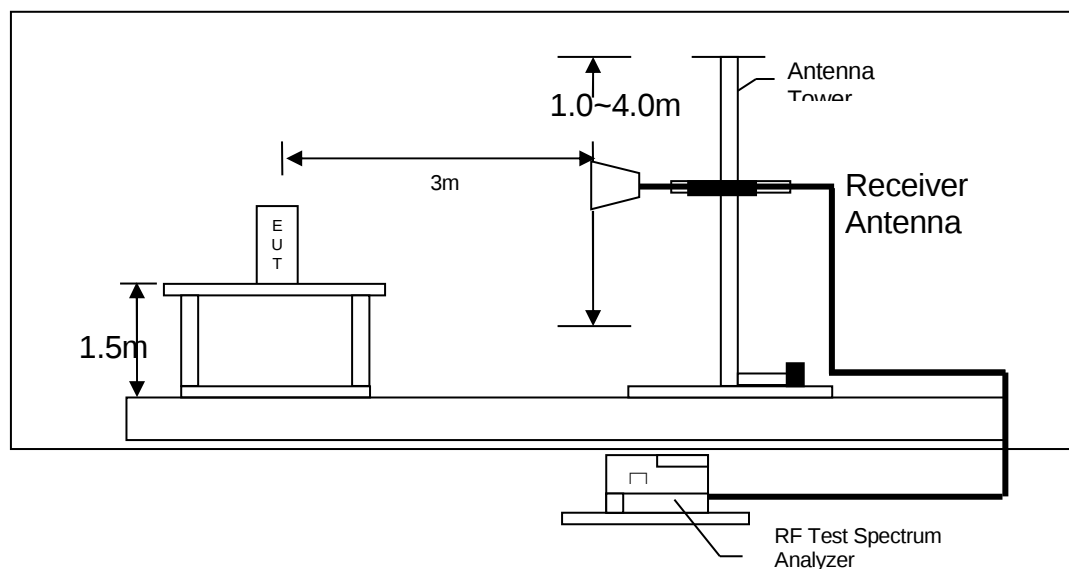

Test setup of radiated emissions above 1GHz

INTERTEK TESTING SERVICES

4.6.3 Transmitter Duty Cycle Calculation

Not applicable – No average factor is required.

4.7 AC Power Line Conducted Emission

- ☐ Not applicable – EUT is only powered by battery for operation.
- ☒ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

4.7.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration
at

23.127 MHz

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

4.7.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance

Passed by 0.8 dB margin compare with average limit

INTERTEK TESTING SERVICES

Model: VAULT 2

Worst-Case Operating Mode: EUT Transmitting

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL	dB μ V	DELTA LIMIT dB
1 Quasi Peak	154.5 kHz	52.12	N	-13.62
2 CISPR Average	154.5 kHz	47.13	N	-8.61
2 CISPR Average	240 kHz	41.11	N	-10.98
1 Quasi Peak	271.5 kHz	44.20	N	-16.86
1 Quasi Peak	348 kHz	42.00	N	-17.00
2 CISPR Average	402 kHz	36.46	N	-11.34
1 Quasi Peak	429 kHz	48.54	L1	-8.72
2 CISPR Average	442.5 kHz	40.98	N	-6.03
1 Quasi Peak	618 kHz	47.51	N	-8.48
2 CISPR Average	618 kHz	41.20	N	-4.79
1 Quasi Peak	1.032 MHz	41.79	L1	-14.20
2 CISPR Average	1.0545 MHz	35.09	L1	-10.90
1 Quasi Peak	1.0995 MHz	40.68	L1	-15.31
2 CISPR Average	1.0995 MHz	35.12	L1	-10.87
2 CISPR Average	1.644 MHz	33.68	L1	-12.31
1 Quasi Peak	1.6485 MHz	39.92	L1	-16.07
1 Quasi Peak	2.229 MHz	39.88	L1	-16.11
2 CISPR Average	2.229 MHz	32.69	N	-13.30
2 CISPR Average	3.3945 MHz	30.80	L1	-15.19
1 Quasi Peak	3.543 MHz	37.58	L1	-18.42


EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL	dB μ V	DELTA LIMIT dB
2 CISPR Average	4.2855 MHz	30.56	L1	-15.43
1 Quasi Peak	4.686 MHz	36.20	L1	-19.79
2 CISPR Average	6.702 MHz	33.40	N	-16.59
1 Quasi Peak	7.9215 MHz	39.53	N	-20.46
2 CISPR Average	8.718 MHz	35.76	N	-14.23
1 Quasi Peak	8.9565 MHz	41.42	N	-18.57
2 CISPR Average	13.3575 MHz	35.94	L1	-14.05
1 Quasi Peak	14.2125 MHz	40.67	L1	-19.32
2 CISPR Average	18.2445 MHz	41.02	L1	-8.97
1 Quasi Peak	21.0525 MHz	46.10	N	-13.89
1 Quasi Peak	23.127 MHz	53.34	L1	-6.65
2 CISPR Average	23.127 MHz	49.19	L1	-0.80

Note: Measurement Uncertainty is ± 4.2 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Model: VAULT 2


Worst-Case Operating Mode: EUT Transmitting

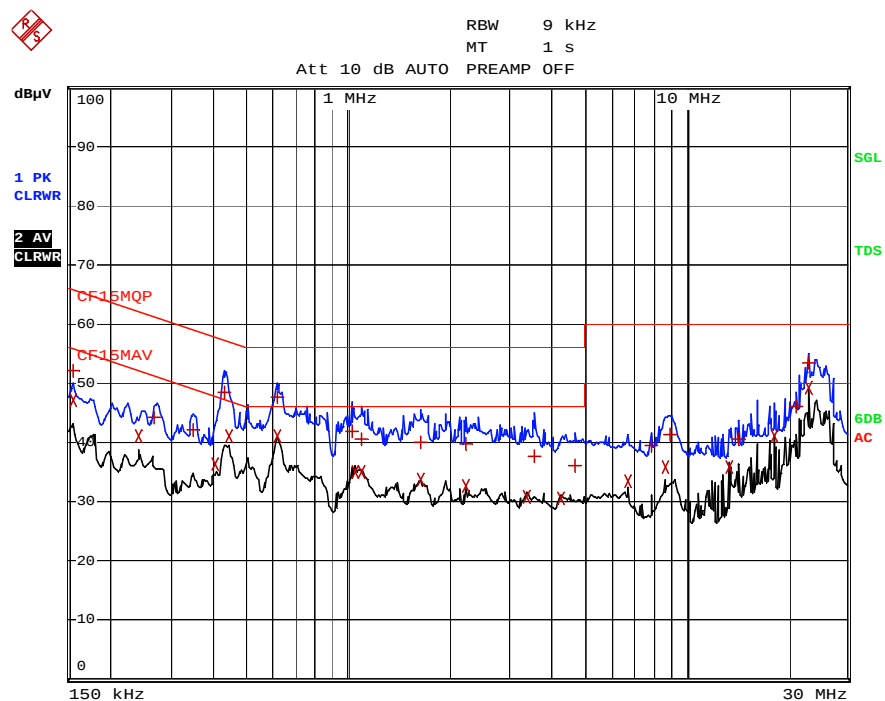

Note: Measurement Uncertainty is ± 4.2 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Conducted Emission Test Setup

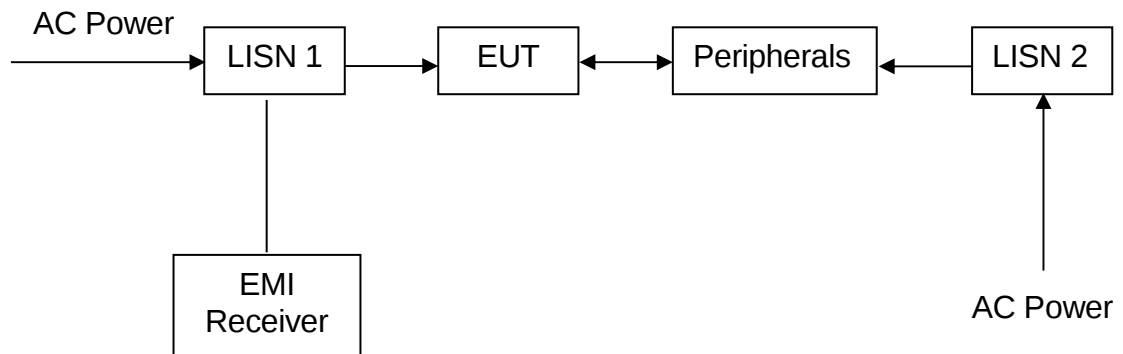

INTERTEK TESTING SERVICES

EXHIBIT 5 EQUIPMENT LIST

INTERTEK TESTING SERVICES

5.0 Equipment List

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer	Biconical Antenna
Registration No.	EW-3095	EW-2249	EW-2512
Manufacturer	R&S	R&S	EMCO
Model No.	ESCI	FSP30	3104C
Calibration Date	Oct. 16, 2014	Nov. 19, 2014	Jan. 22, 2015
Calibration Due Date	Oct. 16, 2015	Nov. 19, 2015	Jul. 22, 2016

Equipment	Double Ridged Guide Antenna	Log Periodic Antenna
Registration No.	EW-1133	EW-0447
Manufacturer	EMCO	EMCO
Model No.	3115	3146
Calibration Date	Apr. 30, 2014	Mar. 16, 2015
Calibration Due Date	Oct. 30, 2015	Sep. 16, 2016

2) Conductive Measurement Test

Equipment	RF Power Meter with Power Sensor (N1921A)	Spectrum Analyzer
Registration No.	EW-2270	EW-2249
Manufacturer	AGILENTTECH	R&S
Model No.	N1911A	FSP30
Calibration Date	Jan. 05, 2015	Nov. 19, 2014
Calibration Due Date	Jan. 05, 2016	Nov. 19, 2015

3) Conducted Emissions Test

Equipment	EMI Test Receiver	LISN
Registration No.	EW-2500	EW-2874
Manufacturer	R&S	R&S
Model No.	ESCI	ENV-216
Calibration Date	Nov. 06, 2014	Dec. 08, 2014
Calibration Due Date	Nov. 06, 2015	Dec. 08, 2015

END OF TEST REPORT