CMA Testing and Certification Laboratories
廠商會檢定中心

File Name : J17422C1


Model: DFP3011

Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	1ms	AUTO	LN OFF
1M	10M	10k	9k	QP+AV	1ms	AUTO	LN OFF
10M	30M	50k	9k	QP+AV	1ms	AUTO	LN OFF

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 30dB

Transducer No.	Start	Stop	Name
2	150k	30M	LIMITER

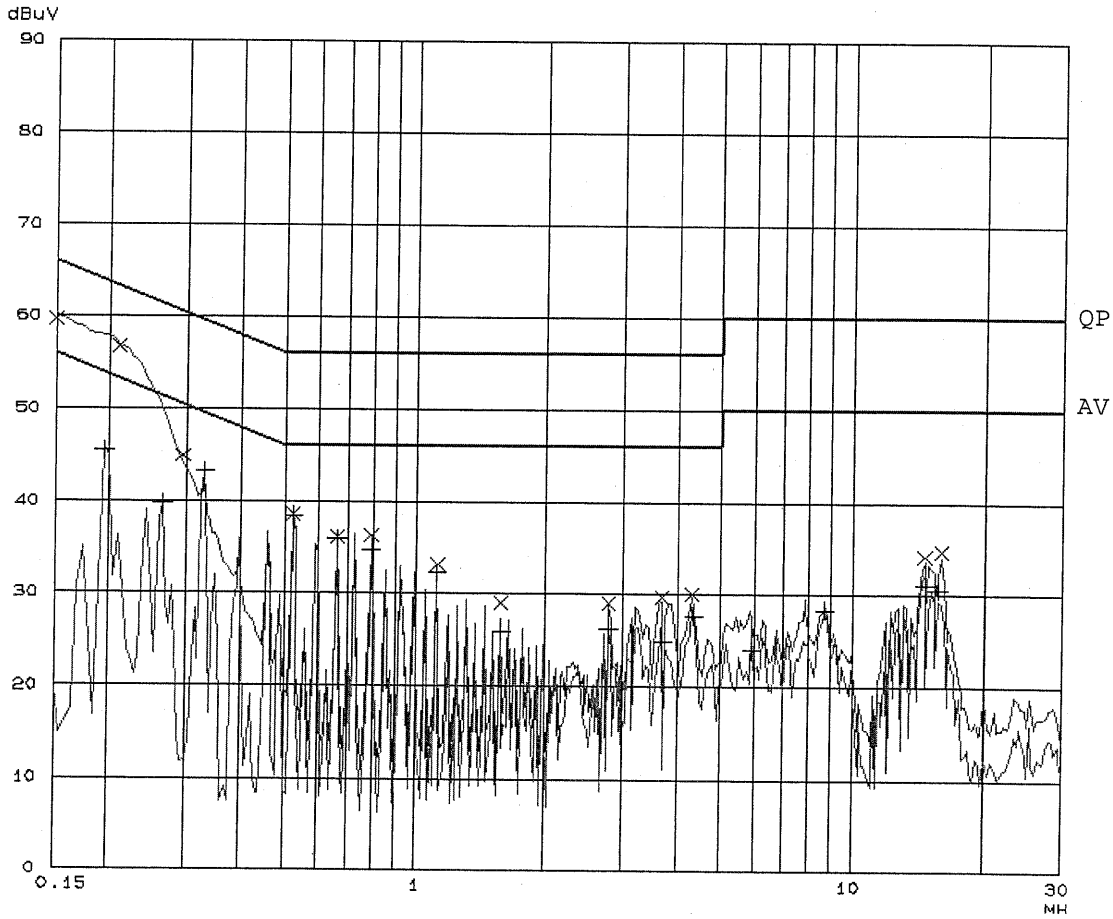

File Name : J17422C1

Model: DFP3011

Date: 13-01-05 11:58

Final Measurement Results:

Indicated Phase/PE shows Configuration of max. Emission

Frequency:	QP Level: dB	Delta Limit: dB	Phase:	PE:
150.00 kHz	59.6	-6.4	L1	fl
210.00 kHz	56.7	-6.5	L1	fl
295.00 kHz	44.9	-15.5	N	fl
525.00 kHz	38.7	-17.4	L1	fl
660.00 kHz	36.1	-20.0	L1	fl
790.00 kHz	36.4	-19.6	N	fl
1.12000 MHz	33.2	-22.8	N	fl
1.58000 MHz	29.0	-27.0	N	fl
2.77000 MHz	29.2	-26.8	L1	fl
3.69000 MHz	29.7	-26.3	L1	fl
4.31000 MHz	30.2	-25.8	N	fl
14.65000 MHz	34.3	-25.7	N	fl
16.00000 MHz	34.7	-25.3	N	fl

Frequency:	AV Level: dB	Delta Limit: dB	Phase:	PE:
195.00 kHz	45.5	-8.4	L1	fl
265.00 kHz	39.8	-11.6	L1	fl
330.00 kHz	43.2	-6.3	L1	fl
525.00 kHz	38.5	-7.5	L1	fl
660.00 kHz	36.0	-10.0	L1	fl
790.00 kHz	34.8	-11.2	N	fl
1.12000 MHz	32.4	-13.6	L1	fl
1.58000 MHz	26.0	-20.1	N	fl
2.77000 MHz	26.4	-19.6	L1	fl
3.69000 MHz	24.9	-21.1	L1	fl
4.37000 MHz	27.8	-18.2	L1	fl
5.91000 MHz	24.0	-26.0	L1	fl
8.68000 MHz	28.5	-21.5	N	fl
14.65000 MHz	31.1	-18.9	N	fl
15.75000 MHz	30.6	-19.4	N	fl

File Name : J17422C2


Model: DFP3012

Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	1ms	AUTO LN	OFF
1M	10M	10k	9k	QP+AV	1ms	AUTO LN	OFF
10M	30M	50k	9k	QP+AV	1ms	AUTO LN	OFF

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 30dB

Transducer No.	Start	Stop	Name
2	150k	30M	LIMITER

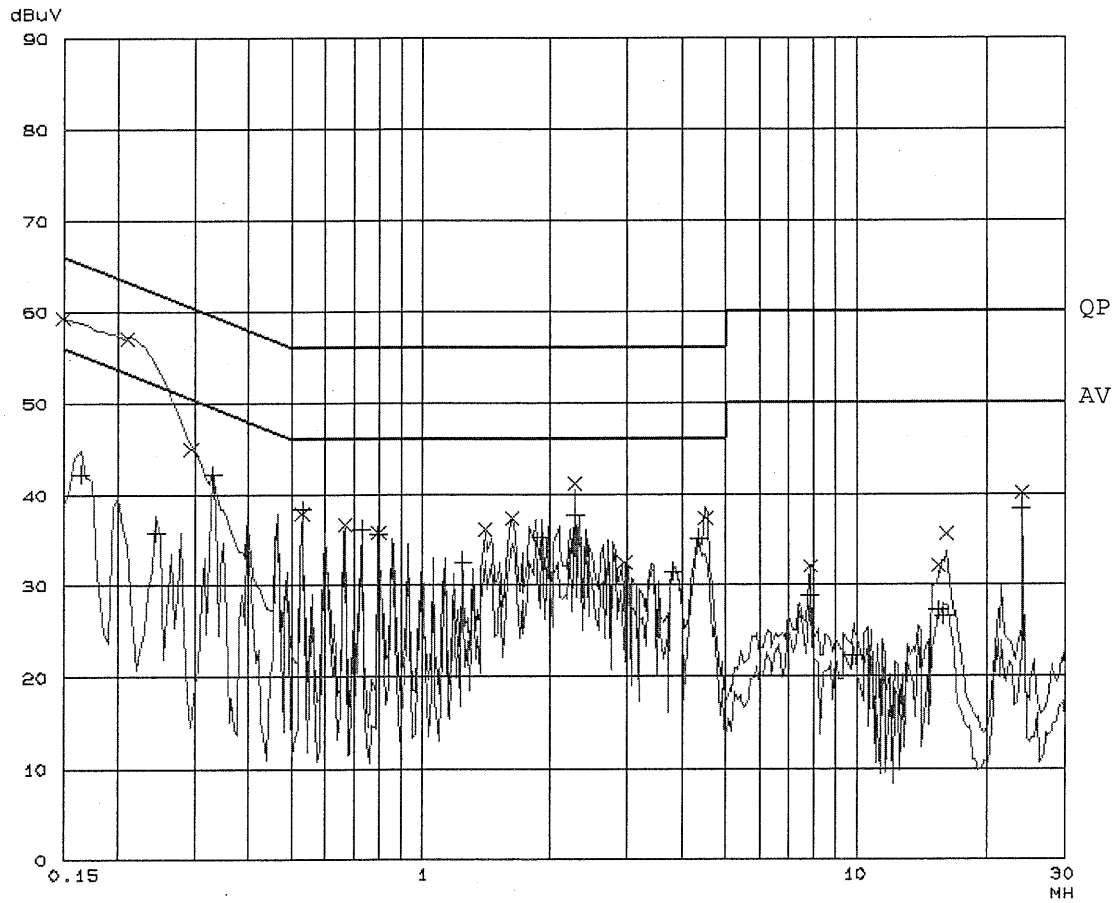

File Name : J17422C2

Model: DFP3012

Date: 14-01-05 12:23

Final Measurement Results:

Indicated Phase/PE shows Configuration of max. Emission

Frequency:	QP Level: dB	Delta Limit: dB	Phase:	PE:
150.00 kHz	59.2	-6.8	L1	fl
210.00 kHz	57.1	-6.2	L1	fl
295.00 kHz	45.0	-15.4	N	fl
530.00 kHz	37.9	-18.1	L1	fl
665.00 kHz	36.7	-19.3	N	fl
795.00 kHz	35.7	-20.3	L1	fl
1.42000 MHz	36.1	-19.9	N	fl
1.63000 MHz	37.4	-18.6	N	fl
2.28000 MHz	41.1	-14.9	N	fl
2.96000 MHz	32.6	-23.4	L1	fl
4.50000 MHz	37.4	-18.6	N	fl
7.82000 MHz	32.2	-27.9	N	fl
15.45000 MHz	32.2	-27.8	L1	fl
16.10000 MHz	35.7	-24.3	N	fl
24.00000 MHz	40.1	-19.9	N	fl

Frequency:	AV Level: dB	Delta Limit: dB	Phase:	PE:
165.00 kHz	42.3	-13.0	N	fl
245.00 kHz	35.9	-16.0	L1	fl
330.00 kHz	42.1	-7.4	L1	fl
530.00 kHz	38.4	-7.6	L1	fl
730.00 kHz	36.2	-9.8	N	fl
795.00 kHz	35.7	-10.3	N	fl
1.26000 MHz	32.6	-13.4	N	fl
1.91000 MHz	35.3	-10.7	L1	fl
2.28000 MHz	37.7	-8.3	L1	fl
3.82000 MHz	31.6	-14.5	N	fl
4.37000 MHz	35.2	-10.8	N	fl
7.82000 MHz	28.9	-21.1	L1	fl
9.79000 MHz	22.3	-27.7	N	fl
15.45000 MHz	27.3	-22.7	L1	fl
15.90000 MHz	26.7	-23.4	L1	fl
24.00000 MHz	38.5	-11.5	N	fl