


PART NUMBER BLOCK	
PART NUMBER	REV


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

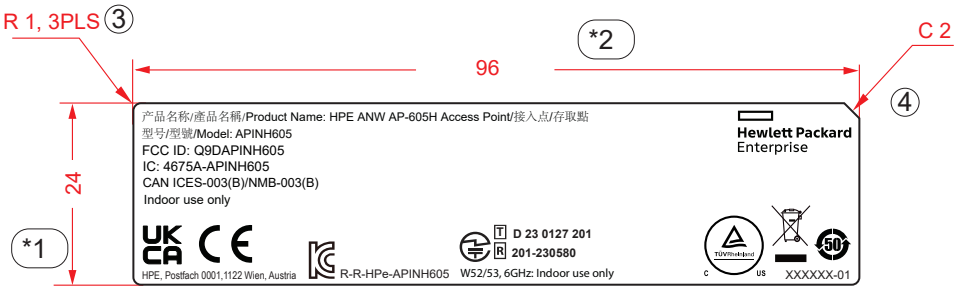

- NOTES:
1. MATERIAL: 50μPolyester Film White Matt Label with Depressive Liner , 金利宝 HTYL 50(EB)-R2ZL
ADHESIVE: 网纹背胶
 2. COLOR:
 - a. COLOR OF BASE: WHITE
 - b. COLOR OF FONT: BLACK
 3. THICKNESS OF FACE STOCK: 0.052± 0.004
 4. THICKNESS OF ADHESIVE: 0.033 ±0.003
 5. 卷状出货, 边距3±0.5mm, 跳距3±0.3mm
 6. UL Approved, PGJ12, CM-100T-030. 必须搭配碳带: Ricoh"B110A"/"B110CR"
 7. TEMPERATURE RESISTANT= 120°C.
 8. 原材料粘着力(180°Peel Adhesion): ≥1.7kgf/25mm
 9. TEST REQUIREMENT:

TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	□□□□□ ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5 % is affected.

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:			
INTEGRAL DIMENSIONS 1 PLACE DECIMAL		± 0.2 ± 0.2	ANGULAR DIMENSIONS ± 2° HOLES UNDER φ 5.00 ± 0.2
MATERIAL: SEE NOTES			
FINISH: SEE NOTES			
THIRD ANGLE PROJECTION 	DRAWN		
	ENGR		
	APVD		

 Wistron NeWeb Corp.		啟碁科技股份有限公司 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726	
DWG TITLE			
SIZE A4	DWG NO.		REV 1
SCALE	1/1	SHEET	1 OF 1

