

Harmony Lite, R1.0

Operation and Maintenance Guide

Revision 2, updated in May, 2014

Document Number: PM-000003-01-EN

draft

Notice

This document contains DragonWave proprietary information. Use, disclosure, copying or distribution of any part of the information contained herein, beyond that for which it was originally furnished, requires the written permission of DragonWave Inc.

The information in this document is subject to change without notice and relates only to the product defined in the introduction of this document. DragonWave intends that information contained herein is, to the best of its knowledge, correct and accurate. However, any/all liabilities associated with the use or accuracy of the information contained herein must be defined in a separate agreement between DragonWave and the customer/user.

Copyright © DragonWave Inc. 2014. All rights reserved.

draft

Table of Contents

1 Preface	9
1.1 History of changes	9
1.2 Scope of the document	9
1.3 Intended audience	9
1.4 Document structure	9
2 Commissioning	11
2.1 Before commissioning	11
2.2 Commission steps	11
2.2.1 Logging in	11
2.2.2 Setting the management IP	12
2.2.3 Setting the management VLAN	13
2.2.4 Setting the radio parameters	14
3 System configuration	19
3.1 System home	19
3.2 System inventory	19
3.3 Software inventory	20
3.4 Software management	21
3.5 Configuration management	21
3.6 P+E output	22

3.7 Licensing	22
3.8 SNTP	23
3.9 Synchronization	23
4 Wireless radio configuration	25
4.1 Wireless radio #1 configuration	25
4.2 Received Signal Strength Indication	25
4.3 Modulation and ACM	26
4.4 Tx power and Adaptive Transmit Power Control (ATPC)	27
5 Ethernet configuration	29
5.1 Ports	29
5.2 Speed	29
5.3 VLAN management	30
5.4 QoS scheduler	30
5.5 Traffic criteria	31
5.6 IP priority	31
5.7 VLAN PRI priority	32
5.8 Port priority	32
5.9 Aging time	33
5.10 Static Unicast FDB	33
5.11 All FDB	33
6 Management	35
6.1 IP	35
6.2 Management VLAN	35
6.3 SNMP	36

6.4 Trap	36
6.5 Event log	36
6.6 Account log	37
7 Alarms	39
7.1 Active alarms	39
7.2 History alarms	39
8 Performance	41
8.1 Ethernet	41
8.2 Wireless	41
9 Diagnostics	43
9.1 Link status	43
9.2 Link status trace	43
9.3 System running log	43
10 About	45

draft

List of Tables

TABLE 1. History of changes	9
TABLE 2. Document structure	9
TABLE 3. Login parameters	12
TABLE 4. System home	12
TABLE 5. Management IP	13
TABLE 6. Management VLAN	14
TABLE 7. Wireless parameters	16
TABLE 8. Configuration summary	17
TABLE 9. P+E output	22
TABLE 10. SNTP	23
TABLE 11. ACM	27
TABLE 12. TPC	27
TABLE 13. Ethernet ports	29
TABLE 14. Ethernet port speed configuration	29
TABLE 15. VLAN configuration	30
TABLE 16. Aging time	33
TABLE 17. Management VLAN	35

draft

1 Preface

1.1 History of changes

The history of changes is shown in the following table:

TABLE 1. History of changes

Revision	Updates	Date
1	1st revision.	January, 2014
2	All across the document, the full name of the product is changed to Harmony Lite.	May, 2014

1.2 Scope of the document

This document provides the technical guide for commissioning and operating the software of Harmony Lite system, Lite Link Viewer.

INFO

This document only concerns Harmony Lite system release 1.0 (Lite, R1.0 in short) without specific statements in the context.

1.3 Intended audience

This document is prepared for the use of radio network planners and technicians who are responsible for the system operation and maintenance.

WARNING!

PERSONS HANDLING THIS EQUIPMENT MAY BE EXPOSED TO HAZARDS WHICH COULD RESULT IN PHYSICAL INJURY! IT IS THEREFORE MANDATORY TO CAREFULLY READ AND UNDERSTAND THIS DOCUMENT.

1.4 Document structure

The document is comprised of the following chapters.

TABLE 2. Document structure

Chapter	Title	Subject
Chapter 1	Preface	Provides an introduction on who and how to use this document.
Chapter 2	Commissioning	Provides the guidance to do the initial commission.
Chapter 3	System configuration	Provides the guidance to make system configurations.
Chapter 4	Wireless configuration	Provides the guidance to make wireless configurations.
Chapter 5	Ethernet configuration	Provides the guidance to make Ethernet configurations.
Chapter 6	Management	Provides the guidance to make management configurations.

TABLE 2. Document structure

Chapter	Title	Subject
Chapter 7	Alarms	Provides the information about alarm lists.
Chapter 8	Performance	Provides the guidance to make performance configurations.
Chapter 9	Diagnostics	Provides the guidance to make diagnostics configurations.
Chapter 10	About	Provides the information about the link view.

draft

2 Commissioning

2.1 Before commissioning

Before Lite system become operational, initial configuration steps need to be carried out first. And the Commissioning wizard is recommended to be executed prior to the hardware installation on site.

The Lite system can be accessed by the Web Browser on a PC, such as Google Chrome (28.0 or higher), Firefox (26.0 or higher), IE (9.0 or higher). If Firefox or IE is to be used, Adobe Flash Player plug-in has to be installed first. (To download Adobe Flash Player, go to website <http://get.adobe.com/cn/flashplayer/>.)

Before logging into the Lite Web interface, the network configuration of the PC must be set as Figure 1. We suggest setting the PC IP address to 192.168.255.1 and subnet mask 255.255.255.248. This IP address is used to access Lite when the management PC is directly connected to Lite system. By default, the private IP address of Lite is 192.168.255.3 and the subnet mask 255.255.255.248.

FIGURE 1. PC network configuration



2.2 Commission steps

2.2.1 Logging in

Steps

1. Use the Web Browser to access the private IP address of Lite.

FIGURE 2. Step 1

2. Enter **User Name** and **User Password**, click **Login**. The home page of Link Viewer appears.

TABLE 3. Login parameters

User Name	User Password
energetic	wireless
readwrite	Rwrite
readonly	readonly

FIGURE 3. Link Viewer

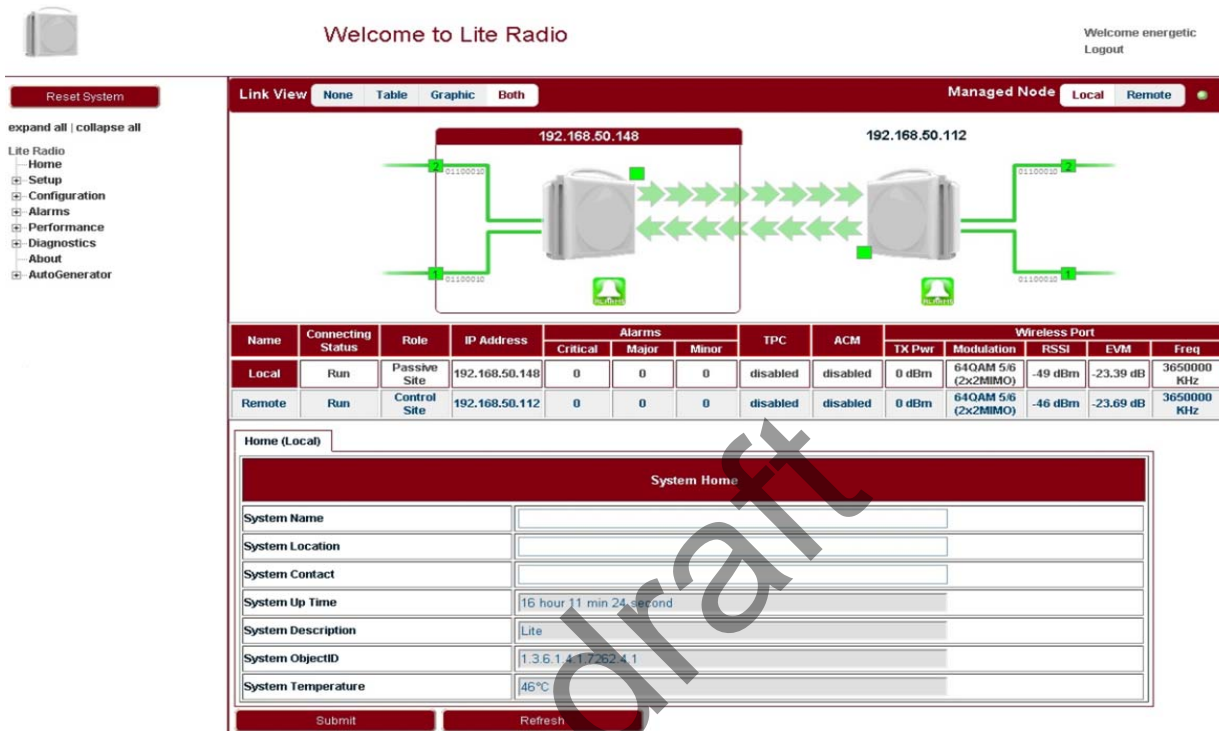


TABLE 4. System home

Parameter	Description
System Name	Configure the system name to identify the NE.
System Location	Configure the system location for easy management.
System Contact	Configure the contact information for easy management.
System Up Time	Show the system start up time. It is read only.
System Description	Configure the system description for easy management.
System ObjectID	It is used to SNMP. The value is 1.3.6.1.4.1.7262.4.1.
System Temperature	Show the current temperature. It is read only.

2.2.2 Setting the management IP

Go to **Configuration > Management > IP** tab (see Figure 4). The public management IP address and local management IP address are to be set.

INFO

Don't use IP address from 192.168.254.96 ~ 192.168.254.99. These 4 IP addresses are reserved for internal use.

FIGURE 4. Management IP

Management IP (Local)

Management IP	
Public IP Address	192.168.50.61
Public IP Mask	255.255.255.0
Public Gateway	192.168.50.1
Private IP(Eth1)	192.168.255.3
Private IP Mask(Eth1)	255.255.255.248
Local Management IP	192.168.254.61
Local Management IP Mask	255.255.255.0
MAC 1	00:a0:1e:11:22:33
MAC 2	00:a0:1e:22:33:44
MAC 3	00:01:02:03:04:05
Node Type	Node without P+E output ▼

Submit

Refresh

TABLE 5. Management IP

Parameter	Description
Public IP Address	Public IP is used to access Lite over Management VLAN (Tagged, typically using a switch or other intranet connectivity). It is for in-band management.
Public IP Mask	
Public Gateway	
Private IP (Eth 1)	Private IP is used for commissioning.
Private IP Mask (Eth 1)	
Local Management IP	Local Management IP is used to access Lite locally over one of the Ethernet ports untagged, for example, from a PC running WebLCT. It is also for out-of-band management.
Local Management IP Mask	
MAC 1	Display the MAC addresses of Eth1, Eth2 and wireless port.
MAC 2	
MAC 3	
Node Type	This field is used in chain site configuration. When it is changed to <i>Node with P+E output</i> , the private IP would be automatically changed to 192.168.255.4, to avoid IP address conflict in the chain site.

2.2.3 Setting the management VLAN

Go to **Configuration > Management > Management VLAN** tab (see Figure 5).

FIGURE 5. Management VLAN

Management VLAN (Local)

Management VLAN	
Management VLAN (51-4094)	127
Management VLAN Priority (0-7)	6 ▼
Eth1	No ▼
Eth2	No ▼
Ath1(wireless1)	Yes ▼
Rate Limit(128...2000/kbps)	1024

Submit Refresh

TABLE 6. Management VLAN

Parameter	Description
Management VLAN	Configure the management VLAN ID for remote login. VLAN range from 51 ~ 4094. Default: 127.
Management VLAN Priority	Configure the management VLAN priority. Value from 0 ~ 7. Default: 6.
Eth1	If the port is to be used as a part of the management VLAN, set to Yes. If no, it means this port is removed from the management VLAN.
Eth2	
Ath1(wireless1)	
Rate Limit	Configure the engress and egress rate limit for management VLAN. Value from 128Kbps ~ 2Mbps. Default: 1024Kbps.

2.2.4 Setting the radio parameters

This operation should be done from both the passive and control ends of the link and channel selections should match to ensure the link comes up when properly aligned. Before setting the radio parameters, ensure that the correct radio standard is licensed for the geographic location where the radio is to be installed. For example: FCC for USA or Canada, ETSI for Europe and Asia, etc.

It is also important to verify that the correct maximum speed required is licensed, as per the link design specified for the radio in this location.

Steps

1. Go to **Setup > Commissioning** tab (see Figure 6) and click **Next Step**.

FIGURE 6. Step 1

Setup Commissioning (Local)

Commissioning
This wizard will guide you through initial configuration of Lite. With this wizard you can provide the following configurations for Lite: •License configuration. •Link basic parameter configuration. •Radio bandwidth configuration •Radio frequency configuration After you complete the wizard and deliver the configuration to Lite, you can continue to use this wizard to modify the configuration if that is necessary. Note: At the end of the wizard, a reboot is required to make it take effect.

Next Step

2. Input the license key and click **Modify**. Click **Refresh** to make sure of the configuration.

FIGURE 7. Step 2

Setup Commissioning (Local)

License

License Challenge Number	2095658984
basic-100M	Enabled
100M-Max	
basic-Max	
FCC (USA)	
ETSI (Europe)	Enabled
TELEC (Japan)	
ANATEL (Brazil)	
ICASA (South Africa)	
IC (Canada)	
ROW (Other Countries)	
Input License Key	

Modify

Refresh

Previous Step

Next Step

INFO

If changing from one radio standard to another, existing license must be cleared.

Please contact DragonWave Customer Support if a new license needs to be entered to change the radio standard or geographic location setting.

- 3. Set up wireless parameters according to Table 7.

FIGURE 8. Step 3

Setup Commissioning (Local)

Wireless Parameters	
System Type	5G
Link Name	rembrandt
System Role	Control Site
Antenna Stream	V+H Stream
Bandwidth	40MHz
Traffic Mode(Uplink/Downlink)	Optimized for Throughput (50/50)
Guard Interval(GI)	400 ns
Antenna Gain (dBi)	19 ProductCode:DW61LT5G190.00
Wireless Port Rate Limit (Mbps)	50
Static Modulation	64QAM 5/6 (MCS15 2x2 MIMO)
Tx Power	0 dBm +3 dB(V+H Antenna Stream)

Previous Step Next Step

TABLE 7. Wireless parameters

Parameter	Description
Link Name	Up to 32 characters, and both numbers and characters are supported. The link name of both <i>Control Site</i> and <i>Passive Site</i> should be the same.
System Role	<i>Control Site</i> or <i>Passive Site</i> . One end of Lite should be configured as the Control Site, and the other end the Passive Site.
Antenna Stream	V+H Stream supported.
Bandwidth	40 MHz or 20MHz.
Traffic Mode (Uplink/ Downlink)	50/50 For 50/50, the uplink and downlink have the same bandwidth.
Guard Interval	400 ns or 800 ns. If the maximum multi-path delay spreads more than 400 ns, we suggest to use 800 ns. Leaving the guard interval at 400 ns (the default) works in most applications. For installations where the link is over long stretches of water, or non-line of sight applications with lots of multi-path signals, selecting 800 ns guard interval can improve the performance.
Wireless Port Rate Limit	Rate limit on Wireless port. It will only take effect while the value is lower than the Wireless Throughput.
Static Modulation	If ACM is disabled, Lite will use Static Modulation as Tx side modulation. This is the modulation selected for this link and will not change unless ACM is enabled.
Tx Power	Tx power on each radio. Limited by EIRP. This rate limit is automatically assigned based on the modulation selected.

4. In **Configuration Summary** page, set the **Setup Frequency** field according to Table 9.

FIGURE 9. Step 6

Setup Commissioning (Local)

Configuration Summary		
Setup Frequency	5795MHz[40MHz](157) ▼	
System Type	5G	
Link Name	LITE	
System Role	Passive Site	
Antenna Stream	V+H Stream	
Bandwidth	40MHz	
Traffic Mode(Uplink/Downlink)	Optimized for Throughput (50/50)	
GI	400 ns	
Tx Power	10 dBm	+3 dB(V+H Antenna Stream)
Antenna Gain(dBi)	19 dBi	
EIRP(dBm)	No Limit	
Wireless Port Rate Limit(Mbps)	10	
Static Modulation	64QAM 5/6 (MCS15 2x2 MIMO)	
Selected Channel	5795MHz[40MHz](157)	

Previous Step

Save & Reboot

TABLE 8. Configuration summary

Parameter	Description
Setup Frequency	The setup frequency is the initial frequency to be used when the link is set up.

5. Check all the configurations in Figure 9 and click **Save & Reboot** so that Lite will restart and run under new configurations.

draft

3 System configuration

3.1 System home

Go to the **Home** page to set the parameters.

FIGURE 10. System Home

Welcome to Lite Radio

Welcome energetic
Logout

Reset System

Link View: **None** Table Graphic Both

Managed Node: **Local** Remote

expand all | collapse all

Lite Radio
Home
Setup
Configuration
Alarms
Performance
Diagnostics
About
AutoGenerator

Name	Connecting Status	Role	IP Address	Alarms			TPC	ACM	Wireless Port				
				Critical	Major	Minor			TX Pwr	Modulation	RSSI	EVM	Freq
Local	Run	Passive Site	192.168.50.148	0	0	0	disabled	disabled	0 dBm	64QAM 5/6 (2x2MIMO)	-49 dBm	-23.39 dB	3650000 KHz
Remote	Run	Control Site	192.168.50.112	0	0	0	disabled	disabled	0 dBm	64QAM 5/6 (2x2MIMO)	-46 dBm	-23.69 dB	3650000 KHz

Home (Local)

System Home

System Name

System Location

System Contact

System Up Time: 16 hour 11 min 24 second

System Description: Lite

System ObjectID: 1.3.6.1.4.1.7262.4.1

System Temperature: 46°C

Submit Refresh

3.2 System inventory

Go to **Configuration > System > System Inventory** page.

FIGURE 11. System inventory

System Inventory (Local)

System Inventory	
Equipment Name	LITE
Equipment Product Code	DW61LT5G190_00
Product Serial Number	F1003DGG0001
Main Board Serial Number	M1003DGG0001
Main Board Hardware Item Number	T555336_01
Main Board Hardware Item Number Extension	A
Main Board Hardware Edition	05
RF Board Serial Number	R1003DGG0001
RF Board Hardware Item Number	T555336_01
RF Board Hardware Item Number Extension	A
RF Board Hardware Edition	05
PoE+ Board Serial Number	P1003DGG0001
PoE+ Board Hardware Item Number	T555336_01
PoE+ Board Hardware Item Number Extension	A
PoE+ Board Hardware Edition	05
Bluetooth Board Serial Number	B1003DGG0001
Bluetooth Board Hardware Item Number	T555336_01
Bluetooth Board Hardware Item Number Extension	A
Bluetooth Board Hardware Edition	05
Location of Last Modification	SH
Date of Last Modification	20130719
Location of Last Repair	SH
Date of Last Repair	20130719
Product Version	100
Mac Address 1	00:a0:1e:11:22:33
Mac Address 2	00:a0:1e:22:33:44
Radio Mac Address	00:01:02:03:04:05

Refresh

3.3 Software inventory

Go to **Configuration > System > Software Inventory** page.

FIGURE 12. Software inventory

Software Inventory (Local)

Software Inventory	
Active Software	
Software Activated Date	2012-11-30 02:50:35
Active Software Version	1.5.28
Active Software Checksum	2402138936
Standby Software	
Standby Software Version	1.5.20
Standby Software Checksum	1378030980
Standby Software Status	Valid Load v
Boot Software	
Boot Software Activated Date	2012-11-30 02:50:34
Boot Software Version	1.5.28
Boot Software Checksum	2402138936

Refresh

3.4 Software management

Steps

1. Go to **Configuration > System > Software Management** page.

FIGURE 13. Software download management

Software Download Management (Local)

Software Download Management	
Running Software Version	1.5.28
Software Activated Date	2012-11-30 02:50:35
Next Run Software Bank	Bank#2
Software Bank #1	
Software Bank #1 Version	1.5.20
Software Bank #1 Checksum	1378030980
Software Bank #2	
Software Bank #2 Version	1.5.28
Software Bank #2 Checksum	2402138936
Uploading Status	
Standby Software Status (Bank#1)	Valid Load

[Switch App Software](#)
[Refresh](#)
[Upgrade App](#)

2. Click **Upgrade App** and go to the right folder path to open the target software.
3. Click **Switch App Software**, confirm the Next Run Software Bank is switched correctly.
4. Click **Reboot System**. After reboot, Lite would start up with the new software.

3.5 Configuration management

Steps

1. Go to **Configuration > System > Configuration Management** page.

FIGURE 14. Configuration backup & restore

Configuration Management (Local)

Configuration Backup&Restore	
Last configuration backup time	1970-01-01 00:00:00
Configuration File:	Download

[Backup Configuration](#)
[Clear Configuration & Reboot](#)
[Refresh](#)

Restore Configuration File:

[Restore](#)

2. Click **Backup Configuration** and click the **Download** link to download the backup configuration file.
3. Click **Clear Configuration & Reboot**, confirm to clear configuration and reboot.
4. Click **Restore** and go to the right folder path to open the target configuration file.

3.6 P+E output

Steps

- 1. Go to **Configuration > System > P+E Output** page.

FIGURE 15. P+E output configuration

Power Over Ethernet Configuration (Local)

Power Over Ethernet Configuration

Ethernet Port	Eth2
PoE Configuration	Disable
PoE Status	Not Active

Submit

Refresh

TABLE9. P+E output

Parameter	Description
PoE Configuration	Enable or Disable. Default: Disable.

- 2. Click **Submit** to apply the configuration.

3.7 Licensing

Steps

- 1. Go to **Configuration > System > Licensing** page.

FIGURE 16. License

License (Local)

License

License Challenge Number	2095658984
basic-100M	Enabled
100M-Max	
basic-Max	
FCC	
ETSI	Enabled
TELEC	
ANATEL	
ICASA	
IC	
ROW	
Input License Key	

Modify License

Refresh

- 2. Click **Modify License** to make change on the license information.

3.8 SNTP

Steps

1. Go to **Configuration > System > SNTP** page.

FIGURE 17. SNTP

SNTP (Local)

SNTP (Simple Network Timing Protocol)

Current Time(GMT)	2013-12-23 14:19:46
Current Time(NE Time Zone)	2013-12-23 22:19:46
Using PC Current Time	☒ Using PC Current Time
Set Current Time	☐
Time Server IP	0.0.0.0
Time Zone Offset	(GMT +08:00) Beijing
Daylight Saving	Disabled

Submit Refresh

TABLE10. SNTP

Parameter	Description
Time Server IP	It is used to get SNTP time from Time Server.
Time Zone Offset	Configure the NE time zone when Time Server is configured. Values are from -12 ~ +13.
Daylight Saving	Configure the NE daylight saving when Time Server is configured. Value is Enabled or Disabled.

2. To set SNTP, fill out all the parameters and click **Submit**.

3.9 Synchronization

Steps

1. Go to **Configuration > System > Synchronization** page.

FIGURE 18. Synchronization

Home (Local)

Synchronization

Clock Source	internal
Sync State	freerun
Sync Enabled	disabled

Submit Refresh

2. To set Synchronization, fill out all the parameters and click **Submit**.

draft

4 Wireless radio configuration

4.1 Wireless radio #1 configuration

Go to **Configuration > Wireless Radio > Wireless** page to see the Wireless Radio Configuration.

FIGURE 19. Wireless radio #1 configuration

Wireless Radio Configuration (Local)

Wireless Radio #1 Configuration

Radio	Wireless #1
Link Name	LITE
Transmitter State	on
Operation Status	squelch
System Role Status	Passive Site
Stream	V+H Stream
Channel Bandwidth (MHz)	40M
Setup Frequency	5795MHz[40MHz] (157)
Traffic Mode(Uplink/Downlink)	Optimized for Throughput (50%/50%)
	Advanced
RSSI(-35...-95 dBm)	-95 dBm
EVM(dB)	0 dB
Guard Interval(GI)	400 ns
Antenna Gain (dBi)	19 dBi
EIRP (dBm)	No Limit
MaxPktLen(Bytes)	18750
Max Throughput(Mbps)	112
Current Working Frequency	5795MHz

Submit

Refresh

4.2 Received Signal Strength Indication

Go to **Configuration > Wireless Radio > RSSI** page to see the Received Signal Strength Indication.



FIGURE 21. ACM

ACM (Local)

ACM

Static MCS	64QAM 5/6 (MCS15 2x2 MIMO) ▼
ACM Enabled	disabled ▼
Lowest TX MCS	BPSK 1/2 (MCS8 2x2 MIMO) ▼
Highest TX MCS	64QAM 5/6 (MCS15 2x2 MIMO) ▼
Current TX MCS	64QAM 5/6 (MCS15 2x2 MIMO) ▼
Current RX MCS	▼

Submit Refresh

TABLE 11. ACM

Parameter	Description
Static MCS	The Tx modulation when ACM is disabled.
ACM Enabled	<i>Enabled or Disabled.</i>
Lowest TX MCS	MCS range for Lite, when ACM is enabled.
Highest TX MCS	

4.4 Tx power and Adaptive Transmit Power Control (ATPC)

Adaptive Transmit Power Control (ATPC) allows a Lite system to adjust its transmit power to compensate for far end signal loss caused by changes in atmospheric conditions, e.g., heavy rain. ATPC maintains the RSSI at the ATPC threshold, which is system mode dependent, and adjusts the transmit power as necessary in order to maintain the ATPC threshold during fading conditions.

Go to **Configuration > Wireless Radio > TPC** page.

FIGURE 22. TPC

TPC (Local)

TPC

TPC Enabled	disabled ▼
Tx Power Config	10 dBm ▼ +3 dB(V+H Antenna Stream)
Tx Power Status	10 dBm ▼ +3 dB(V+H Antenna Stream)

Submit Refresh

TABLE 12. TPC

Parameter	Description
ATPC Enabled	<i>Enabled or Disabled. Default: Disabled.</i>
Tx Power Config	Set the Tx Power on each chain, it is limited by local regulations.

draft

5 Ethernet configuration

5.1 Ports

Go to **Configuration > Ethernet > Port > Ports** page to set the Ethernet Ports.

FIGURE 23. Ethernet ports

Index	MTU	Speed	Admin Status	Operation Status
Eth1	1522	1000 Mbps	up	up
Eth2	1522	1000 Mbps	up	up
Wireless	1522	112 Mbps	up	up

Submit Refresh

TABLE 13. Ethernet ports

Parameter	Description
MTU	The MTU of Lite is a fixed value: 1522.
Speed	It shows the current speed of the port.
Admin Status	By default the Admin Status of all ports is <i>up</i> , only the Admin Status of Eth2 can be set to <i>down</i> .
Operation Status	It displays the current port status which can be <i>up</i> or <i>down</i> .

5.2 Speed

Go to **Configuration > Ethernet > Port > Speed** page to set the Ethernet Port Speed Configuration.

FIGURE 24. Ethernet port speed configuration

Port	Autoneg	Speed and Duplex	Speed and Duplex Status
Eth1	enabled	1000BASE-TFD	1000BASE-TFD
Eth2	enabled	100BASE-TFD	100BASE-TFD

Submit Refresh

TABLE 14. Ethernet port speed configuration

Parameter	Description
Autoneg	The autonegotiation is <i>enabled</i> by default. It can be configured to <i>disabled</i> .

TABLE 14. Ethernet port speed configuration

Parameter	Description
Speed and Duplex	Under the autoneg disabled status, speed and duplex of port can be configured, only 100Base-THD, 100Base-TFD and 1000Base-TFD can be supported.
Speed and Duplex Status	It displays the current status of Ethernet speed and duplex.

5.3 VLAN management

Go to **Configuration > Ethernet > VLAN > VLAN** page to set the VLAN Configuration.

FIGURE 25. VLAN configuration

TABLE 15. VLAN configuration

Parameter	Description
VLAN ID	The VLAN 1 is a special VLAN used to forward untagged traffic and for local management, it is a permanent VLAN and cannot be deleted. It includes Eth1 and Wireless port by default. The available values of VLAN ID are 51 ~ 4094, 2 ~50 are reserved by system. They are all tagged VLAN. The maximum number of VLANs is 48.

To create a VLAN, select *Create* in the **Action** drop-down list and fill out all the parameters and click **Submit**.

Similarly, a VLAN can be modified or deleted by selecting *Modify* or *Delete* in the **Action** drop-down list and click **Submit**.

5.4 QoS scheduler

Go to **Configuration > Ethernet > QoS > QoS** page to set the QoS Scheduler. Three scheduling modes are supported:

- Strict Priority
- Weighted Round Robin (WRR)/Deficit Weighted Round Robin (DWRR)
- Strict Priority + WRR/DWRR

While the *Strict Priority Queue Number* is 8, it is SP mode. While the number is less than 8, it is SP + WRR or SP + DWRR two scheduler modes.

The default scheduling mode is SP+WRR, 4 SP queue + 4 WRR queue, the weight for Q4-Q1 are 8:4:2:1. The *Wireless Port Rate Limit* will only take effect when its value is lower than the Wireless Throughput.

FIGURE 26. Quality of Service Configuration

Quality of Service Configuration (Local)

Quality of Service Configuration	
Port	Ath1(wireless1) ▼
Scheduler Fair Queue Mode	WRR ▼
Strict Priority Queue Num	4
Q8 Weight(1...127)	8
Q7 Weight(1...127)	7
Q6 Weight(1...127)	6
Q5 Weight(1...127)	5
Q4 Weight(1...127)	8
Q3 Weight(1...127)	4
Q2 Weight(1...127)	2
Q1 Weight(1...127)	1
Wireless Port Rate Limit (Mbps)	50

Submit Refresh

5.5 Traffic criteria

Go to **Configuration > Ethernet > QoS > Traffic Criteria** page to set the Traffic Criteria. The *Port* and *VLAN priority 802.1p* are the default traffic criteria for tagged traffic and untagged traffic. And they cannot be disabled. The *IPv4 DSCP* can be enabled if it is necessary, and it is prior to other criteria if the *DSCP-802.1p* mapping was configured in the list. Default setting is with *IPv4 DSCP* criteria disabled with the exclusion of the *VLAN priority 802.1p* and *Port* criteria that is always enabled.

FIGURE 27. Traffic Criteria

Traffic Criteria (Local)

Traffic Criteria	
Port	Wireless ▼
Name	Enabled
IPv4 DSCP	☐ Configure
VLAN priority 802.1p	☒ Configure
Port	☒ Configure

Submit Refresh

5.6 IP priority

Go to **Configuration > Ethernet > QoS > IP Priority** page to set the IP Priority. Frames whose *Diff-Serv* or *TC Priority* does not belong to any entry of the *IPv4 DSCP* priority table and which are tagged will be processed using *VLAN PRI 802.1p* priority, or which are untagged will be processed using *Port* criteria. Up to 64 values (between 0 and 63) can be configured by NMS.

FIGURE 28. IP priority

IP Priority (Local)

IP Priority

Port

Wireless

Action

DiffServ or TC Priority

802.1p Priority

Create

16

0

Submit

Refresh

5.7 VLAN PRI priority

Go to **Configuration > Ethernet > QoS > Vlan PRI Priority** page to set the VLAN PRI Priority. When VLAN priority field criterion is enabled, it is possible to associate an output priority to each one of VLAN priority field values. Classification for single tagged frames (802.1Q compliant) is based on VLAN Priority. For untagged frame, the VLAN priority is set to 0. Classification for Q-in-Q frames (both 802.1ad compliant and proprietary formats) is based on outer VLAN Priority. The eight default priority values for the VLAN priority fields can be configured.

FIGURE 29. VLAN PRI priority

VLAN PRI Priority (Local)

VLAN PRI Priority

Port

Wireless

ID

Priority

1

0

2

1

3

2

4

3

5

4

6

5

7

6

8

7

Submit

Refresh

5.8 Port priority

Go to **Configuration > Ethernet > QoS > Port Priority** page to set the Port Priority. Port priority field criterion is enabled by default, it cannot be disabled. It is used to address the untagged frames which are not IPv4 frames or IPv4 frames but not match the DSCP and 802.1p mapping in IPv4 DSCP criteria. For untagged frame, the VLAN priority is set to 0 by default. The value for *Port Priority* can be set in range of 0-7.

FIGURE 30. Port priority

Port Priority (Local)

Port Priority

Port

Eth1

PVID

Port Priority

1

0

Submit

Refresh

5.9 Aging time

Go to **Configuration > Ethernet > FDB > Aging Time** page to set the Ethernet Aging Time.

FIGURE 31. Aging time

TABLE 16. Aging time

Parameter	Description
Aging Time	The values of aging time are 0/10-1000000s. If 0 was configured, it means Lite does not learn MAC address.

5.10 Static Unicast FDB

Go to **Configuration > Ethernet > FDB > Static Unicast FDB** page to set the Static Unicast FDB.

FIGURE 32. Static Unicast FDB

5.11 All FDB

Go to **Configuration > Ethernet > FDB > All FDB** page to see all FDB. The management status in FDB means system reserved MAC address, they were used by internal port. The learnt status is dynamic MAC address. TTR is the remaining time to be removed from FDB list. For management status MAC address, it is always zero.

FIGURE 33. All FDB

FDB (Local)

FDB					
Index	Mac Address	Port	VLAN	Status	TTR
1	00:08:07:05:03:31	Ath1(wireless1)	1	management	0
2	00:09:06:12:a8:08	Eth1	1	learnt	287
3	00:21:70:53:53:3e	Eth1	1	learnt	135
4	00:21:9b:1a:46:0b	Eth1	1	learnt	272
5	00:26:5a:13:11:b8	Eth1	1	learnt	1
6	00:27:28:29:30:31	Eth1	1	learnt	48
7	00:40:43:b5:c2:4d	Eth1	1	learnt	5
8	00:48:38:14:65:38	Eth1	1	management	0
9	00:48:38:86:12:34	Eth1	1	management	0
10	00:60:f3:21:f8:db	Eth1	1	learnt	139
11	1c:c1:de:b6:77:5a	Eth1	1	learnt	120
12	84:2b:2b:95:d1:26	Eth1	1	learnt	85
13	84:2b:2b:95:d7:04	Eth1	1	learnt	0
14	f0:7d:68:70:32:b8	Eth1	1	learnt	1
15	00:08:07:05:03:31	Ath1(wireless1)	100	management	0
16	00:48:38:86:12:34	Eth1	100	management	0
17	00:08:07:05:03:31	Ath1(wireless1)	127	management	0
18	00:48:38:14:65:38	Ath1(wireless1)	127	management	0

<<<1>>>

ClearRefresh

6 Management

6.1 IP

Go to **Configuration > Management > IP** page to set the Management IP.

FIGURE 34. Management IP

Management IP (Local)

Management IP	
Public IP Address	192.168.50.61
Public IP Mask	255.255.255.0
Public Gateway	192.168.50.1
Private IP(Eth1)	192.168.255.3
Private IP Mask(Eth1)	255.255.255.248
Local Management IP	192.168.254.61
Local Management IP Mask	255.255.255.0
MAC 1	00:a0:1e:11:22:33
MAC 2	00:a0:1e:22:33:44
MAC 3	00:01:02:03:04:05
Node Type	Node without P+E output

Submit

Refresh

6.2 Management VLAN

Go to **Configuration > Management > Management VLAN** page to set the Management VLAN.

FIGURE 35. Management VLAN

Management VLAN (Local)

Management VLAN	
Management VLAN (51-4094)	127
Management VLAN Priority (0-7)	6
Eth1	No
Eth2	No
Ath1(wireless1)	Yes
Rate Limit(128...2000/kbps)	1024

Submit

Refresh

TABLE 17. Management VLAN

Parameter	Description
Management VLAN	Configure the management VLAN ID for remote login. Values are 51 ~ 4094. Default: 127.
Management VLAN Priority	Configure the management VLAN priority. Values are 0 ~ 7. Default: 6.
Eth1	Configure which port is in management VLAN.
Eth2	
Ath1 (wireless1)	
Rate Limit	It is engress and egress rate limit for management VLAN. Values are 128Kbps ~ 2Mbps. Default: 1024Kbps.

6.3 SNMP

Go to **Configuration > Management > SNMP** page to change the User Name and Password. Default User Name is *energetic*, default Password is *wireless*.

FIGURE 36. User management

User Management (Local)

User Management

User	readonly
Old Password(5-8)	
New Password(5-8)	
Confirm New Password(5-8)	

Submit

Refresh

6.4 Trap

Go to **Configuration > Management > Trap** page to set the Trap Destination parameters.

FIGURE 37. Trap

Trap Destination

Trap Destination

Action	IP Address	UDP Port (Comments:162 1025...65535)	Snmp Version	Erase Time (1...1440000 8640000(Static) ms)	Status
		162	v2	360000	

Submit

Refresh

6.5 Event log

Go to **Configuration > Management > Event Log** page to see all the event logs.

FIGURE 38. Event log

Event Log (Local)		
Event Log		
		Search:
Date And Time	Log Source	Description
2013 12 26 2:47: 5	system	radio port#1 switching to new freq#5580MHz successful
2013 12 26 2:43:53	system	radio port#1 switching to new freq#5260MHz successful
2013 12 26 2:31:52	system	radio port#1 switching to new freq#5580MHz successful
2013 12 26 2:28:40	system	radio port#1 switching to new freq#5260MHz successful
2013 12 26 2:16:37	system	radio port#1 switching to new freq#5580MHz successful
2013 12 26 2:13:28	system	radio port#1 switching to new freq#5260MHz successful
2013 12 26 2: 1:24	system	radio port#1 switching to new freq#5580MHz successful
2013 12 26 1:58:13	system	radio port#1 switching to new freq#5260MHz successful
2013 12 26 1:46:11	system	radio port#1 switching to new freq#5580MHz successful
2013 12 26 1:43: 0	system	radio port#1 switching to new freq#5260MHz successful
2013 12 26 1:30:58	system	radio port#1 switching to new freq#5580MHz successful
2013 12 26 1:27:47	system	radio port#1 switching to new freq#5260MHz successful
2013 12 26 1:15:43	system	radio port#1 switching to new freq#5580MHz successful
2013 12 26 1:12:34	system	radio port#1 switching to new freq#5260MHz successful
2013 12 26 1: 0:28	system	radio port#1 switching to new freq#5580MHz successful
2013 12 26 0:57:19	system	radio port#1 switching to new freq#5260MHz successful
2013 12 26 0:45:13	system	radio port#1 switching to new freq#5580MHz successful
2013 12 26 0:42: 2	system	radio port#1 switching to new freq#5260MHz successful
2013 12 26 0:29:58	system	radio port#1 switching to new freq#5580MHz successful
2013 12 26 0:26:47	system	radio port#1 switching to new freq#5260MHz successful
Showing 1 to 20 of 554 entries		
		First Previous 1 2 3 4 5 Next Last
Clear		Refresh

6.6 Account log

Go to **Configuration > Management > Account Log** page to see all the account logs.

FIGURE 39. Account log

Event Log (Local)				
Account Log				
Date And Time	IP address	User Name	Action	Type
Refresh				

draft

7 Alarms

7.1 Active alarms

Go to **Alarms > Active Alarms** page to see the current alarm list.

FIGURE 40. Active alarms

Active Alarms (Local) ● GMT
● NE TimeZone

Active Alarms					
Index	Name	Reason	Source	Severity	Raised(Time)
19	Radio port link down	Port link down.	ath1(wirele	Critical	2013-12-23 10:10:33

Refresh

7.2 History alarms

Go to **Alarms > History Alarms** page to see the history alarm list.

FIGURE 41. History alarms

History Alarms (Local) ● GMT
● NE TimeZone

History Alarms						
Name	Reason	Source	Severity	Raised(Time)	Cleared(Time)	
EVM too low	ant evm alarm	radio	Major	2013-12-25 22:42:15	2013-12-25 22:42:17	
EVM too low	ant evm alarm	radio	Major	2013-12-25 20:40:19	2013-12-25 20:40:21	
EVM too low	ant evm alarm	radio	Major	2013-12-25 14:15:57	2013-12-25 14:15:59	
EVM too low	ant evm alarm	radio	Major	2013-12-24 20:01:56	2013-12-24 20:01:58	
RSSI too Low	ant rssi alarm	radio	Major	2013-12-24 08:19:16	2013-12-24 08:21:00	
EVM too low	ant evm alarm	radio	Major	2013-12-24 08:19:16	2013-12-24 08:21:00	
Radio port link down	port down	ath1(wirele	Critical	2013-12-24 06:34:45	2013-12-24 08:19:16	
RSSI too Low	ant rssi alarm	radio	Major	2013-12-24 06:34:17	2013-12-24 06:34:45	
EVM too low	ant evm alarm	radio	Major	2013-12-24 06:34:17	2013-12-24 06:34:45	
Radio port link down	port down	ath1(wirele	Critical	2013-12-24 04:32:14	2013-12-24 04:32:18	
EVM too low	ant evm alarm	radio	Major	2013-12-24 04:31:01	2013-12-24 04:32:16	
Radio port link down	port down	ath1(wirele	Critical	2013-12-24 04:27:21	2013-12-24 04:27:25	
RSSI too Low	ant rssi alarm	radio	Major	2013-12-24 04:26:52	2013-12-24 04:27:23	
EVM too low	ant evm alarm	radio	Major	2013-12-24 04:26:52	2013-12-24 04:27:23	
RSSI too Low	ant rssi alarm	radio	Major	2013-12-24 04:26:42	2013-12-24 04:26:44	
EVM too low	ant evm alarm	radio	Major	2013-12-24 04:26:42	2013-12-24 04:26:44	
Radio port link down	port down	ath1(wirele	Critical	2013-12-23 12:10:10	2013-12-23 12:10:24	
RSSI too Low	ant rssi alarm	radio	Major	2013-12-23 12:09:42	2013-12-23 12:10:10	
EVM too low	ant evm alarm	radio	Major	2013-12-23 12:09:42	2013-12-23 12:10:10	

Showing 1 to 20 of 253 entries First Previous 1 2 3 4 5 Next Last

Clear Refresh

draft

8 Performance

8.1 Ethernet

Go to **Performance > Ethernet** page to see the Ethernet measurement.

FIGURE 42. Ethernet

Ethernet Measurement									
Port	InGood Octets	InUnicast Pkts	InDiscard Pkts	InErrored Pkts	Out Octets	OutUnicast Pkts	OutDiscard Pkts	OutError Pkts	Clear Counters
Eth1	15817713	87935	0	0	10855682	43071	0	0	☒ Clear
Eth2	17463996	61606	0	0	1406182	18335	0	0	☒ Clear
Ath1(wireless1)	0	0	0	0	0	0	0	0	☒ Clear

Clear Counters Refresh

8.2 Wireless

Go to **Performance > Wireless** page to see the Wireless measurement.

FIGURE 43. Wireless

Wireless Measurement						
Port	Tx Frames	Tx Frames Errors	Rx Frames OK	Rx Frames Errors	Rx Frames Discards	Clear Counters
Wireless #1	0	0	0	0	0	☒ Clear

Clear Counter Refresh

draft

9 Diagnostics

9.1 Link status

Go to **Diagnostics > Link Status** page to see the Wireless link status.

FIGURE 44. Link status




The interface for 'Wireless Link Status (Local)' features a dark red header bar with the title 'Wireless Link Status'. Below the header is a white input field containing the text 'Wireless Link Status' and a 'Join' button with a dropdown arrow. At the bottom of the interface is a red 'Refresh' button.

9.2 Link status trace

Go to **Diagnostics > Link Status Trace** page to see the link status trace.

FIGURE 45. Link status trace

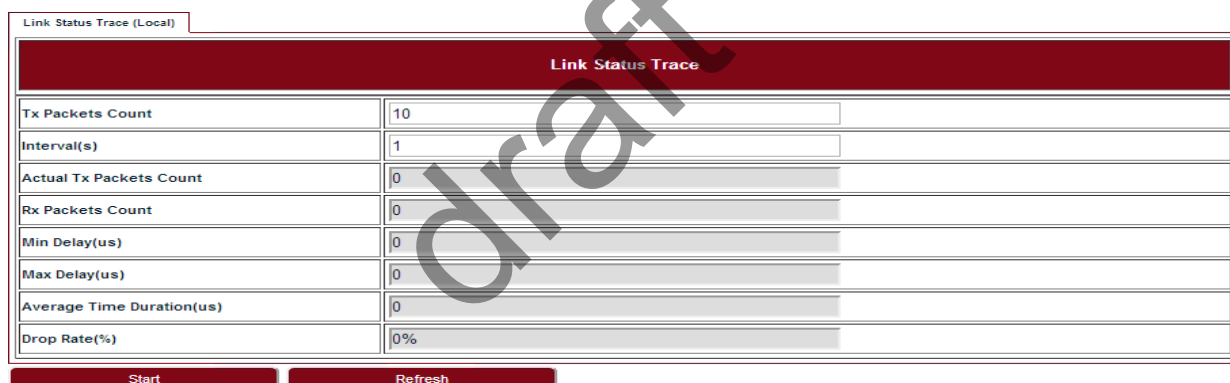

The 'Link Status Trace (Local)' interface has a dark red header bar with the title 'Link Status Trace'. Below the header is a table with the following data:

Tx Packets Count	10
Interval(s)	1
Actual Tx Packets Count	0
Rx Packets Count	0
Min Delay(us)	0
Max Delay(us)	0
Average Time Duration(us)	0
Drop Rate(%)	0%

At the bottom of the interface are two red buttons: 'Start' and 'Refresh'.

9.3 System running log

Go to **Diagnostics > System Running Log** page, click on "Download" to see the system running log.

FIGURE 46. System running log



The 'System Running Log (Local)' interface has a dark red header bar with the title 'System Running Log'. Below the header is a white input field with the label 'Log File:' and a blue 'Download' link.

draft

10 About

Go to the **About** page to see the information about the Link Viewer release.

FIGURE 47. About Link Viewer

About (Local)	
About Link Viewer	
Link Viewer Release	1.5.28
Release Date	2013-12-19

draft

draft

Operating Channel Declaration

Operating Channel List

Channels for 20MHz Channel Bandwidth

Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745 MHz	153	5765 MHz	157	5785 MHz
161	5805 MHz	165	5825 MHz	N/A	N/A

Channels for 40MHz Channel Bandwidth

Channel	Frequency	Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz	N/A	N/A

Note: There is no weather radar frequency band (5600-5650MHz) for the Microwave Outdoor Unit.

Declaration of Conformity for RF Exposure

This microwave outdoor unit product has been found to be compliant to the requirements set forth in CFR 47Section 1.1307 addressing RF Exposure from radio frequency devices as defined in Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.

Antennas with less than 23.5 dBi gain should be located at a minimum of 39.03 cm in more from the body of all persons.

Calculation Formula: $P_d = (P_{out} * G) / (4 * \pi * r^2)$

Where

P_d = power density in mW/cm²

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

π = 3.1416

r = distance between observation point and center of the radiator in cm

P_d is the limit of MPE, 1mW/cm².

If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance r where the MPE limit is reached.

Federal Communications Commission (FCC) Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generate, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

RF exposure warning

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 39.03 cm from all persons and must not be collocated or operating in conjunction with any other antenna or transmitter.